



RADIO TEST REPORT

Test Report No. 14146792S-A-R1

Customer	CASIO COMPUTER CO., LTD.
Description of EUT	Watch
Model Number of EUT	GA-B001 (Bluetooth Module: CW5690 is contained.)
FCC ID	BBQS34W
Test Regulation	FCC Part 15 Subpart C: 2022
Test Result	Complied (Refer to SECTION 3)
Issue Date	July 15, 2022
Remarks	-

Representative Test Engineer

Shiro Kobayashi
Engineer

Approved By

Akio Hayashi
Manager



CERTIFICATE 1266.03

- ☐ The testing in which "Non-accreditation" is displayed is outside the accreditation scopes in UL Japan, Inc.
- ☒ There is no testing item of "Non-accreditation".

Report Cover Page - Form-ULID-003532 (DCS:13-EM-F0429) Issue# 20.0

ANNOUNCEMENT

- This test report shall not be reproduced in full or partial, without the written approval of UL Japan, Inc.
- The results in this report apply only to the sample tested.
- This sample tested is in compliance with the limits of the above regulation.
- The test results in this test report are traceable to the national or international standards.
- This test report must not be used by the customer to claim product certification, approval, or endorsement by the A2LA accreditation body.
- This test report covers Radio technical requirements.
It does not cover administrative issues such as Manual or non-Radio test related Requirements. (if applicable)
- The all test items in this test report are conducted by UL Japan, Inc Shonan EMC Lab.
- The opinions and the interpretations to the result of the description in this report are outside scopes where UL Japan, Inc. has been accredited.
- The information provided from the applicant for this report is identified in Section 1.
- For test report(s) referred in this report, the latest version (including any revisions) is always referred.
- This report is a revised version of 14146792S-A. 14146792S-A is replaced with this report.

REVISION HISTORY

Original Test Report No.: 14146792S-A

Revision	Test Report No.	Date	Page Revised Contents
- (Original)	14146792S-A	April 13, 2022	-
-R1	14146792S-A-R1	July 15, 2022	Page 5 Changed the description from “Max.: DC 3.3 V” to “Max.: DC 3.1 V” in Rating of CW5690 (Module)

Reference: Abbreviations (Including words undescribed in this report)

A2LA	The American Association for Laboratory Accreditation	ICES	Interference-Causing Equipment Standard
AC	Alternating Current	IEC	International Electrotechnical Commission
AFH	Adaptive Frequency Hopping	IEEE	Institute of Electrical and Electronics Engineers
AM	Amplitude Modulation	IF	Intermediate Frequency
Amp, AMP	Amplifier	ILAC	International Laboratory Accreditation Conference
ANSI	American National Standards Institute	ISED	Innovation, Science and Economic Development Canada
Ant, ANT	Antenna	ISO	International Organization for Standardization
AP	Access Point	JAB	Japan Accreditation Board
ASK	Amplitude Shift Keying	LAN	Local Area Network
Atten., ATT	Attenuator	LIMS	Laboratory Information Management System
AV	Average	MCS	Modulation and Coding Scheme
BPSK	Binary Phase-Shift Keying	MRA	Mutual Recognition Arrangement
BR	Bluetooth Basic Rate	N/A	Not Applicable
BT	Bluetooth	NIST	National Institute of Standards and Technology
BT LE	Bluetooth Low Energy	NS	No signal detect.
BW	BandWidth	NSA	Normalized Site Attenuation
Cal Int	Calibration Interval	NVLAP	National Voluntary Laboratory Accreditation Program
CCK	Complementary Code Keying	OBW	Occupied Band Width
Ch., CH	Channel	OFDM	Orthogonal Frequency Division Multiplexing
CISPR	Comite International Special des Perturbations Radioelectriques	P/M	Power meter
CW	Continuous Wave	PCB	Printed Circuit Board
DBPSK	Differential BPSK	PER	Packet Error Rate
DC	Direct Current	PHY	Physical Layer
D-factor	Distance factor	PK	Peak
DFS	Dynamic Frequency Selection	PN	Pseudo random Noise
DQPSK	Differential QPSK	PRBS	Pseudo-Random Bit Sequence
DSSS	Direct Sequence Spread Spectrum	PSD	Power Spectral Density
EDR	Enhanced Data Rate	QAM	Quadrature Amplitude Modulation
EIRP, e.i.r.p.	Equivalent Isotropically Radiated Power	QP	Quasi-Peak
EMC	ElectroMagnetic Compatibility	QPSK	Quadri-Phase Shift Keying
EMI	ElectroMagnetic Interference	RBW	Resolution Band Width
EN	European Norm	RDS	Radio Data System
ERP, e.r.p.	Effective Radiated Power	RE	Radio Equipment
EU	European Union	RF	Radio Frequency
EUT	Equipment Under Test	RMS	Root Mean Square
Fac.	Factor	RSS	Radio Standards Specifications
FCC	Federal Communications Commission	Rx	Receiving
FHSS	Frequency Hopping Spread Spectrum	SA, S/A	Spectrum Analyzer
FM	Frequency Modulation	SG	Signal Generator
Freq.	Frequency	SVSWR	Site-Voltage Standing Wave Ratio
FSK	Frequency Shift Keying	TR	Test Receiver
GFSK	Gaussian Frequency-Shift Keying	Tx	Transmitting
GNSS	Global Navigation Satellite System	VBW	Video BandWidth
GPS	Global Positioning System	Vert.	Vertical
Hori.	Horizontal	WLAN	Wireless LAN

CONTENTS	PAGE
SECTION 1: Customer Information	5
SECTION 2: Equipment Under Test (EUT).....	5
SECTION 3: Test Specification, Procedures & Results.....	6
SECTION 4: Operation of EUT during testing	9
SECTION 5: Radiated Spurious Emission	11
SECTION 6: Antenna Terminal Conducted Tests.....	14
APPENDIX 1: Test Data.....	15
99 % Occupied Bandwidth and 6 dB Bandwidth.....	15
Maximum Peak Output Power	17
Average Output Power	18
Radiated Spurious Emission	20
Conducted Spurious Emission	26
Power Density	29
APPENDIX 2: Test Instruments	31
APPENDIX 3: Photographs of Test Setup	33
Radiated Spurious Emission	33
Pre-check of Worst Case Position.....	34
Antenna Terminal Conducted Tests.....	35

SECTION 1: Customer Information

Company Name	CASIO COMPUTER CO., LTD.
Address	2-1, Sakaecho 3 chome, Hamura-shi, Tokyo 205-8555 Japan
Telephone Number	+81-42-579-7282
Contact Person	Shuji Yamashita

The information provided from the customer is as follows;

- Customer, Description of EUT, Model Number of EUT, FCC ID on the cover and other relevant pages
- Operating/Test Mode(s) (Mode(s)) on all the relevant pages
- SECTION 1: Customer Information
- SECTION 2: Equipment Under Test (EUT) other than the Receipt Date and Test Date
- SECTION 4: Operation of EUT during testing

* The laboratory is exempted from liability of any test results affected from the above information in SECTION 2 and 4.

SECTION 2: Equipment Under Test (EUT)

2.1 Identification of EUT

Description	Watch
Model Number	GA-B001
Serial Number	Refer to SECTION 4.2
Alternative name	R042
Condition	Production prototype (Not for Sale: This sample is equivalent to mass-produced items.)
Modification	No Modification by the test lab
Receipt Date	March 16, 2022
Test Date	March 18 to 28, 2022

2.2 Product Description

General Specification

Rating	GA-B001 (Watch): Typical: DC 3.0 V, Min.: DC 1.9 V, Max.: DC 3.1 V CW5690 (Module): Typical: DC 3.0 V, Min.: DC 1.9 V, Max.: DC 3.1 V
Operating temperature	-10 deg. C to +60 deg. C

Radio Specification

Equipment Type	Transceiver
Frequency of Operation	2402 MHz to 2480 MHz
Type of Modulation	GFSK
Antenna Type	Chip Antenna
Antenna Gain	2.5 dBi

SECTION 3: Test Specification, Procedures & Results

3.1 Test Specification

Test Specification	FCC Part 15 Subpart C FCC Part 15 final revised on April 1, 2022 and effective May 2, 2022
Title	FCC 47 CFR Part 15 Radio Frequency Device Subpart C Intentional Radiators Section 15.207 Conducted limits Section 15.247 Operation within the bands 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz

* The revision does not affect the test result conducted before its effective date.

* Also the EUT complies with FCC Part 15 Subpart B.

3.2 Procedures and Results

Item	Test Procedure	Specification	Worst Margin	Results	Remarks
Conducted Emission	FCC: ANSI C63.10-2013 6. Standard test methods ISED: RSS-Gen 8.8	FCC: Section 15.207 ISED: RSS-Gen 8.8	N/A	N/A	*1)
6 dB Bandwidth	FCC: KDB 558074 D01 15.247 Meas Guidance v05r02 ISED: -	FCC: Section 15.247(a)(2) ISED: RSS-247 5.2(a)	See data.	Complied a)	Conducted
Maximum Peak Output Power	FCC: KDB 558074 D01 15.247 Meas Guidance v05r02 ISED: RSS-Gen 6.12	FCC: Section 15.247(b)(3) ISED: RSS-247 5.4(d)		Complied b)	Conducted
Power Density	FCC: KDB 558074 D01 15.247 Meas Guidance v05r02 ISED: -	FCC: Section 15.247(e) ISED: RSS-247 5.2(b)		Complied c)	Conducted
Spurious Emission Restricted Band Edges	FCC: KDB 558074 D01 15.247 Meas Guidance v05r02 ISED: RSS-Gen 6.13	FCC: Section 15.247(d) ISED: RSS-247 5.5 RSS-Gen 8.9 RSS-Gen 8.10	9.0 dB 2483.500 MHz, AV, Hori. Mode: Tx BT LE 2480 MHz	Complied d), e)	Conducted (below 30 MHz)/ Radiated
Note: UL Japan, Inc.'s EMI Work Procedures: Work Instructions-ULID-003591 and Work Instructions-ULID-003593. * In case any questions arise about test procedure, ANSI C63.10: 2013 is also referred.					
*1) The test is not applicable since the EUT does not have AC mains.					
a) Refer to APPENDIX 1 (data of 99 % Occupied Bandwidth and 6 dB Bandwidth) b) Refer to APPENDIX 1 (data of Maximum Peak Output Power) c) Refer to APPENDIX 1 (data of Power Density) d) Refer to APPENDIX 1 (data of Conducted Spurious Emission) e) Refer to APPENDIX 1 (data of Radiated Spurious Emission)					
Symbols: Complied The data of this test item has enough margin, more than the measurement uncertainty. Complied# The data of this test item meets the limits unless the measurement uncertainty is taken into consideration					

FCC Part 15.31 (e)

The EUT provides stable voltage constantly to the RF part regardless of input voltage.

Instead of a new battery, DC power supply was used for the test. That does not affect the test result, therefore the EUT complies with the requirement.

FCC Part 15.203 Antenna requirement

It is impossible for end users to replace the antenna, because the antenna is mounted inside of the EUT. Therefore, the equipment complies with the requirement.

3.3 Addition to Standard

Item	Test Procedure	Specification	Worst Margin	Results	Remarks
99 % Occupied Bandwidth	ISED: RSS-Gen 6.7	ISED: -	N/A	Complied a)	Conducted
a) Refer to APPENDIX 1 (data of 99 % Occupied Bandwidth and 6 dB Bandwidth)					

Other than above, no addition, exclusion nor deviation has been made from the standard.

3.4 Uncertainty

There is no applicable rule of uncertainty in this applied standard. Therefore, the results are derived depending on whether or not laboratory uncertainty is applied.

The following uncertainties have been calculated to provide a confidence level of 95 % using a coverage factor $k=2$.

Shonan EMC Lab.

Item	Frequency range	Uncertainty (+/-)			
		No. 1 SAC / SR	No. 2 SAC / SR	No. 3 SAC / SR	No. 4,5,6,8 SR
Conducted emission (AC Mains) LISN	150 kHz-30 MHz	2.9 dB	2.9 dB	3.0 dB	2.9 dB
Radiated emission (Measurement distance: 3 m)	9 kHz-30 MHz	3.2 dB	3.1 dB	3.1 dB	-
	30 MHz-200 MHz	4.6 dB	4.6 dB	4.6 dB	-
	200 MHz-1 GHz	6.0 dB	6.1 dB	6.1 dB	-
	1 GHz-6 GHz	4.7 dB	4.7 dB	4.7 dB	-
	6 GHz-18 GHz	5.2 dB	5.3 dB	5.3 dB	-
	18 GHz-40 GHz	5.4 dB	5.5 dB	5.5 dB	-
Radiated emission (Measurement distance: 1 m)	1 GHz-18 GHz	5.6 dB	5.6 dB	5.6 dB	-
	18 GHz-40 GHz	5.8 dB	5.8 dB	5.8 dB	-

SAC=Semi-Anechoic Chamber

SR= Shielded Room is applied besides radiated emission

Antenna terminal test	Uncertainty (+/-)
Power Measurement above 1 GHz (Average Detector)_SPM-06	1.2 dB
Power Measurement above 1 GHz (Peak Detector)_SPM-06	2.0 dB
Power Measurement above 1 GHz (Average Detector)_SPM-07	1.2 dB
Power Measurement above 1 GHz (Peak Detector)_SPM-07	1.3 dB
Power Measurement above 1 GHz (Average Detector)_SPM-13	1.3 dB
Power Measurement above 1 GHz (Peak Detector)_SPM-13	1.3 dB
Spurious emission (Conducted) below 1 GHz	0.93 dB
Conducted emissions Power Density Measurement 1 GHz-3 GHz	0.92 dB
Conducted emissions Power Density Measurement 3 GHz-18 GHz	2.3 dB
Spurious emission (Conducted) 18 GHz-26.5 GHz	2.3 dB
Spurious emission (Conducted) 26.5 GHz-40 GHz	2.3 dB
Bandwidth Measurement	0.012 %
Duty cycle and Time Measurement	0.27 %
Temperature_SCH-01	0.93 deg.C.
Humidity_SCH-01	4.1 %
Temperature_SCH-02	2.0 deg.C.
Humidity_SCH-02	6.6 %
Voltage	0.97 %

3.5 Test Location

UL Japan, Inc. Shonan EMC Lab.

1-22-3, Megumigaoka, Hiratsuka-shi, Kanagawa-ken 259-1220 JAPAN

Telephone: +81 463 50 6400, Facsimile: +81 463 50 6401

A2LA Certificate Number: 1266.03

(FCC test firm registration number: 626366, ISED lab company number: 2973D / CAB identifier: JP0001)

Test site	IC Registration Number	Width x Depth x Height (m)	Size of reference ground plane (m) / horizontal conducting plane	Maximum measurement distance
No.1 Semi-anechoic chamber	2973D-1	20.6 x 11.3 x 7.65	20.6 x 11.3	10 m
No.2 Semi-anechoic chamber	2973D-2	20.6 x 11.3 x 7.65	20.6 x 11.3	10 m
No.3 Semi-anechoic chamber	2973D-3	12.7 x 7.7 x 5.35	12.7 x 7.7	5 m
No.4 Semi-anechoic chamber	-	8.1 x 5.1 x 3.55	8.1 x 5.1	-
No.1 Shielded room	-	6.8 x 4.1 x 2.7	6.8 x 4.1	-
No.2 Shielded room	-	6.8 x 4.1 x 2.7	6.8 x 4.1	-
No.3 Shielded room	-	6.3 x 4.7 x 2.7	6.3 x 4.7	-
No.4 Shielded room	-	4.4 x 4.7 x 2.7	4.4 x 4.7	-
No.5 Shielded room	-	7.8 x 6.4 x 2.7	7.8 x 6.4	-
No.6 Shielded room	-	7.8 x 6.4 x 2.7	7.8 x 6.4	-
No.8 Shielded room	-	3.45 x 5.5 x 2.4	3.45 x 5.5	-
No.1 Measurement room	-	2.55 x 4.1 x 2.5	-	-

3.6 Test Data, Test Instruments, and Test Set Up

Refer to APPENDIX.

SECTION 4: Operation of EUT during testing


4.1 Operating Mode(s)

Mode	Remarks*
Bluetooth Low Energy (BT LE)	1 M-PHY Uncoded PHY, Maximum Packet Size, PRBS9
*Power of the EUT was set by the software as follows; Power Setting: Fixed Software: BLE RF Test Version: 9.9 (Date: 2022.03 18, Storage location: EUT memory) *This setting of software is the worst case. Any conditions under the normal use do not exceed the condition of setting. In addition, end users cannot change the settings of the output power of the product.	

*The Details of Operating Mode(s)

Test Item	Operating Mode	Tested frequency
Radiated Spurious Emission (Below 1 GHz)	Tx BT LE	2402 MHz *1)
Radiated Spurious Emission (Above 1 GHz), Maximum Peak Output Power, Power Density, 6 dB Bandwidth, 99 % Occupied Bandwidth, Conducted Spurious Emission	Tx BT LE	2402 MHz 2440 MHz 2480 MHz
*1) Spurious emissions for frequencies below 1 GHz were limited to the channel that had the highest power during the antenna terminal test, as preliminary testing indicated that changing the operating frequency had no significant impact on the emissions in those frequency bands.		

4.2 Configuration and Peripherals



* Cabling and setup(s) were taken into consideration and test data was taken under worse case conditions.

Description of EUT and Support equipment

No.	Item	Model number	Serial number	Manufacturer	Remarks
A	Watch	GA-B001	87 *1) 89 *2)	CASIO	EUT
B	Power Supply(DC)	PAN35-10A	DE001677	KIKUSUI	-

List of cables used

No.	Name	Length (m)	Shield		Remarks
			Cable	Connector	
1	DC	0.1	Unshielded	Unshielded	*3)
2	DC	0.1	Unshielded	Unshielded	*3)
3	Signal	0.1	Unshielded	Unshielded	*4)
4	DC	0.4 *1) 2.0 *2)	Unshielded	Unshielded	Extension
5	DC	0.4 *1) 2.0 *2)	Unshielded	Unshielded	Extension
6	AC	2.0	Unshielded	Unshielded	-

*1) Used for Antenna Terminal conducted test

*2) Used for Radiated Emission test

*3) Cable for test operation

*4) Cable for system reset during the development, not used for the product

SECTION 5: Radiated Spurious Emission

Test Procedure

It was measured based on "8.5 and 8.6 of KDB 558074 D01 15.247 Meas Guidance v05r02".

[For below 1 GHz]

EUT was placed on a urethane platform of nominal size, 1.5 m by 1.0 m, raised 0.8 m above the conducting ground plane. The Radiated Electric Field Strength has been measured in a Semi Anechoic Chamber with a ground plane.

[For above 1 GHz]

EUT was placed on a urethane platform of nominal size, 0.5 m by 0.5 m, raised 1.5 m above the conducting ground plane. The Radiated Electric Field Strength has been measured in a Semi Anechoic Chamber with absorbent materials lined on a ground plane.

Frequency: From 9 kHz to 30 MHz

The EUT was rotated a full revolution in order to obtain the maximum value of the electric field intensity.

The measurements were performed for vertical polarization (antenna angle: 0 deg., 45 deg., 90 deg., and 135 deg.) and horizontal polarization.

*Refer to Figure 1 about Direction of the Loop Antenna.

Frequency: From 30 MHz to 26.5 GHz

The height of the measuring antenna varied between 1 m and 4 m and EUT was rotated a full revolution in order to obtain the maximum value of the electric field strength.

Test antenna was aimed at the EUT for receiving the maximum signal and always kept within the illumination area of the 3 dB beamwidth of the antenna. The measurements were performed for both vertical and horizontal antenna polarization with the Test Receiver, or the Spectrum Analyzer.

The measurements were made with the following detector function of the test receiver and the Spectrum analyzer (in linear mode).

The test was made with the detector (RBW/VBW) in the following table.

When using Spectrum analyzer, the test was made with adjusting span to zero by using peak hold.

Test Antennas are used as below;

Frequency	Below 30 MHz	30 MHz to 200 MHz	200 MHz to 1 GHz	Above 1 GHz
Antenna Type	Loop	Biconical	Logperiodic	Horn

In any 100 kHz bandwidth outside the restricted band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator confirmed 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on a radiated measurement.

20 dBc was applied to the frequency over the limit of FCC 15.209 / Table 4 of RSS-Gen 8.9(ISED) and outside the restricted band of FCC15.205 / Table 6 of RSS-Gen 8.10 (ISED).

Frequency	9 kHz to 90 kHz & 110 kHz to 150 kHz	90 kHz to 110 kHz	150 kHz to 490 kHz	490 kHz to 30 MHz
Instrument Used	Test Receiver			
Detector Type	PK/AV	QP	PK/AV	QP
IF Bandwidth	200 Hz	200 Hz	10 kHz	9 kHz
Distance factor *1)	-80 dB	-80 dB	-80 dB	-40 dB

*1) FCC 15.31 (f)(2) (9 kHz-30 MHz)

Distance Factor: $40 \times \log(3 \text{ m} / 300 \text{ m}) = -80 \text{ dB}$



Distance Factor: $40 \times \log(3 \text{ m} / 30 \text{ m}) = -40 \text{ dB}$

Frequency	30 MHz to 1 GHz	Above 1 GHz		20 dBc
Instrument Used	Test Receiver	Spectrum Analyzer		Spectrum Analyzer
Detector	QP	PK	AV *2)	PK
IF Bandwidth	BW 120 kHz	RBW: 1 MHz VBW: 3 MHz	11.12.2.5.2 RBW: 1 MHz VBW: 3 MHz Detector: Power Averaging (Linear voltage) Trace: 100 traces Duty factor was added to the results.	RBW: 100 kHz VBW: 300 kHz

*2) Average Power Measurement was performed based on ANSI C63.10-2013.


Figure 1: Direction of the Loop Antenna

Side View (Vertical)





Front side: 0 deg.
Forward direction: clockwise

Top View (Vertical)



Front side: 0 deg.
Forward direction: clockwise


Top View (Horizontal)



Antenna was not rotated.


Figure 2: Test Setup

Below 1 GHz

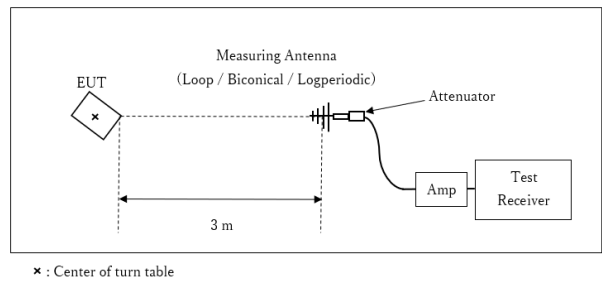

Test Distance: 3 m


1 GHz to 10 GHz

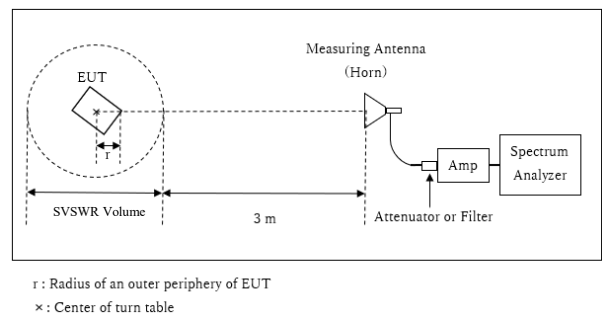

Distance Factor: $20 \times \log (3.97 \text{ m} / 3.0 \text{ m}) = 2.44 \text{ dB}$
* Test Distance: $(3 + \text{SVSWR Volume} / 2) - r = 3.97 \text{ m}$

SVSWR Volume : 2.0 m
(SVSWR Volume has been calibrated based on CISPR 16-1-4.)
 $r = 0.03 \text{ m}$

10 GHz to 26.5 GHz

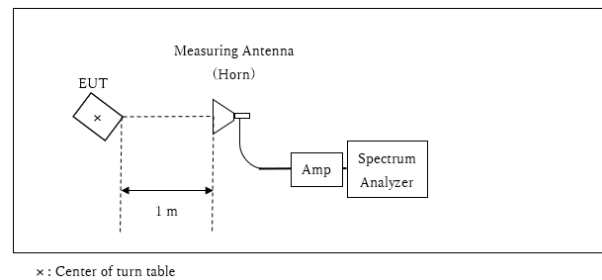

Distance Factor: $20 \times \log (1.0 \text{ m} / 3.0 \text{ m}) = -9.54 \text{ dB}$
*Test Distance: 1 m

- The carrier level and noise levels were confirmed at each position of X, Y and Z axes of EUT to see the position of maximum noise, and the test was made at the position that has the maximum noise.

Antenna polarization	Carrier	Spurious (Below 30 MHz)	Spurious (30 MHz - 1 GHz)	Spurious (1 GHz - 2.8 GHz)	Spurious (2.8 GHz - 10 GHz)	Spurious (10 GHz - 18 GHz)	Spurious (18 GHz - 26.5 GHz)
Horizontal	Z	X	X	Z	Y	X	X
Vertical	Z	X	X	Z	X	X	X

The test results and limit are rounded off to one decimal place, so some differences might be observed.

Measurement Range

Test Data

Test Result

: 9 kHz to 26.5 GHz

: APPENDIX

: Pass

SECTION 6: Antenna Terminal Conducted Tests

Test Procedure

The tests were made with below setting connected to the antenna port.

Test	Span	RBW	VBW	Sweep time	Detector	Trace	Instrument Used
6 dB Bandwidth	3 MHz	100 kHz	300 kHz	Auto	Peak	Max Hold	Spectrum Analyzer
99 % Occupied Bandwidth *1)	Enough width to display emission skirts	1 to 5 % of OBW	Three times of RBW	Auto	Peak	Max Hold	Spectrum Analyzer
Maximum Peak Output Power	-	-	-	Auto	Peak/ Average *2)	-	Power Meter (Sensor: 160 MHz BW)
Peak Power Density	1.5 times the 6 dB Bandwidth	3 kHz	10 kHz	Auto	Peak	Max Hold	Spectrum Analyzer *3)
Conducted Spurious Emission *4) *5)	9 kHz to 150 kHz	200 Hz	620 Hz	Auto	Peak	Max Hold	Spectrum Analyzer
	150 kHz to 30 MHz	9.1 kHz	27 kHz				
*1) Peak hold was applied as Worst-case measurement. *2) Reference data *3) Section 11.10.2 Method PKPSD (peak PSD) of "ANSI C63.10-2013". *4) In the frequency range below 30 MHz, RBW was narrowed to separate the noise contents. Then, wide-band noise near the limit was checked separately and the noise was detected as shown in the chart, and therefore, Radiated Emission below 30 MHz was performed. *5) The limits in CFR 47, Part 15, Subpart C, paragraph 15.209(a), are identical to those in RSS-Gen section 8.9, Table 6, since the measurements are performed in terms of magnetic field strength and converted to electric field strength levels (as reported in the table) using the free space impedance of 377 Ohms. For example, the measurement at frequency 9 kHz resulted in a level of 45.5 dBuV/m, which is equivalent to 45.5 – 51.5 = -6.0 dBuA/m, which has the same margin, 3 dB, to the corresponding RSS-Gen Table 6 limit as it has to 15.209(a) limit.							

The test results and limit are rounded off to two decimals place, so some differences might be observed.
 The equipment and cables were not used for factor 0 dB of the data sheets.

Test Data : APPENDIX

Test Result : Pass

APPENDIX 1: Test Data

99 % Occupied Bandwidth and 6 dB Bandwidth


Test place	Shonan EMC Lab. No.5 Shielded Room
Date	March 18, 2022
Temperature / Humidity	23 deg. C / 32 % RH
Engineer	Shiro Kobayashi
Mode	Tx BT LE

BT LE 1 M-PHY

Frequency [MHz]	99 % Occupied Bandwidth [kHz]	6 dB Bandwidth [MHz]	Limit for 6 dB Bandwidth [MHz]
2402	1050.7	0.679	> 0.5000
2440	1057.0	0.688	> 0.5000
2480	1056.5	0.695	> 0.5000

99 % Occupied Bandwidth and 6 dB Bandwidth

BT LE

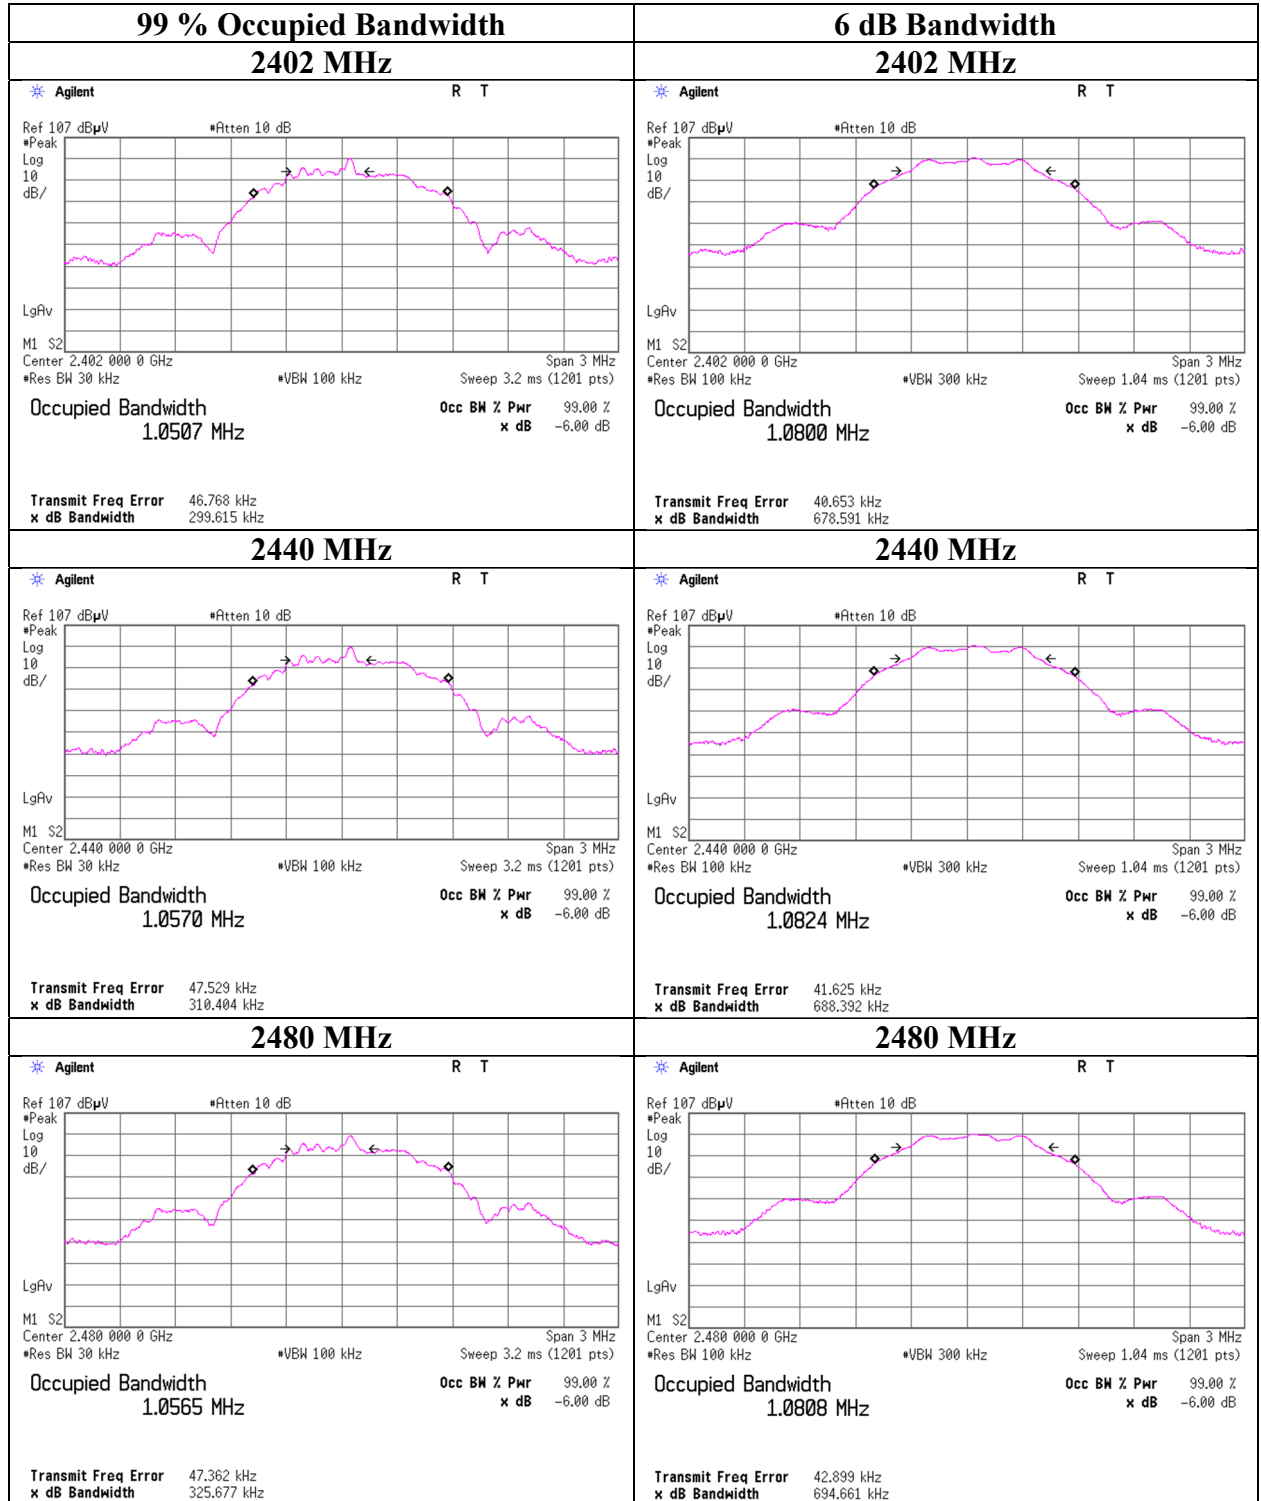

Maximum Peak Output Power

Test place	Shonan EMC Lab. No.5 Shielded Room
Date	March 18, 2022
Temperature / Humidity	23 deg. C / 32 % RH
Engineer	Shiro Kobayashi
Mode	Tx BT LE

Freq.	Reading	Cable Loss	Atten. Loss	Conducted Power					e.i.r.p. for RSS-247					
				Result		Limit		Margin	Antenna Gain	Result		Limit		Margin
				[dBm]	[mW]	[dBm]	[mW]			[dBm]	[mW]	[dBm]	[mW]	
2402	-9.21	1.15	9.64	1.58	1.44	30.00	1000	28.42	2.50	4.08	2.56	36.02	4000	31.94
2440	-9.26	1.16	9.64	1.54	1.43	30.00	1000	28.46	2.50	4.04	2.54	36.02	4000	31.98
2480	-9.29	1.16	9.64	1.51	1.42	30.00	1000	28.49	2.50	4.01	2.52	36.02	4000	32.01

Sample Calculation:

Result = Reading + Cable Loss (including the cable(s) customer supplied) + Attenuator Loss

e.i.r.p. Result = Conducted Power Result + Antenna Gain

Average Output Power
(Reference data for RF Exposure)


Test place	Shonan EMC Lab. No.5 Shielded Room
Date	March 18, 2022
Temperature / Humidity	23 deg. C / 32 % RH
Engineer	Shiro Kobayashi
Mode	Tx BT LE

Freq. [MHz]	Reading [dBm]	Cable Loss [dB]	Atten. Loss [dB]	Result (Time average)		Duty factor [dB]	Result (Burst power average)	
				[dBm]	[mW]		[dBm]	[mW]
2402	-11.33	1.15	9.64	-0.54	0.88	1.67	1.13	1.30
2440	-11.36	1.16	9.64	-0.56	0.88	1.67	1.11	1.29
2480	-11.45	1.16	9.64	-0.65	0.86	1.67	1.02	1.26

Burst rate confirmation

Test place Shonan EMC Lab. No.5 Shielded Room
Date March 18, 2022
Temperature / Humidity 23 deg. C / 32 % RH
Engineer Shiro Kobayashi
Mode Tx BT LE

BT LE

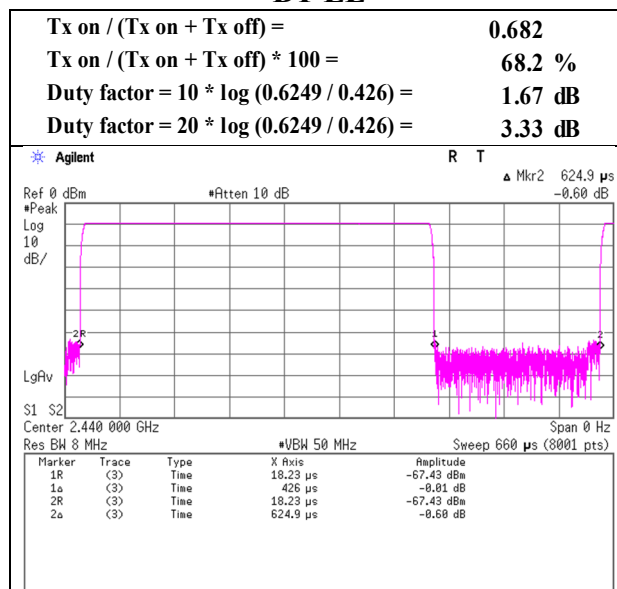

* Since the burst rate is not different between the channels, the data has been obtained on the representative channel.

Radiated Spurious Emission

Test place	Shonan EMC Lab.		
Semi Anechoic Chamber	1	3	3
Date	March 28, 2022	March 22, 2022	March 23, 2022
Temperature / Humidity	25 deg.C, 32 %RH	22 deg.C, 32 %RH	22 deg.C, 28 %RH
Engineer	Shiro Kobayashi (Below 30 MHz)	Yosuke Murakami (30 MHz -1 GHz)	Miku Ikudome (1 GHz -26.5 GHz)
Mode	Tx BT LE 2402 MHz		

*Below 30 MHz was not detected noises.

(* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [deg]	Remark
Hori.	31.678	QP	21.70	17.97	7.07	31.84	0.00	14.90	40.0	25.1	100	0	-
Hori.	176.668	QP	21.20	16.09	8.96	31.78	0.00	14.47	43.5	29.0	100	0	-
Hori.	823.802	QP	20.90	20.87	9.52	31.76	0.00	19.53	46.0	26.4	100	0	-
Hori.	938.906	QP	20.50	21.91	10.05	31.12	0.00	21.34	46.0	24.6	100	0	-
Hori.	2390.000	PK	47.10	27.85	13.67	41.63	2.44	49.43	73.9	24.4	100	167	-
Hori.	4804.000	PK	50.41	31.17	5.86	42.87	2.44	47.01	73.9	26.8	140	24	-
Hori.	7206.000	PK	48.01	36.88	7.12	43.39	2.44	51.06	73.9	22.8	150	0	-
Hori.	7206.000	AV	39.39	36.88	7.12	43.39	2.44	42.44	53.9	11.4	150	0	Floor Noise
Vert.	30.041	QP	21.40	18.59	7.03	31.84	0.00	15.18	40.0	24.8	100	0	-
Vert.	189.461	QP	21.40	16.50	8.98	31.77	0.00	15.11	43.5	28.3	100	0	-
Vert.	769.014	QP	21.30	20.44	9.23	31.92	0.00	19.05	46.0	26.9	100	0	-
Vert.	907.017	QP	20.80	22.15	9.93	31.29	0.00	21.59	46.0	24.4	100	0	-
Vert.	2390.000	PK	47.29	27.85	13.67	41.63	2.44	49.62	73.9	24.2	247	90	-
Vert.	4804.000	PK	50.67	31.17	5.86	42.87	2.44	47.27	73.9	26.6	113	359	-
Vert.	7206.000	PK	48.70	36.88	7.12	43.39	2.44	51.75	73.9	22.1	150	0	-
Vert.	7206.000	AV	39.38	36.88	7.12	43.39	2.44	42.43	53.9	11.4	150	0	Floor Noise

Result = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

Distance factor : 1 GHz - 10 GHz : $20\log(3.97\text{ m} / 3.0\text{ m}) = 2.44\text{ dB}$

10 GHz - 40 GHz : $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.54\text{ dB}$

Average measurement value with duty factor

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Distance Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori.	2390.000	AV	38.30	27.85	13.67	41.63	3.33	2.44	43.96	53.9	9.9	*1)
Hori.	4804.000	AV	42.18	31.17	5.86	42.87	3.33	2.44	42.11	53.9	11.7	-
Vert.	2390.000	AV	37.93	27.85	13.67	41.63	3.33	2.44	43.59	53.9	10.3	*1)
Vert.	4804.000	AV	42.25	31.17	5.86	42.87	3.33	2.44	42.18	53.9	11.7	-

Result = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Duty factor + Distance factor

Distance factor : 1 GHz - 10 GHz : $20\log(3.97\text{ m} / 3.0\text{ m}) = 2.44\text{ dB}$

10 GHz - 40 GHz : $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.54\text{ dB}$

Duty factor refer to "Burst rate confirmation" sheet.

*1) Not out of band emission (Leakage Power)

20 dBc Data Sheet (RBW 100 kHz, VBW 300 kHz)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori.	2402.000	PK	75.67	27.83	13.68	41.64	2.44	77.98	-	-	Carrier
Hori.	2400.000	PK	38.14	27.83	13.68	41.64	2.44	40.45	57.9	17.4	-
Vert.	2402.000	PK	74.43	27.83	13.68	41.64	2.44	76.74	-	-	Carrier
Vert.	2400.000	PK	38.79	27.83	13.68	41.64	2.44	41.10	56.7	15.6	-



Result = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

Distance factor : 1 GHz - 10 GHz : $20\log(3.97\text{ m} / 3.0\text{ m}) = 2.44\text{ dB}$

10 GHz - 40 GHz : $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.54\text{ dB}$

Radiated Spurious Emission (Reference Plot for band-edge)

Test place	Shonan EMC Lab.
Semi Anechoic Chamber	3
Date	March 23, 2022
Temperature / Humidity	22 deg.C, 28 %RH
Engineer	Miku Ikudome
Mode	Tx BT LE 2402 MHz

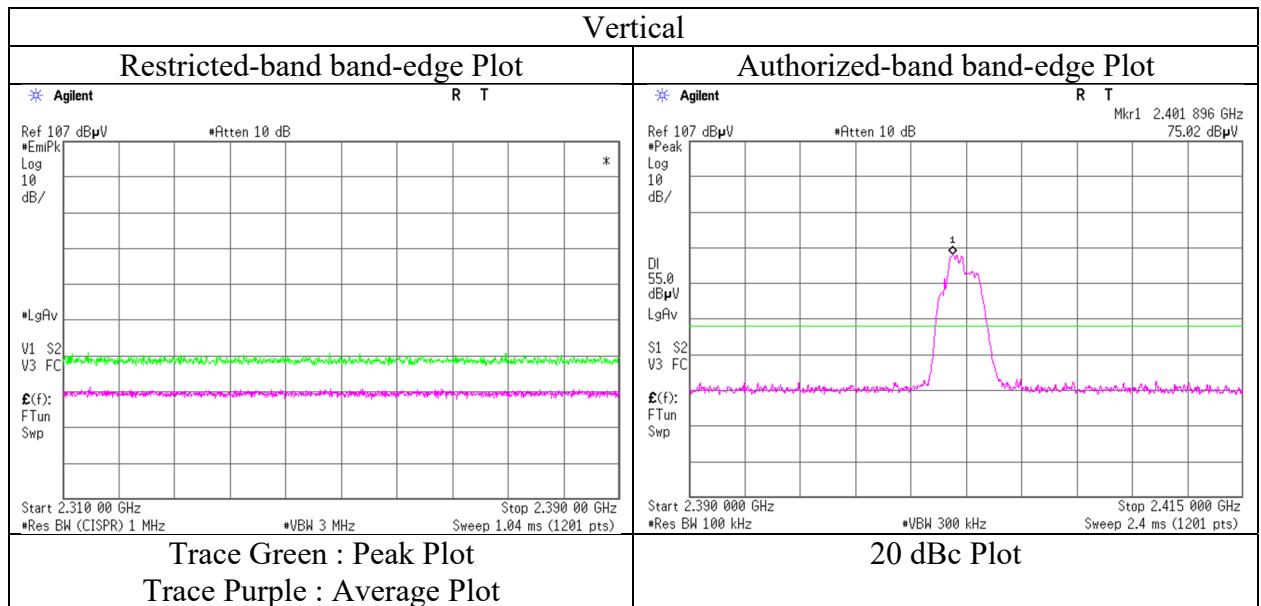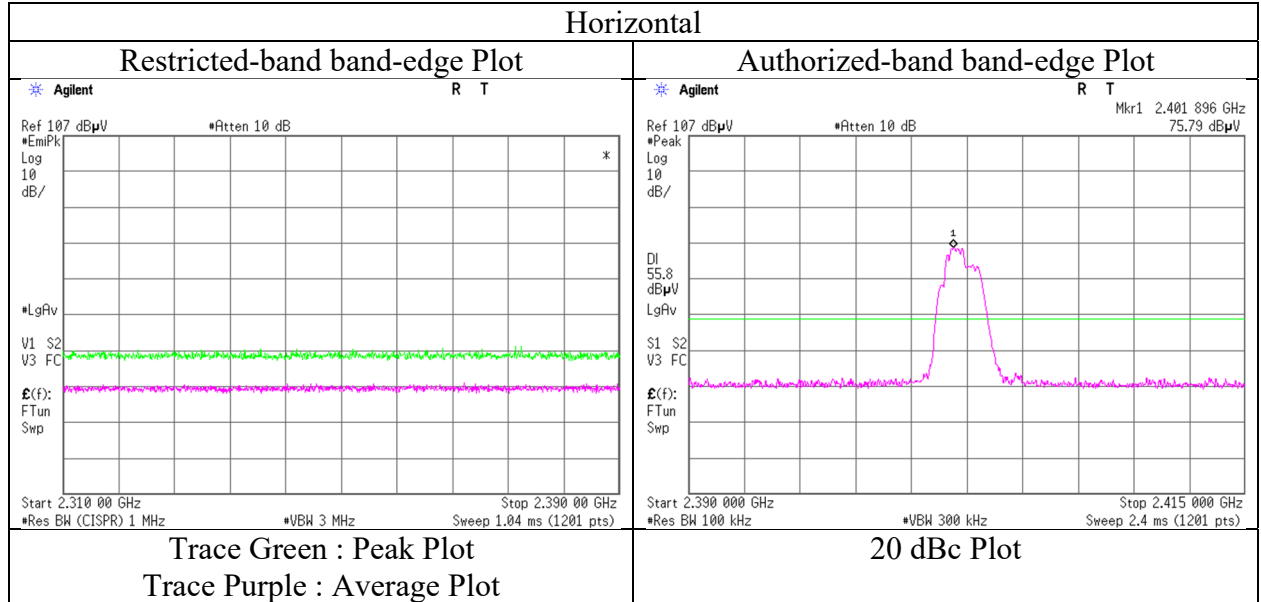

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.
Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Test place Shonan EMC Lab.
Semi Anechoic Chamber 3
Date March 23, 2022
Temperature / Humidity 22 deg.C, 28 %RH
Engineer Miku Ikudome
 (1 GHz -26.5 GHz)
Mode Tx BT LE 2440 MHz

(* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [deg]	Remark
Hori.	4880.000	PK	49.34	31.23	5.90	42.83	2.44	46.08	73.9	27.8	142	189	-
Hori.	7320.000	PK	48.65	36.92	7.17	43.52	2.44	51.66	73.9	22.2	150	0	-
Hori.	7320.000	AV	38.89	36.92	7.17	43.52	2.44	41.90	53.9	12.0	150	0	Floor Noise
Vert.	4880.000	PK	50.96	31.23	5.90	42.83	2.44	47.70	73.9	26.2	123	350	-
Vert.	7320.000	PK	48.84	36.92	7.17	43.52	2.44	51.85	73.9	22.0	150	0	-
Vert.	7320.000	AV	39.58	36.92	7.17	43.52	2.44	42.59	53.9	11.3	150	0	Floor Noise

Result = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

Distance factor : 1 GHz - 10 GHz : $20\log(3.97\text{ m} / 3.0\text{ m}) = 2.44\text{ dB}$

10 GHz - 40 GHz : $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.54\text{ dB}$

Average measurement value with duty factor

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Distance Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori.	4880.000	AV	40.79	31.23	5.90	42.83	3.33	2.44	40.86	53.9	13.0	-
Vert.	4880.000	AV	42.64	31.23	5.90	42.83	3.33	2.44	42.71	53.9	11.1	-

Result = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Duty factor + Distance factor

Distance factor : 1 GHz - 10 GHz : $20\log(3.97\text{ m} / 3.0\text{ m}) = 2.44\text{ dB}$

10 GHz - 40 GHz : $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.54\text{ dB}$

Duty factor refer to "Burst rate confirmation" sheet.

Radiated Spurious Emission

Test place	Shonan EMC Lab.	
Semi Anechoic Chamber	1	3
Date	March 28, 2022	March 23, 2022
Temperature / Humidity	25 deg.C, 32 %RH	22 deg.C, 28 %RH
Engineer	Shiro Kobayashi	Miku Ikudome
	(1 GHz -10 GHz)	(10 GHz -26.5 GHz)
Mode	Tx BT LE 2480 MHz	

(* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [deg]	Remark
Hori.	2483.500	PK	44.54	27.72	14.97	39.64	2.44	50.03	73.9	23.8	368	55	-
Hori.	4960.000	PK	48.07	31.40	7.76	39.72	2.44	49.95	73.9	23.9	129	11	-
Hori.	7440.000	PK	44.48	37.02	9.62	39.42	2.44	54.14	73.9	19.7	150	0	-
Hori.	7440.000	AV	35.44	37.02	9.62	39.42	2.44	45.10	53.9	8.8	150	0	Floor Noise
Vert.	2483.500	PK	45.56	27.72	14.97	39.64	2.44	51.05	73.9	22.8	303	306	-
Vert.	4960.000	PK	46.27	31.40	7.76	39.72	2.44	48.15	73.9	25.7	100	357	-
Vert.	7440.000	PK	44.24	37.02	9.62	39.42	2.44	53.90	73.9	20.0	150	0	-
Vert.	7440.000	AV	35.69	37.02	9.62	39.42	2.44	45.35	53.9	8.5	150	0	Floor Noise

Result = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

Distance factor : 1 GHz - 10 GHz : $20\log(3.97\text{ m} / 3.0\text{ m}) = 2.44\text{ dB}$

10 GHz - 40 GHz : $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.54\text{ dB}$

Average measurement value with duty factor

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Distance Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori.	2483.500	AV	36.07	27.72	14.97	39.64	3.33	2.44	44.89	53.9	9.0	*1)
Hori.	4960.000	AV	37.00	31.40	7.76	39.72	3.33	2.44	42.21	53.9	11.6	-
Vert.	2483.500	AV	35.78	27.72	14.97	39.64	3.33	2.44	44.60	53.9	9.3	*1)
Vert.	4960.000	AV	37.81	31.40	7.76	39.72	3.33	2.44	43.02	53.9	10.8	-

Result = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Duty factor + Distance factor

Distance factor : 1 GHz - 10 GHz : $20\log(3.97\text{ m} / 3.0\text{ m}) = 2.44\text{ dB}$



10 GHz - 40 GHz : $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.54\text{ dB}$

Duty factor refer to "Burst rate confirmation" sheet.

*1) Not out of band emission (Leakage Power)

Radiated Spurious Emission (Reference Plot for band-edge)


Test place	Shonan EMC Lab.
Semi Anechoic Chamber	3
Date	March 23, 2022
Temperature / Humidity	22 deg.C, 28 %RH
Engineer	Miku Ikudome
Mode	Tx BT LE 2480 MHz

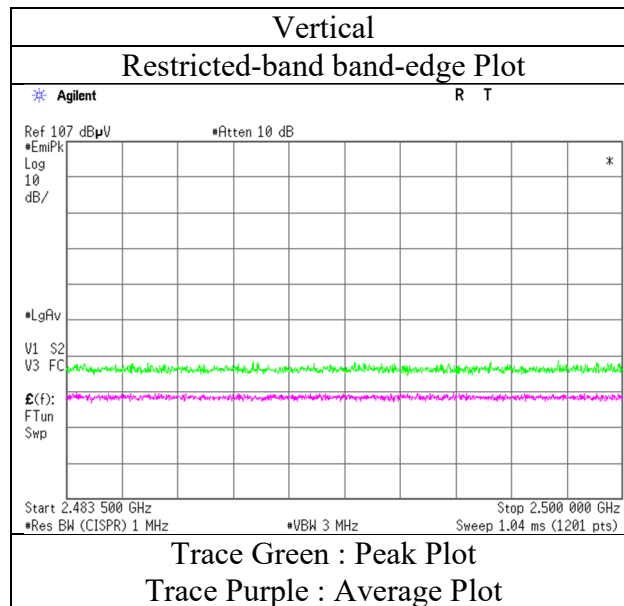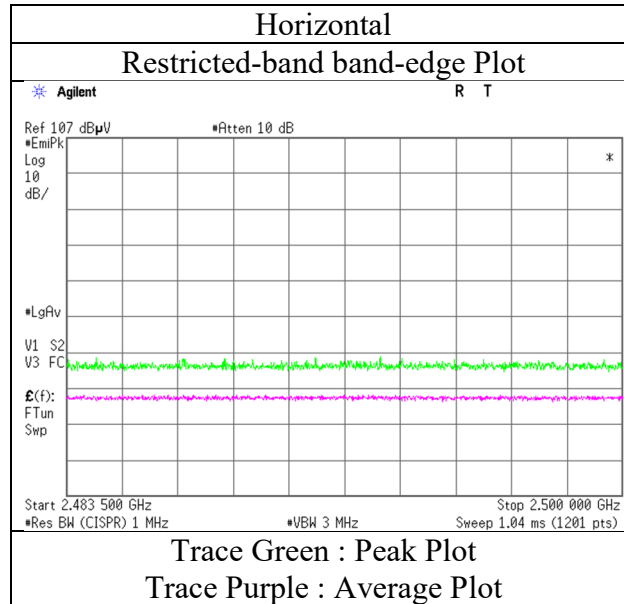

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions. Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission
(Plot data, Worst case mode for Maximum Peak Output Power)

Test place	Shonan EMC Lab.		
Semi Anechoic Chamber	1	3	3
Date	March 28, 2022	March 22, 2022	March 23, 2022
Temperature / Humidity	25 deg.C, 32 %RH	22 deg.C, 32 %RH	22 deg.C, 28 %RH
Engineer	Shiro Kobayashi	Yosuke Murakami	Miku Ikudome
	(Below 30 MHz)	(30 MHz -1 GHz)	(1 GHz -26.5 GHz)
Mode	Tx BT LE 2402 MHz		

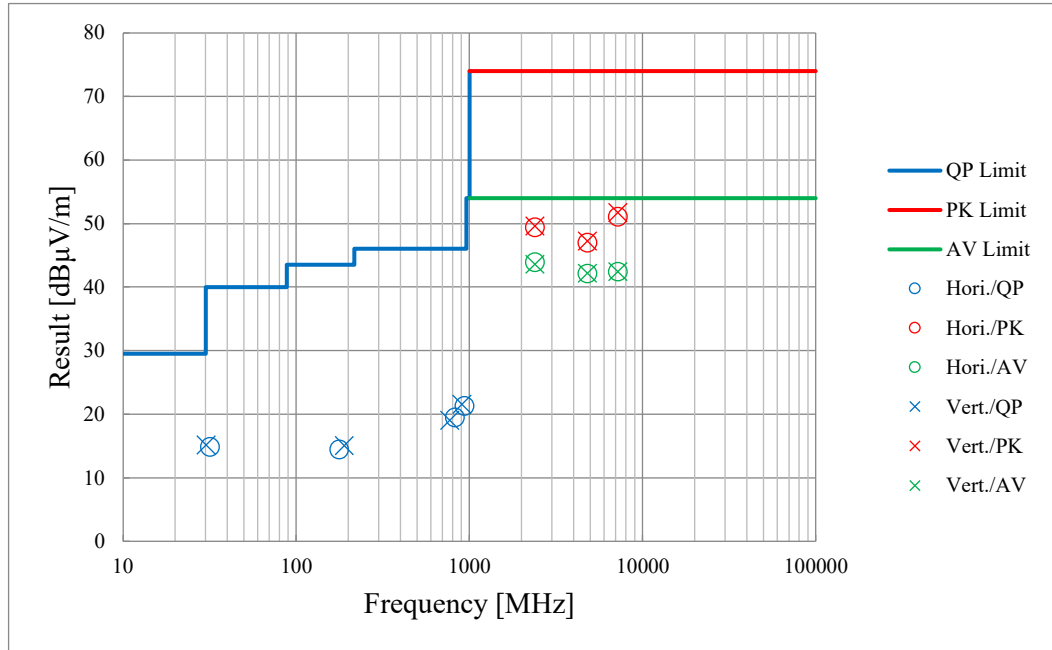


*These plots data contains sufficient number to show the trend of characteristic features for EUT.

*Below 30 MHz was not detected noises.

Conducted Spurious Emission

Test place Shonan EMC Lab. No.5 Shielded Room
Date March 18, 2022
Temperature / Humidity 23 deg. C / 32 % RH
Engineer Shiro Kobayashi
Mode Tx BT LE 2402 MHz

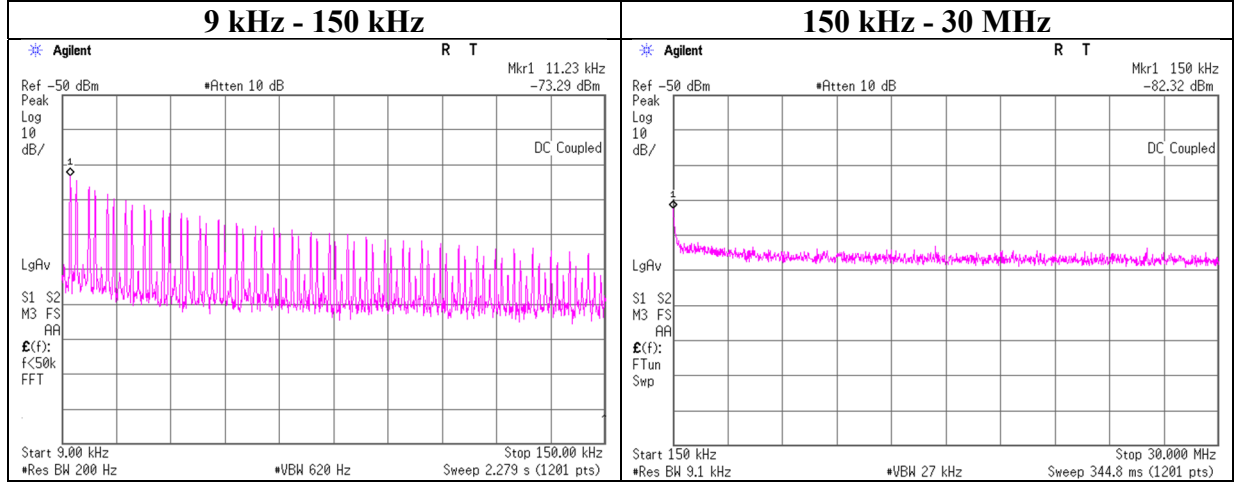

Frequency [kHz]	Reading [dBm]	Cable Loss [dB]	Attenuator Loss [dB]	Antenna Gain [dBi]	N (Number of Output)	EIRP [dBm]	Distance [m]	Ground bounce [dB]	E (field strength) [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
11.23	-73.29	0.01	9.54	2.50	1	-61.24	300	6.00	0.02	46.5	46.5	-
150.00	-82.32	0.01	9.54	2.50	1	-70.27	300	6.00	-9.01	24.0	33.0	-


$E \text{ [dBuV/m]} = \text{EIRP [dBm]} - 20 \log (\text{Distance [m]}) + \text{Ground bounce [dB]} + 104.8 \text{ [dBuV/m]}$

$\text{EIRP [dBm]} = \text{Reading [dBm]} + \text{Cable loss [dB]} + \text{Attenuator Loss [dB]} + \text{Antenna gain [dBi]} + 10 * \log (N)$

N: Number of output

Conducted Spurious Emission

Test place Shonan EMC Lab. No.5 Shielded Room
Date March 18, 2022
Temperature / Humidity 23 deg. C / 32 % RH
Engineer Shiro Kobayashi
Mode Tx BT LE 2440 MHz

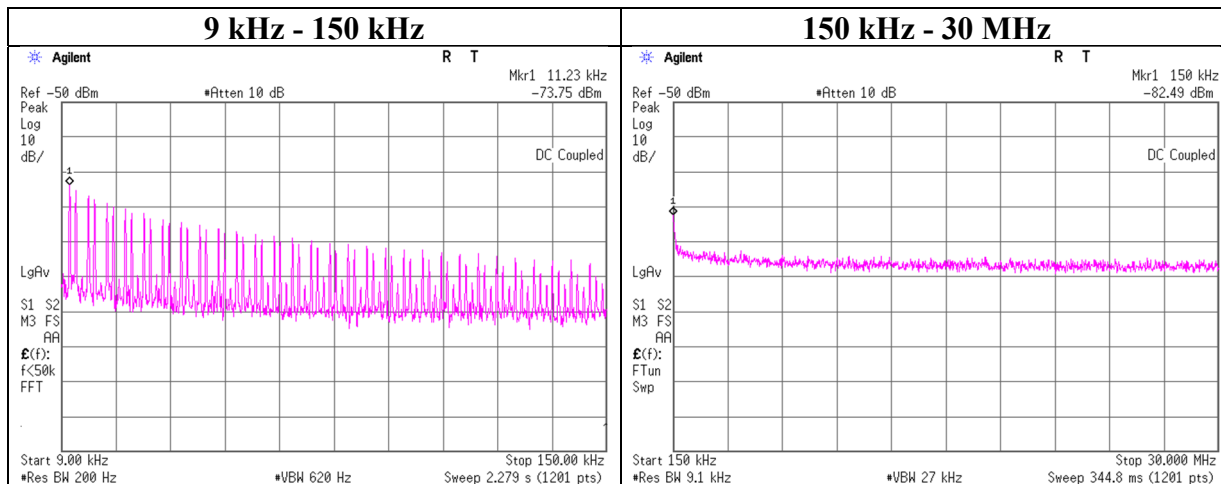

Frequency [kHz]	Reading [dBm]	Cable Loss [dB]	Attenuator Loss [dB]	Antenna Gain [dBi]	N (Number of Output)	EIRP [dBm]	Distance [m]	Ground bounce [dB]	E (field strength) [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
11.23	-73.75	0.01	9.54	2.50	1	-61.70	300	6.00	-0.44	46.5	46.9	-
150.00	-82.49	0.01	9.54	2.50	1	-70.44	300	6.00	-9.18	24.0	33.2	-


$E [dBuV/m] = EIRP [dBm] - 20 \log (Distance [m]) + Ground\ bounce [dB] + 104.8 [dBuV/m]$

$EIRP [dBm] = Reading [dBm] + Cable\ loss [dB] + Attenuator\ Loss [dB] + Antenna\ gain [dBi] + 10 * \log (N)$

N: Number of output

Conducted Spurious Emission

Test place Shonan EMC Lab. No.5 Shielded Room
Date March 18, 2022
Temperature / Humidity 23 deg. C / 32 % RH
Engineer Shiro Kobayashi
Mode Tx BT LE 2480 MHz

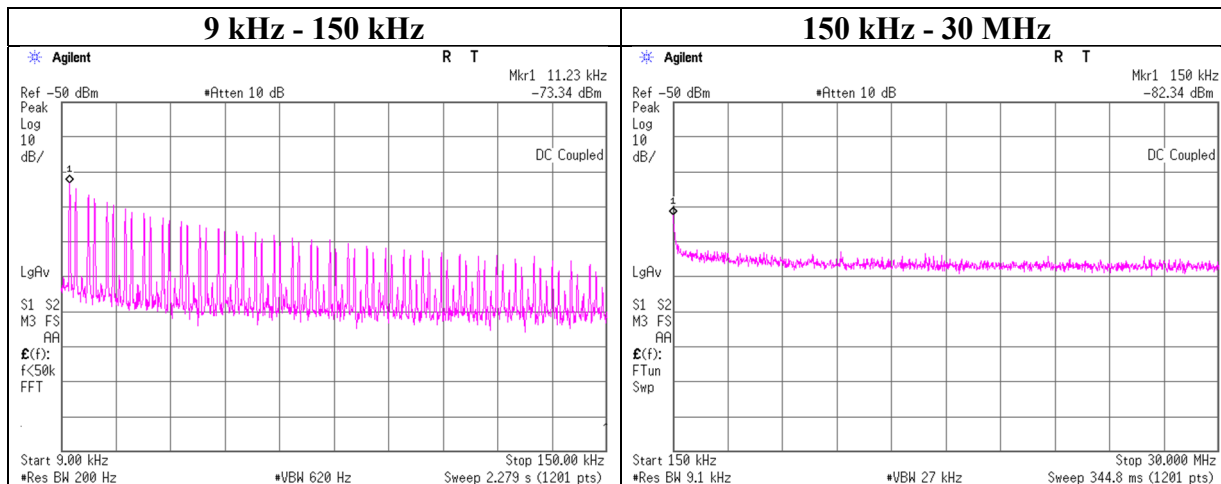

Frequency [kHz]	Reading [dBm]	Cable Loss [dB]	Attenuator Loss [dB]	Antenna Gain [dBi]	N (Number of Output)	EIRP [dBm]	Distance [m]	Ground bounce [dB]	E (field strength) [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
11.23	-73.34	0.01	9.54	2.50	1	-61.29	300	6.00	-0.03	46.5	46.5	-
150.00	-82.34	0.01	9.54	2.50	1	-70.29	300	6.00	-9.03	24.0	33.0	-

$E \text{ [dBuV/m]} = \text{EIRP [dBm]} - 20 \log (\text{Distance [m]}) + \text{Ground bounce [dB]} + 104.8 \text{ [dBuV/m]}$

$\text{EIRP [dBm]} = \text{Reading [dBm]} + \text{Cable loss [dB]} + \text{Attenuator Loss [dB]} + \text{Antenna gain [dBi]} + 10 * \log (N)$


N: Number of output

Power Density

Test place	Shonan EMC Lab. No.5 Shielded Room
Date	March 18, 2022
Temperature / Humidity	23 deg. C / 32 % RH
Engineer	Shiro Kobayashi
Mode	Tx BT LE

Frequency [MHz]	Measured Frequency [MHz]	Reading [dBm/3 kHz]	Cable Loss [dB]	Atten. Loss [dB]	Result [dBm/3 kHz]	Limit [dBm/3 kHz]	Margin [dB]
2402	2402.000	-23.55	1.15	9.64	-12.76	8.00	20.76
2440	2440.000	-24.22	1.16	9.64	-13.42	8.00	21.42
2480	2480.000	-24.33	1.16	9.64	-13.53	8.00	21.53

Power Density

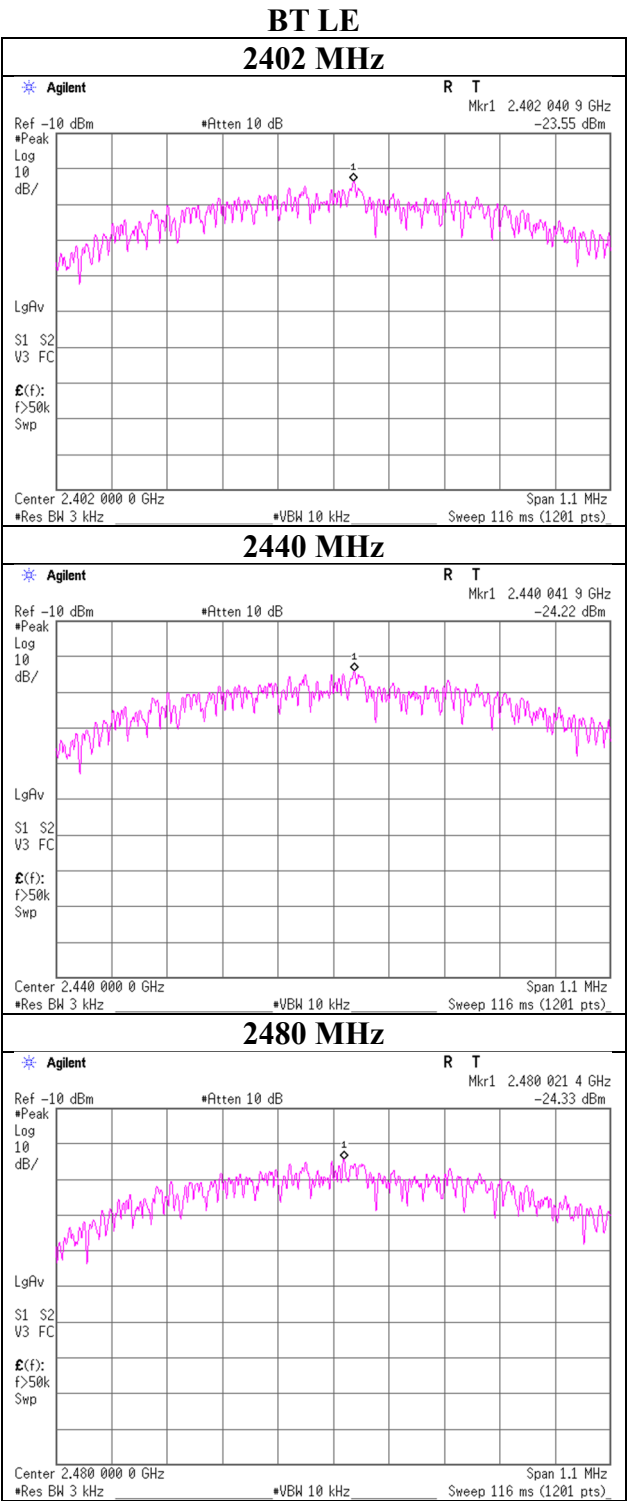

APPENDIX 2: Test Instruments

Test Equipment (1/2)

Test Item	Local ID	LIMS ID	Description	Manufacturer	Model	Serial	Last Calibration Date	Cal Int
AT	KTS-07	145111	Digital Tester	SANWA	PC500	7019232	2021/09/14	12
AT	SAT10-09	145132	Attenuator	Weinschel Corp.	54A-10	W5692	2021/10/05	12
AT	SCC-G65	196942	Coaxial Cable	Huber+Suhner	SUCOFLEX 102	803416/2	2022/03/01	12
AT	SOS-27	191845	Humidity Indicator	CUSTOM. Inc	CTH-201	-	2021/08/02	12
AT	SPM-13	169910	Power Meter	Keysight Technologies Inc	8990B	MY51000448	2022/01/25	12
AT	SPSS-06	169911	Power sensor	Keysight Technologies Inc	N1923A	MY57270004	2022/01/25	12
AT	SRENT-22	202830	Spectrum Analyzer	Keysight Technologies Inc	E4440A	MY48250036	2021/12/01	12
RE	COTS-SEMI-5	170932	EMI Software	TSJ (Techno Science Japan)	TEPTO-DV3(RE,CE,ME, PE)	-	-	-
RE	KJM-02	146432	Measure	TAJIMA	GL19-55	-	-	-
RE	SAEC-01(NSA)	145597	Semi-Anechoic Chamber	TDK	SAEC-01(NSA)	1	2021/04/30	12
RE	SAEC-01(SVSWR)	145561	Semi-Anechoic Chamber	TDK	SAEC-01(SVSWR)	1	2021/05/09	12
RE	SAEC-03(SVSWR)	145566	Semi-Anechoic Chamber	TDK	SAEC-03(SVSWR)	3	2021/05/21	12
RE	SAF-01	145003	Pre Amplifier	SONOMA	310N	290211	2022/02/24	12
RE	SAF-04	145127	Pre Amplifier	Toyo Corporation	TPA0118-36	2072554	2021/05/17	12
RE	SAF-06	145005	Pre Amplifier	Toyo Corporation	TPA0118-36	1440491	2022/02/04	12
RE	SAT10-05	145136	Attenuator	Keysight Technologies Inc	8493C-010	74864	2021/10/07	12
RE	SAT10-06	145137	Attenuator	Keysight Technologies Inc	8493C-010	74865	2021/10/05	12
RE	SAT6-15	167096	Attenuator	JFW	50HF-006N	-	2022/02/21	12
RE	SCC-A2/A4/A6/A7/A8/A13/SRSE-01	144968	Coaxial Cable&RF Selector	Fujikura/Fujikura/Suhner/Suhner/Suhner/TOYO	8D2W/12DSFA/141PE/141PE/141PE/141PE/NS4906	-/0901-269(RF Selector)	2021/04/12	12
RE	SCC-G05	145039	Coaxial Cable	Junkosha	J12J102207-00	APR-30-15-037	2022/01/06	12
RE	SCC-G15	145176	Coaxial Cable	Suhner	SUCOFLEX 102	32703/2	2022/03/03	12
RE	SCC-G40	166491	Coaxial Cable	Junkosha	MWX221-01000NFSNMS/B	1612S005	2022/01/06	12
RE	SCC-G43	156380	Coaxial Cable	Huber+Suhner	SUCOFLEX_104_E	SN MY 13406/4E	2021/05/17	12
RE	SCC-G57	179540	Coaxial Cable	Huber+Suhner	SUCOFLEX 102	802815/2	2021/05/18	12
RE	SCC-G58	183047	Coaxial Cable	Huber+Suhner	SUCOFLEX 104	800287/4A	2021/05/17	12
RE	SCC-G62	196985	Coaxial Cable	Huber+Suhner	SUCOFLEX 102	803650/2	2022/03/08	12
RE	SCC-G70	200010	Coaxial Cable	Huber+Suhner	SUCOFLEX 104	575618/4	2021/07/06	12
RE	SCC-M1	194601	Coaxial Cable	Fujikura	5D-2W	-	2021/12/10	12

Test Equipment (2/2)

Test Item	Local ID	LIMS ID	Description	Manufacturer	Model	Serial	Last Calibration Date	Cal Int
RE	SFL-02	145301	Highpass Filter	MICRO-TRONICS	HPM50111	51	2021/10/07	12
RE	SFL-18	145305	Highpass Filter	MICRO-TRONICS	HPM50111	119	2022/03/02	12
RE	SHA-01	145383	Horn Antenna	Schwarzbeck Mess-Elektronik OHG	BBHA9120D	9120D-725	2022/03/01	12
RE	SHA-04	145512	Horn Antenna	ETS-Lindgren	3160-09	00094868	2021/06/14	12
RE	SHA-08	194683	Horn Antenna	Schwarzbeck Mess-Elektronik OHG	BBHA 9120 C	694	2022/03/01	12
RE	SJM-22	207279	Measuring Tool, Tape Measure	ASKUL	-	-	-	-
RE	SLP-02	145536	Loop Antenna	Rohde & Schwarz	HFH2-Z2	100218	2021/04/06	12
RE	SOS-20	191837	Humidity Indicator	CUSTOM. Inc	CTH-201	-	2021/08/02	12
RE	SOS-23	191840	Humidity Indicator	CUSTOM. Inc	CTH-201	-	2021/08/02	12
RE	SSA-03	145801	Spectrum Analyzer	Keysight Technologies Inc	E4448A	MY48250152	2021/08/09	12
RE	STR-01	145790	Test Receiver	Rohde & Schwarz	ESU40	100093	2021/04/27	12
RE	STS-01	145792	Digital Hitester	HIOKI E.E. CORPORATION	3805-50	80997812	2021/09/14	12
RE	STS-03	146210	Digital Hitester	HIOKI E.E. CORPORATION	3805-50	80997823	2021/09/14	12

*Hyphens for Last Calibration Date and Cal Int (month) are instruments that Calibration is not required (e.g. software), or instruments checked in advance before use.

The expiration date of the calibration is the end of the expired month.

As for some calibrations performed after the tested dates, those test equipment have been controlled by means of an unbroken chains of calibrations.

All equipment is calibrated with valid calibrations. Each measurement data is traceable to the national or international standards.

Test item: RE: Radiated Emission
AT: Antenna Terminal Conducted