
## LABEL



NOTES: (UNLESS OTHERWISE SPECIFIED).


- I. MATERIAL: PC, THK. = 0.127mm(MATTED) + 0.05mm (ADHESIVE) WITH MATTED TEXTURE.
- 2. MATERIAL MUST BE UL AND CSA APPROVED.
- 3. PRINT ON BACK SURFACE.
- 4. ADHESIVE: SPEC REFER TO ES-811RO5, SONY 303 OF TOYO DESTROMR OR EQUIV.
- COLOR: TEXT TO BE PMS 2C (COOL GRAY). BACKGROUND TO BE ACS-M.
- 6. PRINTING TOLERANCE OF DIMENSIONS TO BE +/-0.30mm.

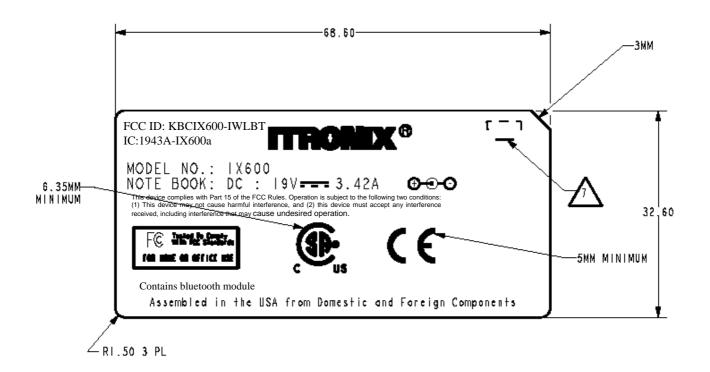

UL/CSA RECOGNIZED LOGO.

- ALL PART(S) TO BE CLEAN AND FREE FROM CONTAMINANTS TO MEET QUALITY APPEARANCE SPECIFICATION QE3-001.
- ALL UNSPECIFIED GEOMETRY SHALL MATCH ITRONIX SUPPLIED DATABASE GENERATED FROM MODEL WHICH MATCHES THIS DRAWING. TOLERANCE UNSPECIFIED DIMENSIONS SHALL BE PER TABLE
- IO. PART(S) SHIPPED TO ITRONIX SHALL BE PACKAGED FOR SHIPMENT AND/OR STORAGE IN A CLEAN, PROTECTIVE CONTAINER PER ITRONIX PACKAGING AND SHIPPING SPEC. QE3-002. IF A BAG IS USED IT MUST BE NON-STATIC GENERATING.

## **Label & Location**

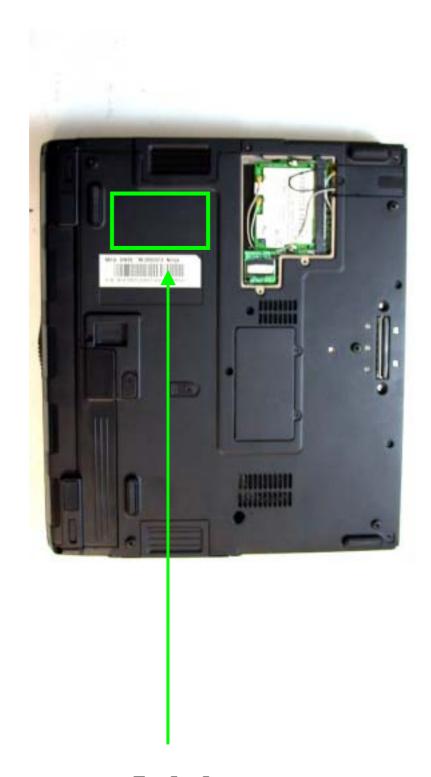

Label