


Appendix B

Peak Output Power




Marker 1 [T1] RBW 1 MHz RF Att 60 dB
Ref Lvl 24.66 dBm VBW 1 MHz
33 dBm 2.40086994 GHz SWT 5 ms Unit dBm

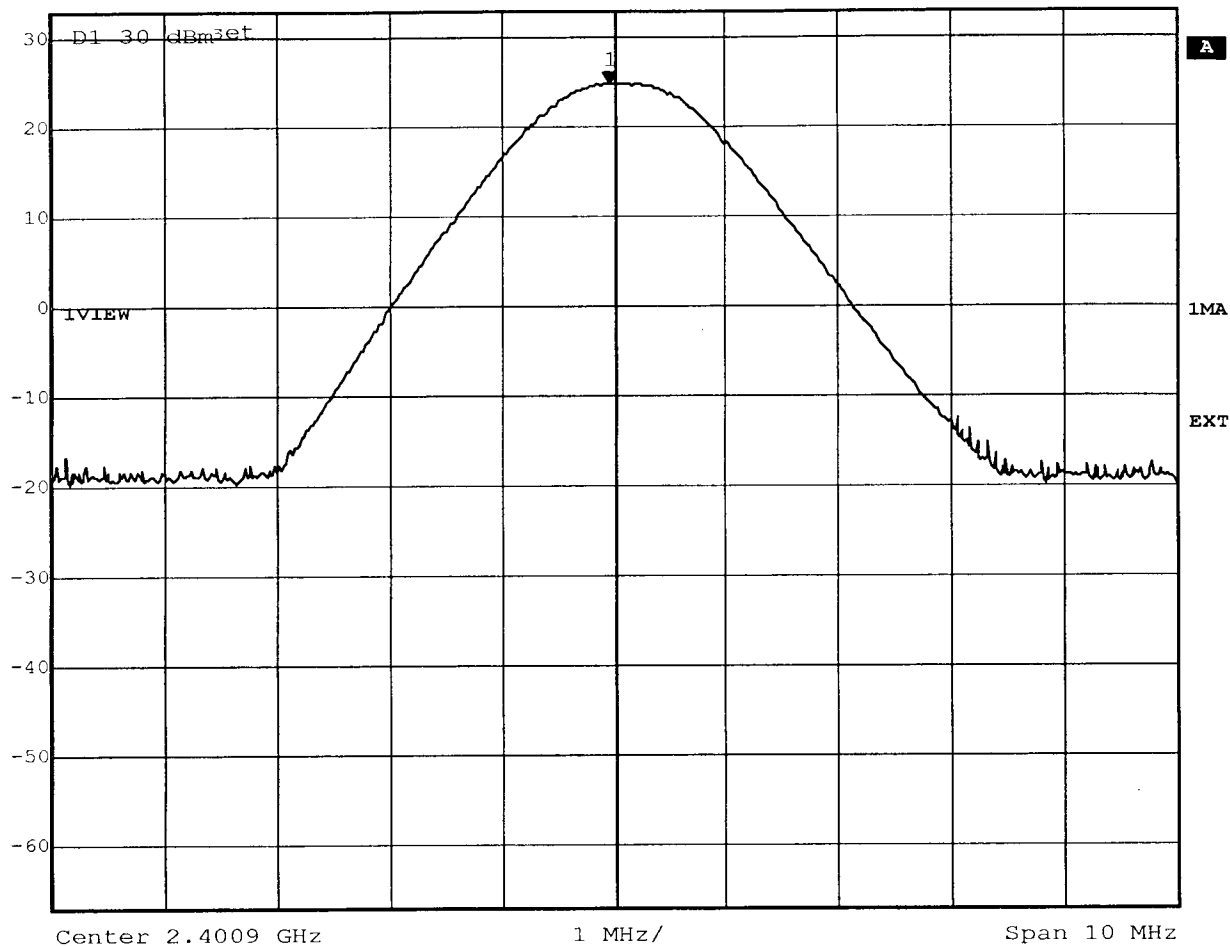

Title: Peak Output Power Conducted Ch.: 0
Comment A: GN Netcom Cordless Headset Gn 9050 Headset
Date: 25.OCT.2001 08:41:26



Marker 1 [T1] RBW 1 MHz RF Att 60 dB
Ref Lvl 25.44 dBm VBW 1 MHz
33 dBm 2.44230214 GHz SWT 5 ms Unit dBm

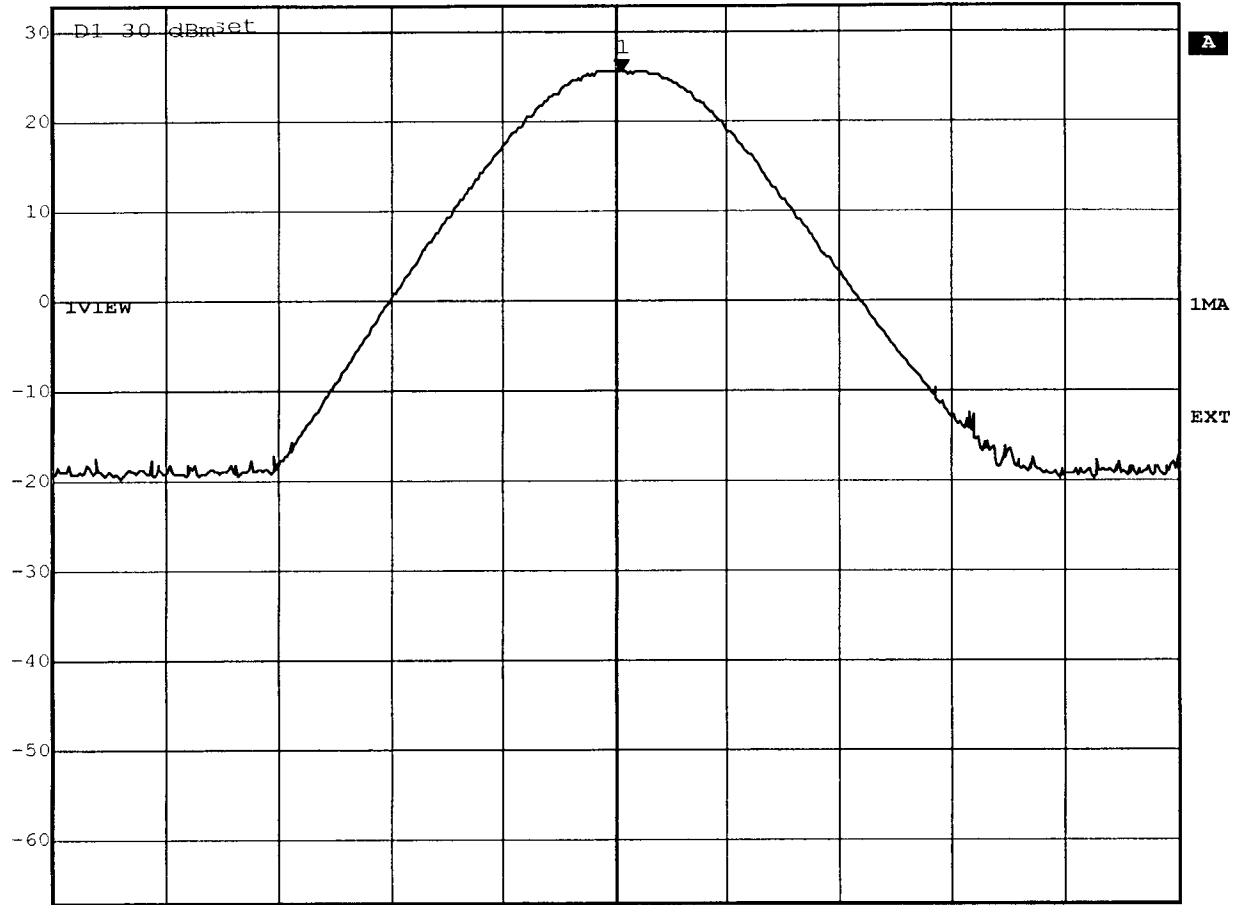

Center 2.442232 GHz


1 MHz/

Span 10 MHz

Title: Peak Output Power Conducted Ch.: 40
Comment A: GN Netcom Cordless Headset Gn 9050 Headset
Date: 25.OCT.2001 08:32:26




Marker 1 [T1] RBW 1 MHz RF Att 60 dB
Ref Lvl 25.59 dBm VBW 1 MHz
33 dBm 2.48155002 GHz SWT 5 ms Unit dBm

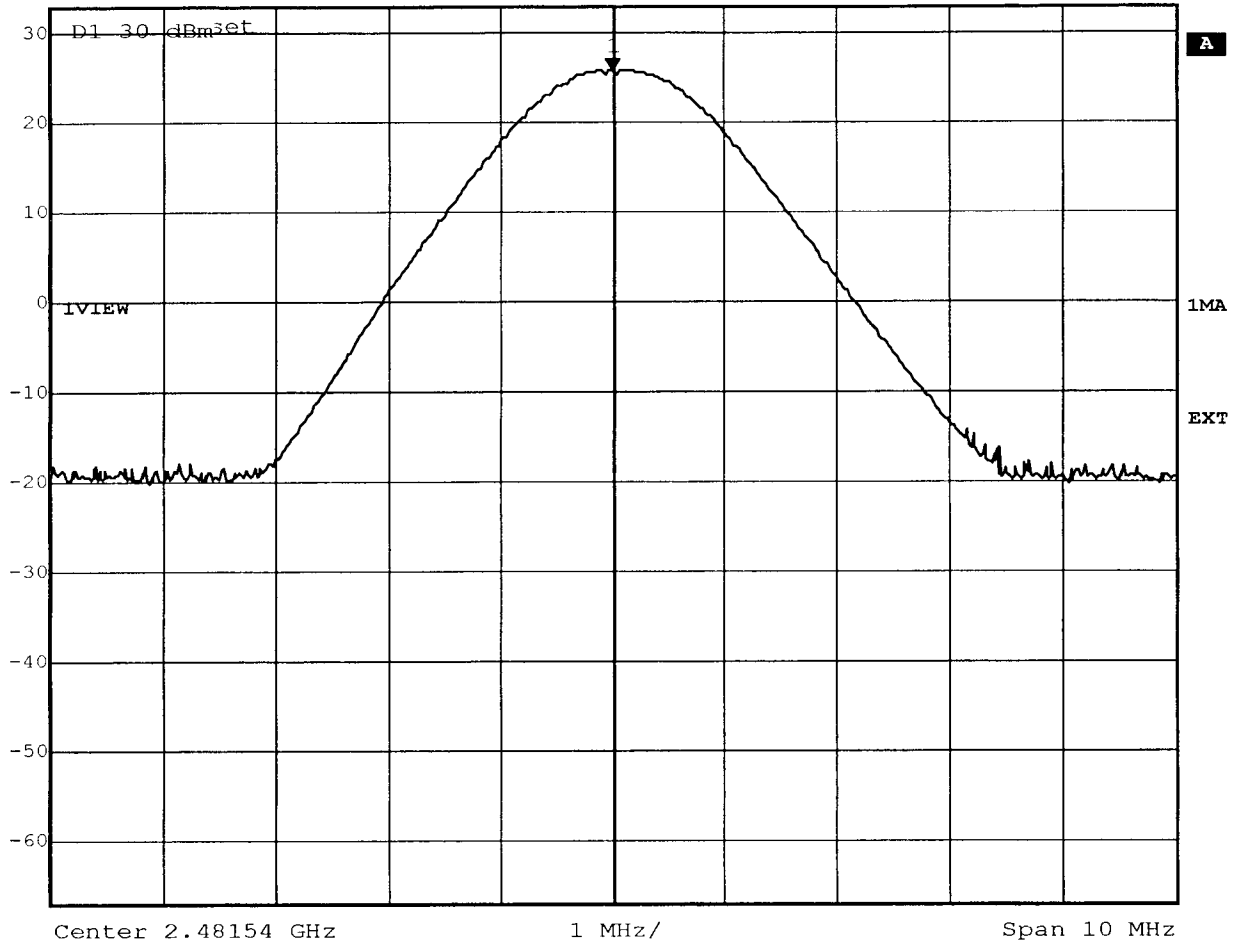

Title: Peak Output Power Conducted Ch.: 78
Comment A: GN Netcom Cordless Headset Gn 9050 Headset
Date: 25.OCT.2001 08:29:29


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT : Cordless Headset / Headset / Ch.: 0
Model: Gn 9050
Manufacturer: GN Netcom
Operating Condition: Unom: 3.6 V DC (rechargeable battery), Thom:23°C
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to S15247 / mode: Tx
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq:2.401GHz Pmax:22.55dBm RBW: 5 MHz

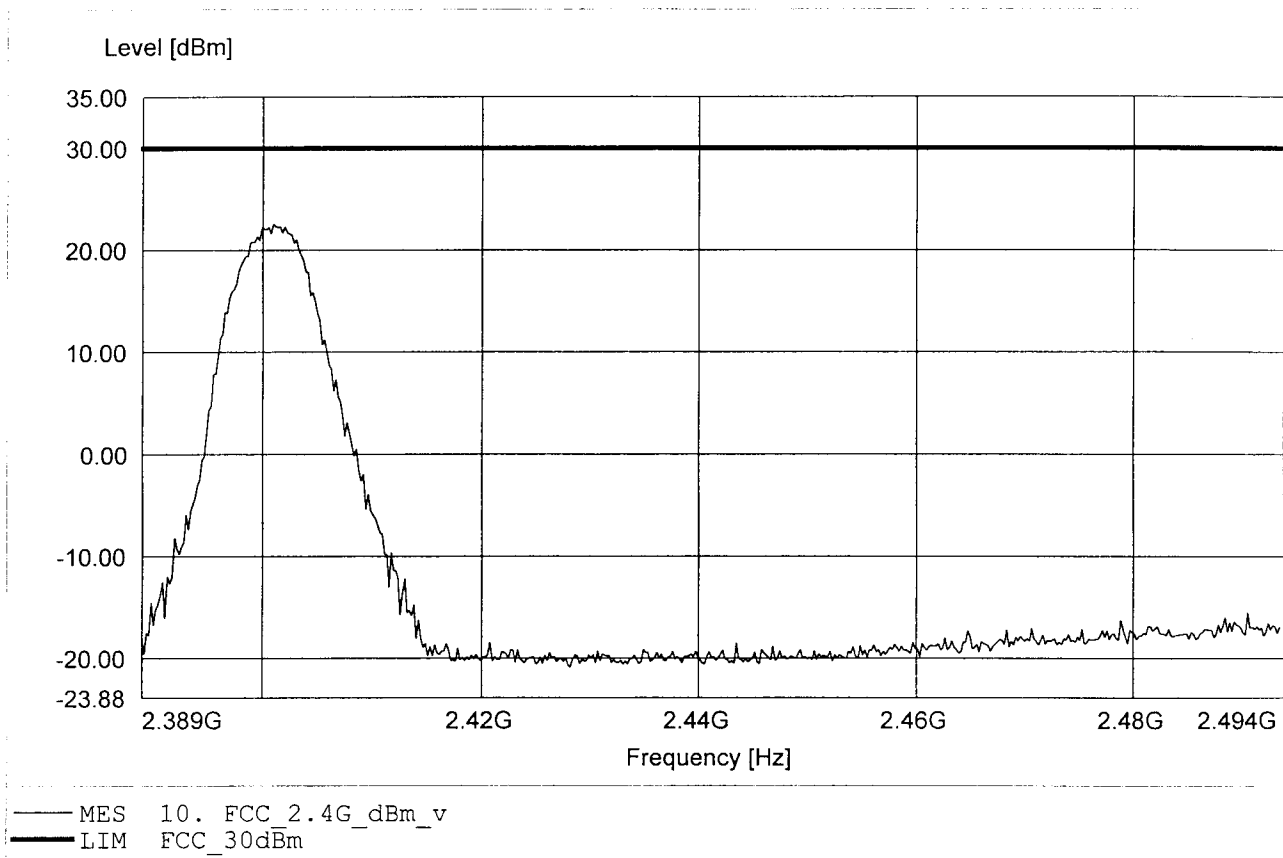


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT : Cordless Headset / Headset / Ch.: 0
Model: Gn 9050
Manufacturer: GN Netcom
Operating Condition: Unom: 3.6 V DC (rechargeable battery), Thom: 23°C
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to S15247 / mode: Tx
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.401GHz Pmax: 22.03dBm RBW: 5 MHz

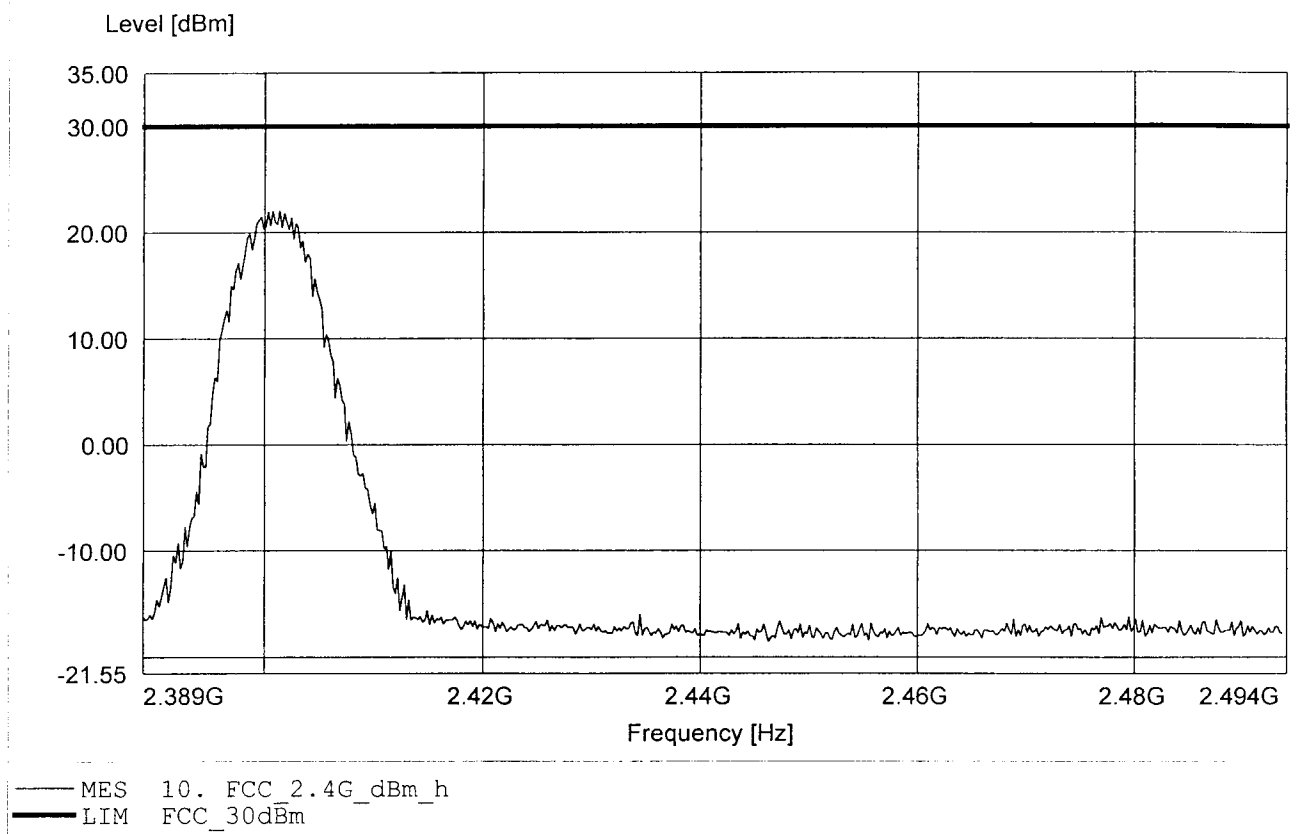


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT : Cordless Headset / Headset / Ch.: 40
Model: Gn 9050
Manufacturer: GN Netcom
Operating Condition: Unom: 3.6 V DC (rechargeable battery), Tnom:23°C
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to S15247 / mode: Tx
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq:2.443GHz Pmax:22.39dBm RBW: 5 MHz

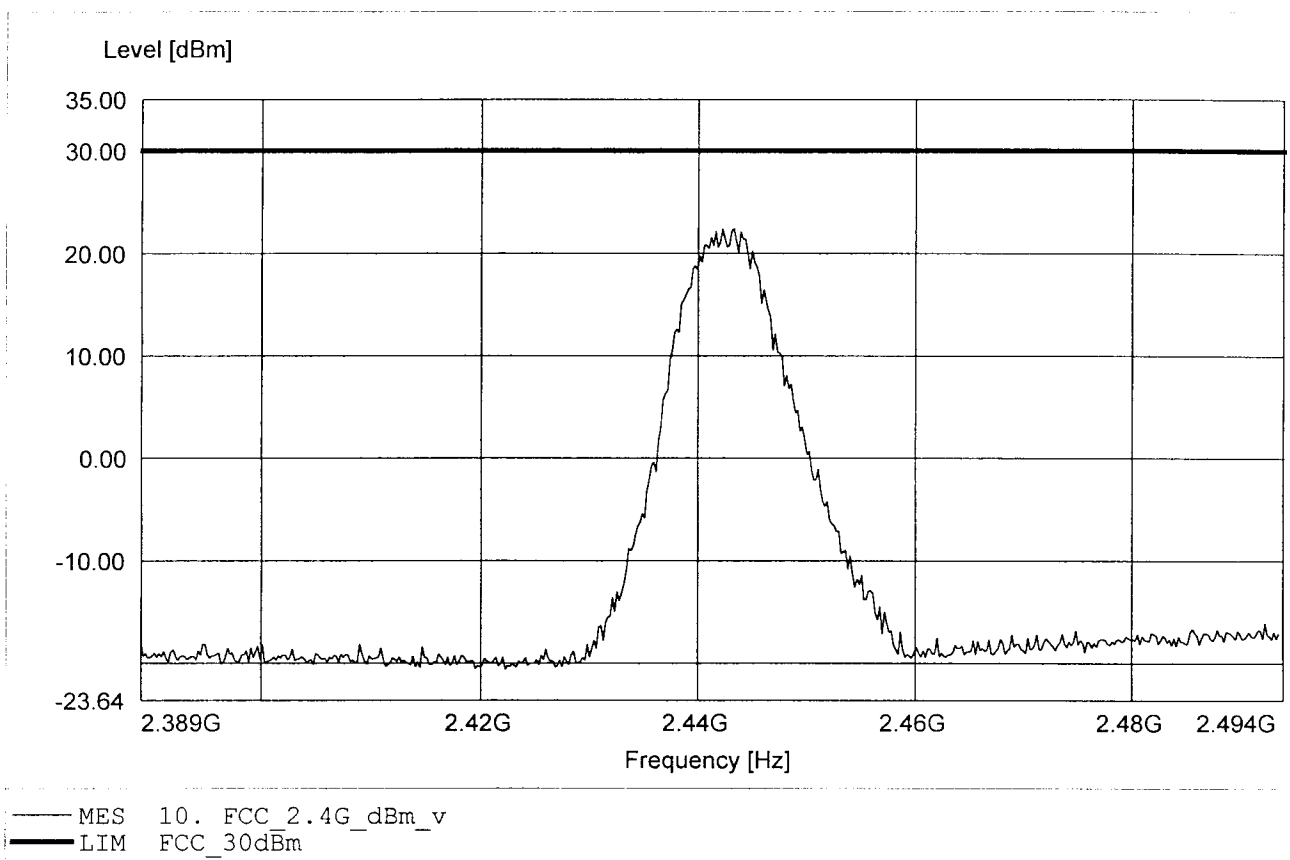


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT : Cordless Headset / Headset / Ch.: 40
Model: Gn 9050
Manufacturer: GN Netcom
Operating Condition: Unom: 3.6 V DC (rechargeable battery), Tnom:23°C
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to S15247 / mode: Tx
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq:2.442GHz Pmax:18.55dBm RBW: 5 MHz

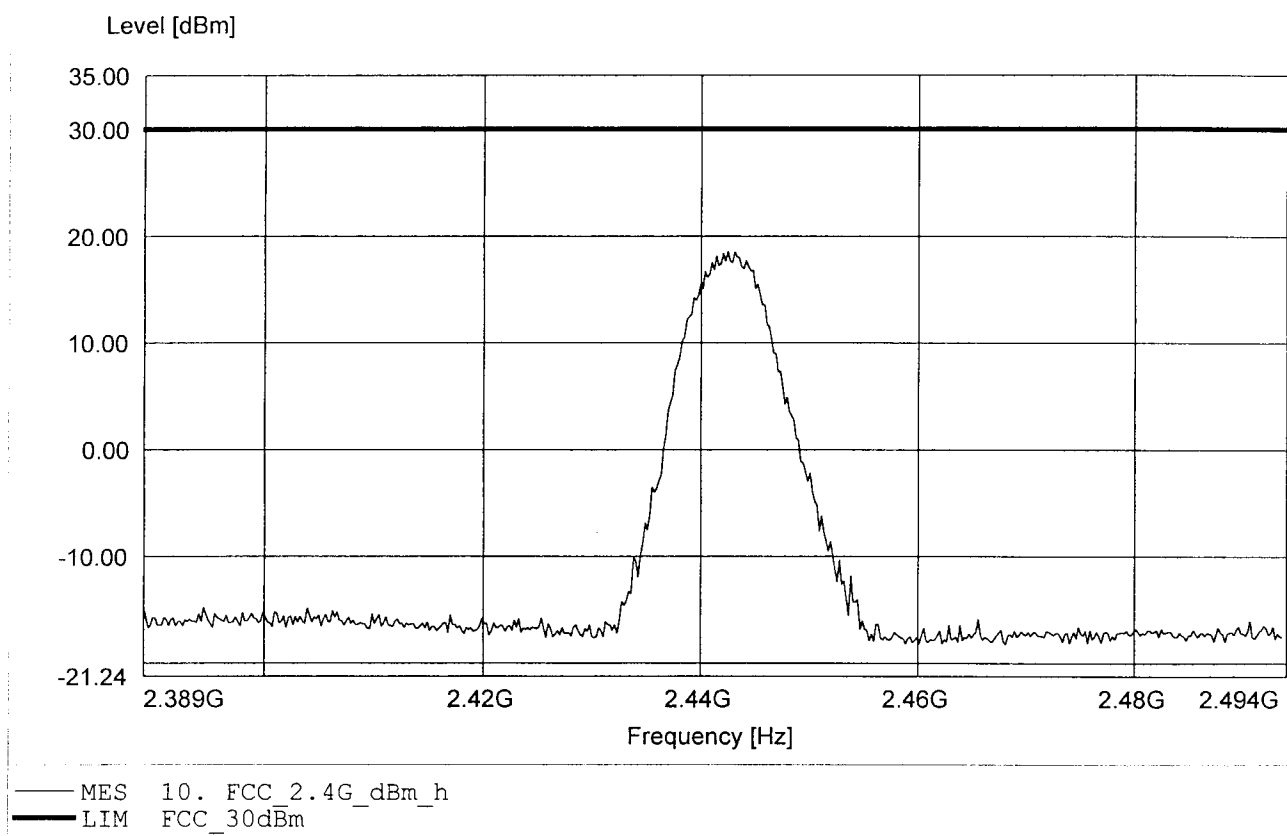


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT : Cordless Headset / Headset / Ch.: 78
Model: Gn 9050
Manufacturer: GN Netcom
Operating Condition: Unom: 3.6 V DC (rechargeable battery), Tnom:23°C
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247 / mode: Tx
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq:2.482GHz Pmax:26.35dBm RBW: 5 MHz

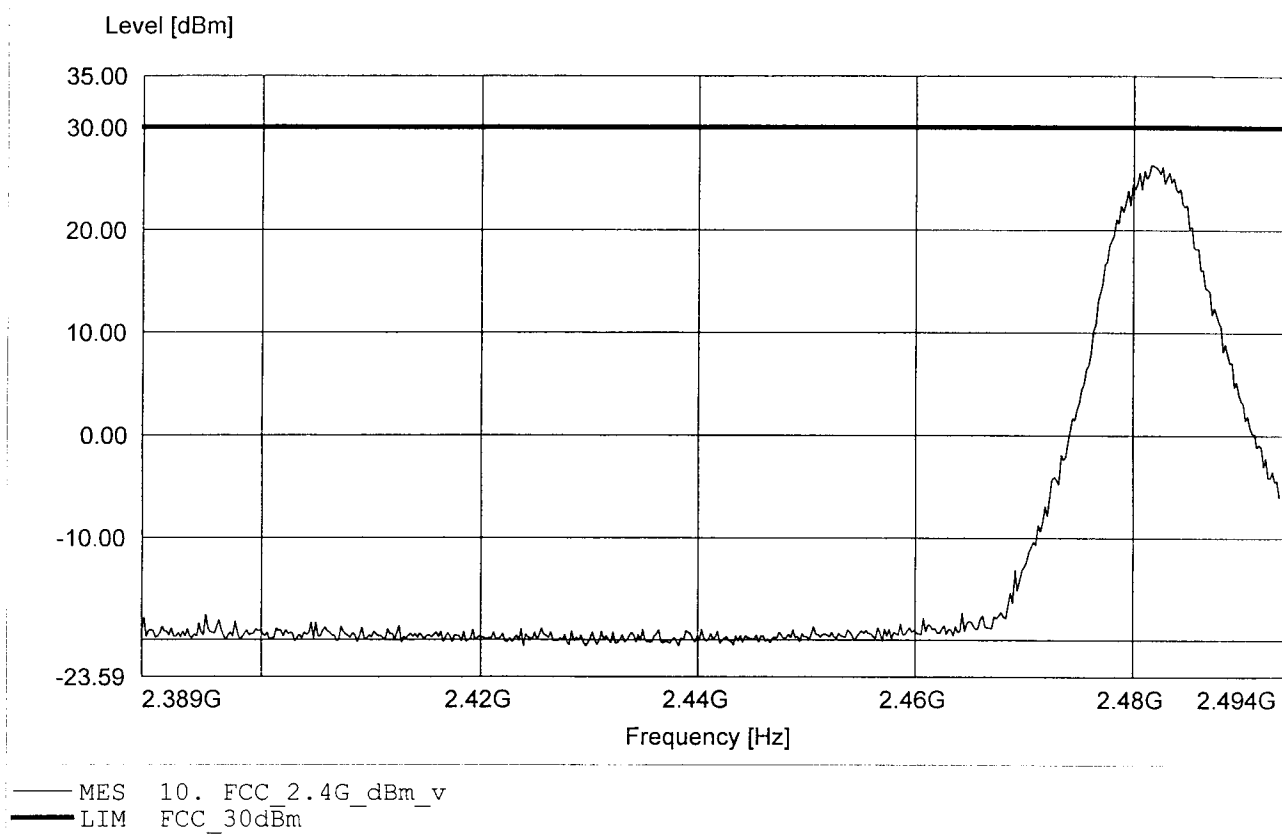

Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT : Cordless Headset / Headset / Ch.: 78
Model: Gn 9050
Manufacturer: GN Netcom
Operating Condition: Unom: 3.6 V DC (rechargeable battery), Tnom:23°C
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to S15247 / mode: Tx
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq:2.482GHz Pmax:20.13dBm RBW: 5 MHz

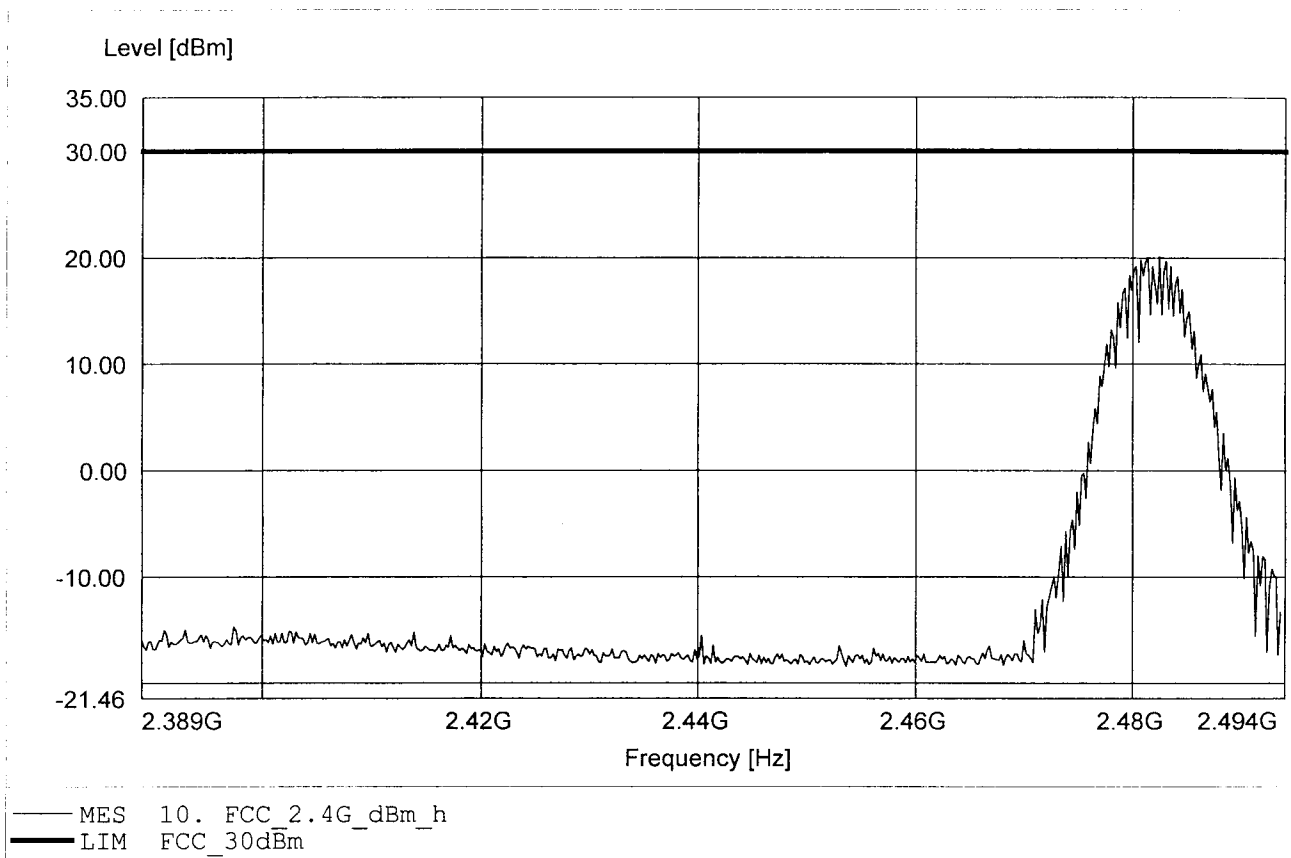


Appendix C

Spurious Emissions radiated - Transmitter operating


Spurious emissions Field Strength Tx
FCC RULES PART 15, SUBPART C

EUT : Cordless Headset / Headset / Ch.: 0
Model: Gn 9050
Manufacturer: GN Netcom
Operating Condition: Unom: 3.6 V DC (rechargeable battery), Tnom:23°C
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to S15247 / mode: Tx
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq:197.275MHz Emax:33.62dBμV/m RBW: 100 kHz

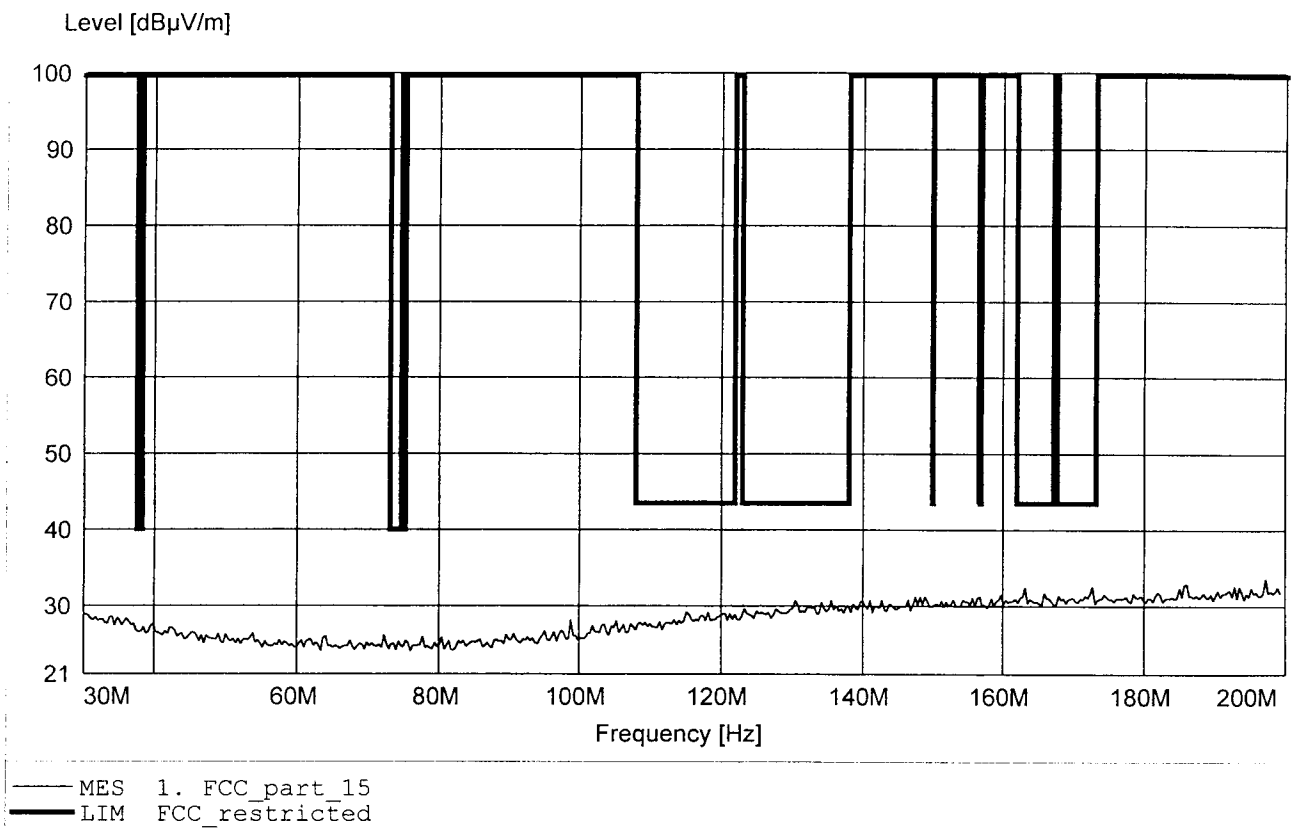


Spurious emissions Field Strength Tx
FCC RULES PART 15, SUBPART C

EUT : Cordless Headset / Headset / Ch.: 0
Model: Gn 9050
Manufacturer: GN Netcom
Operating Condition: Unom: 3.6 V DC (rechargeable battery), Tnom:23°C
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247 / mode: Tx
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq:198.297MHz Emax:33.50dBµV/m RBW: 100 kHz

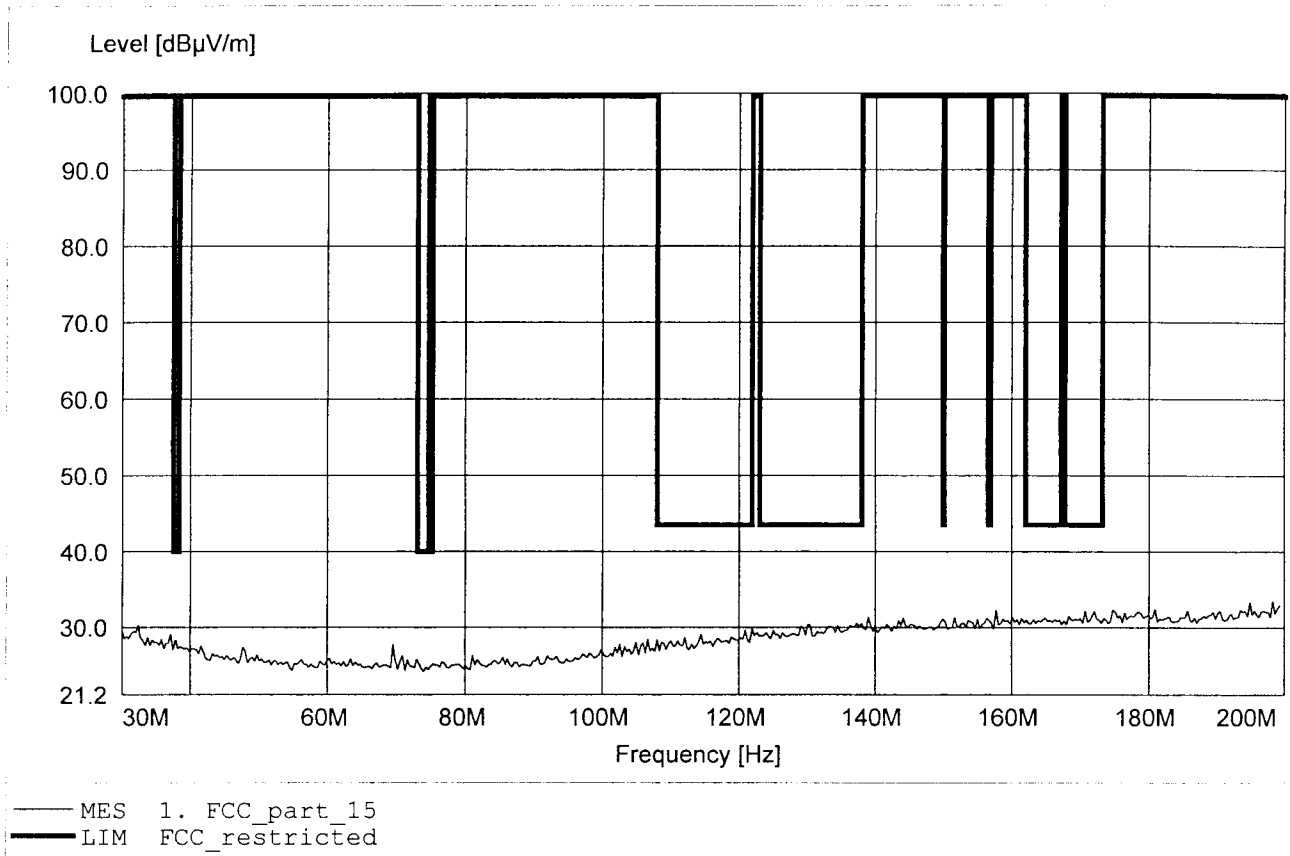


Spurious emissions Field Strength Tx
FCC RULES PART 15, SUBPART C

EUT : Cordless Headset / Headset / Ch.: 0
Model: Gn 9050
Manufacturer: GN Netcom
Operating Condition: Unom: 3.6 V DC (rechargeable battery), Tnom:23°C
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to S15247 / mode: Tx
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq:983.968MHz Emax:22.29dBμV/m RBW: 100 kHz

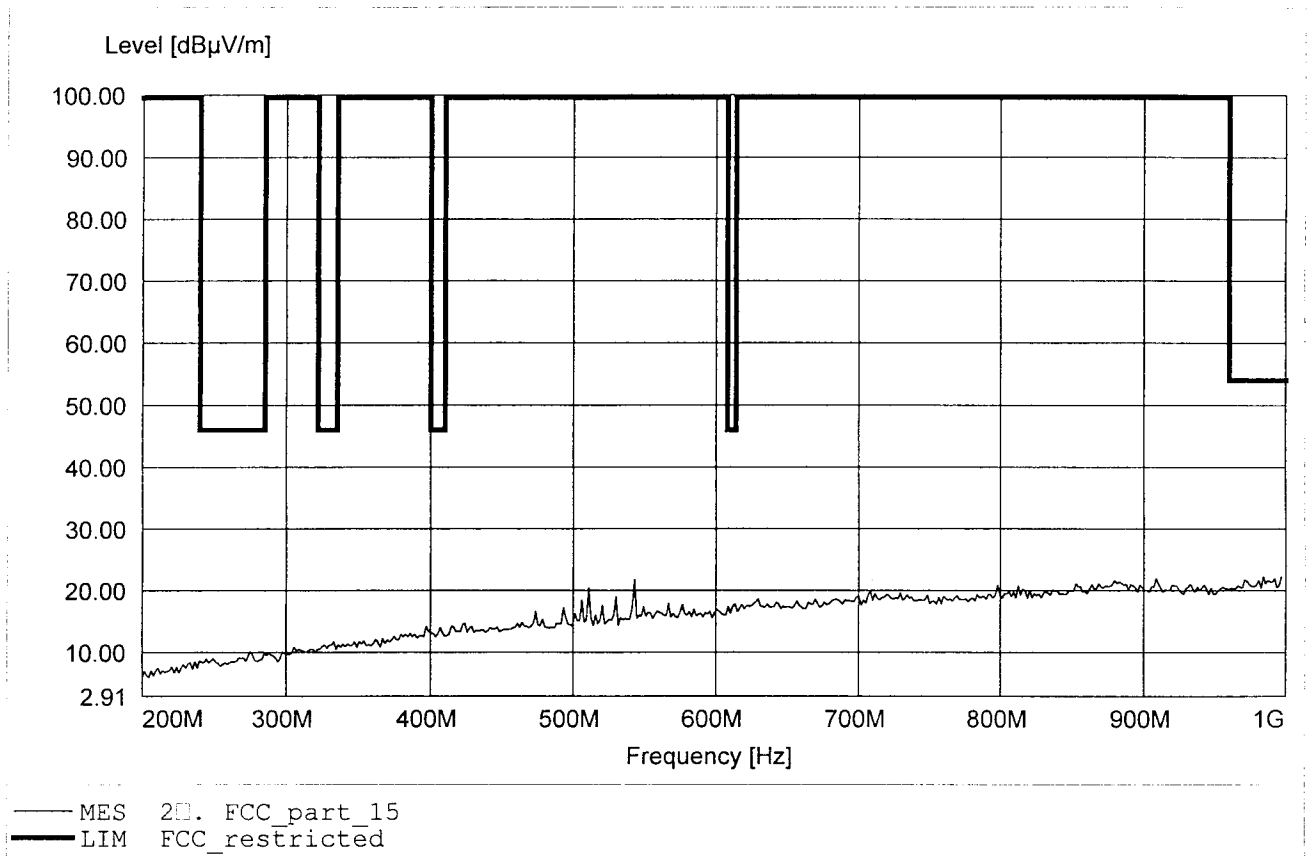


Spurious emissions Field Strength Tx
FCC RULES PART 15, SUBPART C

EUT : Cordless Headset / Headset / Ch.: 0
Model: Gn 9050
Manufacturer: GN Netcom
Operating Condition: Unom: 3.6 V DC (rechargeable battery), Tnom:23°C
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to S15247 / mode: Tx
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq:820.441MHz Emax:23.86dBμV/m RBW: 100 kHz

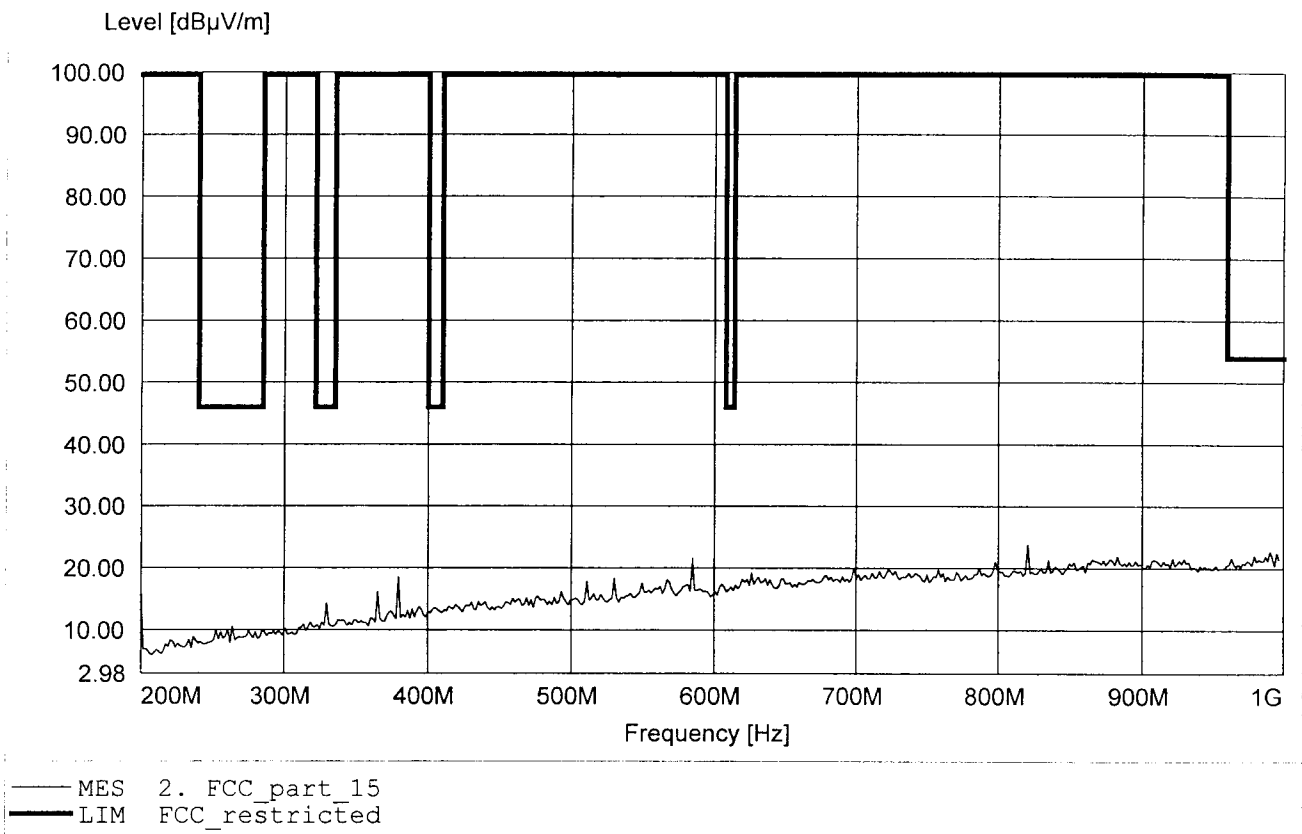


Spurious emissions Field Strength Tx
FCC RULES PART 15, SUBPART C

EUT : Cordless Headset / Headset / Ch.: 0
Model: Gn 9050
Manufacturer: GN Netcom
Operating Condition: Unom: 3.6 V DC (rechargeable battery), Tnom:23°C
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to S15247, Limit 20 dB up peak detector / mode: Tx
Comment 1: Dist.: 3m, Ant.: BBHA2190D, amplif.
Comment 2: Freq:2.400GHz Emax:83.43dBμV/m RBW: 1 MHz

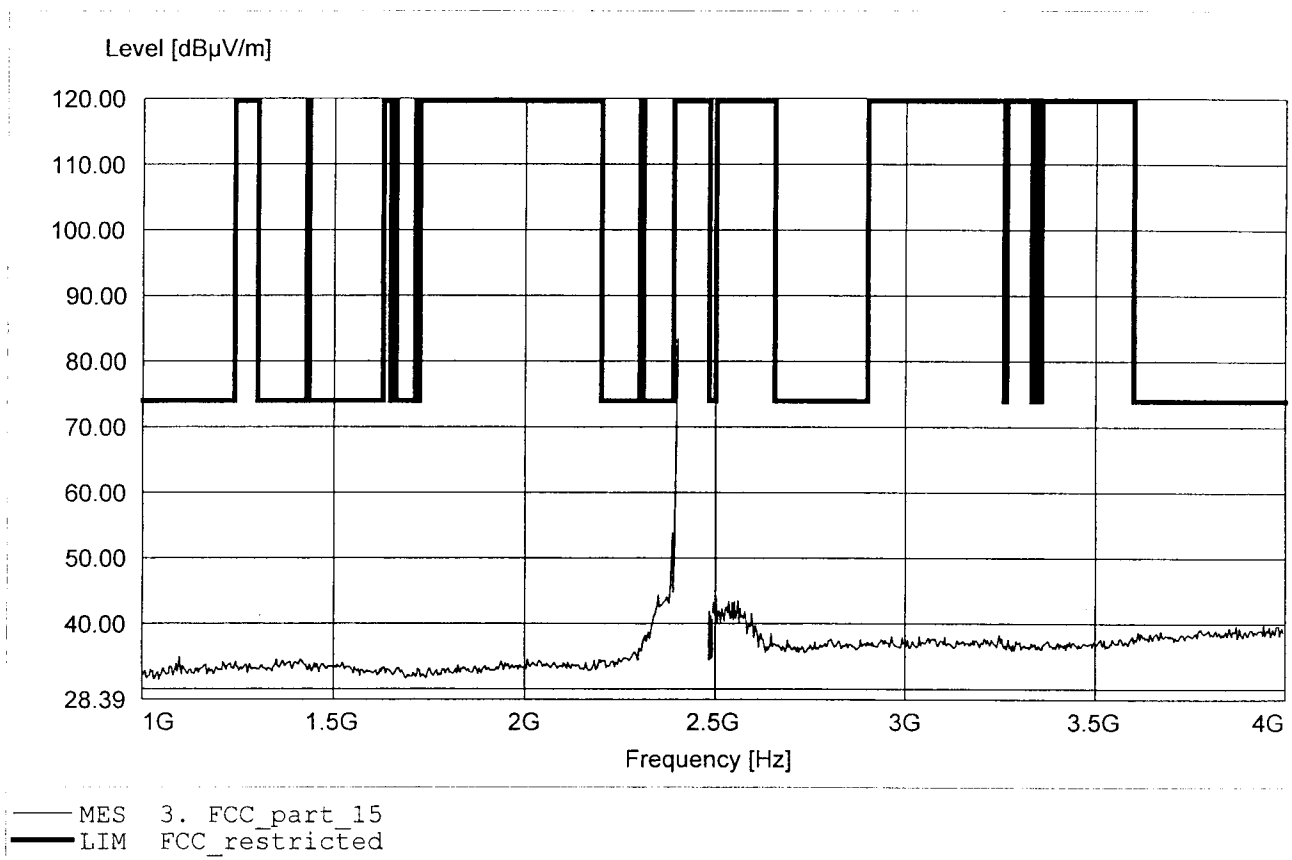


Spurious emissions Field Strength Tx
FCC RULES PART 15, SUBPART C

EUT : Cordless Headset / Headset / Ch.: 0
Model: Gn 9050
Manufacturer: GN Netcom
Operating Condition: Unom: 3.6 V DC (rechargeable battery), Tnom:23°C
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, Limit 20 dB up peak detector / mode: Tx
Comment 1: Dist.: 3m, Ant.: BBHA2190D, amplif.
Comment 2: Freq:2.400GHz Emax:80.46dBµV/m RBW: 1 MHz

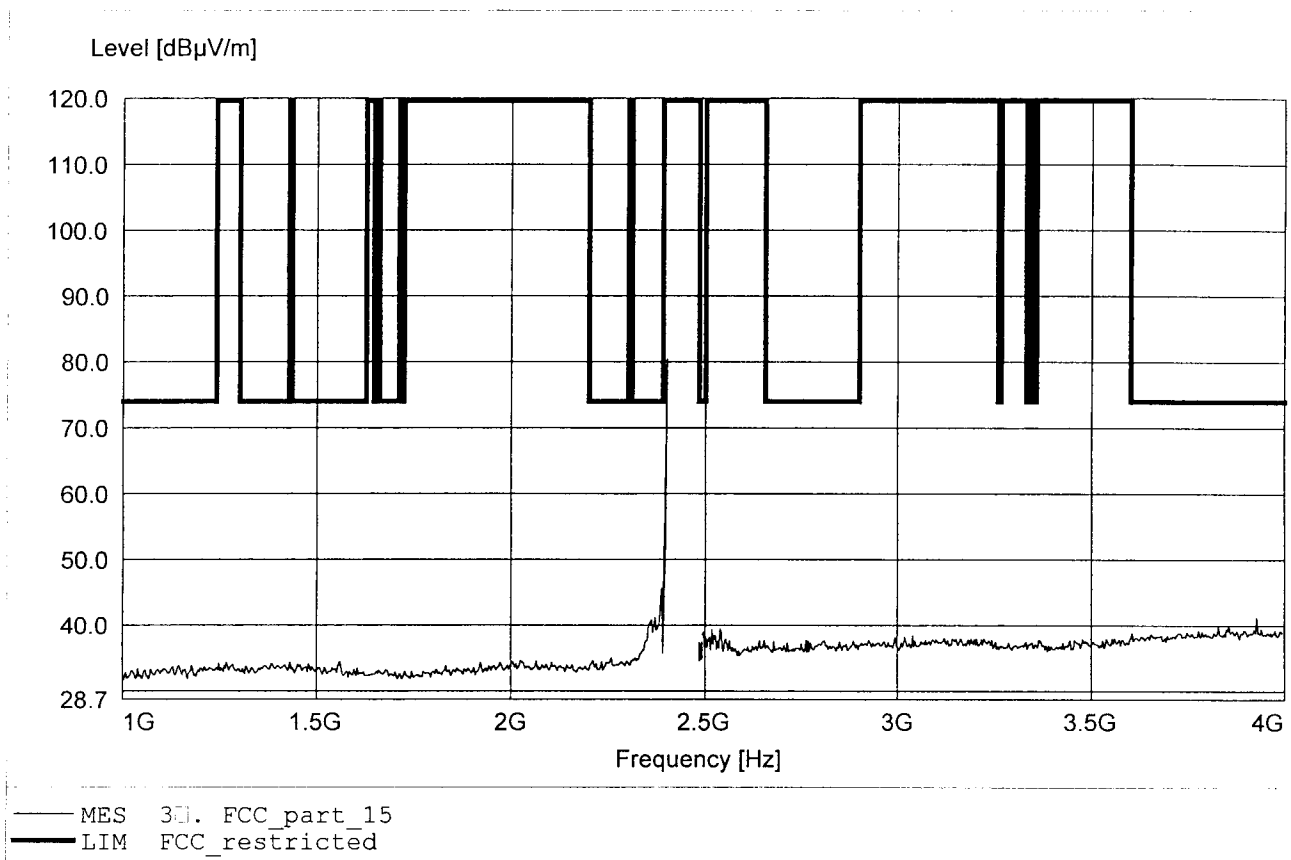


Spurious emissions Field Strength Tx
FCC RULES PART 15, SUBPART C

EUT : Cordless Headset / Headset / Ch.: 0
Model: Gn 9050
Manufacturer: GN Netcom
Operating Condition: Unom: 3.6 V DC (rechargeable battery), Tnom:23°C
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to S15247, Limit 20 dB up peak detector / mode: Tx
Comment 1: Dist.: 3m, Ant.: BBHA2190D, ampl.+HP.
Comment 2: Freq:7.206GHz Emax:67.94dBμV/m RBW: 1 MHz

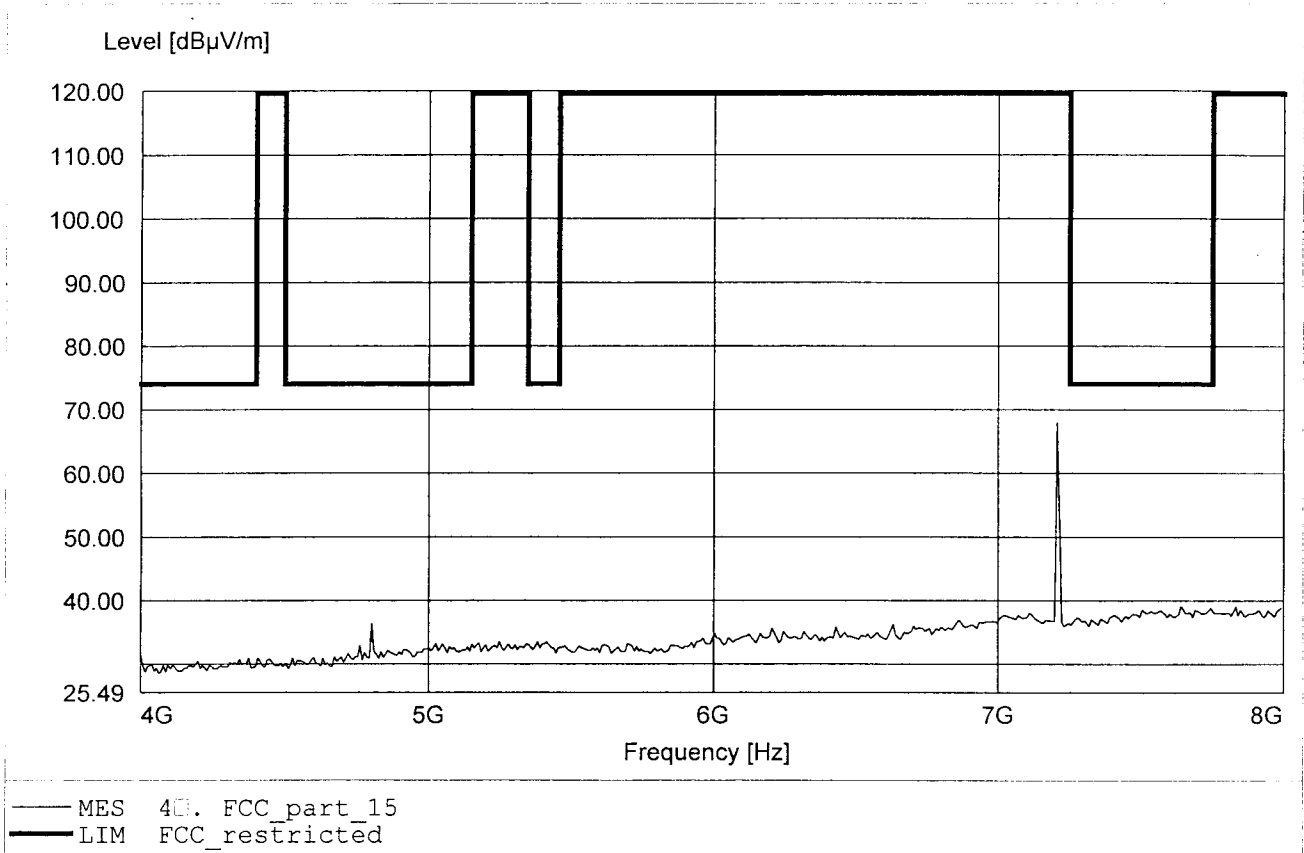


Spurious emissions Field Strength Tx
FCC RULES PART 15, SUBPART C

EUT : Cordless Headset / Headset / Ch.: 0
Model: Gn 9050
Manufacturer: GN Netcom
Operating Condition: Unom: 3.6 V DC (rechargeable battery), Tnom:23°C
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to S15247, Limit 20 dB up peak detector / mode: Tx
Comment 1: Dist.: 3m, Ant.: BBHA2190D, ampl.+HP.
Comment 2: Freq:7.206GHz Emax:70.48dBμV/m RBW: 1 MHz

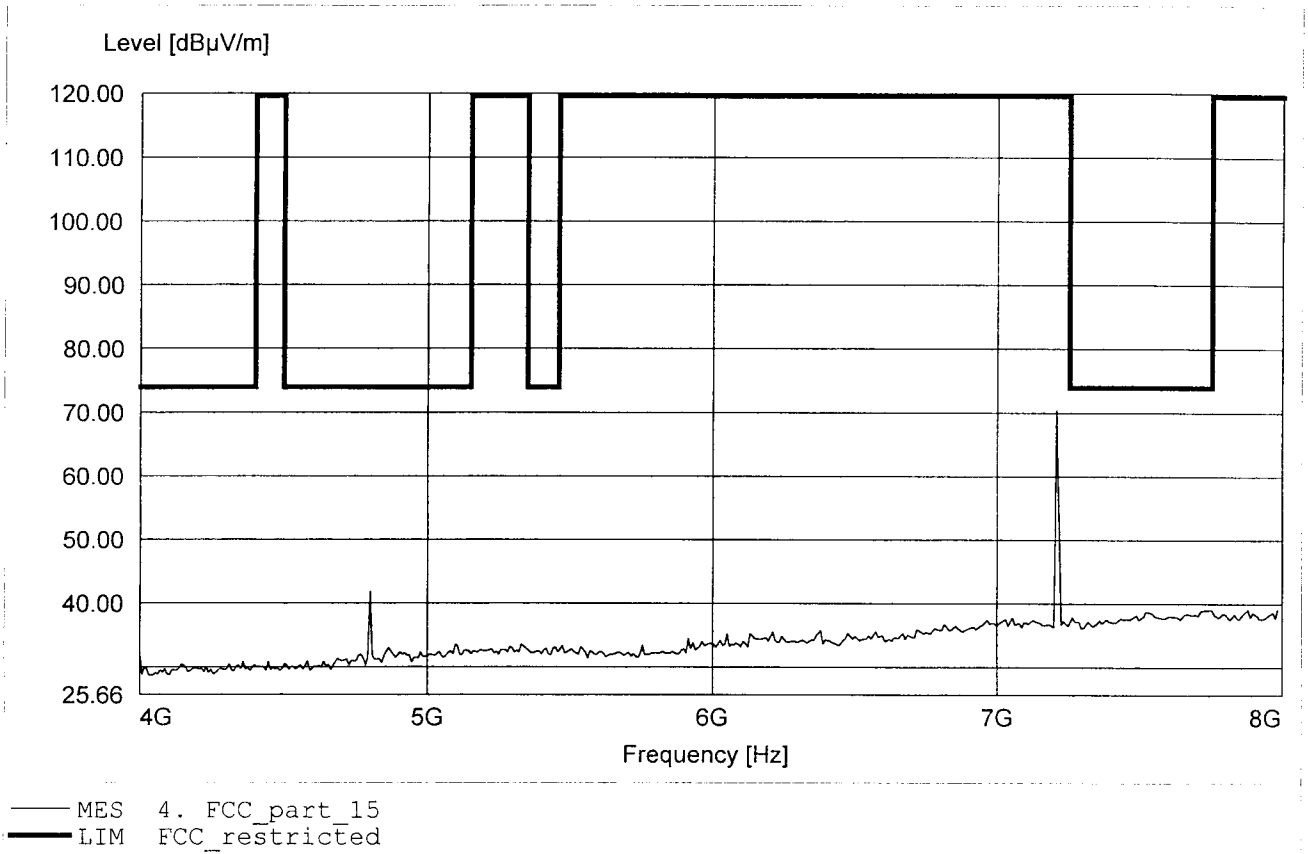


Spurious emissions Field Strength Tx
FCC RULES PART 15, SUBPART C

EUT : Cordless Headset / Headset / Ch.: 0
Model: Gn 9050
Manufacturer: GN Netcom
Operating Condition: Unom: 3.6 V DC (rechargeable battery), Tnom:23°C
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to S15247, Limit 20 dB up peak detector / mode: Tx
Comment 1: Dist.: 3m, Ant.: BBHA2190D, ampl.+HP.
Comment 2: Freq:9.603GHz Emax:52.65dBμV/m RBW: 1 MHz

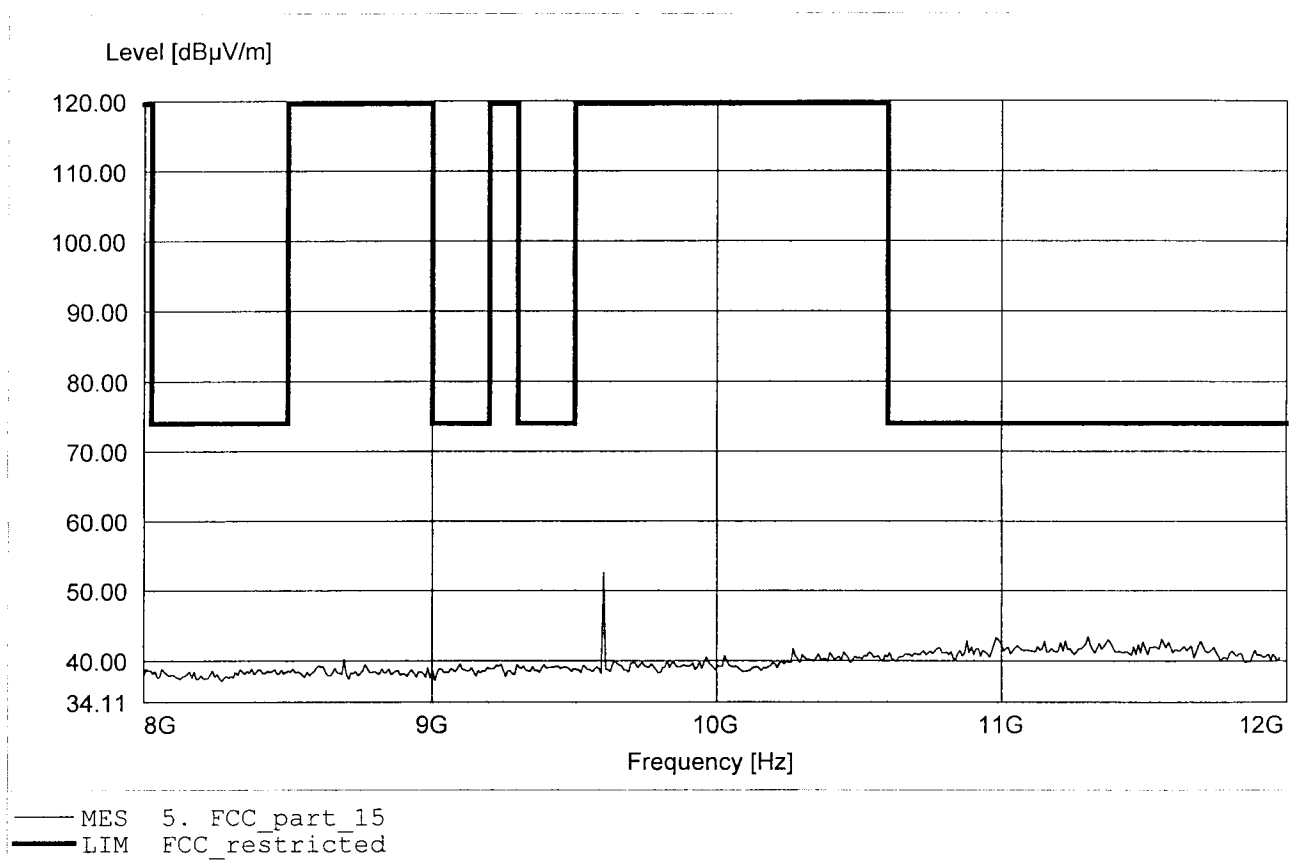


Spurious emissions Field Strength Tx
FCC RULES PART 15, SUBPART C

EUT : Cordless Headset / Headset / Ch.: 0
Model: Gn 9050
Manufacturer: GN Netcom
Operating Condition: Unom: 3.6 V DC (rechargeable battery), Tnom:23°C
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to S15247, Limit 20 dB up peak detector / mode: Tx
Comment 1: Dist.: 3m, Ant.: BBHA2190D, ampl.+HP.
Comment 2: Freq:9.603GHz Emax:51.73dBuV/m RBW: 1 MHz

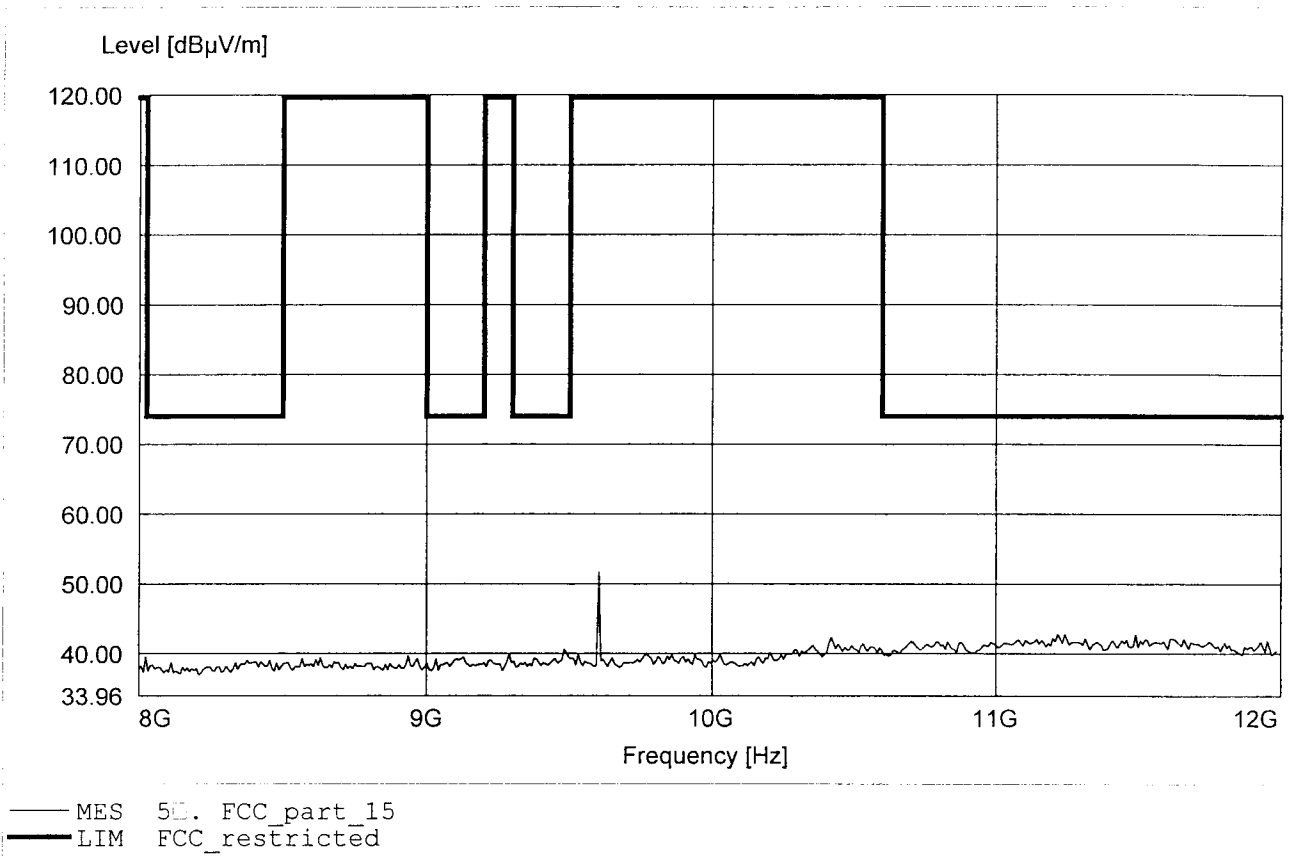


Spurious emissions Field Strength Tx
FCC RULES PART 15, SUBPART C

EUT : Cordless Headset / Headset / Ch.: 0
Model: Gn 9050
Manufacturer: GN Netcom
Operating Condition: Unom: 3.6 V DC (rechargeable battery), Tnom:23°C
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to S15247, Limit 20 dB up peak detector / mode: Tx
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq:14.405GHz Emax:59.31dBμV/m RBW: 1 MHz

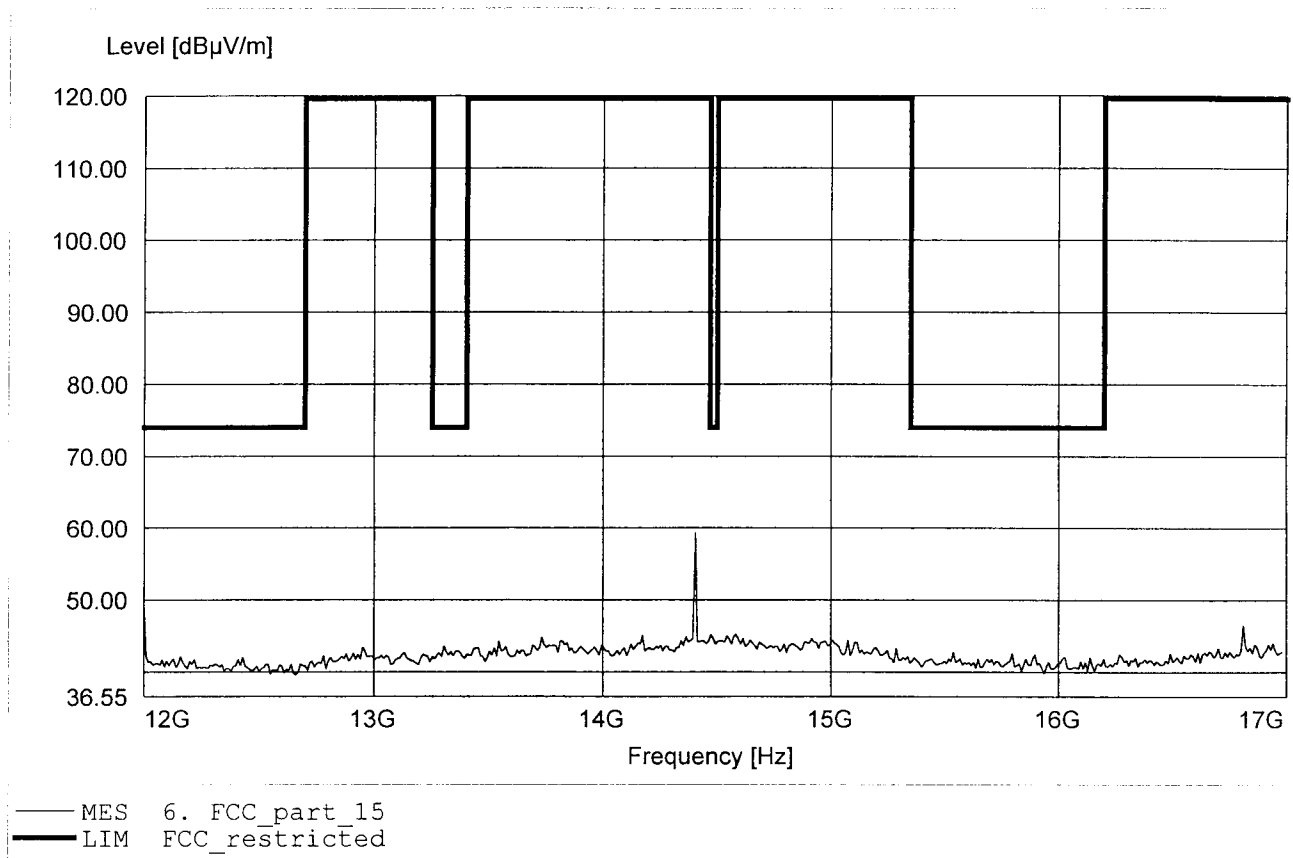


Spurious emissions Field Strength Tx
FCC RULES PART 15, SUBPART C

EUT : Cordless Headset / Headset / Ch.: 0
Model: Gn 9050
Manufacturer: GN Netcom
Operating Condition: Unom: 3.6 V DC (rechargeable battery), Tnom:23°C
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to S15247, Limit 20 dB up peak detector / mode: Tx
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq:14.405GHz Emax:59.76dBμV/m RBW: 1 MHz

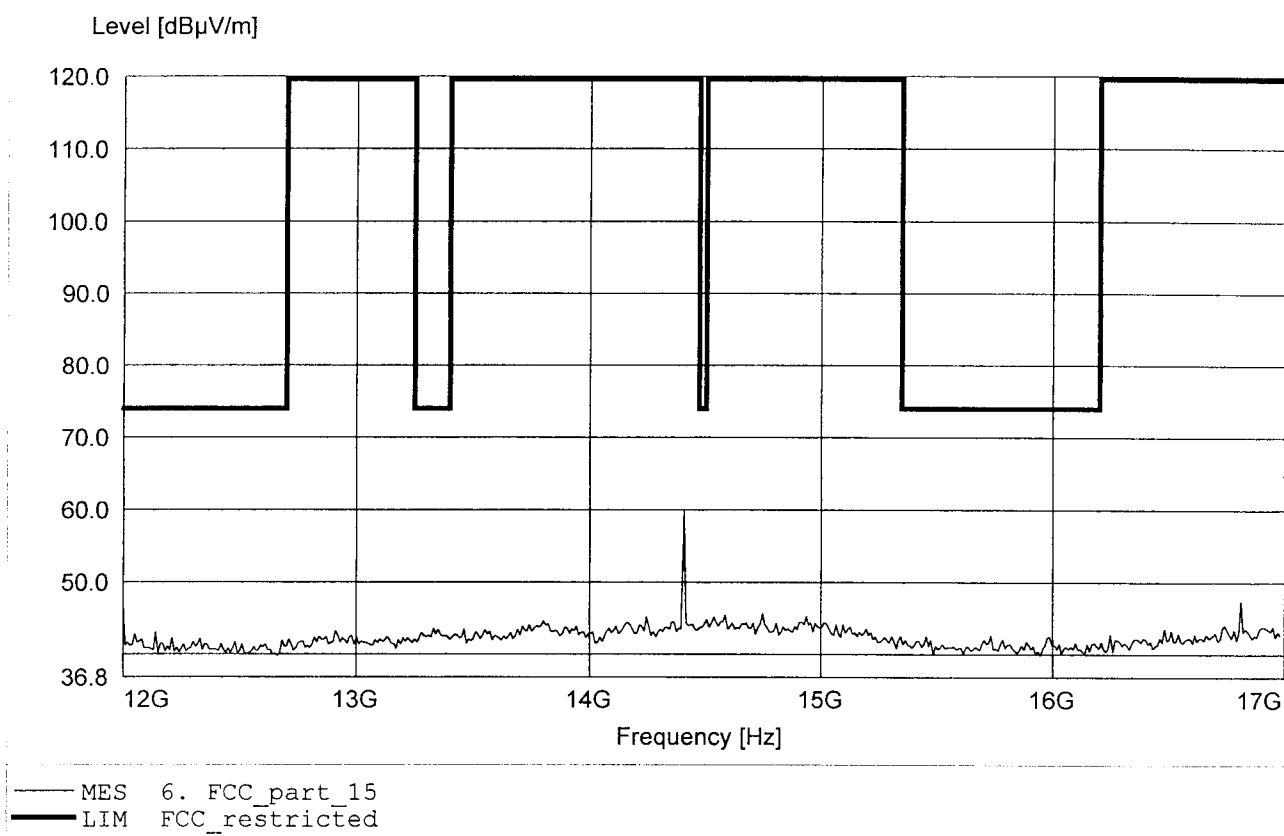


Spurious emissions Field Strength Tx
FCC RULES PART 15, SUBPART C

EUT : Cordless Headset / Headset / Ch.: 0
Model: Gn 9050
Manufacturer: GN Netcom
Operating Condition: Unom: 3.6 V DC (rechargeable battery), Tnom:23°C
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to S15247, Limit 20 dB up peak detector / mode: Tx
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq:25.396GHz Emax:50.32dBμV/m RBW: 1 MHz

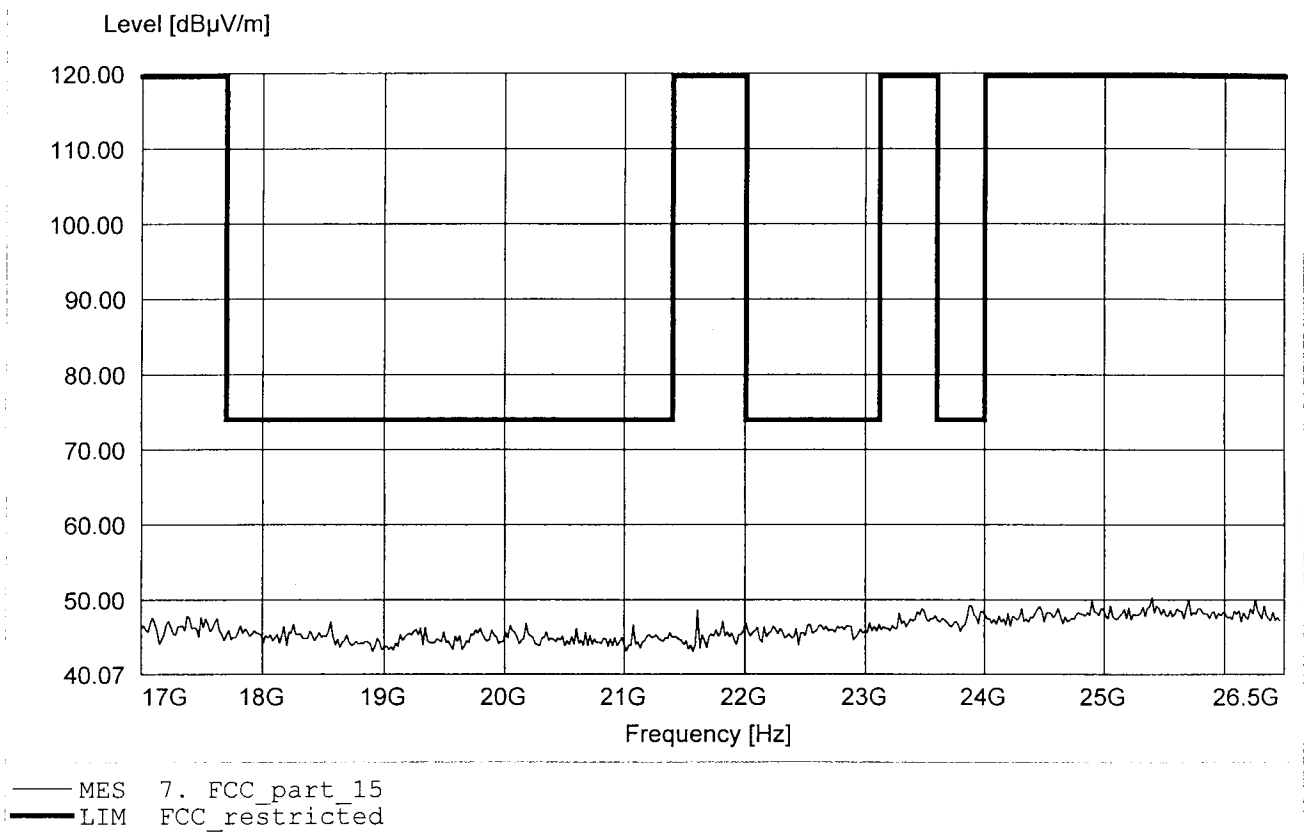


Spurious emissions Field Strength Tx
FCC RULES PART 15, SUBPART C

EUT : Cordless Headset / Headset / Ch.: 0
Model: Gn 9050
Manufacturer: GN Netcom
Operating Condition: Unom: 3.6 V DC (rechargeable battery), Tnom:23°C
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to S15247, Limit 20 dB up peak detector / mode: Tx
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq:25.796GHz Emax:50.74dBuV/m RBW: 1 MHz

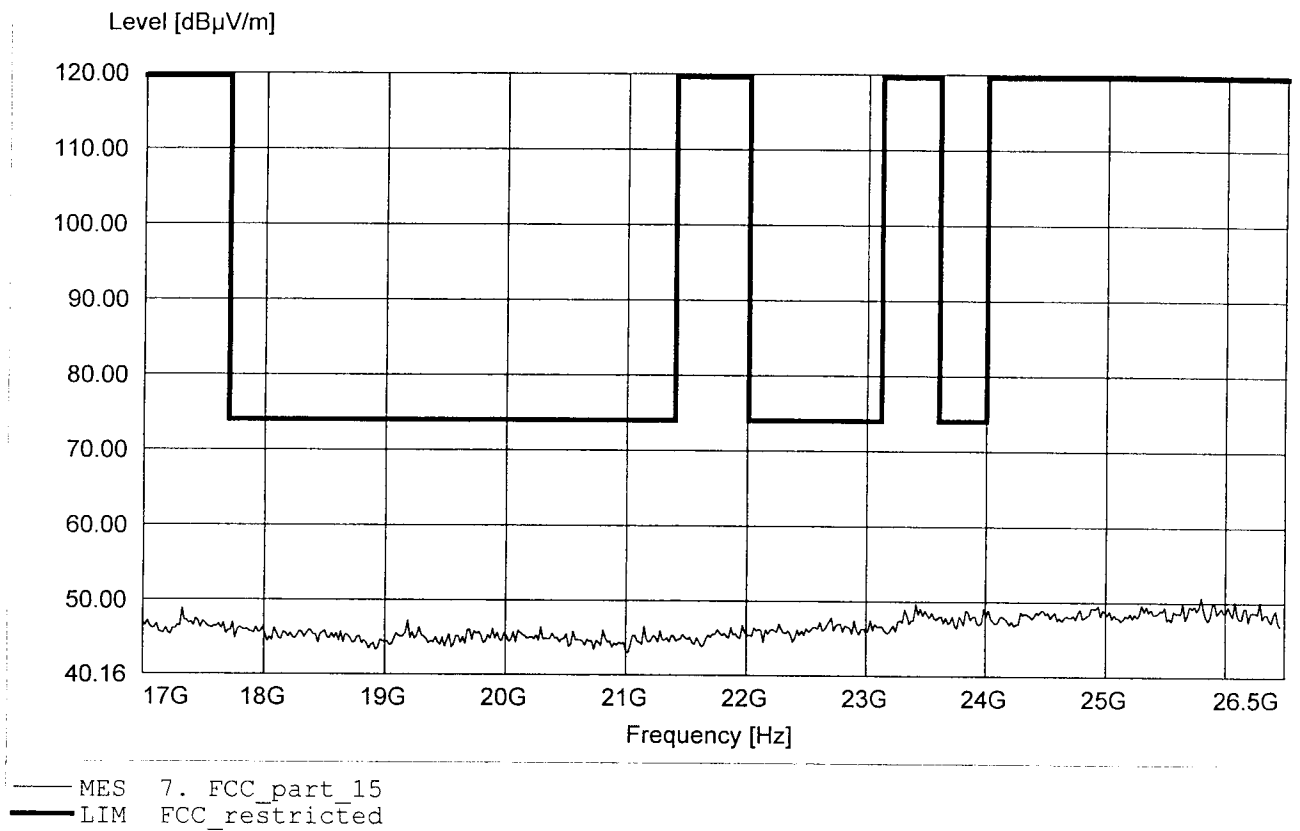


Spurious emissions Field Strength Tx
FCC RULES PART 15, SUBPART C

EUT : Cordless Headset / Headset / Ch.: 40
Model: Gn 9050
Manufacturer: GN Netcom
Operating Condition: Unom: 3.6 V DC (rechargeable battery), Tnom:23°C
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to S15247 / mode: Tx
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq:161.162MHz Emax:32.06dBµV/m RBW: 100 kHz

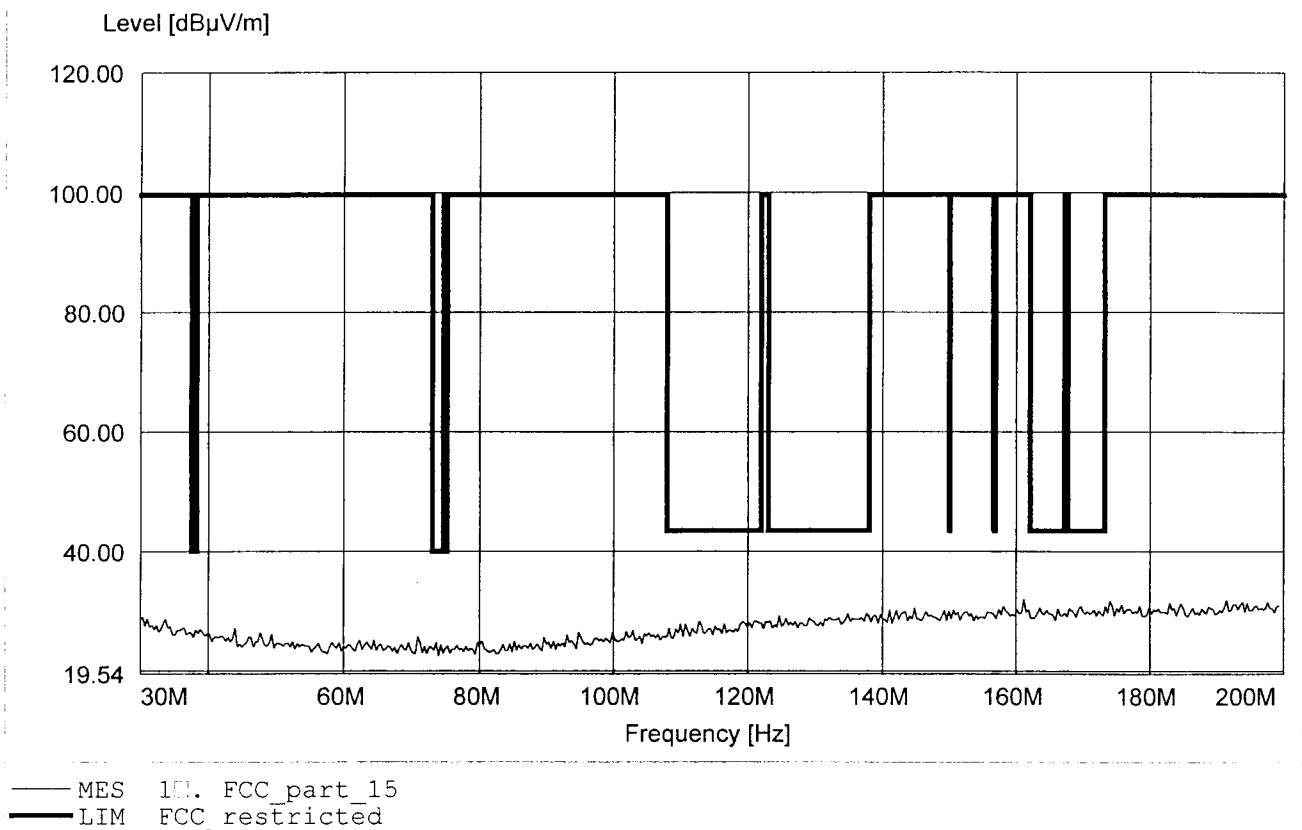


Spurious emissions Field Strength Tx
FCC RULES PART 15, SUBPART C

EUT : Cordless Headset / Headset / Ch.: 40
Model: Gn 9050
Manufacturer: GN Netcom
Operating Condition: Unom: 3.6 V DC (rechargeable battery), Tnom:23°C
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to S15247 / mode: Tx
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq:190.120MHz Emax:32.77dBµV/m RBW: 100 kHz

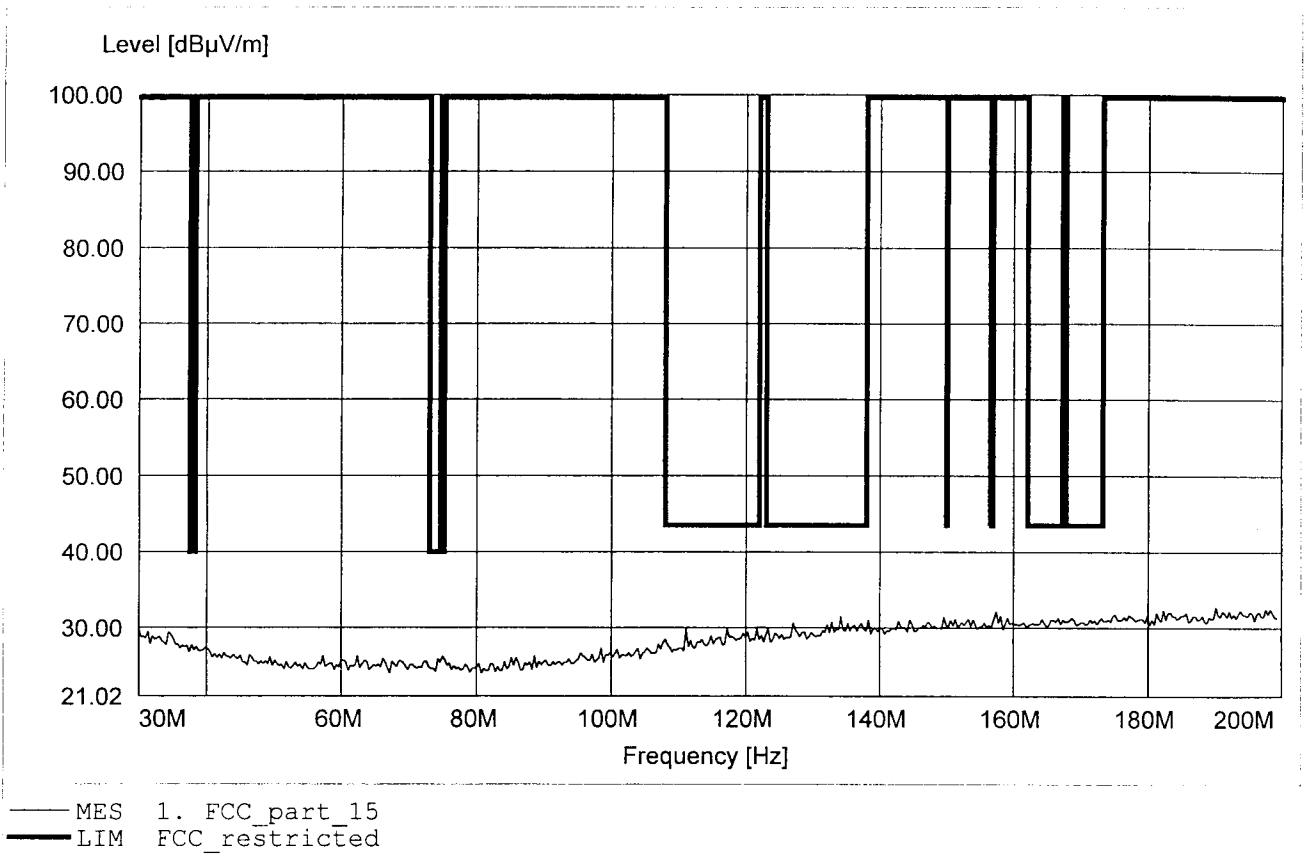


Spurious emissions Field Strength Tx
FCC RULES PART 15, SUBPART C

EUT : Cordless Headset / Headset / Ch.: 40
Model: Gn 9050
Manufacturer: GN Netcom
Operating Condition: Unom: 3.6 V DC (rechargeable battery), Tnom:23°C
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to S15247 / mode: Tx
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq:549.499MHz Emax:22.48dBµV/m RBW: 100 kHz

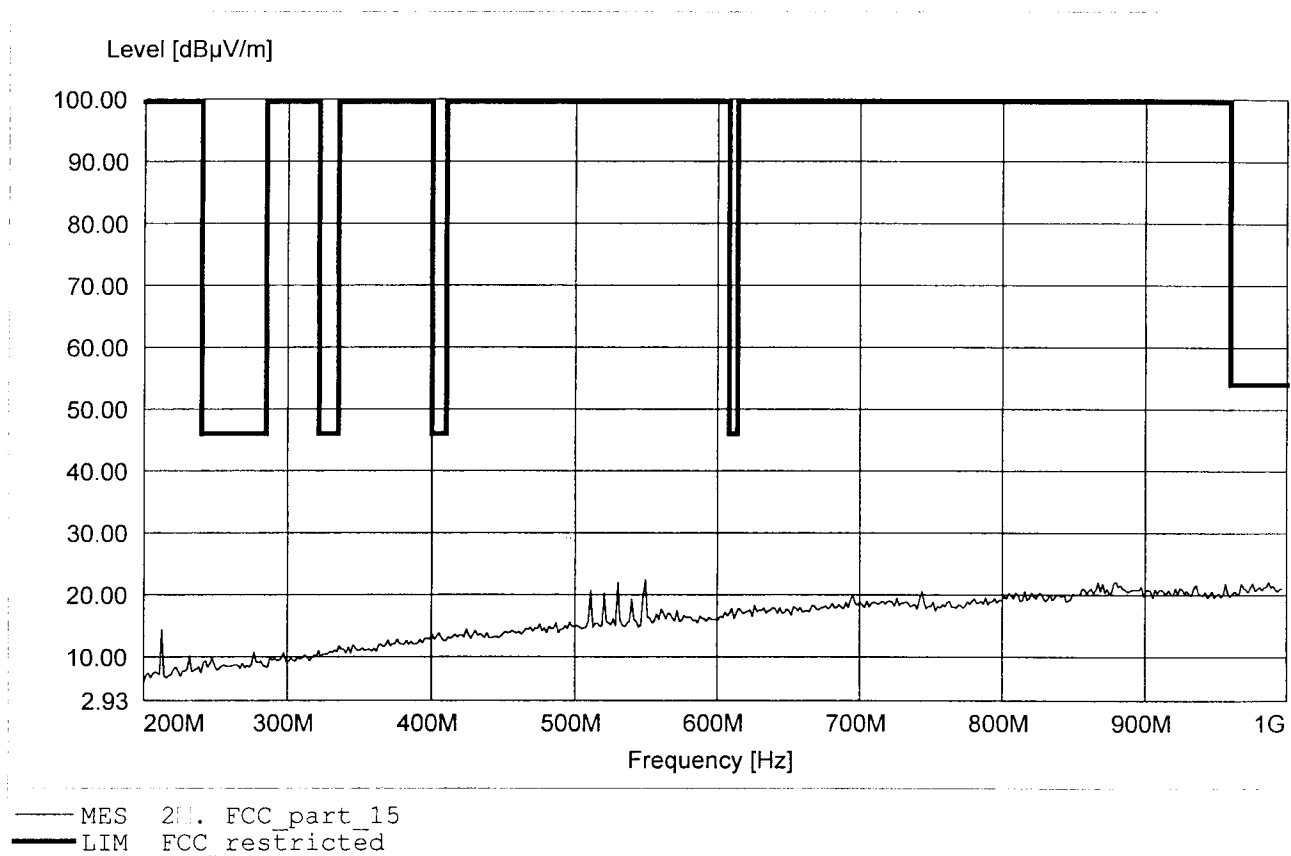


Spurious emissions Field Strength Tx
FCC RULES PART 15, SUBPART C

EUT : Cordless Headset / Headset / Ch.: 40
Model: Gn 9050
Manufacturer: GN Netcom
Operating Condition: Unom: 3.6 V DC (rechargeable battery), Tnom:23°C
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to S15247 / mode: Tx
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq:595.992MHz Emax:41.56dBμV/m RBW: 100 kHz

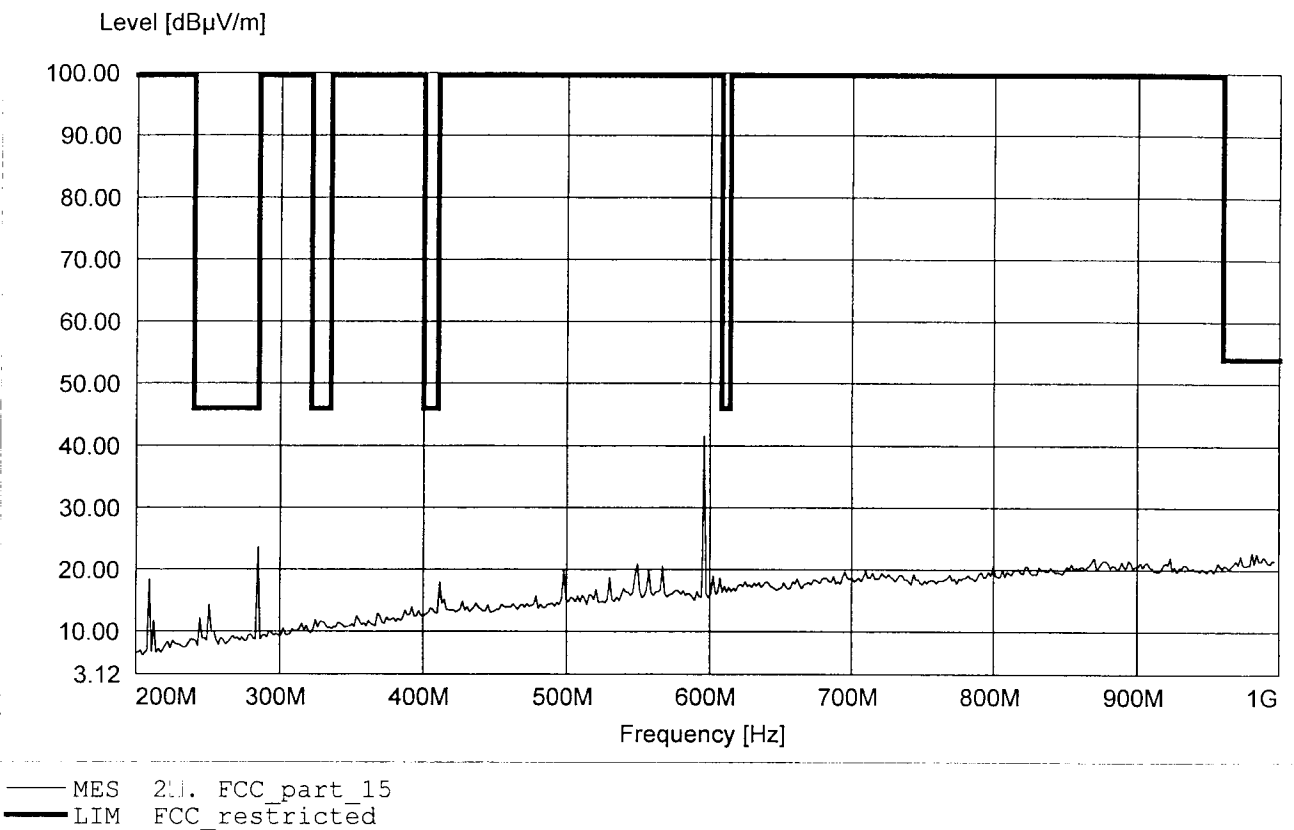


Spurious emissions Field Strength Tx
FCC RULES PART 15, SUBPART C

EUT : Cordless Headset / Headset / Ch.: 40
Model: Gn 9050
Manufacturer: GN Netcom
Operating Condition: Unom: 3.6 V DC (rechargeable battery), Tnom:23°C
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to S15247, Limit 20 dB up peak detector / mode: Tx
Comment 1: Dist.: 3m, Ant.: BBHA2190D, amplif.
Comment 2: Freq:2.359GHz Emax:42.53dBμV/m RBW: 1 MHz

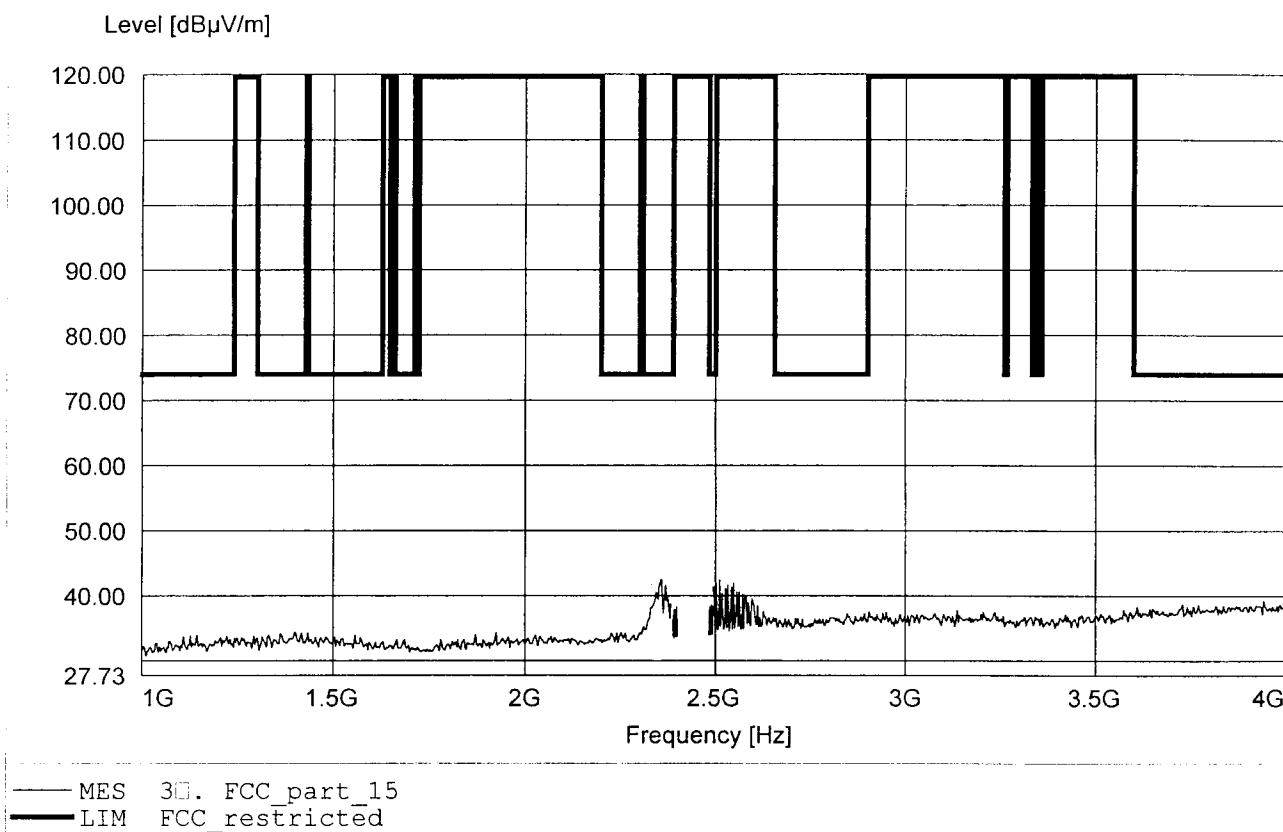


Spurious emissions Field Strength Tx
FCC RULES PART 15, SUBPART C

EUT : Cordless Headset / Headset / Ch.: 40
Model: Gn 9050
Manufacturer: GN Netcom
Operating Condition: Unom: 3.6 V DC (rechargeable battery), Tnom:23°C
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, Limit 20 dB up peak detector / mode: Tx
Comment 1: Dist.: 3m, Ant.: BBHA2190D, amplif.
Comment 2: Freq:3.955GHz Emax:39.80dBμV/m RBW: 1 MHz

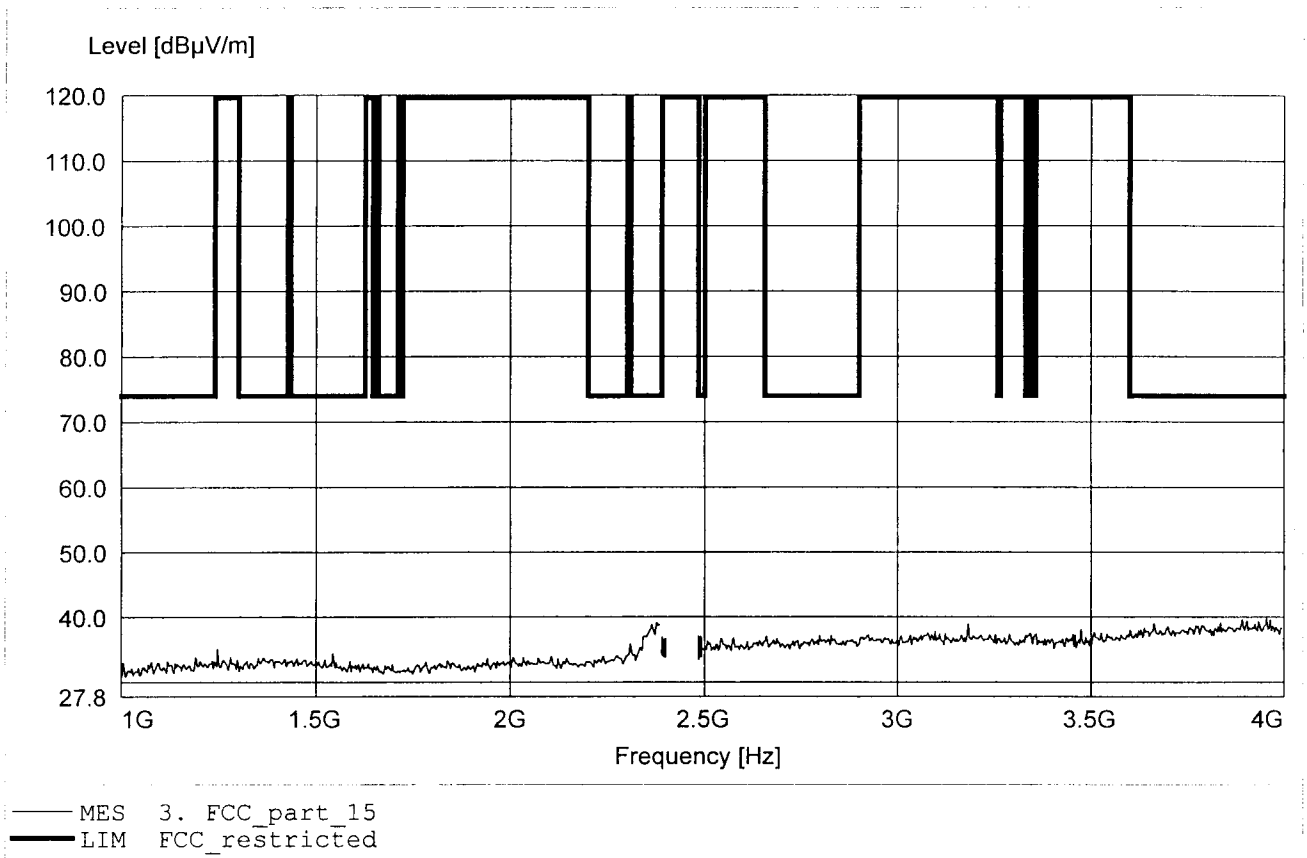


Spurious emissions Field Strength Tx
FCC RULES PART 15, SUBPART C

EUT : Cordless Headset / Headset / Ch.: 40
Model: Gn 9050
Manufacturer: GN Netcom
Operating Condition: Unom: 3.6 V DC (rechargeable battery), Tnom:23°C
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to S15247, Limit 20 dB up peak detector / mode: Tx
Comment 1: Dist.: 3m, Ant.: BBHA2190D, ampl.+HP.
Comment 2: Freq:7.327GHz Emax:68.79dBμV/m RBW: 1 MHz

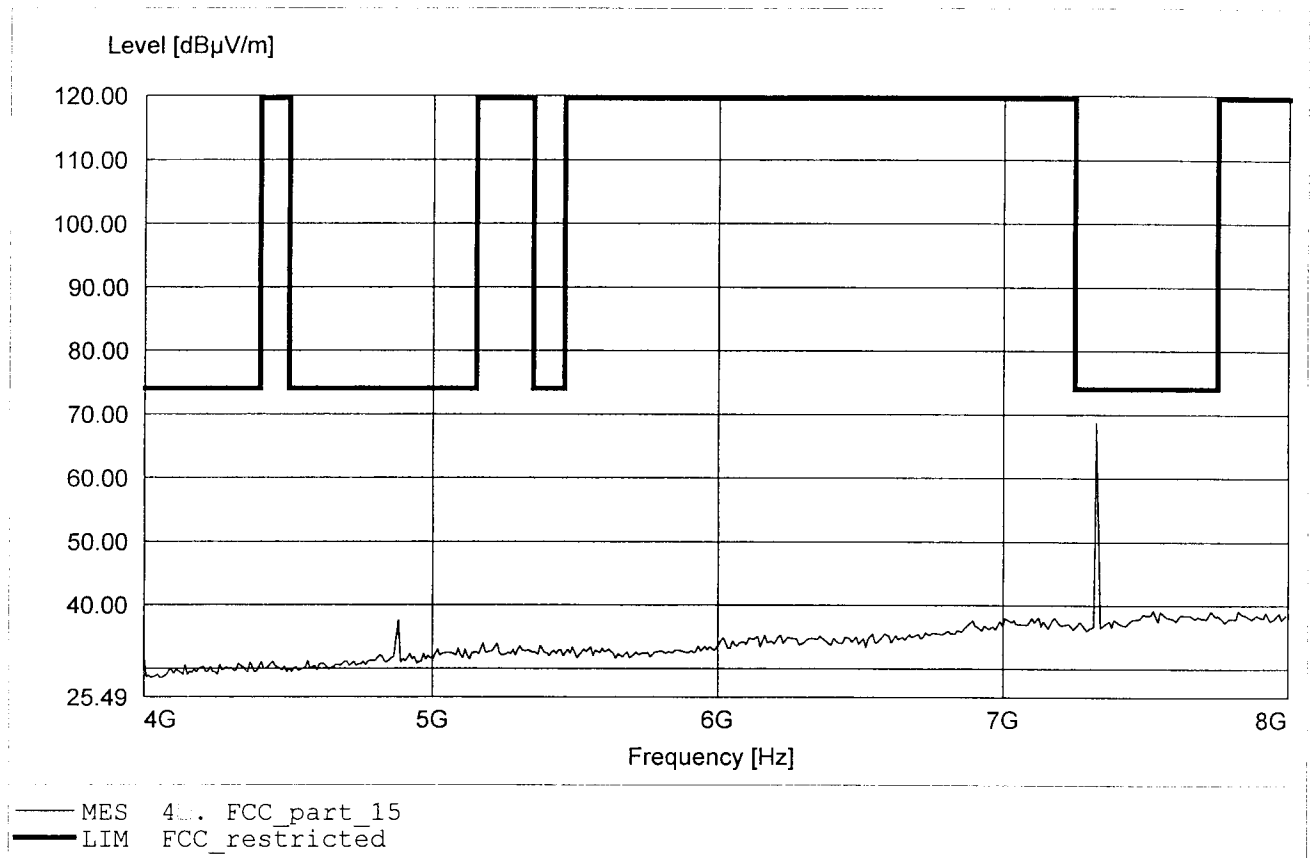


Spurious emissions Field Strength Tx
FCC RULES PART 15, SUBPART C

EUT : Cordless Headset / Headset / Ch.: 40
Model: Gn 9050
Manufacturer: GN Netcom
Operating Condition: Unom: 3.6 V DC (rechargeable battery), Tnom:23°C
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to S15247, Limit 20 dB up peak detector / mode: Tx
Comment 1: Dist.: 3m, Ant.: BBHA2190D, ampl.+HP.
Comment 2: Freq:7.327GHz Emax:70.25dBµV/m RBW: 1 MHz

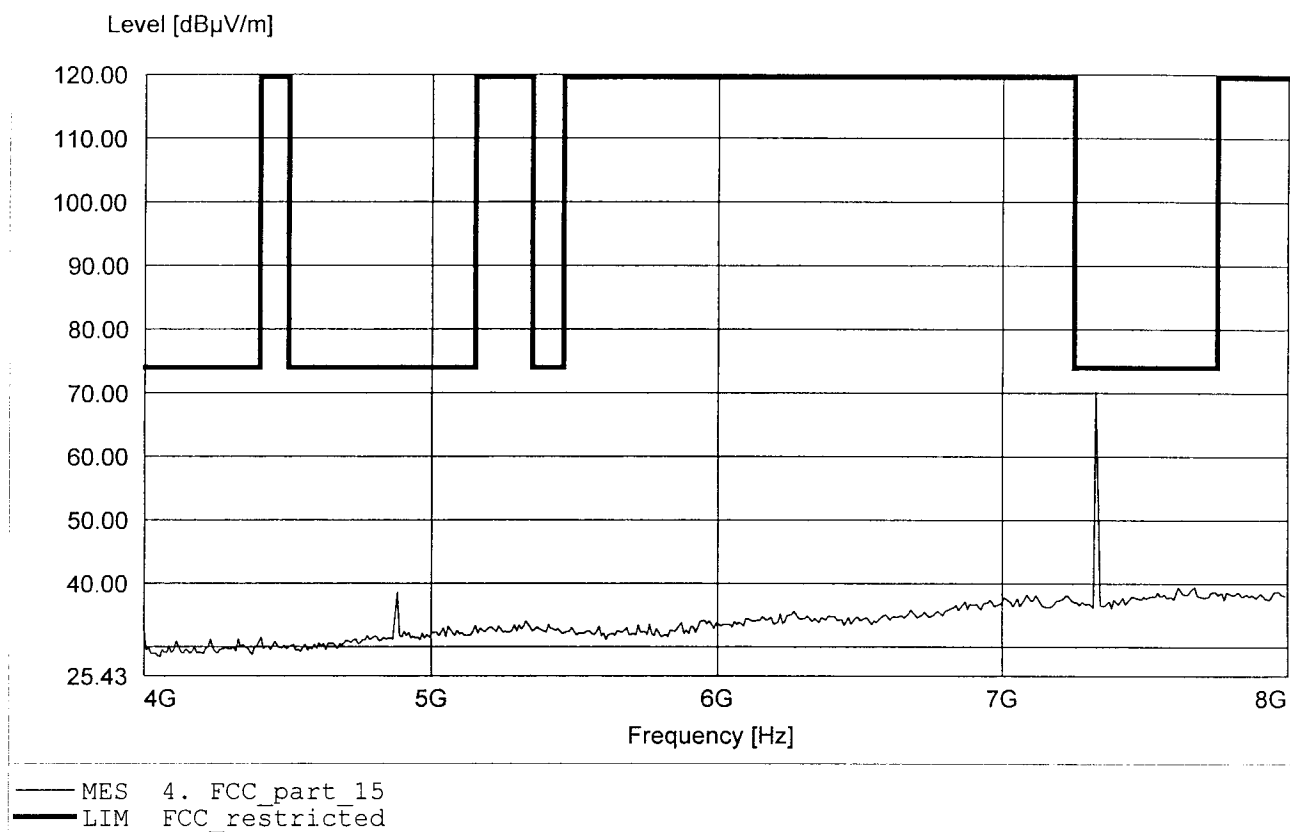


Spurious emissions Field Strength Tx
FCC RULES PART 15, SUBPART C

EUT : Cordless Headset / Headset / Ch.: 40
Model: Gn 9050
Manufacturer: GN Netcom
Operating Condition: Unom: 3.6 V DC (rechargeable battery), Tnom:23°C
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to S15247, Limit 20 dB up peak detector / mode: Tx
Comment 1: Dist.: 3m, Ant.: BBHA2190D, ampl.+HP.
Comment 2: Freq:9.772GHz Emax:51.58dBμV/m RBW: 1 MHz

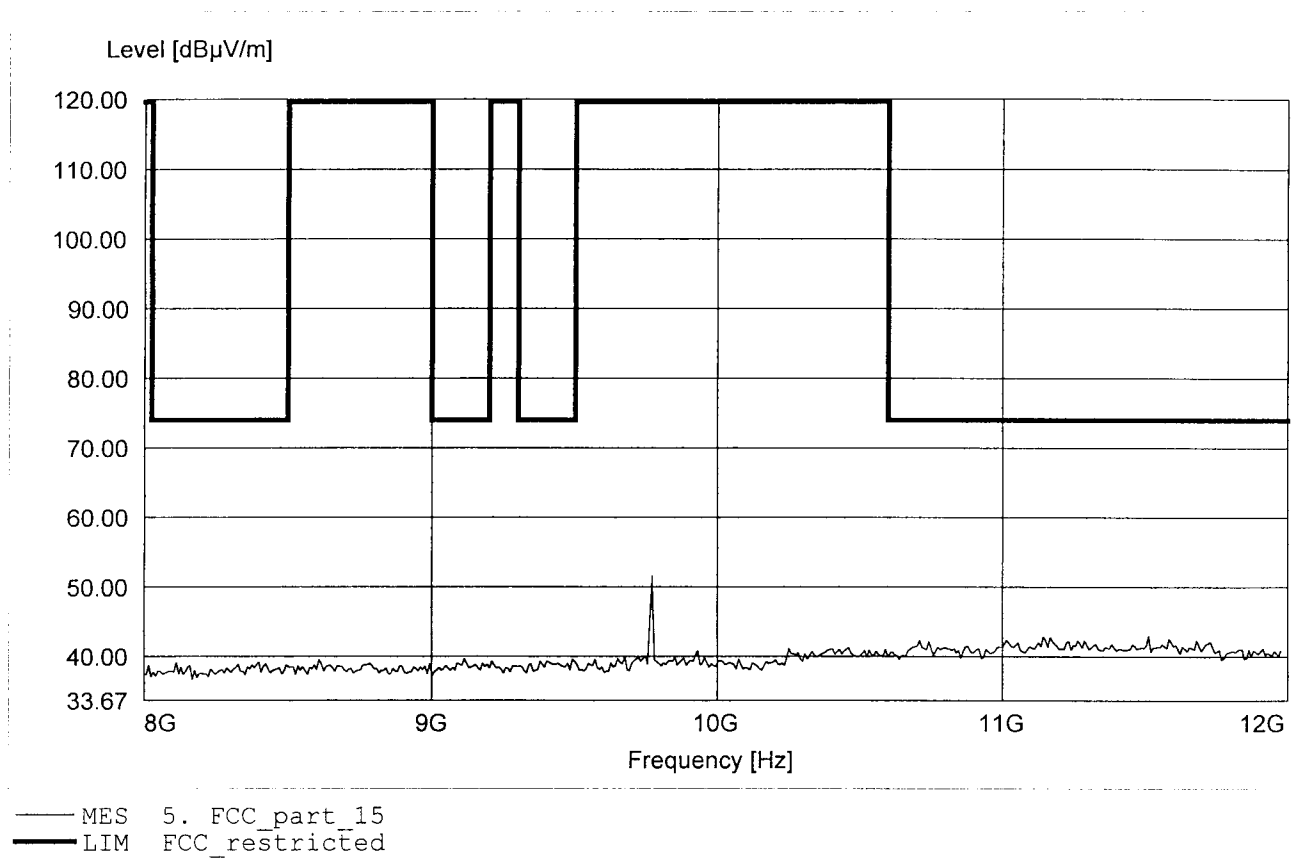


Spurious emissions Field Strength Tx
FCC RULES PART 15, SUBPART C

EUT : Cordless Headset / Headset / Ch.: 40
Model: Gn 9050
Manufacturer: GN Netcom
Operating Condition: Unom: 3.6 V DC (rechargeable battery), Tnom:23°C
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to S15247, Limit 20 dB up peak detector / mode: Tx
Comment 1: Dist.: 3m, Ant.: BBHA2190D, ampl.+HP.
Comment 2: Freq:11.303GHz Emax:43.14dBμV/m RBW: 1 MHz

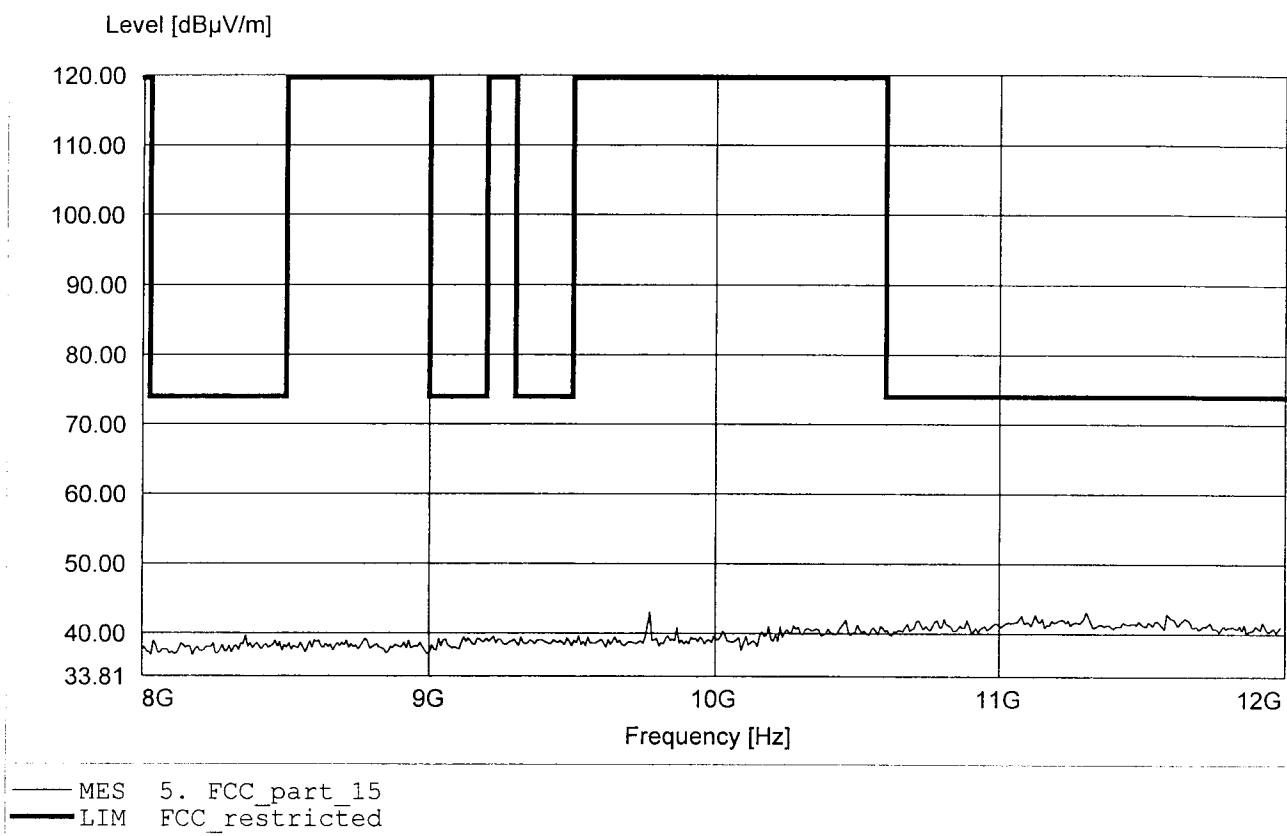


Spurious emissions Field Strength Tx
FCC RULES PART 15, SUBPART C

EUT : Cordless Headset / Headset / Ch.: 40
Model: Gn 9050
Manufacturer: GN Netcom
Operating Condition: Unom: 3.6 V DC (rechargeable battery), Tnom:23°C
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to S15247, Limit 20 dB up peak detector / mode: Tx
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq:12.210GHz Emax:61.20dBμV/m RBW: 1 MHz

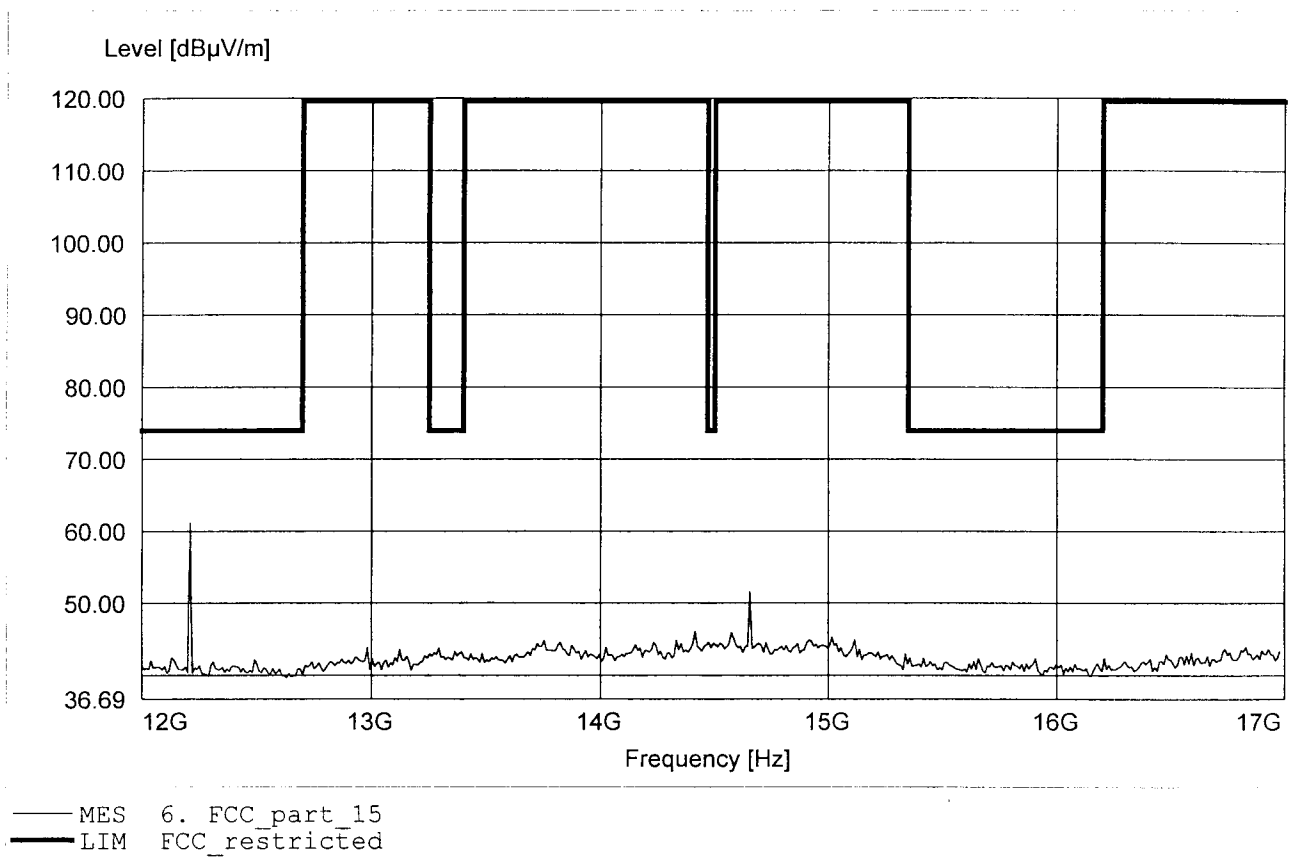


Spurious emissions Field Strength Tx
FCC RULES PART 15, SUBPART C

EUT : Cordless Headset / Headset / Ch.: 40
Model: Gn 9050
Manufacturer: GN Netcom
Operating Condition: Unom: 3.6 V DC (rechargeable battery), Tnom:23°C
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to S15247, Limit 20 dB up peak detector / mode: Tx
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq:14.655GHz Emax:49.77dBμV/m RBW: 1 MHz

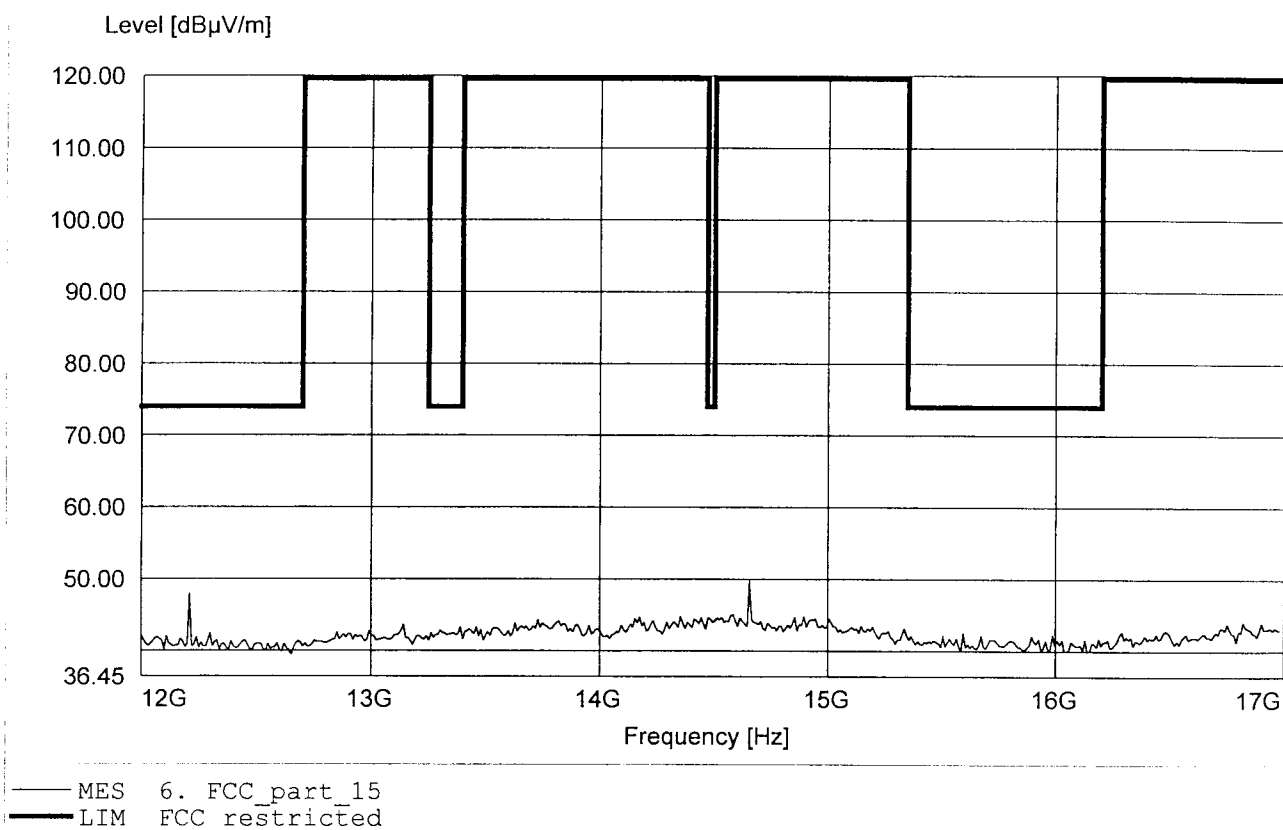


Spurious emissions Field Strength Tx
FCC RULES PART 15, SUBPART C

EUT : Cordless Headset / Headset / Ch.: 40
Model: Gn 9050
Manufacturer: GN Netcom
Operating Condition: Unom: 3.6 V DC (rechargeable battery), Tnom:23°C
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to S15247, Limit 20 dB up peak detector / mode: Tx
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq:17.095GHz Emax:50.79dBμV/m RBW: 1 MHz

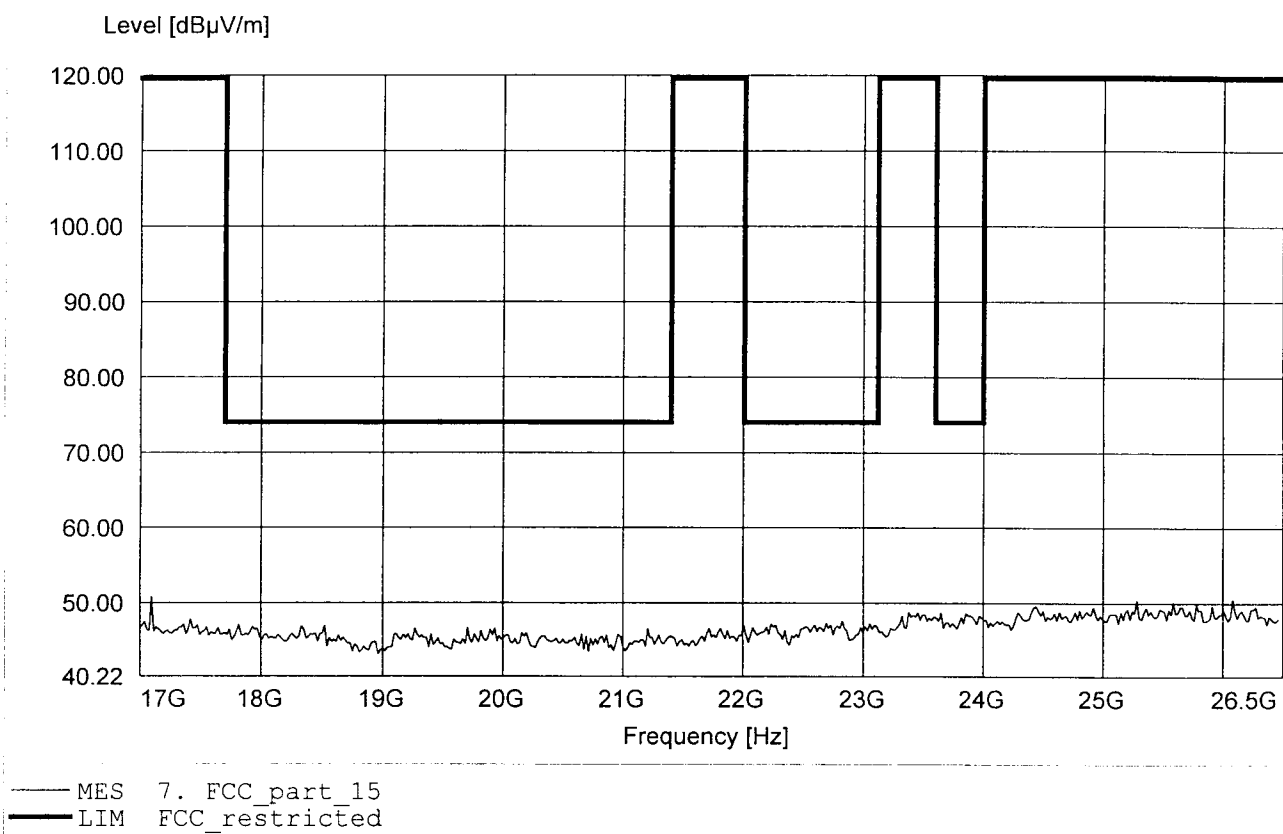


Spurious emissions Field Strength Tx
FCC RULES PART 15, SUBPART C

EUT : Cordless Headset / Headset / Ch.: 40
Model: Gn 9050
Manufacturer: GN Netcom
Operating Condition: Unom: 3.6 V DC (rechargeable battery), Tnom:23°C
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to S15247, Limit 20 dB up peak detector / mode: Tx
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq:25.815GHz Emax:50.48dBμV/m RBW: 1 MHz

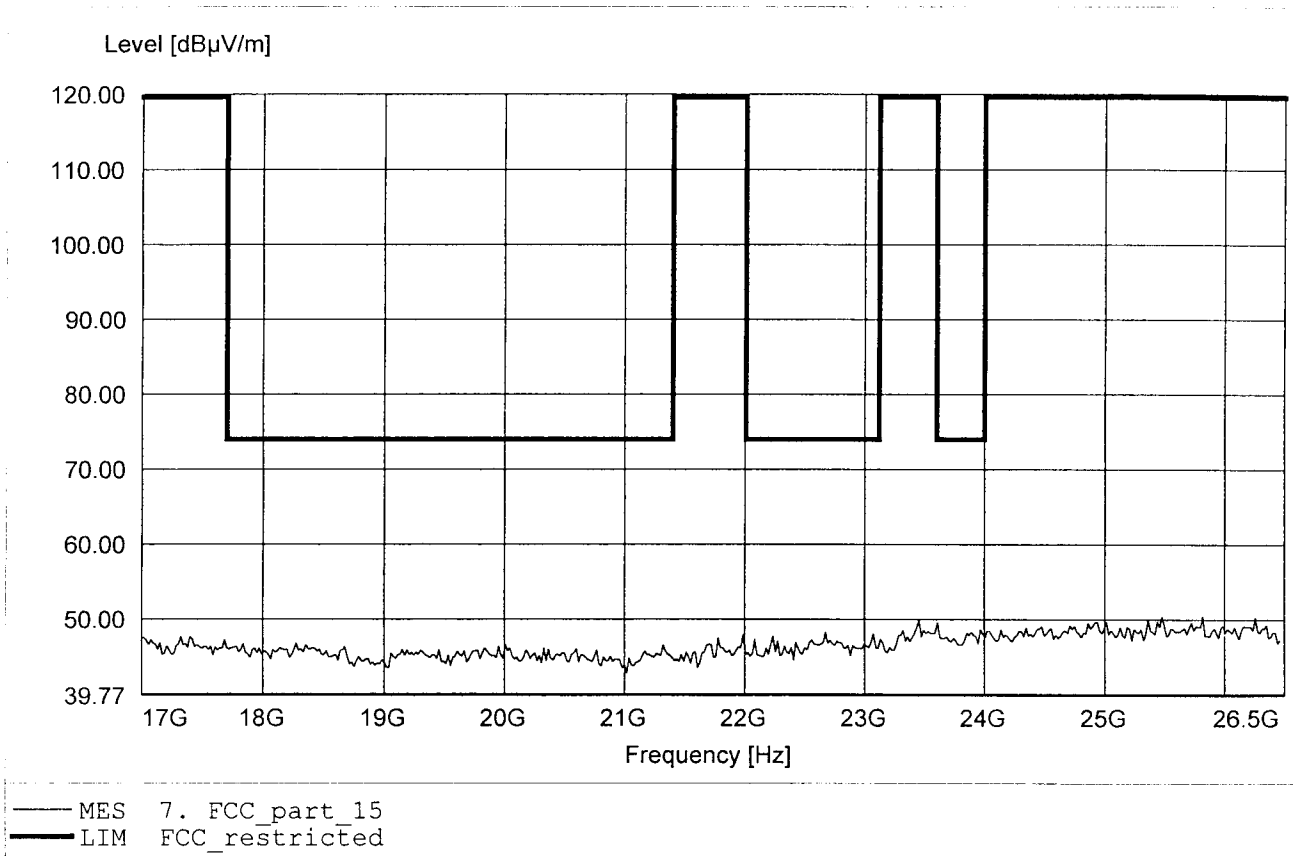


Spurious emissions Field Strength Tx
FCC RULES PART 15, SUBPART C

EUT : Cordless Headset / Headset / Ch.: 78
Model: Gn 9050
Manufacturer: GN Netcom
Operating Condition: Unom: 3.6 V DC (rechargeable battery), Tnom:23°C
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to S15247 / mode: Tx
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq:183.307MHz Emax:32.66dBμV/m RBW: 100 kHz

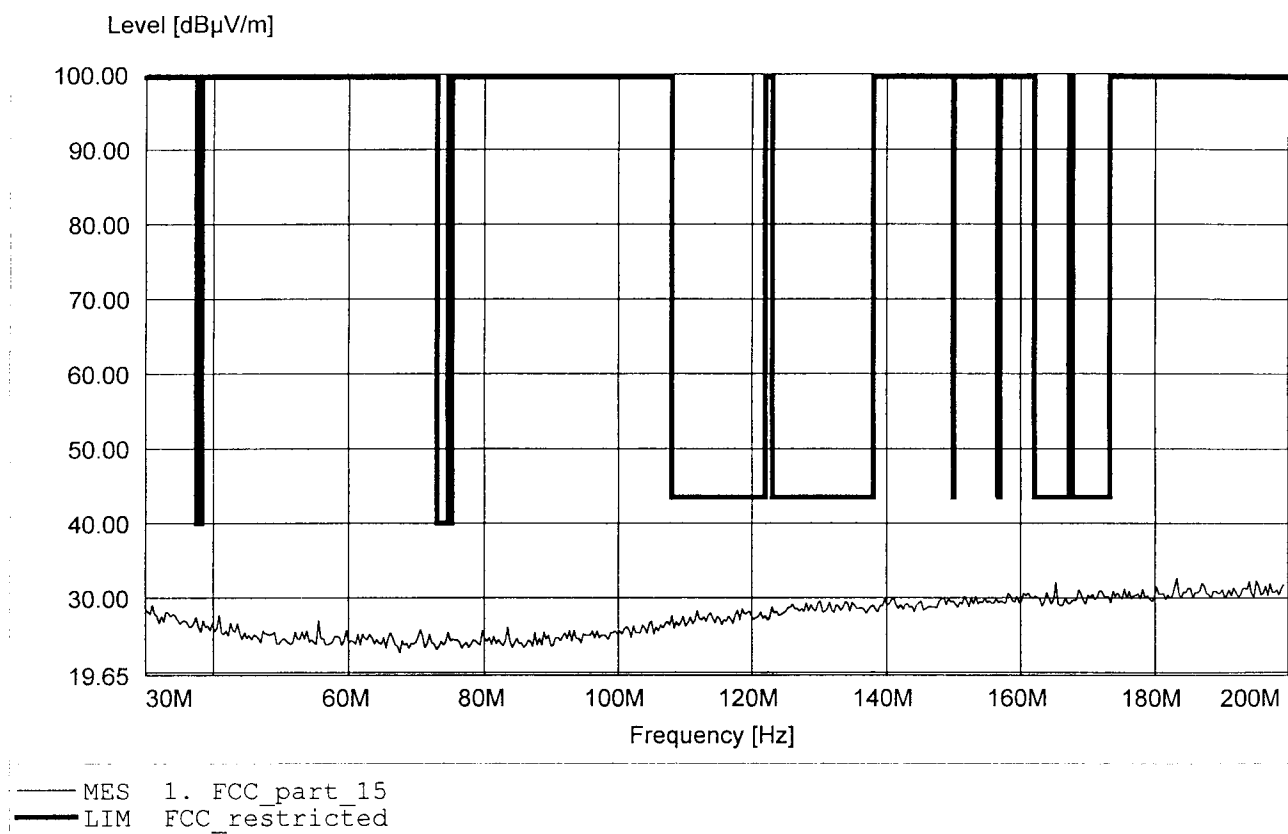


Spurious emissions Field Strength Tx
FCC RULES PART 15, SUBPART C

EUT : Cordless Headset / Headset / Ch.: 78
Model: Gn 9050
Manufacturer: GN Netcom
Operating Condition: Unom: 3.6 V DC (rechargeable battery), Tnom:23°C
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to S15247 / mode: Tx
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq:188.417MHz Emax:33.12dBµV/m RBW: 100 kHz

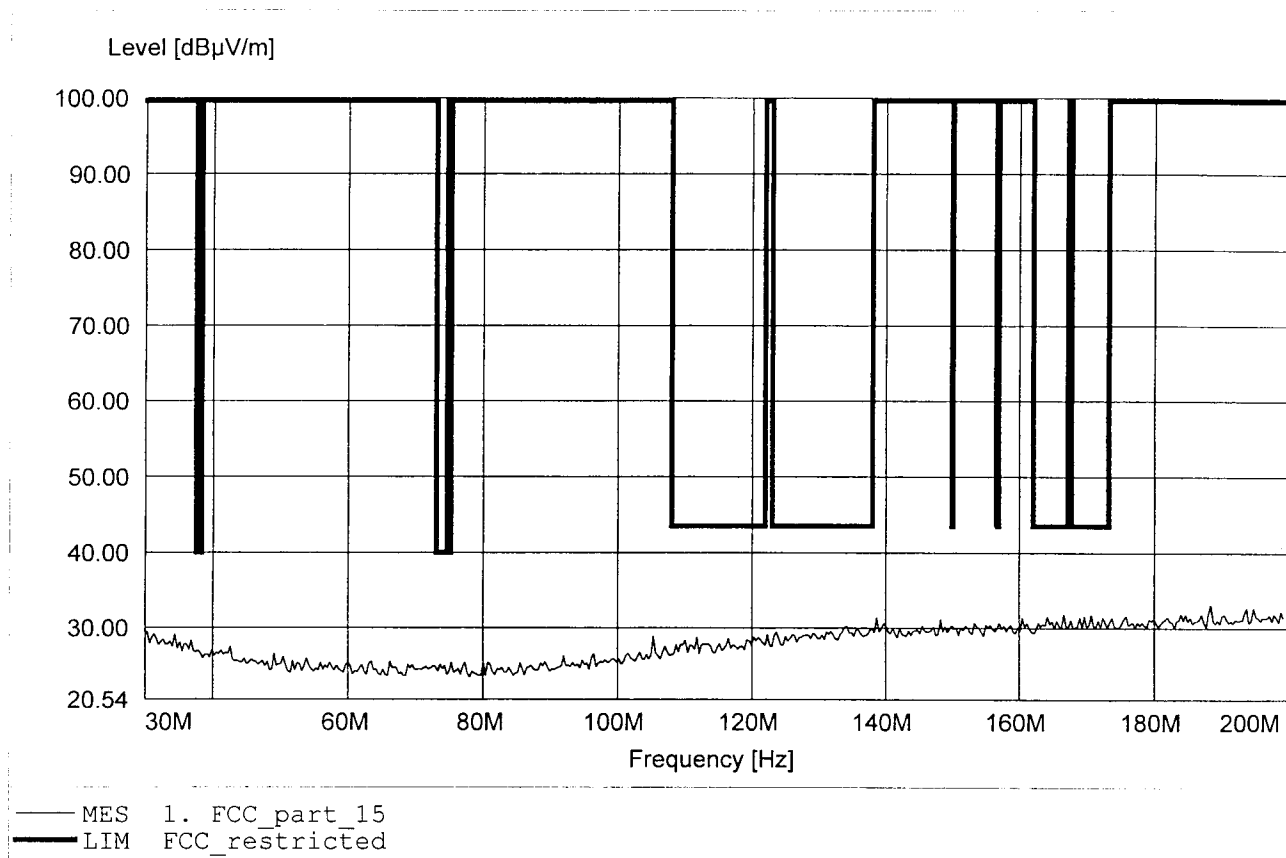


Spurious emissions Field Strength Tx
FCC RULES PART 15, SUBPART C

EUT : Cordless Headset / Headset / Ch.: 78
Model: Gn 9050
Manufacturer: GN Netcom
Operating Condition: Unom: 3.6 V DC (rechargeable battery), Tnom:23°C
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to S15247 / mode: Tx
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq:990.381MHz Emax:22.19dBμV/m RBW: 100 kHz

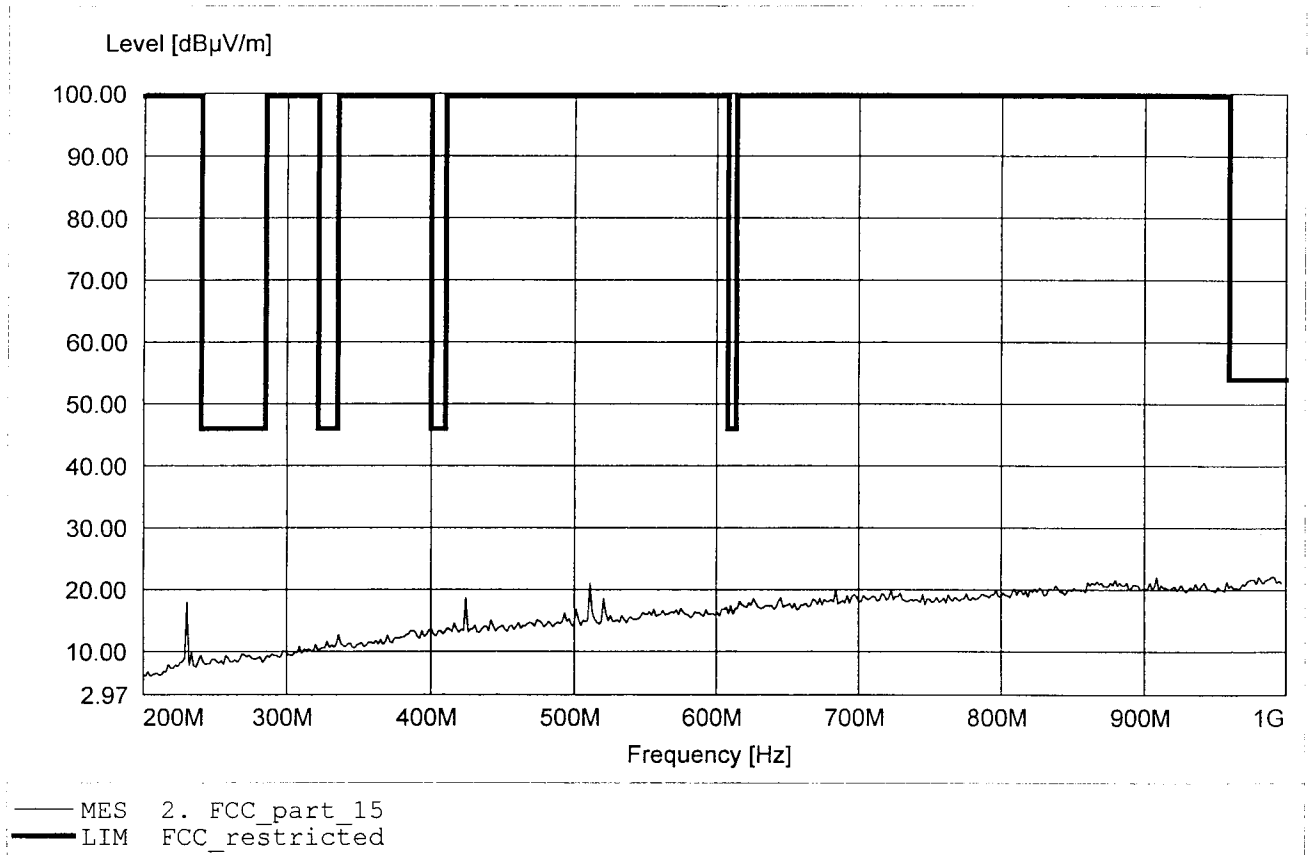


Spurious emissions Field Strength Tx
FCC RULES PART 15, SUBPART C

EUT : Cordless Headset / Headset / Ch.: 78
Model: Gn 9050
Manufacturer: GN Netcom
Operating Condition: Unom: 3.6 V DC (rechargeable battery), Tnom:23°C
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to S15247 / mode: Tx
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq:865.331MHz Emax:22.42dBμV/m RBW: 100 kHz

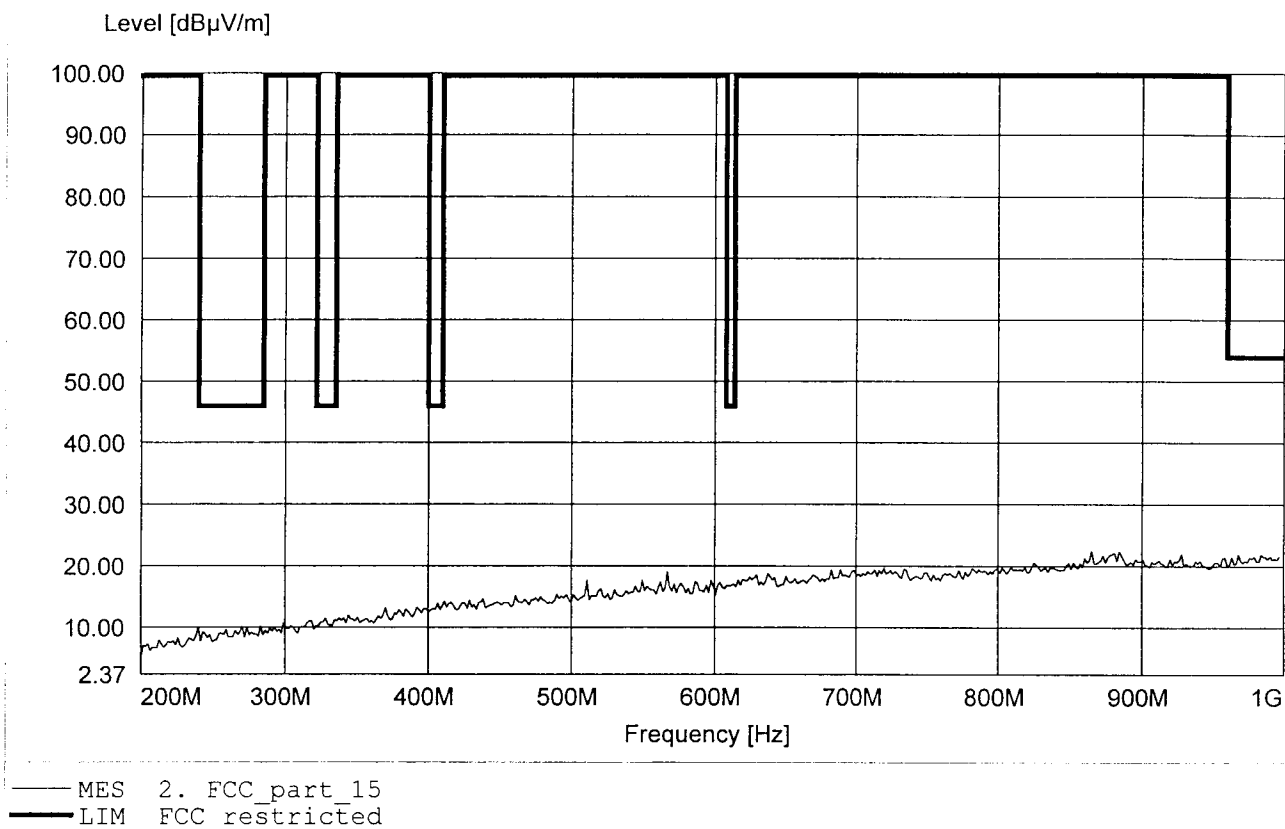


Spurious emissions Field Strength Tx
FCC RULES PART 15, SUBPART C

EUT : Cordless Headset / Headset / Ch.: 78
Model: Gn 9050
Manufacturer: GN Netcom
Operating Condition: Unom: 3.6 V DC (rechargeable battery), Tnom:23°C
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, Limit 20 dB up peak detector / mode: Tx
Comment 1: Dist.: 3m, Ant.: BBHA2190D, amplif.
Comment 2: Freq:2.483GHz Emax:77.63dBμV/m RBW: 1 MHz

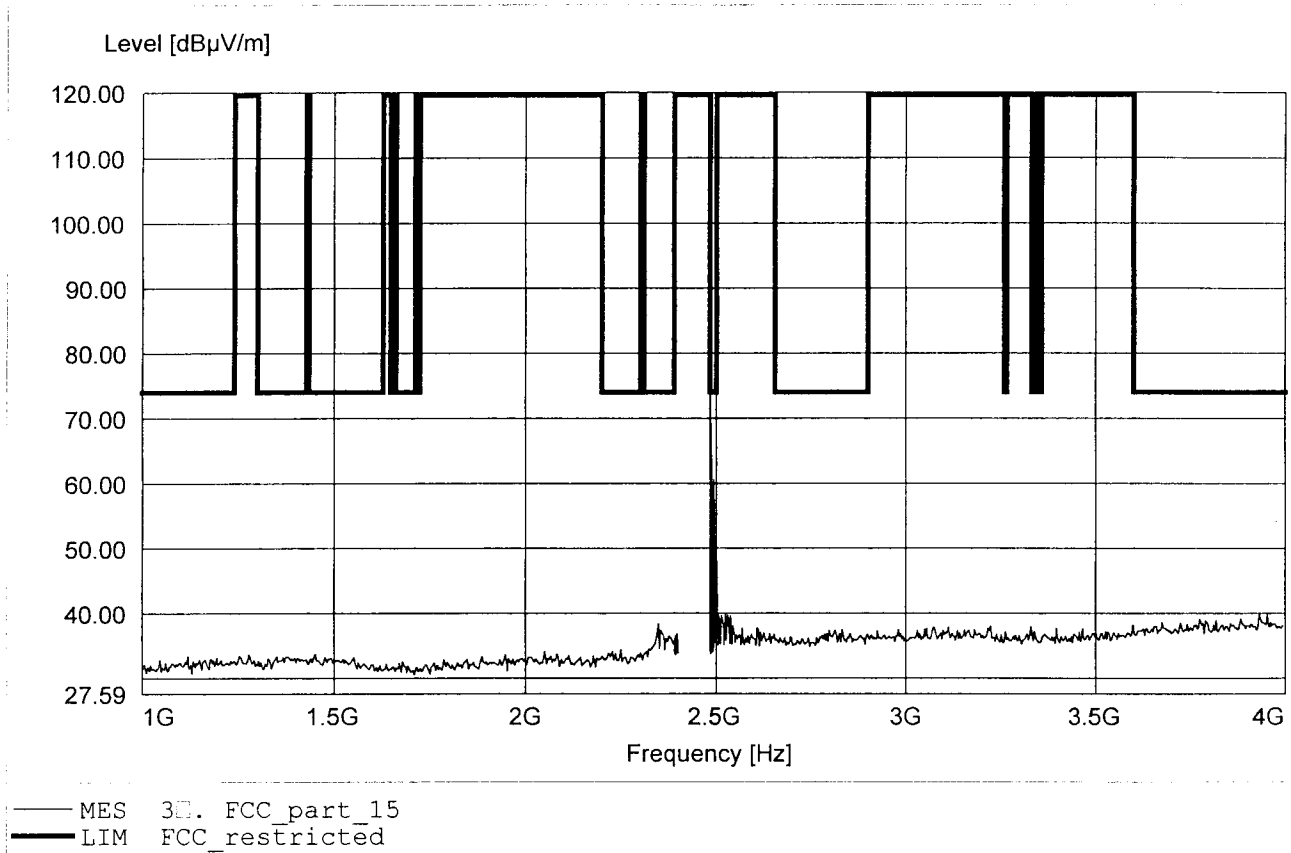


Spurious emissions Field Strength Tx
FCC RULES PART 15, SUBPART C

EUT : Cordless Headset / Headset / Ch.: 78
Model: Gn 9050
Manufacturer: GN Netcom
Operating Condition: Unom: 3.6 V DC (rechargeable battery), Tnom:23°C
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to S15247, Limit 20 dB up peak detector / mode: Tx
Comment 1: Dist.: 3m, Ant.: BBHA2190D, amplif.
Comment 2: Freq:2.483GHz Emax:71.00dBuV/m RBW: 1 MHz

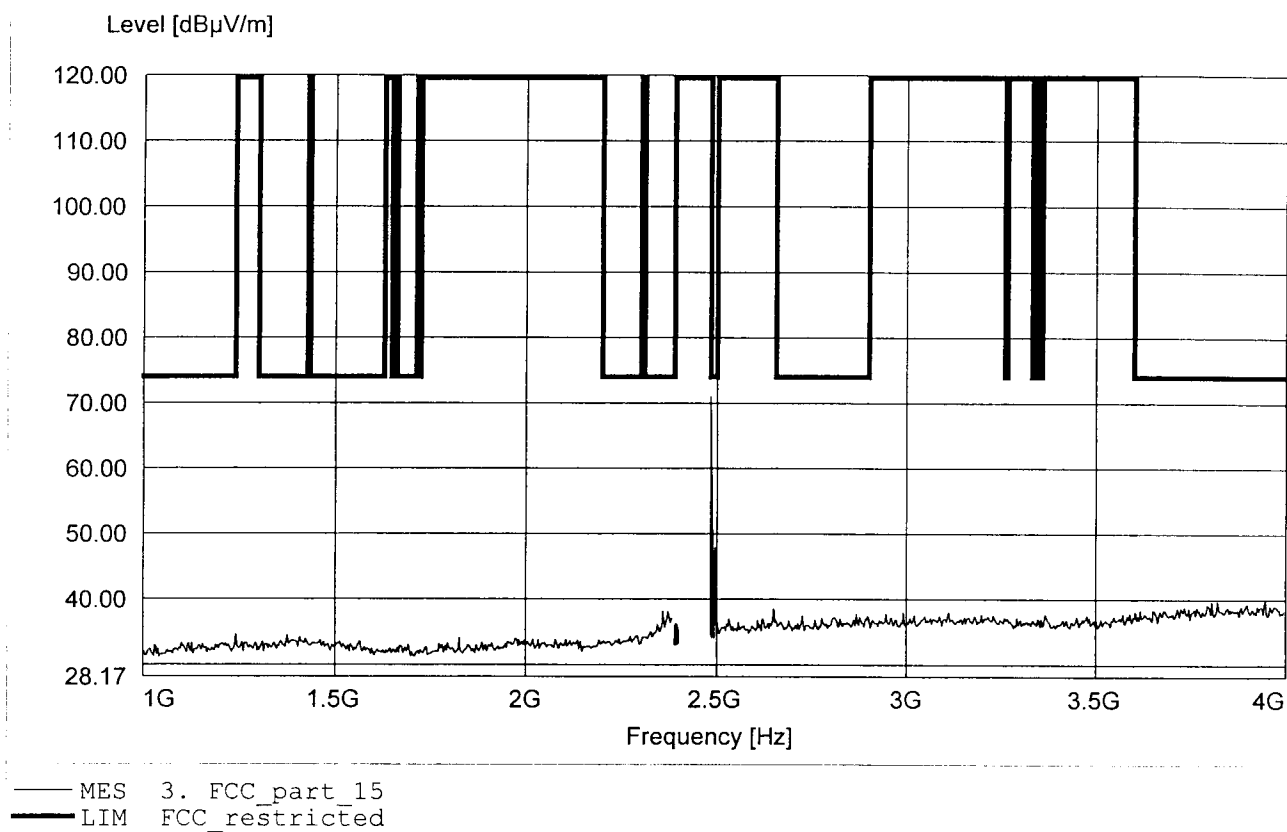


Spurious emissions Field Strength Tx
FCC RULES PART 15, SUBPART C

EUT : Cordless Headset / Headset / Ch.: 78
Model: Gn 9050
Manufacturer: GN Netcom
Operating Condition: Unom: 3.6 V DC (rechargeable battery), Tnom:23°C
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to S15247, Limit 20 dB up peak detector / mode: Tx
Comment 1: Dist.: 3m, Ant.: BBHA2190D, ampl.+HP.
Comment 2: Freq:7.447GHz Emax:68.42dBμV/m RBW: 1 MHz

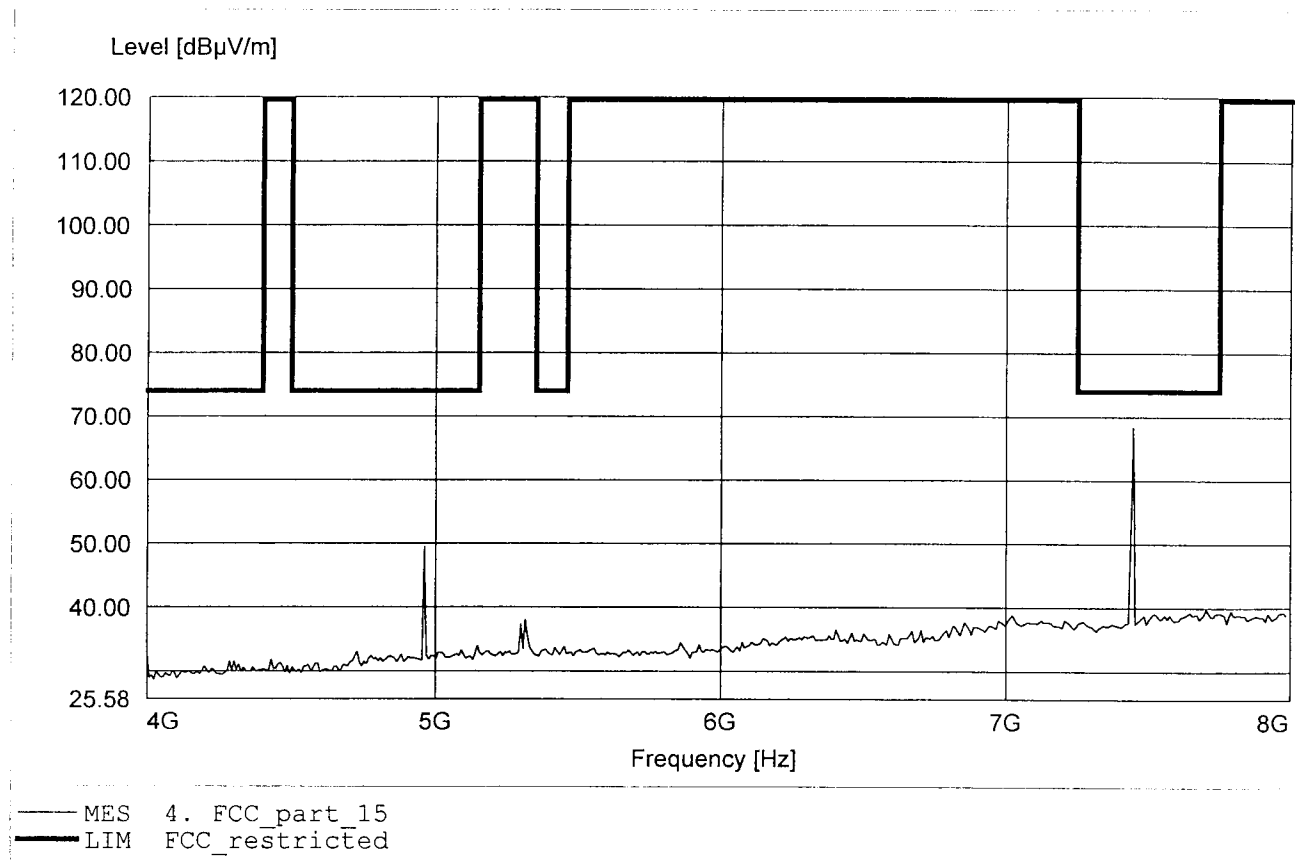


Spurious emissions Field Strength Tx
FCC RULES PART 15, SUBPART C

EUT : Cordless Headset / Headset / Ch.: 78
Model: Gn 9050
Manufacturer: GN Netcom
Operating Condition: Unom: 3.6 V DC (rechargeable battery), Tnom:23°C
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to S15247, Limit 20 dB up peak detector / mode: Tx
Comment 1: Dist.: 3m, Ant.: BBHA2190D, ampl.+HP.
Comment 2: Freq:7.447GHz Emax:71.45dBμV/m RBW: 1 MHz

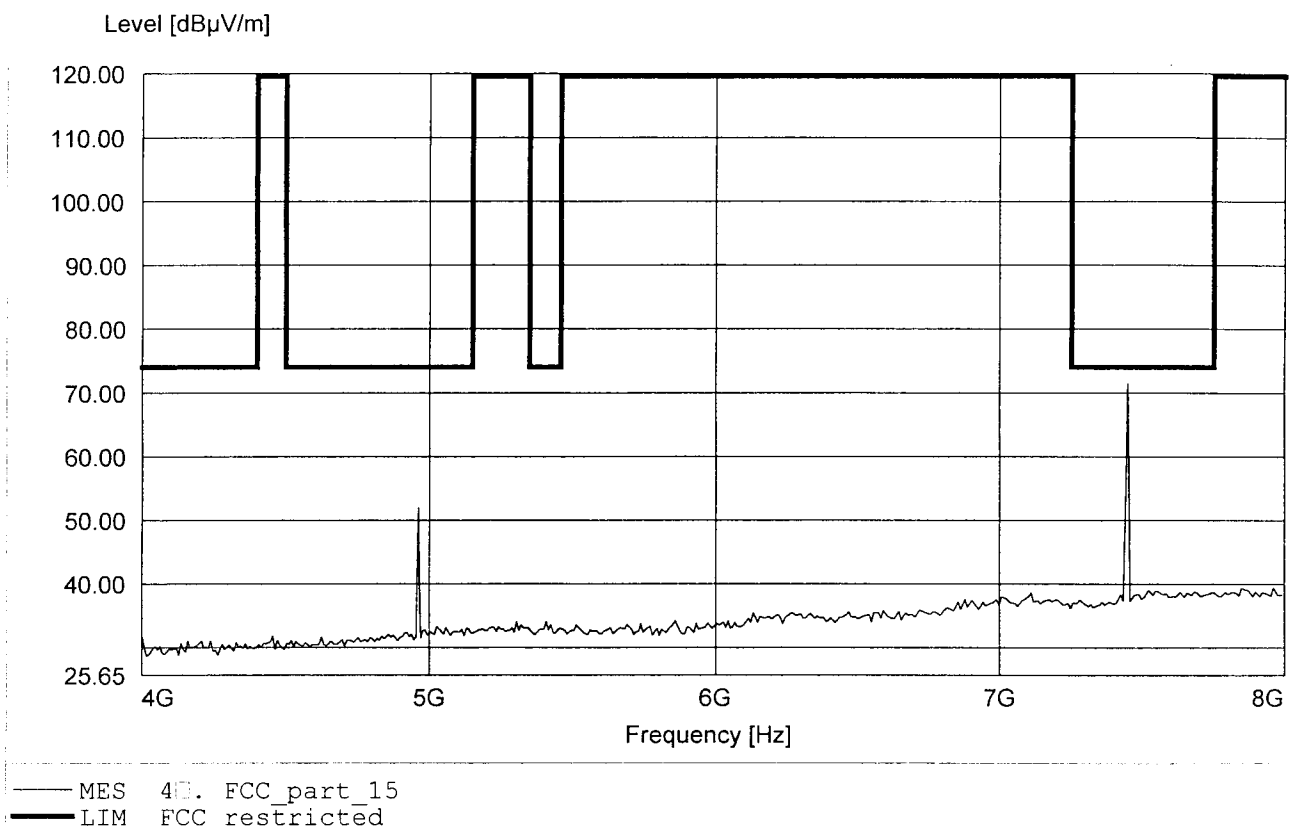


Spurious emissions Field Strength Tx
FCC RULES PART 15, SUBPART C

EUT : Cordless Headset / Headset / Ch.: 78
Model: Gn 9050
Manufacturer: GN Netcom
Operating Condition: Unom: 3.6 V DC (rechargeable battery), Tnom:23°C
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to S15247, Limit 20 dB up peak detector / mode: Tx
Comment 1: Dist.: 3m, Ant.: BBHA2190D, ampl.+HP.
Comment 2: Freq:9.924GHz Emax:57.14dBμV/m RBW: 1 MHz

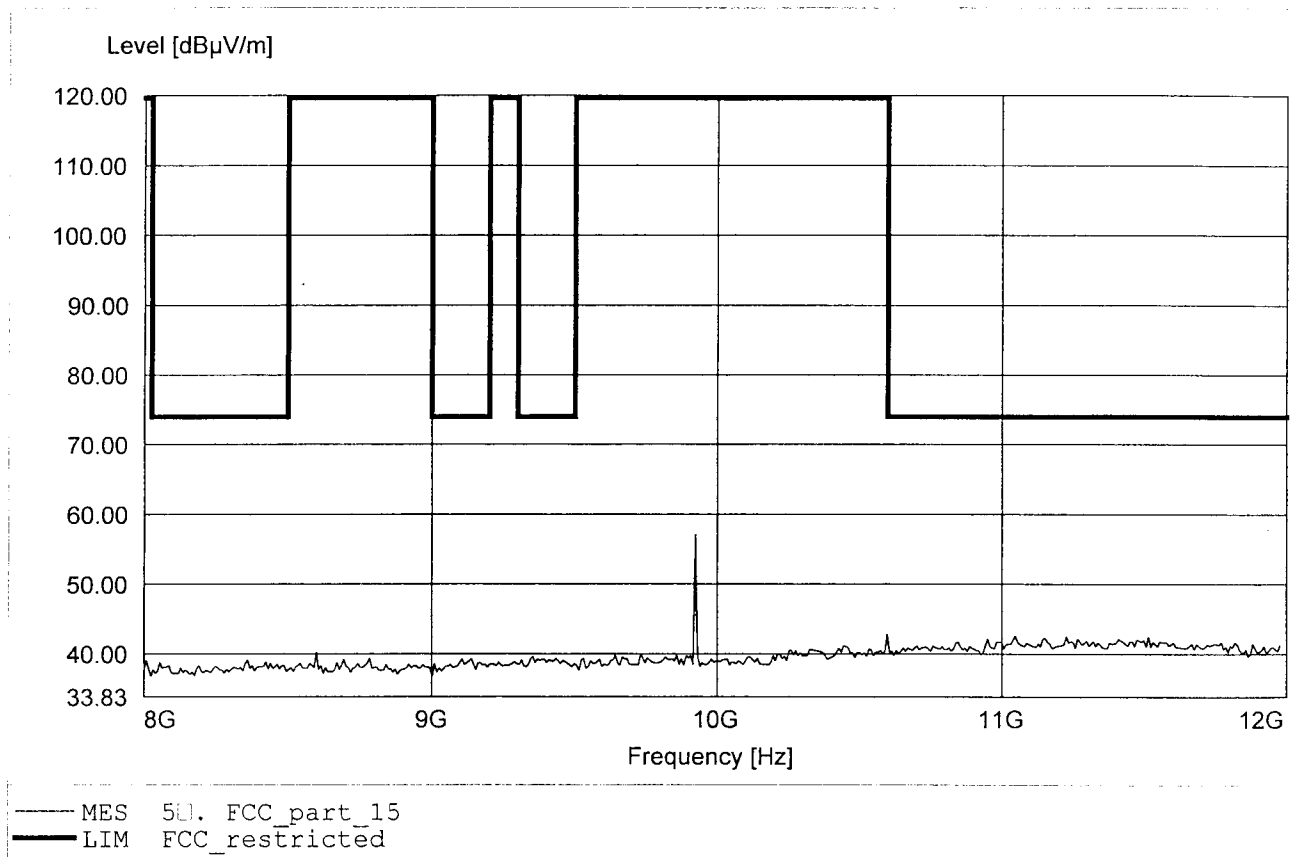


Spurious emissions Field Strength Tx
FCC RULES PART 15, SUBPART C

EUT : Cordless Headset / Headset / Ch.: 78
Model: Gn 9050
Manufacturer: GN Netcom
Operating Condition: Unom: 3.6 V DC (rechargeable battery), Tnom:23°C
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to S15247, Limit 20 dB up peak detector / mode: Tx
Comment 1: Dist.: 3m, Ant.: BBHA2190D, ampl.+HP.
Comment 2: Freq:9.924GHz Emax:48.50dBμV/m RBW: 1 MHz

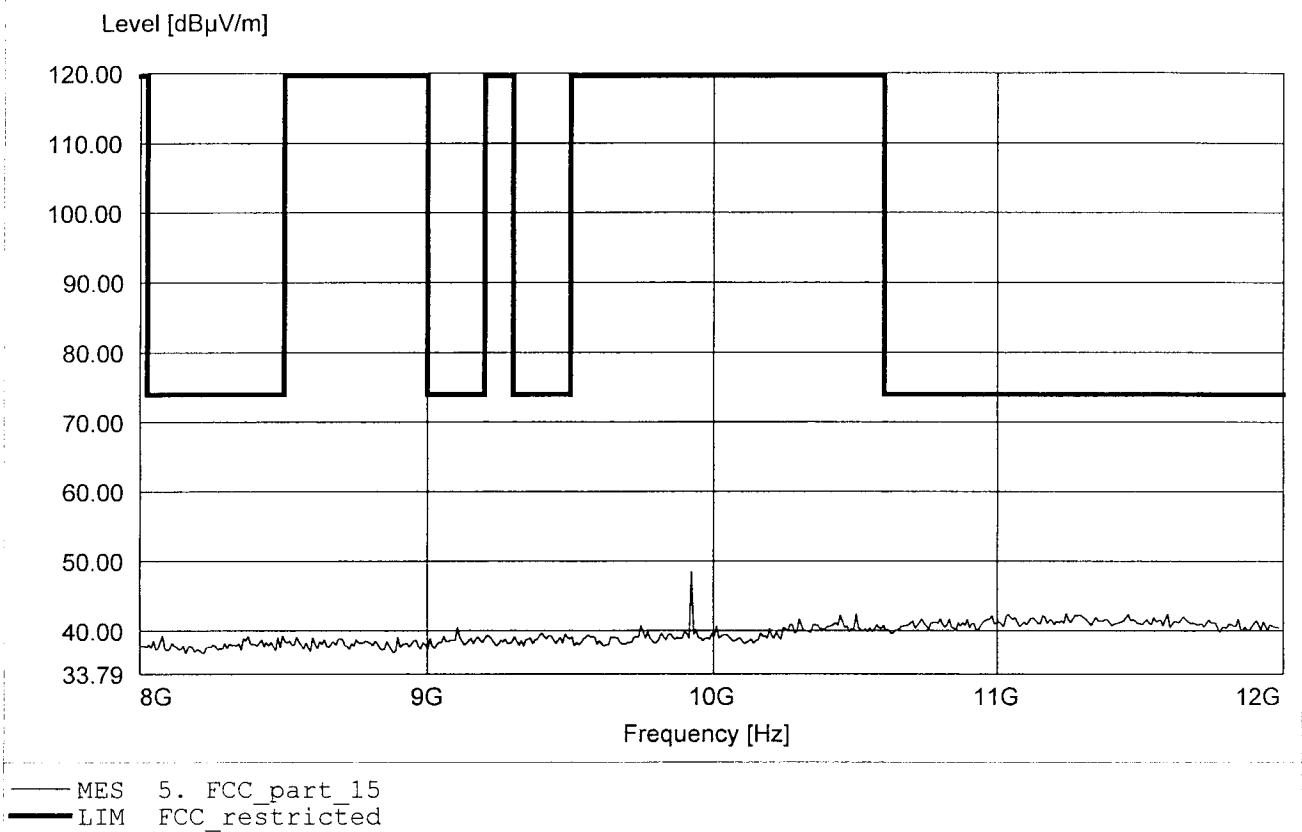


Spurious emissions Field Strength Tx
FCC RULES PART 15, SUBPART C

EUT : Cordless Headset / Headset / Ch.: 78
Model: Gn 9050
Manufacturer: GN Netcom
Operating Condition: Unom: 3.6 V DC (rechargeable battery), Tnom:23°C
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to S15247, Limit 20 dB up peak detector / mode: Tx
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq:14.896GHz Emax:51.86dBuV/m RBW: 1 MHz

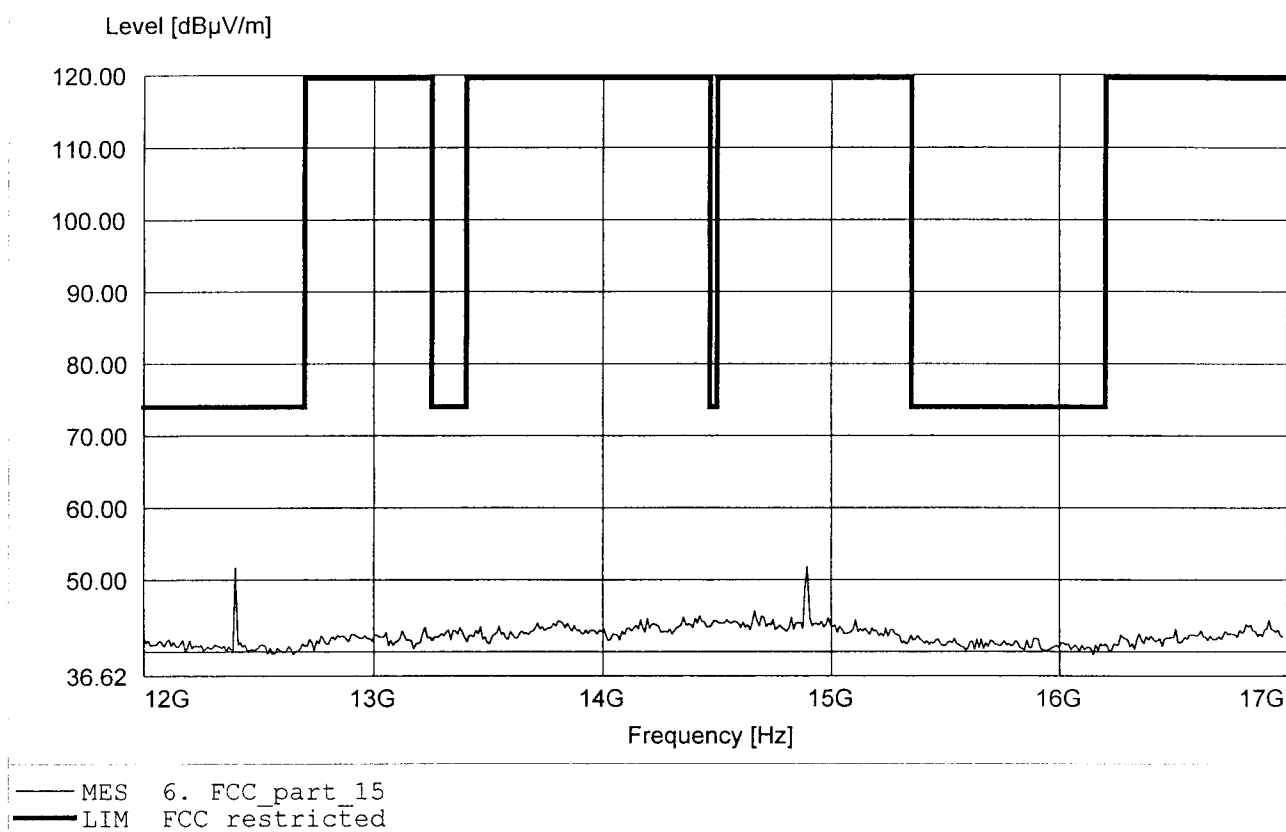


Spurious emissions Field Strength Tx
FCC RULES PART 15, SUBPART C

EUT : Cordless Headset / Headset / Ch.: 78
Model: Gn 9050
Manufacturer: GN Netcom
Operating Condition: Unom: 3.6 V DC (rechargeable battery), Tnom:23°C
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to S15247, Limit 20 dB up peak detector / mode: Tx
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq:12.401GHz Emax:52.81dBμV/m RBW: 1 MHz

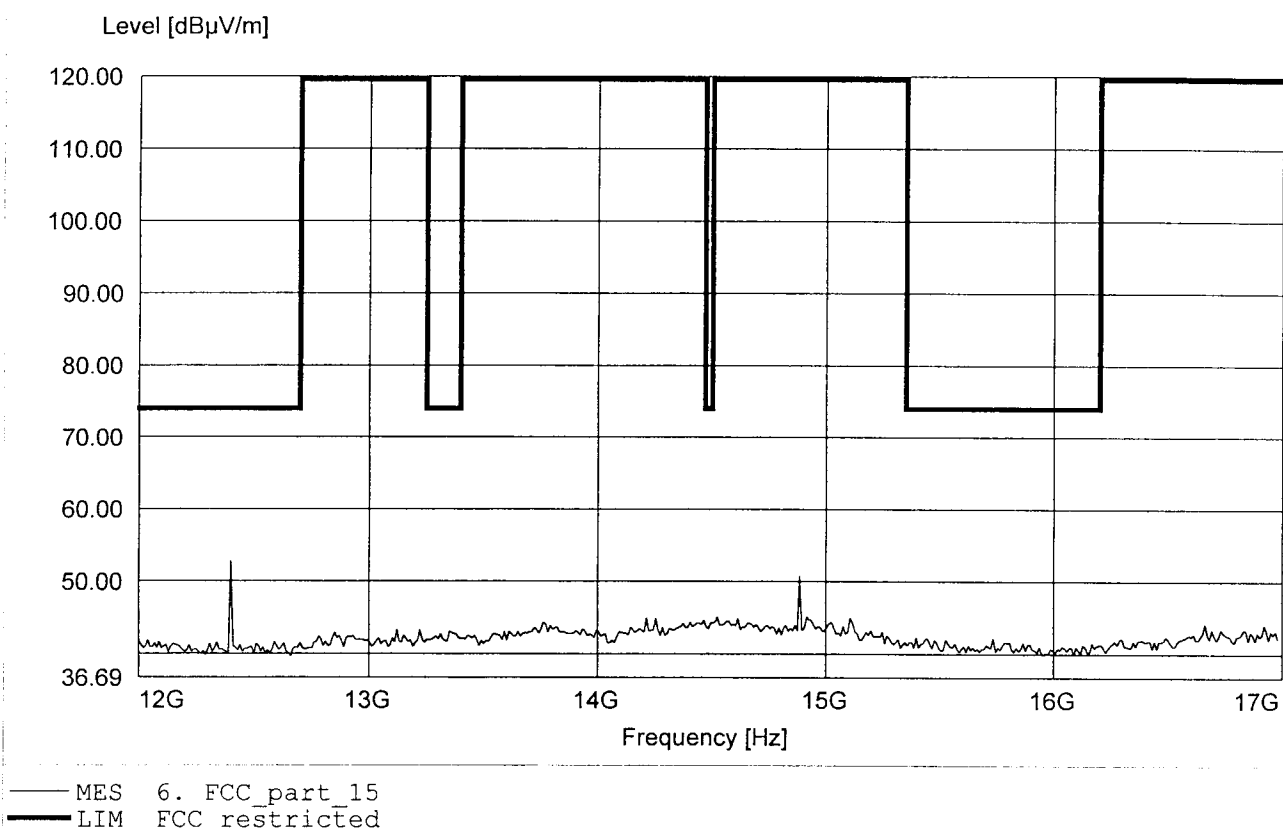


Spurious emissions Field Strength Tx
FCC RULES PART 15, SUBPART C

EUT : Cordless Headset / Headset / Ch.: 78
Model: Gn 9050
Manufacturer: GN Netcom
Operating Condition: Unom: 3.6 V DC (rechargeable battery), Tnom:23°C
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to S15247, Limit 20 dB up peak detector / mode: Tx
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq:17.362GHz Emax:51.25dBμV/m RBW: 1 MHz

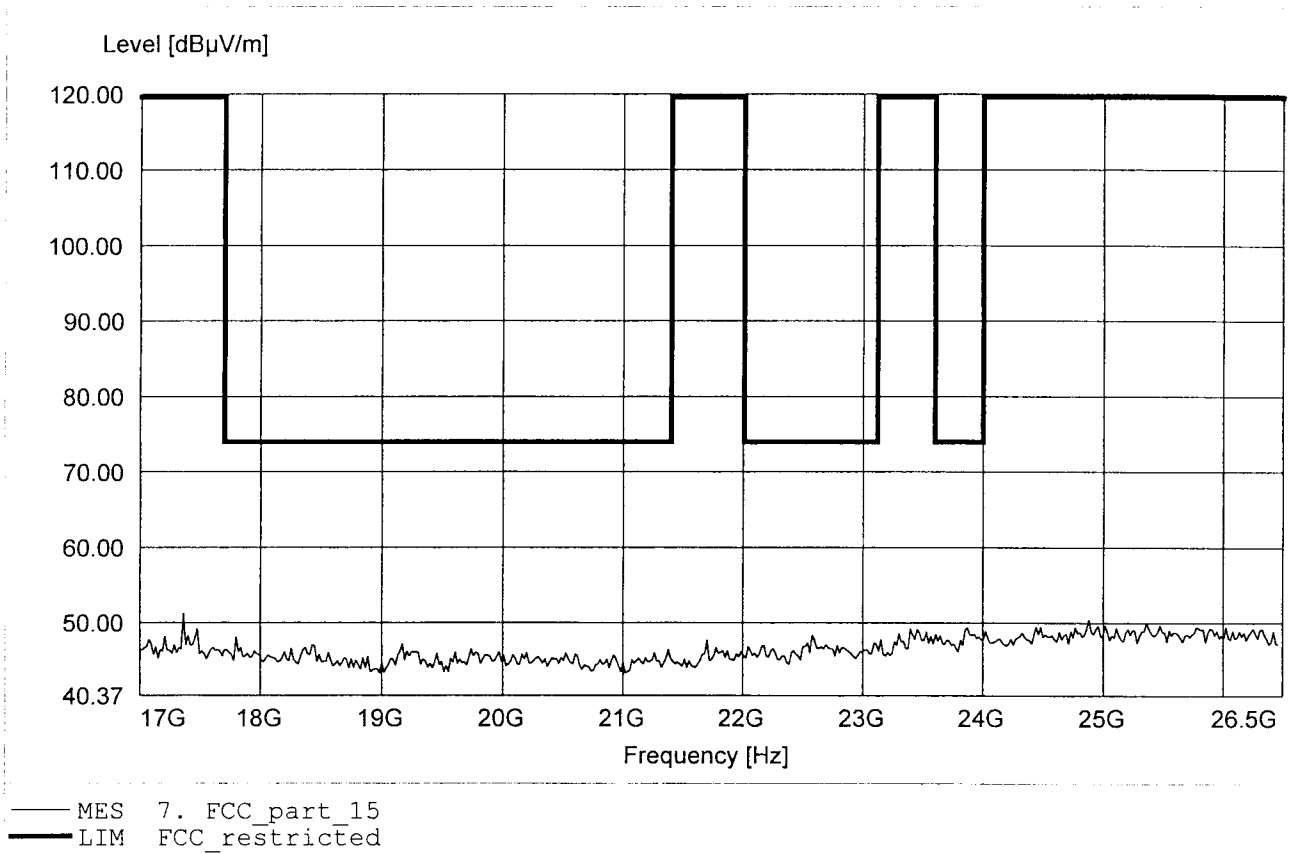

Spurious emissions Field Strength Tx
FCC RULES PART 15, SUBPART C

EUT : Cordless Headset / Headset / Ch.: 78
Model: Gn 9050
Manufacturer: GN Netcom
Operating Condition: Unom: 3.6 V DC (rechargeable battery), Tnom:23°C
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to S15247, Limit 20 dB up peak detector / mode: Tx
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq:25.053GHz Emax:50.26dBμV/m RBW: 1 MHz

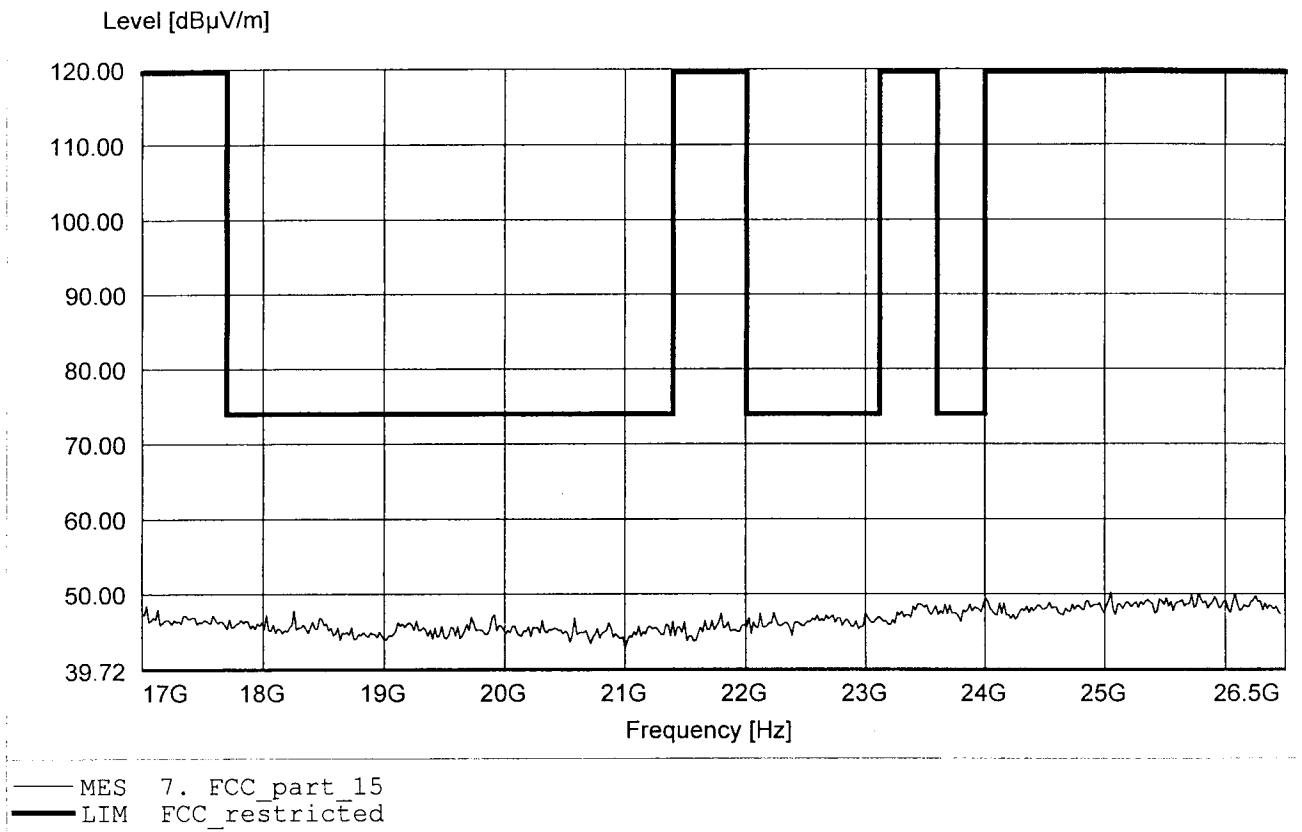

Appendix D


Spurious Emissions conducted - Transmitter operating

Appendix E

Carrier Frequency Separation



Delta 1 [T1] RBW 100 kHz RF Att 60 dB
Ref Lvl 0.00 dB VBW 100 kHz
33 dBm 1.03166333 MHz SWT 60 ms Unit dBm

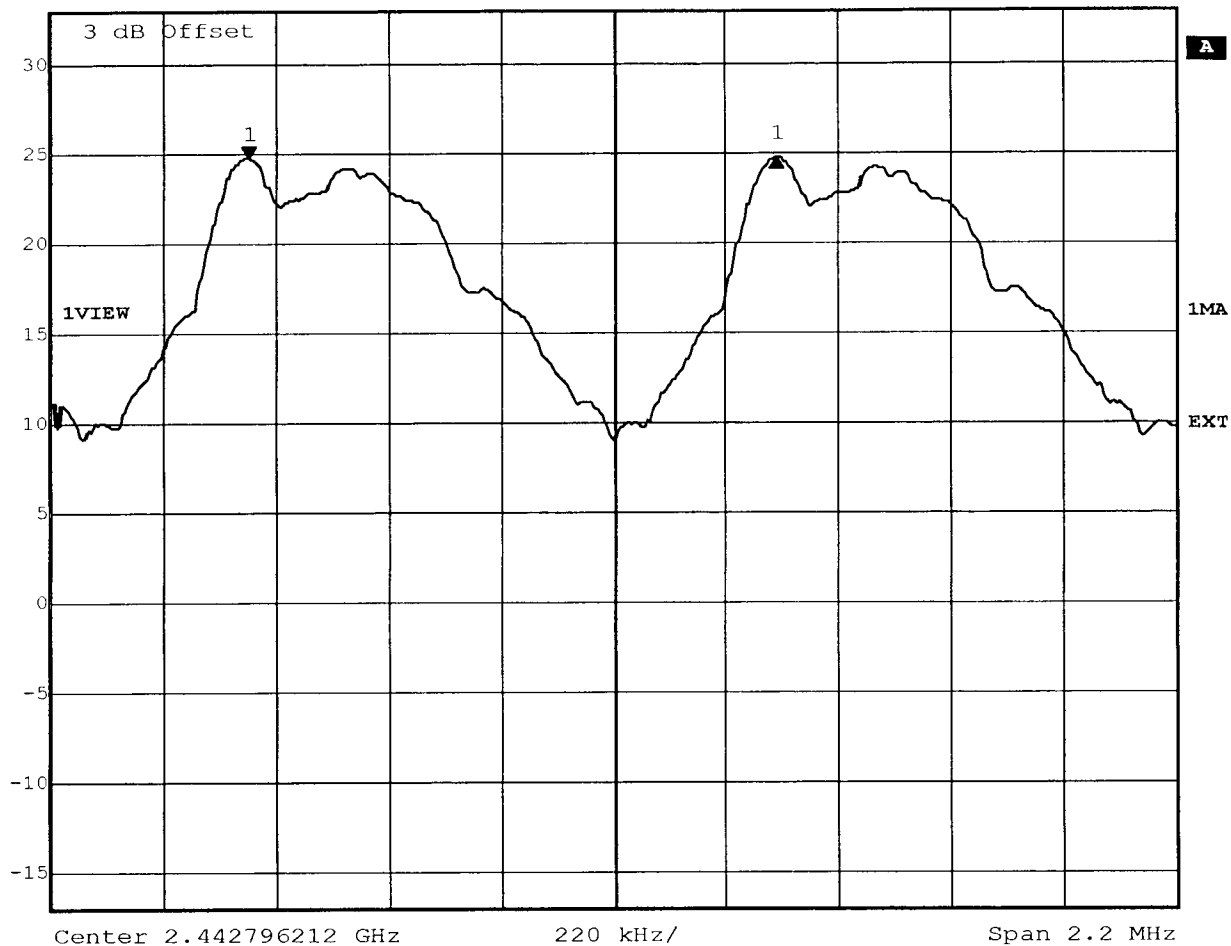


Title: Carrier Frequency Separation
Comment A: GN Netcom Cordless Headset Gn 9050 Headset
Date: 25.OCT.2001 09:43:14

Appendix F

Number of Hopping Frequencies




Marker 1 [T1] RBW 50 kHz RF Att 60 dB
Ref Lvl 26.03 dBm VBW 50 kHz
35 dBm 2.41422244 GHz SWT 25 ms Unit dBm

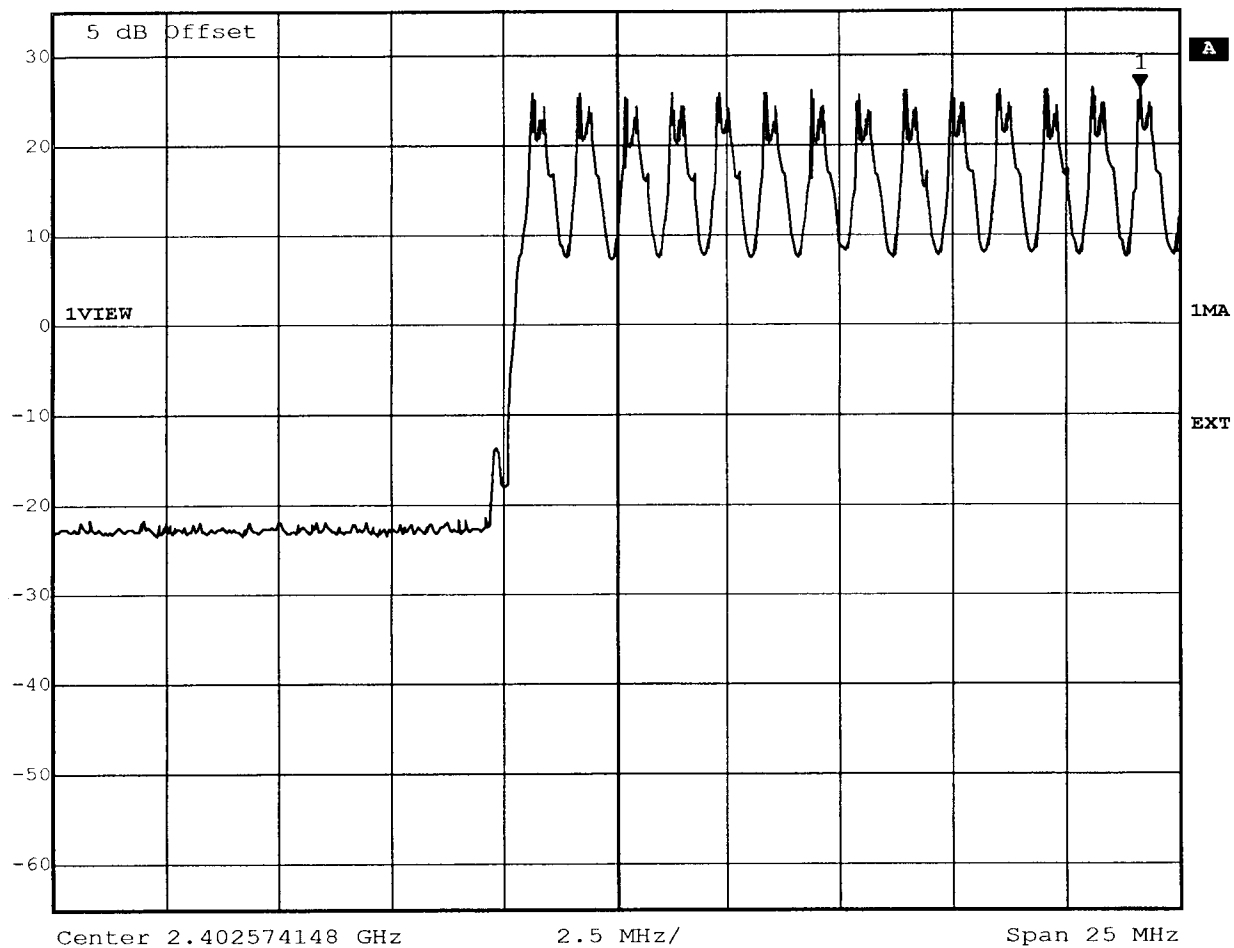

Title: Number of Hopping Frequencies Ch.: 0-13
Comment A: GN Netcom Cordless Headset Gn 9050 Headset
Date: 25.OCT.2001 10:02:29




Marker 1 [T1] RBW 50 kHz RF Att 60 dB
Ref Lvl 25.87 dBm VBW 50 kHz
35 dBm 2.43904860 GHz SWT 25 ms Unit dBm

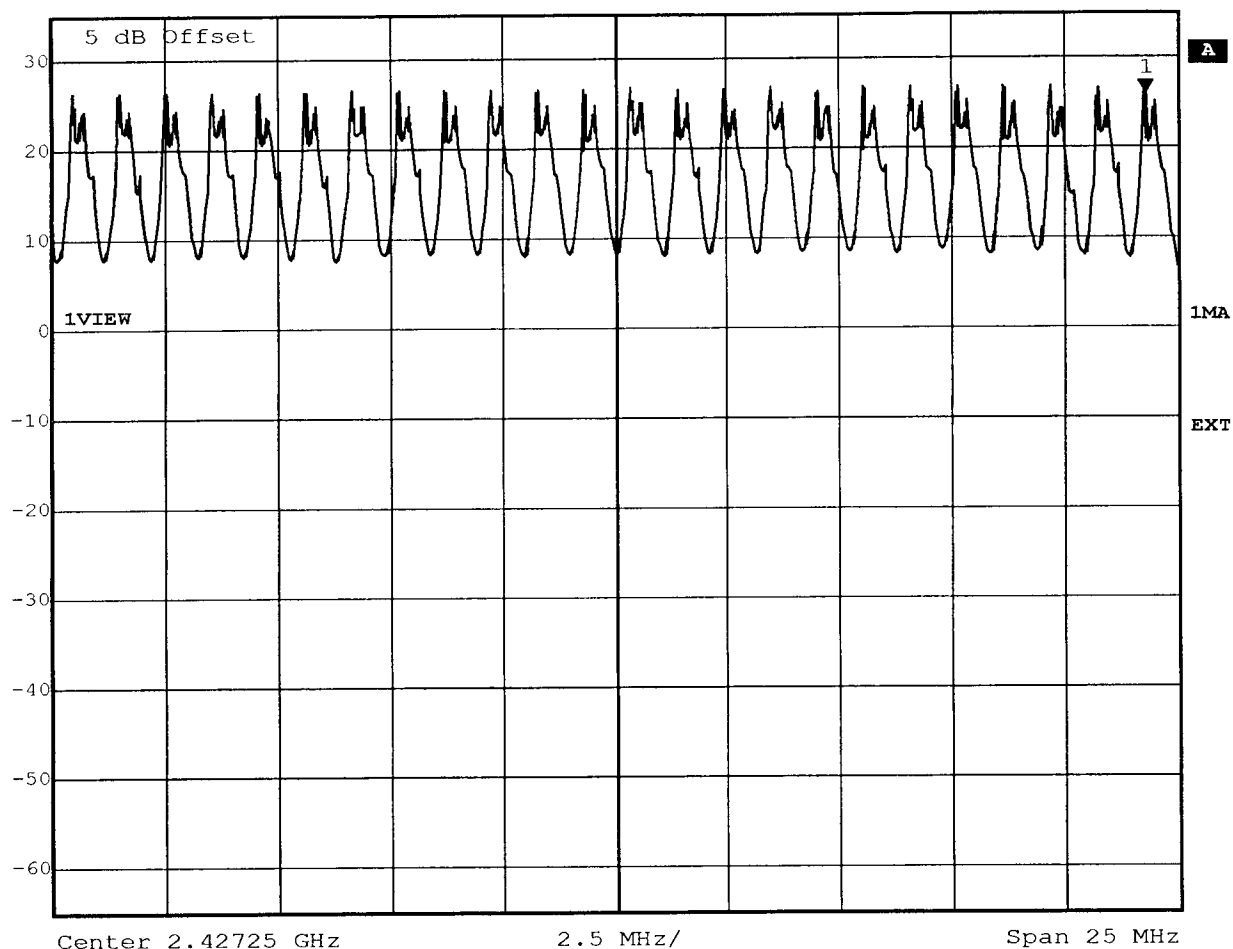

Title: Number of Hopping Frequencies Ch.: 14-37
Comment A: GN Netcom Cordless Headset Gn 9050 Headset
Date: 25.OCT.2001 10:22:11




Marker 1 [T1] RBW 50 kHz RF Att 60 dB
Ref Lvl 26.57 dBm VBW 50 kHz
35 dBm 2.46384820 GHz SWT 25 ms Unit dBm

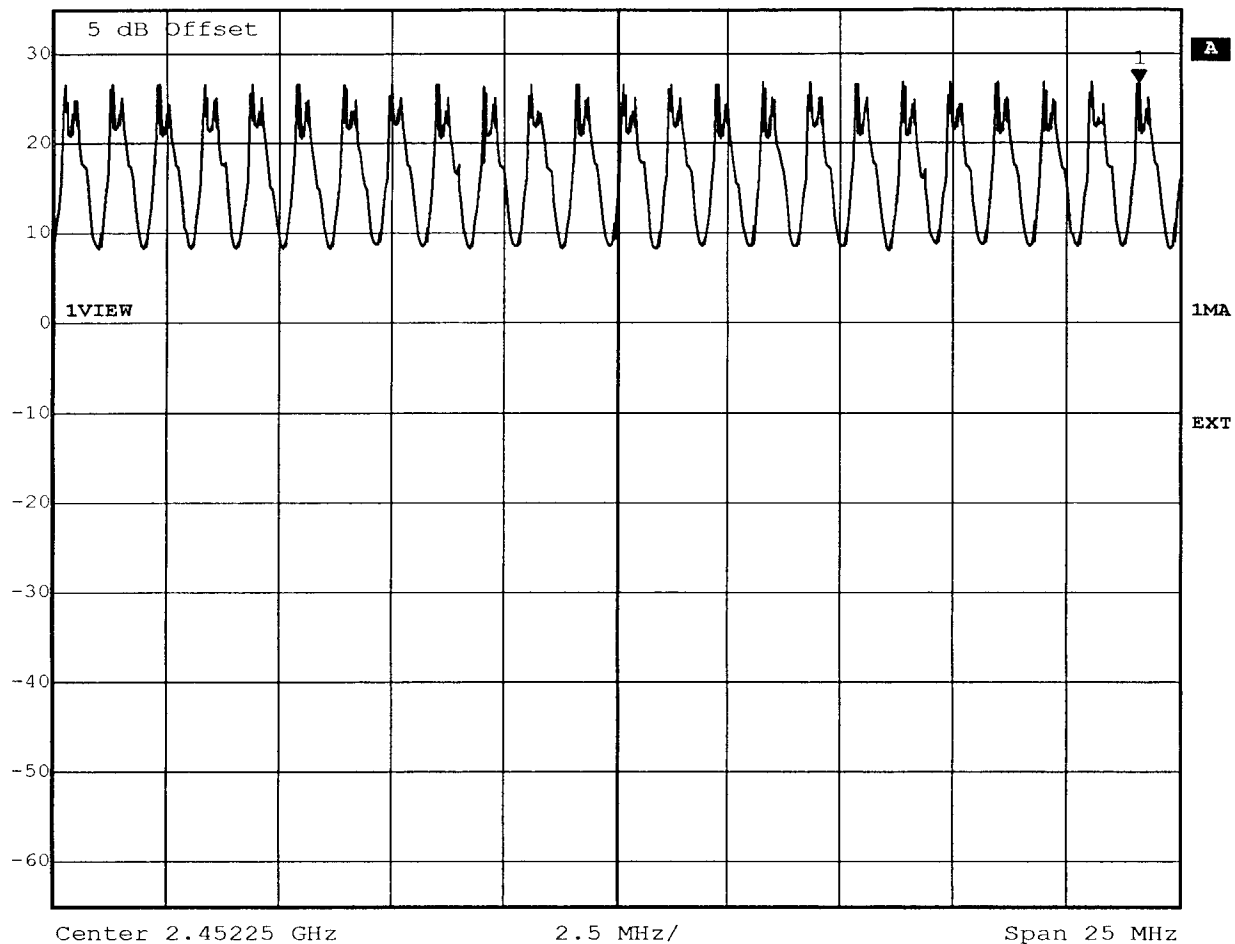

Title: Number of Hopping Frequencies Ch.: 38-61
Comment A: GN Netcom Cordless Headset Gn 9050 Headset
Date: 25.OCT.2001 10:40:44



Marker 1 [T1] RBW 50 kHz RF Att 60 dB
Ref Lvl 26.70 dBm VBW 50 kHz
35 dBm 2.46480060 GHz SWT 25 ms Unit dBm

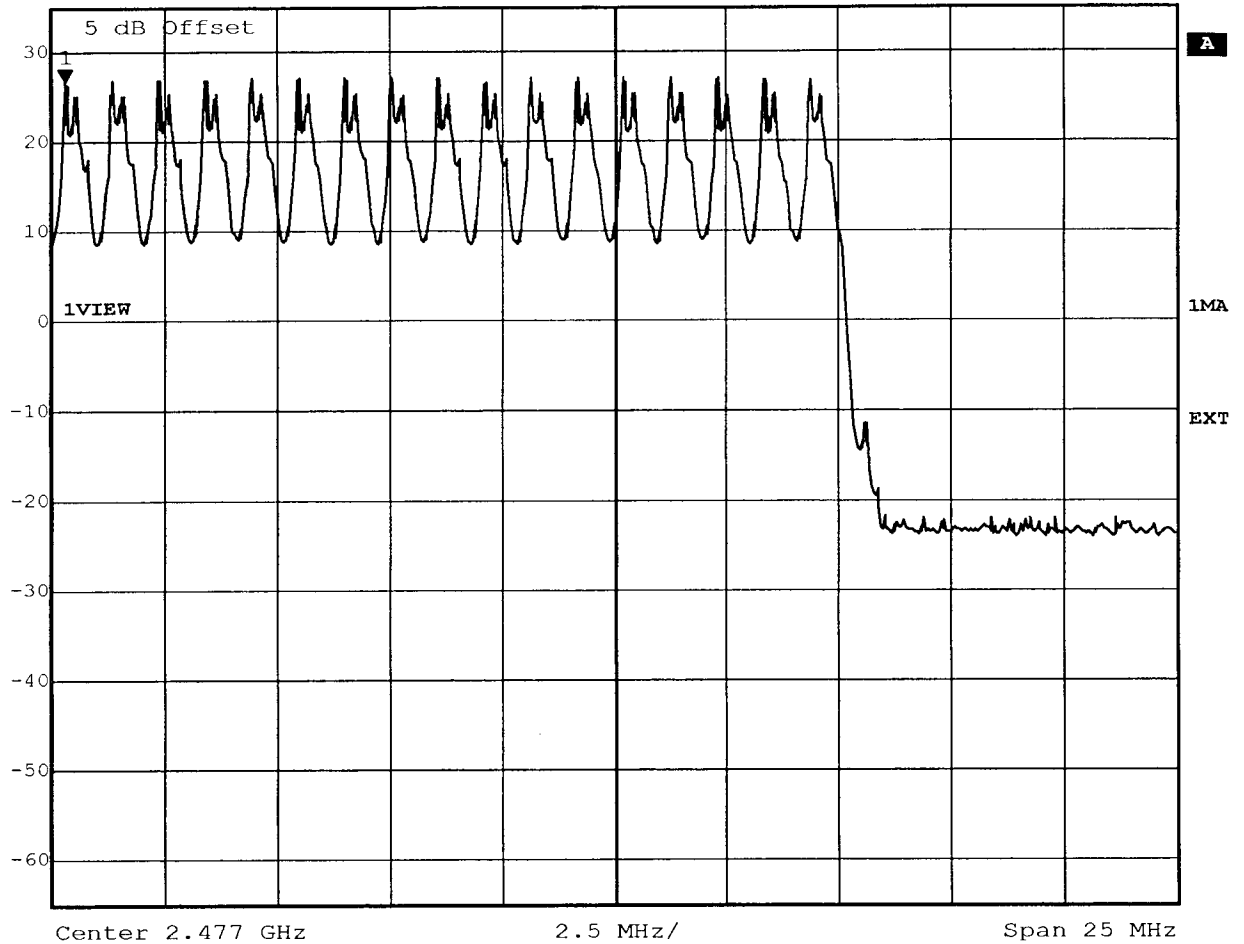


Title: Number of Hopping Frequencies Ch.: 62-78
Comment A: GN Netcom Cordless Headset Gn 9050 Headset
Date: 25.OCT.2001 10:56:13

Appendix G

Time of Occupancy (Dwell Time)



Marker 1 [T1] RBW 1 MHz RF Att 60 dB
Ref Lvl 22.16 dBm VBW 1 MHz
41 dBm -21.940080 μ s SWT 19.5 ms Unit dBm

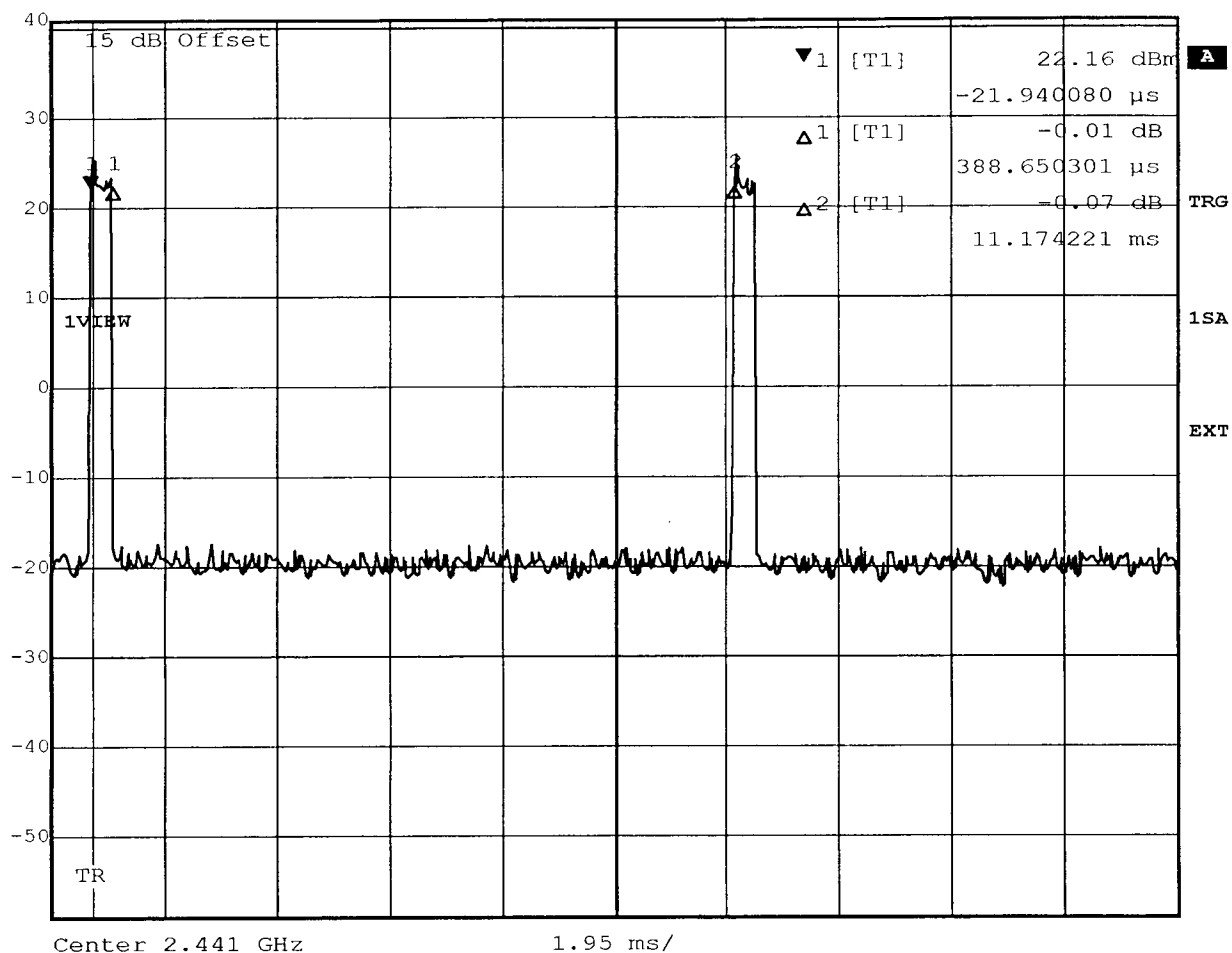


Title: Dwell Time
Comment A: GN Netcom Cordless Headset Gn 9050 Headset
Date: 25.OCT.2001 09:31:59

Appendix H

20dB Bandwidth



Delta 1 [T1] RBW 10 kHz RF Att 60 dB
Ref Lvl -0.18 dB VBW 10 kHz
37 dBm 865.73146293 kHz SWT 76 ms Unit dBm

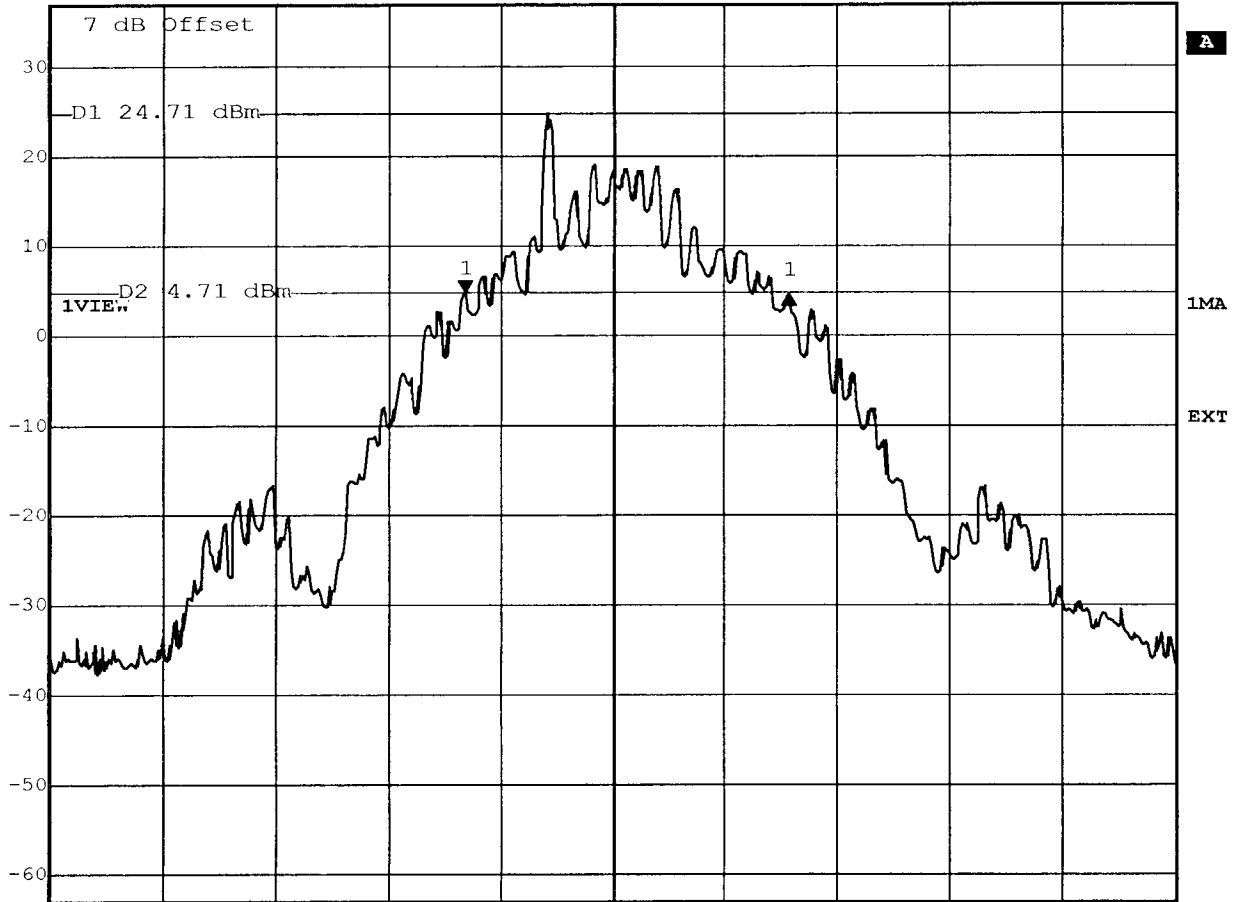


Center 2.4009 GHz 300 kHz/ Span 3 MHz

Title: 20 dB Bandwidth Ch.: 0
Comment A: GN Netcom Cordless Headset Gn 9050 Headset
Date: 25.OCT.2001 08:54:11




Delta 1 [T1]	RBW	10 kHz	RF Att	60 dB
-0.07 dB	VBW	10 kHz		
871.74348697 kHz	SWT	76 ms	Unit	dBm
Ref Lvl				
37 dBm				

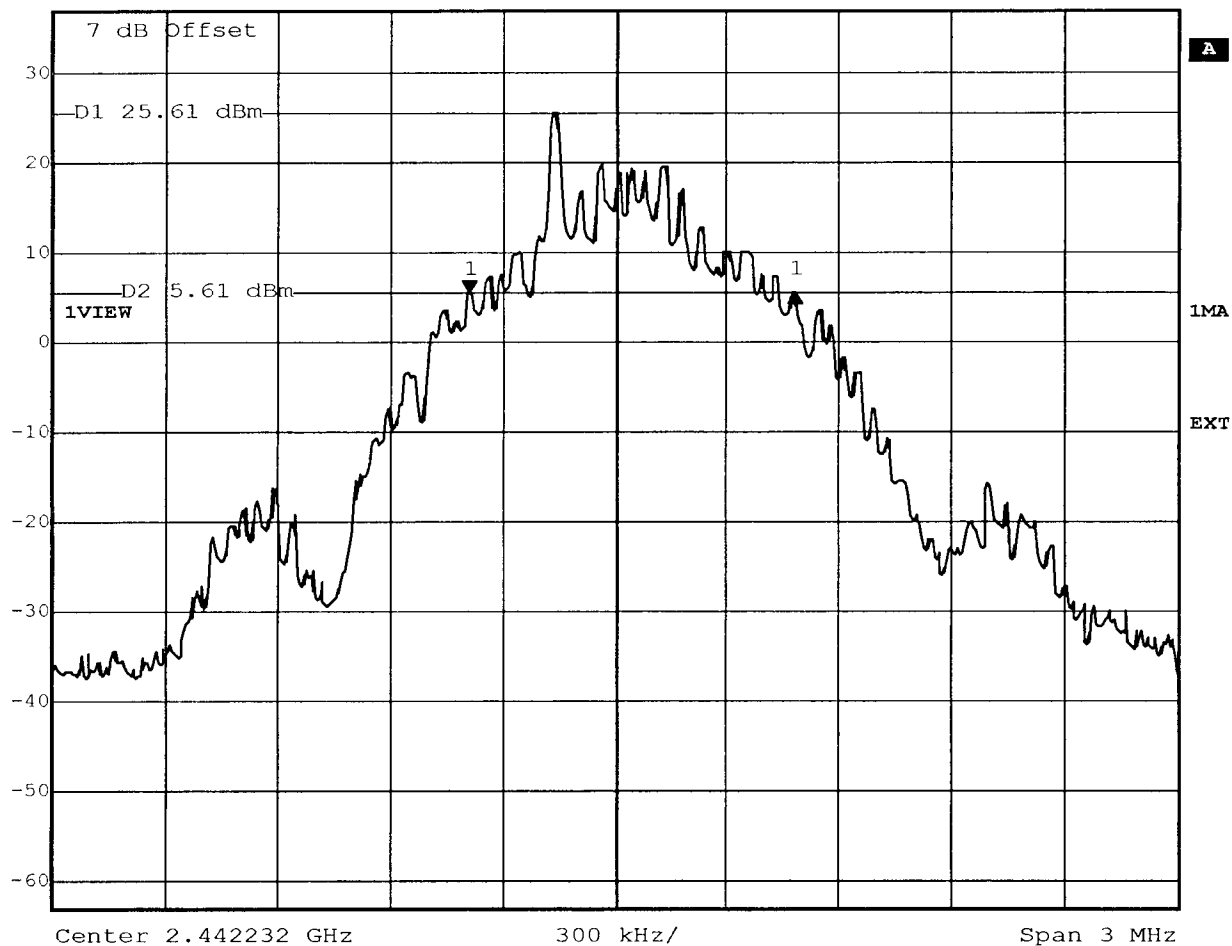

Title: 20 dB Bandwidth Ch.: 40
Comment A: GN Netcom Cordless Headset Gn 9050 Headset
Date: 25.OCT.2001 08:58:02



Delta 1 [T1] RBW 10 kHz RF Att 60 dB
Ref Lvl -0.03 dB VBW 10 kHz
37 dBm 877.75551102 kHz SWT 76 ms Unit dBm

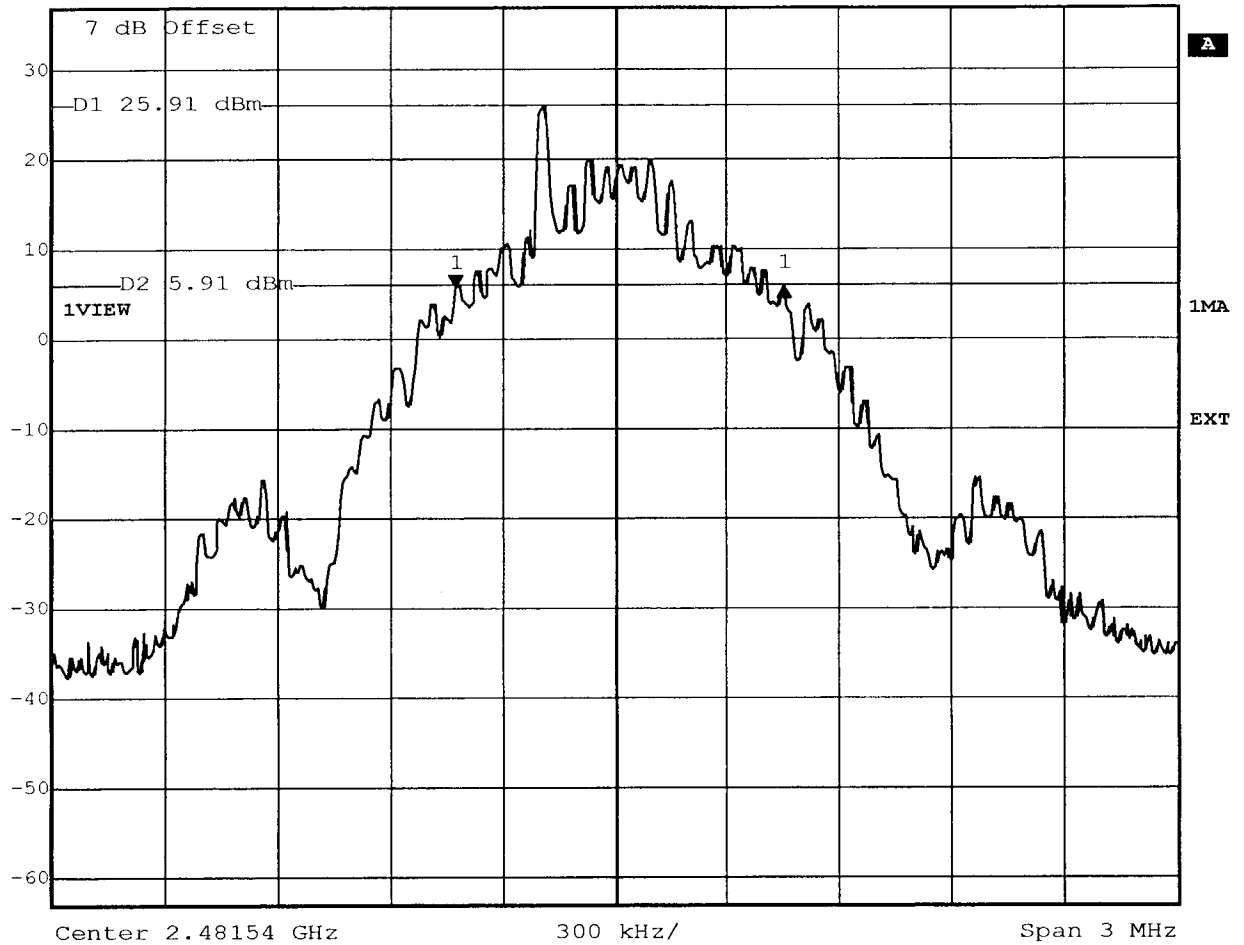


Title: 20 dB Bandwidth Ch.: 78
Comment A: GN Netcom Cordless Headset Gn 9050 Headset
Date: 25.OCT.2001 09:02:43

Appendix I

Band-edge Compliance of RF Emissions



Marker 1 [T1] RBW 50 kHz RF Att 60 dB
Ref Lvl 5.85 dBm VBW 50 kHz
35 dBm 2.40043687 GHz SWT 5 ms Unit dBm

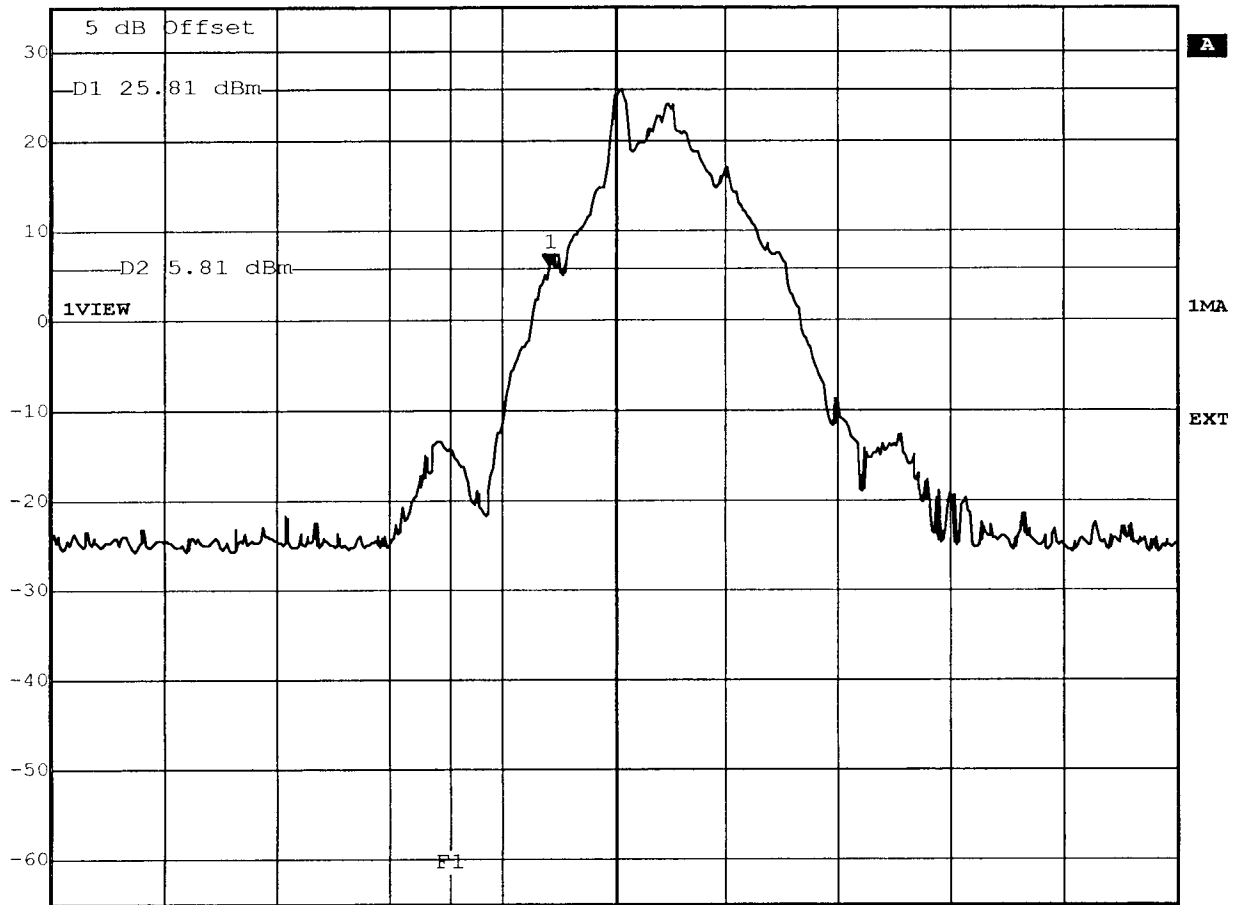


Center 2.400722445 GHz 500 kHz/ Span 5 MHz

Title: Band-edge Compliance of RF Conducted Emissions Ch.: 0
Comment A: GN Netcom Cordless Headset Gn 9050 Headset
Date: 25.OCT.2001 09:09:17



Marker 1 [T1] RBW 50 kHz RF Att 60 dB
Ref Lvl 6.91 dBm VBW 50 kHz
35 dBm 2.48211831 GHz SWT 5 ms Unit dBm

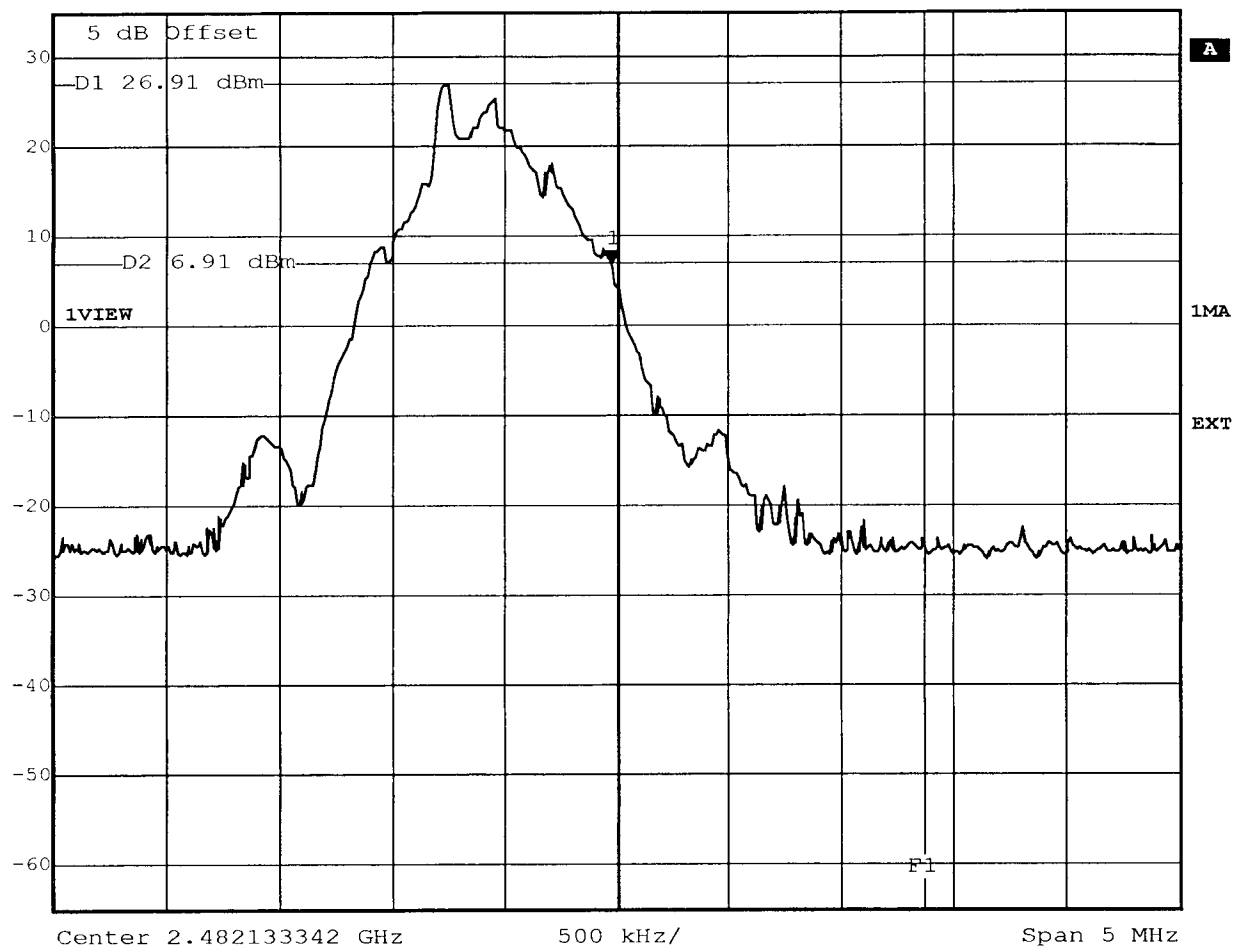

Title: Band-edge Compliance of RF Conducted Emissions Ch.: 78
Comment A: GN Netcom Cordless Headset Gn 9050 Headset
Date: 25.OCT.2001 09:14:11

Appendix J

Conducted Measurement at (AC) Power Line