



802.11 ax20 CH01 (2412MHz)




802.11 ax20 CH01 (2412MHz)

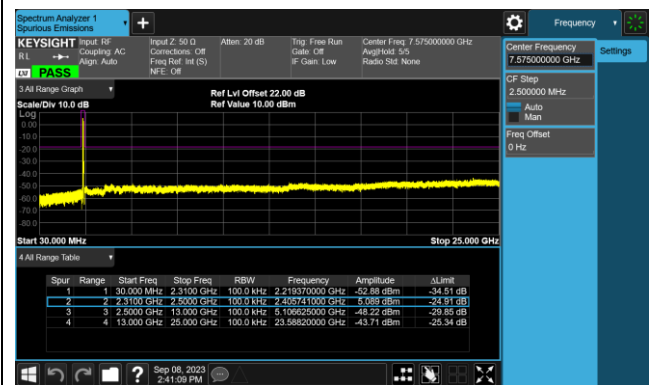


802.11 ax20 CH06 (2437MHz)

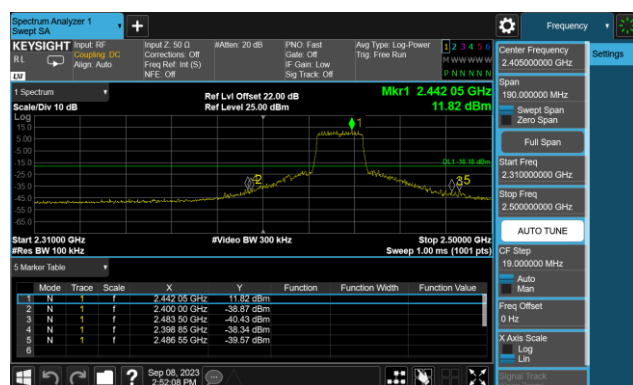


802.11 ax20 CH06 (2437MHz)

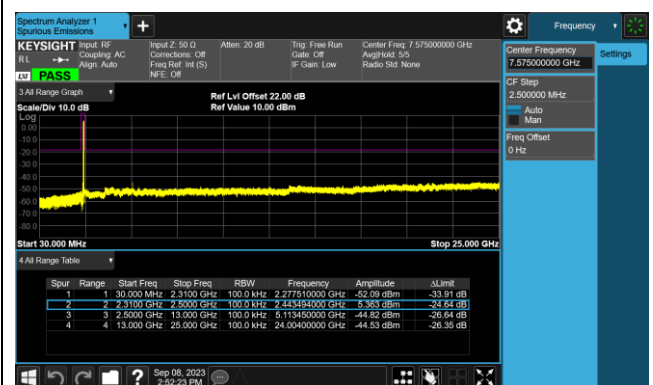


802.11 ax20 CH11 (2462MHz)

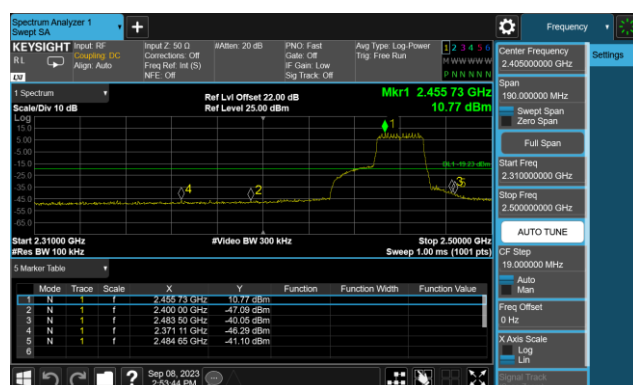


802.11 ax20 CH11 (2462MHz)

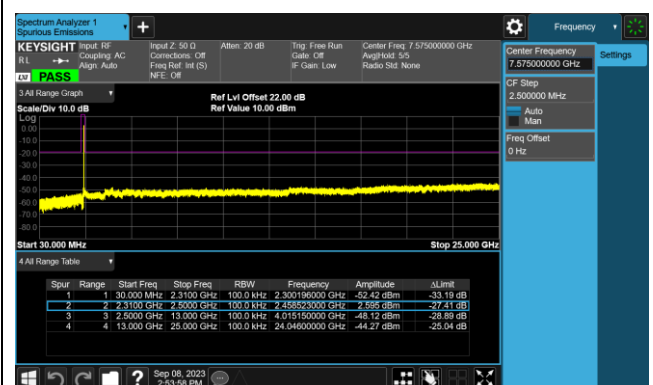

802.11 ax40 CH03 (2422MHz)

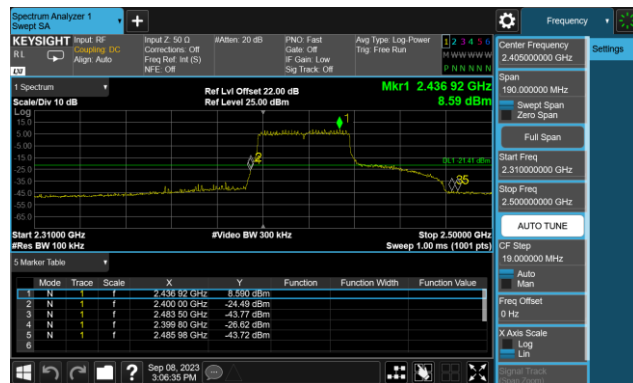


802.11 ax40 CH03 (2422MHz)

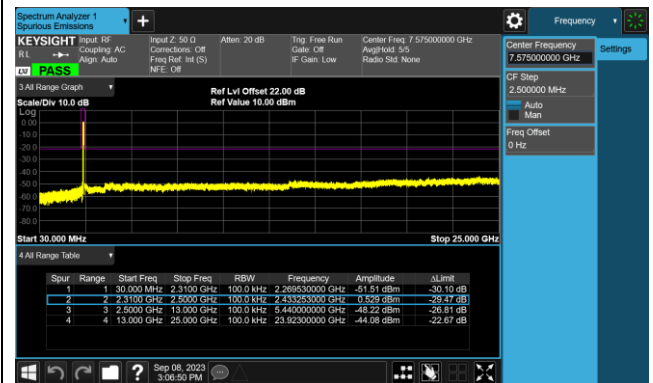


802.11 ax40 CH06 (2437MHz)




802.11 ax40 CH06 (2437MHz)

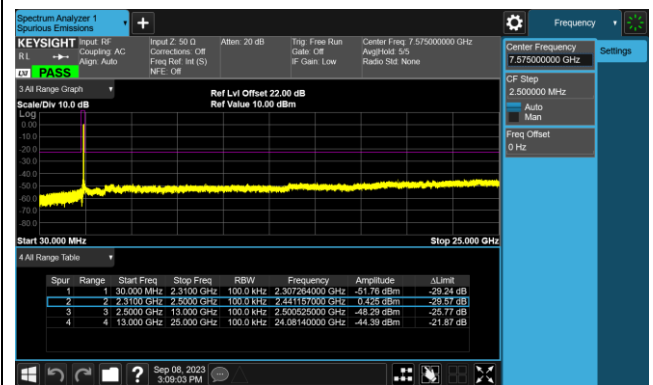


802.11 ax40 CH09 (2452MHz)

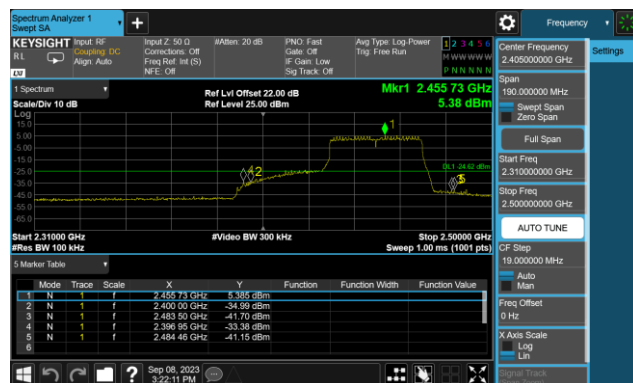


802.11 ax40 CH09 (2452MHz)

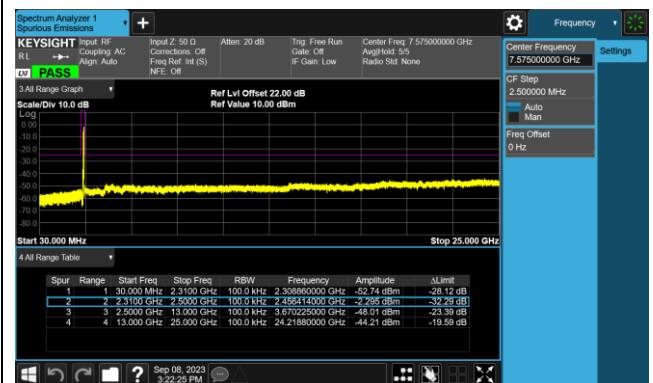


802.11be20 CH01 (2412MHz)

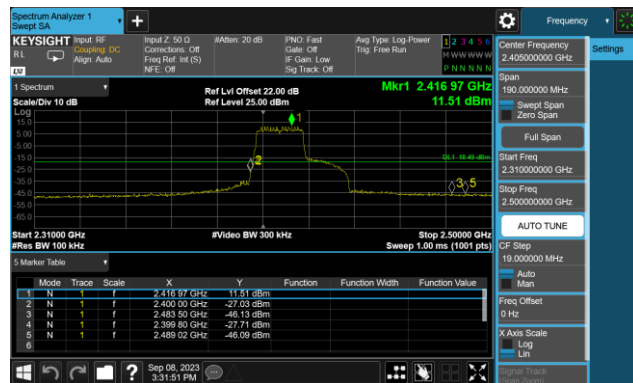


802.11be20 CH01 (2412MHz)

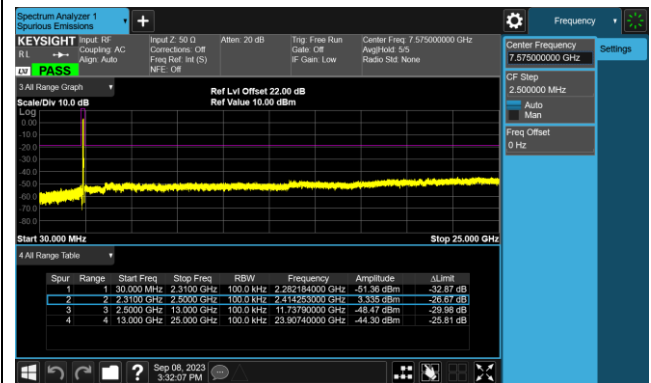


802.11be20 CH06 (2437MHz)

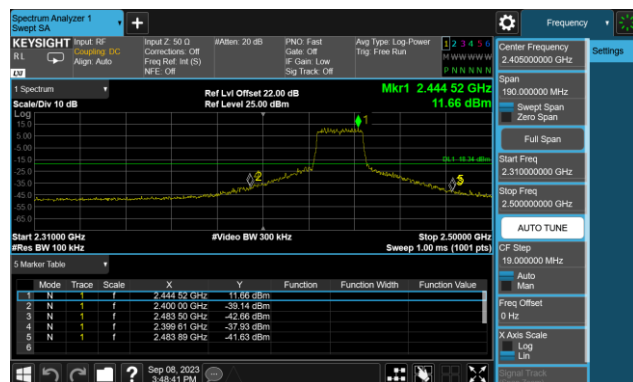


802.11be20 CH06 (2437MHz)





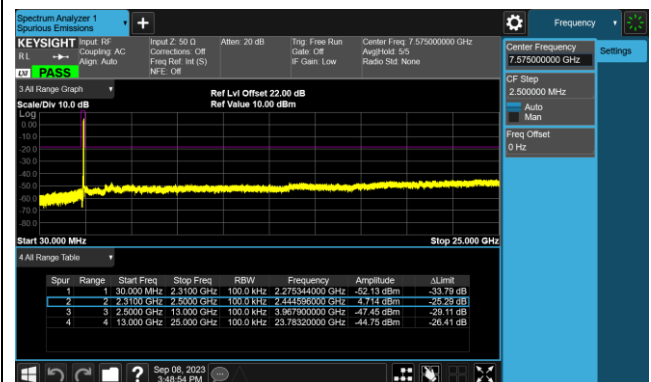


802.11be20 CH11 (2462MHz)

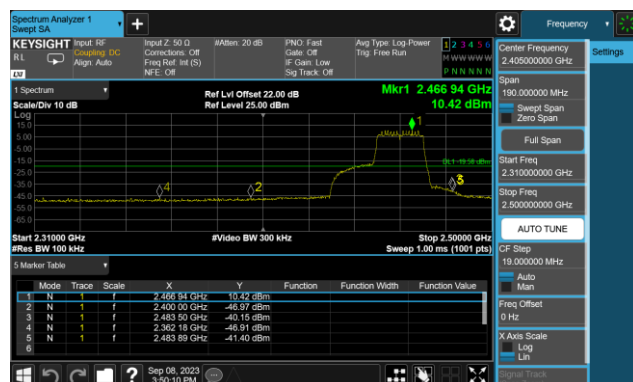

802.11be20 CH11 (2462MHz)

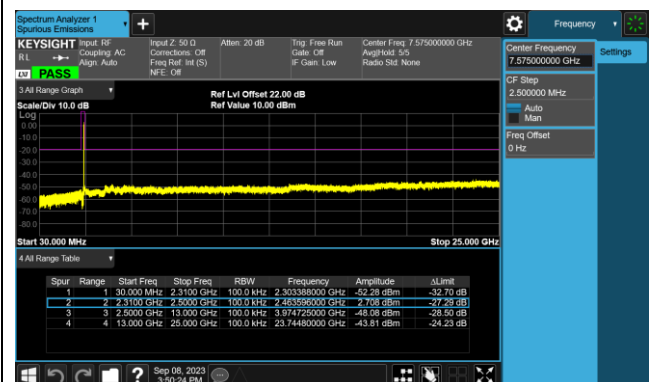

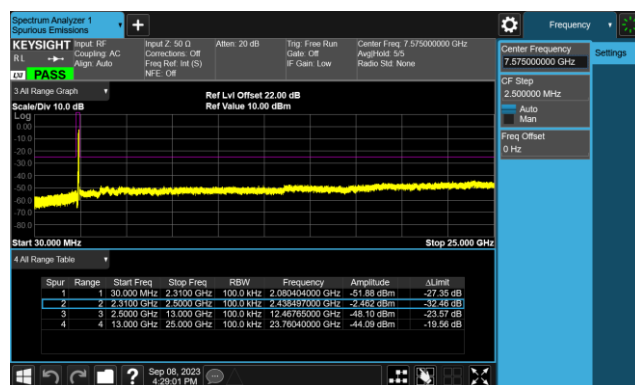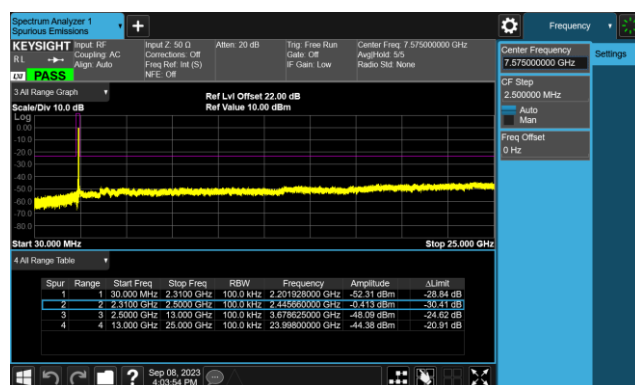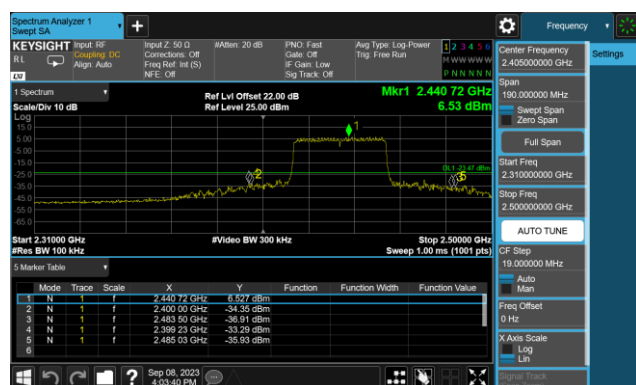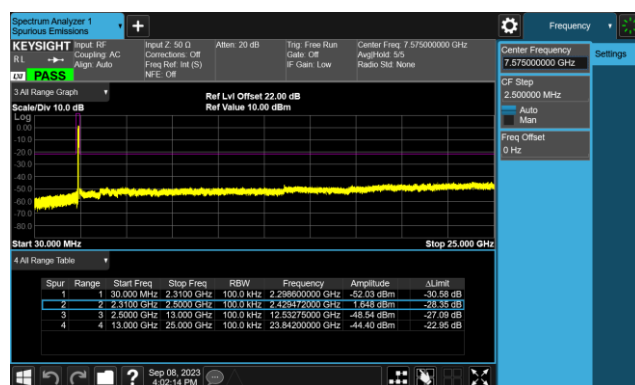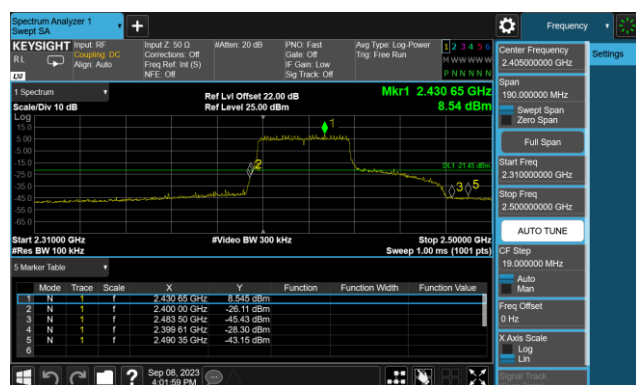

7.6. Radiated Spurious Emission Measurement

7.6.1. Test Limit

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [Uv/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

7.6.2. Test Procedure Used

ANSI C63.10-2013 Section 6.3 (General Requirements)

ANSI C63.10-2013 Section 6.4 (Standard test method below 30MHz)

ANSI C63.10-2013 Section 6.5 (Standard test method above 30MHz to 1GHz)

ANSI C63.10-2013 Section 6.6 (Standard test method above 1GHz)

7.6.3. Test Setting

Table 1 - RBW as a function of frequency

Frequency	RBW
9 ~ 150 kHz	200 ~ 300 Hz
0.15 ~ 30 MHz	9 ~ 10 kHz
30 ~ 1000 MHz	100 ~ 120 kHz
> 1000MHz	1MHz

Quasi-Peak Measurements below 1GHz

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. Span was set greater than 1MHz
3. RBW = as specified in Table 1
4. Detector = CISPR quasi-peak
5. Sweep time = auto couple
6. Trace was allowed to stabilize

Peak Measurements above 1GHz


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

Average Measurements above 1GHz (Method VB)


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW; If the EUT is configured to transmit with duty cycle $\geq 98\%$, set VBW = 10 Hz.
If the EUT duty cycle is $< 98\%$, set VBW $\geq 1/T$. T is the minimum transmission duration.
4. Detector = Peak
5. Sweep time = auto
6. Trace mode = max hold
7. Trace was allowed to stabilize

7.6.4. Test Setup

Below 1GHz Test Setup:

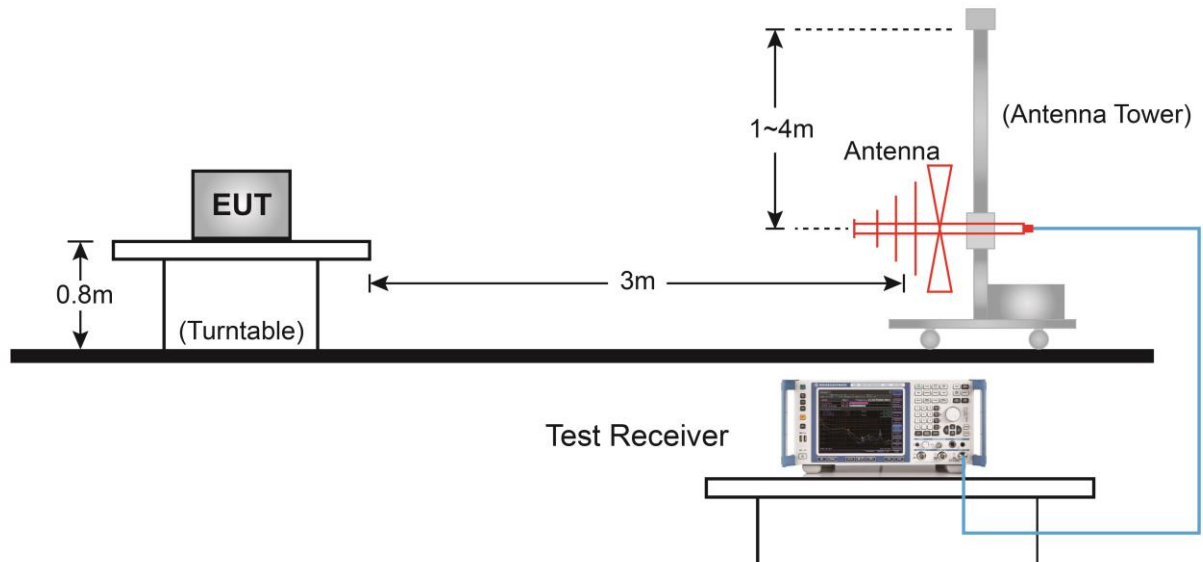


Above 1GHz Test Setup:

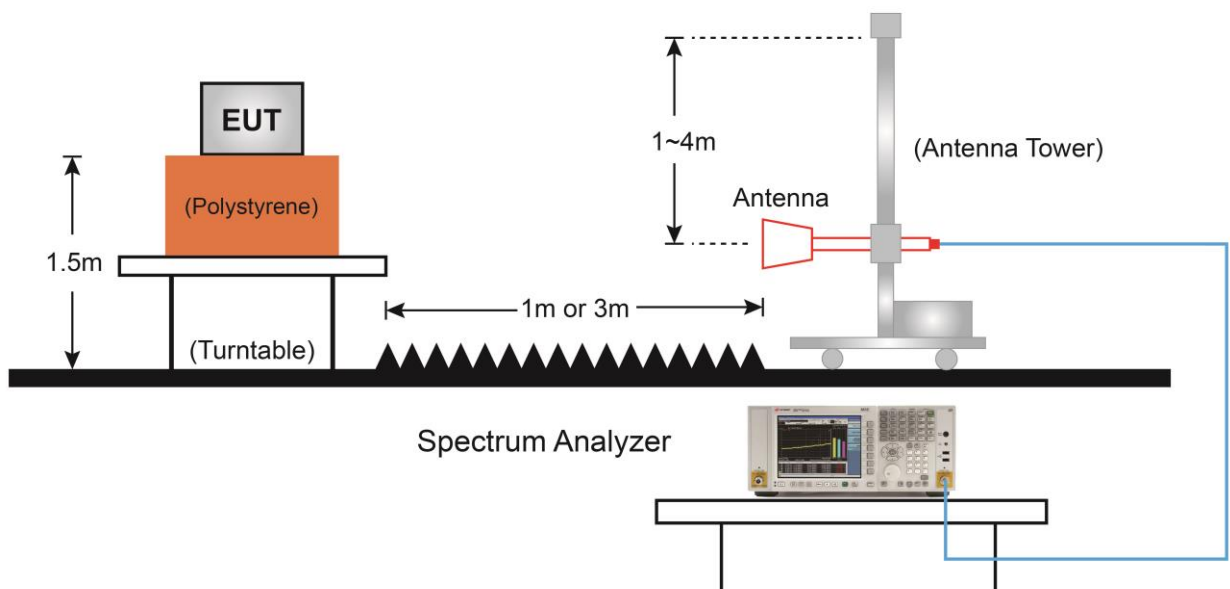

7.6.5. Test Result

EUT	BE24000 Quad-Band Wi-Fi 7 Router	Date of Test	2023-09-07
Factor	VULB 9162	Temp. / Humidity	20°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

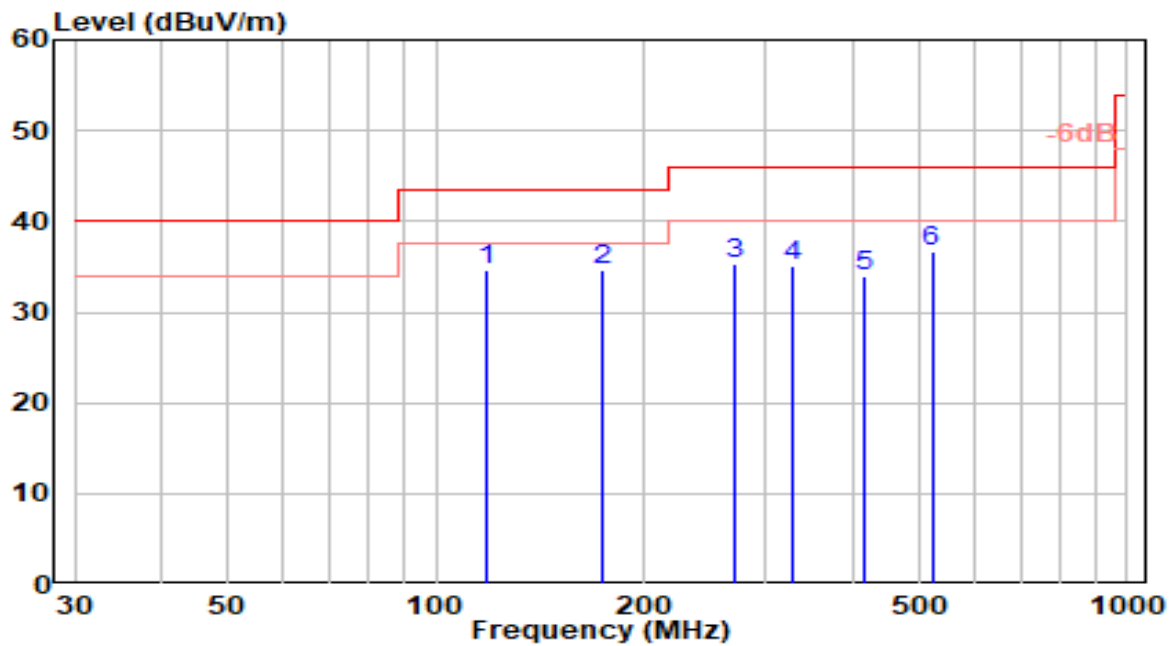


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	117.850	17.40	17.30	34.70	-8.80	43.50	200	349	QP
2	* 173.440	18.53	16.21	34.74	-8.76	43.50	100	327	QP
3	269.300	14.92	20.29	35.21	-10.79	46.00	200	192	QP
4	326.790	13.30	21.87	35.17	-10.83	46.00	100	28	QP
5	415.630	10.26	23.66	33.93	-12.08	46.00	150	28	QP
6	521.720	11.20	25.52	36.72	-9.28	46.00	200	62	QP

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE24000 Quad-Band Wi-Fi 7 Router	Date of Test	2023-09-07
Factor	VULB 9162	Temp. / Humidity	20°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

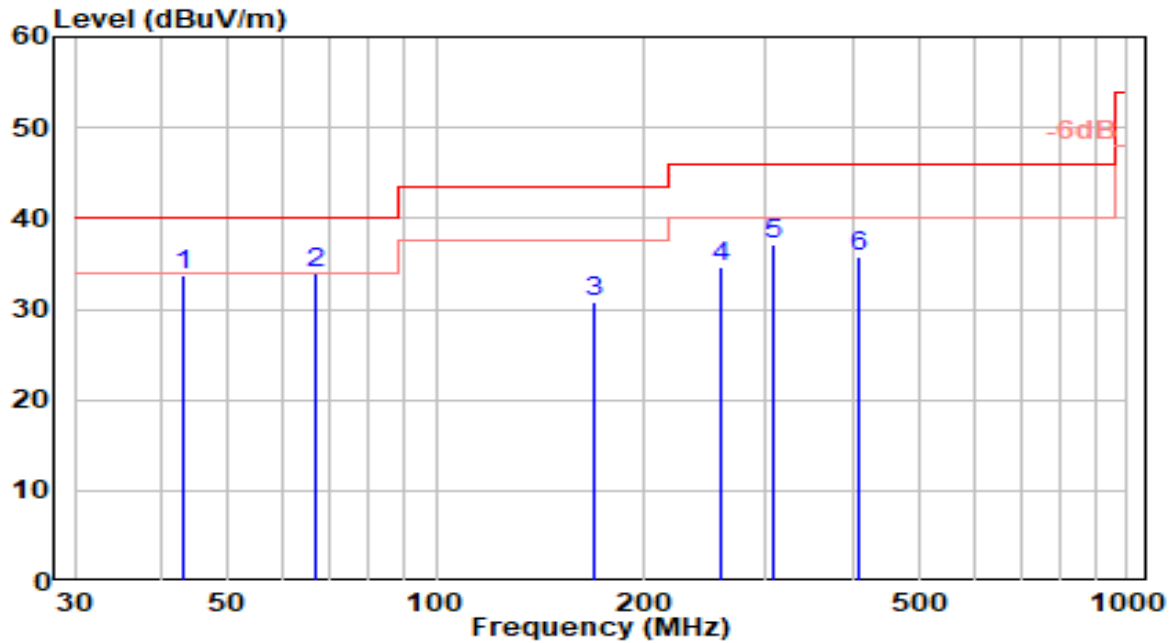


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		43.080	13.43	20.34	33.77	-6.23	40.00	200	42	QP
2	*	66.700	16.71	17.16	33.87	-6.13	40.00	150	296	QP
3		168.970	14.88	16.01	30.89	-12.61	43.50	200	324	QP
4		258.880	14.21	20.34	34.56	-11.44	46.00	150	42	QP
5		308.140	15.97	21.17	37.14	-8.86	46.00	200	66	QP
6		409.500	12.16	23.61	35.78	-10.22	46.00	150	24	QP

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE24000 Quad-Band Wi-Fi 7 Router	Date of Test	2023-09-06
Factor	DRH18-E	Temp. / Humidity	20°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11b_TX_CH 1_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

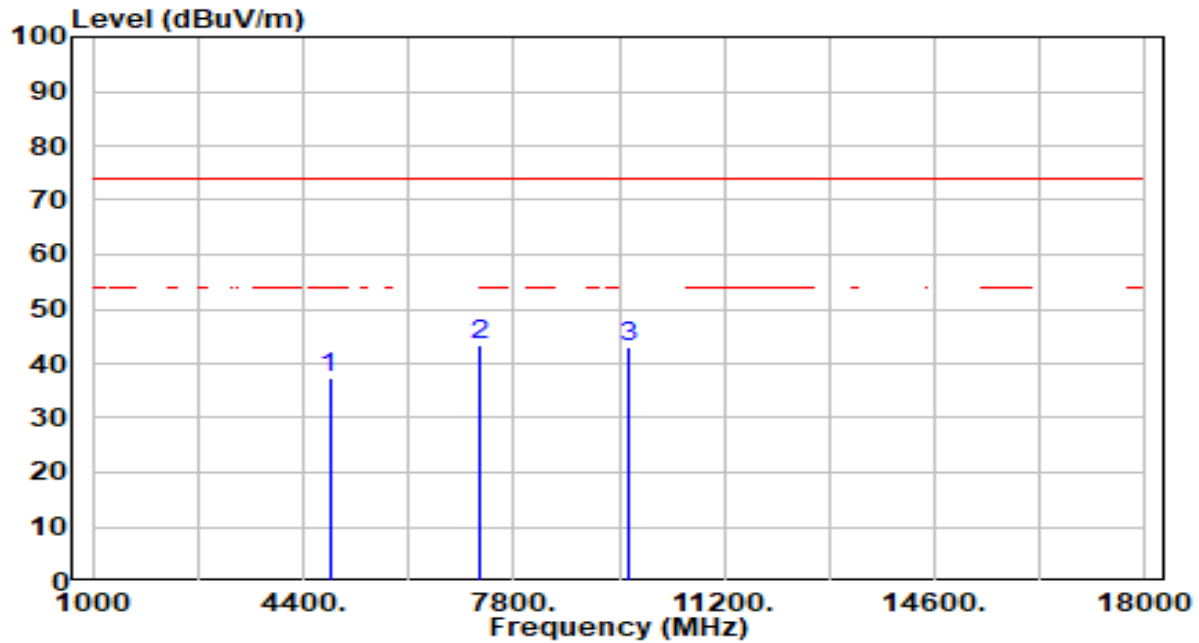


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	50.62	-13.15	37.47	-36.53	74.00	100	54	Peak
2	* 7236.000	50.94	-7.55	43.39	-30.61	74.00	100	214	Peak
3	9648.000	49.96	-6.99	42.97	-31.03	74.00	100	317	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE24000 Quad-Band Wi-Fi 7 Router	Date of Test	2023-09-06
Factor	DRH18-E	Temp. / Humidity	20°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11b_TX_CH 1_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

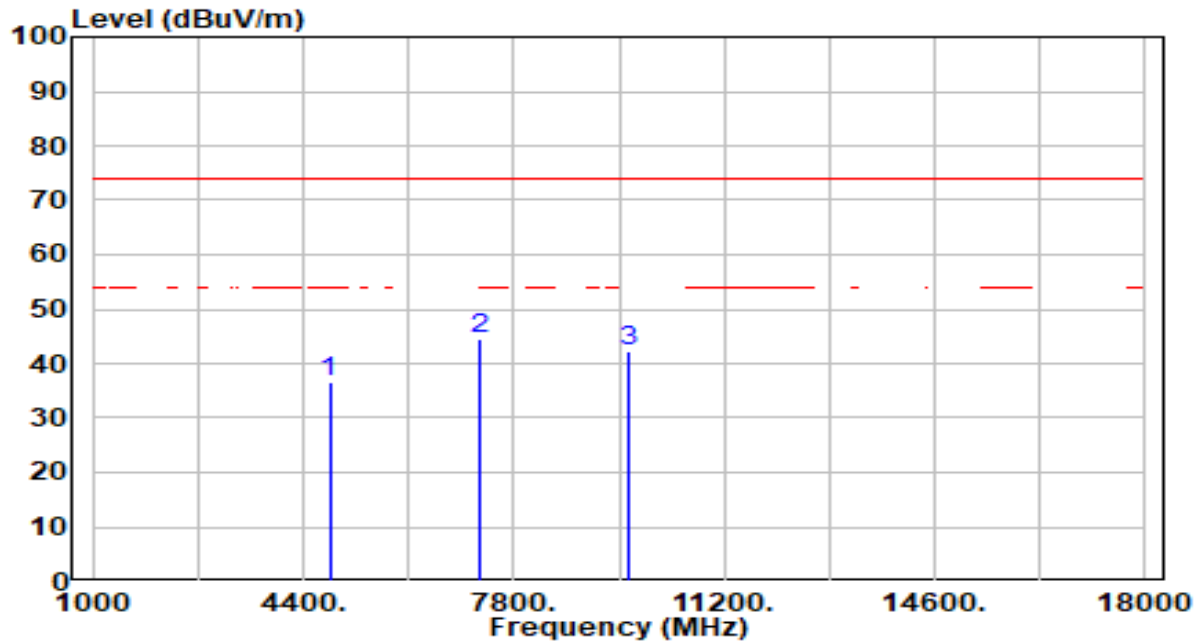


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		4824.000	49.85	-13.15	36.70	-37.30	74.00	200	218	Peak
2	*	7236.000	51.97	-7.55	44.42	-29.58	74.00	200	0	Peak
3		9648.000	49.33	-6.99	42.34	-31.66	74.00	200	218	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE24000 Quad-Band Wi-Fi 7 Router	Date of Test	2023-09-06
Factor	DRH18-E	Temp. / Humidity	20°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11b_TX_CH 6_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

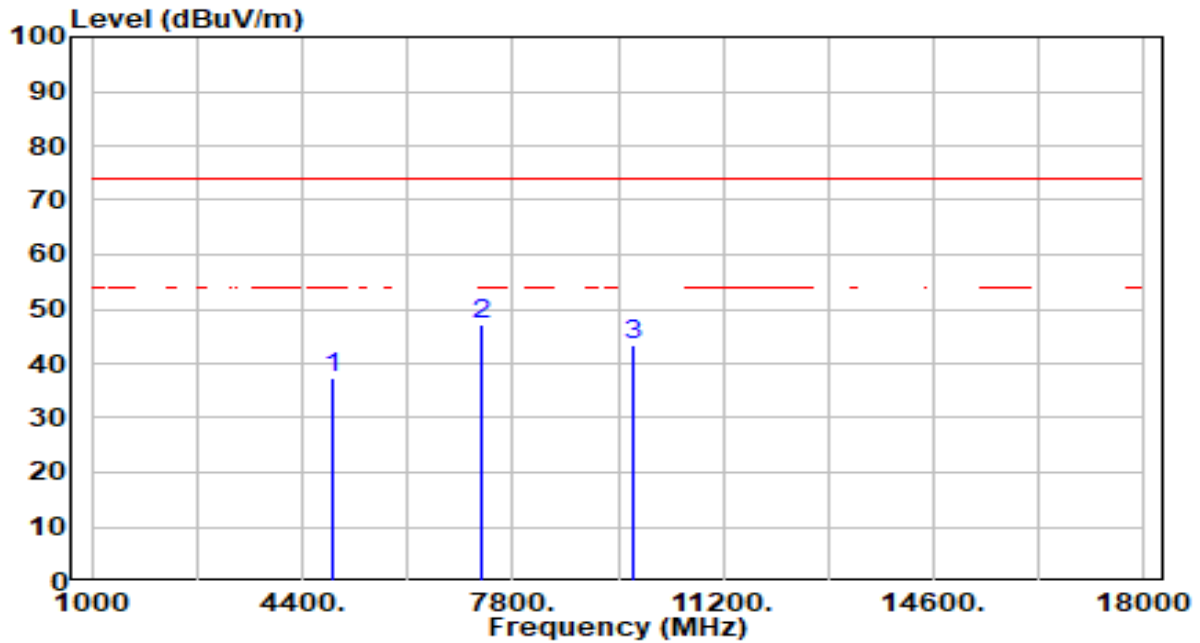


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		4874.000	50.36	-13.00	37.35	-36.65	74.00	100	96	Peak
2	*	7311.000	54.48	-7.46	47.02	-26.98	74.00	100	229	Peak
3		9748.000	50.19	-6.87	43.32	-30.68	74.00	100	96	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE24000 Quad-Band Wi-Fi 7 Router	Date of Test	2023-09-07
Factor	DRH18-E	Temp. / Humidity	20°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11b_TX_CH 6_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

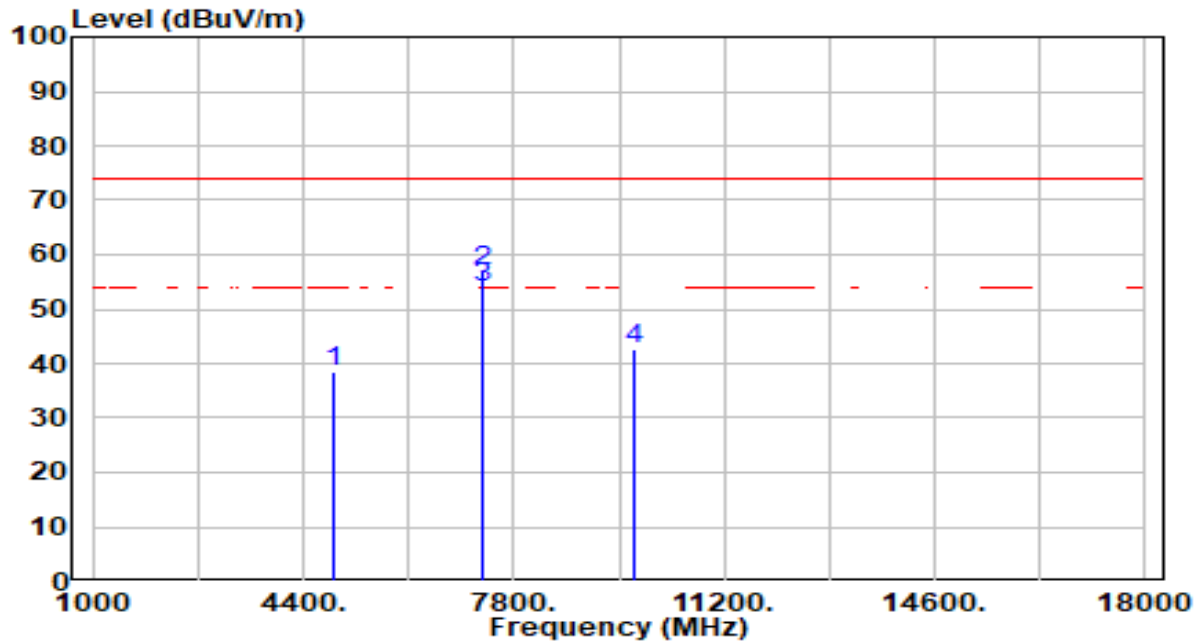


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		4874.000	51.34	-13.00	38.33	-35.67	74.00	200	104	Peak
2	*	7311.000	64.48	-7.46	57.02	-16.98	74.00	233	360	Peak
3	*	7311.000	61.31	-7.46	53.85	-0.15	54.00	233	360	Average
4		9748.000	49.35	-6.87	42.48	-31.52	74.00	200	31	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE24000 Quad-Band Wi-Fi 7 Router	Date of Test	2023-09-06
Factor	DRH18-E	Temp. / Humidity	20°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11b_TX_CH 11_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

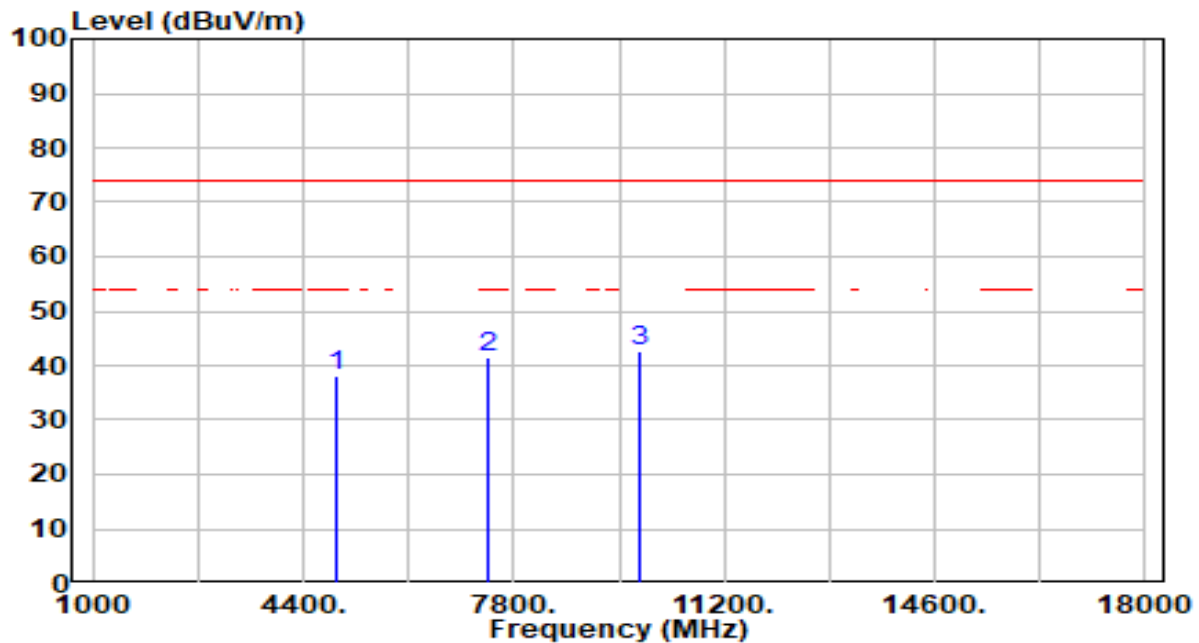


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	51.01	-12.86	38.15	-35.85	74.00	100	126	Peak
2	7386.000	48.84	-7.37	41.47	-32.53	74.00	100	83	Peak
3	* 9848.000	49.21	-6.75	42.46	-31.54	74.00	100	15	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE24000 Quad-Band Wi-Fi 7 Router	Date of Test	2023-09-06
Factor	DRH18-E	Temp. / Humidity	20°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11b_TX_CH 11_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

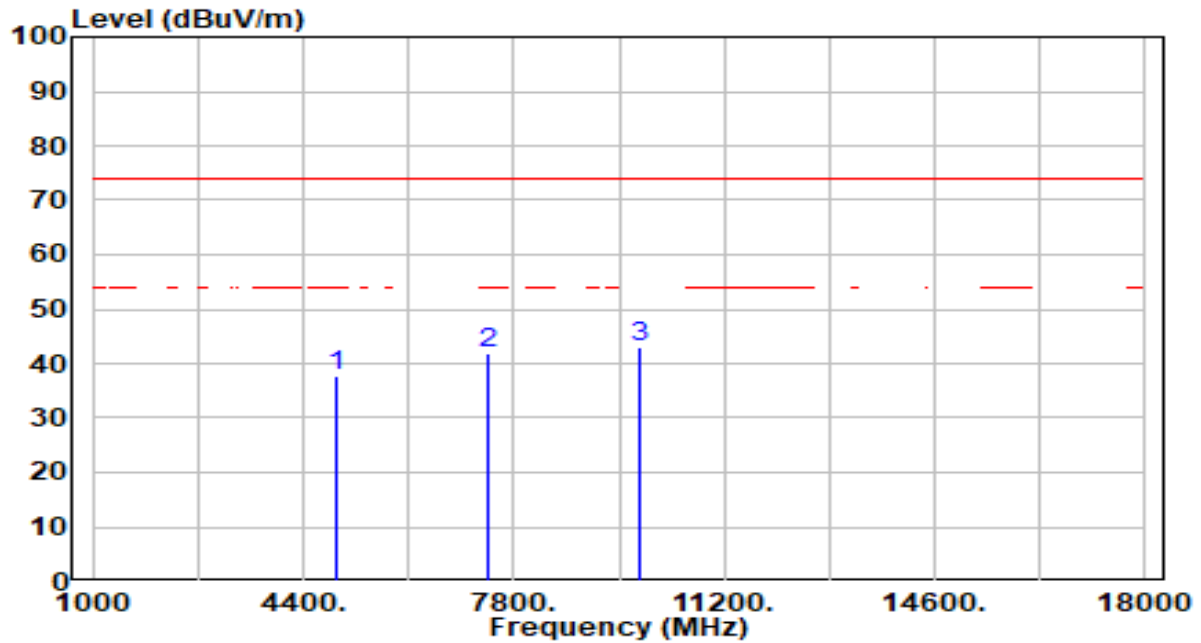


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	50.71	-12.86	37.84	-36.16	74.00	200	326	Peak
2	7386.000	49.16	-7.37	41.79	-32.21	74.00	200	342	Peak
3	* 9848.000	49.67	-6.75	42.92	-31.08	74.00	200	274	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE24000 Quad-Band Wi-Fi 7 Router	Date of Test	2023-09-06
Factor	DRH18-E	Temp. / Humidity	20°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11g_TX_CH 1_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

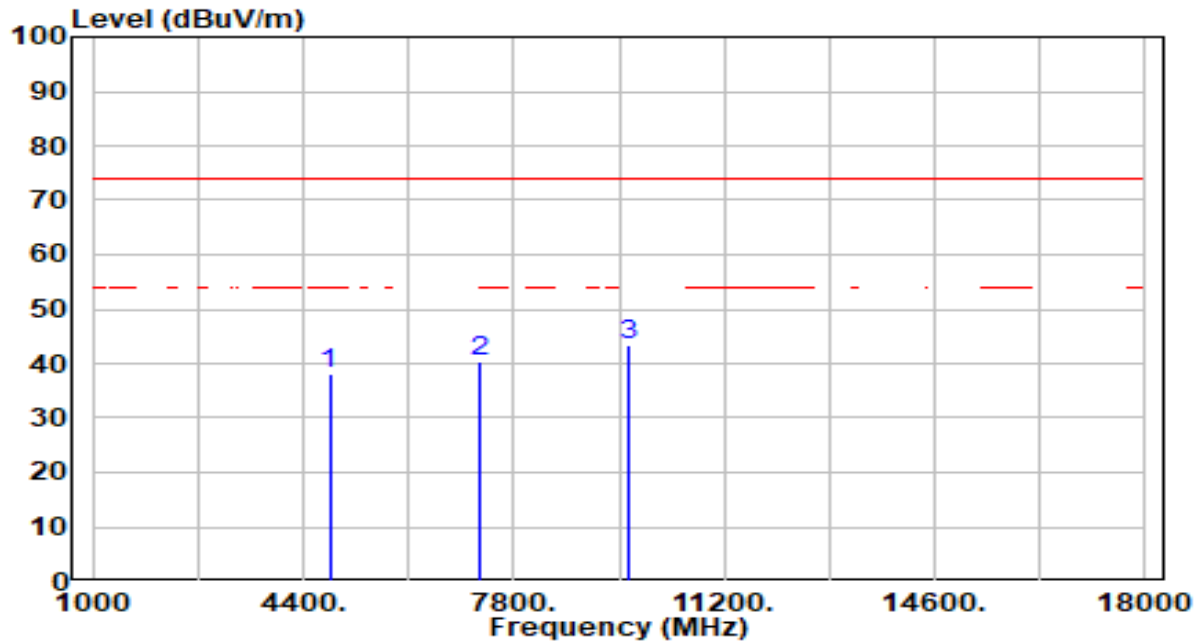


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	51.14	-13.15	38.00	-36.00	74.00	100	106	Peak
2	7236.000	48.05	-7.55	40.50	-33.50	74.00	100	19	Peak
3	* 9648.000	50.56	-6.99	43.57	-30.43	74.00	100	269	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE24000 Quad-Band Wi-Fi 7 Router	Date of Test	2023-09-06
Factor	DRH18-E	Temp. / Humidity	20°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11g_TX_CH 1_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

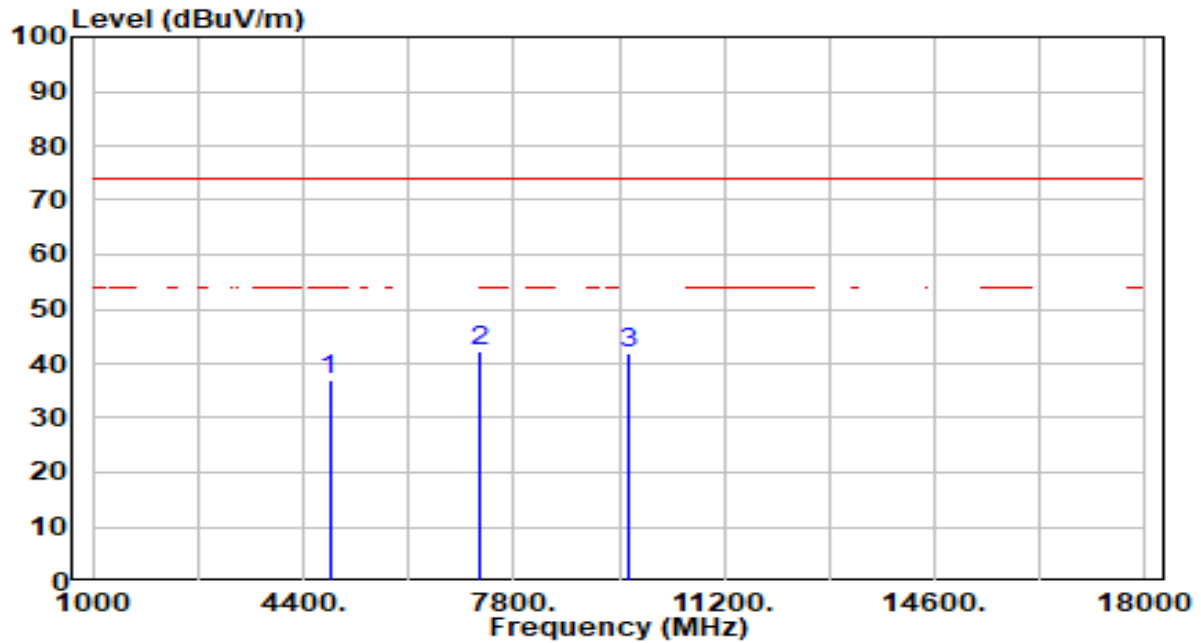


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	50.07	-13.15	36.92	-37.08	74.00	200	226	Peak
2	* 7236.000	49.64	-7.55	42.09	-31.91	74.00	200	7	Peak
3	9648.000	48.76	-6.99	41.77	-32.23	74.00	200	19	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE24000 Quad-Band Wi-Fi 7 Router	Date of Test	2023-09-06
Factor	DRH18-E	Temp. / Humidity	20°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11g_TX_CH 6_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

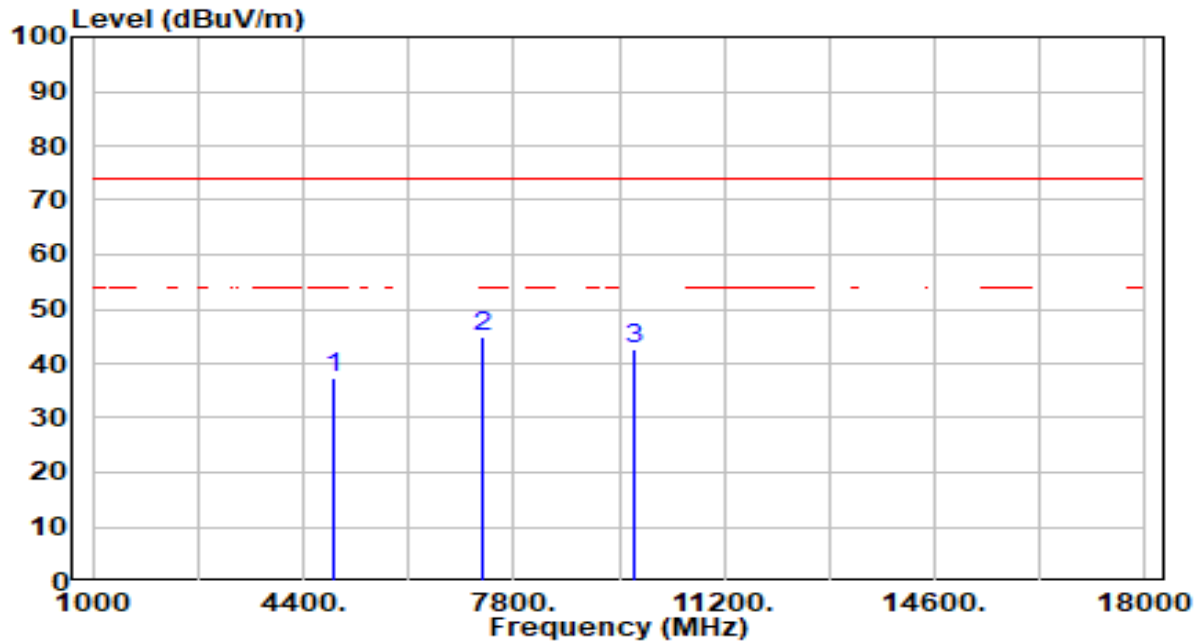


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		4874.000	50.37	-13.00	37.37	-36.63	74.00	100	142	Peak
2	*	7311.000	52.38	-7.46	44.92	-29.08	74.00	100	301	Peak
3		9748.000	49.40	-6.87	42.53	-31.47	74.00	100	122	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE24000 Quad-Band Wi-Fi 7 Router	Date of Test	2023-09-06
Factor	DRH18-E	Temp. / Humidity	20°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11g_TX_CH 6_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

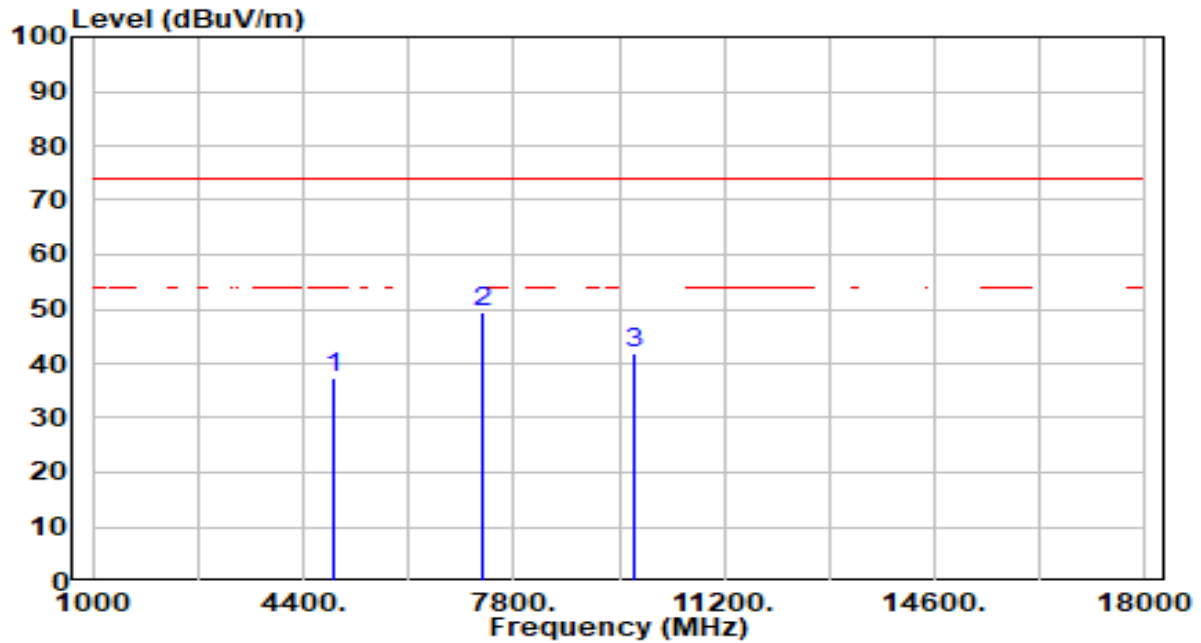


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		4874.000	50.35	-13.00	37.35	-36.65	74.00	200	286	Peak
2	*	7311.000	56.95	-7.46	49.49	-24.51	74.00	200	359	Peak
3		9748.000	48.79	-6.87	41.92	-32.08	74.00	200	190	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE24000 Quad-Band Wi-Fi 7 Router	Date of Test	2023-09-06
Factor	DRH18-E	Temp. / Humidity	20°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11g_TX_CH 11_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

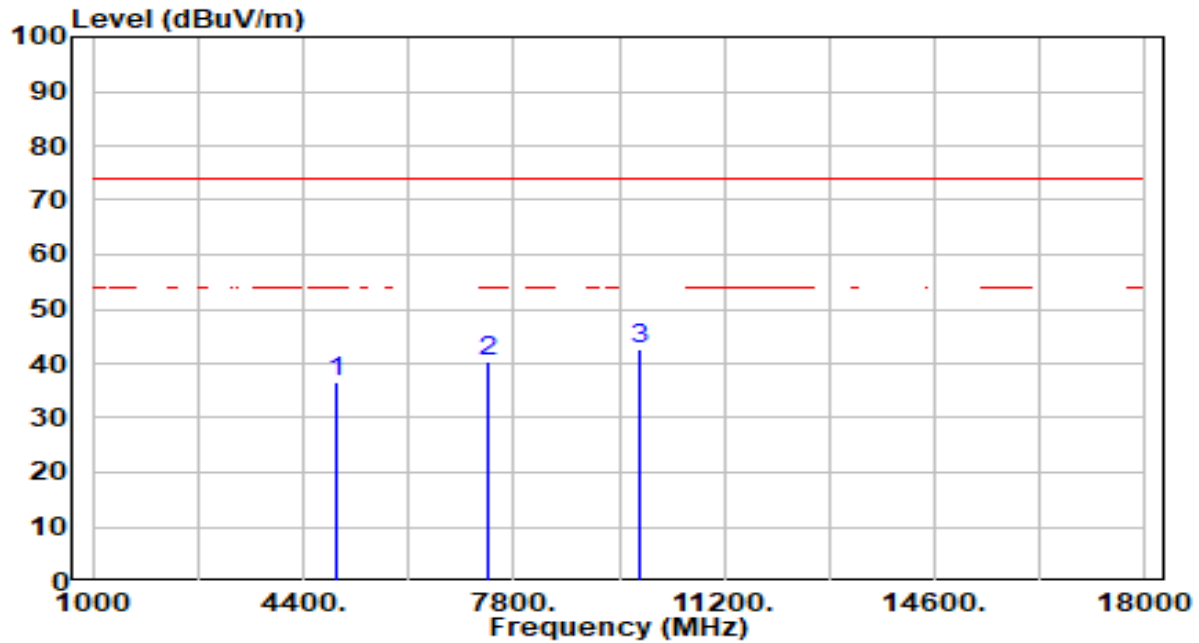


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	49.61	-12.86	36.75	-37.25	74.00	100	344	Peak
2	7386.000	47.89	-7.37	40.52	-33.48	74.00	100	273	Peak
3	* 9848.000	49.45	-6.75	42.70	-31.30	74.00	100	3	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE24000 Quad-Band Wi-Fi 7 Router	Date of Test	2023-09-06
Factor	DRH18-E	Temp. / Humidity	20°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11g_TX_CH 11_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

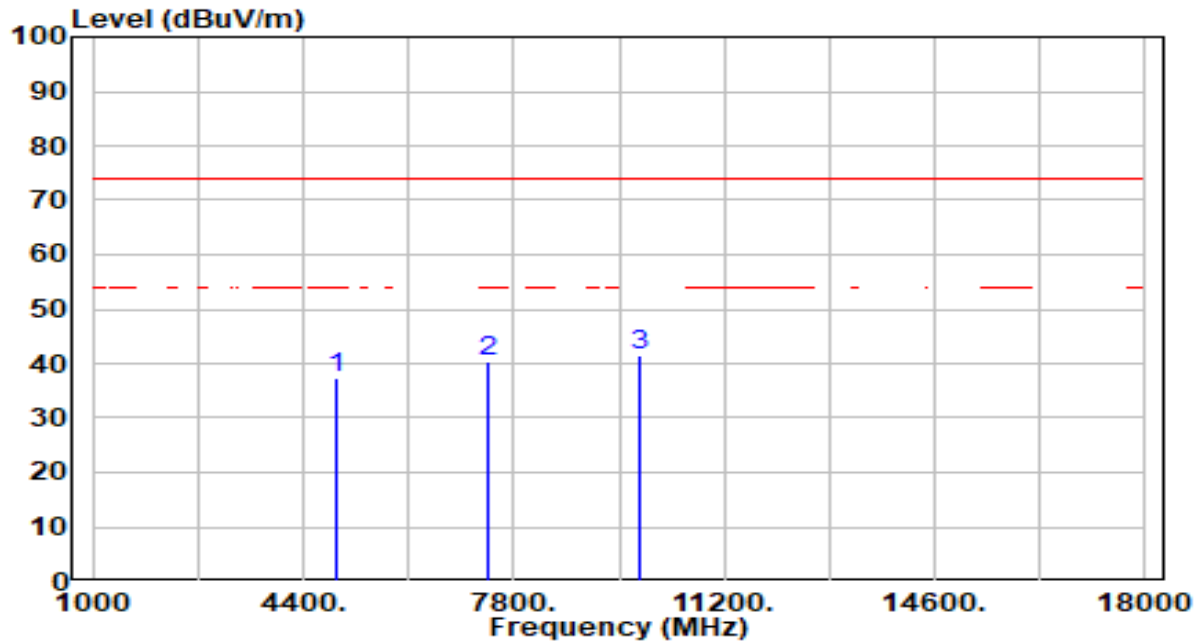


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	50.40	-12.86	37.54	-36.46	74.00	200	123	Peak
2	7386.000	47.91	-7.37	40.54	-33.46	74.00	200	135	Peak
3	* 9848.000	48.42	-6.75	41.67	-32.33	74.00	200	175	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE24000 Quad-Band Wi-Fi 7 Router	Date of Test	2023-09-06
Factor	DRH18-E	Temp. / Humidity	20°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11n-20MHz_TX_CH 1_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

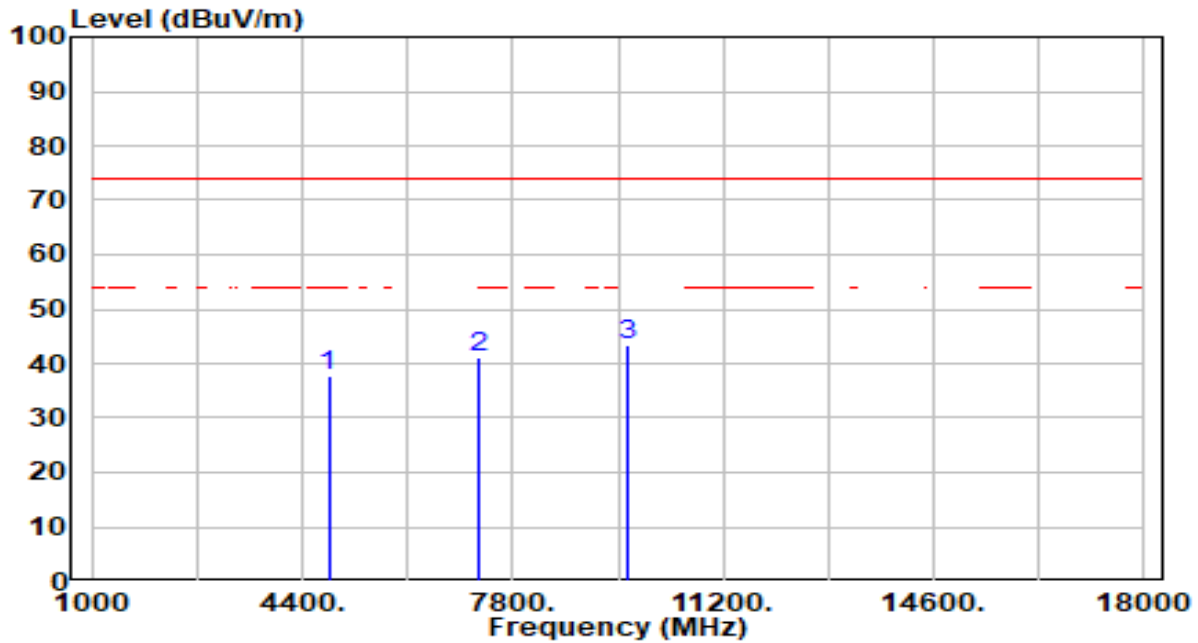


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	50.88	-13.15	37.73	-36.27	74.00	100	27	Peak
2	7236.000	48.81	-7.55	41.25	-32.75	74.00	100	289	Peak
3	* 9648.000	50.40	-6.99	43.41	-30.59	74.00	100	55	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE24000 Quad-Band Wi-Fi 7 Router	Date of Test	2023-09-06
Factor	DRH18-E	Temp. / Humidity	20°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11n-20MHz_TX_CH 1_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

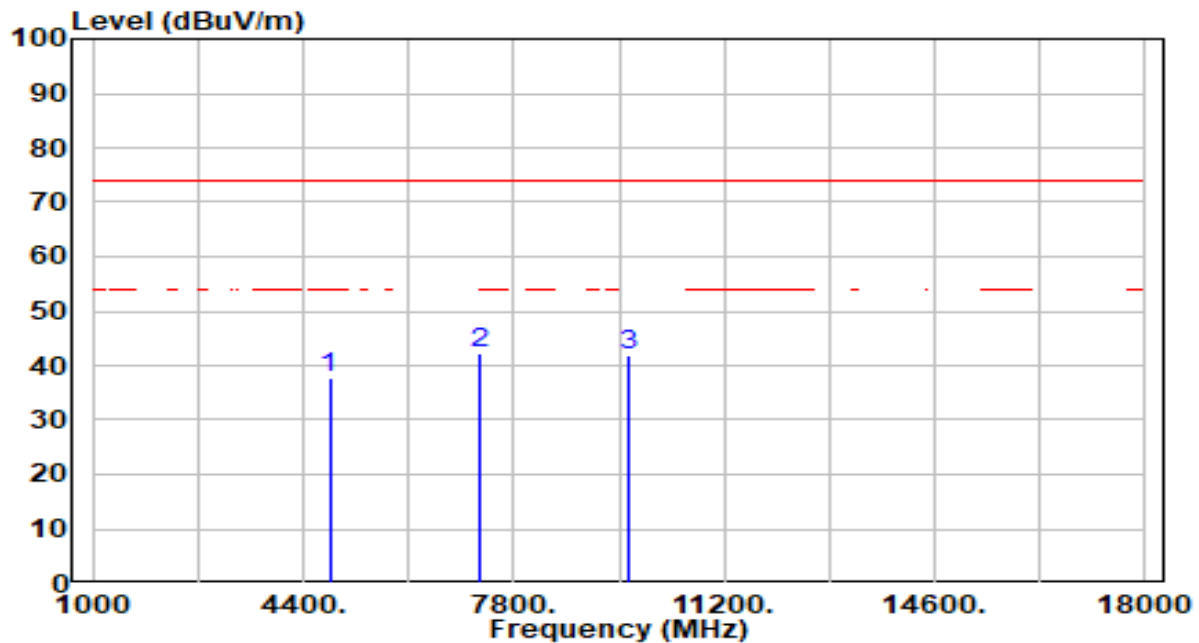


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	51.06	-13.15	37.92	-36.08	74.00	200	20	Peak
2	* 7236.000	49.80	-7.55	42.25	-31.75	74.00	200	195	Peak
3	9648.000	48.99	-6.99	42.00	-32.00	74.00	200	68	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE24000 Quad-Band Wi-Fi 7 Router	Date of Test	2023-09-06
Factor	DRH18-E	Temp. / Humidity	20°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

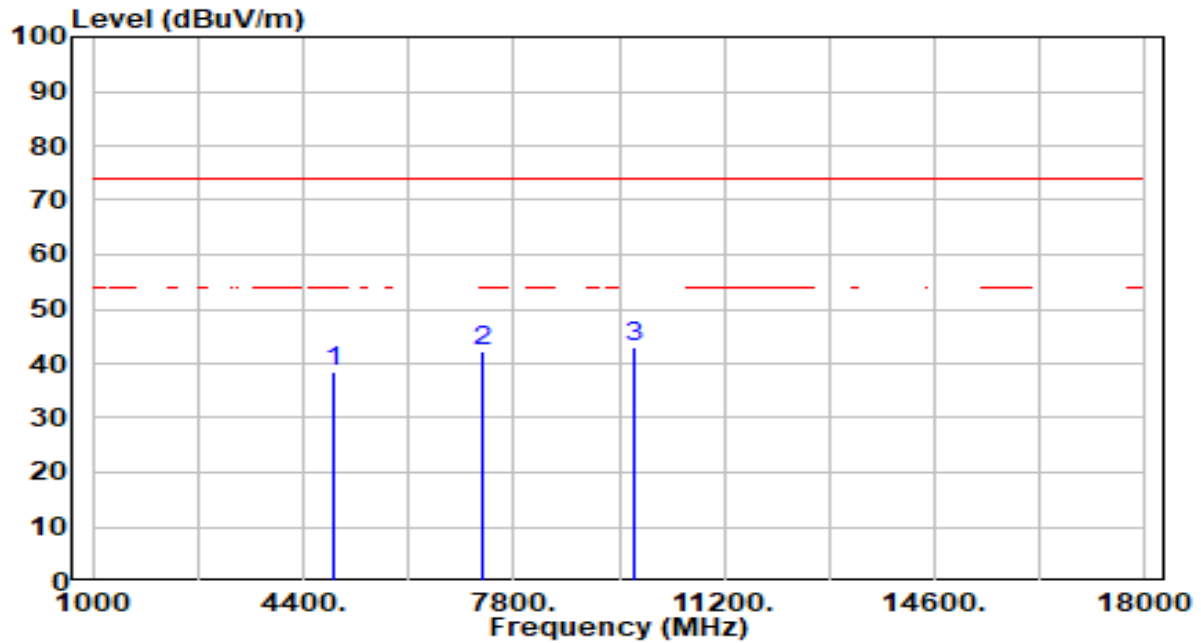


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	51.43	-13.00	38.43	-35.57	74.00	100	126	Peak
2	7311.000	49.83	-7.46	42.37	-31.63	74.00	100	118	Peak
3	* 9748.000	49.86	-6.87	42.99	-31.01	74.00	100	177	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE24000 Quad-Band Wi-Fi 7 Router	Date of Test	2023-09-06
Factor	DRH18-E	Temp. / Humidity	20°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

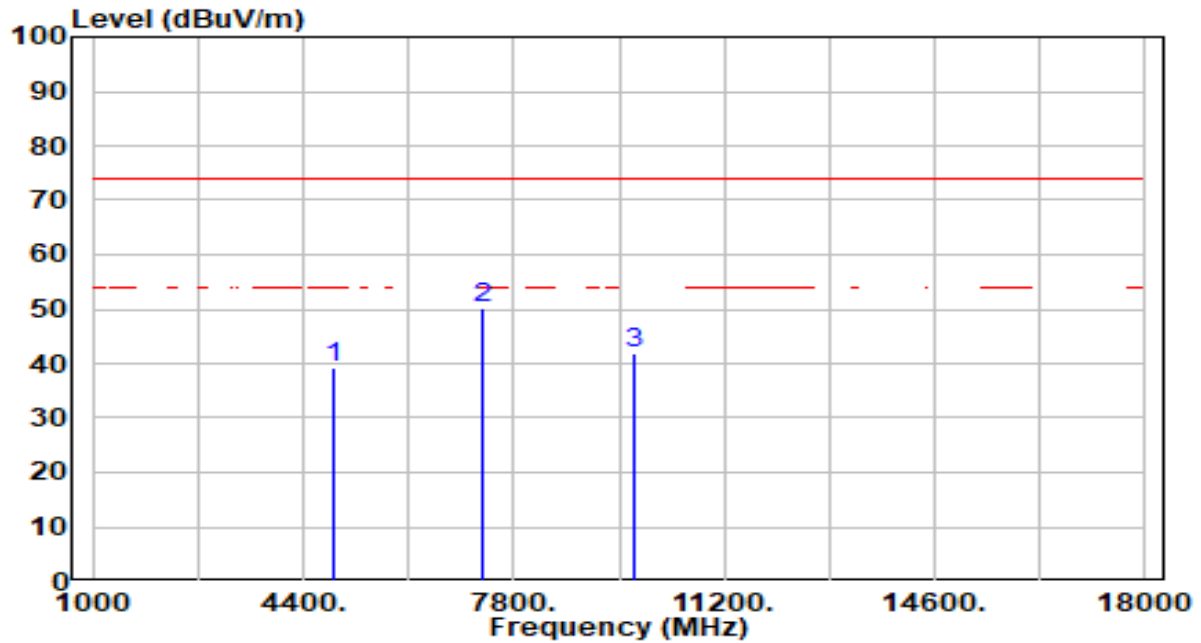


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		4874.000	52.08	-13.00	39.07	-34.93	74.00	200	159	Peak
2	*	7311.000	57.65	-7.46	50.19	-23.81	74.00	200	359	Peak
3		9748.000	48.65	-6.87	41.79	-32.21	74.00	200	298	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE24000 Quad-Band Wi-Fi 7 Router	Date of Test	2023-09-06
Factor	DRH18-E	Temp. / Humidity	20°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11n-20MHz_TX_CH 11_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

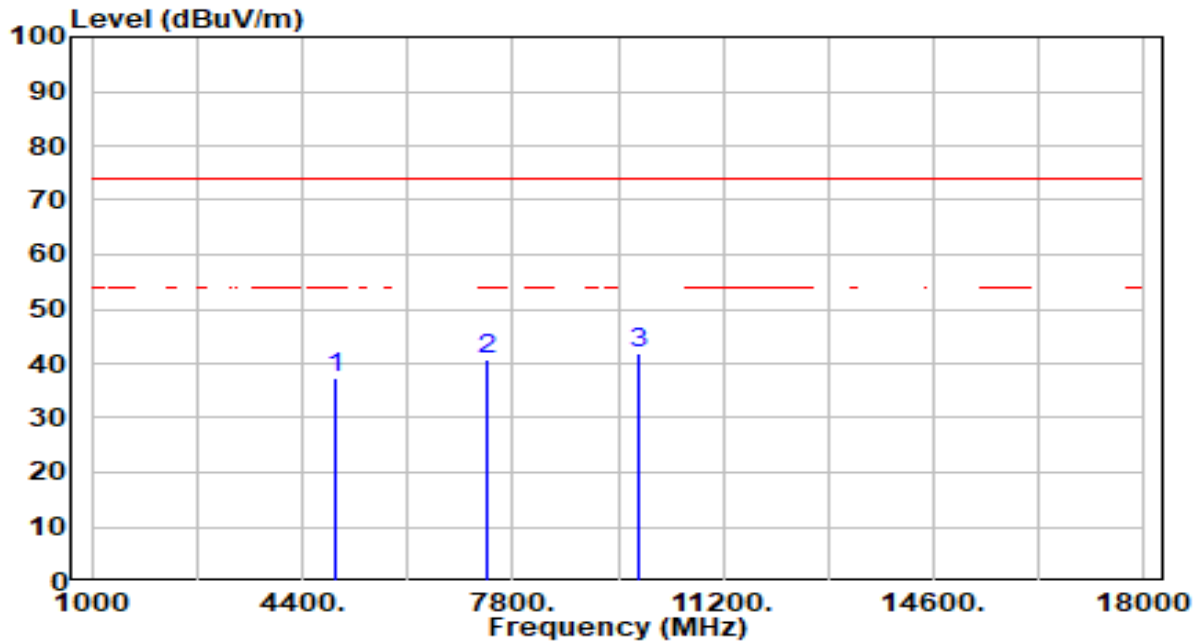


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	50.13	-12.86	37.27	-36.73	74.00	100	11	Peak
2	7386.000	48.03	-7.37	40.66	-33.34	74.00	100	245	Peak
3	* 9848.000	48.76	-6.75	42.01	-31.99	74.00	100	130	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE24000 Quad-Band Wi-Fi 7 Router	Date of Test	2023-09-06
Factor	DRH18-E	Temp. / Humidity	20°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11n-20MHz_TX_CH 11_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

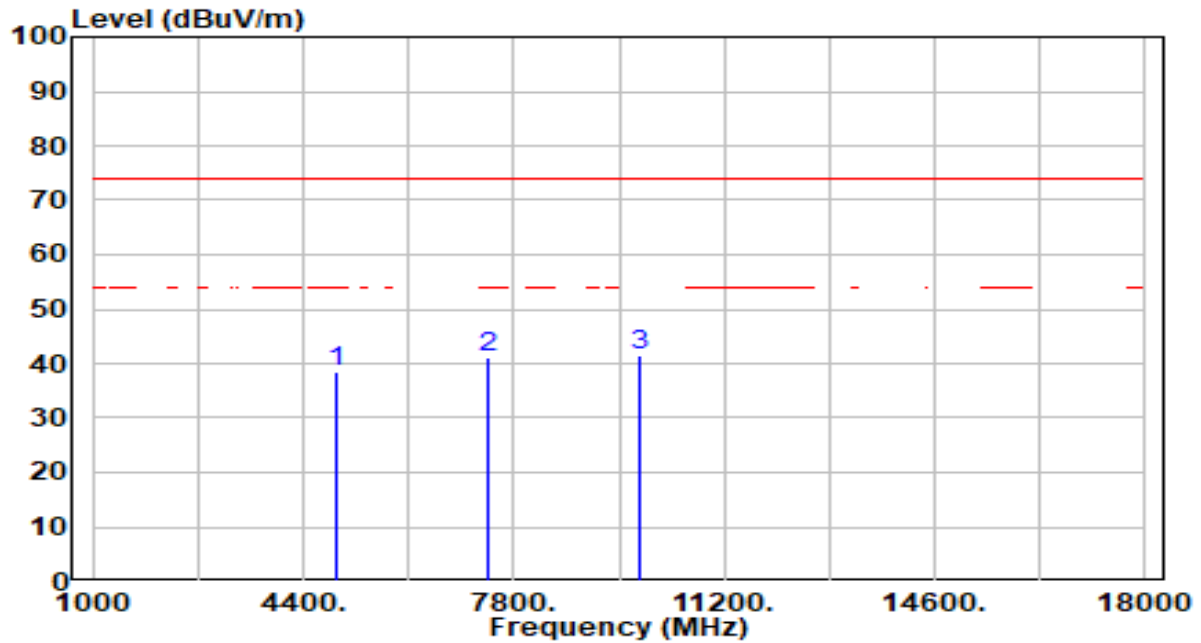


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	51.41	-12.86	38.55	-35.45	74.00	200	94	Peak
2	7386.000	48.46	-7.37	41.09	-32.91	74.00	200	282	Peak
3	* 9848.000	48.28	-6.75	41.53	-32.47	74.00	200	26	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE24000 Quad-Band Wi-Fi 7 Router	Date of Test	2023-09-06
Factor	DRH18-E	Temp. / Humidity	20°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11n-40MHz_TX_CH 3_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

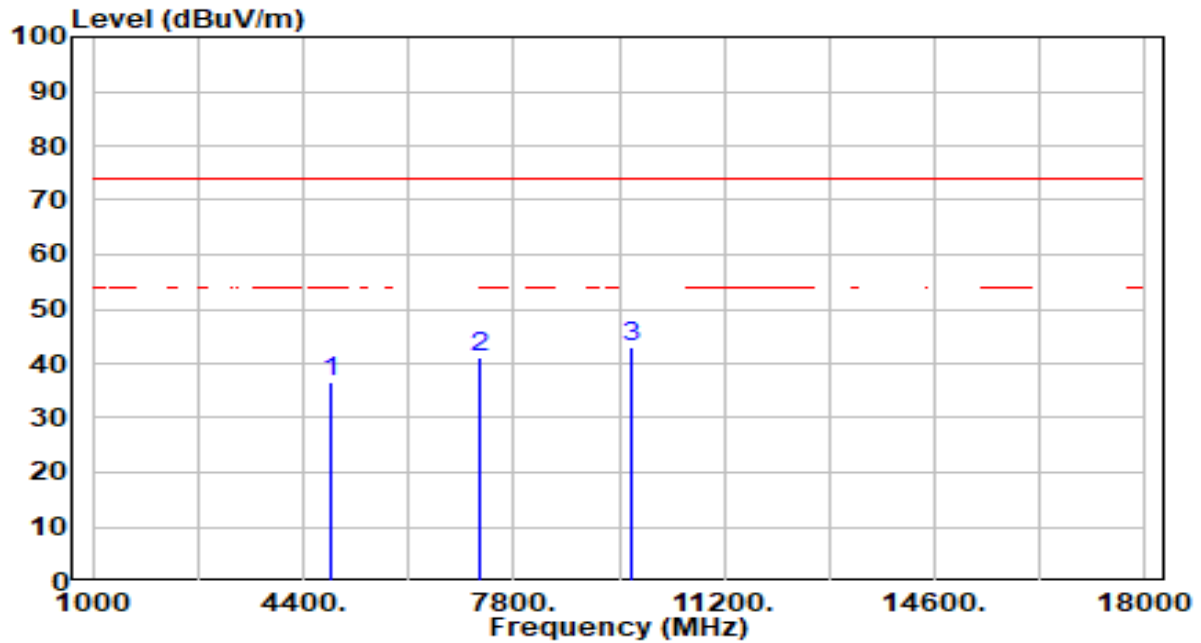


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4844.000	49.68	-13.09	36.59	-37.41	74.00	100	268	Peak
2	7266.000	48.80	-7.52	41.29	-32.71	74.00	100	316	Peak
3	* 9688.000	49.89	-6.94	42.95	-31.05	74.00	100	70	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE24000 Quad-Band Wi-Fi 7 Router	Date of Test	2023-09-06
Factor	DRH18-E	Temp. / Humidity	20°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11n-40MHz_TX_CH 3_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

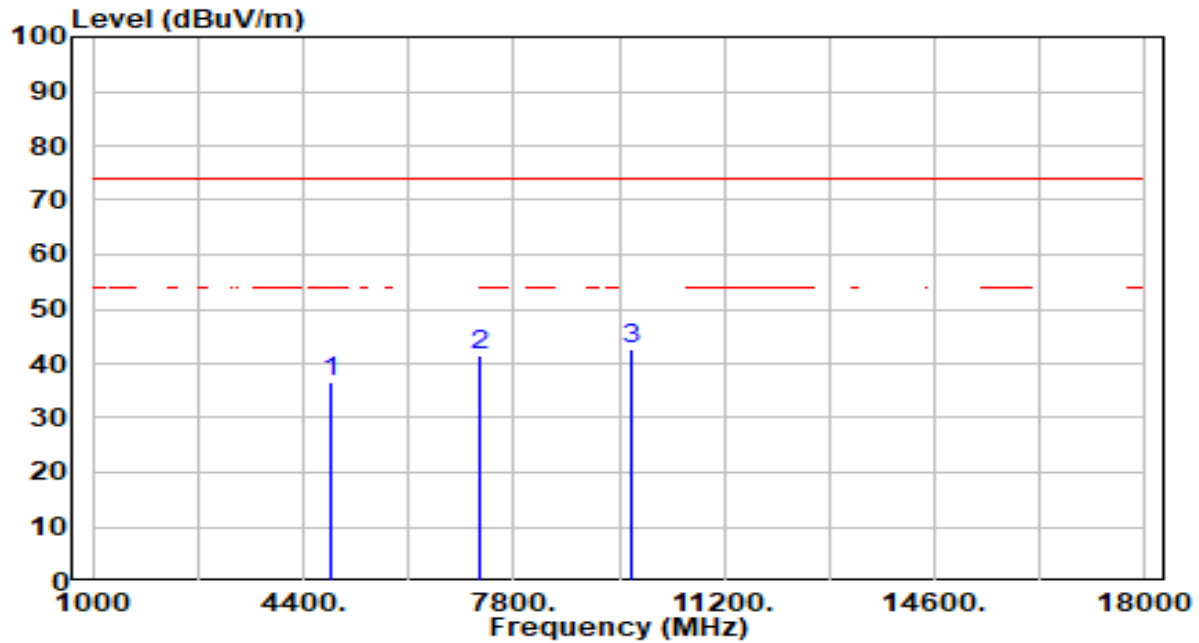


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4844.000	49.81	-13.09	36.72	-37.28	74.00	200	0	Peak
2	7266.000	48.92	-7.52	41.41	-32.59	74.00	200	360	Peak
3	* 9688.000	49.54	-6.94	42.60	-31.40	74.00	200	306	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE24000 Quad-Band Wi-Fi 7 Router	Date of Test	2023-09-06
Factor	DRH18-E	Temp. / Humidity	20°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11n-40MHz_TX_CH 6_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

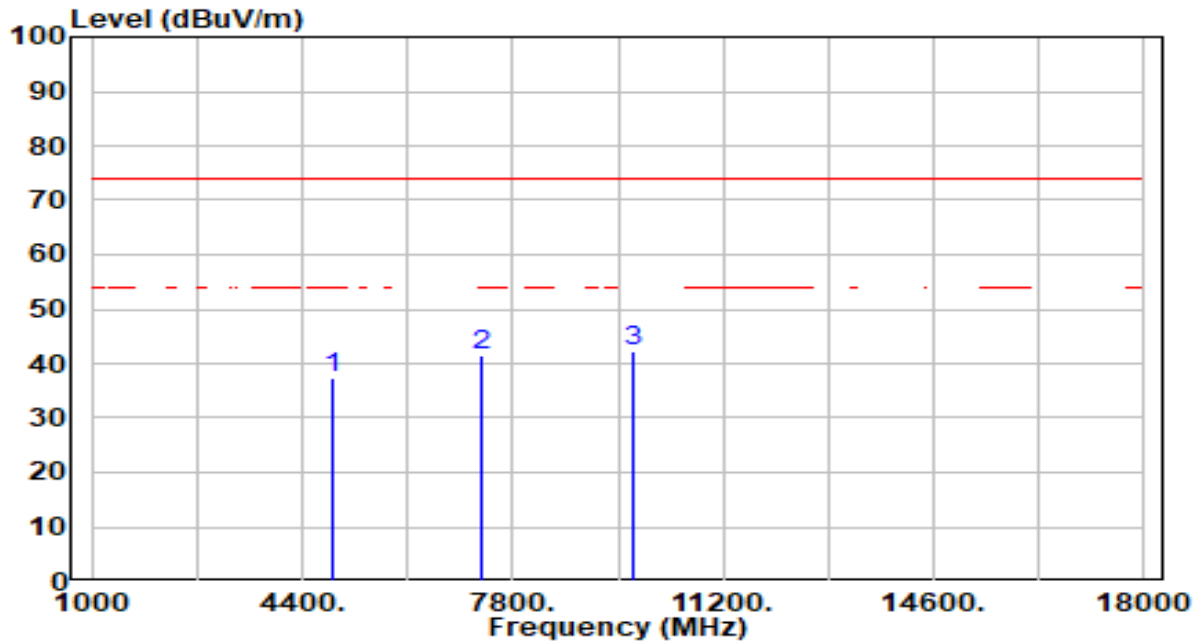


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	50.52	-13.00	37.52	-36.48	74.00	100	47	Peak
2	7311.000	48.90	-7.46	41.44	-32.56	74.00	100	353	Peak
3	* 9748.000	49.14	-6.87	42.27	-31.73	74.00	100	23	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE24000 Quad-Band Wi-Fi 7 Router	Date of Test	2023-09-06
Factor	DRH18-E	Temp. / Humidity	20°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11n-40MHz_TX_CH 6_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

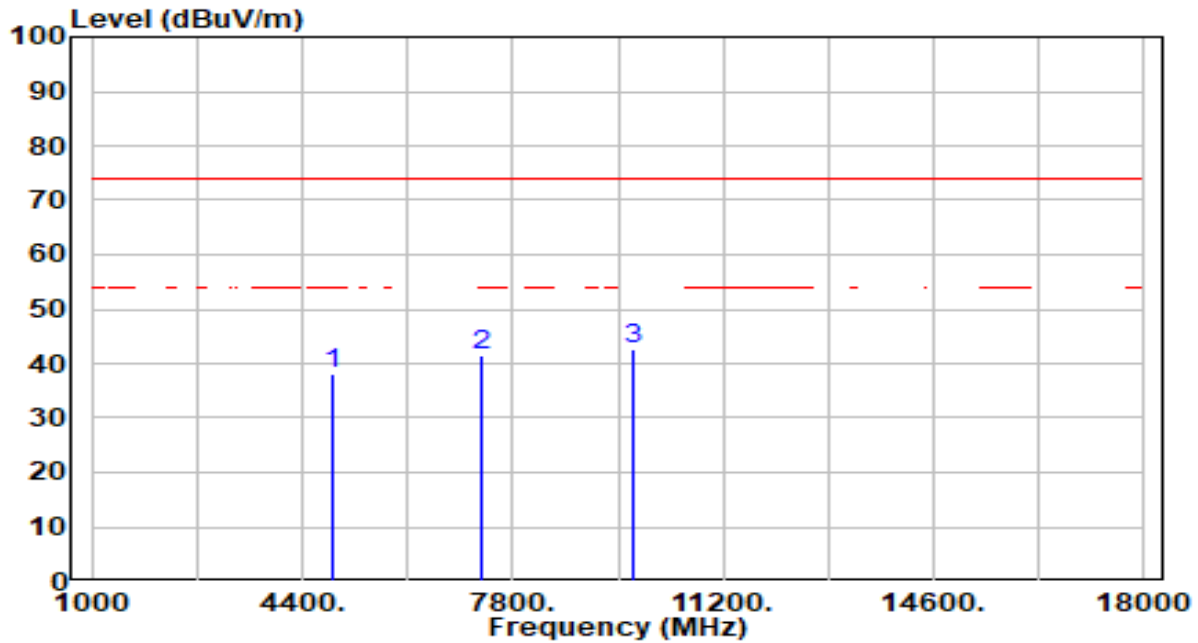


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	50.93	-13.00	37.93	-36.07	74.00	200	313	Peak
2	7311.000	49.10	-7.46	41.64	-32.36	74.00	200	360	Peak
3	* 9748.000	49.40	-6.87	42.53	-31.47	74.00	200	250	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE24000 Quad-Band Wi-Fi 7 Router	Date of Test	2023-09-06
Factor	DRH18-E	Temp. / Humidity	20°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11n-40MHz_TX_CH 9_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

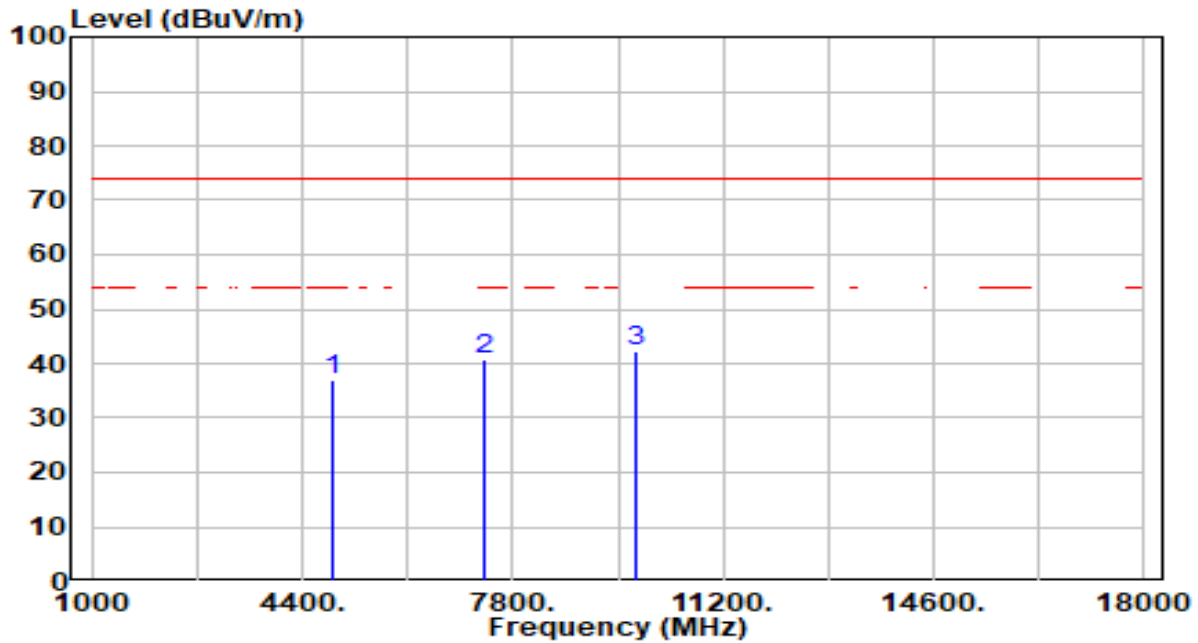


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4904.000	49.90	-12.92	36.98	-37.02	74.00	100	47	Peak
2	7356.000	47.98	-7.41	40.58	-33.42	74.00	100	221	Peak
3	* 9808.000	48.94	-6.80	42.14	-31.86	74.00	100	265	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE24000 Quad-Band Wi-Fi 7 Router	Date of Test	2023-09-06
Factor	DRH18-E	Temp. / Humidity	20°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11n-40MHz_TX_CH 9_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

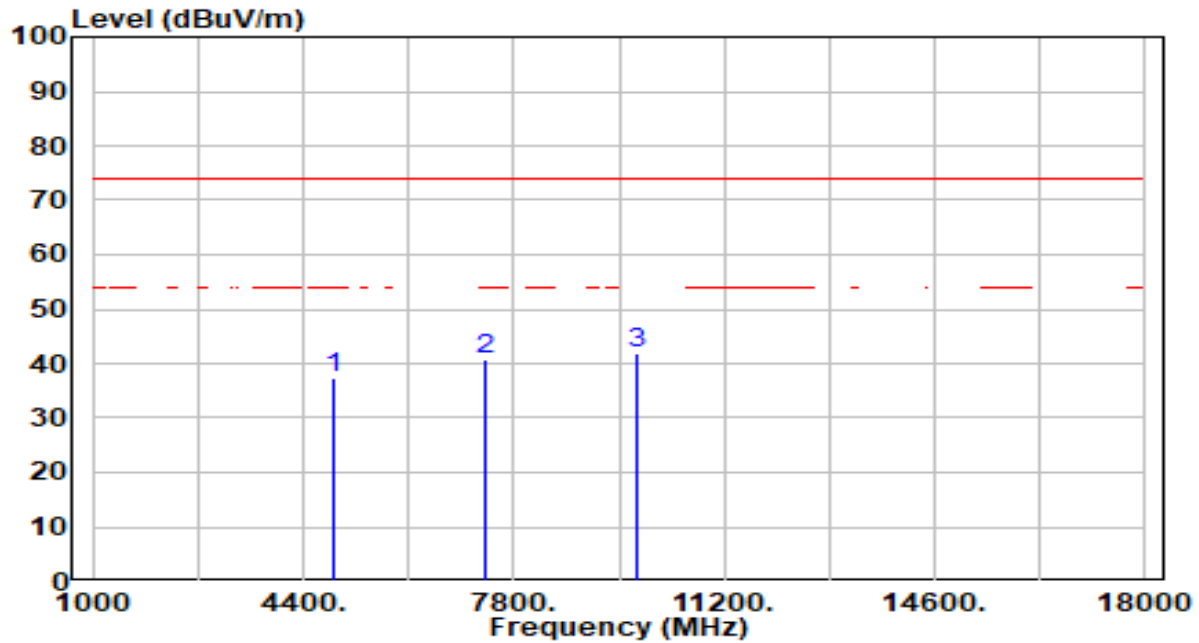


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4904.000	50.35	-12.92	37.43	-36.57	74.00	200	192	Peak
2	7356.000	48.33	-7.41	40.92	-33.08	74.00	200	306	Peak
3	* 9808.000	48.74	-6.80	41.94	-32.06	74.00	200	103	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE24000 Quad-Band Wi-Fi 7 Router	Date of Test	2023-09-06
Factor	DRH18-E	Temp. / Humidity	20°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-20MHz_TX_CH 1_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

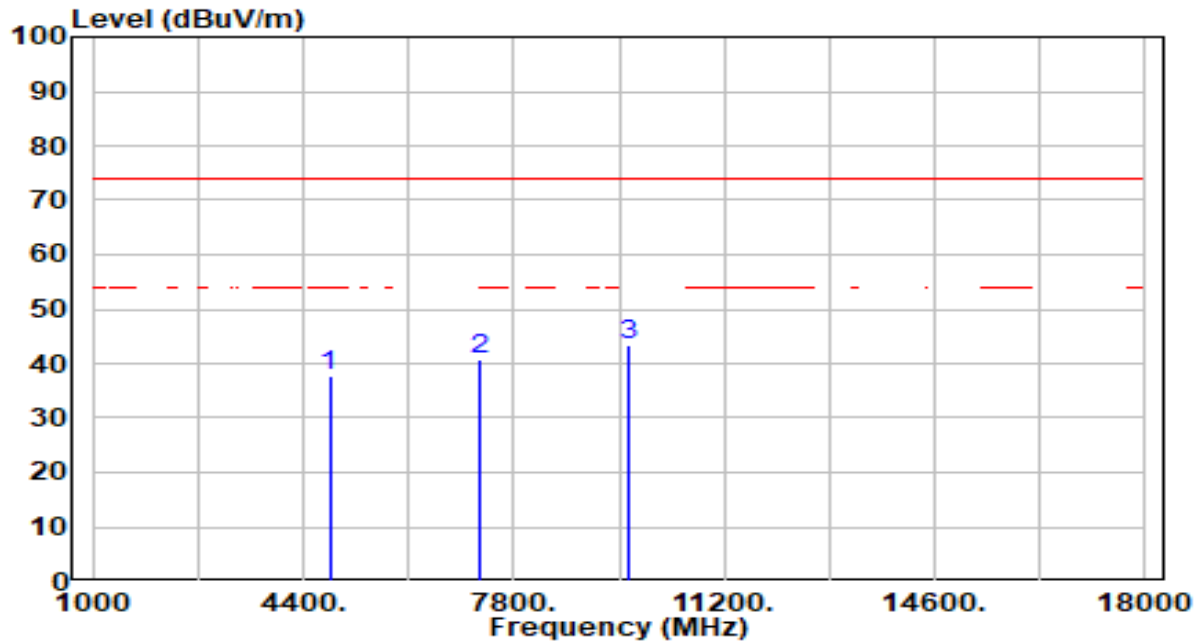


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	50.72	-13.15	37.57	-36.43	74.00	100	153	Peak
2	7236.000	48.12	-7.55	40.57	-33.43	74.00	100	173	Peak
3	* 9648.000	50.22	-6.99	43.23	-30.77	74.00	100	280	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE24000 Quad-Band Wi-Fi 7 Router	Date of Test	2023-09-06
Factor	DRH18-E	Temp. / Humidity	20°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-20MHz_TX_CH 1_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

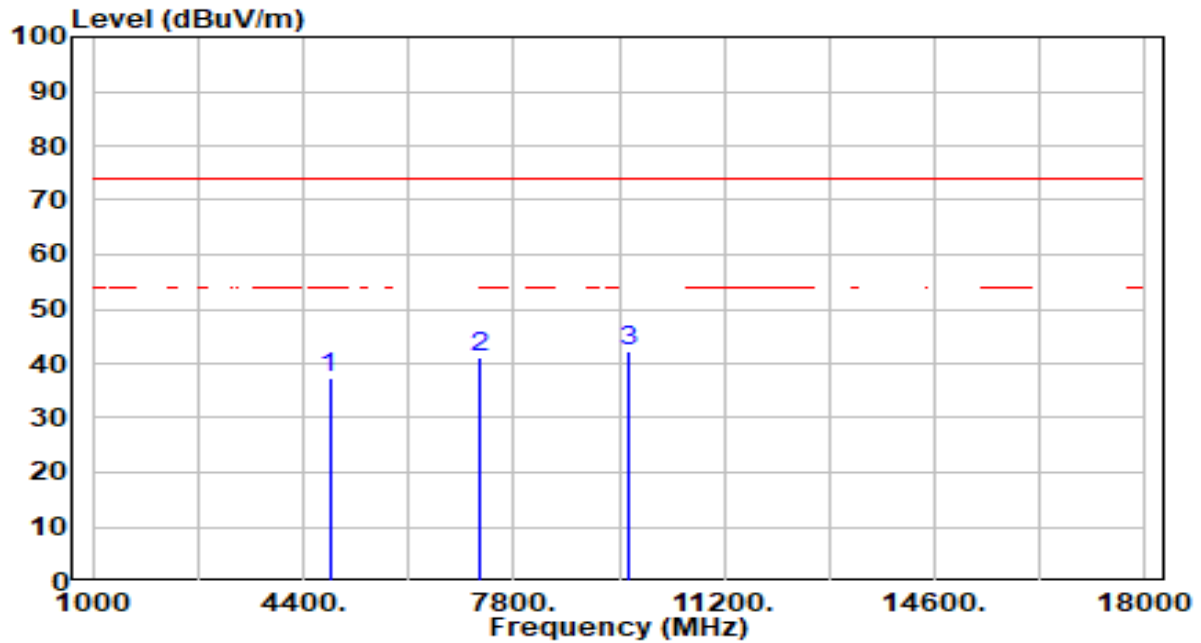


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	50.32	-13.15	37.18	-36.82	74.00	200	360	Peak
2	7236.000	48.58	-7.55	41.03	-32.97	74.00	200	305	Peak
3	* 9648.000	49.27	-6.99	42.29	-31.71	74.00	200	126	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE24000 Quad-Band Wi-Fi 7 Router	Date of Test	2023-09-06
Factor	DRH18-E	Temp. / Humidity	20°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-20MHz_TX_CH 6_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

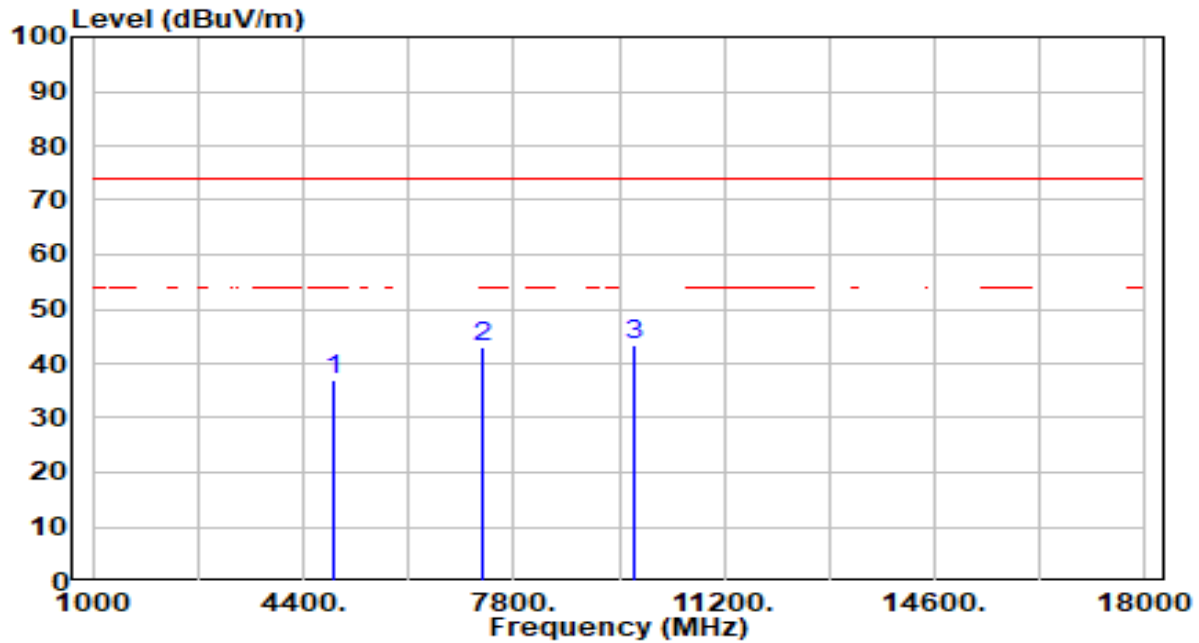


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	50.12	-13.00	37.11	-36.89	74.00	100	38	Peak
2	7311.000	50.41	-7.46	42.95	-31.05	74.00	100	349	Peak
3	* 9748.000	50.19	-6.87	43.32	-30.68	74.00	100	158	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE24000 Quad-Band Wi-Fi 7 Router	Date of Test	2023-09-06
Factor	DRH18-E	Temp. / Humidity	20°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-20MHz_TX_CH 6_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

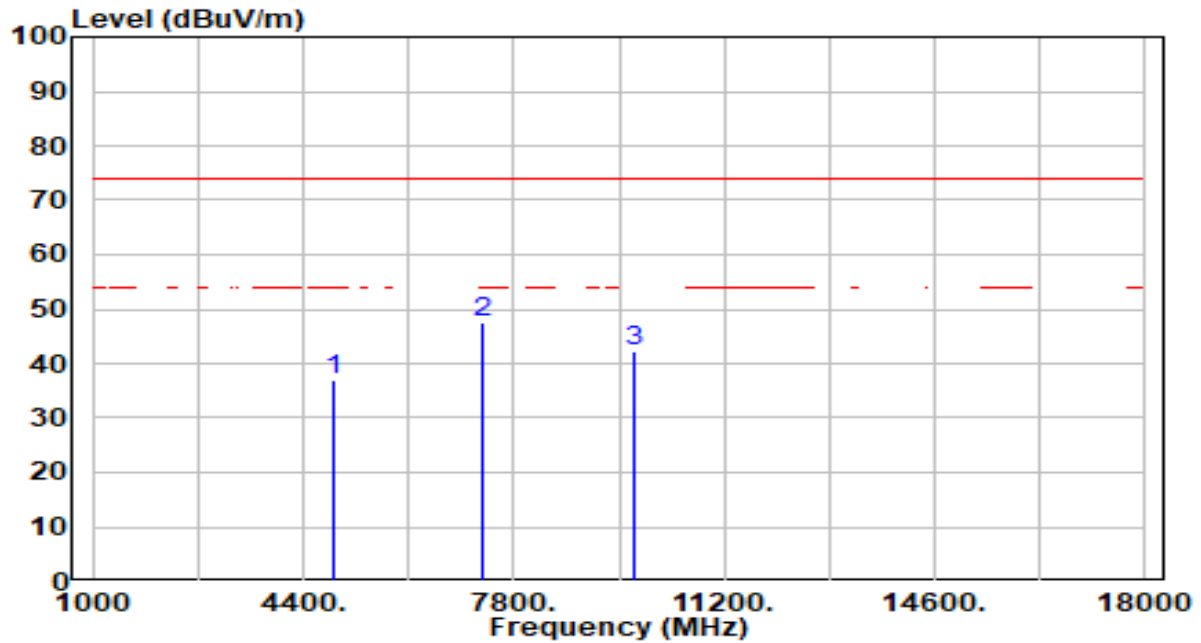


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	49.88	-13.00	36.88	-37.12	74.00	200	214	Peak
2	* 7311.000	54.95	-7.46	47.49	-26.51	74.00	200	354	Peak
3	9748.000	48.96	-6.87	42.09	-31.91	74.00	200	286	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE24000 Quad-Band Wi-Fi 7 Router	Date of Test	2023-09-06
Factor	DRH18-E	Temp. / Humidity	20°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-20MHz_TX_CH 11_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

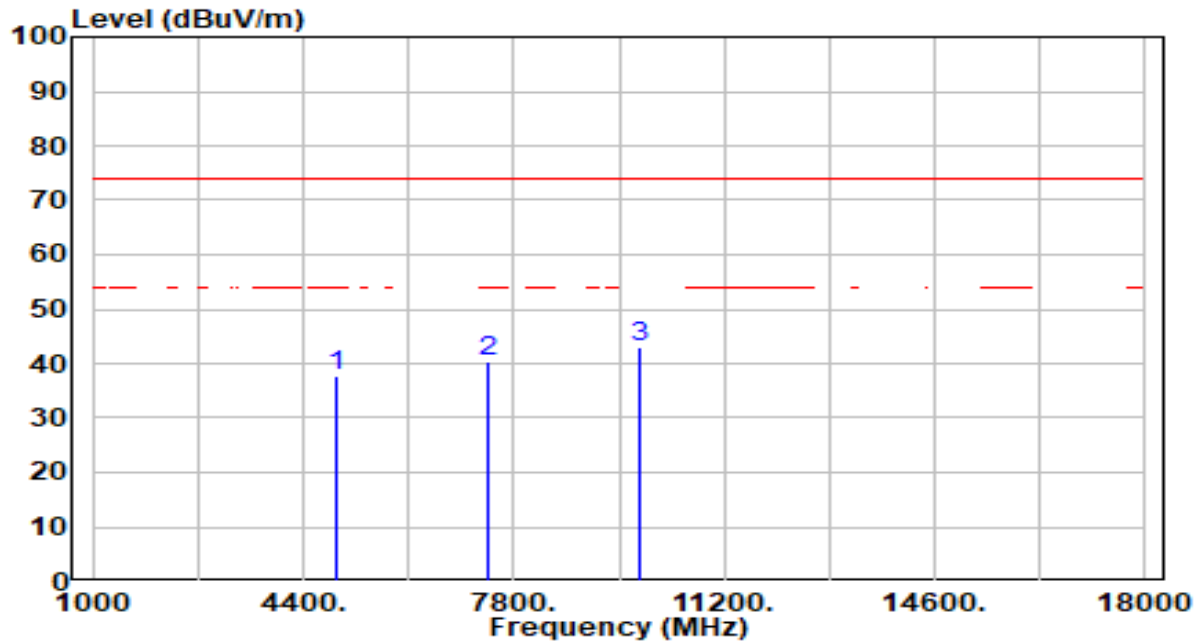


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	50.61	-12.86	37.75	-36.25	74.00	100	110	Peak
2	7386.000	47.70	-7.37	40.33	-33.67	74.00	100	333	Peak
3	* 9848.000	49.67	-6.75	42.92	-31.08	74.00	100	250	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE24000 Quad-Band Wi-Fi 7 Router	Date of Test	2023-09-06
Factor	DRH18-E	Temp. / Humidity	20°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-20MHz_TX_CH 11_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

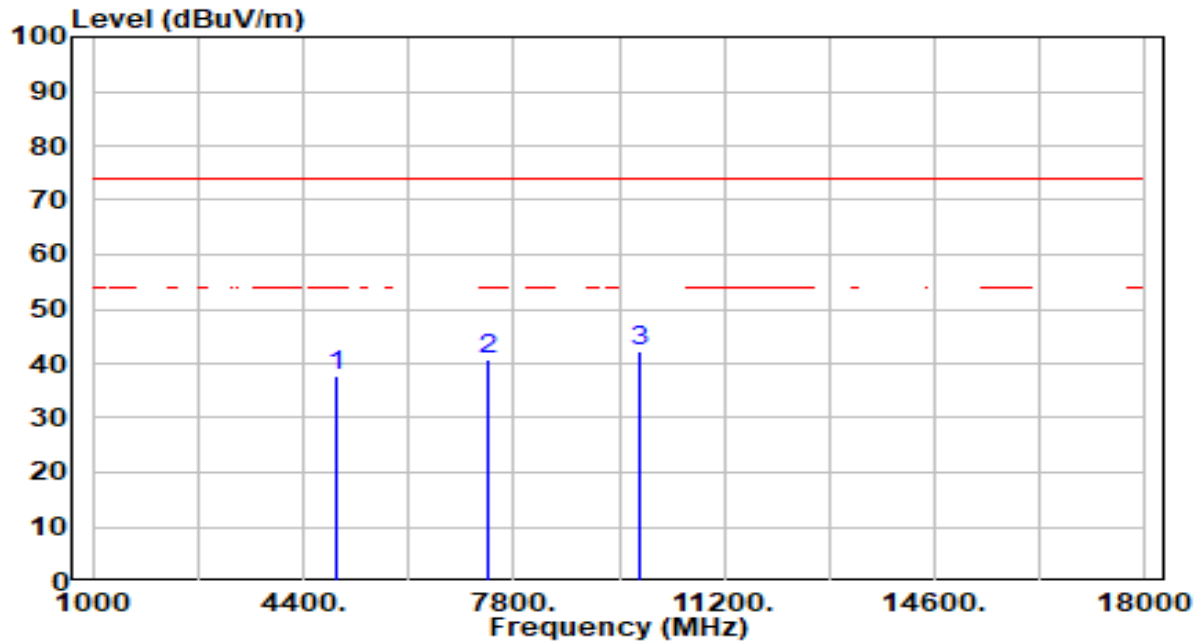


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	50.49	-12.86	37.62	-36.38	74.00	200	91	Peak
2	7386.000	48.24	-7.37	40.87	-33.13	74.00	200	1	Peak
3	* 9848.000	49.07	-6.75	42.32	-31.68	74.00	200	330	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE24000 Quad-Band Wi-Fi 7 Router	Date of Test	2023-09-06
Factor	DRH18-E	Temp. / Humidity	20°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-40MHz_TX_CH 3_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

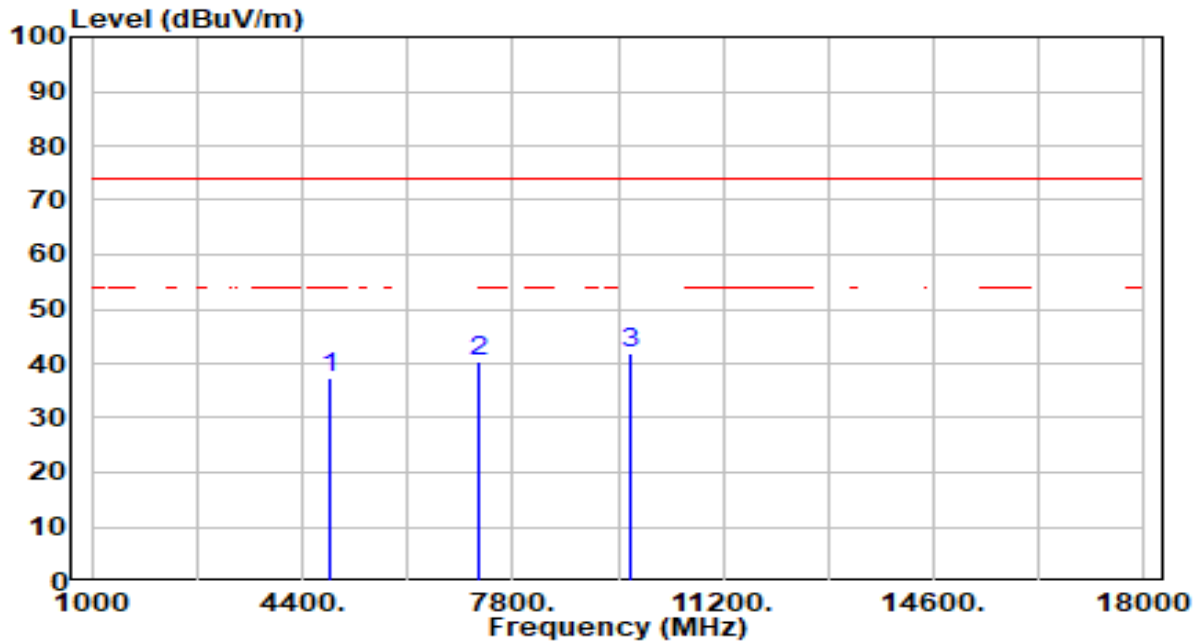


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4844.000	50.29	-13.09	37.20	-36.80	74.00	100	0	Peak
2	7266.000	47.89	-7.52	40.38	-33.62	74.00	100	335	Peak
3	* 9688.000	48.89	-6.94	41.95	-32.05	74.00	100	149	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE24000 Quad-Band Wi-Fi 7 Router	Date of Test	2023-09-06
Factor	DRH18-E	Temp. / Humidity	20°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-40MHz_TX_CH 3_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

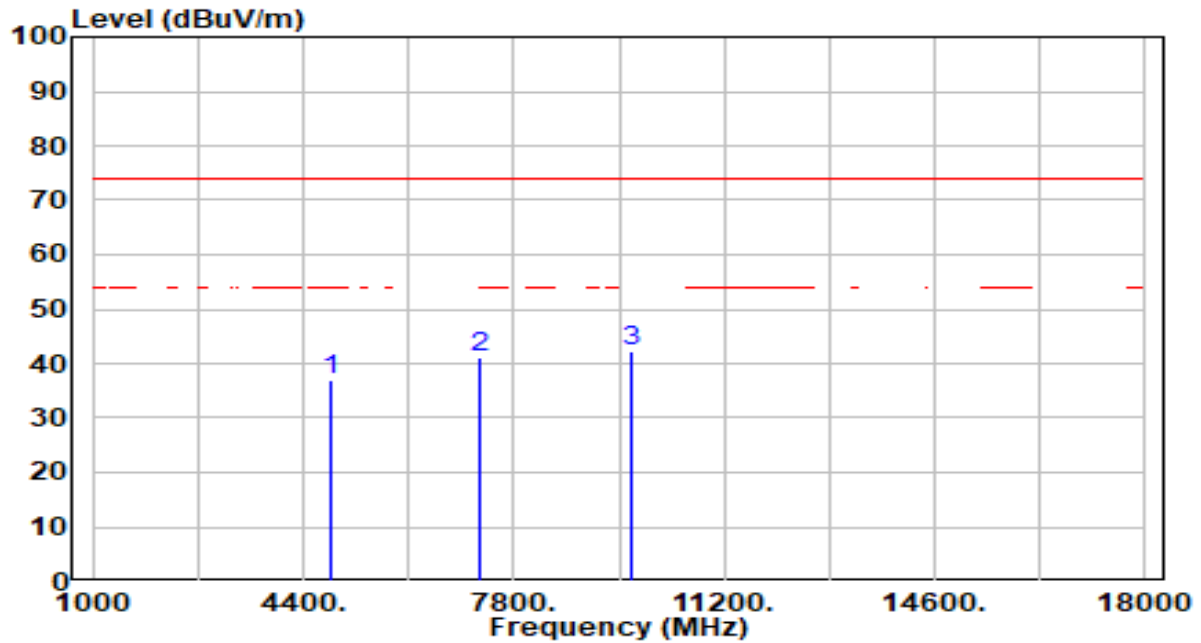


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4844.000	50.10	-13.09	37.01	-36.99	74.00	200	202	Peak
2	7266.000	48.48	-7.52	40.96	-33.04	74.00	200	107	Peak
3	* 9688.000	49.21	-6.94	42.26	-31.74	74.00	200	119	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE24000 Quad-Band Wi-Fi 7 Router	Date of Test	2023-09-06
Factor	DRH18-E	Temp. / Humidity	20°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-40MHz_TX_CH 6_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

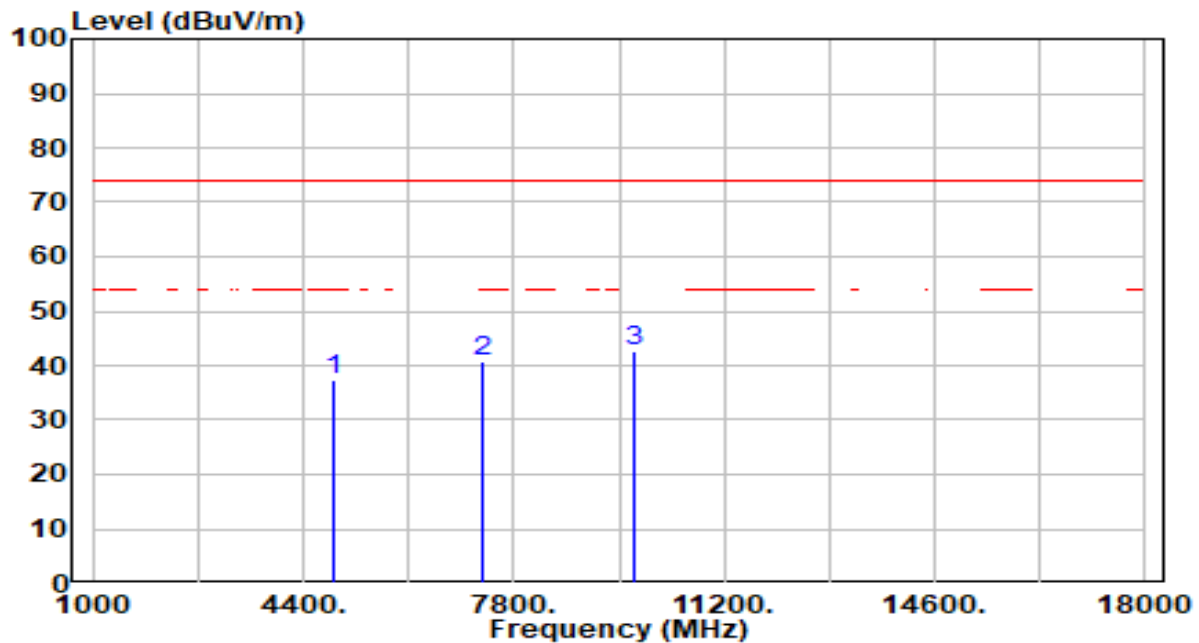


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	50.46	-13.00	37.46	-36.54	74.00	100	273	Peak
2	7311.000	48.40	-7.46	40.93	-33.07	74.00	100	178	Peak
3	* 9748.000	49.48	-6.87	42.61	-31.39	74.00	100	165	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE24000 Quad-Band Wi-Fi 7 Router	Date of Test	2023-09-06
Factor	DRH18-E	Temp. / Humidity	20°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-40MHz_TX_CH 6_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

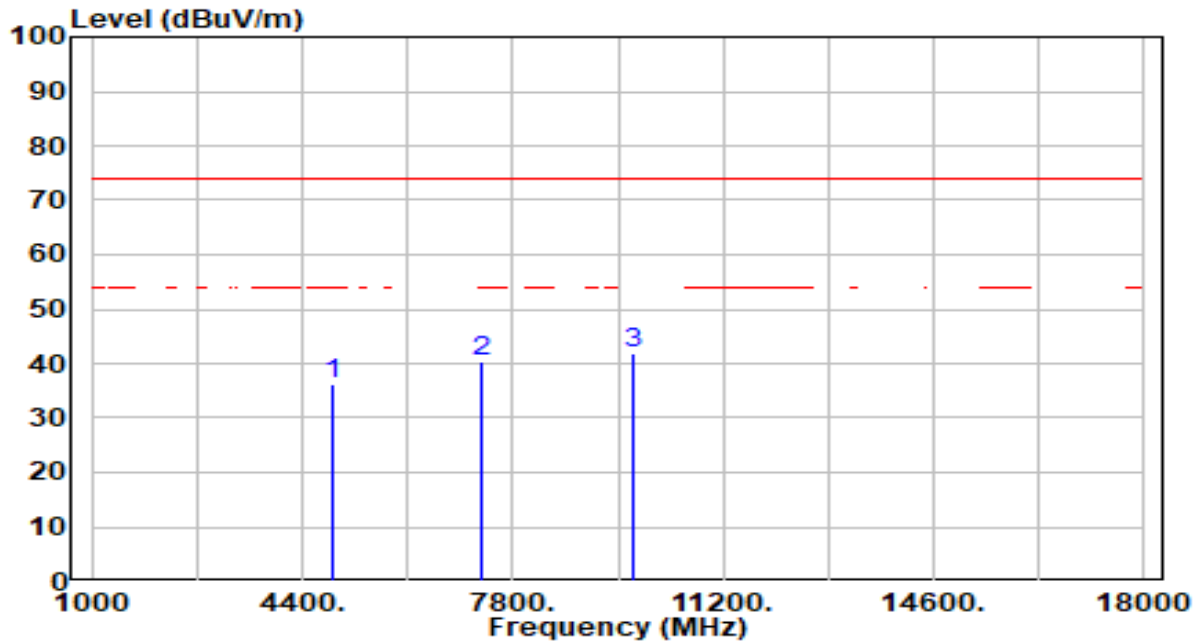


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	49.35	-13.00	36.35	-37.65	74.00	200	86	Peak
2	7311.000	47.73	-7.46	40.27	-33.73	74.00	200	360	Peak
3	* 9748.000	48.94	-6.87	42.07	-31.93	74.00	200	290	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE24000 Quad-Band Wi-Fi 7 Router	Date of Test	2023-09-06
Factor	DRH18-E	Temp. / Humidity	20°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-40MHz_TX_CH 9_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

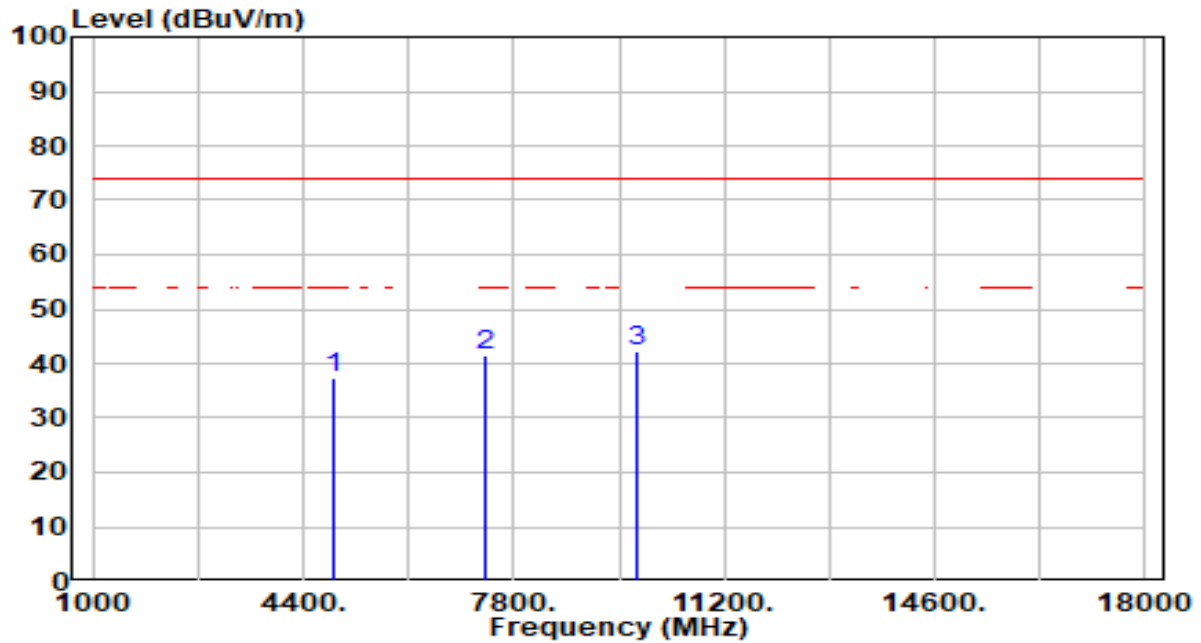


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4904.000	50.23	-12.92	37.31	-36.69	74.00	100	0	Peak
2	7356.000	48.75	-7.41	41.35	-32.65	74.00	100	186	Peak
3	* 9808.000	49.02	-6.80	42.22	-31.78	74.00	100	305	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE24000 Quad-Band Wi-Fi 7 Router	Date of Test	2023-09-06
Factor	DRH18-E	Temp. / Humidity	20°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-40MHz_TX_CH 9_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

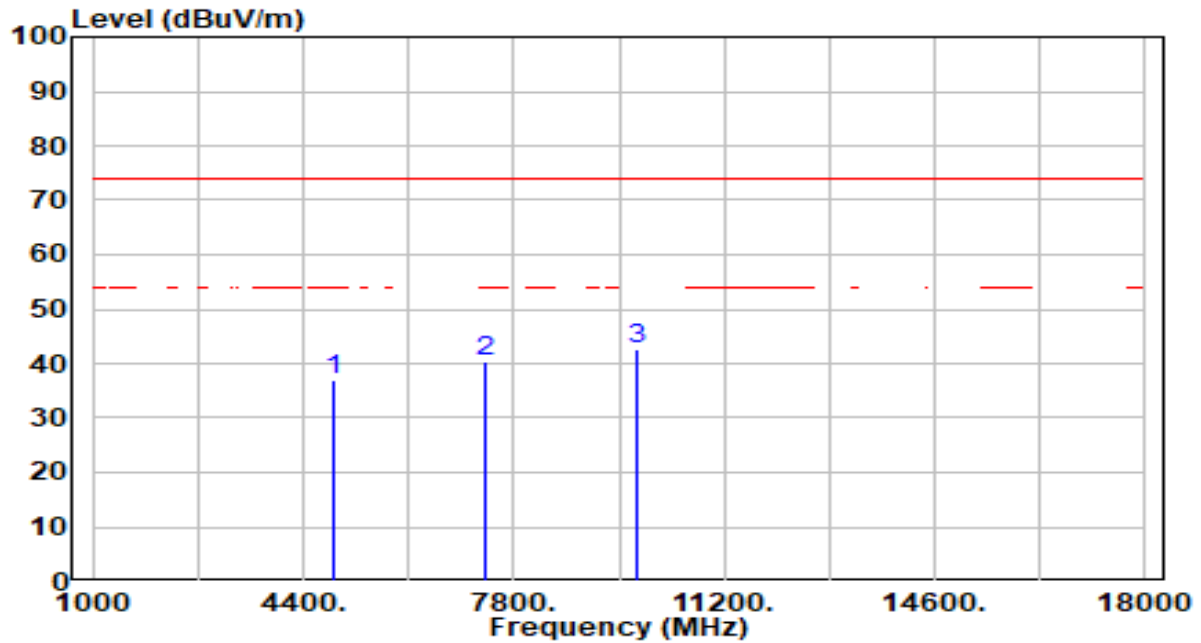


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4904.000	50.01	-12.92	37.09	-36.91	74.00	200	282	Peak
2	7356.000	47.80	-7.41	40.40	-33.60	74.00	200	186	Peak
3	* 9808.000	49.42	-6.80	42.62	-31.38	74.00	200	310	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE24000 Quad-Band Wi-Fi 7 Router	Date of Test	2023-09-06
Factor	DRH18-E	Temp. / Humidity	20°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-20MHz_TX_CH 1_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

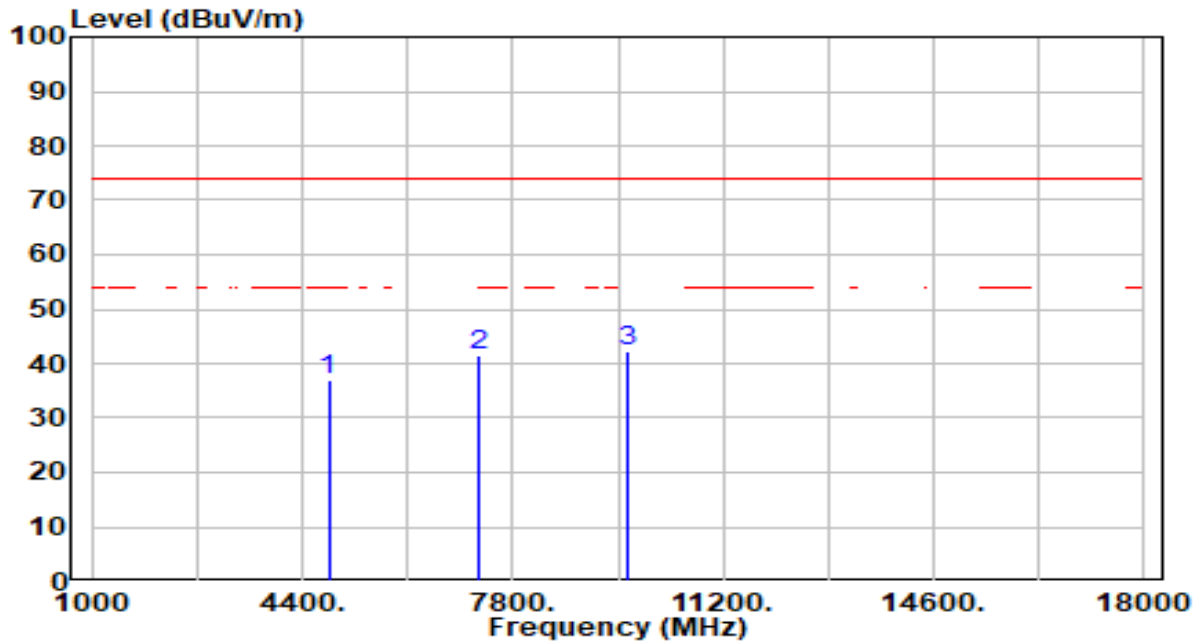


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	50.22	-13.15	37.08	-36.92	74.00	100	305	Peak
2	7236.000	48.99	-7.55	41.43	-32.57	74.00	100	158	Peak
3	* 9648.000	49.10	-6.99	42.12	-31.88	74.00	100	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE24000 Quad-Band Wi-Fi 7 Router	Date of Test	2023-09-06
Factor	DRH18-E	Temp. / Humidity	20°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-20MHz_TX_CH 1_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

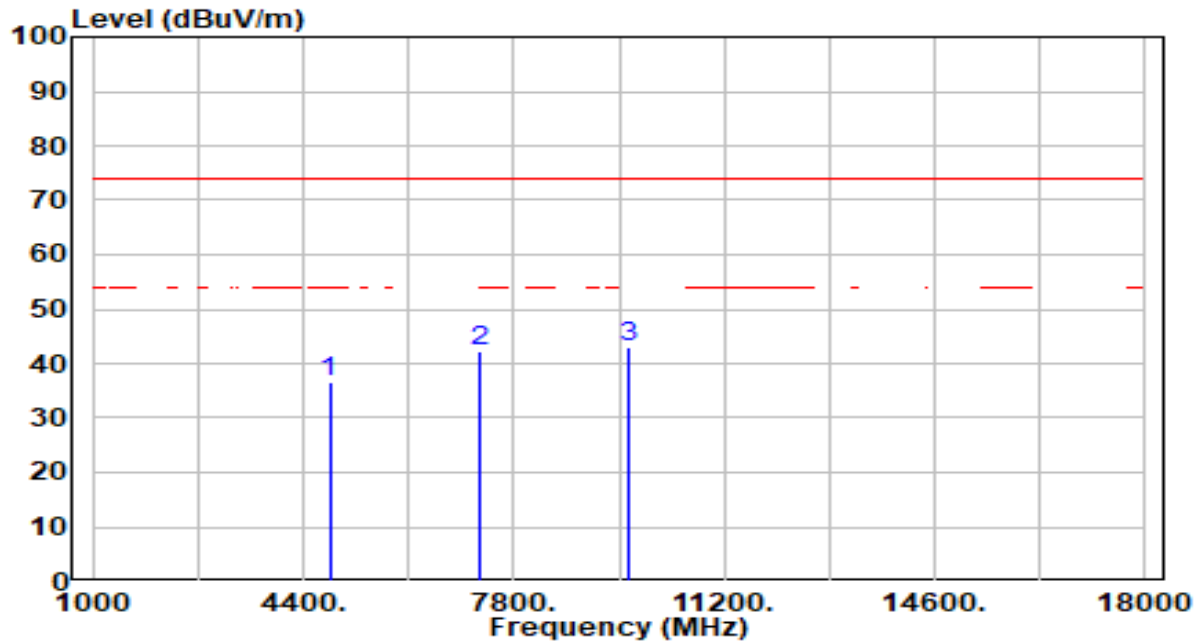


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	49.71	-13.15	36.57	-37.43	74.00	200	290	Peak
2	7236.000	49.91	-7.55	42.36	-31.64	74.00	200	306	Peak
3	* 9648.000	49.90	-6.99	42.91	-31.09	74.00	200	28	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE24000 Quad-Band Wi-Fi 7 Router	Date of Test	2023-09-06
Factor	DRH18-E	Temp. / Humidity	20°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-20MHz_TX_CH 6_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

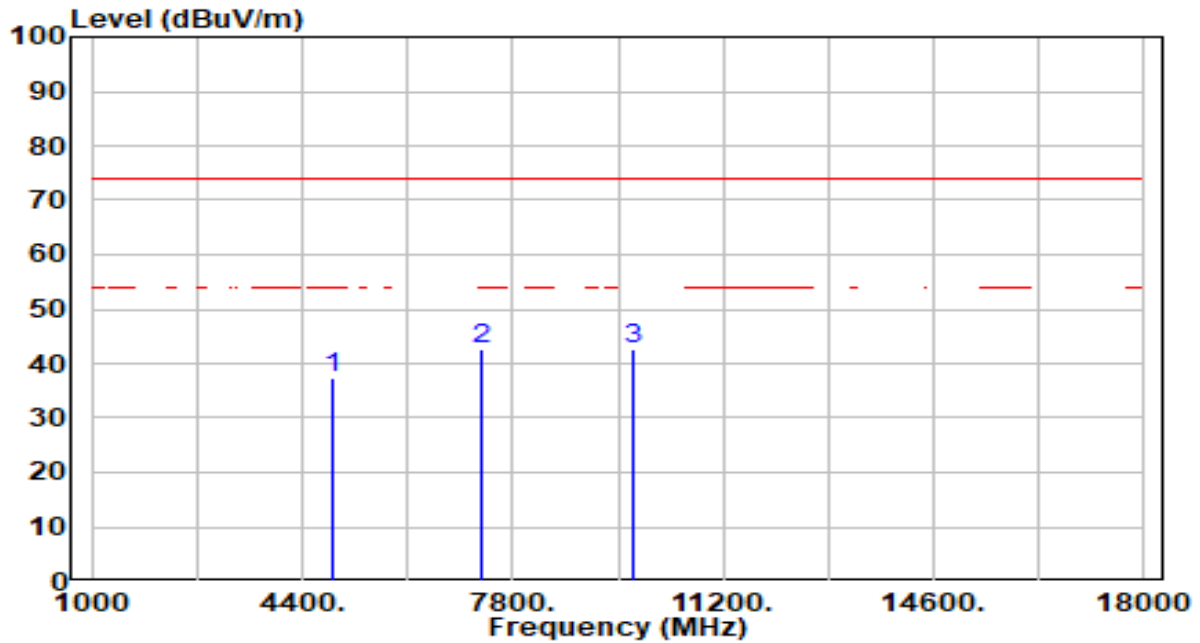


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	50.49	-13.00	37.49	-36.51	74.00	100	228	Peak
2	7311.000	50.22	-7.46	42.76	-31.24	74.00	100	308	Peak
3	* 9748.000	49.65	-6.87	42.78	-31.22	74.00	100	292	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE24000 Quad-Band Wi-Fi 7 Router	Date of Test	2023-09-06
Factor	DRH18-E	Temp. / Humidity	20°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-20MHz_TX_CH 6_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

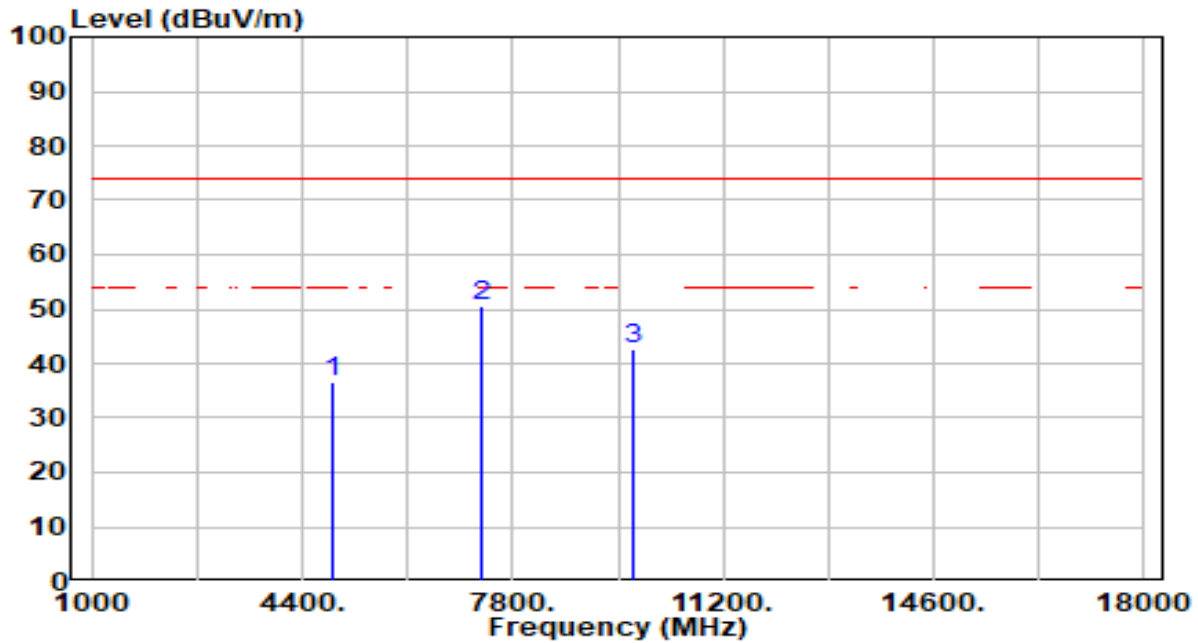


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	49.51	-13.00	36.51	-37.49	74.00	200	250	Peak
2	* 7311.000	57.98	-7.46	50.52	-23.48	74.00	200	349	Peak
3	9748.000	49.37	-6.87	42.50	-31.50	74.00	200	154	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE24000 Quad-Band Wi-Fi 7 Router	Date of Test	2023-09-06
Factor	DRH18-E	Temp. / Humidity	20°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-20MHz_TX_CH 11_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

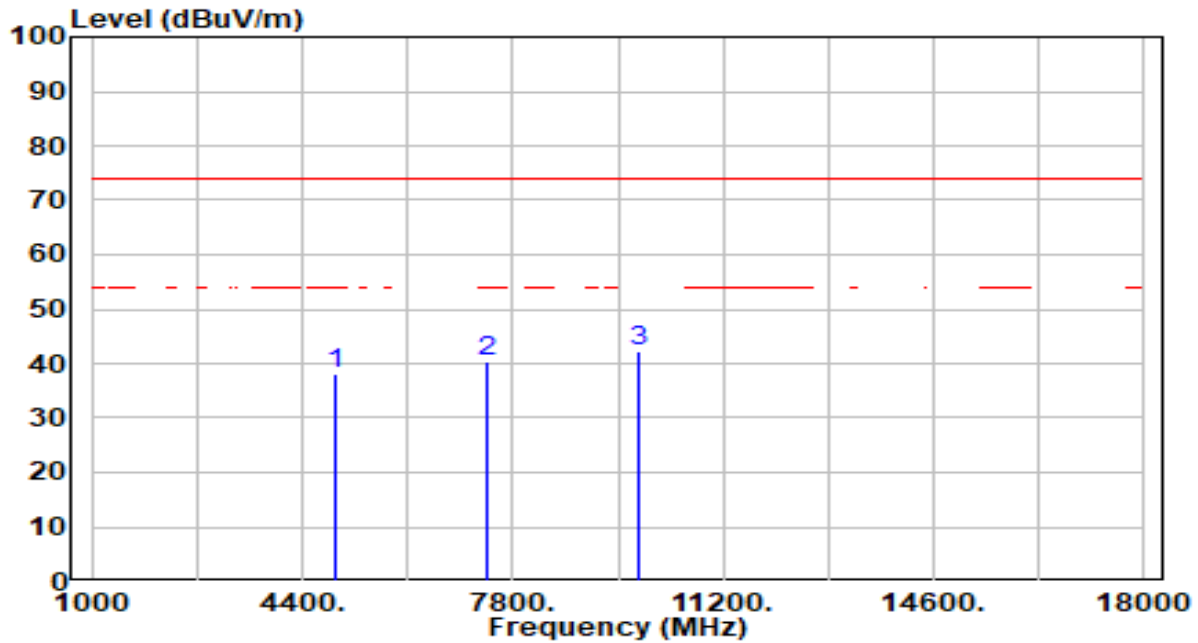


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	51.08	-12.86	38.22	-35.78	74.00	100	145	Peak
2	7386.000	47.59	-7.37	40.22	-33.78	74.00	100	296	Peak
3	* 9848.000	48.86	-6.75	42.12	-31.88	74.00	100	284	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE24000 Quad-Band Wi-Fi 7 Router	Date of Test	2023-09-06
Factor	DRH18-E	Temp. / Humidity	20°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-20MHz_TX_CH 11_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

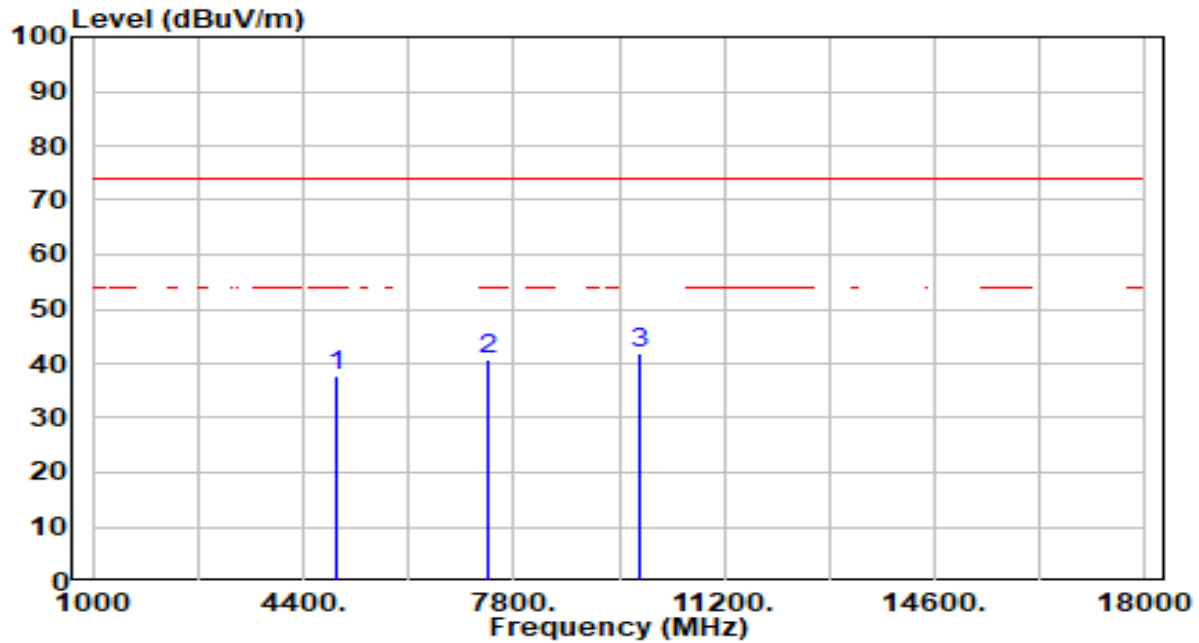


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	50.61	-12.86	37.75	-36.25	74.00	200	88	Peak
2	7386.000	47.99	-7.37	40.63	-33.37	74.00	200	40	Peak
3	* 9848.000	48.46	-6.75	41.71	-32.29	74.00	200	290	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE24000 Quad-Band Wi-Fi 7 Router	Date of Test	2023-09-06
Factor	DRH18-E	Temp. / Humidity	20°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-40MHz_TX_CH 3_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

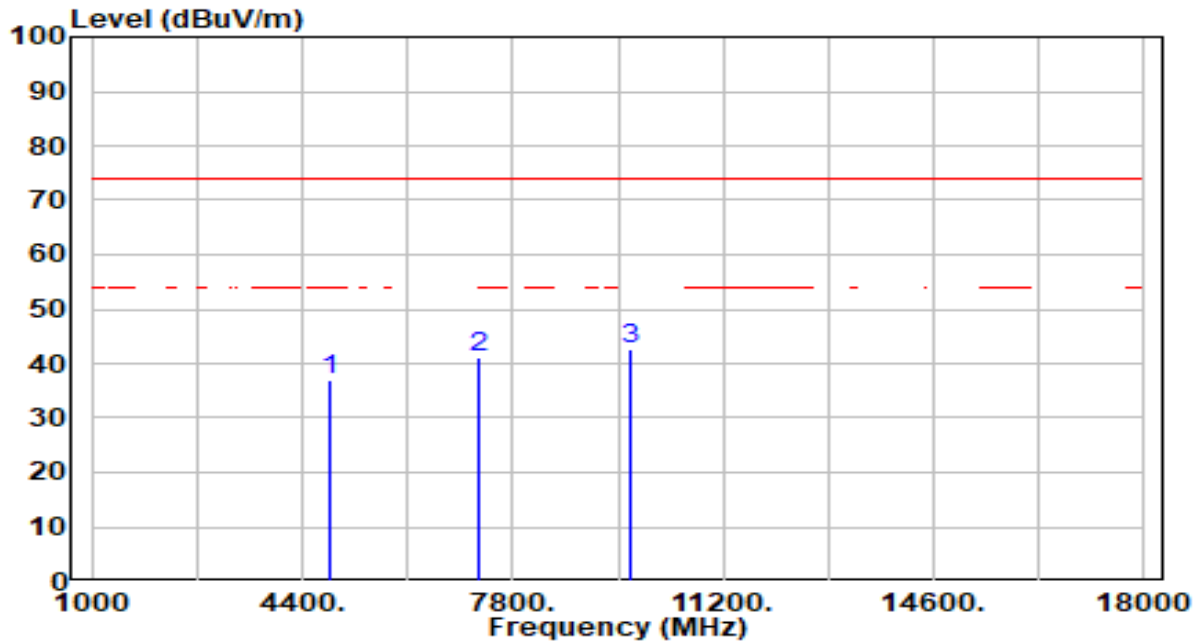


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4844.000	50.10	-13.09	37.01	-36.99	74.00	100	118	Peak
2	7266.000	48.57	-7.52	41.05	-32.95	74.00	100	281	Peak
3	* 9688.000	49.45	-6.94	42.50	-31.50	74.00	100	74	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE24000 Quad-Band Wi-Fi 7 Router	Date of Test	2023-09-06
Factor	DRH18-E	Temp. / Humidity	20°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-40MHz_TX_CH 3_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

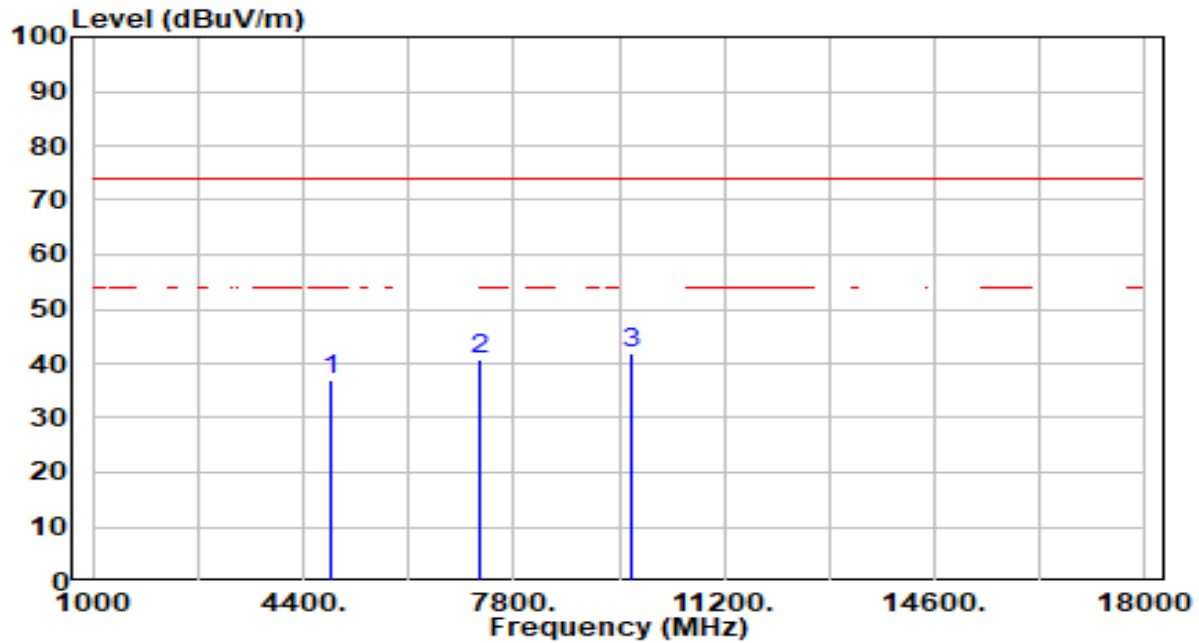


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4844.000	50.15	-13.09	37.06	-36.94	74.00	200	187	Peak
2	7266.000	48.42	-7.52	40.91	-33.09	74.00	200	360	Peak
3	* 9688.000	48.91	-6.94	41.97	-32.03	74.00	200	75	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE24000 Quad-Band Wi-Fi 7 Router	Date of Test	2023-09-06
Factor	DRH18-E	Temp. / Humidity	20°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-40MHz_TX_CH 6_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

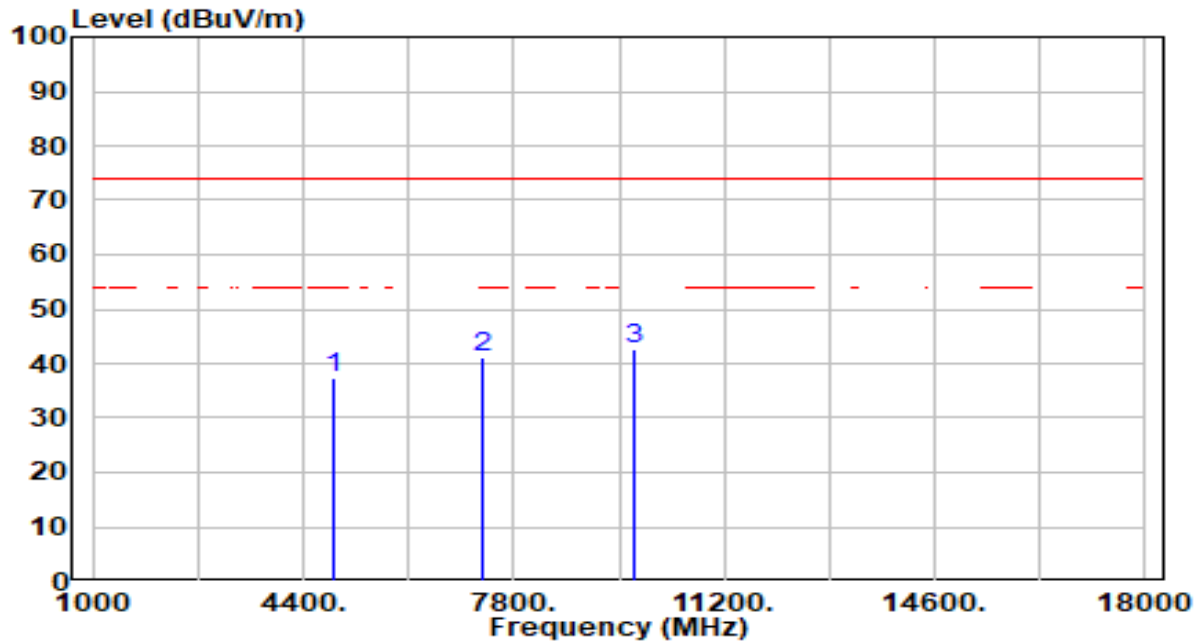


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	50.32	-13.00	37.31	-36.69	74.00	100	209	Peak
2	7311.000	48.61	-7.46	41.15	-32.85	74.00	100	225	Peak
3	* 9748.000	49.66	-6.87	42.79	-31.21	74.00	100	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE24000 Quad-Band Wi-Fi 7 Router	Date of Test	2023-09-06
Factor	DRH18-E	Temp. / Humidity	20°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-40MHz_TX_CH 6_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

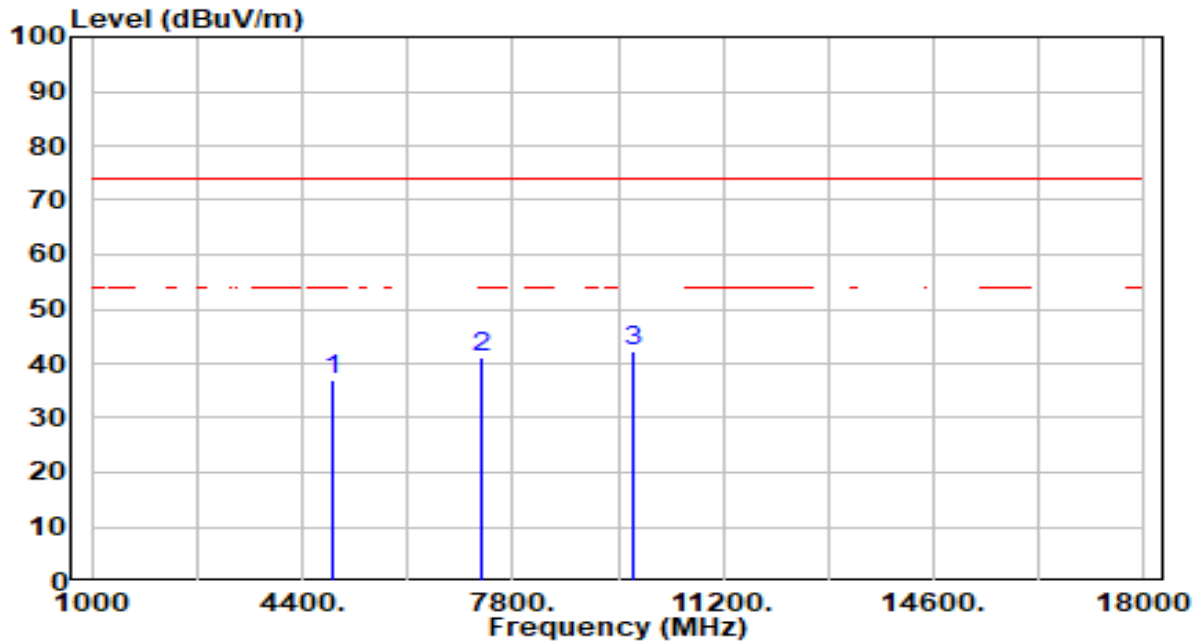


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	49.97	-13.00	36.97	-37.03	74.00	200	198	Peak
2	7311.000	48.67	-7.46	41.21	-32.79	74.00	200	162	Peak
3	* 9748.000	48.97	-6.87	42.10	-31.90	74.00	200	107	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE24000 Quad-Band Wi-Fi 7 Router	Date of Test	2023-09-06
Factor	DRH18-E	Temp. / Humidity	20°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-40MHz_TX_CH 9_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

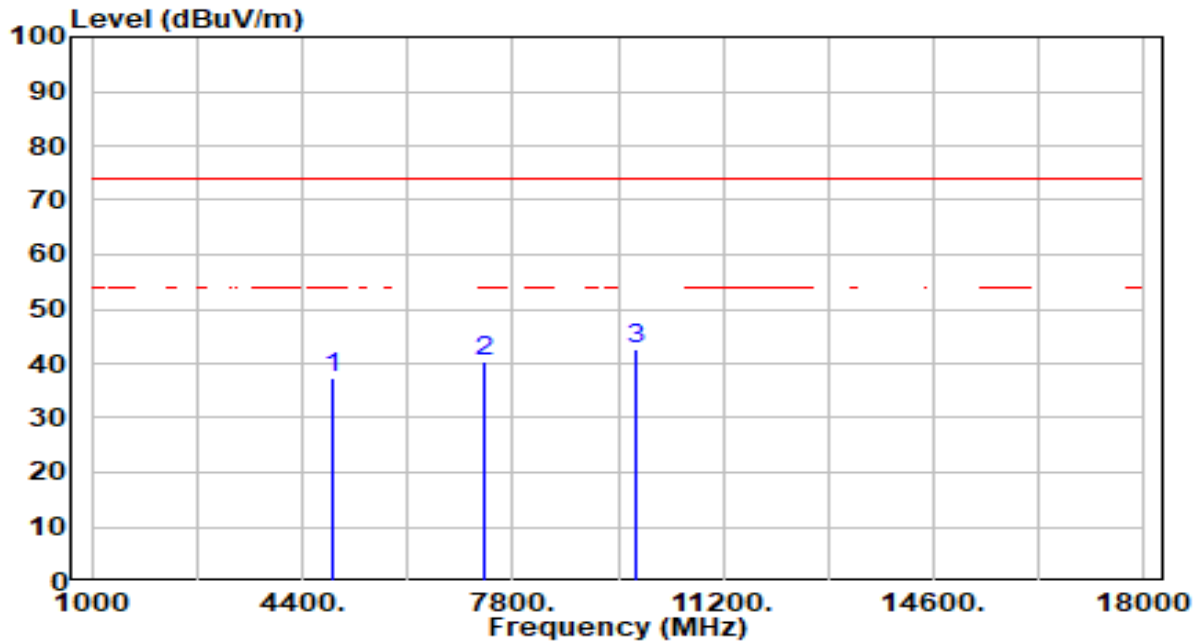


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4904.000	50.27	-12.92	37.35	-36.65	74.00	100	70	Peak
2	7356.000	47.91	-7.41	40.50	-33.50	74.00	100	1	Peak
3	* 9808.000	49.27	-6.80	42.48	-31.52	74.00	100	213	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE24000 Quad-Band Wi-Fi 7 Router	Date of Test	2023-09-06
Factor	DRH18-E	Temp. / Humidity	20°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-40MHz_TX_CH 9_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

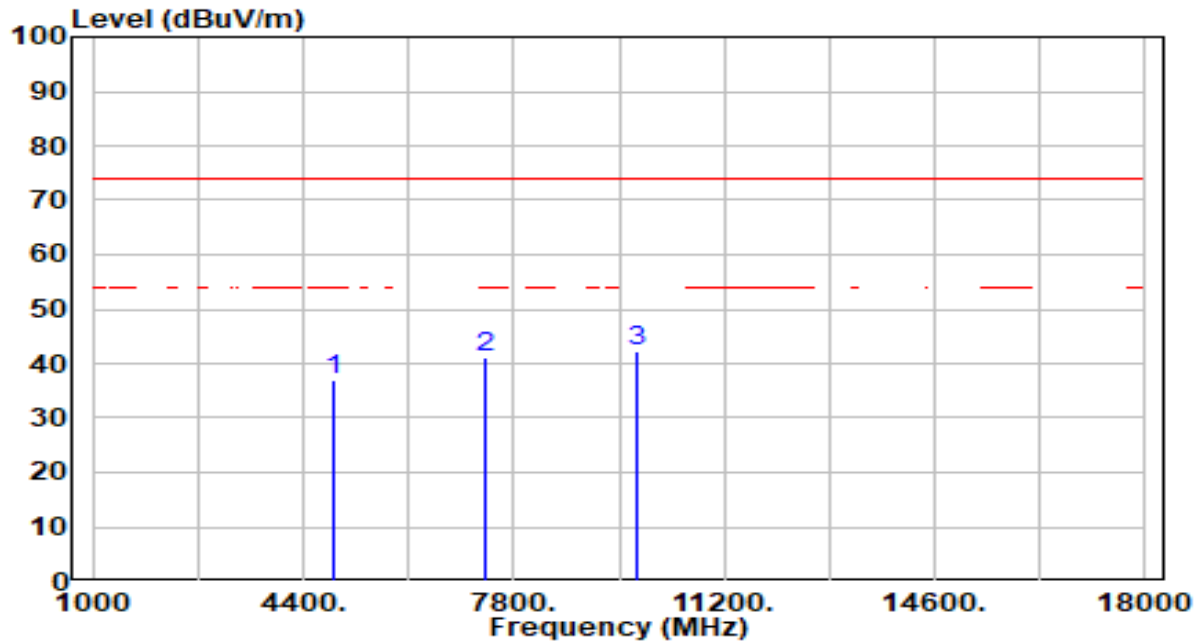

No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4904.000	49.94	-12.92	37.02	-36.98	74.00	200	198	Peak
2	7356.000	48.39	-7.41	40.99	-33.01	74.00	200	261	Peak
3	* 9808.000	49.10	-6.80	42.30	-31.70	74.00	200	130	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

7.7. Radiated Restricted Band Edge Measurement

7.7.1. Test Limit

For 15.205 requirement:

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a) of FCC part 15, must also comply with the radiated emission limits specified in Section 15.209(a).

Frequency (MHz)	Frequency (MHz)	Frequency (MHz)	Frequency (GHz)
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41	--	--	--

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209 Limits		
Frequency [MHz]	Field Strength [uV/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

7.7.2.Test Procedure Used

ANSI C63.10-2013 Section 6.3 (General Requirements)

ANSI C63.10-2013 Section 6.6 (Standard test method above 1GHz)

7.7.3.Test Setting

Peak Field Strength Measurements


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

Average Measurements above 1GHz (Method VB)

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW; If the EUT is configured to transmit with duty cycle $\geq 98\%$, set VBW = 10 Hz.


If the EUT duty cycle is $< 98\%$, set VBW $\geq 1/T$. T is the minimum transmission duration.

4. Detector = Peak
5. Sweep time = auto
6. Trace mode = max hold
7. Trace was allowed to stabilize

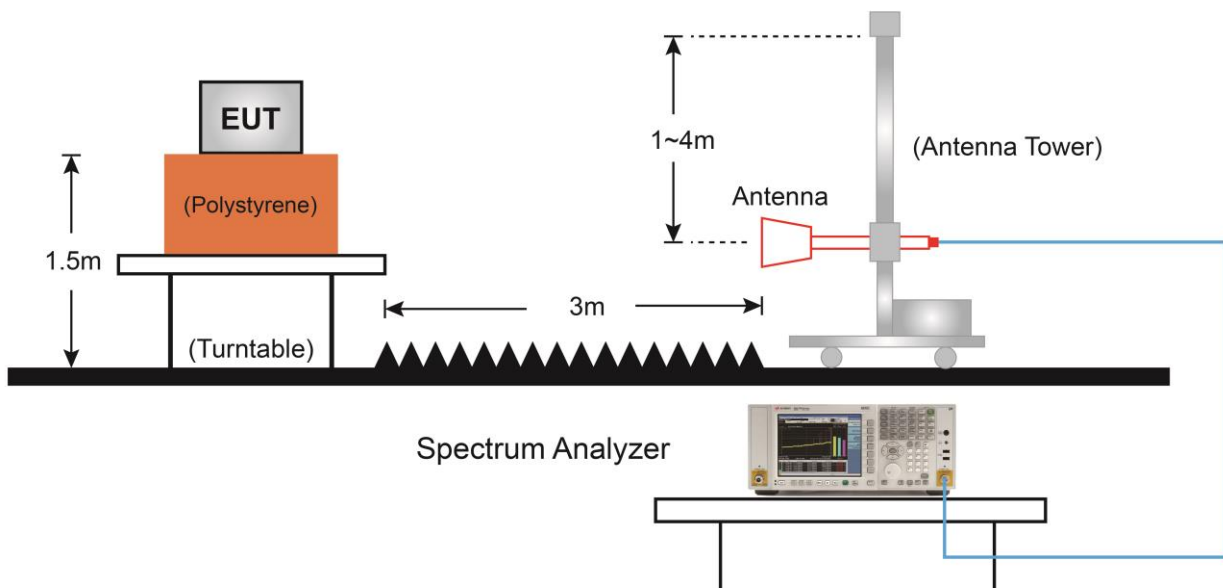7.7.4.Test Setup

7.7.5. Test Result

EUT	BE24000 Quad-Band Wi-Fi 7 Router	Date of Test	2023-09-06
Factor	DRH18-E	Temp. / Humidity	20°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11b_TX_CH 1_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

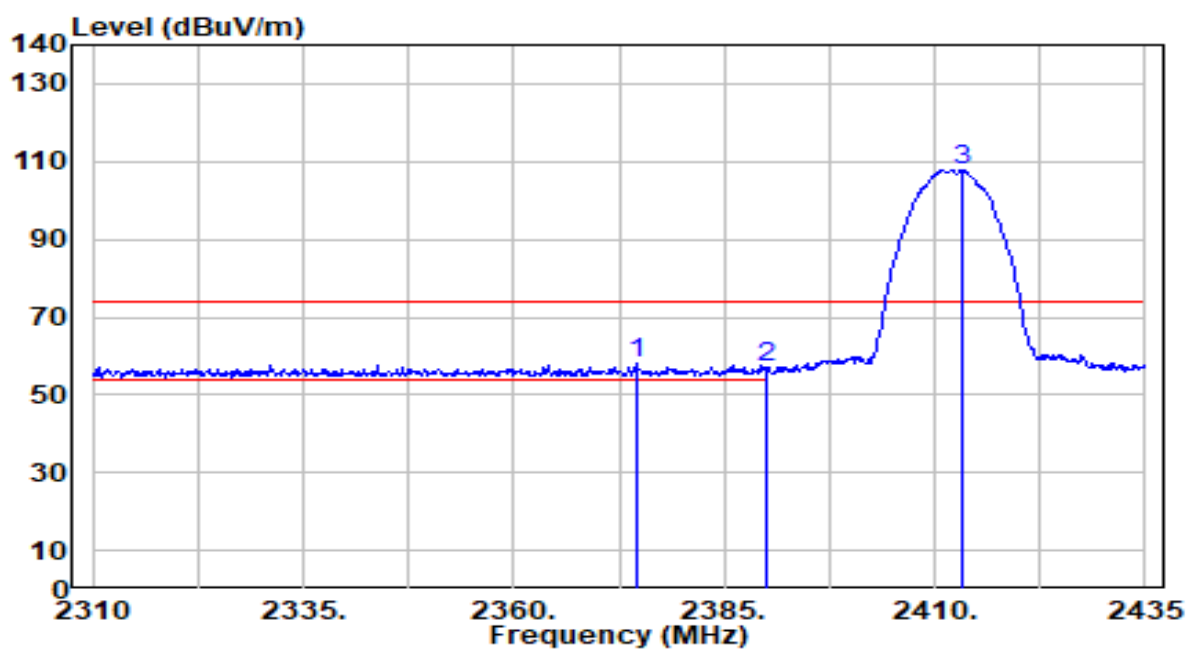


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2374.500	27.90	30.14	58.04	-15.96	74.00	226	360	Peak
2		2390.000	26.95	30.18	57.13	-16.87	74.00	226	360	Peak
3		2413.250	77.52	30.23	107.75	N/A	N/A	226	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE24000 Quad-Band Wi-Fi 7 Router	Date of Test	2023-09-06
Factor	DRH18-E	Temp. / Humidity	20°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11b_TX_CH 1_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

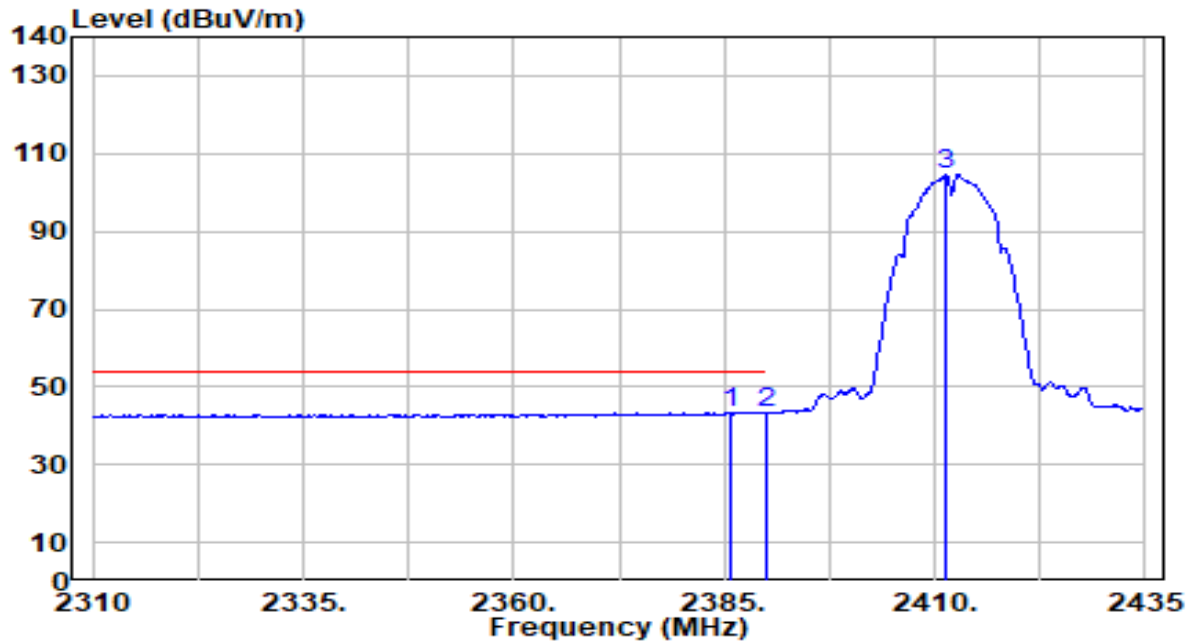


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2385.750	13.29	30.17	43.46	-10.54	54.00	226	360	Average
2		2390.000	13.26	30.18	43.44	-10.56	54.00	226	360	Average
3		2411.250	74.25	30.22	104.47	N/A	N/A	226	360	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE24000 Quad-Band Wi-Fi 7 Router	Date of Test	2023-09-06
Factor	DRH18-E	Temp. / Humidity	20°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11b_TX_CH 1_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

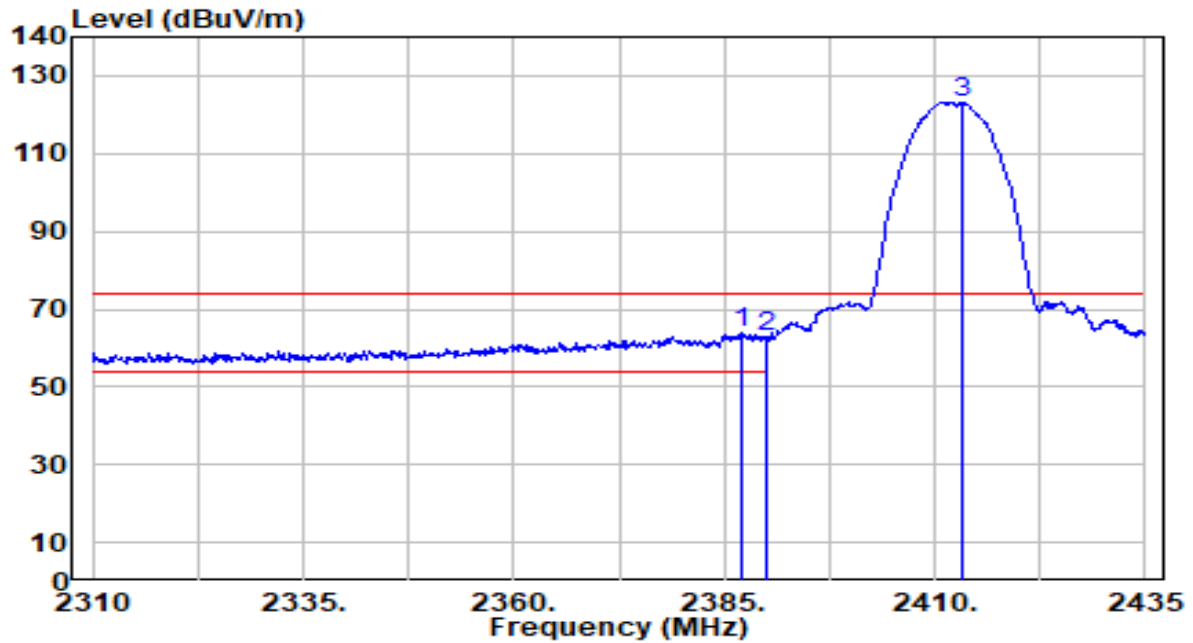


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2387.000	33.54	30.17	63.72	-10.28	74.00	231	360	Peak
2		2390.000	32.71	30.18	62.89	-11.11	74.00	231	360	Peak
3		2413.250	92.98	30.23	123.20	N/A	N/A	231	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE24000 Quad-Band Wi-Fi 7 Router	Date of Test	2023-09-06
Factor	DRH18-E	Temp. / Humidity	20°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11b_TX_CH 1_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

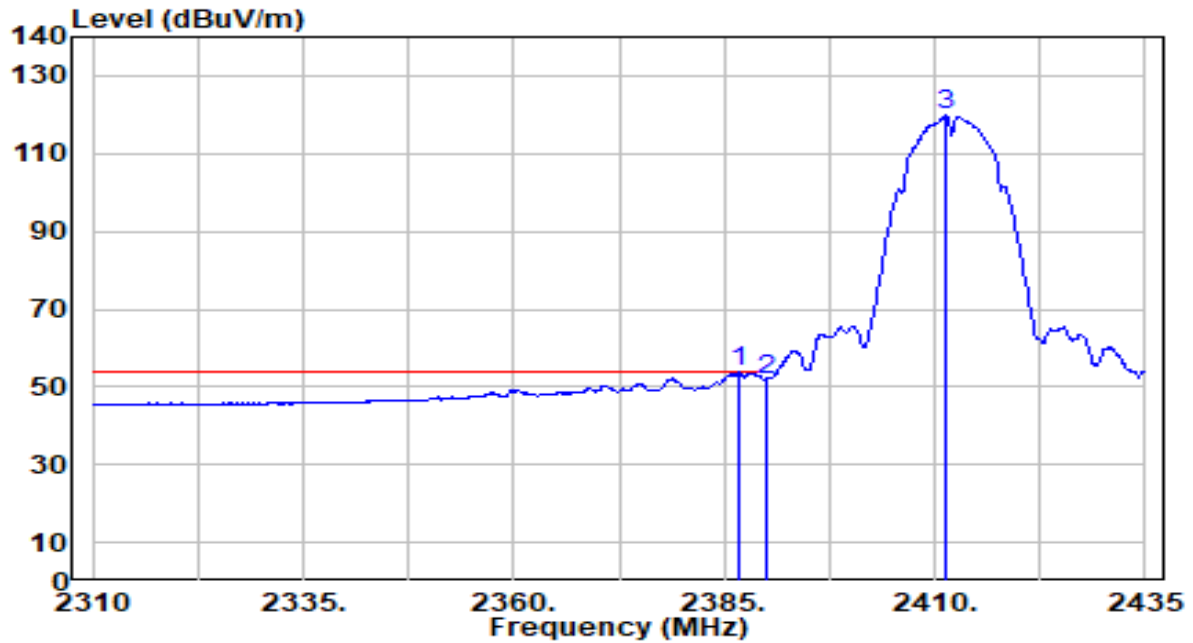


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2386.625	23.72	30.17	53.89	-0.11	54.00	231	360	Average
2		2390.000	21.79	30.18	51.97	-2.03	54.00	231	360	Average
3		2411.375	89.49	30.22	119.71	N/A	N/A	231	360	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE24000 Quad-Band Wi-Fi 7 Router	Date of Test	2023-09-06
Factor	DRH18-E	Temp. / Humidity	20°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11b_TX_CH 6_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

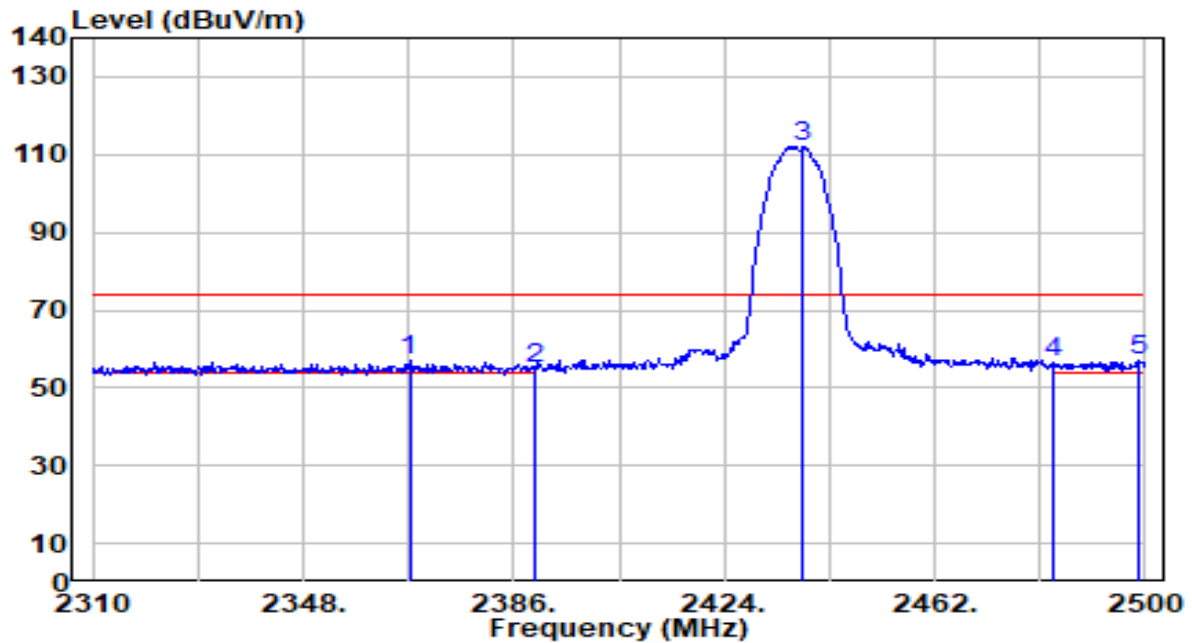


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2367.190	26.92	30.12	57.03	-16.97	74.00	200	3	Peak
2		2390.000	24.80	30.18	54.98	-19.02	74.00	200	3	Peak
3		2438.250	81.84	30.26	112.10	N/A	N/A	200	3	Peak
4		2483.500	26.28	30.32	56.60	-17.40	74.00	200	3	Peak
5		2498.670	26.59	30.34	56.93	-17.07	74.00	200	3	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE24000 Quad-Band Wi-Fi 7 Router	Date of Test	2023-09-06
Factor	DRH18-E	Temp. / Humidity	20°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11b_TX_CH 6_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

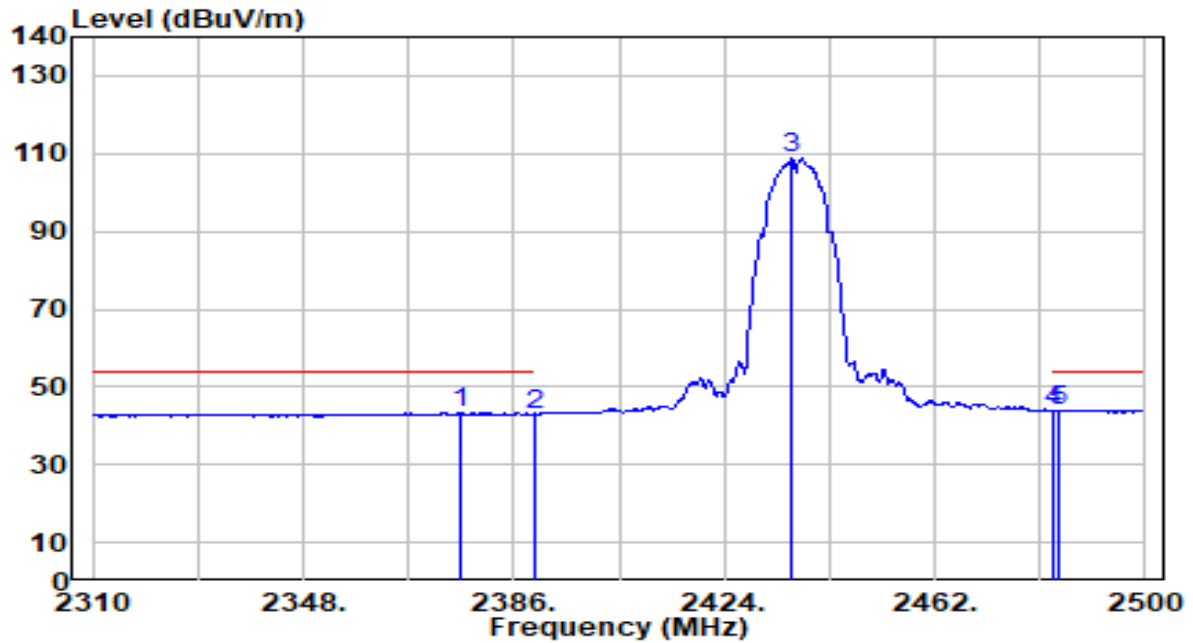


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2376.500	13.22	30.14	43.37	-10.63	54.00	200	3	Average
2	2390.000	12.83	30.18	43.01	-10.99	54.00	200	3	Average
3	2436.160	78.43	30.26	108.69	N/A	N/A	200	3	Average
4	2483.500	13.66	30.32	43.98	-10.02	54.00	200	3	Average
5	* 2484.230	13.73	30.32	44.05	-9.95	54.00	200	3	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE24000 Quad-Band Wi-Fi 7 Router	Date of Test	2023-09-06
Factor	DRH18-E	Temp. / Humidity	20°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11b_TX_CH 6_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

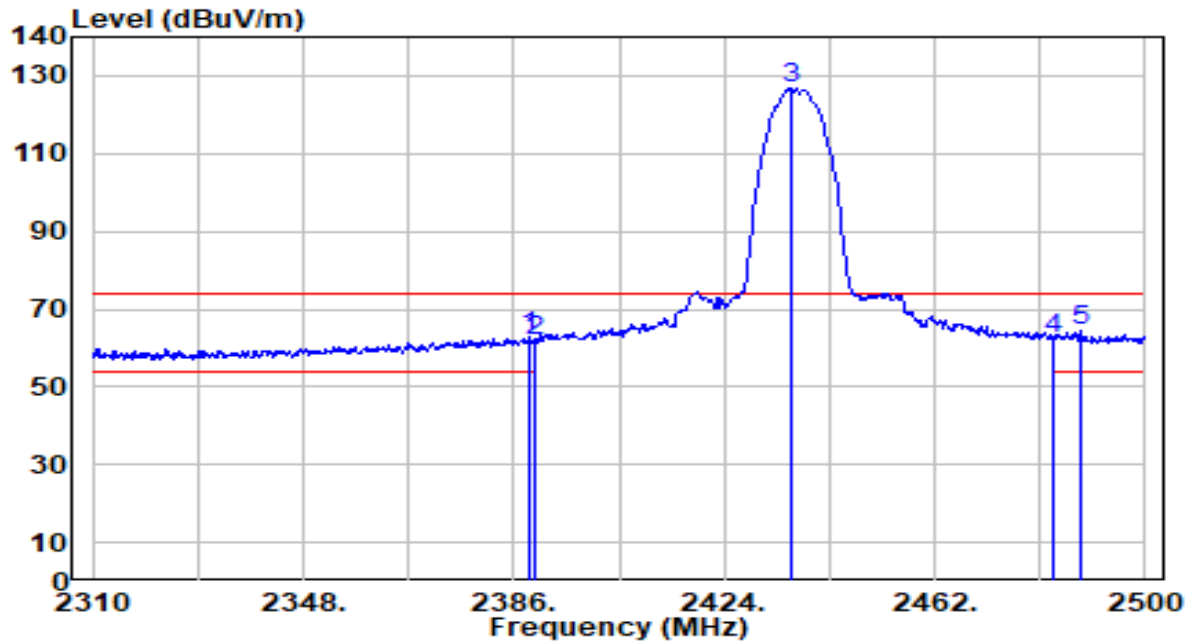


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2388.850	32.94	30.18	63.11	-10.89	74.00	239	0	Peak
2	2390.000	31.77	30.18	61.95	-12.05	74.00	239	0	Peak
3	2435.970	96.43	30.26	126.68	N/A	N/A	239	0	Peak
4	2483.500	32.06	30.32	62.38	-11.62	74.00	239	0	Peak
5	* 2488.220	34.06	30.32	64.39	-9.61	74.00	239	0	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE24000 Quad-Band Wi-Fi 7 Router	Date of Test	2023-09-06
Factor	DRH18-E	Temp. / Humidity	20°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11b_TX_CH 6_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

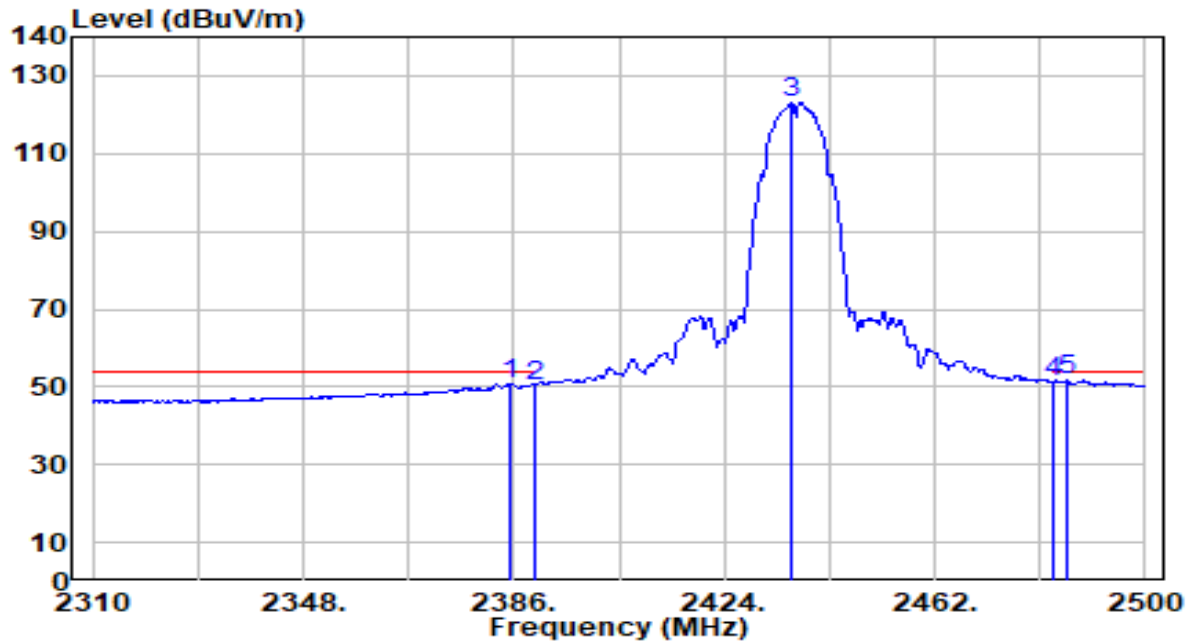


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2385.240	20.78	30.17	50.95	-3.05	54.00	239	0	Average
2	2390.000	20.14	30.18	50.32	-3.68	54.00	239	0	Average
3	2436.160	92.87	30.26	123.13	N/A	N/A	239	0	Average
4	2483.500	21.00	30.32	51.32	-2.68	54.00	239	0	Average
5	* 2486.130	21.68	30.32	52.00	-2.00	54.00	239	0	Average

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE24000 Quad-Band Wi-Fi 7 Router	Date of Test	2023-09-06
Factor	DRH18-E	Temp. / Humidity	20°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11b_TX_CH 11_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

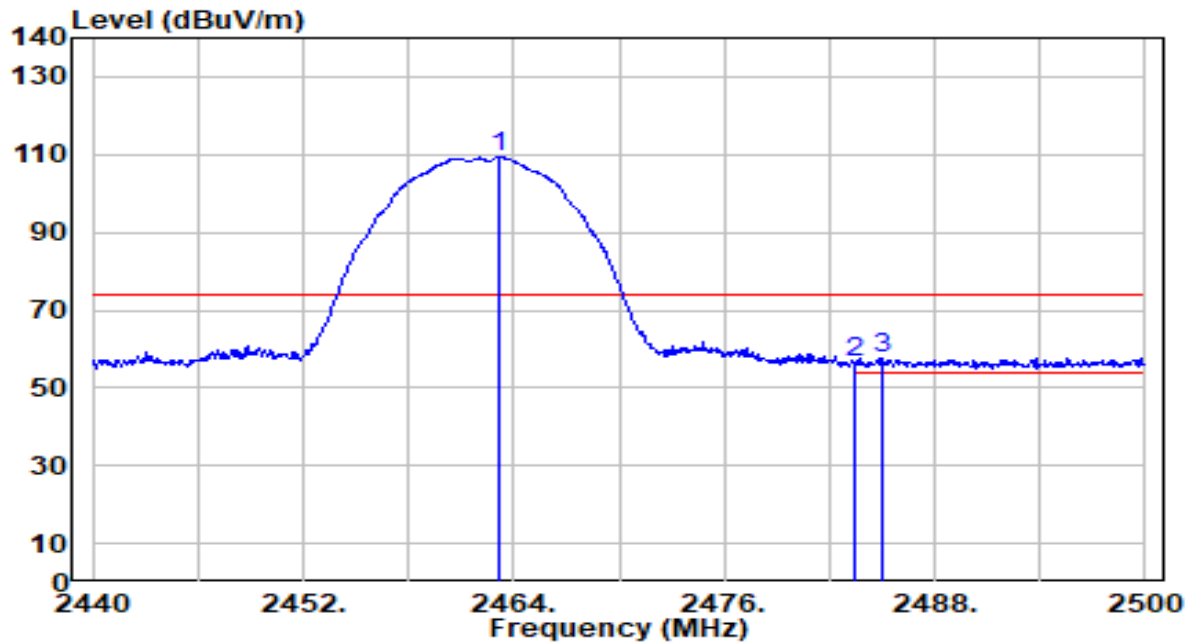


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2463.220	79.03	30.29	109.32	N/A	N/A	200	2	Peak
2	2483.500	26.25	30.32	56.56	-17.44	74.00	200	2	Peak
3	* 2485.060	27.48	30.32	57.80	-16.20	74.00	200	2	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE24000 Quad-Band Wi-Fi 7 Router	Date of Test	2023-09-06
Factor	DRH18-E	Temp. / Humidity	20°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11b_TX_CH 11_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

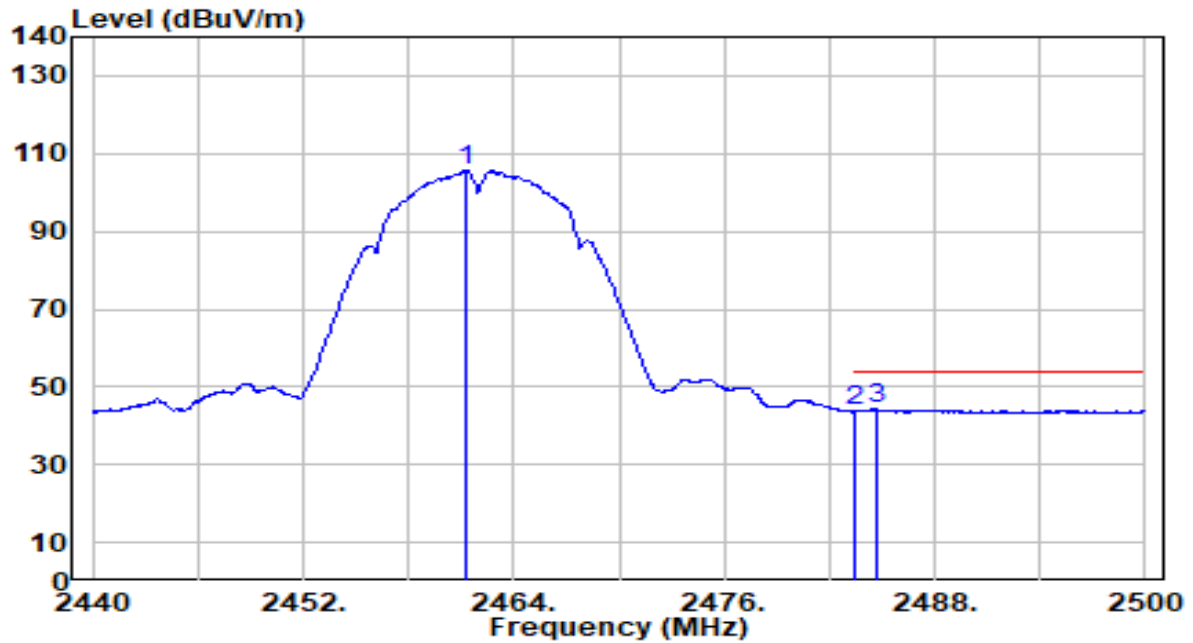


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2461.240	75.28	30.29	105.56	N/A	N/A	200	2	Average
2	2483.500	13.31	30.32	43.63	-10.37	54.00	200	2	Average
3	* 2484.760	13.92	30.32	44.24	-9.76	54.00	200	2	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE24000 Quad-Band Wi-Fi 7 Router	Date of Test	2023-09-06
Factor	DRH18-E	Temp. / Humidity	20°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11b_TX_CH 11_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

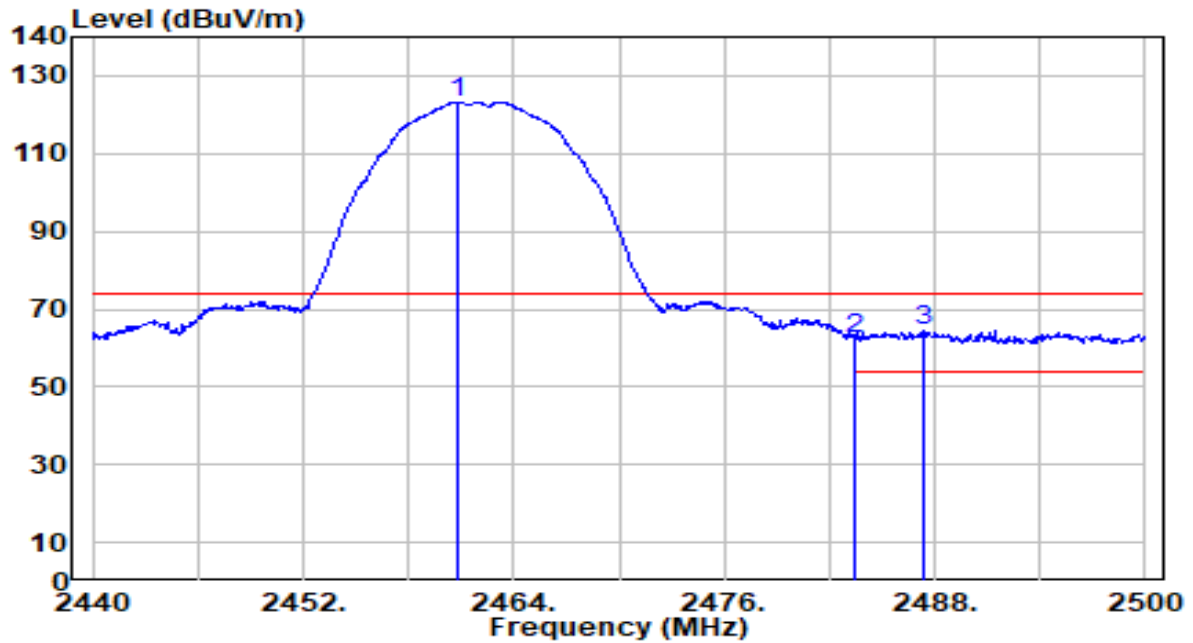


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2460.820	92.97	30.29	123.25	N/A	N/A	249	360	Peak
2	2483.500	31.92	30.32	62.24	-11.76	74.00	249	360	Peak
3	* 2487.340	34.02	30.32	64.34	-9.66	74.00	249	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE24000 Quad-Band Wi-Fi 7 Router	Date of Test	2023-09-06
Factor	DRH18-E	Temp. / Humidity	20°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11b_TX_CH 11_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

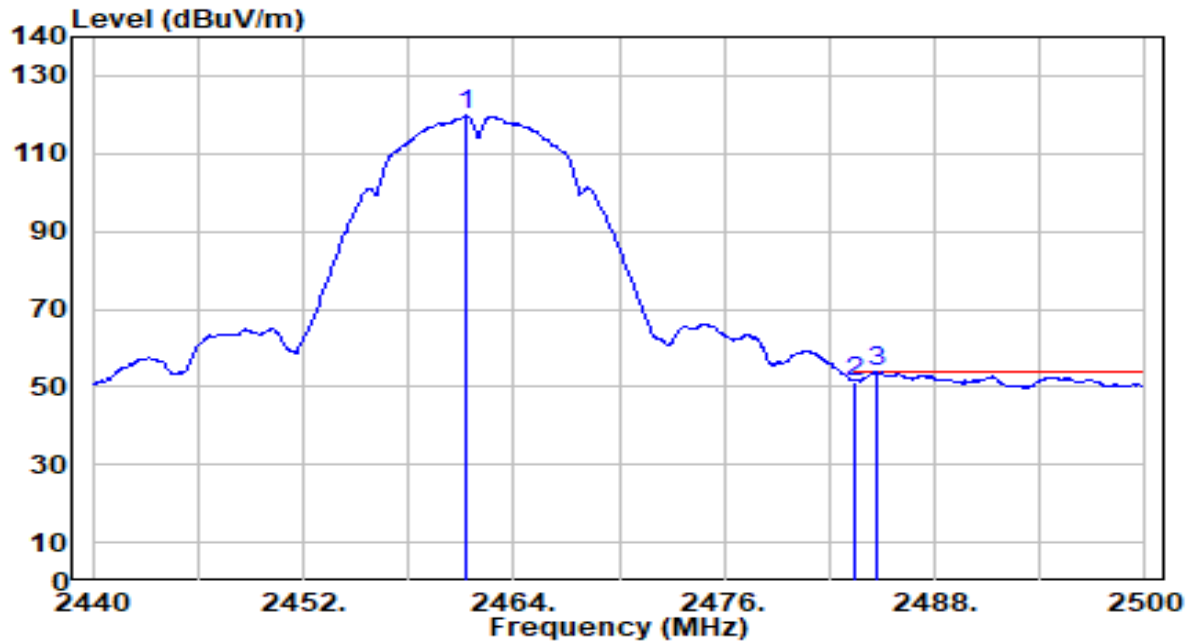


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2461.300	89.40	30.29	119.69	N/A	N/A	249	360	Average
2	2483.500	21.03	30.32	51.35	-2.65	54.00	249	360	Average
3	* 2484.640	23.49	30.32	53.81	-0.19	54.00	249	360	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE24000 Quad-Band Wi-Fi 7 Router	Date of Test	2023-09-06
Factor	DRH18-E	Temp. / Humidity	20°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11g_TX_CH 1_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

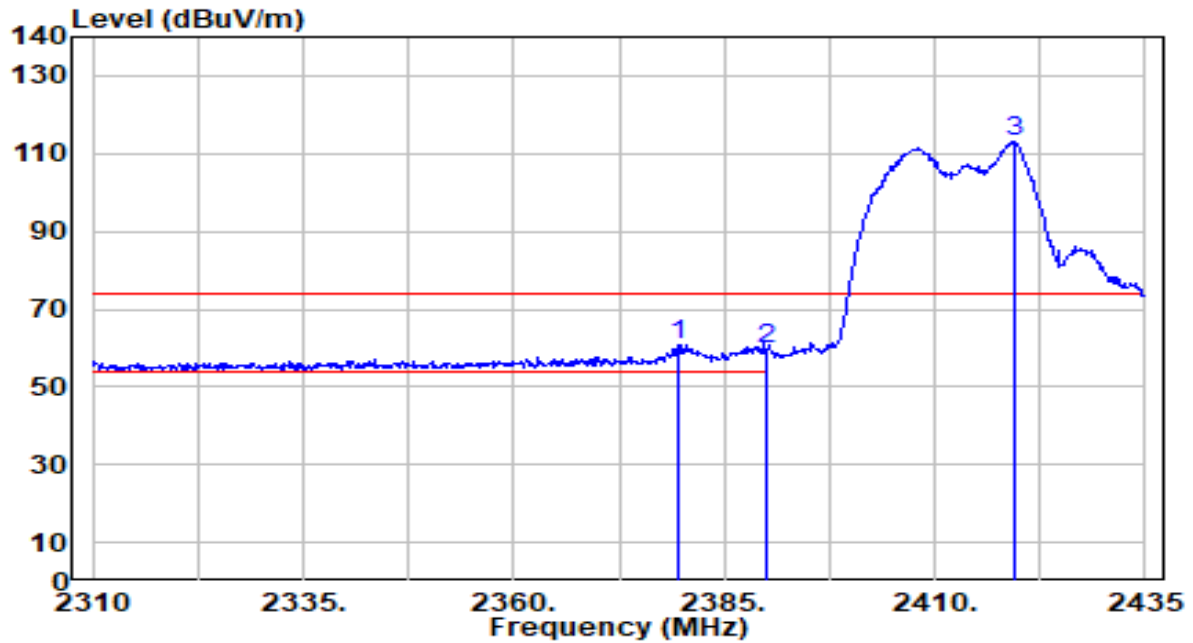


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2379.625	30.66	30.15	60.81	-13.19	74.00	200	225	Peak
2		2390.000	29.37	30.18	59.55	-14.45	74.00	200	225	Peak
3		2419.375	82.79	30.23	113.03	N/A	N/A	200	225	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE24000 Quad-Band Wi-Fi 7 Router	Date of Test	2023-09-06
Factor	DRH18-E	Temp. / Humidity	20°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11g_TX_CH 1_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

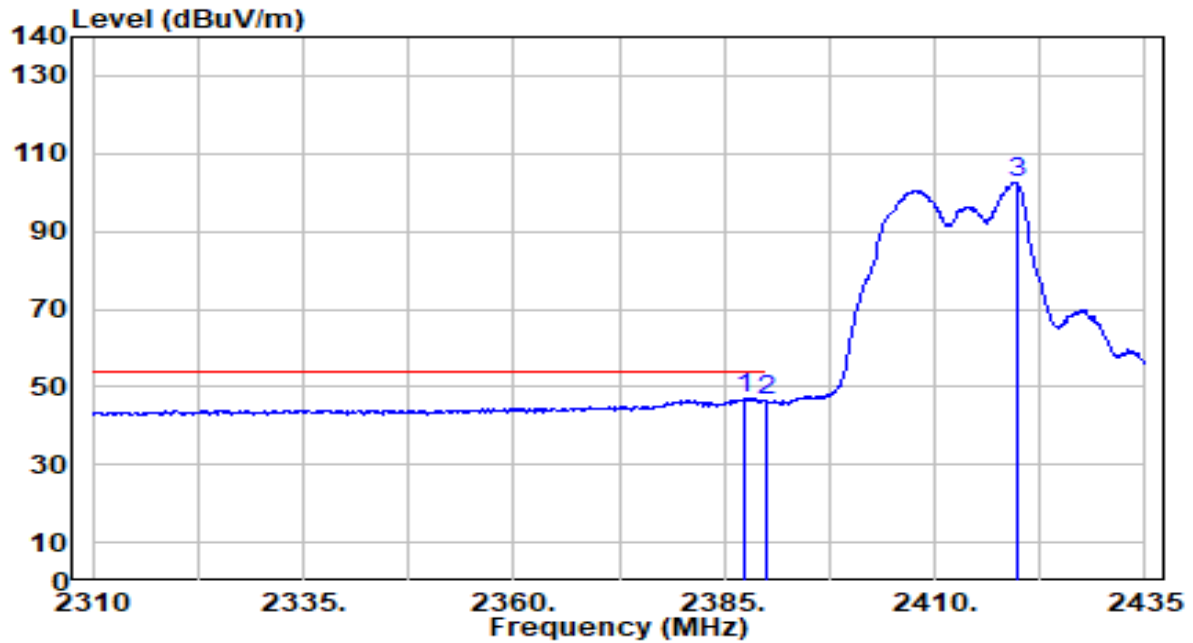


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2387.500	16.77	30.17	46.94	-7.06	54.00	200	225	Average
2		2390.000	16.09	30.18	46.27	-7.73	54.00	200	225	Average
3		2419.750	72.46	30.23	102.70	N/A	N/A	200	225	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE24000 Quad-Band Wi-Fi 7 Router	Date of Test	2023-09-06
Factor	DRH18-E	Temp. / Humidity	20°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11g_TX_CH 1_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

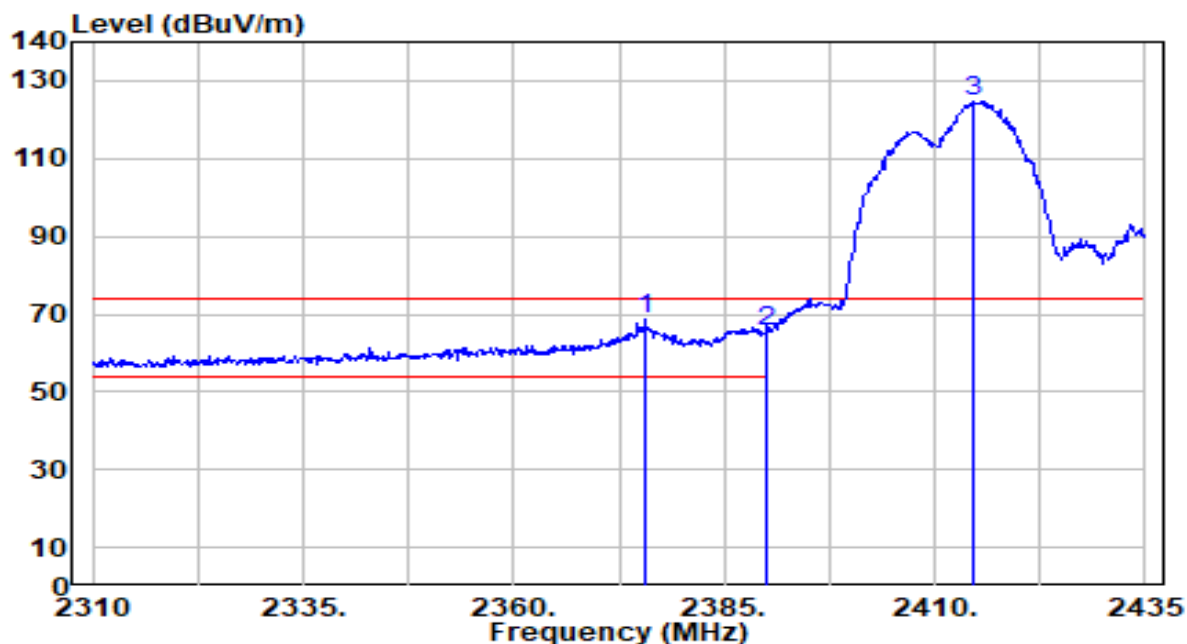


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2375.625	38.52	30.14	68.66	-5.34	74.00	200	222	Peak
2		2390.000	35.36	30.18	65.54	-8.46	74.00	200	222	Peak
3		2414.500	94.41	30.23	124.64	N/A	N/A	200	222	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE24000 Quad-Band Wi-Fi 7 Router	Date of Test	2023-09-06
Factor	DRH18-E	Temp. / Humidity	20°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11g_TX_CH 1_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

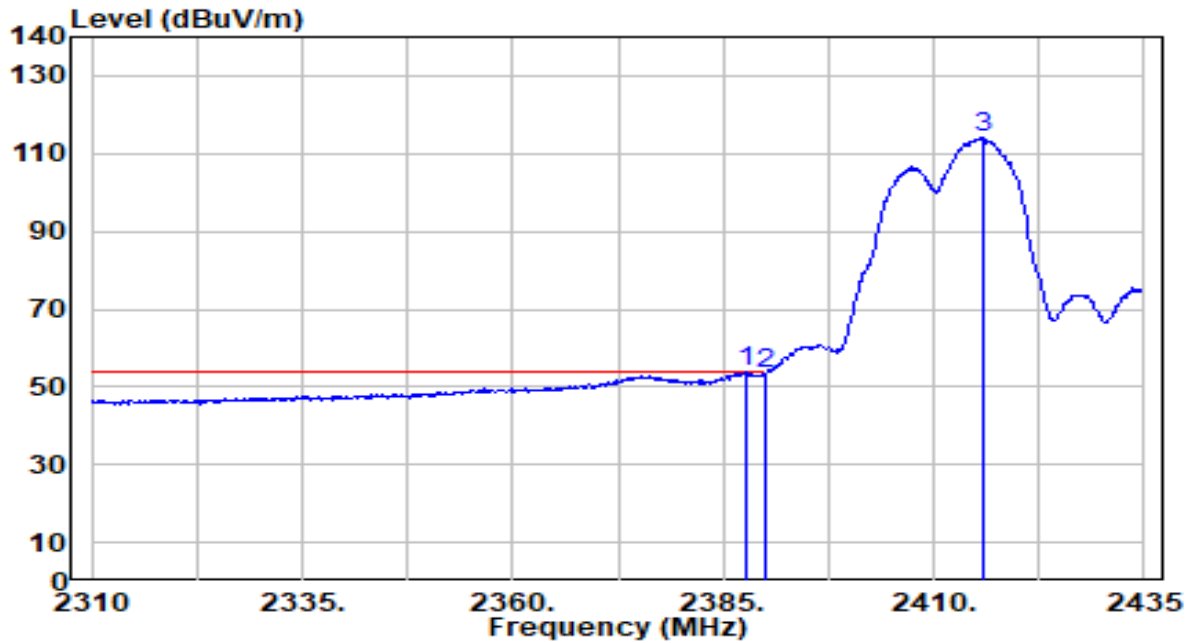


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2387.750	23.65	30.17	53.82	-0.18	54.00	200	222	Average
2		2390.000	23.08	30.18	53.26	-0.74	54.00	200	222	Average
3		2415.750	83.77	30.23	114.00	N/A	N/A	200	222	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE24000 Quad-Band Wi-Fi 7 Router	Date of Test	2023-09-06
Factor	DRH18-E	Temp. / Humidity	20°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11g_TX_CH 6_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

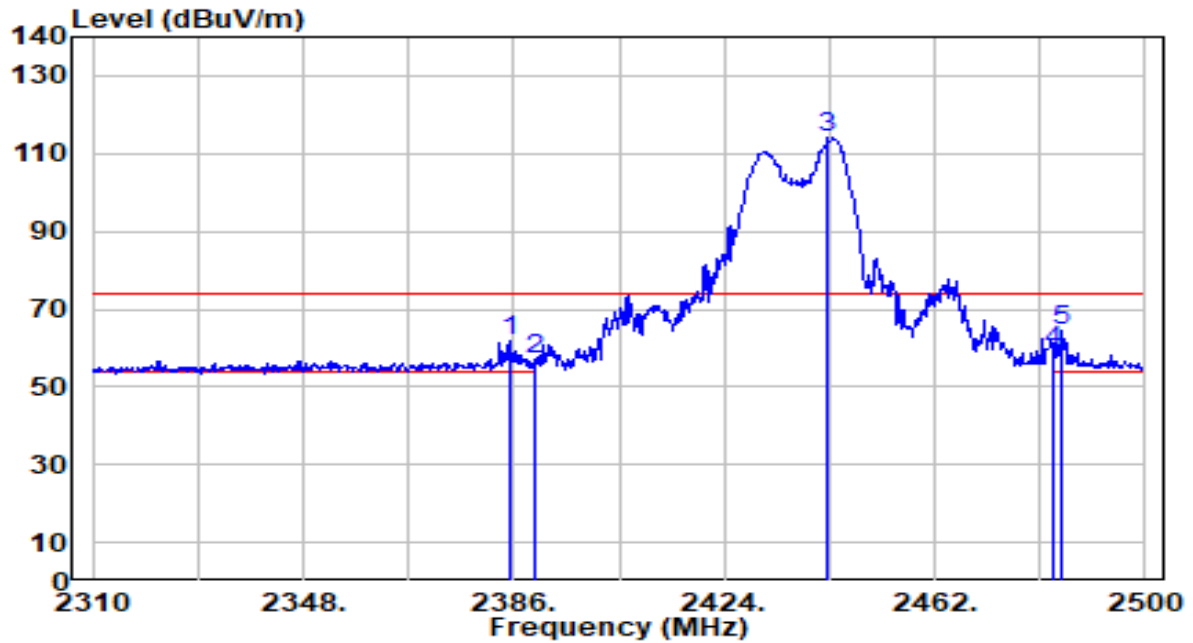


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2385.240	31.39	30.17	61.55	-12.45	74.00	176	264	Peak
2	2390.000	26.68	30.18	56.86	-17.14	74.00	176	264	Peak
3	2442.810	84.08	30.26	114.34	N/A	N/A	176	264	Peak
4	2483.500	28.98	30.32	59.30	-14.70	74.00	176	264	Peak
5	* 2484.990	34.22	30.32	64.54	-9.46	74.00	176	264	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE24000 Quad-Band Wi-Fi 7 Router	Date of Test	2023-09-06
Factor	DRH18-E	Temp. / Humidity	20°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11g_TX_CH 6_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

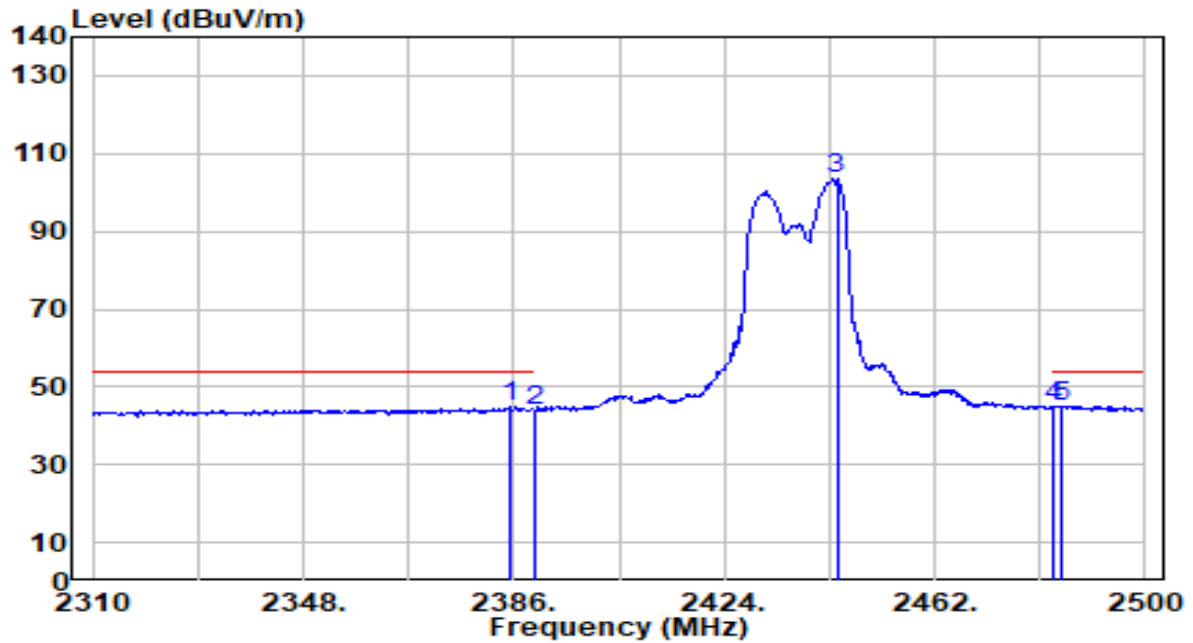


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2385.240	14.61	30.17	44.78	-9.22	54.00	176	264	Average
2	2390.000	13.81	30.18	43.99	-10.01	54.00	176	264	Average
3	2444.330	73.22	30.27	103.48	N/A	N/A	176	264	Average
4	2483.500	14.41	30.32	44.72	-9.28	54.00	176	264	Average
5	* 2484.990	14.79	30.32	45.11	-8.89	54.00	176	264	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE24000 Quad-Band Wi-Fi 7 Router	Date of Test	2023-09-06
Factor	DRH18-E	Temp. / Humidity	20°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11g_TX_CH 6_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

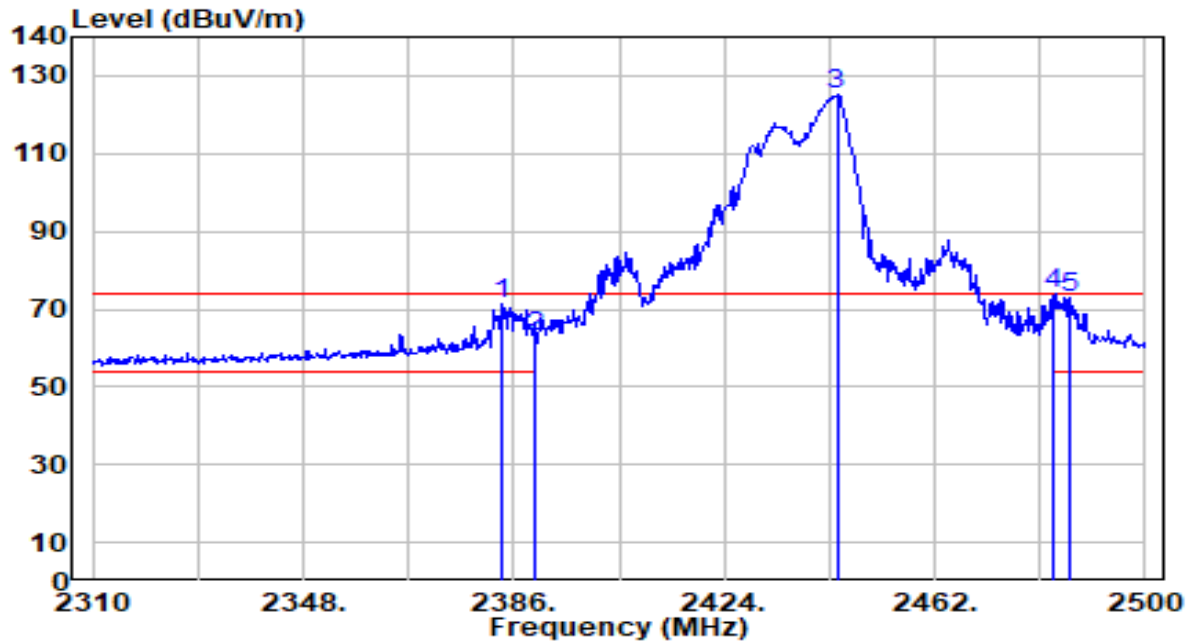


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2383.720	41.10	30.16	71.27	-2.73	74.00	200	51	Peak
2	2390.000	32.55	30.18	62.73	-11.27	74.00	200	51	Peak
3	2444.330	94.70	30.27	124.96	N/A	N/A	200	51	Peak
4	* 2483.500	43.56	30.32	73.87	-0.13	74.00	200	51	Peak
5	2486.320	42.42	30.32	72.74	-1.26	74.00	200	51	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE24000 Quad-Band Wi-Fi 7 Router	Date of Test	2023-09-06
Factor	DRH18-E	Temp. / Humidity	20°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11g_TX_CH 6_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

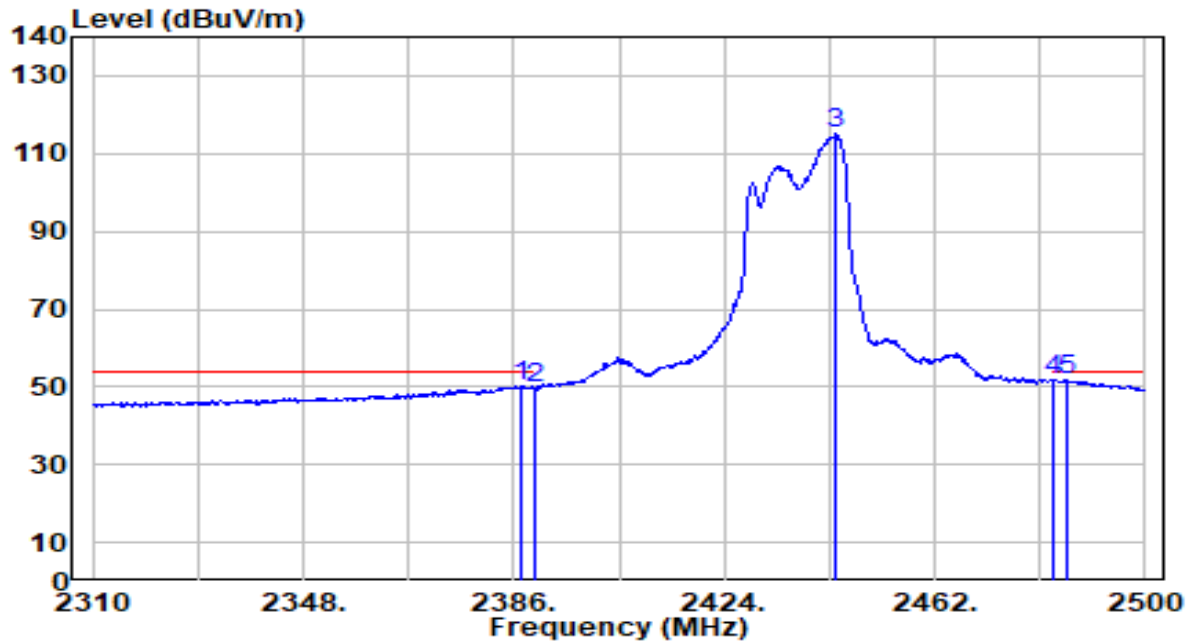


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2387.140	19.97	30.17	50.14	-3.86	54.00	200	51	Average
2	2390.000	19.55	30.18	49.73	-4.27	54.00	200	51	Average
3	2444.140	84.71	30.27	114.97	N/A	N/A	200	51	Average
4	2483.500	21.36	30.32	51.68	-2.32	54.00	200	51	Average
5	* 2485.940	21.61	30.32	51.93	-2.07	54.00	200	51	Average

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE24000 Quad-Band Wi-Fi 7 Router	Date of Test	2023-09-06
Factor	DRH18-E	Temp. / Humidity	20°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11g_TX_CH 11_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

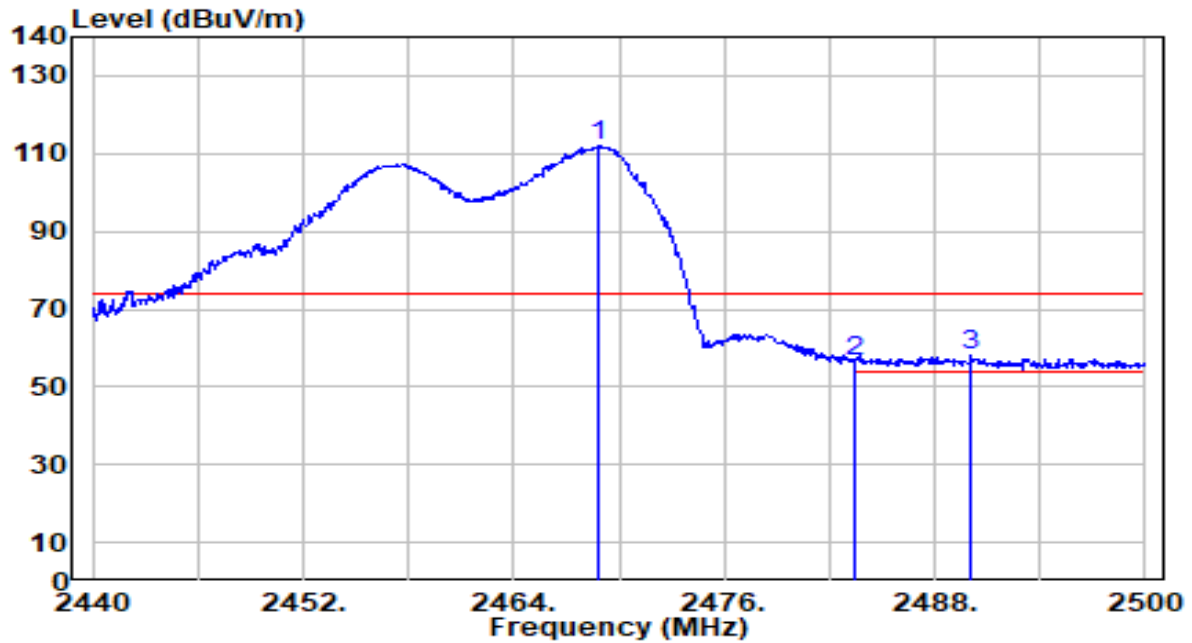


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2468.860	81.64	30.30	111.94	N/A	N/A	200	266	Peak
2	2483.500	26.46	30.32	56.78	-17.22	74.00	200	266	Peak
3	* 2490.040	27.68	30.33	58.01	-15.99	74.00	200	266	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE24000 Quad-Band Wi-Fi 7 Router	Date of Test	2023-09-06
Factor	DRH18-E	Temp. / Humidity	20°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11g_TX_CH 11_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

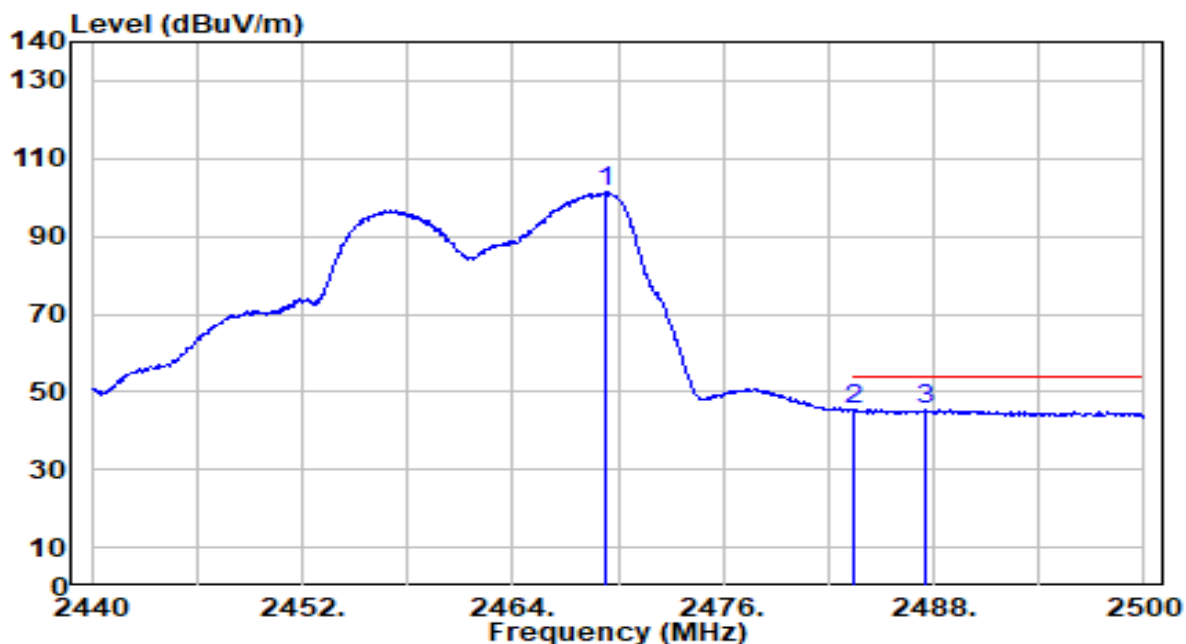


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2469.340	71.07	30.30	101.37	N/A	N/A	200	266	Average
2	2483.500	15.02	30.32	45.34	-8.66	54.00	200	266	Average
3	* 2487.460	15.15	30.32	45.48	-8.52	54.00	200	266	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE24000 Quad-Band Wi-Fi 7 Router	Date of Test	2023-09-06
Factor	DRH18-E	Temp. / Humidity	20°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11g_TX_CH 11_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

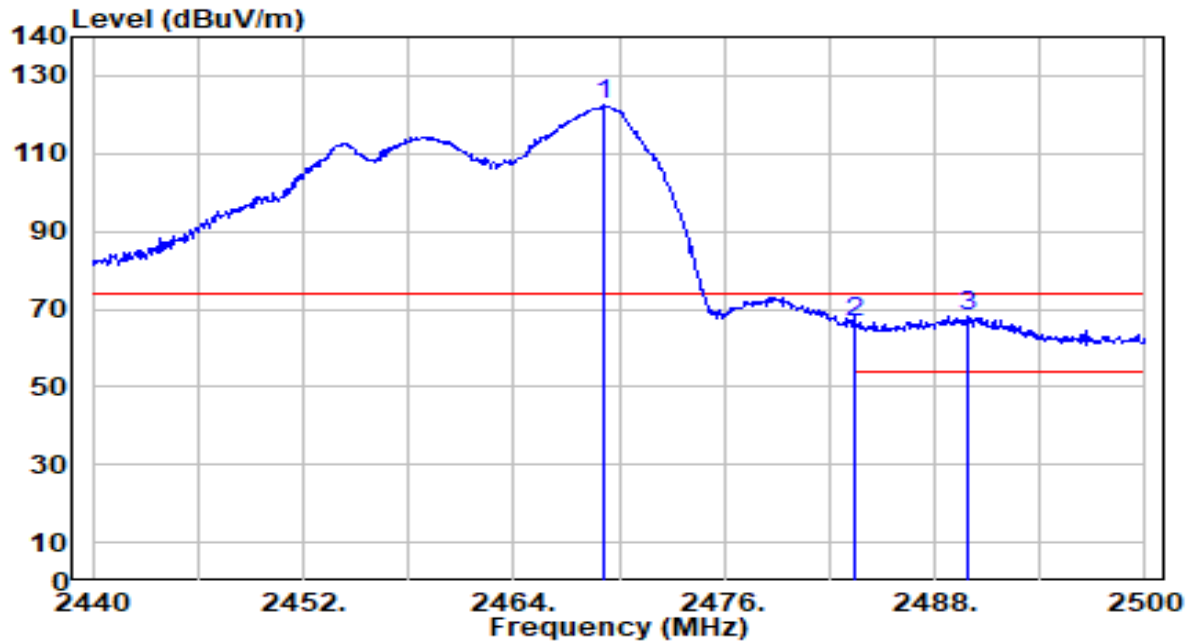


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2469.100	92.25	30.30	122.55	N/A	N/A	200	49	Peak
2	2483.500	36.42	30.32	66.73	-7.27	74.00	200	49	Peak
3	* 2489.860	37.68	30.33	68.01	-5.99	74.00	200	49	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE24000 Quad-Band Wi-Fi 7 Router	Date of Test	2023-09-06
Factor	DRH18-E	Temp. / Humidity	20°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11g_TX_CH 11_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

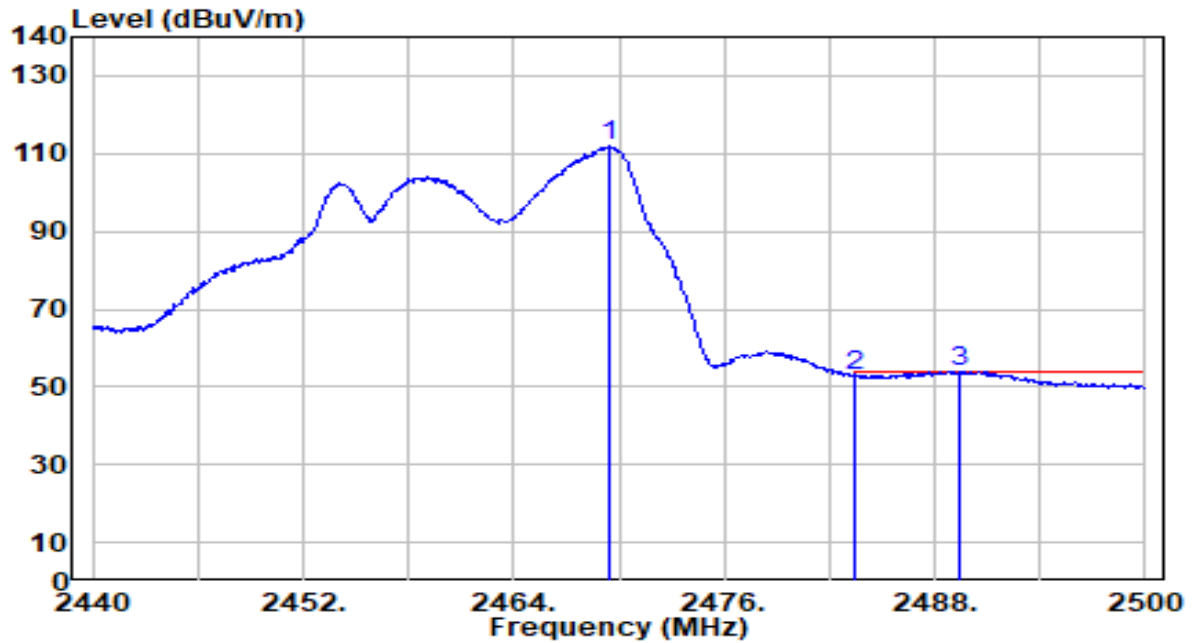


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2469.460	81.57	30.30	111.87	N/A	N/A	200	49	Average
2	2483.500	22.74	30.32	53.05	-0.95	54.00	200	49	Average
3	* 2489.380	23.56	30.33	53.89	-0.11	54.00	200	49	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE24000 Quad-Band Wi-Fi 7 Router	Date of Test	2023-09-06
Factor	DRH18-E	Temp. / Humidity	20°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11n-20MHz_TX_CH 1_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

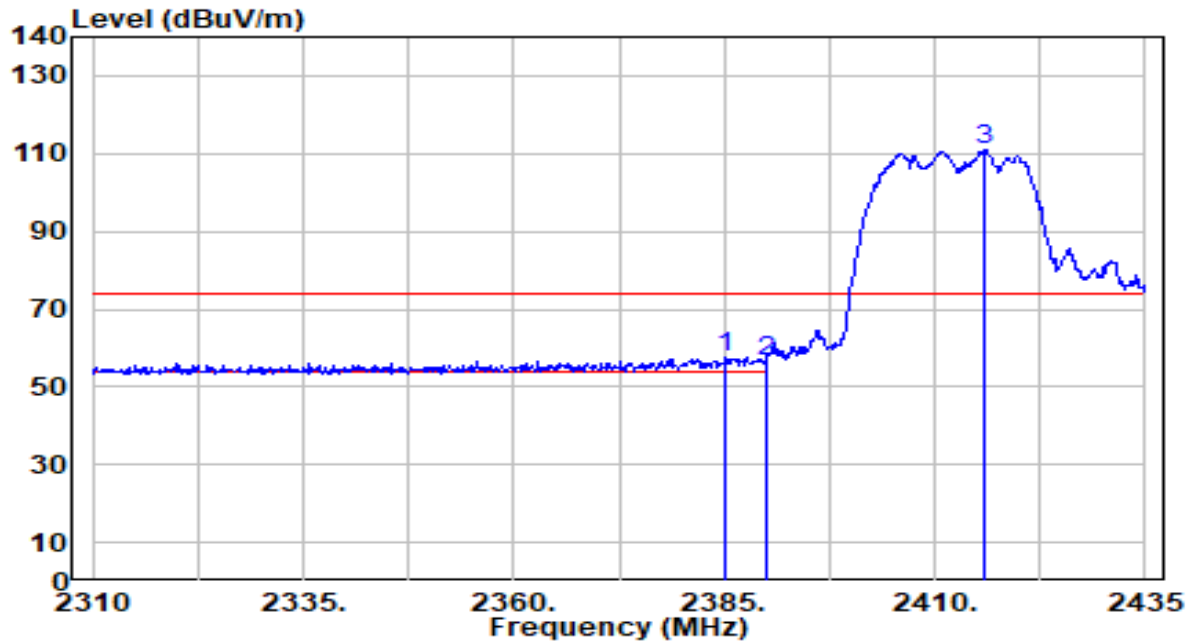


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2385.125	27.63	30.17	57.79	-16.21	74.00	212	222	Peak
2		2390.000	26.46	30.18	56.64	-17.36	74.00	212	222	Peak
3		2416.000	80.71	30.23	110.94	N/A	N/A	212	222	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE24000 Quad-Band Wi-Fi 7 Router	Date of Test	2023-09-06
Factor	DRH18-E	Temp. / Humidity	20°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11n-20MHz_TX_CH 1_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

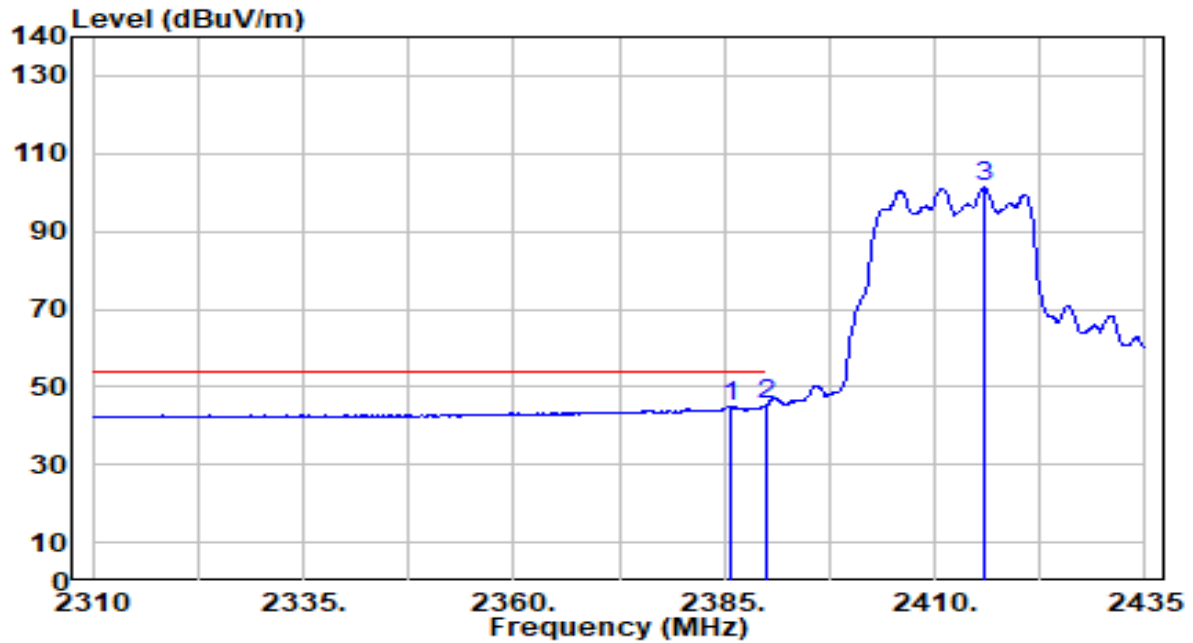


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2385.625	14.82	30.17	44.99	-9.01	54.00	212	222	Average
2	*	2390.000	15.05	30.18	45.23	-8.77	54.00	212	222	Average
3		2415.750	71.08	30.23	101.31	N/A	N/A	212	222	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE24000 Quad-Band Wi-Fi 7 Router	Date of Test	2023-09-06
Factor	DRH18-E	Temp. / Humidity	20°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11n-20MHz_TX_CH 1_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

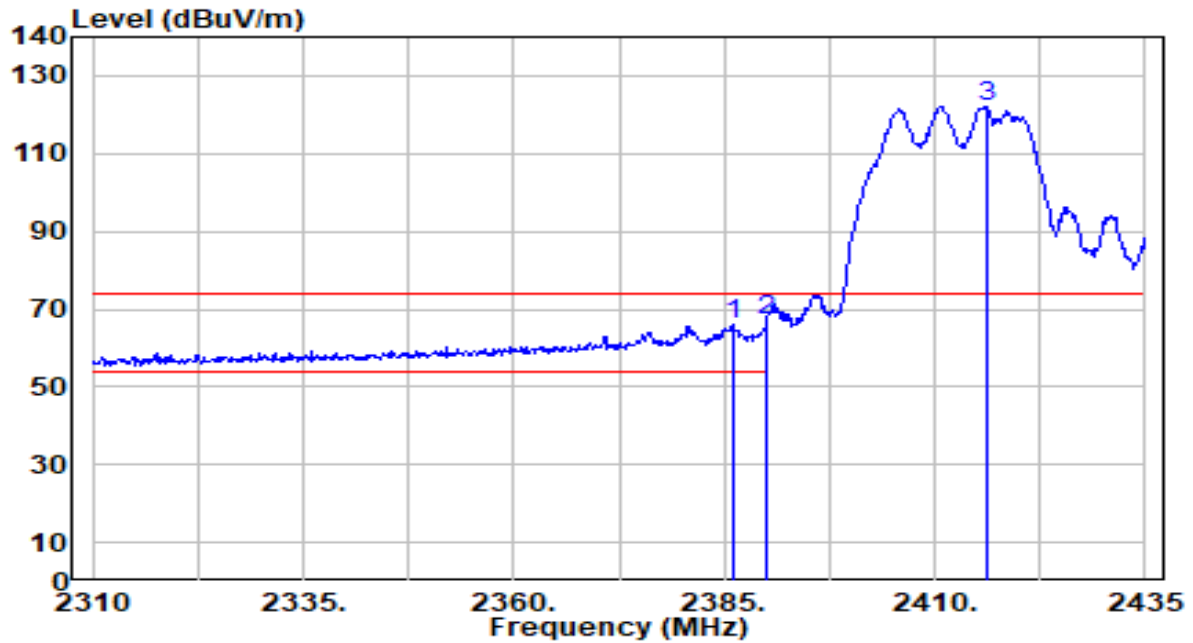


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2386.125	35.72	30.17	65.89	-8.11	74.00	200	52	Peak
2	*	2390.000	36.66	30.18	66.84	-7.16	74.00	200	52	Peak
3		2416.250	92.06	30.23	122.29	N/A	N/A	200	52	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE24000 Quad-Band Wi-Fi 7 Router	Date of Test	2023-09-06
Factor	DRH18-E	Temp. / Humidity	20°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11n-20MHz_TX_CH 1_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

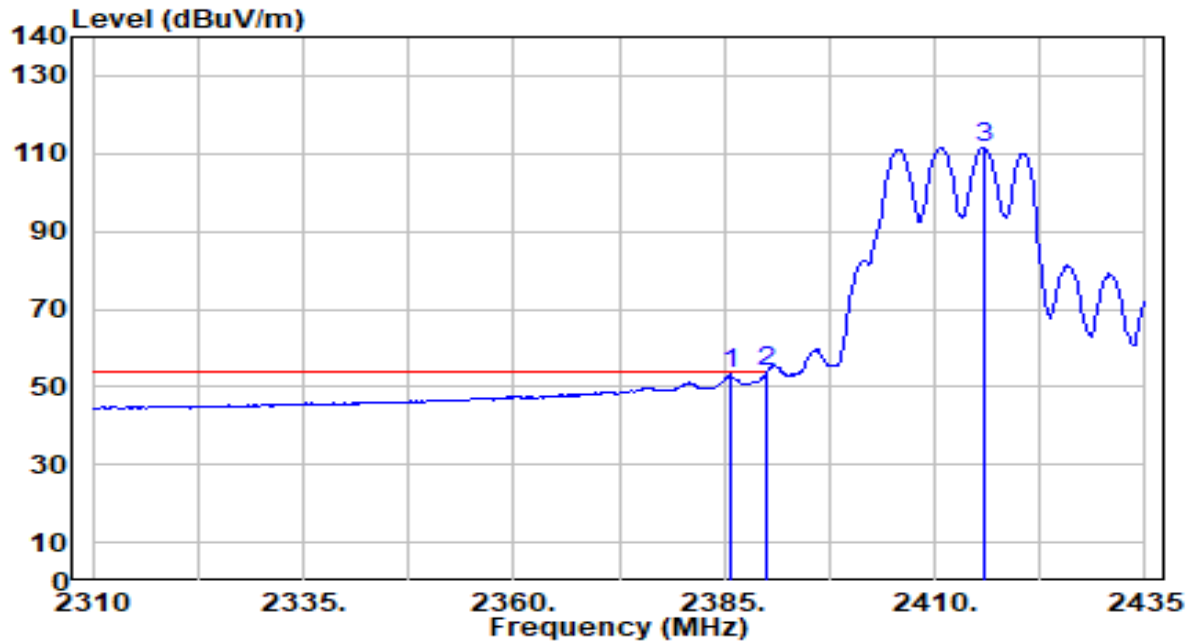


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2385.625	22.98	30.17	53.15	-0.85	54.00	200	52	Average
2	*	2390.000	23.64	30.18	53.82	-0.18	54.00	200	52	Average
3		2415.750	81.41	30.23	111.64	N/A	N/A	200	52	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE24000 Quad-Band Wi-Fi 7 Router	Date of Test	2023-09-06
Factor	DRH18-E	Temp. / Humidity	20°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

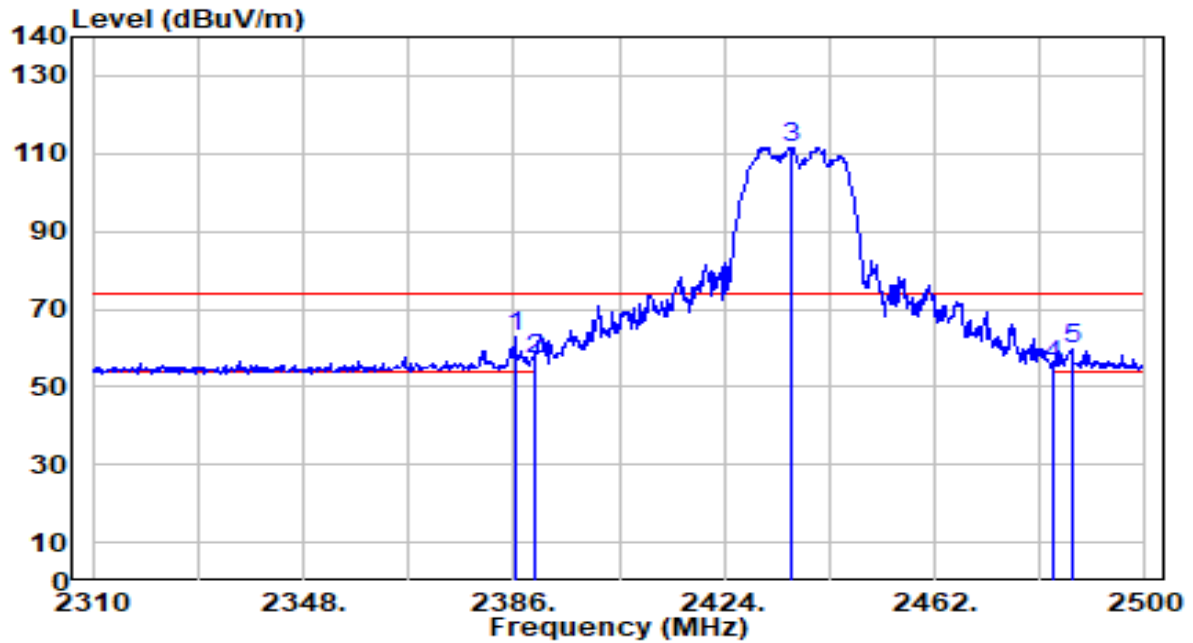


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2386.190	32.51	30.17	62.68	-11.32	74.00	212	227	Peak
2		2390.000	27.14	30.18	57.32	-16.68	74.00	212	227	Peak
3		2435.970	81.32	30.26	111.58	N/A	N/A	212	227	Peak
4		2483.500	25.36	30.32	55.67	-18.33	74.00	212	227	Peak
5		2486.700	29.29	30.32	59.61	-14.39	74.00	212	227	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE24000 Quad-Band Wi-Fi 7 Router	Date of Test	2023-09-06
Factor	DRH18-E	Temp. / Humidity	20°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

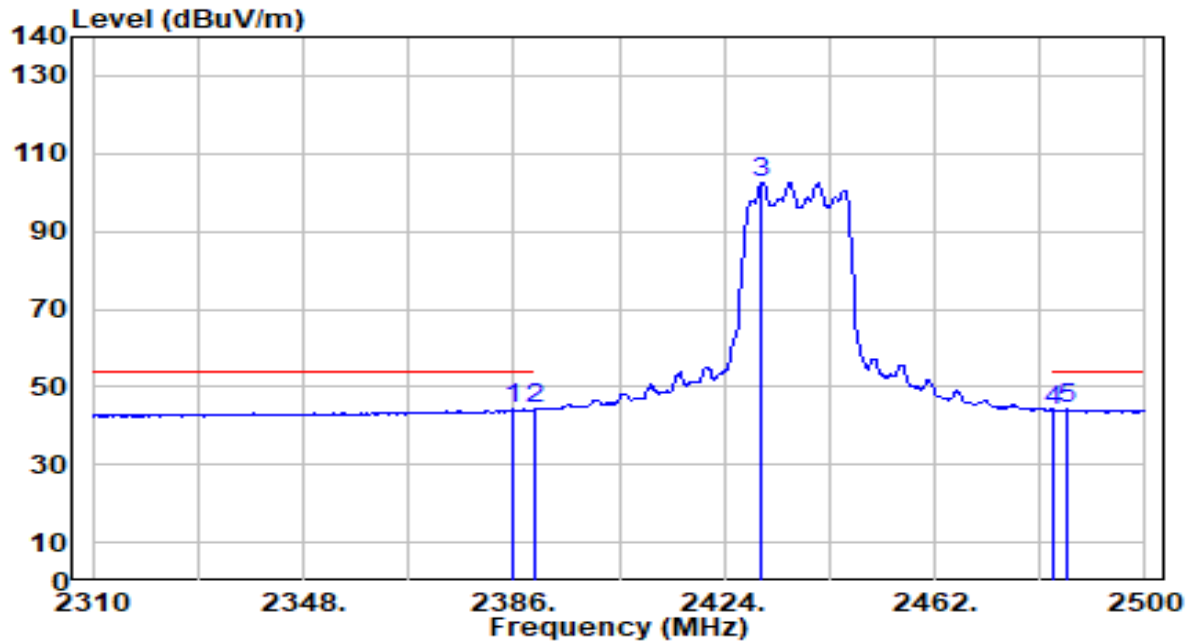


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2385.620	14.00	30.17	44.17	-9.83	54.00	212	227	Average
2		2390.000	13.95	30.18	44.13	-9.87	54.00	212	227	Average
3		2430.840	72.31	30.25	102.55	N/A	N/A	212	227	Average
4		2483.500	13.56	30.32	43.88	-10.12	54.00	212	227	Average
5		2485.750	13.84	30.32	44.16	-9.84	54.00	212	227	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE24000 Quad-Band Wi-Fi 7 Router	Date of Test	2023-09-06
Factor	DRH18-E	Temp. / Humidity	20°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

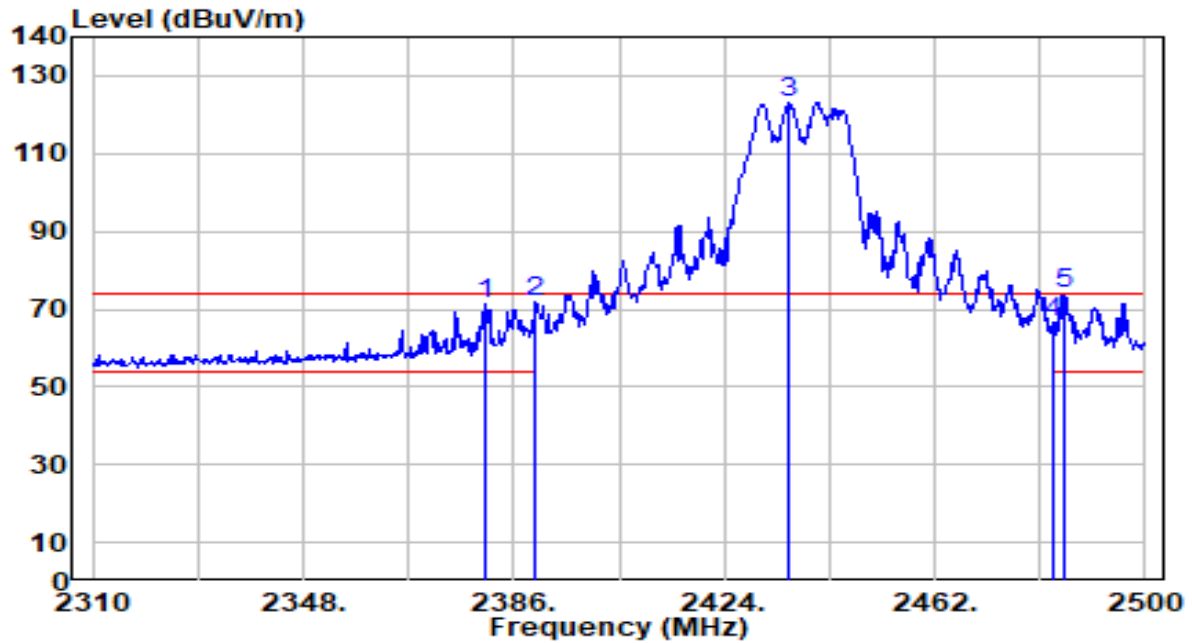


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2381.060	41.39	30.15	71.55	-2.45	74.00	200	52	Peak
2	2390.000	41.67	30.18	71.85	-2.15	74.00	200	52	Peak
3	2435.780	92.97	30.26	123.23	N/A	N/A	200	52	Peak
4	2483.500	36.12	30.32	66.44	-7.56	74.00	200	52	Peak
5	* 2485.180	43.52	30.32	73.84	-0.16	74.00	200	52	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE24000 Quad-Band Wi-Fi 7 Router	Date of Test	2023-09-06
Factor	DRH18-E	Temp. / Humidity	20°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

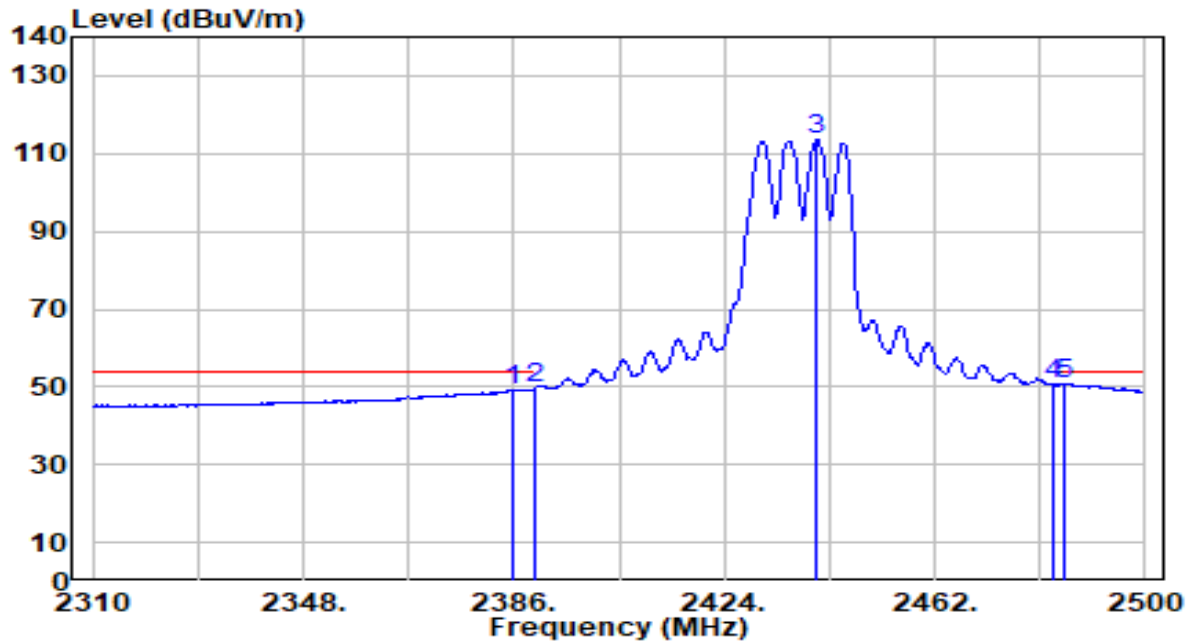


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2385.620	19.18	30.17	49.34	-4.66	54.00	200	52	Average
2	2390.000	19.68	30.18	49.86	-4.14	54.00	200	52	Average
3	2440.720	83.21	30.26	113.47	N/A	N/A	200	52	Average
4	2483.500	20.15	30.32	50.46	-3.54	54.00	200	52	Average
5	* 2485.560	20.56	30.32	50.88	-3.12	54.00	200	52	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE24000 Quad-Band Wi-Fi 7 Router	Date of Test	2023-09-06
Factor	DRH18-E	Temp. / Humidity	20°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11n-20MHz_TX_CH 11_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

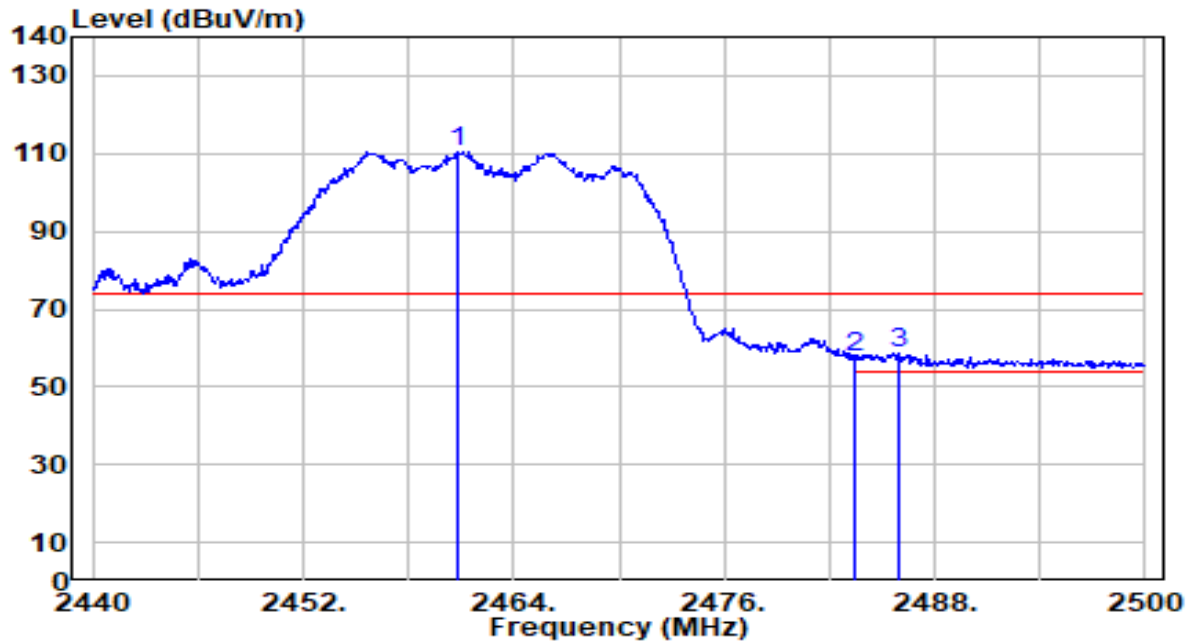


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2460.820	80.31	30.29	110.59	N/A	N/A	200	230	Peak
2	2483.500	27.25	30.32	57.57	-16.43	74.00	200	230	Peak
3	* 2485.900	28.27	30.32	58.59	-15.41	74.00	200	230	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE24000 Quad-Band Wi-Fi 7 Router	Date of Test	2023-09-06
Factor	DRH18-E	Temp. / Humidity	20°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11n-20MHz_TX_CH 11_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

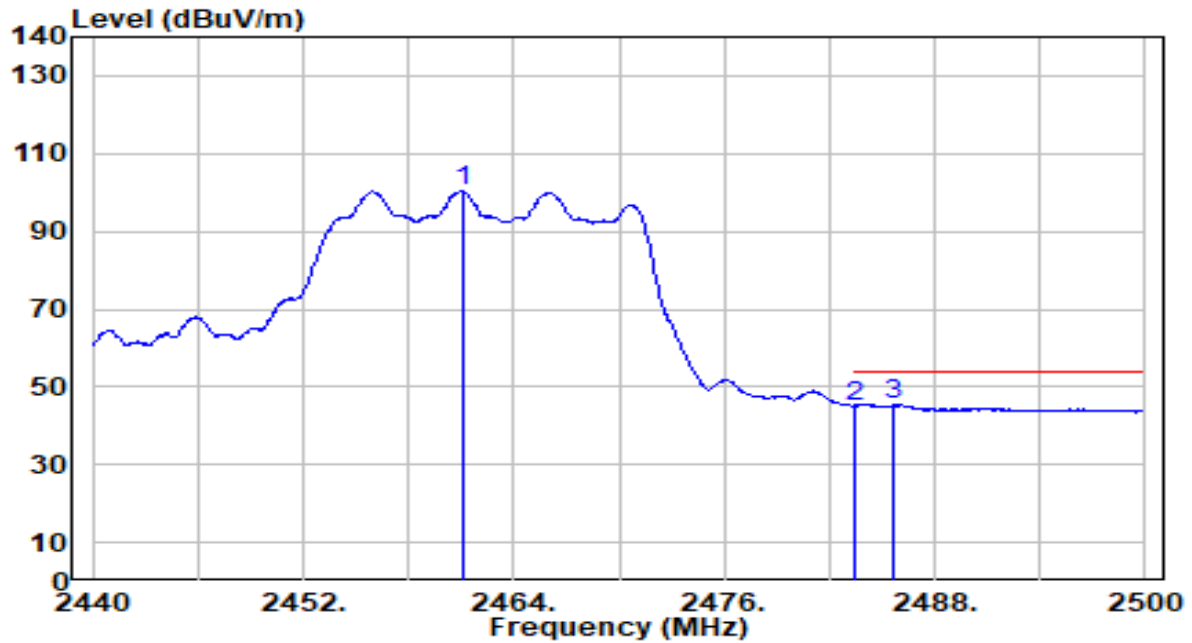


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2461.060	70.03	30.29	100.32	N/A	N/A	200	230	Average
2	2483.500	14.79	30.32	45.11	-8.89	54.00	200	230	Average
3	* 2485.660	14.91	30.32	45.23	-8.77	54.00	200	230	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE24000 Quad-Band Wi-Fi 7 Router	Date of Test	2023-09-06
Factor	DRH18-E	Temp. / Humidity	20°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11n-20MHz_TX_CH 11_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

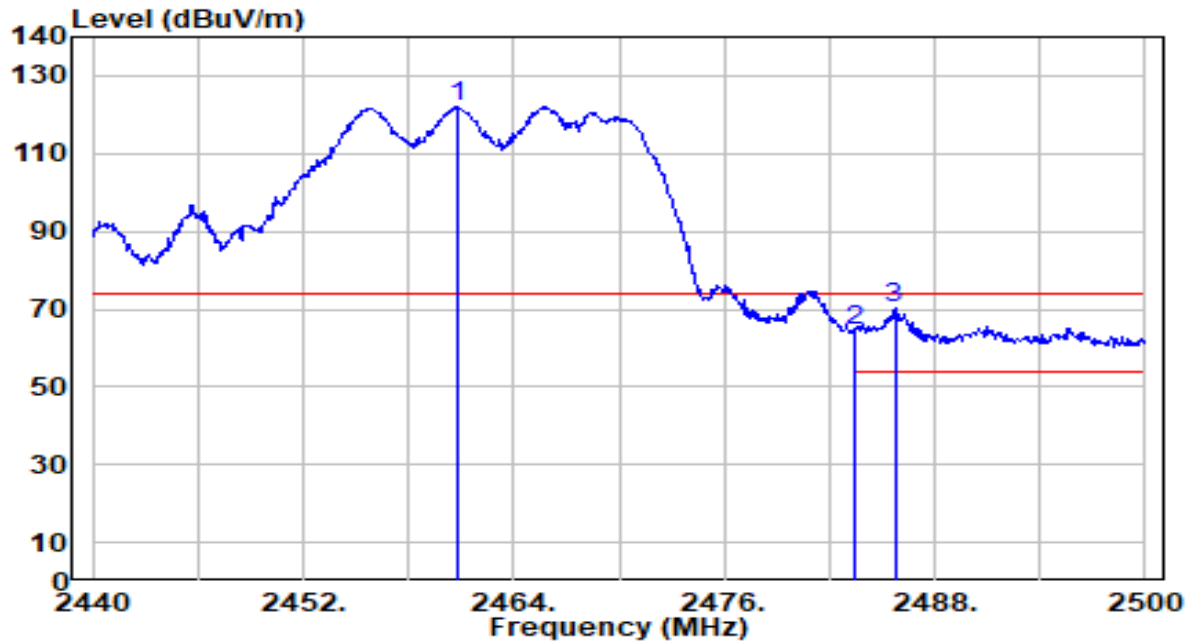


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2460.880	91.87	30.29	122.16	N/A	N/A	225	52	Peak
2	2483.500	33.98	30.32	64.30	-9.70	74.00	225	52	Peak
3	* 2485.720	39.80	30.32	70.12	-3.88	74.00	225	52	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE24000 Quad-Band Wi-Fi 7 Router	Date of Test	2023-09-06
Factor	DRH18-E	Temp. / Humidity	20°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11n-20MHz_TX_CH 11_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

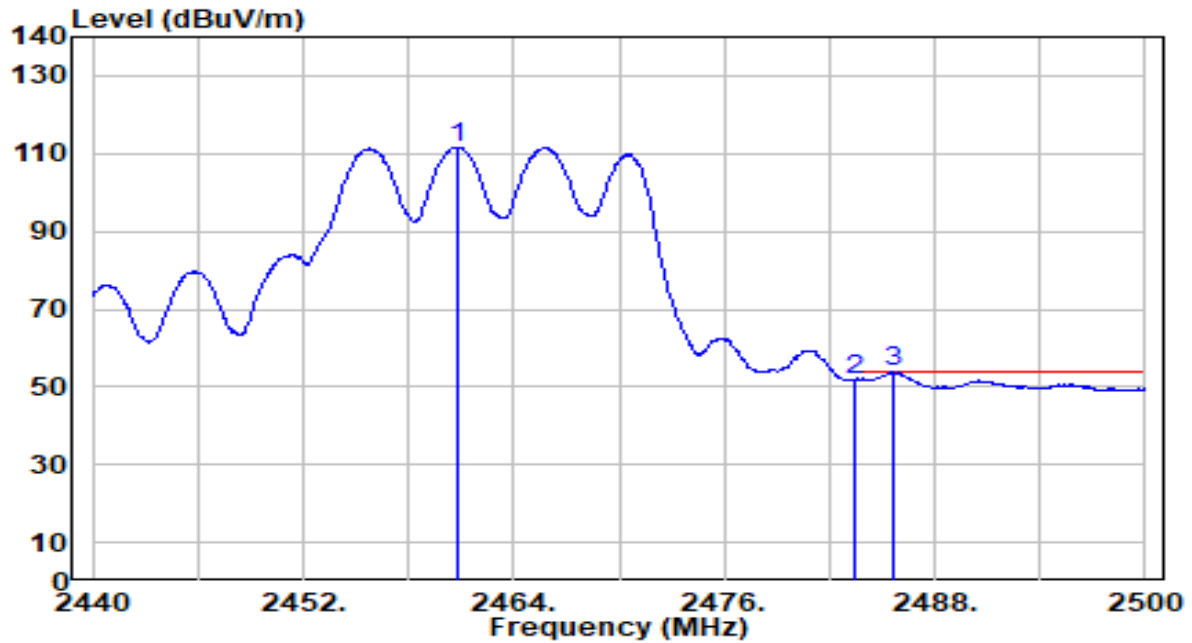


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2460.820	81.26	30.29	111.55	N/A	N/A	225	52	Average
2	2483.500	21.26	30.32	51.58	-2.42	54.00	225	52	Average
3	* 2485.660	23.49	30.32	53.81	-0.19	54.00	225	52	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE24000 Quad-Band Wi-Fi 7 Router	Date of Test	2023-09-06
Factor	DRH18-E	Temp. / Humidity	20°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11n-40MHz_TX_CH 3_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

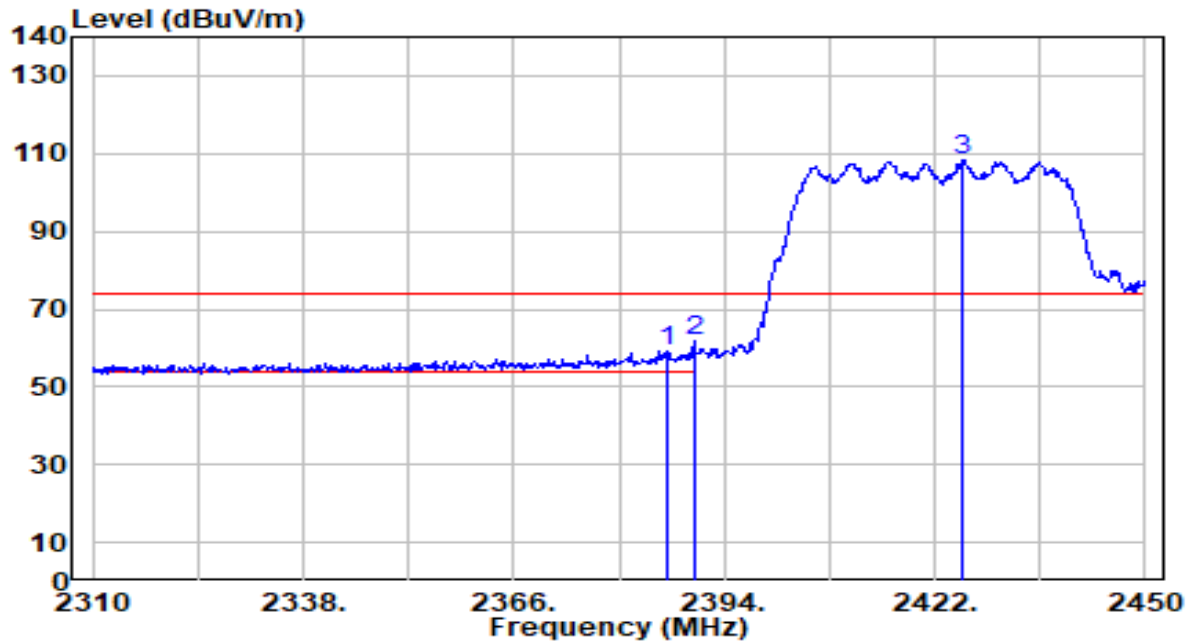


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2386.300	28.75	30.17	58.92	-15.08	74.00	212	227	Peak
2	*	2390.000	31.82	30.18	62.00	-12.00	74.00	212	227	Peak
3		2425.500	77.87	30.24	108.11	N/A	N/A	212	227	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE24000 Quad-Band Wi-Fi 7 Router	Date of Test	2023-09-06
Factor	DRH18-E	Temp. / Humidity	20°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11n-40MHz_TX_CH 3_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

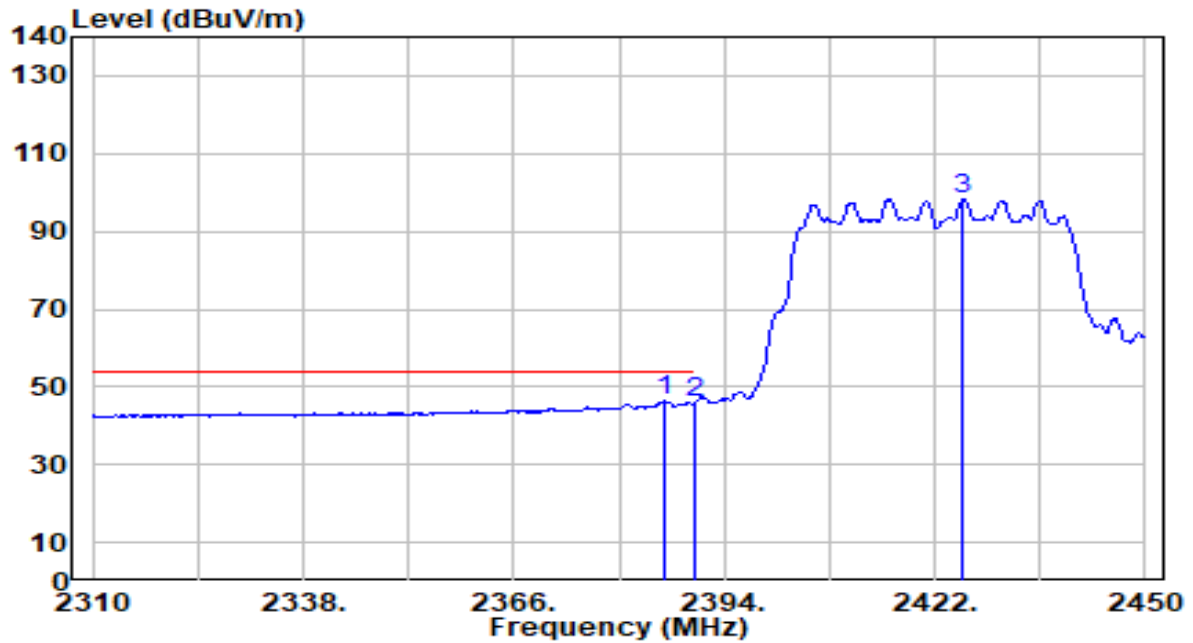


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2386.160	16.07	30.17	46.24	-7.76	54.00	212	227	Average
2		2390.000	15.54	30.18	45.72	-8.28	54.00	212	227	Average
3		2425.780	68.02	30.24	98.26	N/A	N/A	212	227	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE24000 Quad-Band Wi-Fi 7 Router	Date of Test	2023-09-06
Factor	DRH18-E	Temp. / Humidity	20°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11n-40MHz_TX_CH 3_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

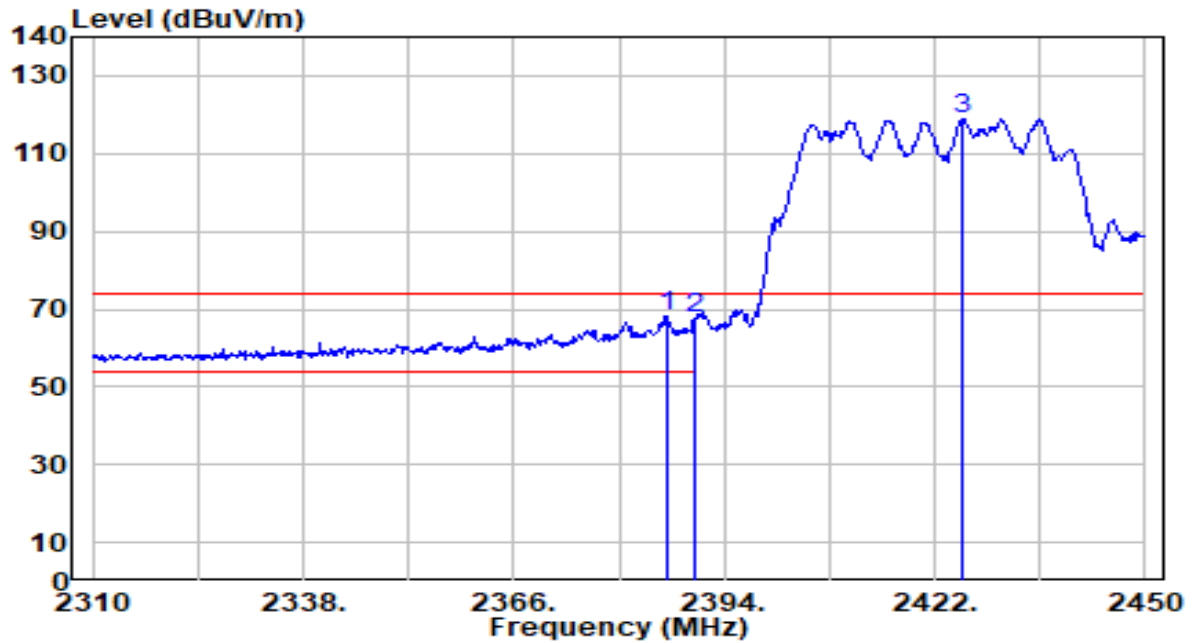


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2386.300	37.98	30.17	68.15	-5.85	74.00	200	51	Peak
2		2390.000	37.42	30.18	67.60	-6.40	74.00	200	51	Peak
3		2425.780	88.65	30.24	118.89	N/A	N/A	200	51	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE24000 Quad-Band Wi-Fi 7 Router	Date of Test	2023-09-06
Factor	DRH18-E	Temp. / Humidity	20°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11n-40MHz_TX_CH 3_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

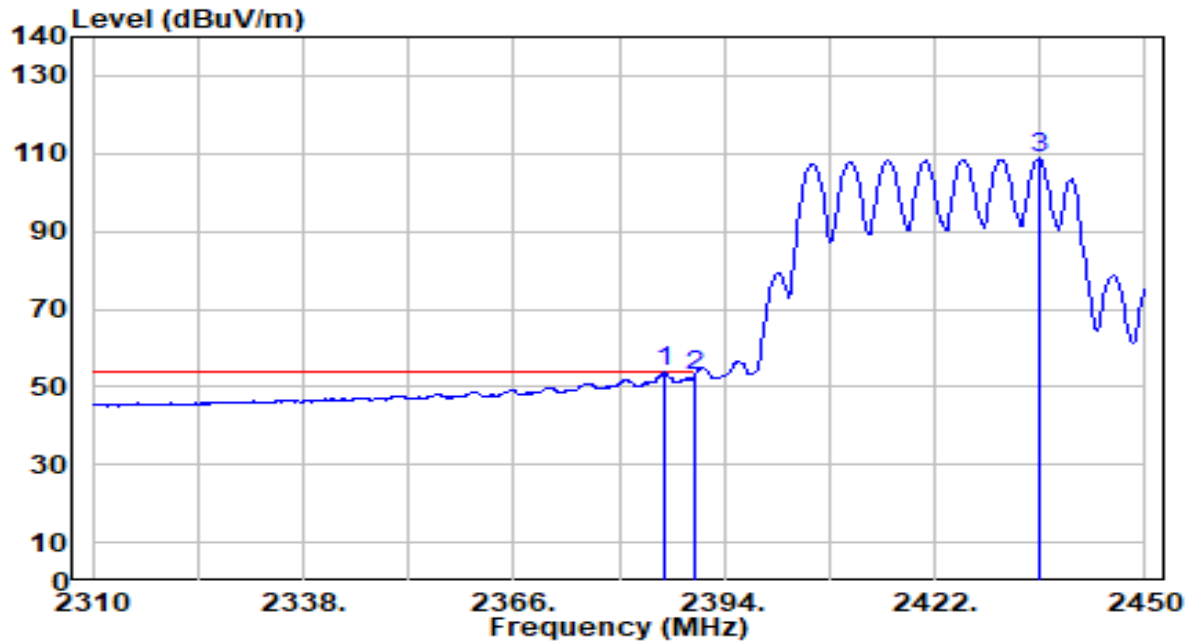


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2386.160	23.69	30.17	53.86	-0.14	54.00	200	51	Average
2		2390.000	22.40	30.18	52.57	-1.43	54.00	200	51	Average
3		2435.860	78.36	30.26	108.62	N/A	N/A	200	51	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE24000 Quad-Band Wi-Fi 7 Router	Date of Test	2023-09-06
Factor	DRH18-E	Temp. / Humidity	20°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11n-40MHz_TX_CH 6_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

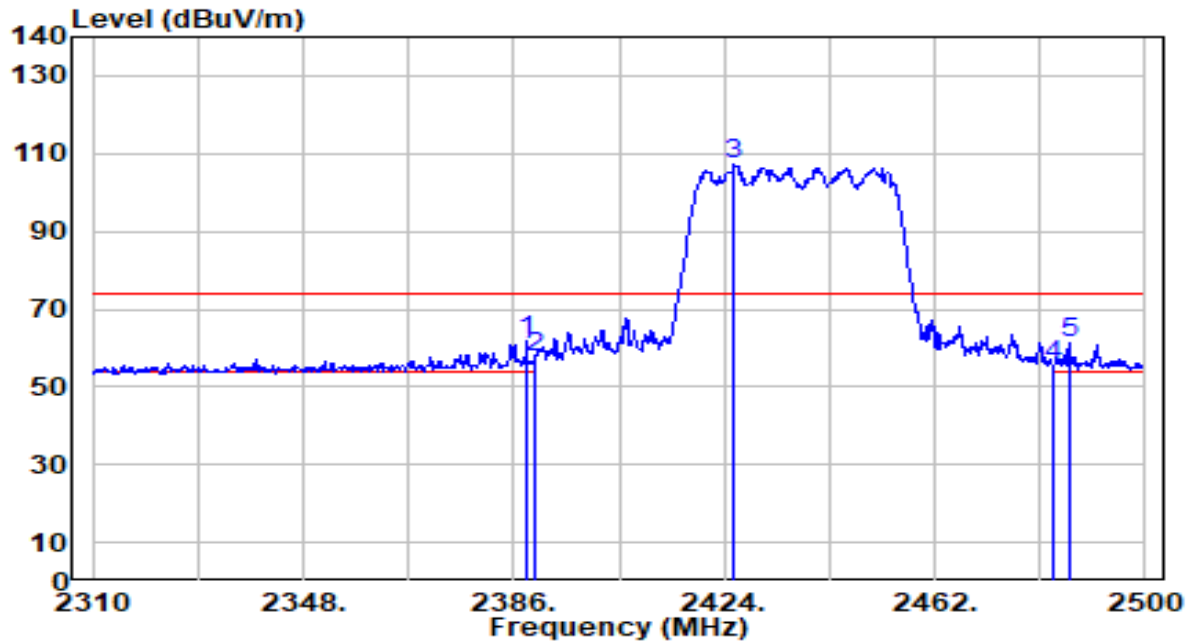


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2388.280	31.81	30.17	61.99	-12.01	74.00	212	227	Peak
2		2390.000	27.30	30.18	57.48	-16.52	74.00	212	227	Peak
3		2425.900	77.26	30.24	107.50	N/A	N/A	212	227	Peak
4		2483.500	25.29	30.32	55.61	-18.39	74.00	212	227	Peak
5		2486.320	30.83	30.32	61.16	-12.84	74.00	212	227	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE24000 Quad-Band Wi-Fi 7 Router	Date of Test	2023-09-06
Factor	DRH18-E	Temp. / Humidity	20°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11n-40MHz_TX_CH 6_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

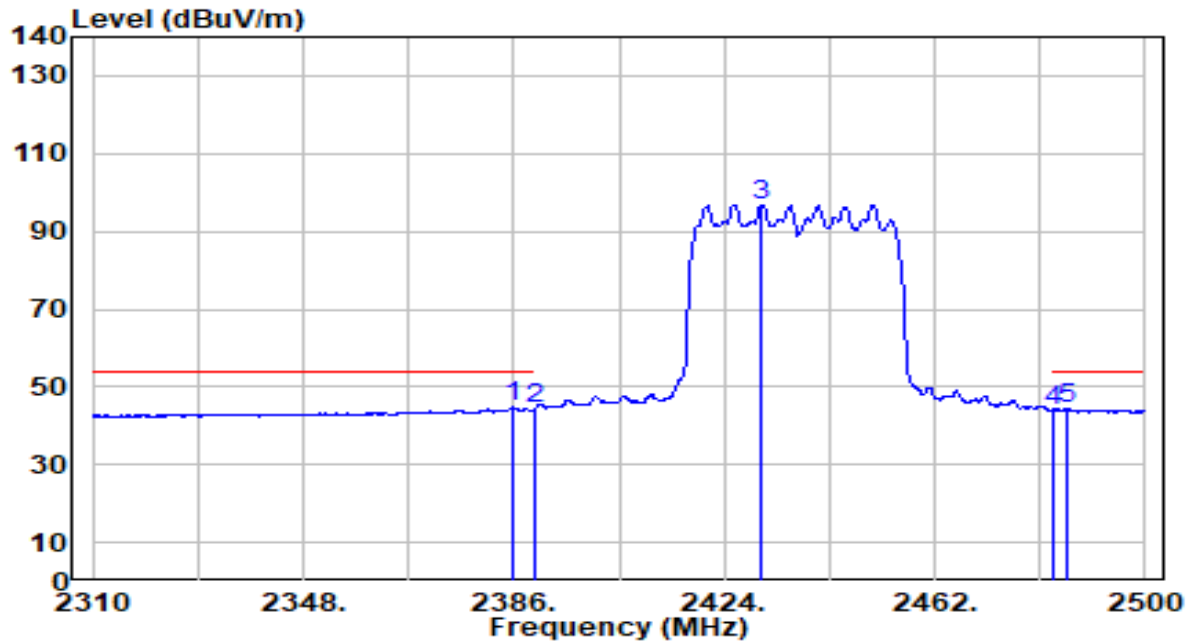


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2385.620	14.70	30.17	44.87	-9.13	54.00	212	227	Average
2		2390.000	14.35	30.18	44.53	-9.47	54.00	212	227	Average
3		2430.650	66.68	30.25	96.93	N/A	N/A	212	227	Average
4		2483.500	13.75	30.32	44.07	-9.93	54.00	212	227	Average
5		2485.750	13.94	30.32	44.26	-9.74	54.00	212	227	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE24000 Quad-Band Wi-Fi 7 Router	Date of Test	2023-09-06
Factor	DRH18-E	Temp. / Humidity	20°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11n-40MHz_TX_CH 6_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

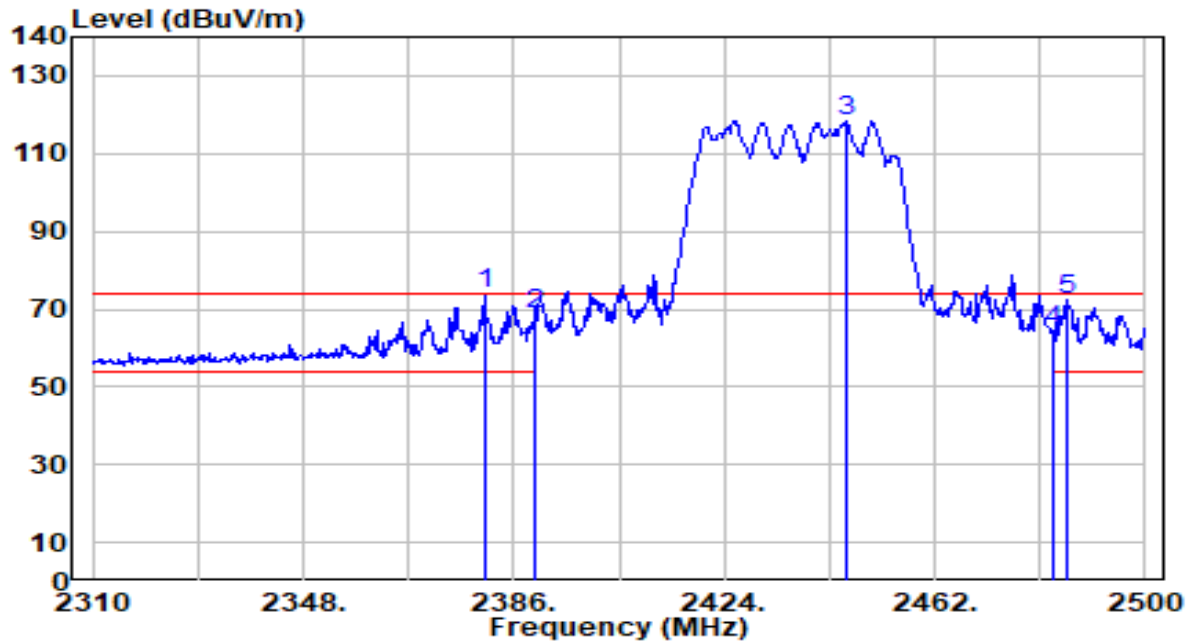


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2380.870	43.70	30.15	73.85	-0.15	74.00	200	50	Peak
2		2390.000	38.48	30.18	68.66	-5.34	74.00	200	50	Peak
3		2446.040	88.25	30.27	118.52	N/A	N/A	200	50	Peak
4		2483.500	34.06	30.32	64.38	-9.62	74.00	200	50	Peak
5		2485.940	41.80	30.32	72.12	-1.88	74.00	200	50	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE24000 Quad-Band Wi-Fi 7 Router	Date of Test	2023-09-06
Factor	DRH18-E	Temp. / Humidity	20°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11n-40MHz_TX_CH 6_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

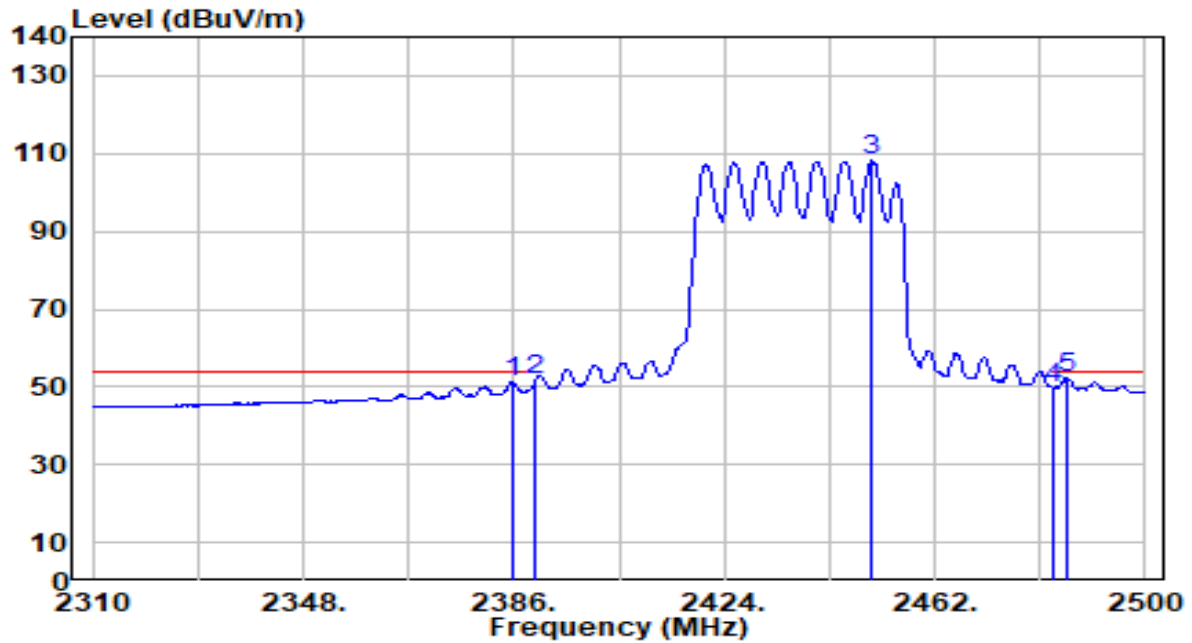


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2385.620	21.24	30.17	51.41	-2.59	54.00	200	50	Average
2	2390.000	21.47	30.18	51.65	-2.35	54.00	200	50	Average
3	2450.790	77.77	30.28	108.05	N/A	N/A	200	50	Average
4	2483.500	19.55	30.32	49.87	-4.13	54.00	200	50	Average
5	* 2486.130	21.85	30.32	52.18	-1.82	54.00	200	50	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE24000 Quad-Band Wi-Fi 7 Router	Date of Test	2023-09-06
Factor	DRH18-E	Temp. / Humidity	20°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11n-40MHz_TX_CH 9_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

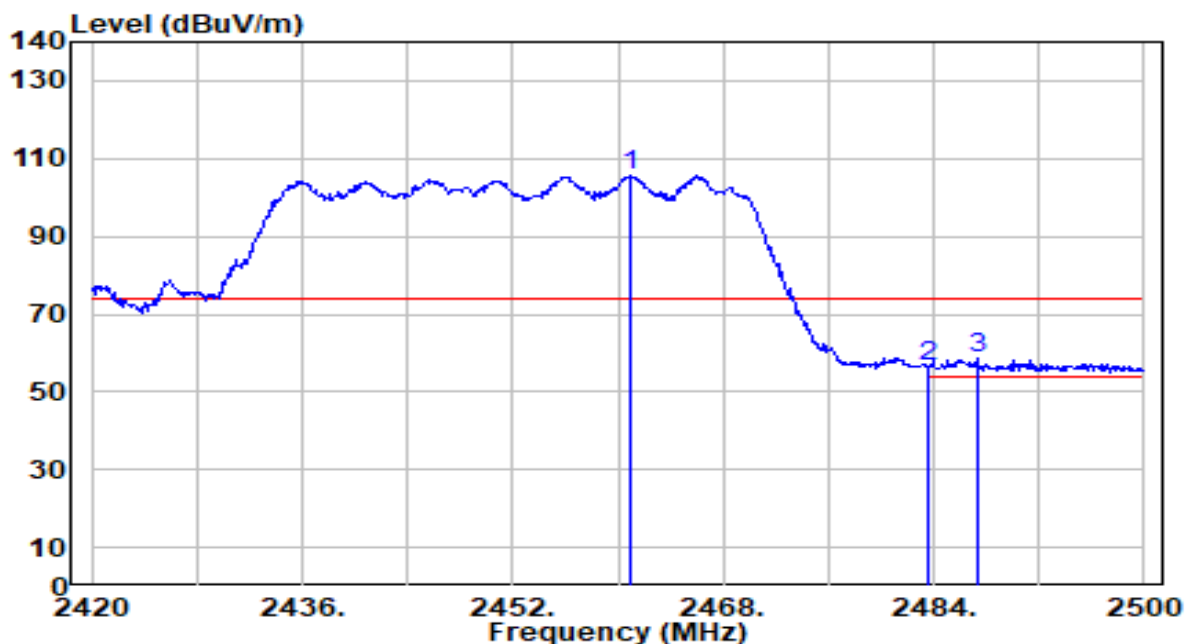


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2460.960	75.30	30.29	105.58	N/A	N/A	203	231	Peak
2	2483.500	26.11	30.32	56.42	-17.58	74.00	203	231	Peak
3	* 2487.280	28.10	30.32	58.43	-15.57	74.00	203	231	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE24000 Quad-Band Wi-Fi 7 Router	Date of Test	2023-09-06
Factor	DRH18-E	Temp. / Humidity	20°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11n-40MHz_TX_CH 9_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

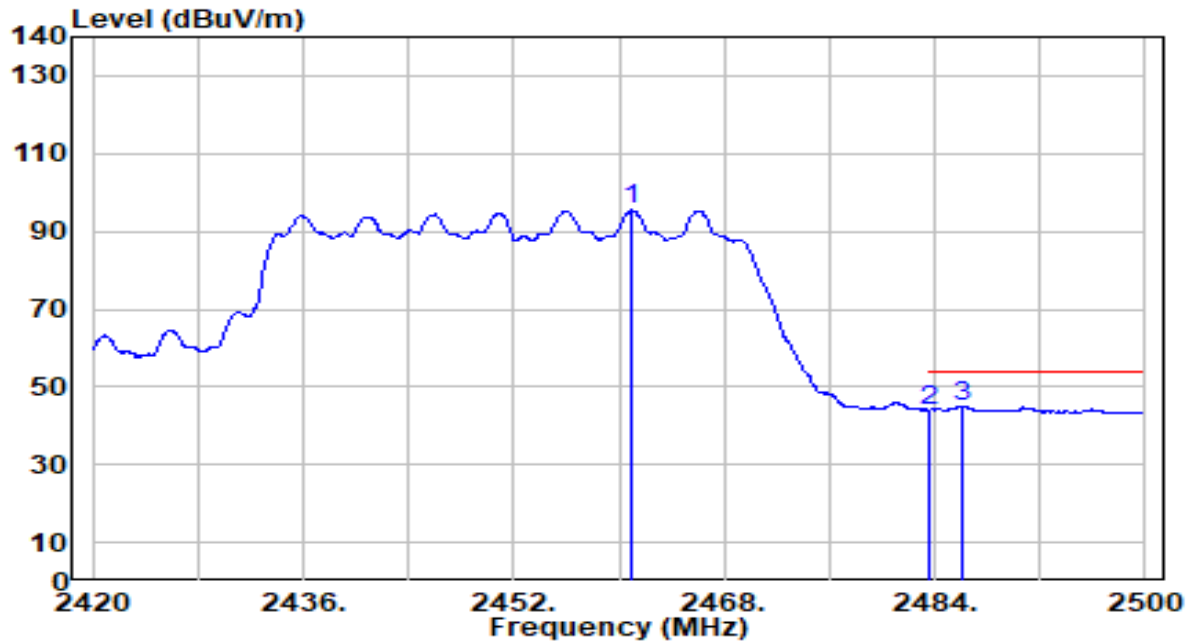


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2460.960	65.22	30.29	95.51	N/A	N/A	203	231	Average
2	2483.500	13.68	30.32	44.00	-10.00	54.00	203	231	Average
3	* 2486.080	14.77	30.32	45.09	-8.91	54.00	203	231	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE24000 Quad-Band Wi-Fi 7 Router	Date of Test	2023-09-06
Factor	DRH18-E	Temp. / Humidity	20°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11n-40MHz_TX_CH 9_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

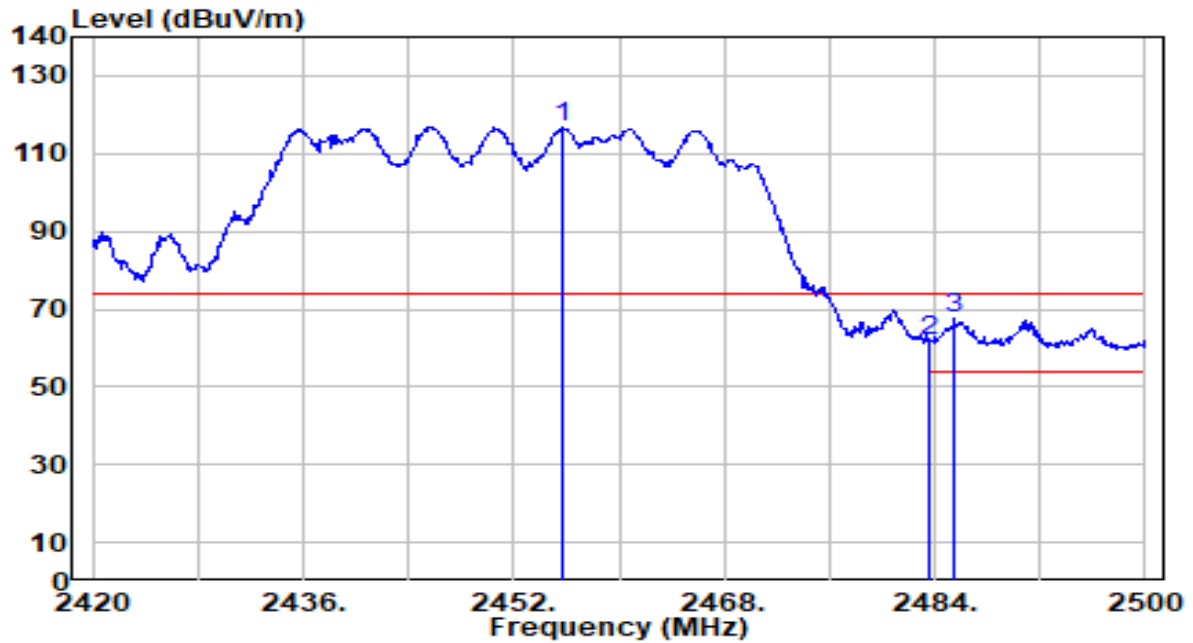


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2455.680	86.61	30.28	116.89	N/A	N/A	205	52	Peak
2	2483.500	31.68	30.32	62.00	-12.00	74.00	205	52	Peak
3	* 2485.440	37.22	30.32	67.54	-6.46	74.00	205	52	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE24000 Quad-Band Wi-Fi 7 Router	Date of Test	2023-09-06
Factor	DRH18-E	Temp. / Humidity	20°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11n-40MHz_TX_CH 9_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

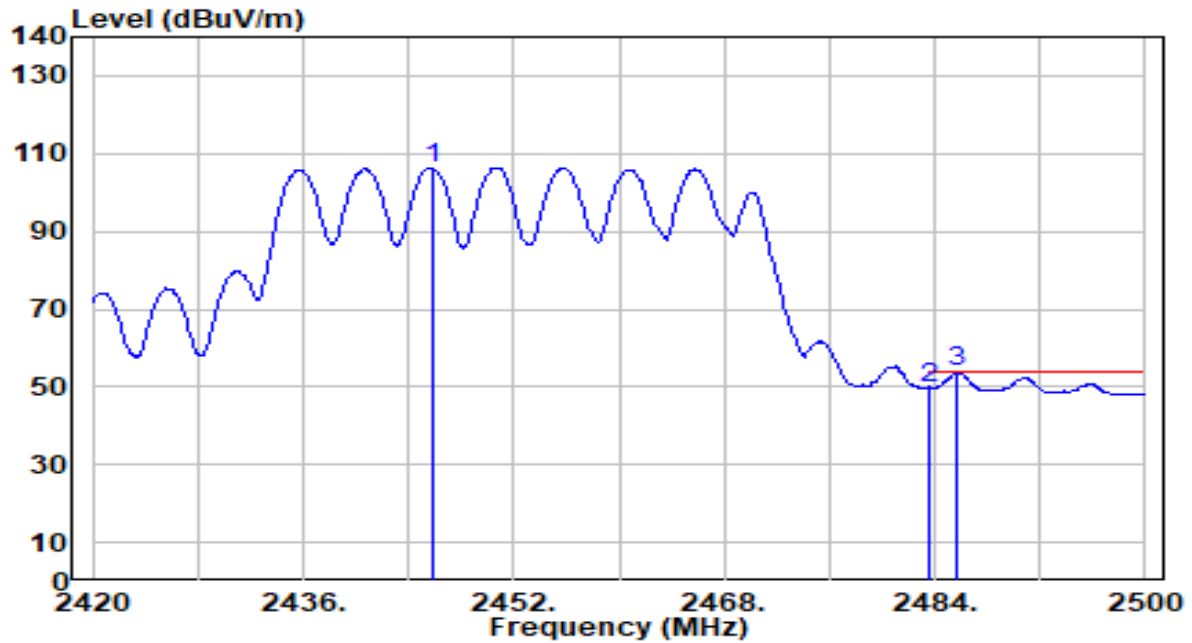


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2445.840	76.17	30.27	106.44	N/A	N/A	205	52	Average
2	2483.500	19.56	30.32	49.88	-4.12	54.00	205	52	Average
3	* 2485.760	23.49	30.32	53.81	-0.19	54.00	205	52	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE24000 Quad-Band Wi-Fi 7 Router	Date of Test	2023-09-06
Factor	DRH18-E	Temp. / Humidity	20°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-20MHz_TX_CH 1_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

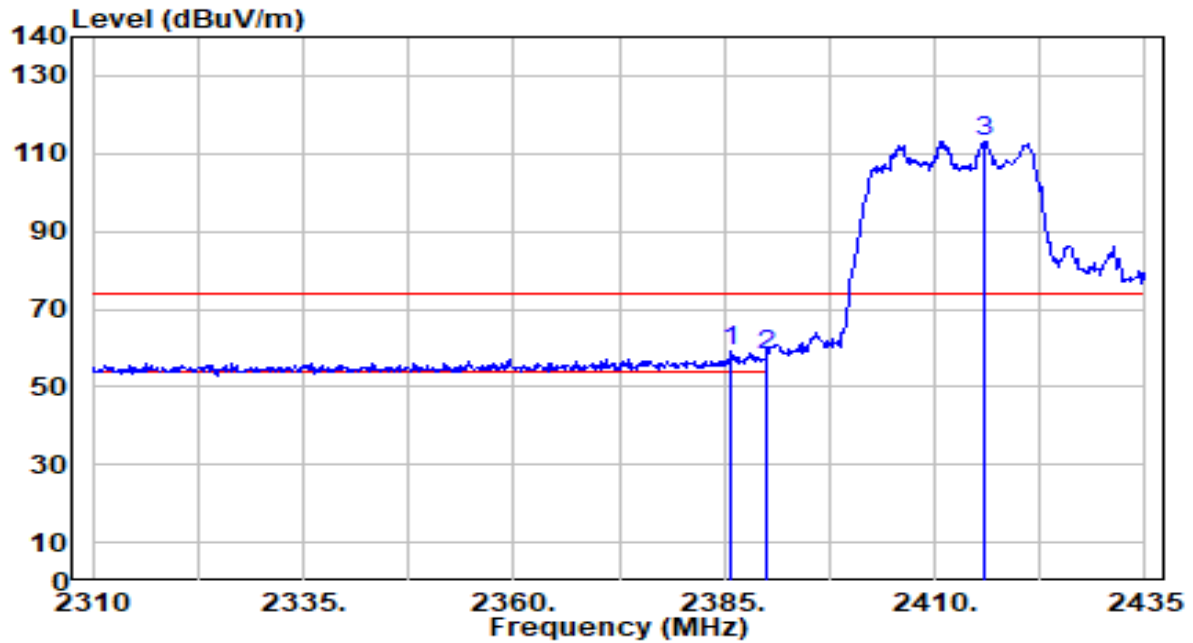


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2385.875	28.80	30.17	58.97	-15.03	74.00	213	226	Peak
2		2390.000	27.75	30.18	57.93	-16.07	74.00	213	226	Peak
3		2415.875	82.85	30.23	113.08	N/A	N/A	213	226	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE24000 Quad-Band Wi-Fi 7 Router	Date of Test	2023-09-06
Factor	DRH18-E	Temp. / Humidity	20°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-20MHz_TX_CH 1_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

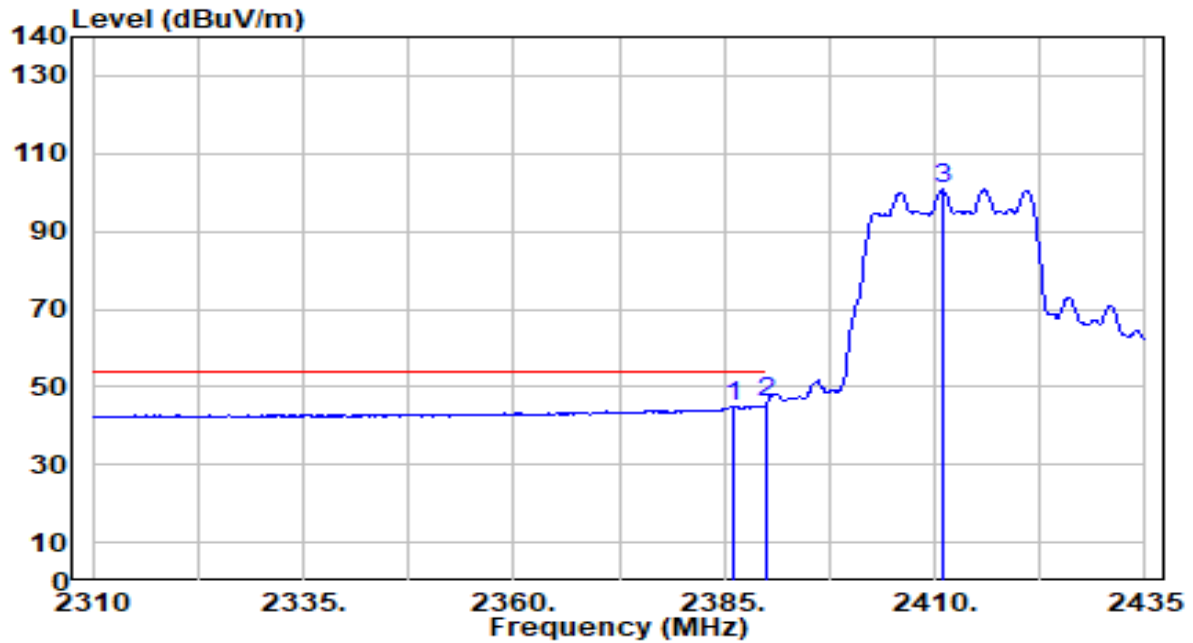


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2386.125	14.82	30.17	44.99	-9.01	54.00	213	226	Average
2	*	2390.000	15.53	30.18	45.71	-8.29	54.00	213	226	Average
3		2410.875	70.49	30.22	100.71	N/A	N/A	213	226	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE24000 Quad-Band Wi-Fi 7 Router	Date of Test	2023-09-06
Factor	DRH18-E	Temp. / Humidity	20°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-20MHz_TX_CH 1_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

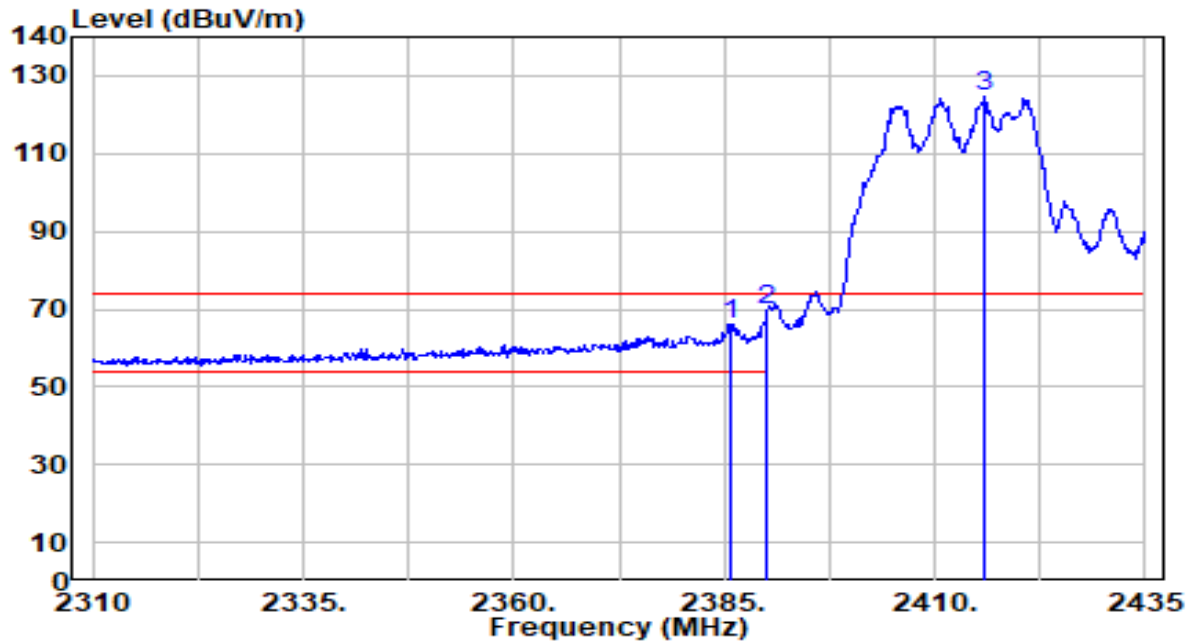


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2385.625	36.00	30.17	66.17	-7.83	74.00	200	50	Peak
2	*	2390.000	39.41	30.18	69.59	-4.41	74.00	200	50	Peak
3		2416.000	94.23	30.23	124.46	N/A	N/A	200	50	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE24000 Quad-Band Wi-Fi 7 Router	Date of Test	2023-09-06
Factor	DRH18-E	Temp. / Humidity	20°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-20MHz_TX_CH 1_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

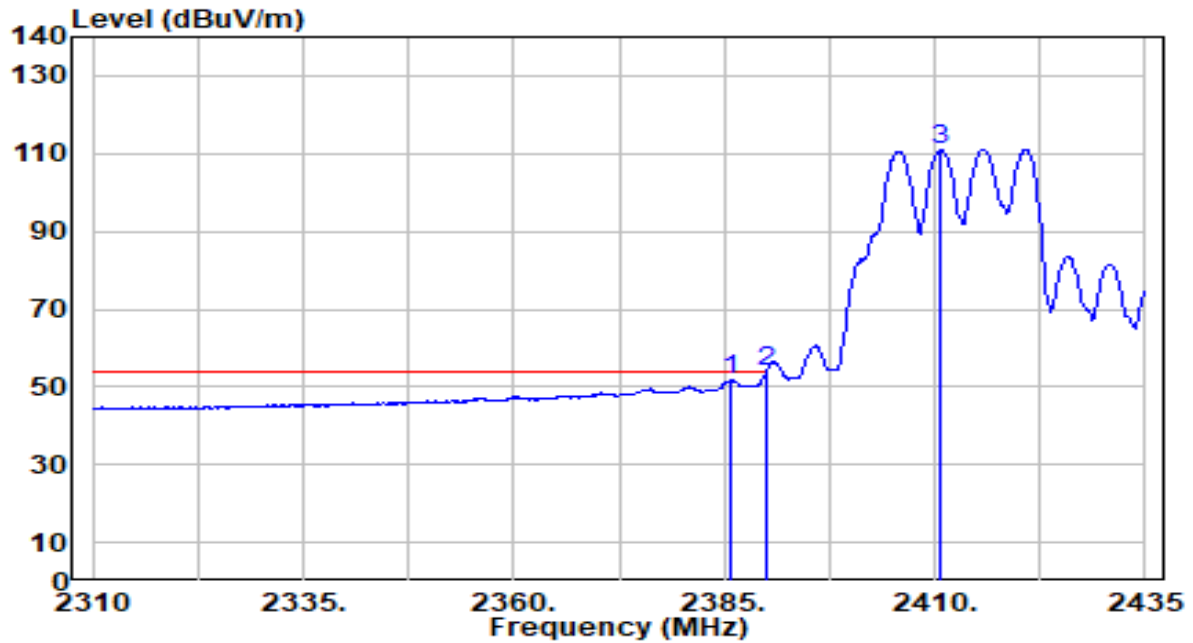


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2385.875	21.59	30.17	51.76	-2.24	54.00	200	50	Average
2	*	2390.000	23.69	30.18	53.87	-0.13	54.00	200	50	Average
3		2410.750	80.94	30.22	111.16	N/A	N/A	200	50	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE24000 Quad-Band Wi-Fi 7 Router	Date of Test	2023-09-06
Factor	DRH18-E	Temp. / Humidity	20°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-20MHz_TX_CH 6_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

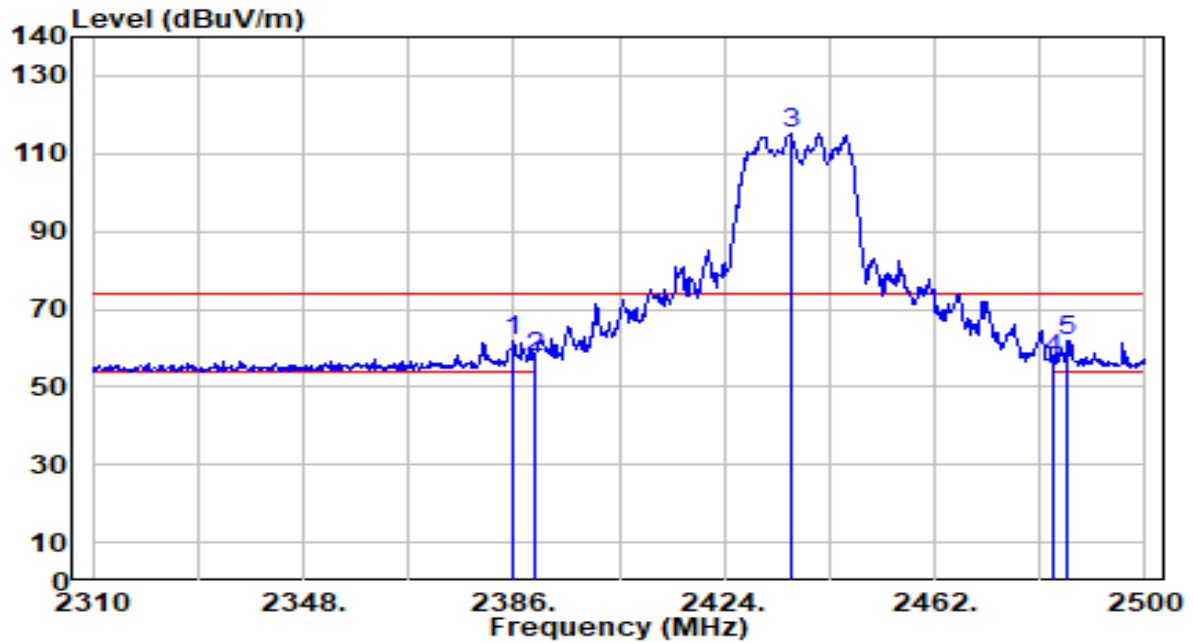


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2386.000	31.62	30.17	61.79	-12.21	74.00	210	226	Peak
2	2390.000	27.61	30.18	57.79	-16.21	74.00	210	226	Peak
3	2436.160	84.96	30.26	115.21	N/A	N/A	210	226	Peak
4	2483.500	26.68	30.32	57.00	-17.00	74.00	210	226	Peak
5	* 2486.130	31.59	30.32	61.91	-12.09	74.00	210	226	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE24000 Quad-Band Wi-Fi 7 Router	Date of Test	2023-09-06
Factor	DRH18-E	Temp. / Humidity	20°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-20MHz_TX_CH 6_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

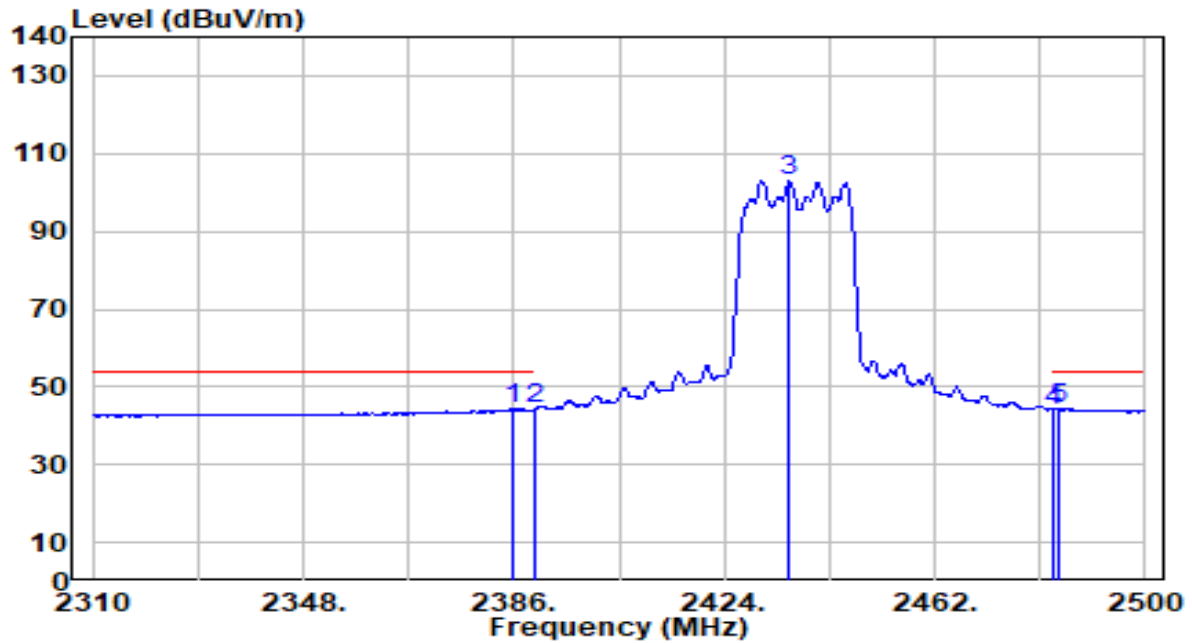


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2385.810	14.25	30.17	44.42	-9.58	54.00	210	226	Average
2	2390.000	14.11	30.18	44.29	-9.71	54.00	210	226	Average
3	2435.780	72.57	30.26	102.83	N/A	N/A	210	226	Average
4	2483.500	13.76	30.32	44.08	-9.92	54.00	210	226	Average
5	* 2484.230	14.12	30.32	44.44	-9.56	54.00	210	226	Average

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE24000 Quad-Band Wi-Fi 7 Router	Date of Test	2023-09-06
Factor	DRH18-E	Temp. / Humidity	20°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-20MHz_TX_CH 6_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

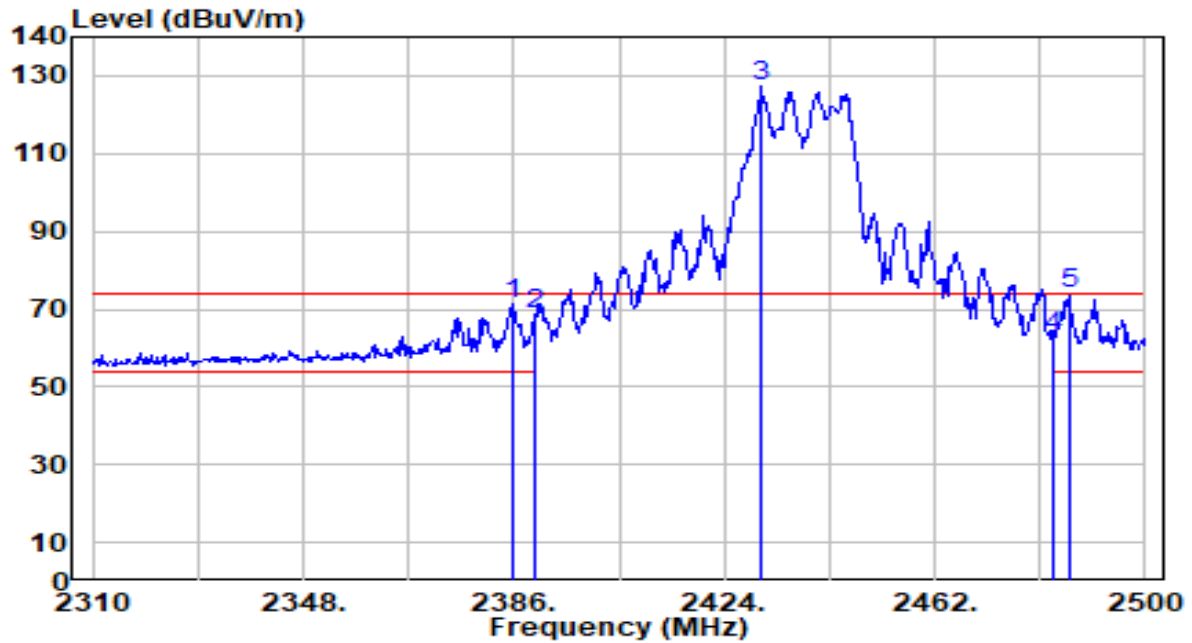


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2385.620	41.02	30.17	71.19	-2.81	74.00	200	53	Peak
2	2390.000	38.63	30.18	68.81	-5.19	74.00	200	53	Peak
3	2430.840	96.83	30.25	127.07	N/A	N/A	200	53	Peak
4	2483.500	32.73	30.32	63.05	-10.95	74.00	200	53	Peak
5	* 2486.320	43.51	30.32	73.83	-0.17	74.00	200	53	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE24000 Quad-Band Wi-Fi 7 Router	Date of Test	2023-09-06
Factor	DRH18-E	Temp. / Humidity	20°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-20MHz_TX_CH 6_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

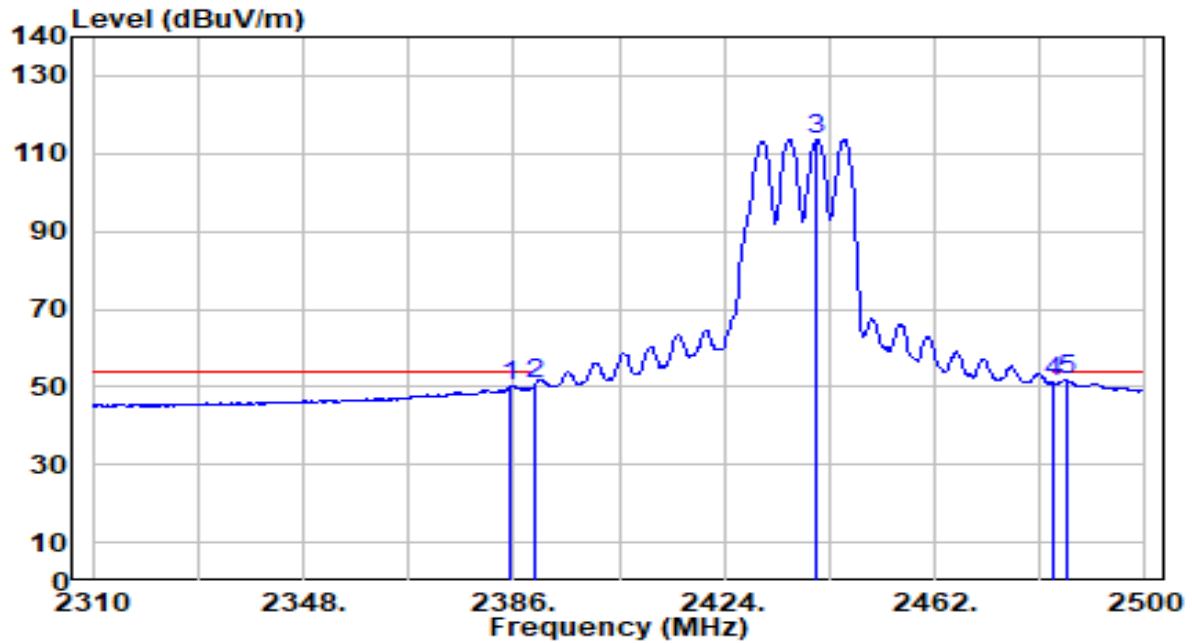


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2385.430	19.89	30.17	50.06	-3.94	54.00	200	53	Average
2	2390.000	20.74	30.18	50.92	-3.08	54.00	200	53	Average
3	2440.720	83.21	30.26	113.47	N/A	N/A	200	53	Average
4	2483.500	20.69	30.32	51.01	-2.99	54.00	200	53	Average
5	* 2485.750	21.68	30.32	52.00	-2.00	54.00	200	53	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE24000 Quad-Band Wi-Fi 7 Router	Date of Test	2023-09-06
Factor	DRH18-E	Temp. / Humidity	20°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-20MHz_TX_CH 11_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

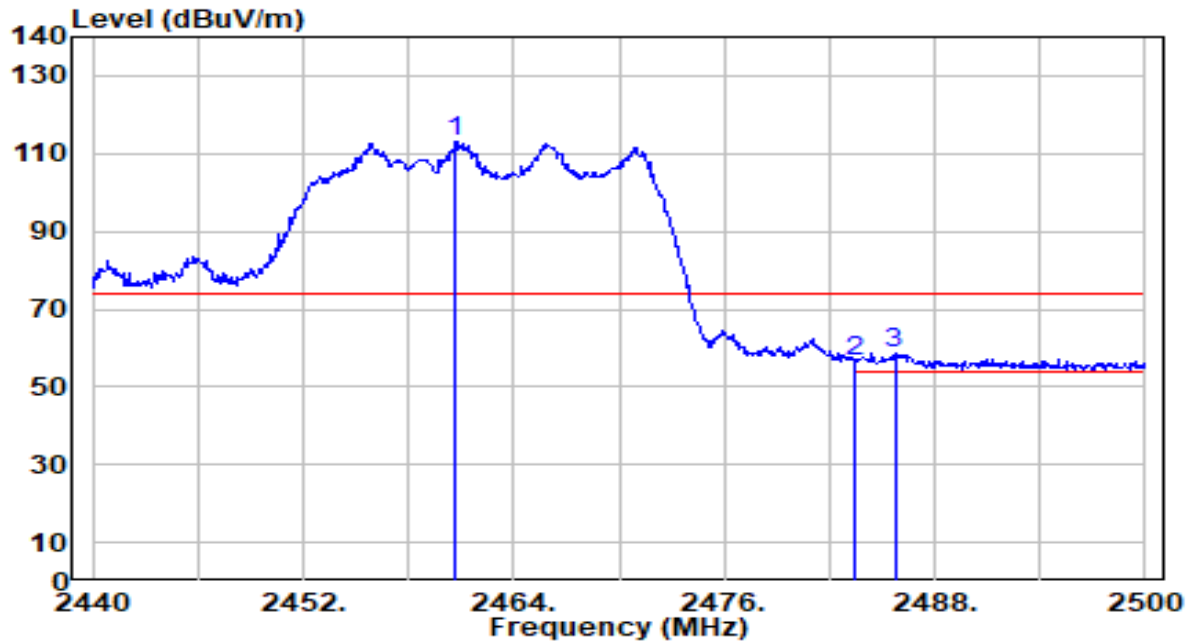


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2460.640	82.78	30.29	113.07	N/A	N/A	202	228	Peak
2	2483.500	26.16	30.32	56.48	-17.52	74.00	202	228	Peak
3	* 2485.720	28.15	30.32	58.47	-15.53	74.00	202	228	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE24000 Quad-Band Wi-Fi 7 Router	Date of Test	2023-09-06
Factor	DRH18-E	Temp. / Humidity	20°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-20MHz_TX_CH 11_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

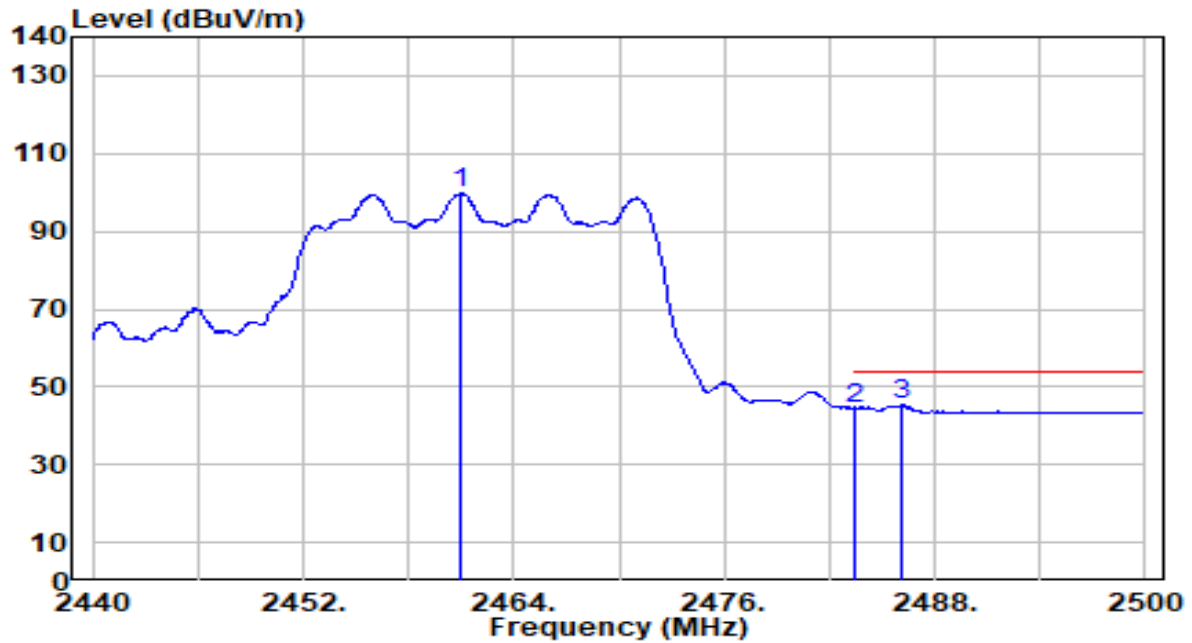


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2461.000	69.41	30.29	99.70	N/A	N/A	202	228	Average
2	2483.500	14.31	30.32	44.63	-9.37	54.00	202	228	Average
3	* 2486.080	14.88	30.32	45.20	-8.80	54.00	202	228	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE24000 Quad-Band Wi-Fi 7 Router	Date of Test	2023-09-06
Factor	DRH18-E	Temp. / Humidity	20°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-20MHz_TX_CH 11_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

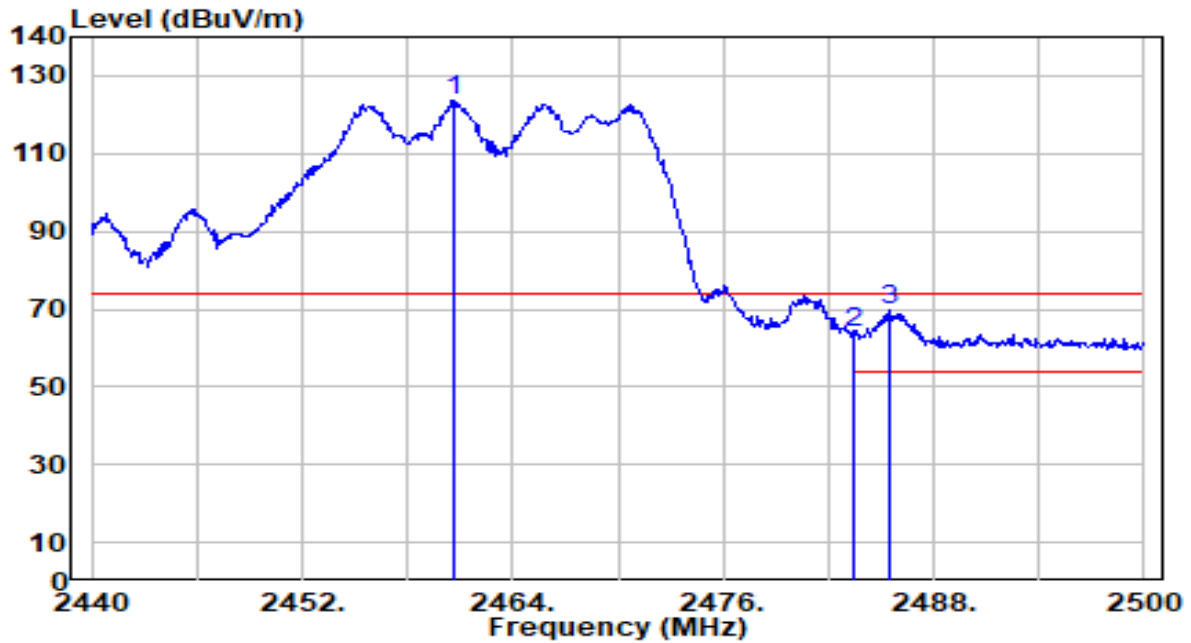


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2460.580	93.30	30.29	123.59	N/A	N/A	225	54	Peak
2	2483.500	33.42	30.32	63.74	-10.26	74.00	225	54	Peak
3	* 2485.480	39.31	30.32	69.63	-4.37	74.00	225	54	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE24000 Quad-Band Wi-Fi 7 Router	Date of Test	2023-09-06
Factor	DRH18-E	Temp. / Humidity	20°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-20MHz_TX_CH 11_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

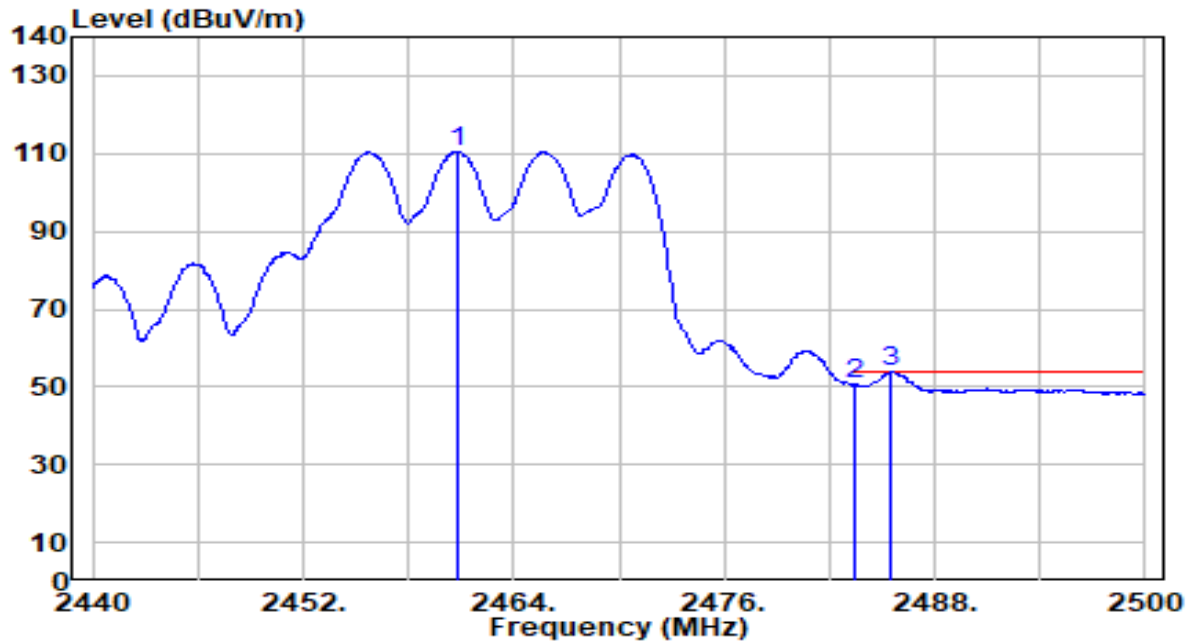


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2460.760	80.20	30.29	110.49	N/A	N/A	225	54	Average
2	2483.500	20.20	30.32	50.51	-3.49	54.00	225	54	Average
3	* 2485.420	23.57	30.32	53.89	-0.11	54.00	225	54	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE24000 Quad-Band Wi-Fi 7 Router	Date of Test	2023-09-06
Factor	DRH18-E	Temp. / Humidity	20°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-40MHz_TX_CH 3_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

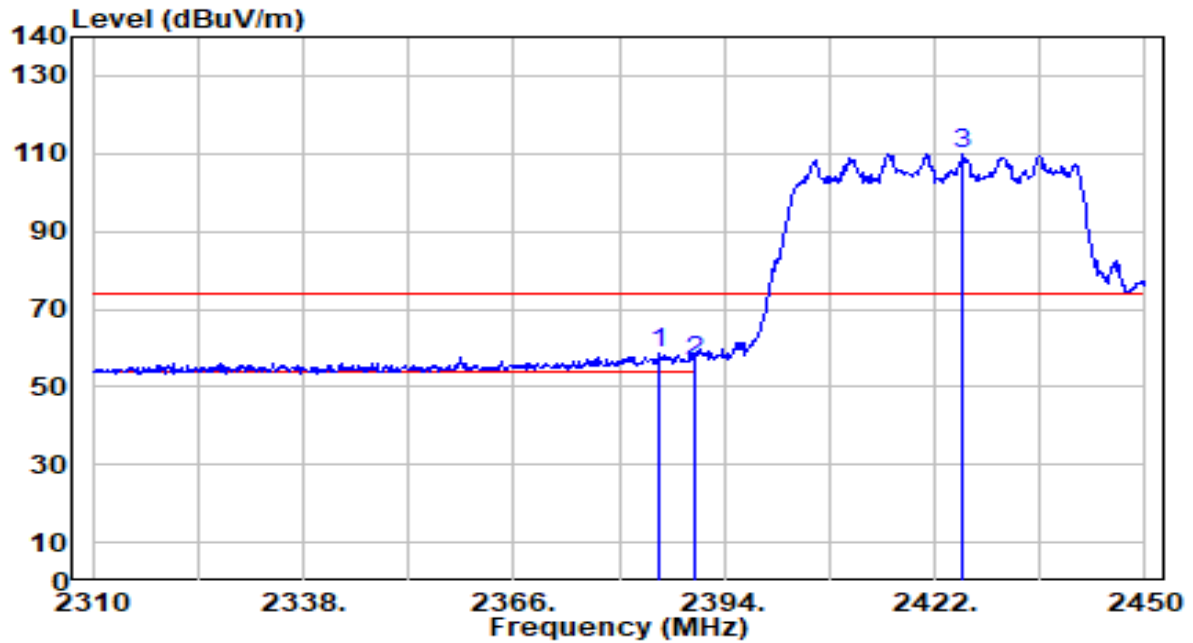


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2385.460	28.54	30.17	58.71	-15.29	74.00	212	227	Peak
2		2390.000	26.55	30.18	56.73	-17.27	74.00	212	227	Peak
3		2425.780	79.91	30.24	110.15	N/A	N/A	212	227	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE24000 Quad-Band Wi-Fi 7 Router	Date of Test	2023-09-06
Factor	DRH18-E	Temp. / Humidity	20°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-40MHz_TX_CH 3_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

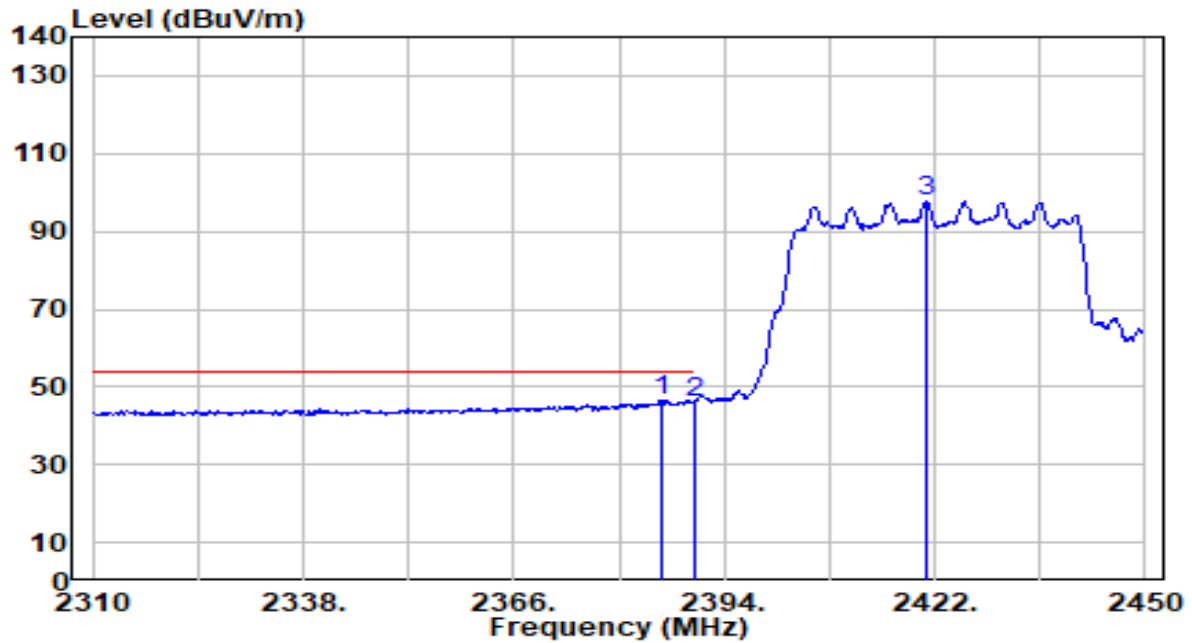


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2385.740	16.19	30.17	46.35	-7.65	54.00	212	227	Average
2		2390.000	15.77	30.18	45.95	-8.05	54.00	212	227	Average
3		2420.740	67.66	30.24	97.89	N/A	N/A	212	227	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE24000 Quad-Band Wi-Fi 7 Router	Date of Test	2023-09-06
Factor	DRH18-E	Temp. / Humidity	20°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-40MHz_TX_CH 3_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

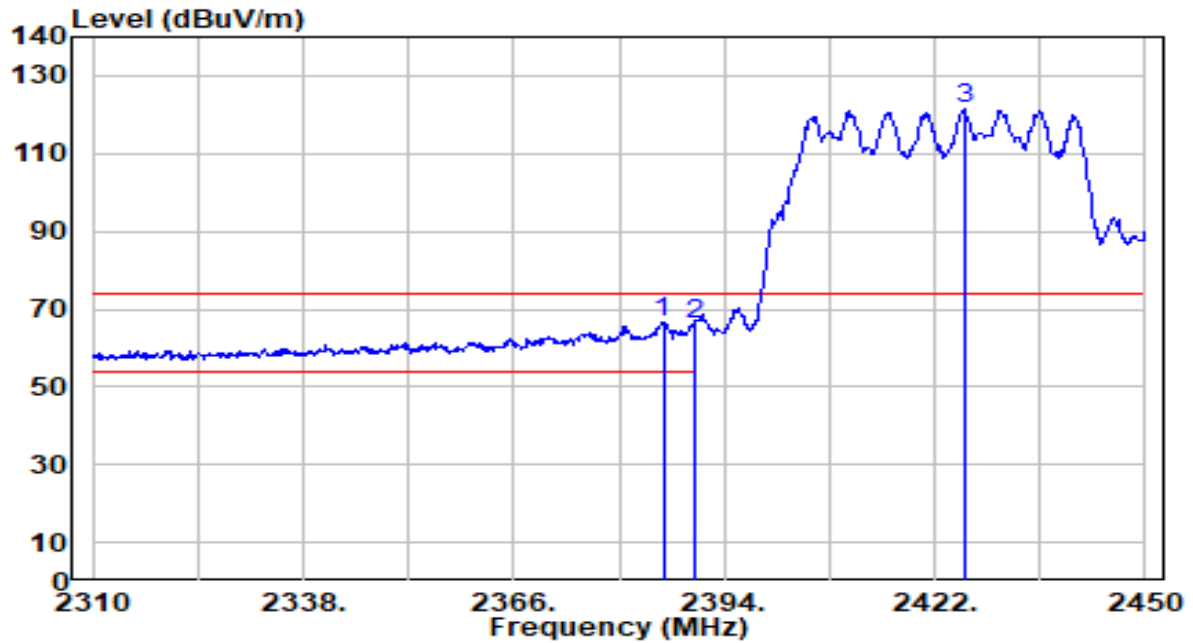


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2385.880	36.56	30.17	66.73	-7.27	74.00	200	50	Peak
2		2390.000	35.83	30.18	66.01	-7.99	74.00	200	50	Peak
3		2425.920	91.33	30.24	121.57	N/A	N/A	200	50	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE24000 Quad-Band Wi-Fi 7 Router	Date of Test	2023-09-06
Factor	DRH18-E	Temp. / Humidity	20°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-40MHz_TX_CH 3_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

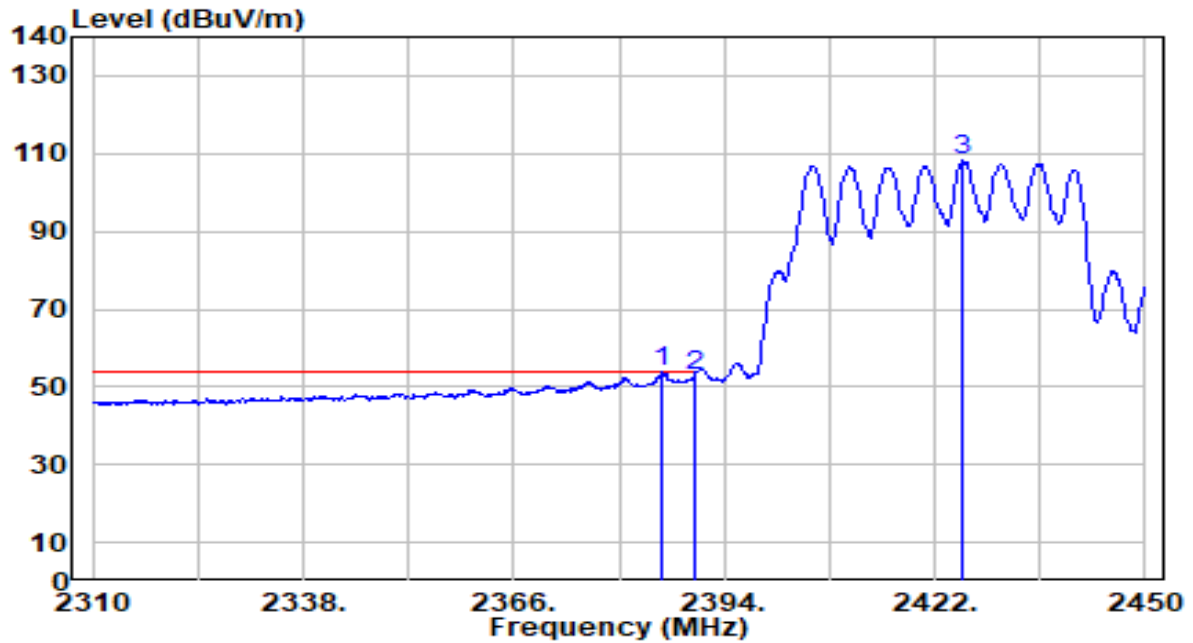


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2385.740	23.67	30.17	53.84	-0.16	54.00	200	50	Average
2		2390.000	22.60	30.18	52.78	-1.22	54.00	200	50	Average
3		2425.640	78.06	30.24	108.31	N/A	N/A	200	50	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE24000 Quad-Band Wi-Fi 7 Router	Date of Test	2023-09-06
Factor	DRH18-E	Temp. / Humidity	20°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-40MHz_TX_CH 6_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

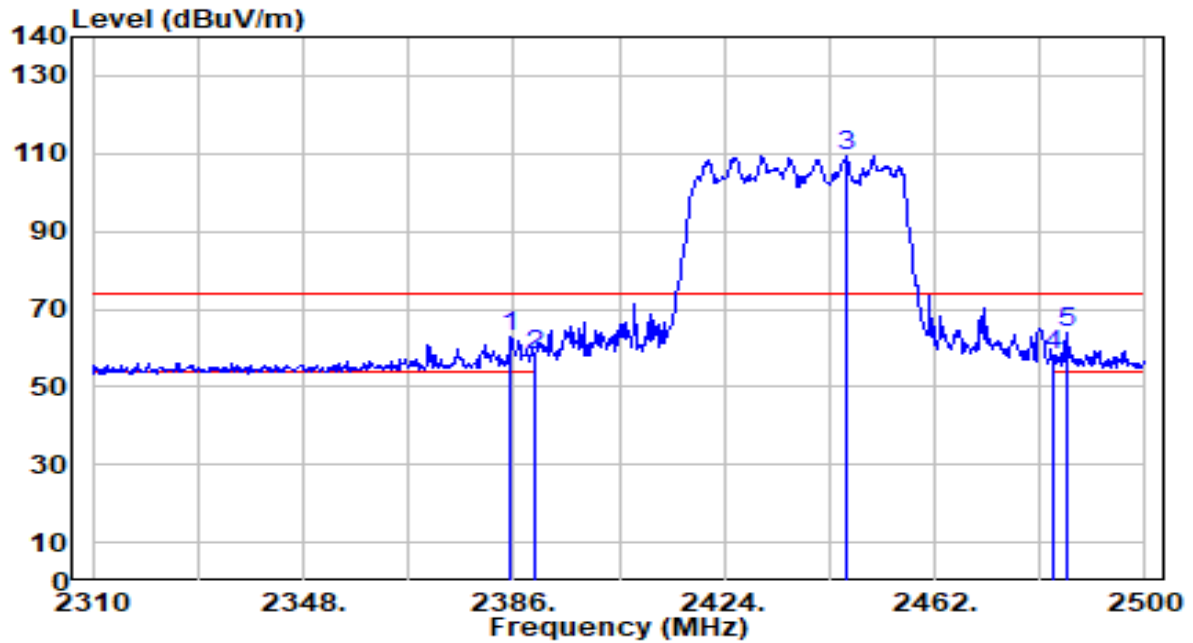


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2385.430	32.62	30.17	62.78	-11.22	74.00	212	227	Peak
2	2390.000	27.84	30.18	58.02	-15.98	74.00	212	227	Peak
3	2446.040	79.23	30.27	109.49	N/A	N/A	212	227	Peak
4	2483.500	27.89	30.32	58.21	-15.79	74.00	212	227	Peak
5	* 2485.940	33.56	30.32	63.88	-10.12	74.00	212	227	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE24000 Quad-Band Wi-Fi 7 Router	Date of Test	2023-09-06
Factor	DRH18-E	Temp. / Humidity	20°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-40MHz_TX_CH 6_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

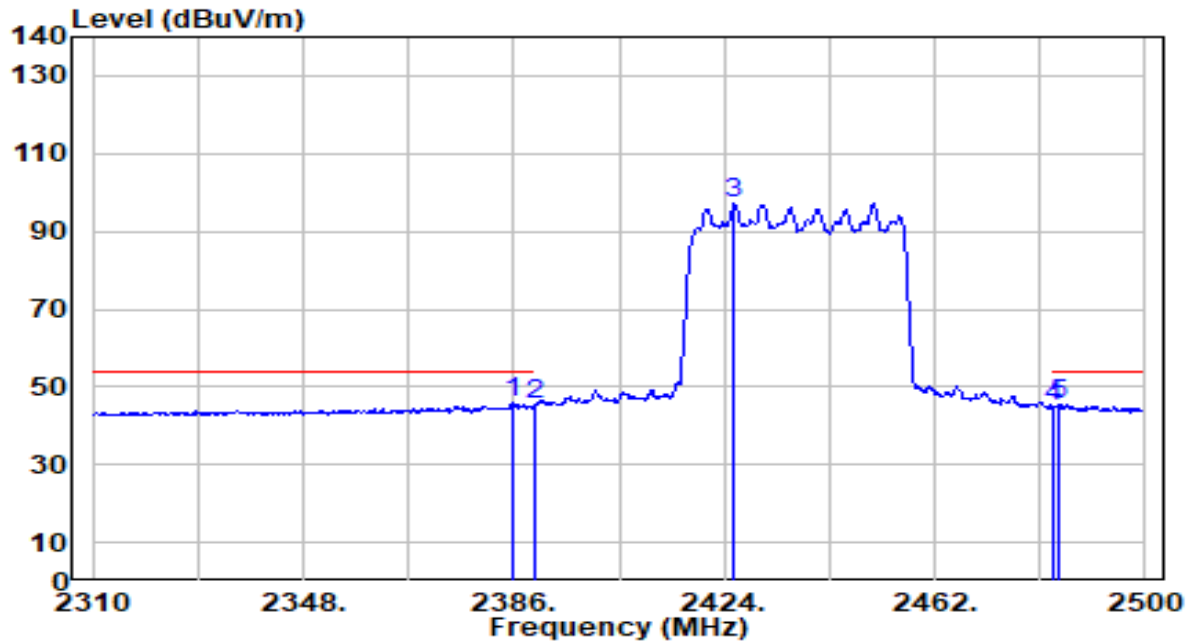


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2385.810	15.62	30.17	45.78	-8.22	54.00	212	227	Average
2		2390.000	15.06	30.18	45.24	-8.76	54.00	212	227	Average
3		2425.900	66.82	30.24	97.06	N/A	N/A	212	227	Average
4		2483.500	14.67	30.32	44.99	-9.01	54.00	212	227	Average
5		2484.230	15.02	30.32	45.34	-8.66	54.00	212	227	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE24000 Quad-Band Wi-Fi 7 Router	Date of Test	2023-09-06
Factor	DRH18-E	Temp. / Humidity	20°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-40MHz_TX_CH 6_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

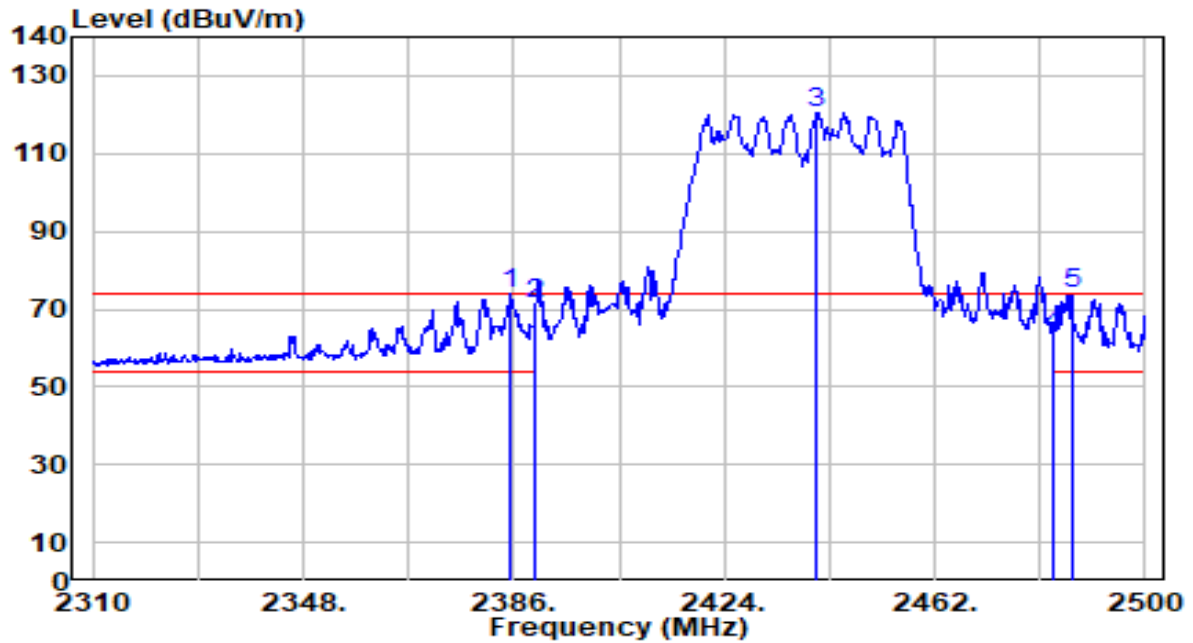


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2385.430	43.54	30.17	73.70	-0.30	74.00	200	51	Peak
2	2390.000	41.06	30.18	71.24	-2.76	74.00	200	51	Peak
3	2440.720	90.12	30.26	120.39	N/A	N/A	200	51	Peak
4	2483.500	33.26	30.32	63.58	-10.42	74.00	200	51	Peak
5	* 2486.700	43.53	30.32	73.86	-0.14	74.00	200	51	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE24000 Quad-Band Wi-Fi 7 Router	Date of Test	2023-09-06
Factor	DRH18-E	Temp. / Humidity	20°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-40MHz_TX_CH 6_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

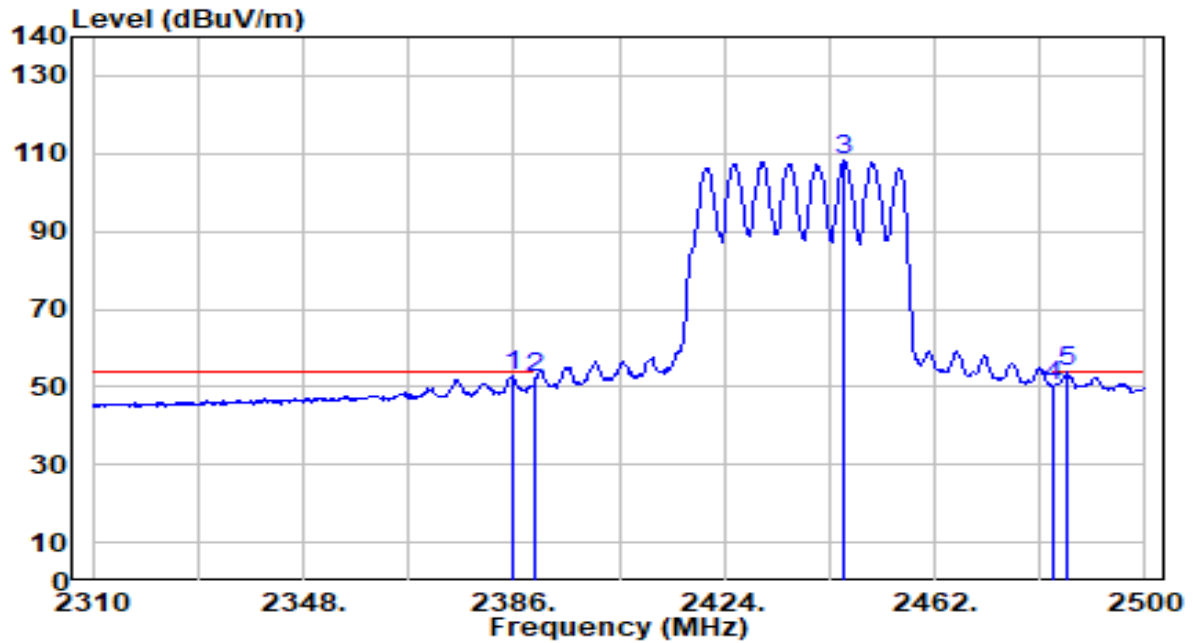


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2385.810	22.48	30.17	52.64	-1.36	54.00	200	51	Average
2	2390.000	21.91	30.18	52.08	-1.92	54.00	200	51	Average
3	2445.660	77.95	30.27	108.22	N/A	N/A	200	51	Average
4	2483.500	19.91	30.32	50.22	-3.78	54.00	200	51	Average
5	* 2485.940	23.58	30.32	53.90	-0.10	54.00	200	51	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE24000 Quad-Band Wi-Fi 7 Router	Date of Test	2023-09-06
Factor	DRH18-E	Temp. / Humidity	20°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-40MHz_TX_CH 9_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

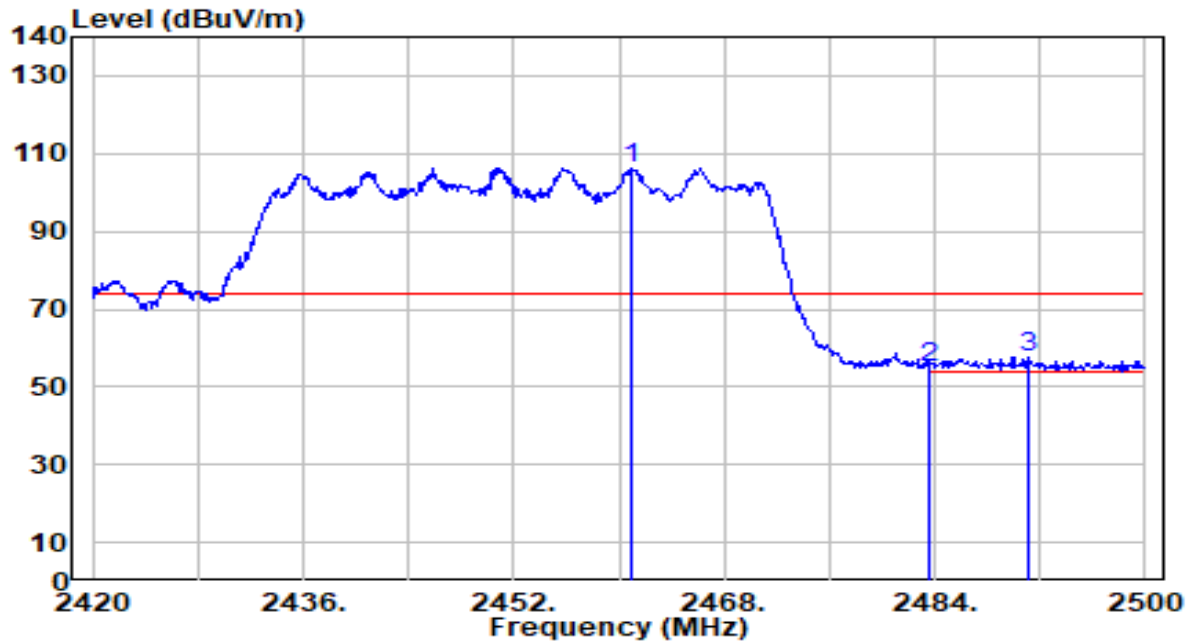


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2460.880	75.83	30.29	106.12	N/A	N/A	202	230	Peak
2	2483.500	24.85	30.32	55.17	-18.83	74.00	202	230	Peak
3	* 2491.040	27.23	30.33	57.56	-16.44	74.00	202	230	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE24000 Quad-Band Wi-Fi 7 Router	Date of Test	2023-09-06
Factor	DRH18-E	Temp. / Humidity	20°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-40MHz_TX_CH 9_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

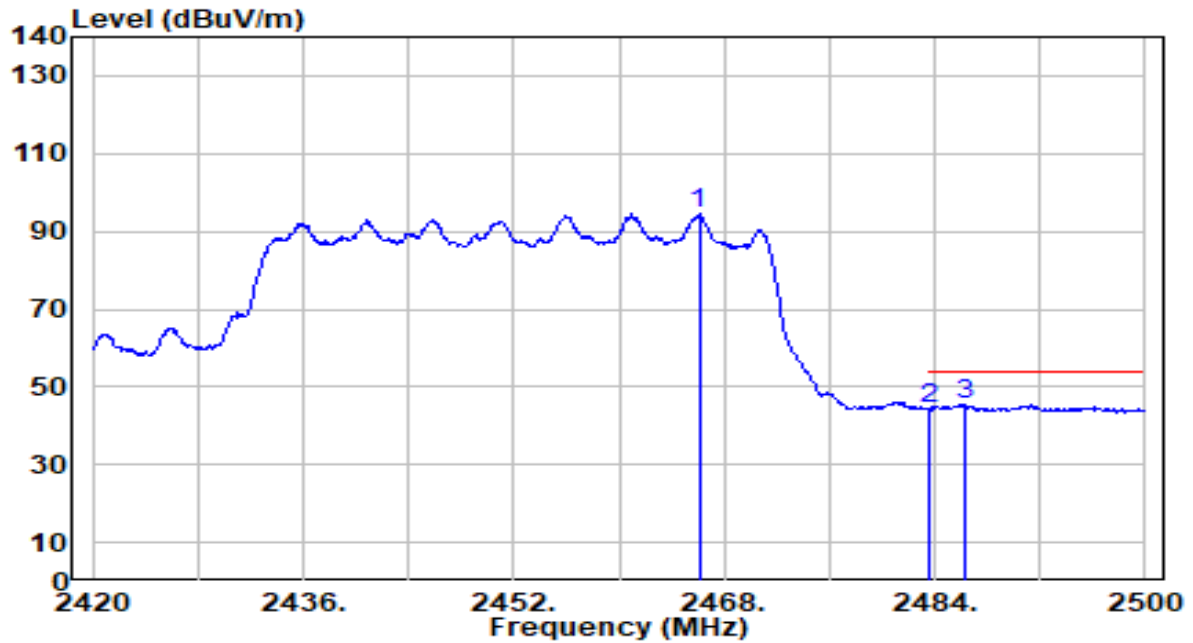


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2466.080	64.15	30.30	94.44	N/A	N/A	202	230	Average
2	2483.500	14.06	30.32	44.38	-9.62	54.00	202	230	Average
3	* 2486.320	15.12	30.32	45.44	-8.56	54.00	202	230	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE24000 Quad-Band Wi-Fi 7 Router	Date of Test	2023-09-06
Factor	DRH18-E	Temp. / Humidity	20°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-40MHz_TX_CH 9_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

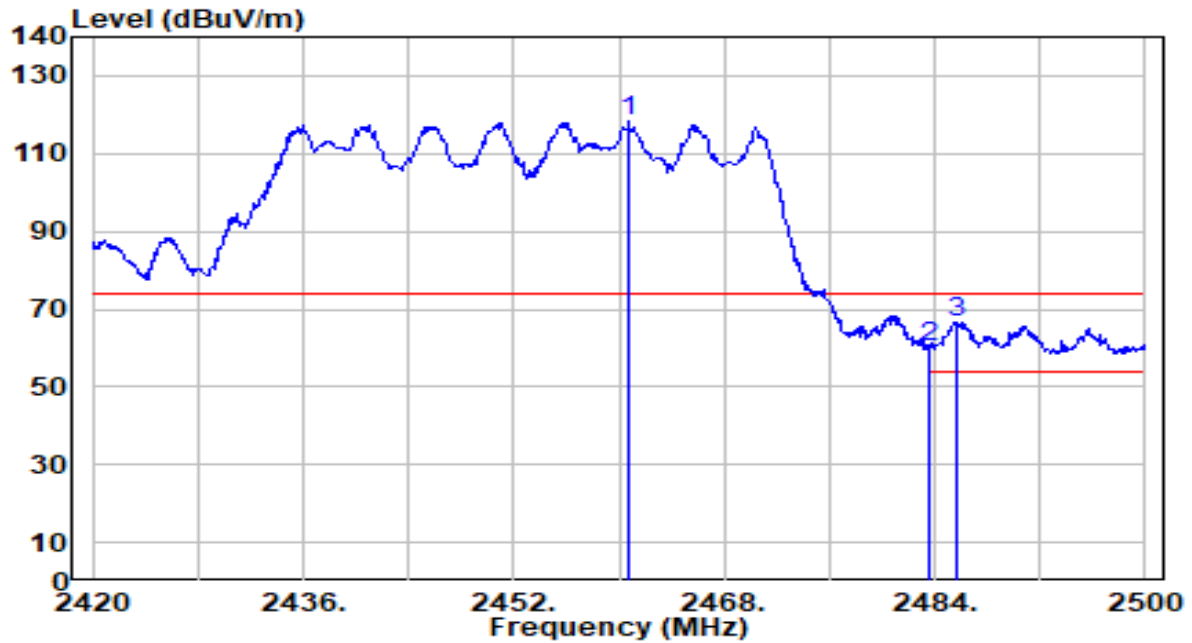


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2460.720	87.80	30.29	118.08	N/A	N/A	205	52	Peak
2	2483.500	29.91	30.32	60.23	-13.77	74.00	205	52	Peak
3	* 2485.680	36.45	30.32	66.77	-7.23	74.00	205	52	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE24000 Quad-Band Wi-Fi 7 Router	Date of Test	2023-09-06
Factor	DRH18-E	Temp. / Humidity	20°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-40MHz_TX_CH 9_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

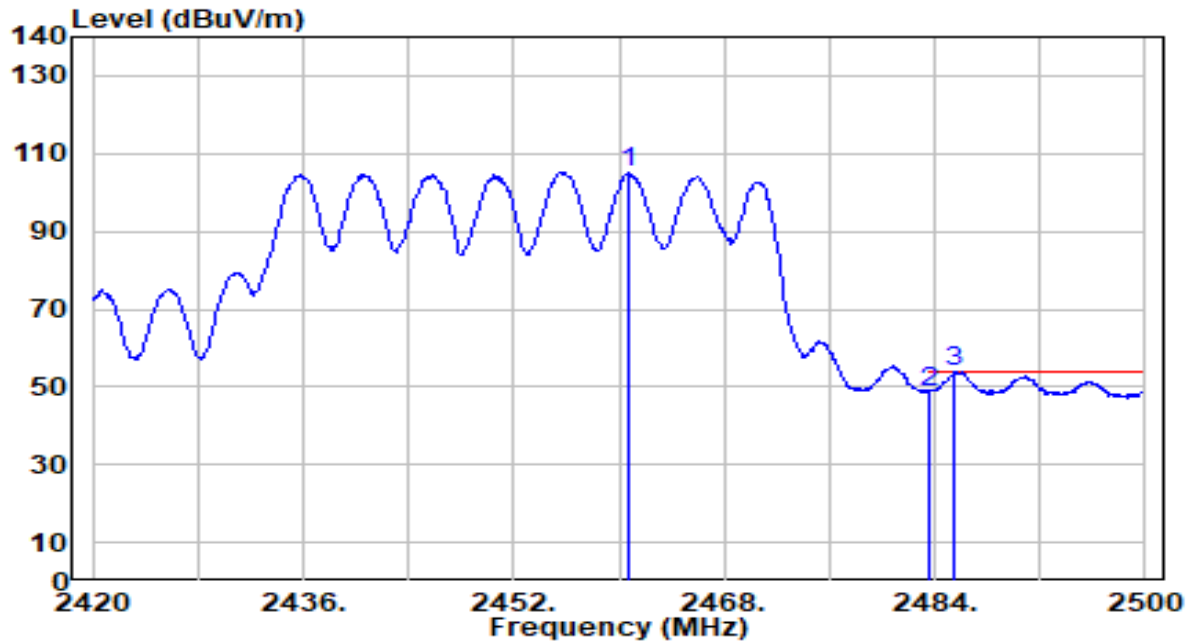


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2460.640	75.06	30.29	105.34	N/A	N/A	205	52	Average
2	2483.500	18.46	30.32	48.78	-5.22	54.00	205	52	Average
3	* 2485.520	23.51	30.32	53.83	-0.17	54.00	205	52	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE24000 Quad-Band Wi-Fi 7 Router	Date of Test	2023-09-06
Factor	DRH18-E	Temp. / Humidity	20°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-20MHz_TX_CH 1_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

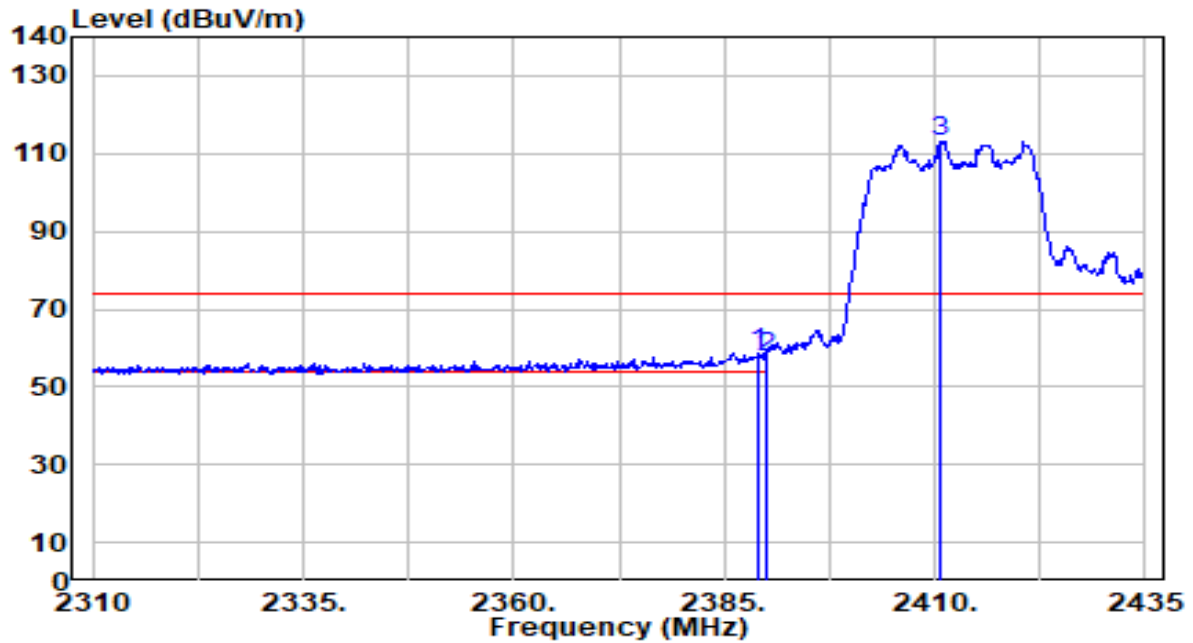


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2389.000	28.56	30.18	58.74	-15.26	74.00	212	227	Peak
2		2390.000	27.22	30.18	57.40	-16.60	74.00	212	227	Peak
3		2410.500	82.84	30.22	113.07	N/A	N/A	212	227	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE24000 Quad-Band Wi-Fi 7 Router	Date of Test	2023-09-06
Factor	DRH18-E	Temp. / Humidity	20°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-20MHz_TX_CH 1_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

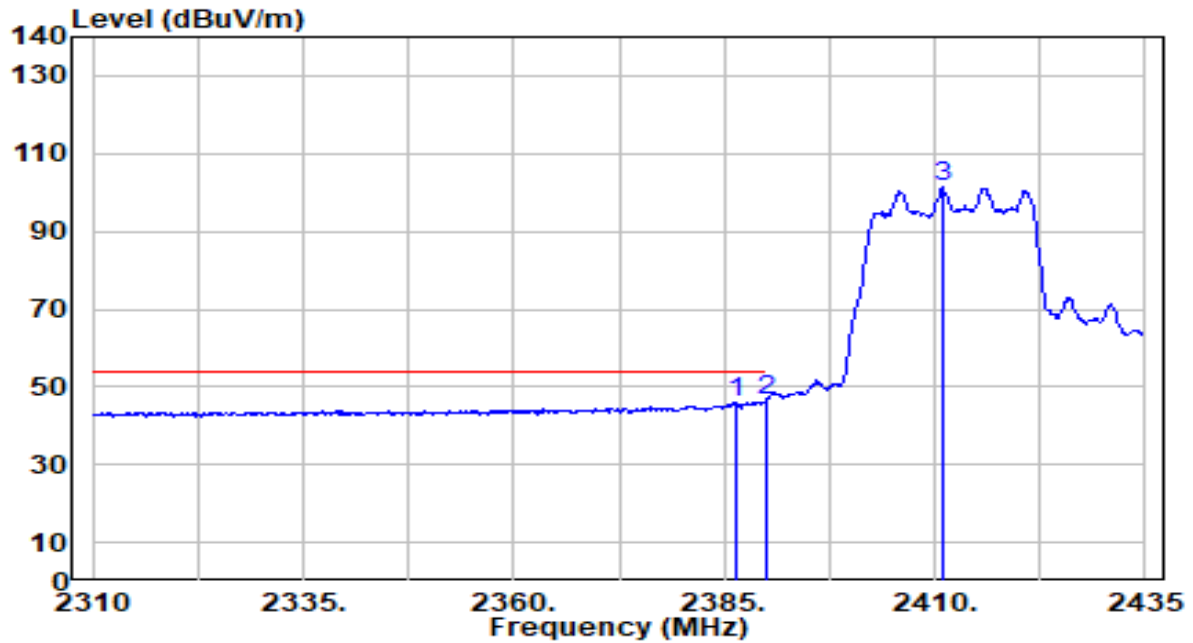


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2386.500	15.81	30.17	45.98	-8.02	54.00	212	227	Average
2	*	2390.000	16.26	30.18	46.44	-7.56	54.00	212	227	Average
3		2410.875	71.06	30.22	101.28	N/A	N/A	212	227	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE24000 Quad-Band Wi-Fi 7 Router	Date of Test	2023-09-06
Factor	DRH18-E	Temp. / Humidity	20°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-20MHz_TX_CH 1_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

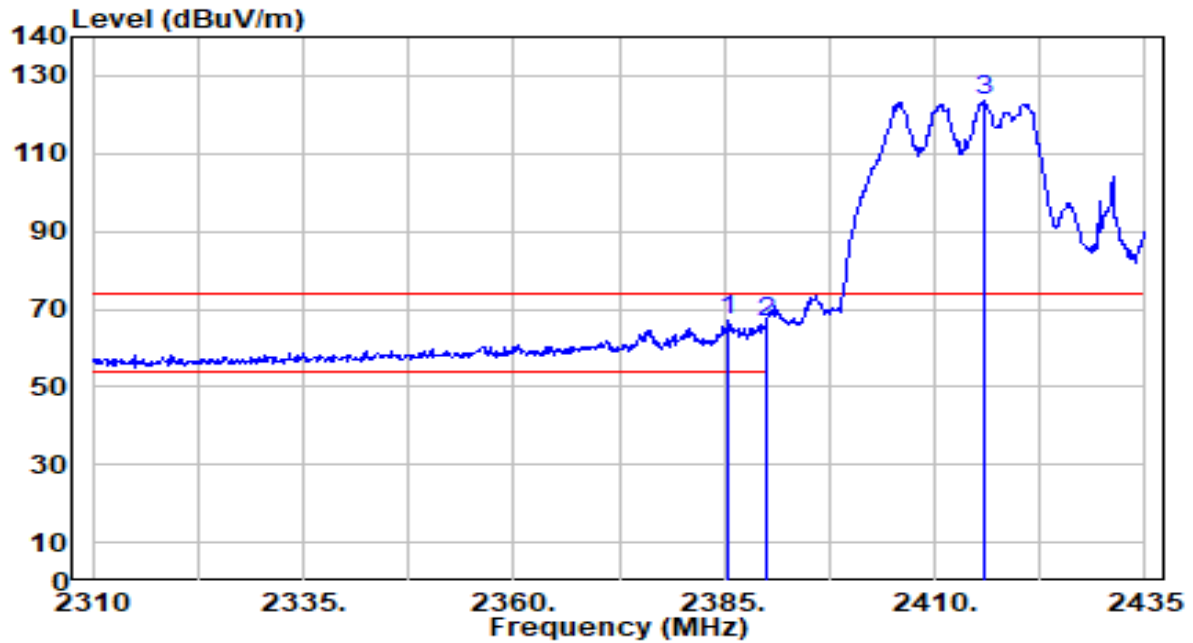


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2385.500	36.89	30.17	67.06	-6.94	74.00	200	50	Peak
2		2390.000	36.38	30.18	66.56	-7.44	74.00	200	50	Peak
3		2415.750	93.64	30.23	123.87	N/A	N/A	200	50	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE24000 Quad-Band Wi-Fi 7 Router	Date of Test	2023-09-06
Factor	DRH18-E	Temp. / Humidity	20°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-20MHz_TX_CH 1_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

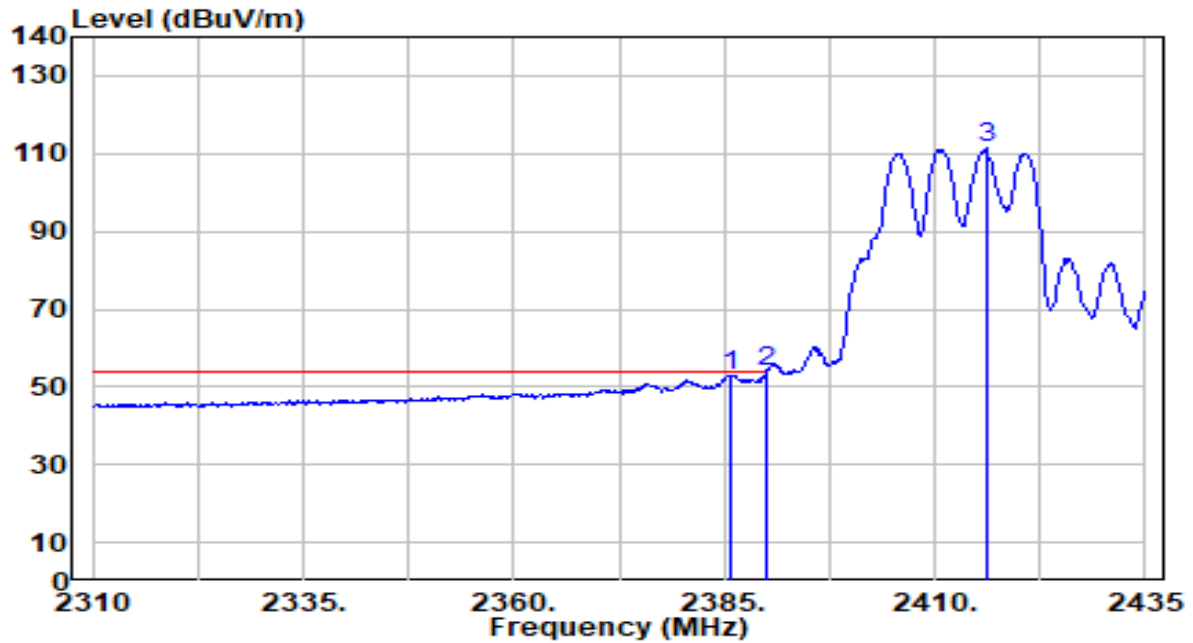


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2385.750	22.89	30.17	53.06	-0.94	54.00	200	50	Average
2	*	2390.000	23.63	30.18	53.81	-0.19	54.00	200	50	Average
3		2416.250	81.00	30.23	111.23	N/A	N/A	200	50	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE24000 Quad-Band Wi-Fi 7 Router	Date of Test	2023-09-06
Factor	DRH18-E	Temp. / Humidity	20°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-20MHz_TX_CH 6_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

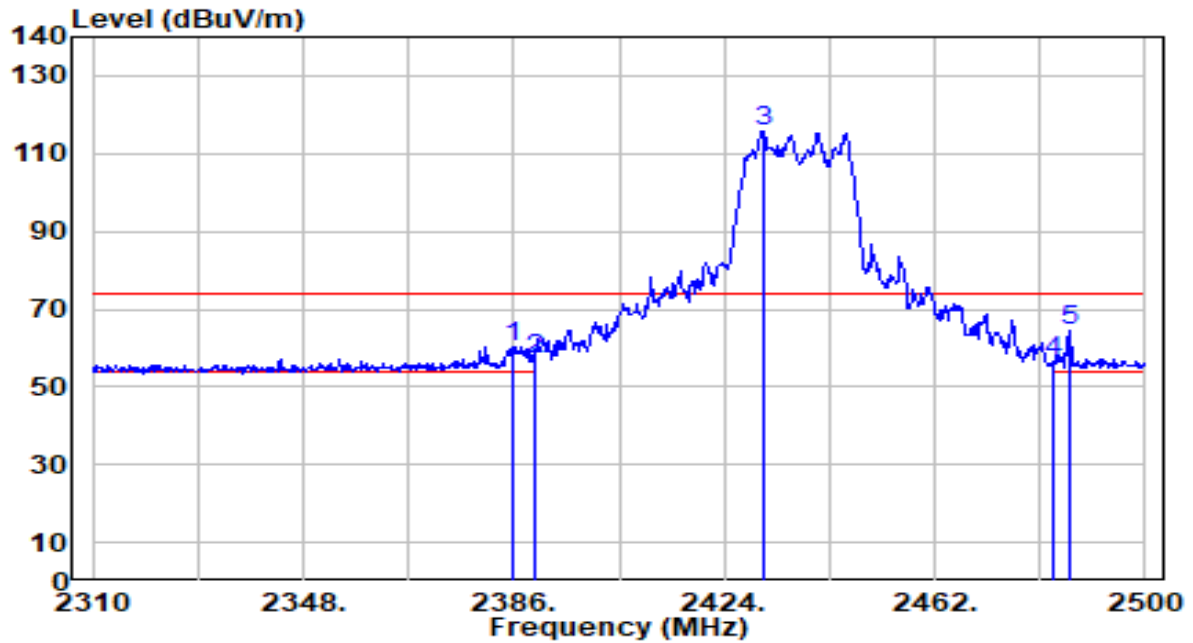


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2386.000	30.28	30.17	60.45	-13.55	74.00	211	225	Peak
2	2390.000	26.84	30.18	57.02	-16.98	74.00	211	225	Peak
3	2431.030	85.24	30.25	115.49	N/A	N/A	211	225	Peak
4	2483.500	26.32	30.32	56.64	-17.36	74.00	211	225	Peak
5	* 2486.320	34.20	30.32	64.52	-9.48	74.00	211	225	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE24000 Quad-Band Wi-Fi 7 Router	Date of Test	2023-09-06
Factor	DRH18-E	Temp. / Humidity	20°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-20MHz_TX_CH 6_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

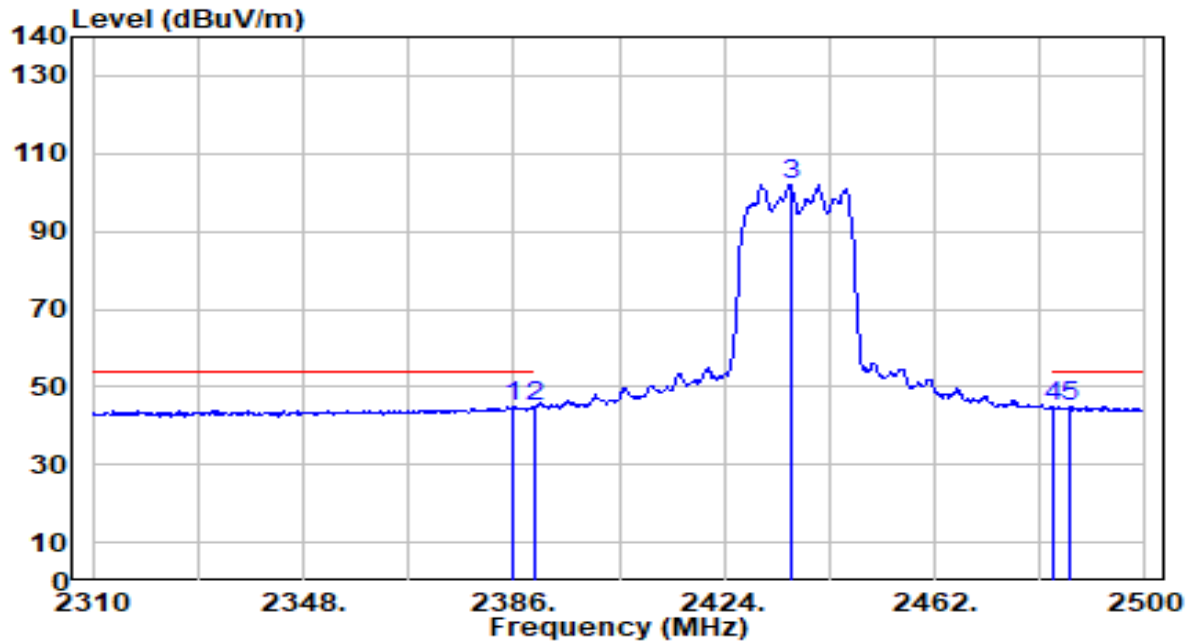


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2386.000	14.64	30.17	44.81	-9.19	54.00	211	225	Average
2	*	2390.000	14.85	30.18	45.03	-8.97	54.00	211	225	Average
3		2435.970	71.85	30.26	102.10	N/A	N/A	211	225	Average
4		2483.500	14.41	30.32	44.73	-9.27	54.00	211	225	Average
5		2486.320	14.55	30.32	44.87	-9.13	54.00	211	225	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE24000 Quad-Band Wi-Fi 7 Router	Date of Test	2023-09-06
Factor	DRH18-E	Temp. / Humidity	20°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-20MHz_TX_CH 6_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

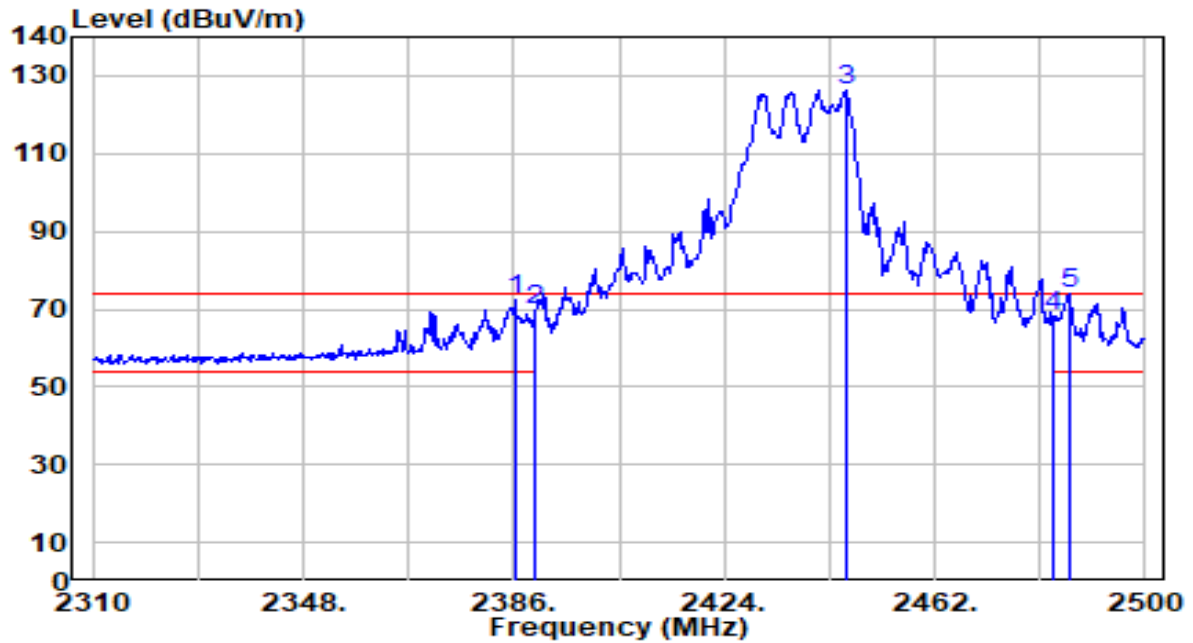


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2386.190	42.09	30.17	72.26	-1.74	74.00	200	53	Peak
2	2390.000	39.43	30.18	69.61	-4.39	74.00	200	53	Peak
3	2445.850	96.13	30.27	126.40	N/A	N/A	200	53	Peak
4	2483.500	37.72	30.32	68.03	-5.97	74.00	200	53	Peak
5	* 2486.320	43.55	30.32	73.87	-0.13	74.00	200	53	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE24000 Quad-Band Wi-Fi 7 Router	Date of Test	2023-09-06
Factor	DRH18-E	Temp. / Humidity	20°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-20MHz_TX_CH 6_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

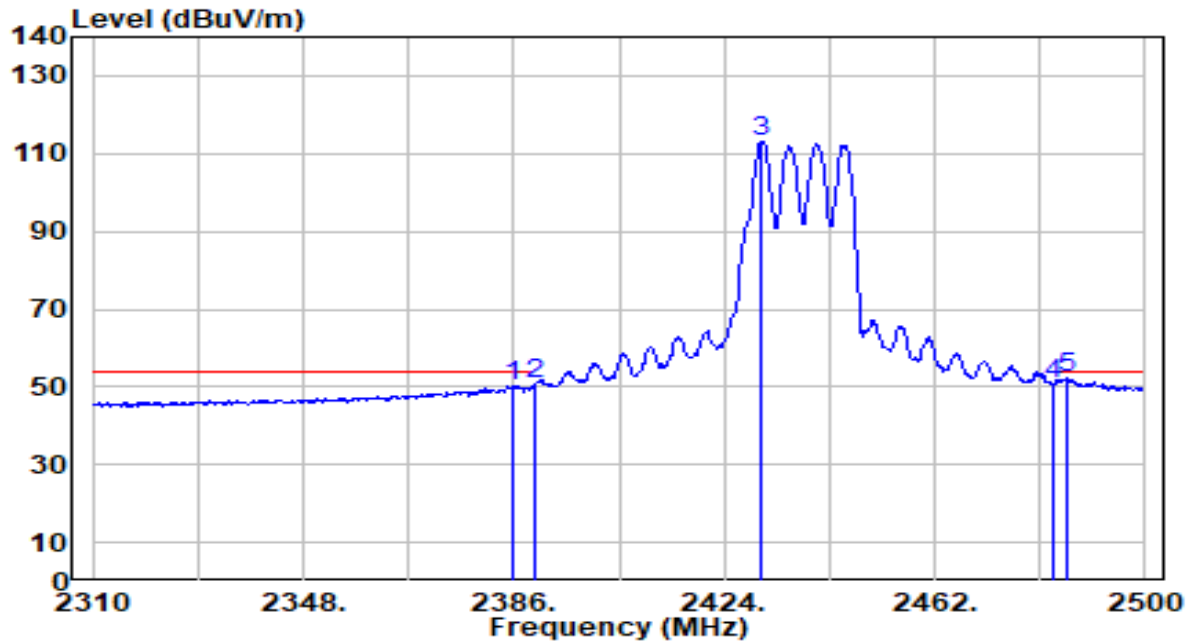


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2385.810	20.13	30.17	50.30	-3.70	54.00	200	53	Average
2	2390.000	20.49	30.18	50.67	-3.33	54.00	200	53	Average
3	2430.840	82.98	30.25	113.23	N/A	N/A	200	53	Average
4	2483.500	20.49	30.32	50.80	-3.20	54.00	200	53	Average
5	* 2485.750	21.74	30.32	52.06	-1.94	54.00	200	53	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE24000 Quad-Band Wi-Fi 7 Router	Date of Test	2023-09-06
Factor	DRH18-E	Temp. / Humidity	20°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-20MHz_TX_CH 11_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

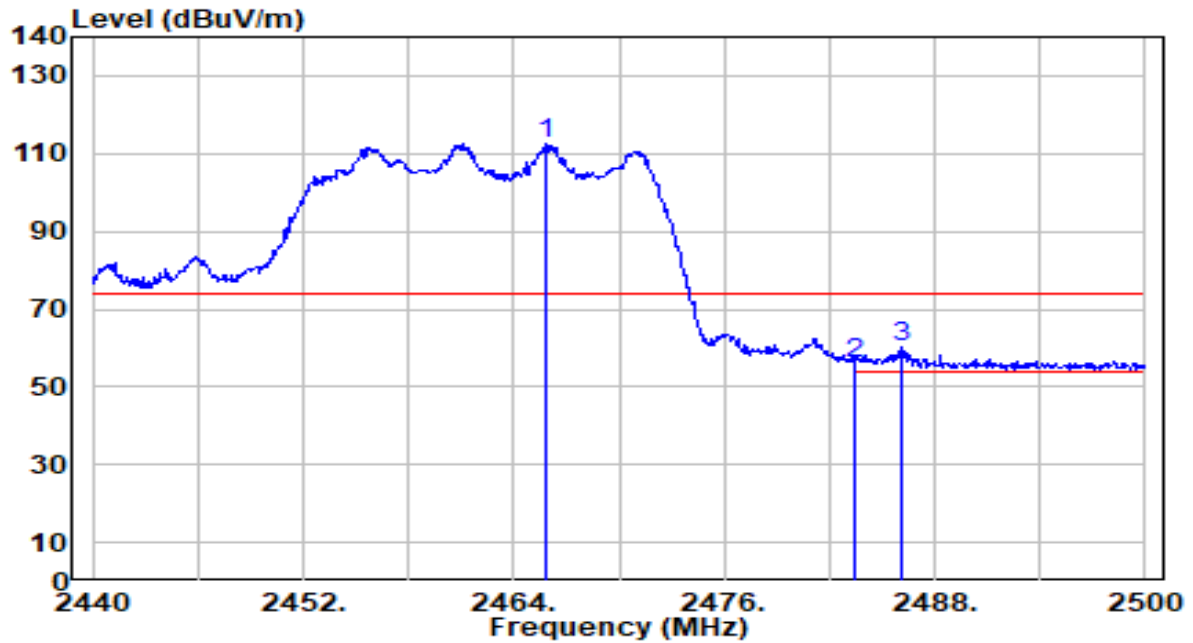


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2465.860	82.33	30.29	112.62	N/A	N/A	204	229	Peak
2	2483.500	25.77	30.32	56.09	-17.91	74.00	204	229	Peak
3	* 2486.140	29.93	30.32	60.25	-13.75	74.00	204	229	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE24000 Quad-Band Wi-Fi 7 Router	Date of Test	2023-09-06
Factor	DRH18-E	Temp. / Humidity	20°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-20MHz_TX_CH 11_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

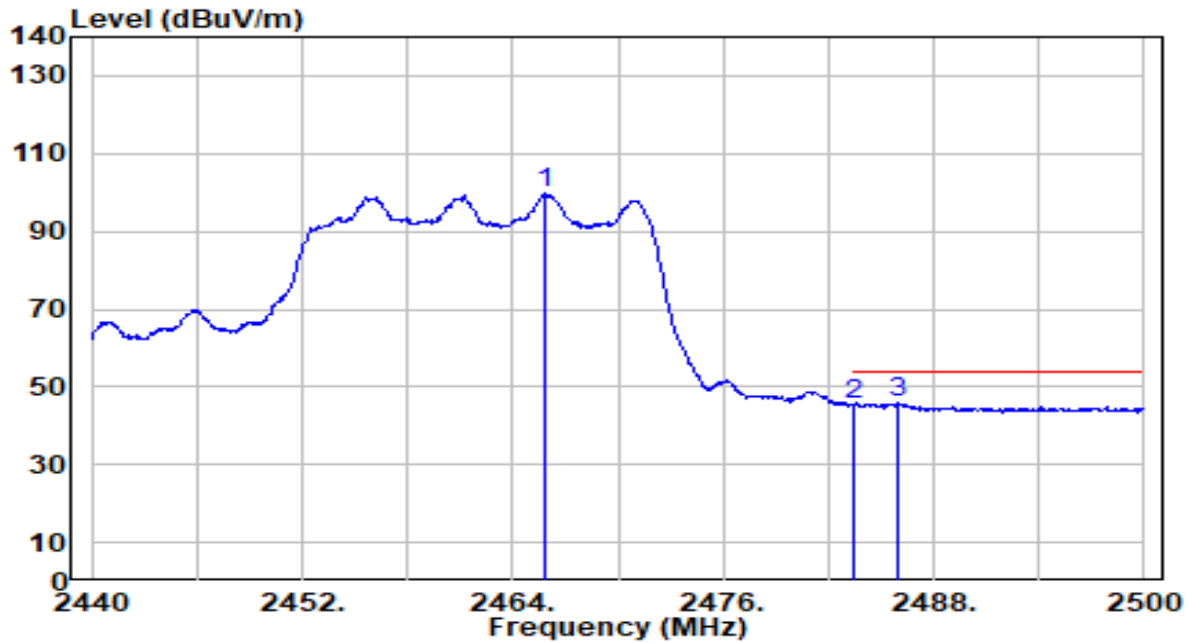


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2465.860	69.31	30.29	99.60	N/A	N/A	204	229	Average
2	2483.500	15.18	30.32	45.50	-8.50	54.00	204	229	Average
3	* 2485.960	15.40	30.32	45.72	-8.28	54.00	204	229	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE24000 Quad-Band Wi-Fi 7 Router	Date of Test	2023-09-06
Factor	DRH18-E	Temp. / Humidity	20°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-20MHz_TX_CH 11_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

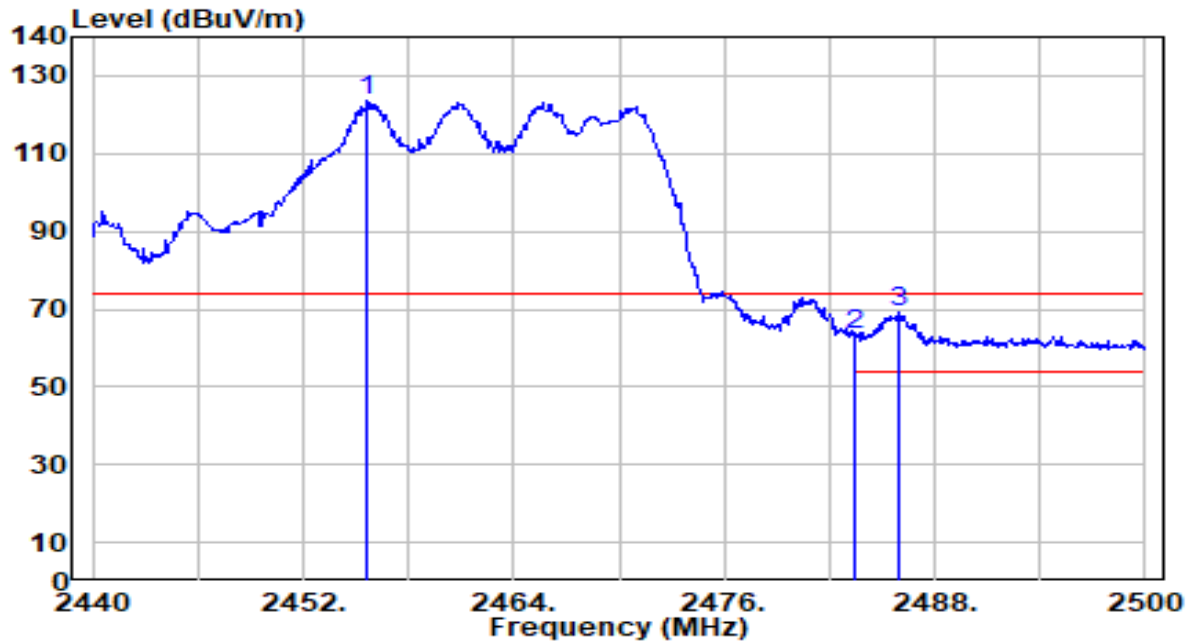


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2455.600	93.42	30.28	123.70	N/A	N/A	221	50	Peak
2	2483.500	32.88	30.32	63.19	-10.81	74.00	221	50	Peak
3	* 2486.020	38.63	30.32	68.96	-5.04	74.00	221	50	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE24000 Quad-Band Wi-Fi 7 Router	Date of Test	2023-09-06
Factor	DRH18-E	Temp. / Humidity	20°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-20MHz_TX_CH 11_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

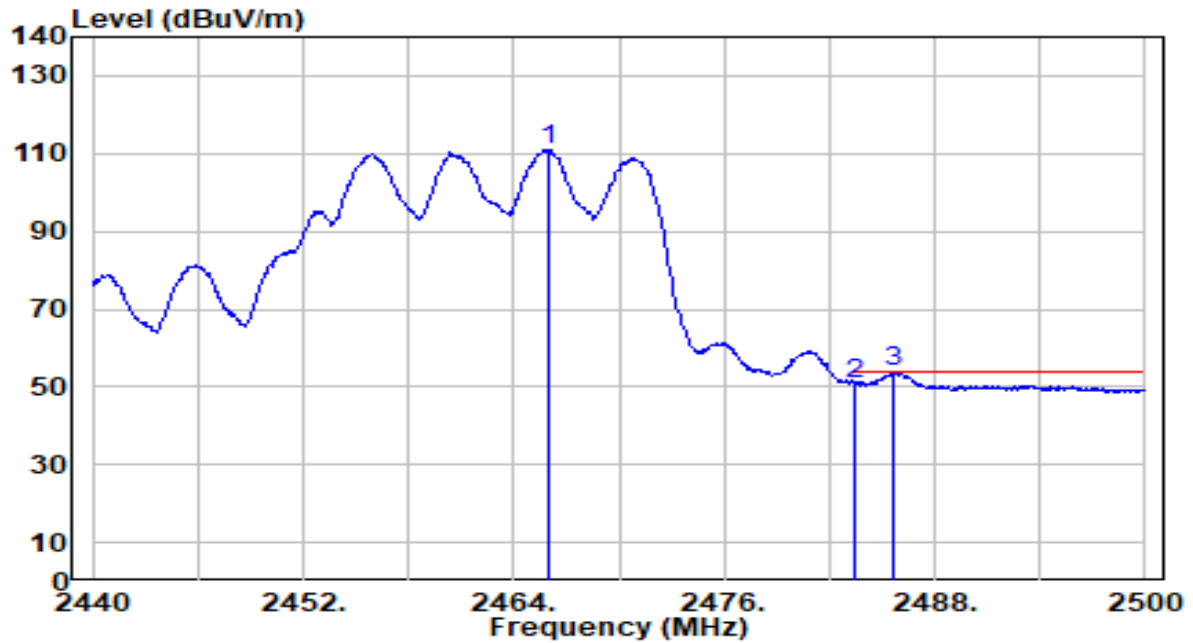


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2465.980	80.73	30.30	111.03	N/A	N/A	221	50	Average
2	2483.500	20.64	30.32	50.96	-3.04	54.00	221	50	Average
3	* 2485.600	23.49	30.32	53.81	-0.19	54.00	221	50	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE24000 Quad-Band Wi-Fi 7 Router	Date of Test	2023-09-06
Factor	DRH18-E	Temp. / Humidity	20°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-40MHz_TX_CH 3_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

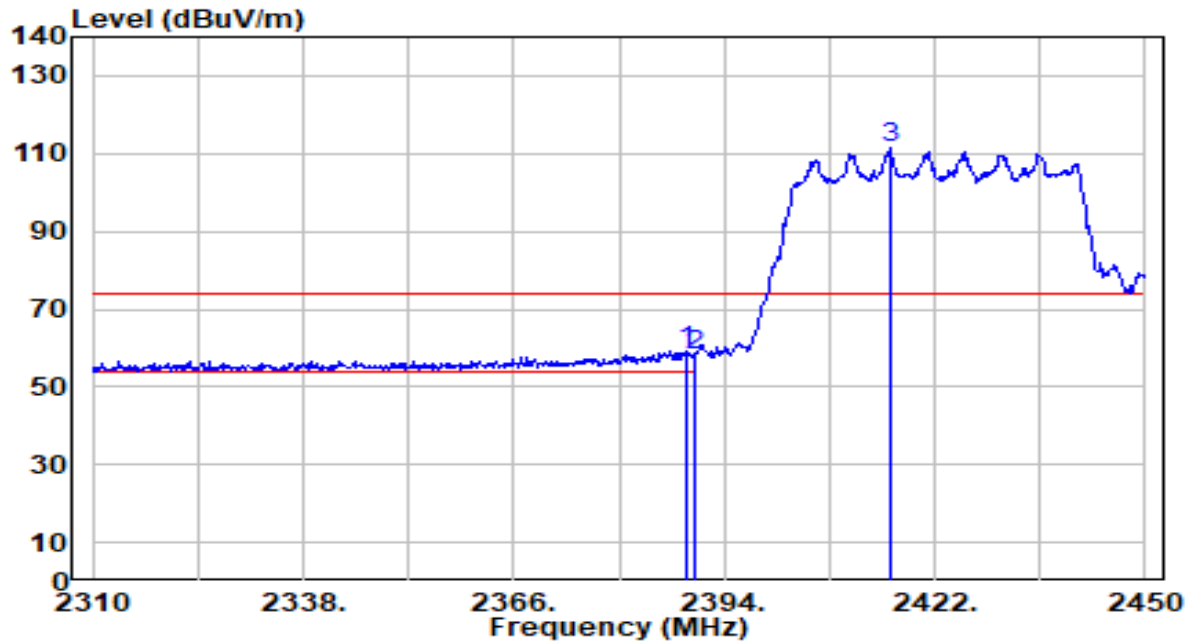


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2388.820	28.97	30.18	59.14	-14.86	74.00	212	226	Peak
2		2390.000	28.10	30.18	58.28	-15.72	74.00	212	226	Peak
3		2415.980	81.06	30.23	111.29	N/A	N/A	212	226	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE24000 Quad-Band Wi-Fi 7 Router	Date of Test	2023-09-06
Factor	DRH18-E	Temp. / Humidity	20°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-40MHz_TX_CH 3_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

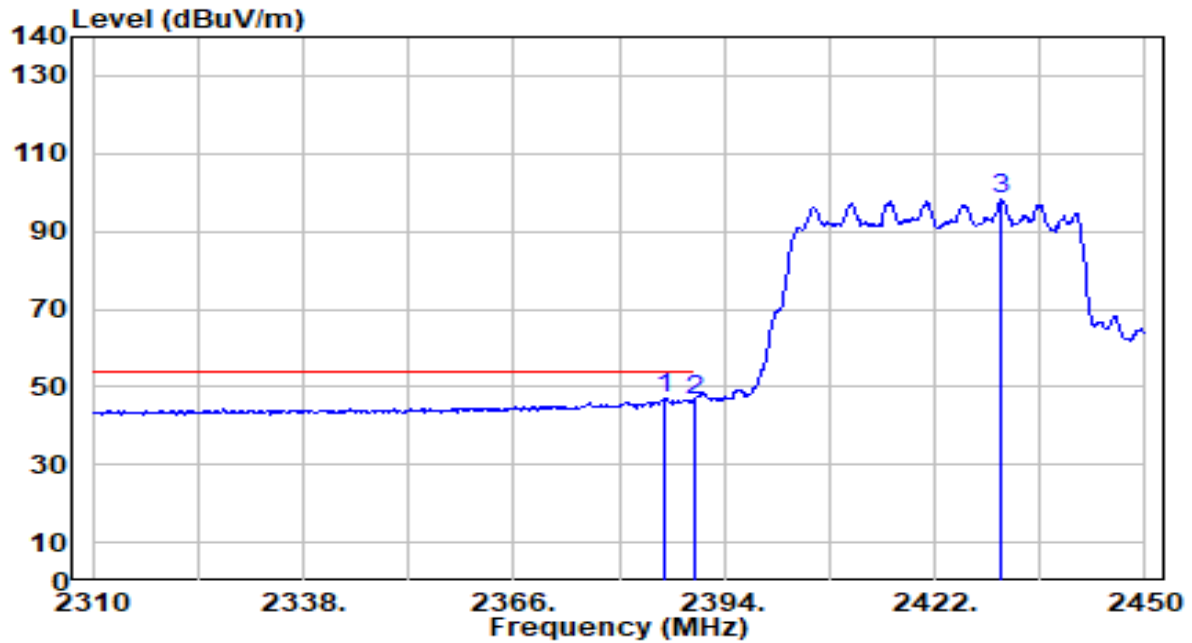


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2386.020	16.96	30.17	47.13	-6.87	54.00	212	226	Average
2		2390.000	16.23	30.18	46.41	-7.59	54.00	212	226	Average
3		2430.820	68.17	30.25	98.42	N/A	N/A	212	226	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE24000 Quad-Band Wi-Fi 7 Router	Date of Test	2023-09-06
Factor	DRH18-E	Temp. / Humidity	20°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-40MHz_TX_CH 3_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

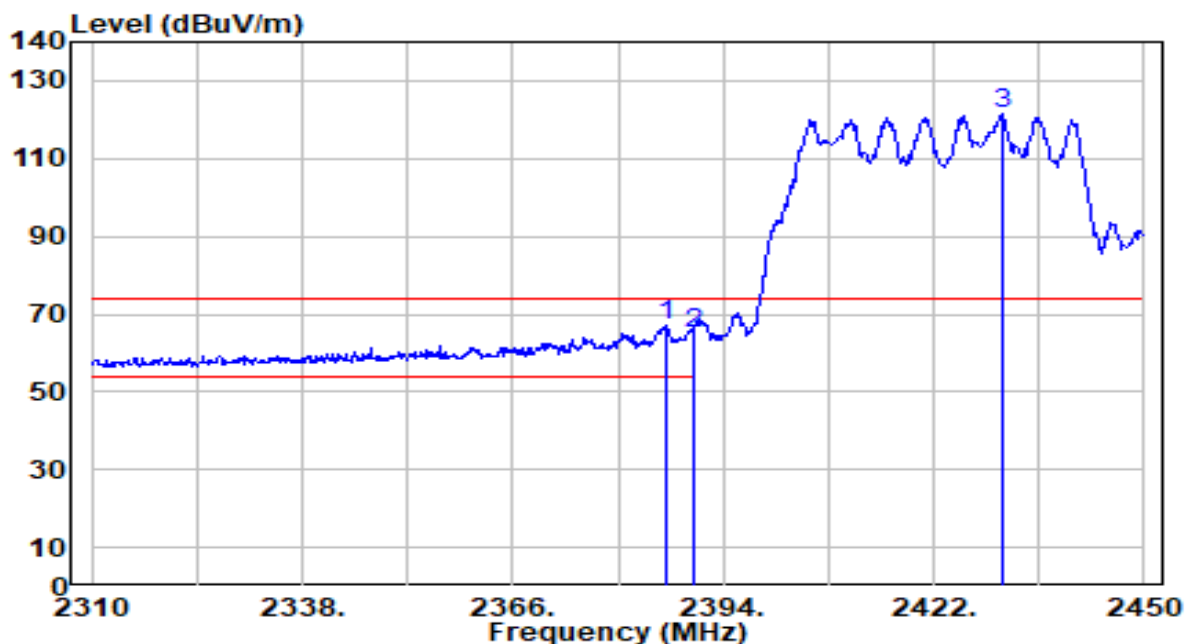


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2386.580	36.93	30.17	67.10	-6.90	74.00	200	50	Peak
2		2390.000	35.03	30.18	65.21	-8.79	74.00	200	50	Peak
3		2431.240	91.05	30.25	121.30	N/A	N/A	200	50	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE24000 Quad-Band Wi-Fi 7 Router	Date of Test	2023-09-06
Factor	DRH18-E	Temp. / Humidity	20°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-40MHz_TX_CH 3_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

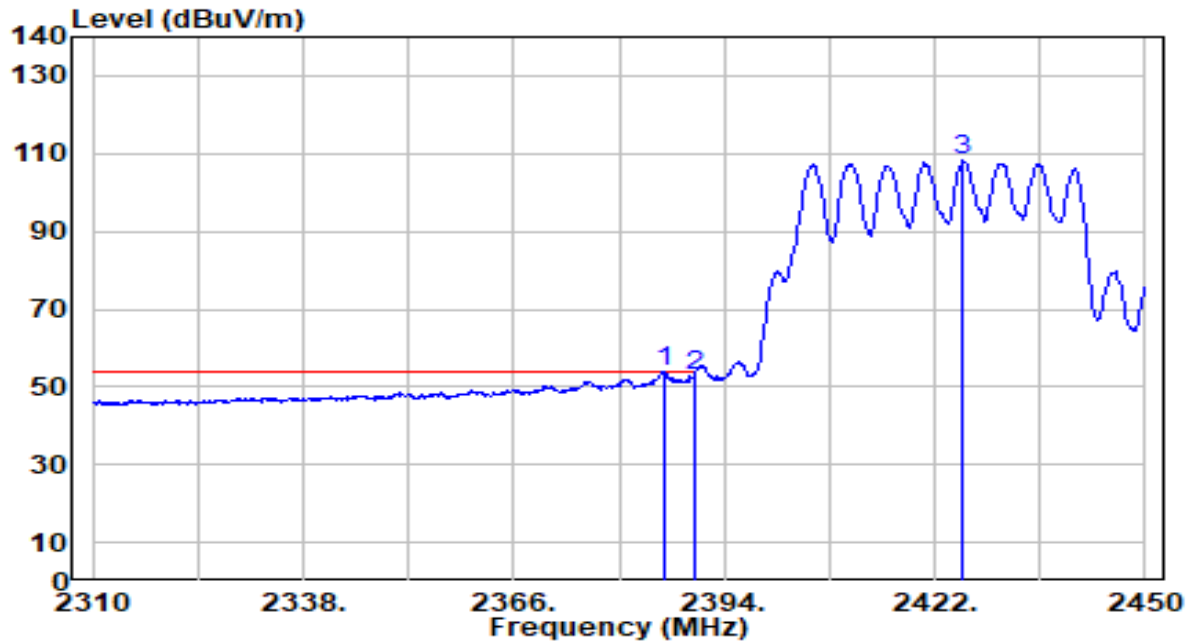


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2386.160	23.72	30.17	53.89	-0.11	54.00	200	50	Average
2		2390.000	22.59	30.18	52.77	-1.23	54.00	200	50	Average
3		2425.780	78.18	30.24	108.42	N/A	N/A	200	50	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE24000 Quad-Band Wi-Fi 7 Router	Date of Test	2023-09-06
Factor	DRH18-E	Temp. / Humidity	20°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-40MHz_TX_CH 6_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

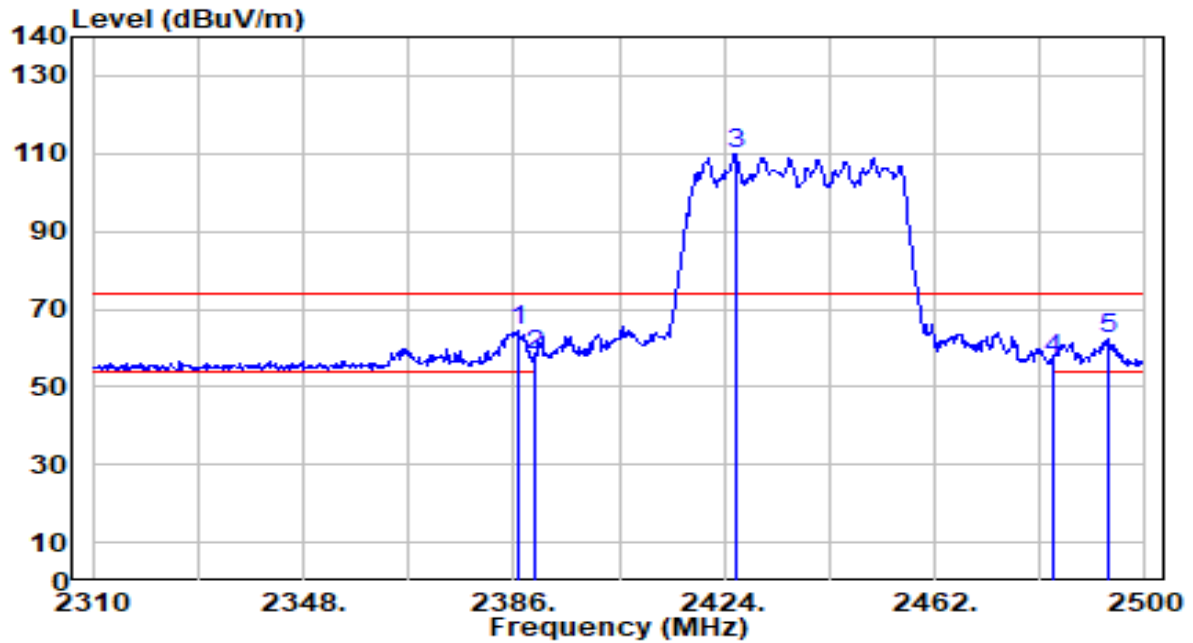


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2386.760	34.29	30.17	64.46	-9.54	74.00	212	225	Peak
2		2390.000	27.86	30.18	58.04	-15.96	74.00	212	225	Peak
3		2426.090	79.47	30.24	109.71	N/A	N/A	212	225	Peak
4		2483.500	26.52	30.32	56.84	-17.16	74.00	212	225	Peak
5		2493.160	32.04	30.33	62.37	-11.63	74.00	212	225	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE24000 Quad-Band Wi-Fi 7 Router	Date of Test	2023-09-06
Factor	DRH18-E	Temp. / Humidity	20°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-40MHz_TX_CH 6_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

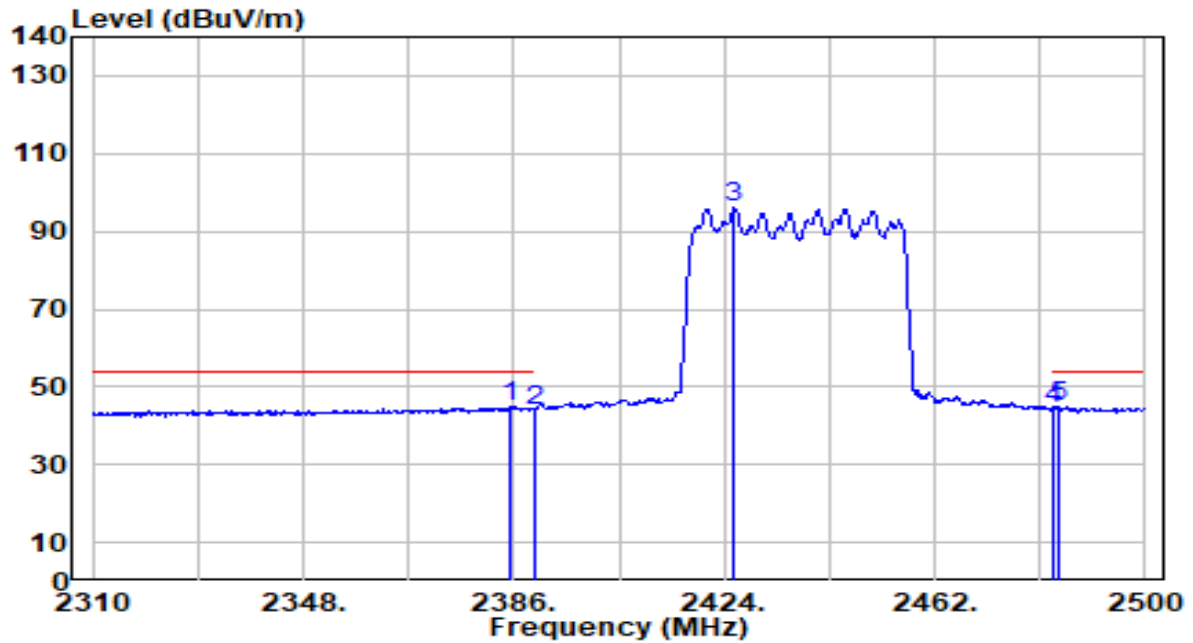


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2385.430	14.90	30.17	45.06	-8.94	54.00	212	225	Average
2		2390.000	13.86	30.18	44.04	-9.96	54.00	212	225	Average
3		2425.900	65.85	30.24	96.09	N/A	N/A	212	225	Average
4		2483.500	13.90	30.32	44.22	-9.78	54.00	212	225	Average
5		2484.420	14.44	30.32	44.76	-9.24	54.00	212	225	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE24000 Quad-Band Wi-Fi 7 Router	Date of Test	2023-09-06
Factor	DRH18-E	Temp. / Humidity	20°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-40MHz_TX_CH 6_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

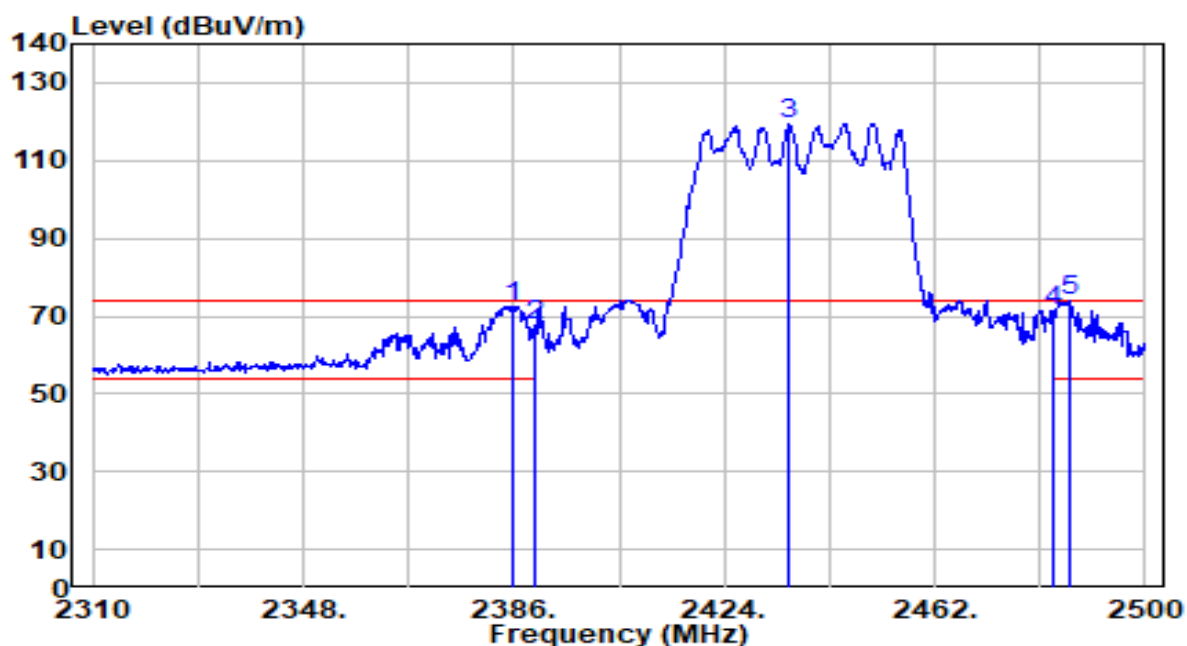


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2385.810	42.33	30.17	72.50	-1.50	74.00	200	51	Peak
2	2390.000	37.49	30.18	67.67	-6.33	74.00	200	51	Peak
3	2435.780	89.20	30.26	119.46	N/A	N/A	200	51	Peak
4	2483.500	41.11	30.32	71.43	-2.57	74.00	200	51	Peak
5	* 2486.320	43.50	30.32	73.82	-0.18	74.00	200	51	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE24000 Quad-Band Wi-Fi 7 Router	Date of Test	2023-09-06
Factor	DRH18-E	Temp. / Humidity	20°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-40MHz_TX_CH 6_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

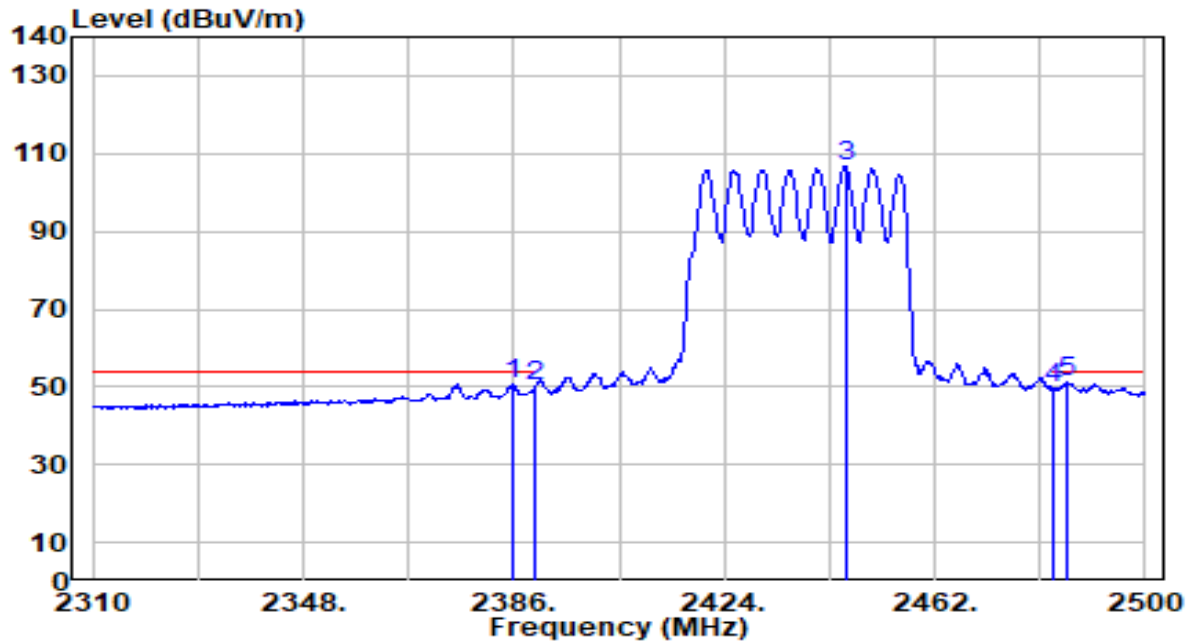


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2386.000	20.34	30.17	50.51	-3.49	54.00	200	51	Average
2	2390.000	20.21	30.18	50.39	-3.61	54.00	200	51	Average
3	2445.850	76.66	30.27	106.93	N/A	N/A	200	51	Average
4	2483.500	19.11	30.32	49.43	-4.57	54.00	200	51	Average
5	* 2486.130	21.04	30.32	51.36	-2.64	54.00	200	51	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE24000 Quad-Band Wi-Fi 7 Router	Date of Test	2023-09-06
Factor	DRH18-E	Temp. / Humidity	20°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-40MHz_TX_CH 9_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

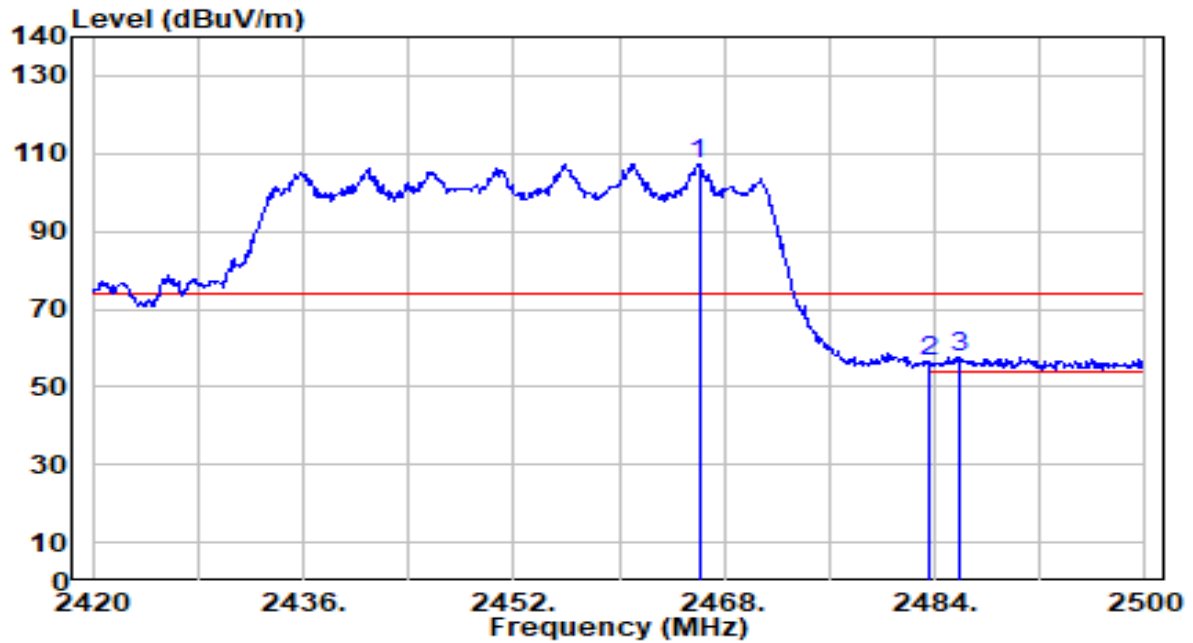


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2466.080	77.05	30.30	107.35	N/A	N/A	203	228	Peak
2	2483.500	26.38	30.32	56.70	-17.30	74.00	203	228	Peak
3	* 2485.920	27.35	30.32	57.67	-16.33	74.00	203	228	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE24000 Quad-Band Wi-Fi 7 Router	Date of Test	2023-09-06
Factor	DRH18-E	Temp. / Humidity	20°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-40MHz_TX_CH 9_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

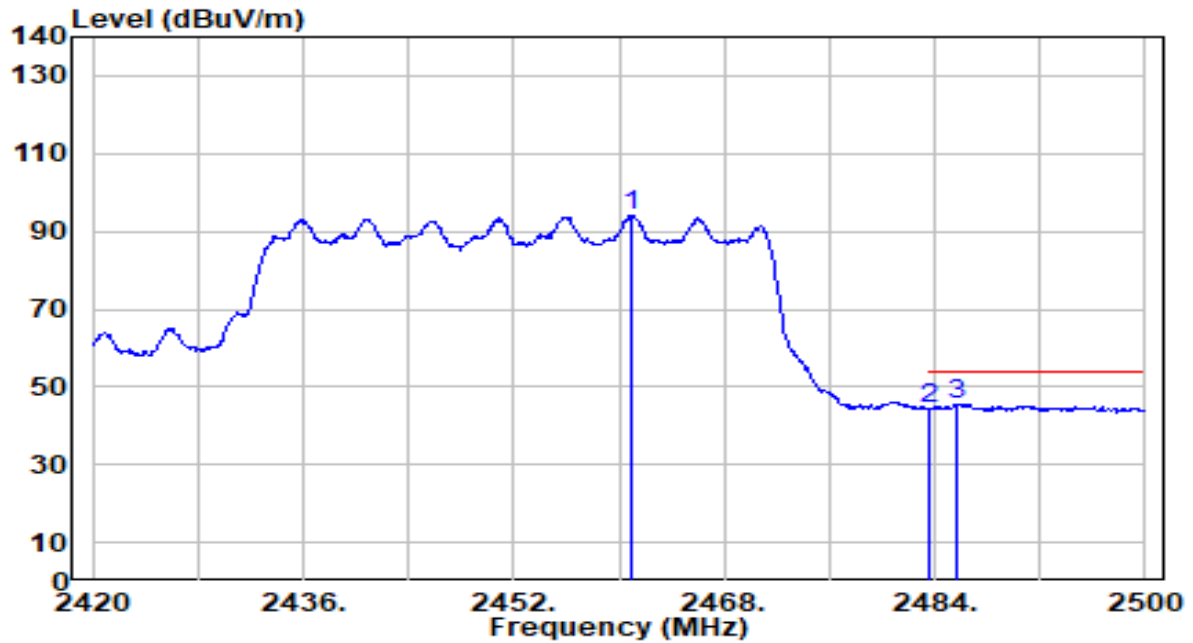


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2461.040	63.93	30.29	94.21	N/A	N/A	203	228	Average
2	2483.500	14.03	30.32	44.35	-9.65	54.00	203	228	Average
3	* 2485.680	15.20	30.32	45.52	-8.48	54.00	203	228	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE24000 Quad-Band Wi-Fi 7 Router	Date of Test	2023-09-06
Factor	DRH18-E	Temp. / Humidity	20°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-40MHz_TX_CH 9_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

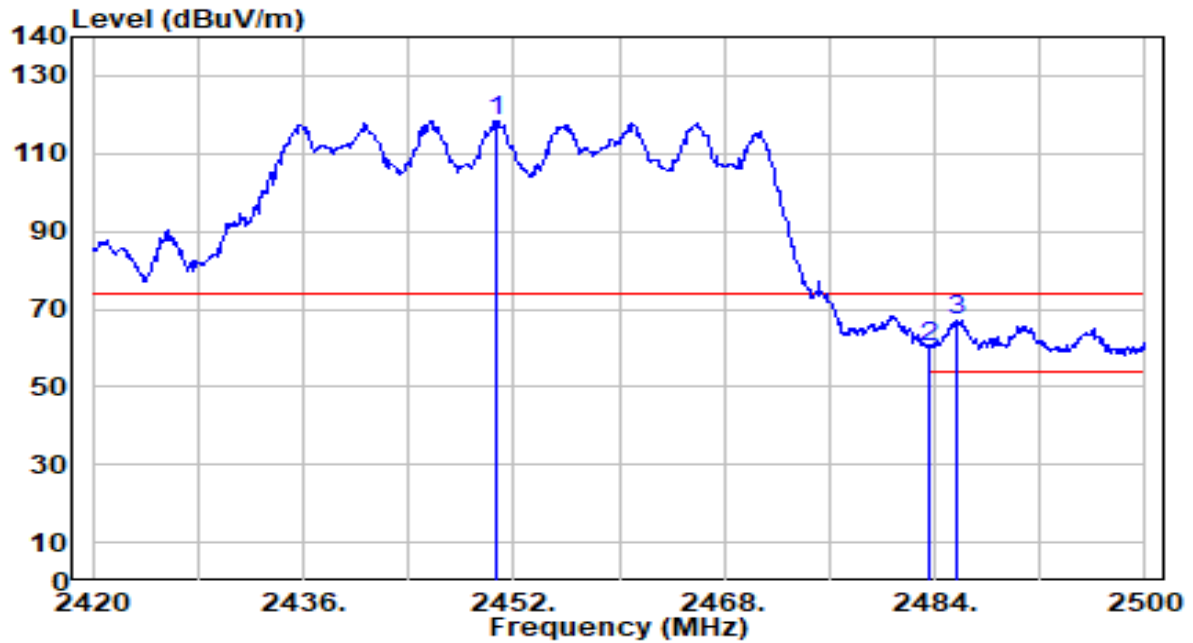


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2450.720	88.30	30.27	118.57	N/A	N/A	210	52	Peak
2	2483.500	29.97	30.32	60.29	-13.71	74.00	210	52	Peak
3	* 2485.600	36.85	30.32	67.17	-6.83	74.00	210	52	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE24000 Quad-Band Wi-Fi 7 Router	Date of Test	2023-09-06
Factor	DRH18-E	Temp. / Humidity	20°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-40MHz_TX_CH 9_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

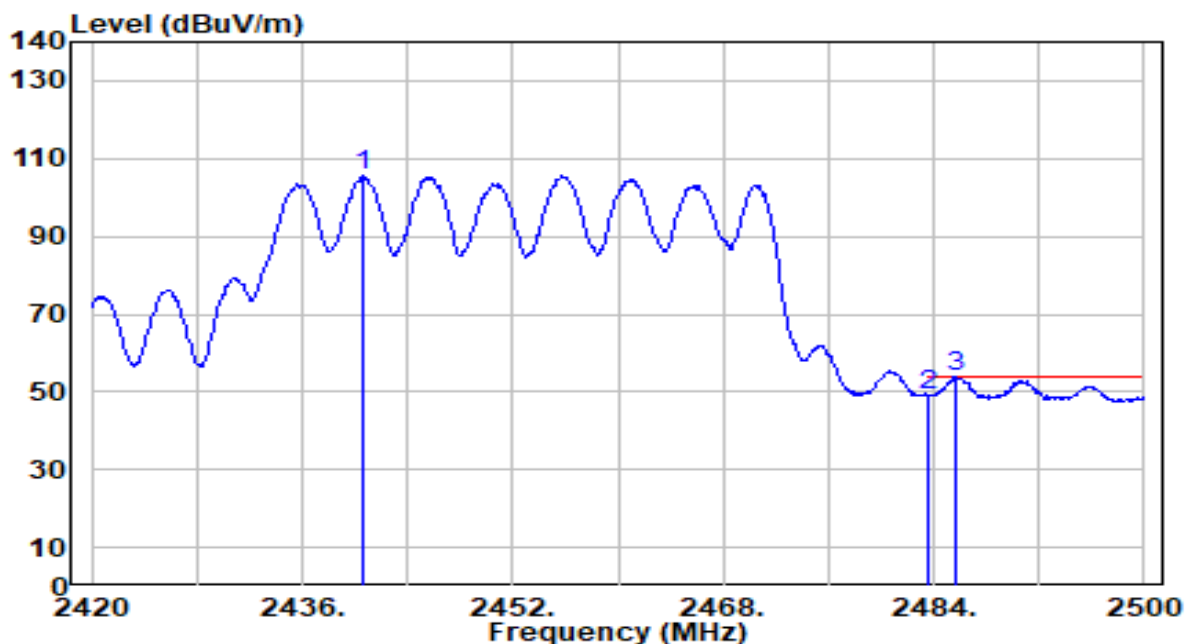

No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2440.560	75.17	30.26	105.43	N/A	N/A	210	52	Average
2	2483.500	18.72	30.32	49.04	-4.96	54.00	210	52	Average
3	* 2485.680	23.55	30.32	53.87	-0.13	54.00	210	52	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

7.8. AC Conducted Emissions Measurement


7.8.1. Test Limit

FCC Part 15 Subpart C Paragraph 15.207 Limits		
Frequency (MHz)	QP (dBuV)	AV (dBuV)
0.15 - 0.50	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30	60	50

Note 1: The lower limit shall apply at the transition frequencies.


Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.

7.8.2. Test Setup

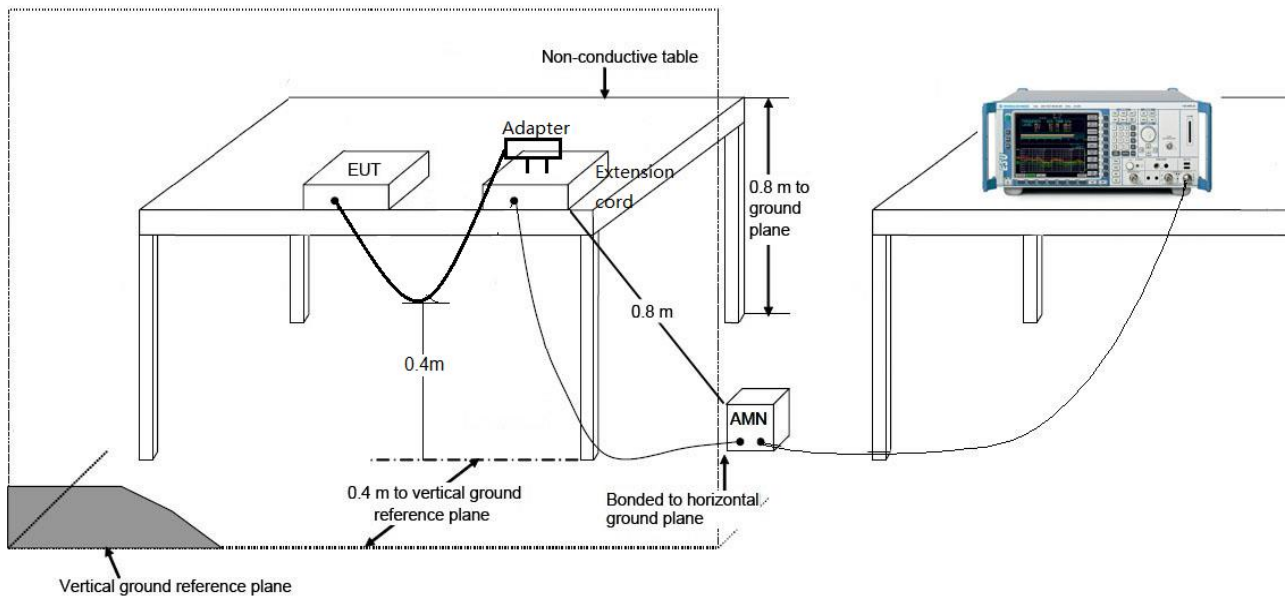

7.8.3. Test Result

EUT	BE24000 Quad-Band Wi-Fi 7 Router	Date of Test	2023-09-22
Factor	CE_ENV216-L1 (Filter ON)	Temp. / Humidity	25.4°C /51%
Polarity	Line1	Site / Test Engineer	SR2 / Bob
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

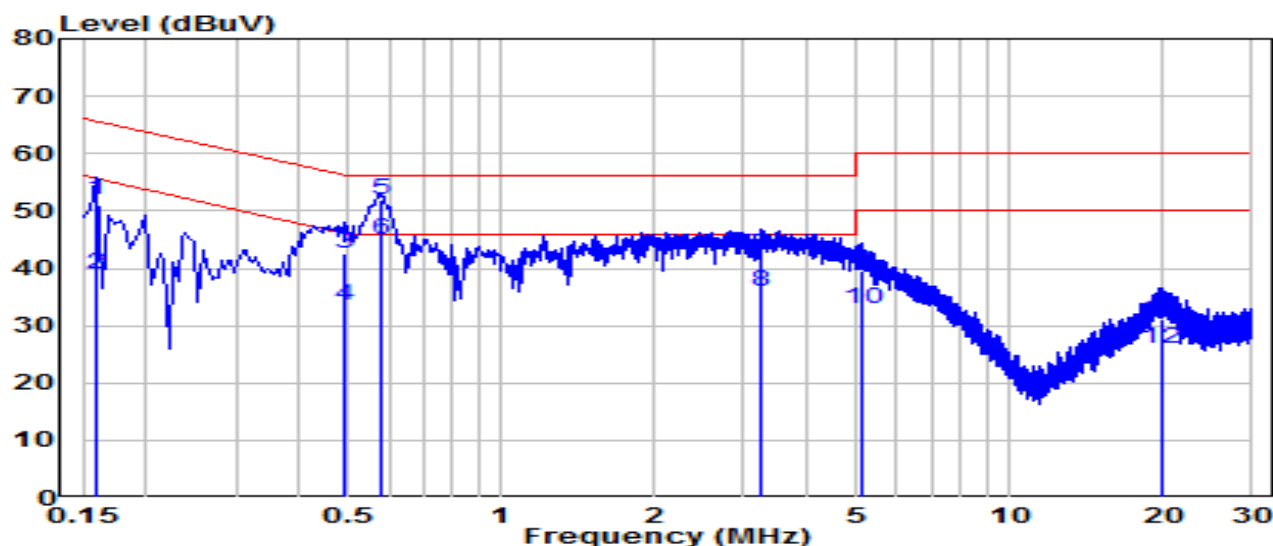


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV)	Margin (dB)	Limit (dBuV)	Remark (QP/PK/AV)
1	0.159	42.22	9.62	51.84	-13.68	65.52	QP
2	0.159	29.33	9.62	38.95	-16.57	55.52	Average
3	0.487	32.94	9.64	42.58	-13.63	56.21	QP
4	0.487	23.85	9.64	33.49	-12.72	46.21	Average
5	* 0.582	42.31	9.65	51.96	-4.04	56.00	QP
6	* 0.582	35.18	9.65	44.83	-1.17	46.00	Average
7	3.259	32.59	9.72	42.31	-13.69	56.00	QP
8	3.259	26.24	9.72	35.96	-10.04	46.00	Average
9	5.095	29.80	9.75	39.55	-20.45	60.00	QP
10	5.095	23.22	9.75	32.97	-17.03	50.00	Average
11	19.831	21.13	9.93	31.06	-28.94	60.00	QP
12	19.831	15.93	9.93	25.85	-24.15	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV) = Reading(dBuV) + C.F (Correction Factor).

EUT	BE24000 Quad-Band Wi-Fi 7 Router	Date of Test	2023-09-22
Factor	CE_ENV216-N (Filter ON)	Temp. / Humidity	25.4°C /51%
Polarity	Neutral	Site / Test Engineer	SR2 / Bob
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

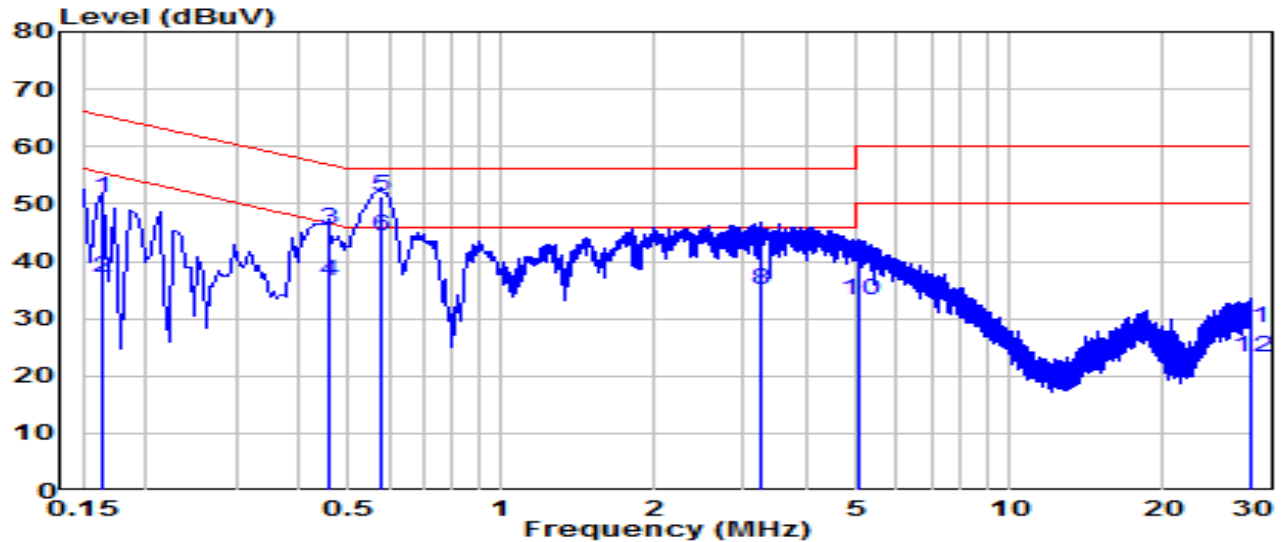


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV)	Margin (dB)	Limit (dBuV)	Remark (QP/PK/AV)
1	0.163	41.39	9.62	51.01	-14.27	65.28	QP
2	0.163	27.44	9.62	37.06	-18.22	55.28	Average
3	0.456	35.82	9.64	45.46	-11.31	56.77	QP
4	0.456	26.92	9.64	36.56	-10.20	46.77	Average
5	* 0.577	41.76	9.65	51.40	-4.60	56.00	QP
6	* 0.577	34.83	9.65	44.47	-1.53	46.00	Average
7	3.223	32.28	9.71	41.99	-14.01	56.00	QP
8	3.223	25.40	9.71	35.12	-10.88	46.00	Average
9	5.082	30.00	9.75	39.75	-20.25	60.00	QP
10	5.082	23.44	9.75	33.19	-16.81	50.00	Average
11	29.910	18.29	10.06	28.35	-31.65	60.00	QP
12	29.910	13.23	10.06	23.29	-26.71	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV) = Reading(dBuV) + C.F (Correction Factor).

EUT	BE24000 Quad-Band Wi-Fi 7 Router	Date of Test	2023-09-22
Factor	CE_ENV216-L1 (Filter ON)	Temp. / Humidity	25.4°C /51%
Polarity	Line1	Site / Test Engineer	SR2 / Bob
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1+2+3	Test Voltage	AC 240V/60Hz

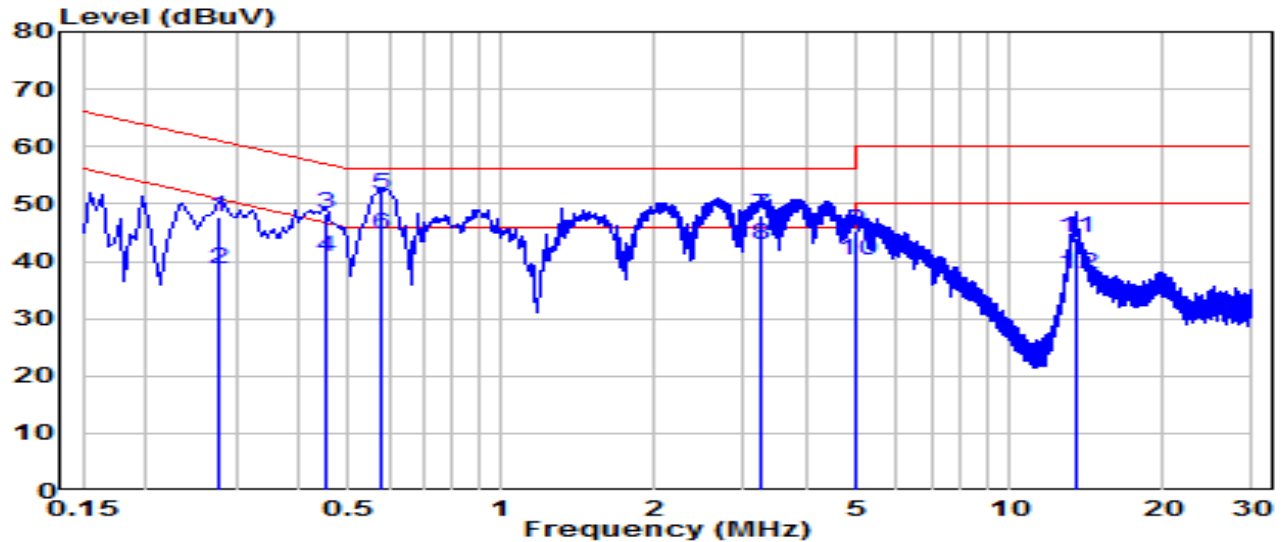


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV)	Margin (dB)	Limit (dBuV)	Remark (QP/PK/AV)
1	0.276	38.18	9.63	47.81	-13.13	60.94	QP
2	0.276	29.16	9.63	38.79	-12.14	50.94	Average
3	0.451	38.60	9.64	48.24	-8.61	56.85	QP
4	0.451	31.01	9.64	40.65	-6.20	46.85	Average
5	* 0.577	41.96	9.65	51.60	-4.40	56.00	QP
6	* 0.577	35.03	9.65	44.68	-1.32	46.00	Average
7	3.228	38.17	9.71	47.89	-8.11	56.00	QP
8	3.228	33.02	9.71	42.73	-3.27	46.00	Average
9	5.010	35.54	9.75	45.29	-14.71	60.00	QP
10	5.010	30.41	9.75	40.15	-9.85	50.00	Average
11	13.505	34.17	9.88	44.05	-15.95	60.00	QP
12	13.505	27.92	9.88	37.80	-12.20	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV) = Reading(dBuV) + C.F (Correction Factor).

EUT	BE24000 Quad-Band Wi-Fi 7 Router	Date of Test	2023-09-22
Factor	CE_ENV216-N (Filter ON)	Temp. / Humidity	25.4°C /51%
Polarity	Neutral	Site / Test Engineer	SR2 / Bob
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1+2+3	Test Voltage	AC 240V/60Hz

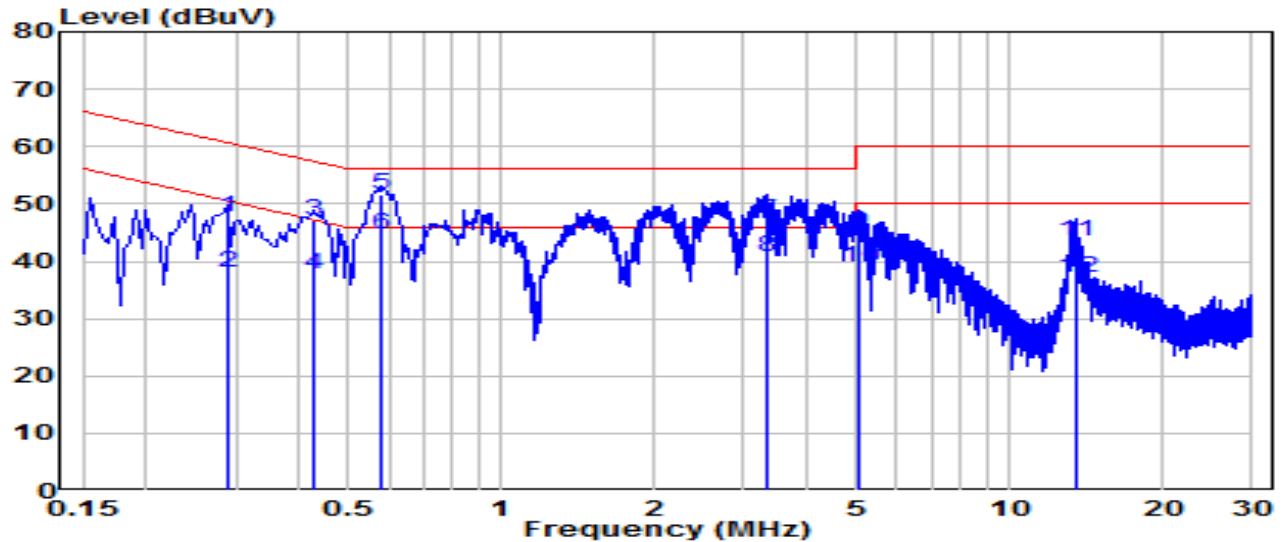

No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV)	Margin (dB)	Limit (dBuV)	Remark (QP/PK/AV)
1	0.289	38.13	9.63	47.76	-12.78	60.54	QP
2	0.289	28.40	9.63	38.03	-12.51	50.54	Average
3	0.424	37.41	9.64	47.05	-10.31	57.36	QP
4	0.424	28.21	9.64	37.85	-9.51	47.36	Average
5	* 0.577	42.08	9.65	51.73	-4.27	56.00	QP
6	* 0.577	35.03	9.65	44.68	-1.32	46.00	Average
7	3.345	37.35	9.72	47.07	-8.93	56.00	QP
8	3.345	31.03	9.72	40.75	-5.25	46.00	Average
9	5.077	35.32	9.75	45.07	-14.93	60.00	QP
10	5.077	29.14	9.75	38.89	-11.11	50.00	Average
11	13.496	33.53	9.91	43.44	-16.56	60.00	QP
12	13.496	27.22	9.91	37.13	-12.87	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV) = Reading(dBuV) + C.F (Correction Factor).

8. CONCLUSION

The data collected relate only the item(s) tested and show that the device is compliance with Part 15C of the FCC Rules.

Appendix A : Test Setup Photograph

Refer to “2308TW0121-UT” file.

Appendix B : External Photograph

Refer to “2308TW0121-UE” file.

Appendix C : Internal Photograph

Refer to “2308TW0121-UI” file.

_____ The End _____