



FCC Part 15, Subpart B, Class B

ARTIKA FOR LIVING INC.

Essence Glow Box

Test Model: GB390L-HDBL

Additional Model No.: GB390L-XXXXXX

("XXXXXX" can be A to Z and/or 0 to 9 and/or blank (commercial code))

Prepared for : ARTIKA FOR LIVING INC.
Address : 1756 50th avenue, Lachine, Qc, Canada H8T 2V5

Prepared by : Shenzhen LCS Compliance Testing Laboratory Ltd.
Address : 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park
Yabianxueziwei, Shajing Street, Baoan District,
Shenzhen, 518000, China

Tel : (+86)755-82591330
Fax : (+86)755-82591332
Web : www.LCS-cert.com
Mail : webmaster@LCS-cert.com

Date of receipt of test sample : July 13, 2022
Number of tested samples : 2
Sample No. : A052022077
Serial number : Prototype
Date of Test : July 13, 2022 ~ July 18, 2022
Date of Report : July 18, 2022





FCC Part 15, Subpart B, Class B
FCC 47 CFR Part 15 Subpart B, Class B, ANSI C63.4 -2014

Report Reference No. : LCSA070422161E

Date Of Issue : July 18, 2022

Testing Laboratory Name : Shenzhen LCS Compliance Testing Laboratory Ltd.

**Address : 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park
Yabianxueziwei, Shajing Street, Baoan District, Shenzhen,
518000, China**

**Testing Location/ Procedure... : Full application of Harmonised standards ■
Partial application of Harmonised standards □
Other standard testing method □**

Applicant's Name..... : ARTIKA FOR LIVING INC.

Address : 1756 50th avenue, Lachine, Qc, Canada H8T 2V5

Test Specification

**Standard..... : FCC 47 CFR Part 15 Subpart B, Class B, ANSI C63.4
-2014**

Test Report Form No..... : LCSEMC-1.0

TRF Originator..... : Shenzhen LCS Compliance Testing Laboratory Ltd.

Master TRF..... : Dated 2011-03

SHENZHEN LCS COMPLIANCE TESTING LABORATORY LTD. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the SHENZHEN LCS COMPLIANCE TESTING LABORATORY LTD. is acknowledged as copyright owner and source of the material. SHENZHEN LCS COMPLIANCE TESTING LABORATORY LTD. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Test Item Description..... : Essence Glow Box

Test Model : GB390L-HDBL

Trade Mark : ARTIKA

Ratings : Input: AC 120V, 60Hz

Result : Positive

Compiled by:

Vera Deng/ Administrator

Supervised by:

Cary Luo/ Technique principal

Approved by:

Gavin Liang/ Manager



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

**FCC -- TEST REPORT****Test Report No. : LCSA070422161E**July 18, 2022

Date of issue

Test Model : GB390L-HDBL

EUT..... : Essence Glow Box

Applicant..... : ARTIKA FOR LIVING INC.

Address..... : 1756 50th avenue, Lachine, Qc, Canada H8T 2V5

Telephone..... : /

Fax..... : /

Manufacturer..... : Ningbo Shenghe Lighting Co.,LTD.Address..... : No.311 Penglai Road, Xiangshan Economic
development Zone, Ningbo, Zhejiang, 315700

Telephone..... : /

Fax..... : /

Factory..... : Ningbo Shenghe Lighting Co.,LTD.Address..... : No.311 Penglai Road, Xiangshan Economic
development Zone, Ningbo, Zhejiang, 315700

Telephone..... : /

Fax..... : /

Test Result according to the standards on page 6: **Positive**

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Revision History

Report Version	Issue Date	Revision Content	Revised By
000	July 18, 2022	Initial Issue	--





TABLE OF CONTENTS

Test Report Description	Page
1. SUMMARY OF STANDARDS AND RESULTS.....	6
1.1. Description of Standards and Results.....	6
2. GENERAL INFORMATION.....	7
2.1. Description of Device (EUT)	7
2.2. Support Equipment List	7
2.3. Description of Test Facility.....	8
2.4. Statement of the Measurement Uncertainty.....	8
2.5. Measurement Uncertainty.....	8
3. TEST RESULTS	9
3.1. POWER LINE CONDUCTED EMISSION MEASUREMENT.....	9
3.2. Radiated emission Measurement	13
4. TEST SETUP PHOTOGRAPHS OF EUT	17
5. EXTERIOR PHOTOGRAPHS OF THE EUT.....	17
6. INTERIOR PHOTOGRAPHS OF THE EUT	17





1. SUMMARY OF STANDARDS AND RESULTS

1.1. Description of Standards and Results

The EUT have been tested according to the applicable standards as referenced below.

EMISSION			
Description of Test Item	Standard	Limits	Results
Conducted disturbance at mains terminals	FCC 47 CFR Part 15 Subpart B, Class B, ANSI C63.4 -2014	Class B	PASS
Radiated disturbance	FCC 47 CFR Part 15 Subpart B, Class B, ANSI C63.4 -2014	Class B	PASS
N/A is an abbreviation for Not Applicable.			

Test mode:

Mode	Lighting	Record
------	----------	--------

***Note: All test modes were tested, but we only recorded the worst case in this report.





2. GENERAL INFORMATION

2.1. Description of Device (EUT)

EUT : Essence Glow Box

Trade Mark : ARTIKA

Test Model : GB390L-HDBL

Additional Model : GB390L-XXXXXX ("XXXXXX" can be A to Z and/or 0 to 9 and/or blank (commercial code))

Model Declaration : PCB board, structure and internal of these model(s) are the same, So no additional models were tested

Power Supply : Input: AC 120V, 60Hz

Highest internal frequency (Fx) : $F_x \leq 108 \text{ MHz}$

Highest internal frequency (Fx)	Highest measured frequency
$F_x \leq 108 \text{ MHz}$	1 GHz
$108 \text{ MHz} < F_x \leq 500 \text{ MHz}$	2 GHz
$500 \text{ MHz} < F_x \leq 1 \text{ GHz}$	5 GHz
$F_x > 1 \text{ GHz}$	$5 \times F_x$ up to a maximum of 6 GHz

NOTE 1 For FM and TV broadcast receivers, Fx is determined from the highest frequency generated or used excluding the local oscillator and tuned frequencies.
Where Fx is unknown, the radiated emission measurements shall be performed up to 6 GHz.

2.2. Support Equipment List

Name	Manufacturers	M/N	S/N
--	--	--	--





2.3. Description of Test Facility

Site Description

EMC Lab.

: NVLAP Accreditation Code is 600167-0.
FCC Designation Number is CN5024.
CAB identifier is CN0071.
CNAS Registration Number is L4595.
FCC Test Firm Registration Number: 254912

2.4. Statement of the Measurement Uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. To CISPR 16 – 4 “Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements” and is documented in the LCS quality system acc. To DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

2.5. Measurement Uncertainty

Test	Parameters	Expanded Uncertainty (Ulab)	Expanded Uncertainty (Ucisp)
Conducted Emission	Level accuracy (9kHz to 150kHz) (150kHz to 30MHz)	± 2.63 dB ± 2.35 dB	± 3.8 dB ± 3.4 dB
Radiated Emission	Level accuracy (30MHz to 1000MHz)	± 3.48 dB	± 5.3 dB
Radiated Emission	Level accuracy (above 1000MHz)	± 3.90 dB	± 5.2 dB

(1) Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus.

(2) The reported expanded uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor of $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



3. TEST RESULTS


3.1. POWER LINE CONDUCTED EMISSION MEASUREMENT

3.1.1. Test Equipment

The following test equipments are used during the power line conducted measurement:

Item	Equipment	Manufacturer	Model No.	Serial No.	Cal Date	Due Date
1	EMI Test Receiver	R&S	ESCI	101142	2022-05-05	2023-05-04
2	10dB Attenuator	SCHWARZBECK	VTSD9561-F	9561-F159	2022-05-05	2023-05-04
3	Artificial Mains Network	SCHWARZBECK	NSLK8127	8127716	2022-05-05	2023-05-04
4	EMI Test Software	EZ	EZ EMC	N/A	/	/
5	Asymmetric Artificial Network	SCHWARZBECK	NTFM 8158	NTFM8158 #120	2022-05-05	2023-05-04
6	Voltage Probe	SCHWARZBECK	KT 9420	9420401	2022-05-05	2023-05-04
7	No. 2 shielded Room	CHENGYU	843	/	2020-06-16	2023-06-16

3.1.2. Block Diagram of Test Setup

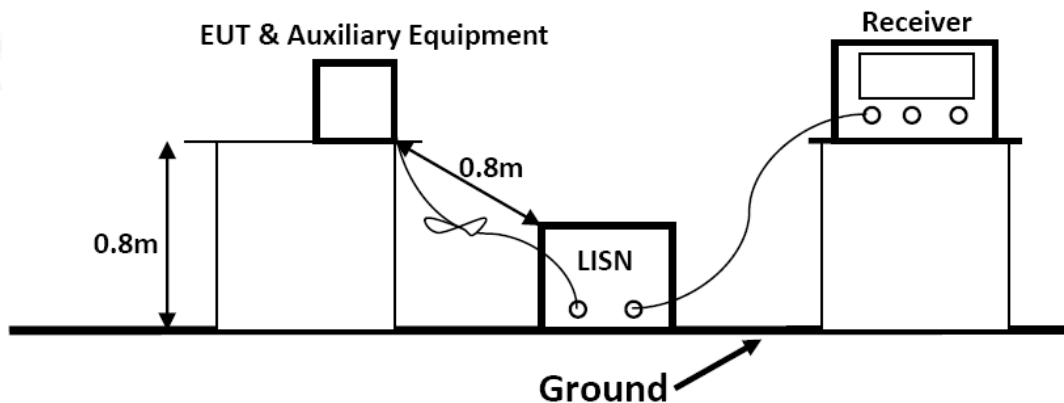

3.1.3. Test Standard

Power Line Conducted Emission Limits (Class B)

Frequency (MHz)			Limit (dB μ V)	
			Quasi-peak Level	Average Level
0.15	~	0.50	66.0 ~ 56.0 *	56.0 ~ 46.0 *
0.50	~	5.00	56.0	46.0
5.00	~	30.00	60.0	50.0

NOTE1-The lower limit shall apply at the transition frequencies.

NOTE2-The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.50MHz.



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



3.1.4.EUT Configuration on Test

The following equipments are installed on Power Line Conducted Emission Measurement to meet the commission requirement and operating regulations in a manner, which tends to maximize its emission characteristics in a normal application.

3.1.5.Operating Condition of EUT

3.1.5.1.Setup the EUT as shown on Section 3.1.2

3.1.5.2.Turn on the power of all equipments.

3.1.5.3.Let the EUT work in measuring Lighting and measure it.

3.1.6.Test Procedure

The EUT system is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides 50ohm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC line are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to FCC/ANSI C63.4-2014 on Conducted Emission Measurement.

The bandwidth of the test receiver is set at 9kHz.

The frequency range from 150kHz to 30MHz is investigated

3.1.7.Test Results


PASS.

The test result please refer to the next page.





Test Model	GB390L-HDBL	Test Mode	Lighting
Environmental Conditions	24.5°C, 52% RH	Test Engineer	Monkey Li
Pol	Line	Test Voltage	AC 120V/60Hz

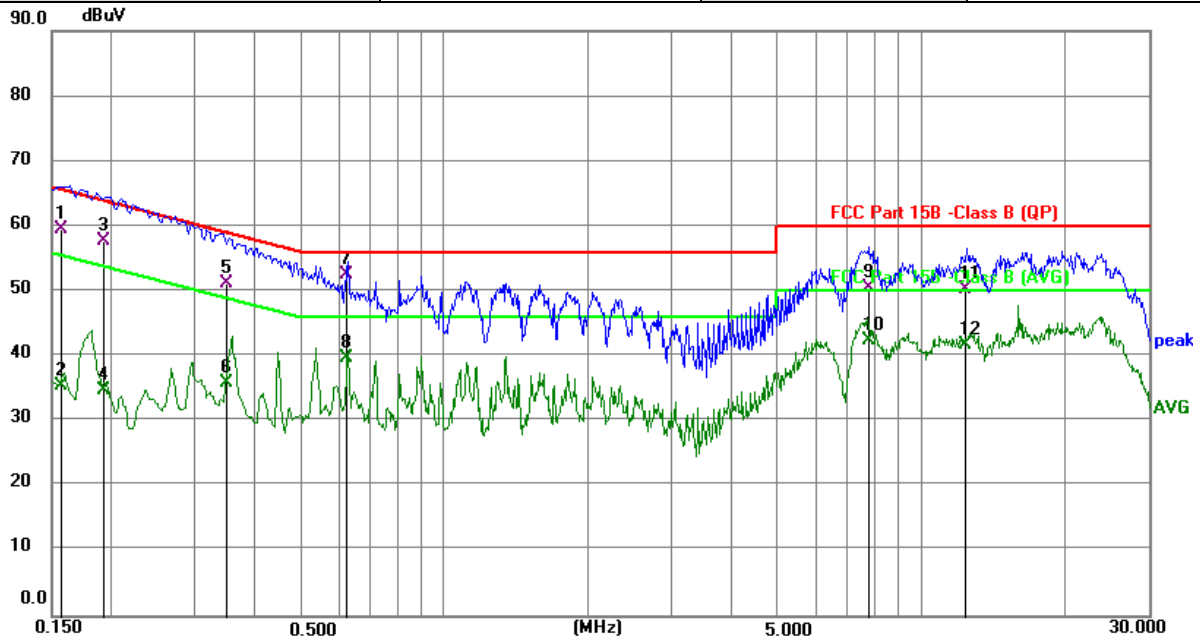

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	
		MHz	Level	Factor	ment	dBuV	dB	Detector
1		0.1573	49.28	10.24	59.52	65.61	-6.09	QP
2		0.1573	25.10	10.24	35.34	55.61	-20.27	AVG
3		0.1924	47.48	10.23	57.71	63.93	-6.22	QP
4		0.1924	24.60	10.23	34.83	53.93	-19.10	AVG
5		0.3488	41.04	10.20	51.24	58.99	-7.75	QP
6		0.3488	25.64	10.20	35.84	48.99	-13.15	AVG
7	*	0.6268	42.42	10.20	52.62	56.00	-3.38	QP
8		0.6268	29.42	10.20	39.62	46.00	-6.38	AVG
9		7.8129	40.36	10.20	50.56	60.00	-9.44	QP
10		7.8129	32.31	10.20	42.51	50.00	-7.49	AVG
11		12.4482	40.05	10.20	50.25	60.00	-9.75	QP
12		12.4482	31.64	10.20	41.84	50.00	-8.16	AVG



Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Test Model	GB390L-HDBL	Test Mode	Lighting
Environmental Conditions	24.5°C, 52% RH	Test Engineer	Monkey Li
Pol	Neutral	Test Voltage	AC 120V/60Hz

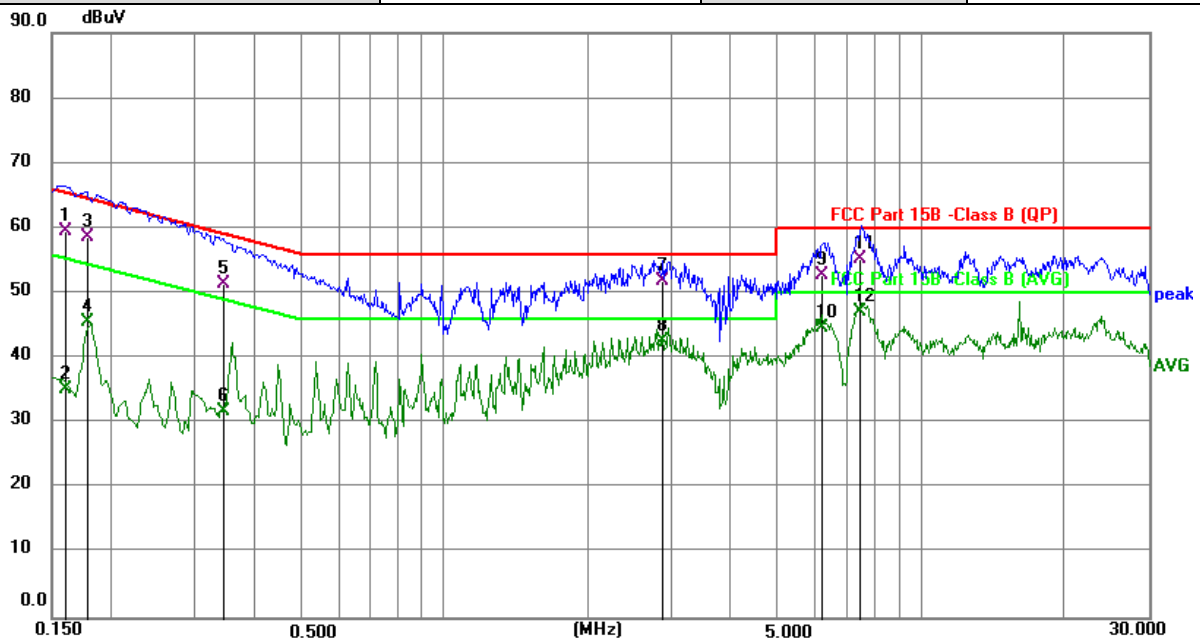

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz		dB	dBuV	dBuV	dB	Detector
1		0.1601	49.35	10.23	59.58	65.46	-5.88	QP
2		0.1601	24.91	10.23	35.14	55.46	-20.32	AVG
3		0.1790	48.31	10.23	58.54	64.53	-5.99	QP
4		0.1790	35.37	10.23	45.60	54.53	-8.93	AVG
5		0.3459	41.18	10.20	51.38	59.06	-7.68	QP
6		0.3459	21.56	10.20	31.76	49.06	-17.30	AVG
7		2.8761	41.72	10.20	51.92	56.00	-4.08	QP
8		2.8761	32.45	10.20	42.65	46.00	-3.35	AVG
9		6.2350	42.54	10.20	52.74	60.00	-7.26	QP
10		6.2350	34.37	10.20	44.57	50.00	-5.43	AVG
11		7.5016	45.07	10.20	55.27	60.00	-4.73	QP
12	*	7.5016	37.01	10.20	47.21	50.00	-2.79	AVG

***Note: 1) Pre-scan all modes and recorded the worst case results in this report.

2) Margin=Reading level + Correct - Limit







3.2. Radiated emission Measurement

3.2.1. Test Equipment

The following test equipments are used during the radiated emission measurement:

Item	Test equipment	Manufacturer	Model No.	Serial No.	Cal Date	Due Date
1	3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH03-HY	2021-06-15	2024-06-15
2	EMI Test Receiver	R&S	ESCI3	101010	2022-05-05	2023-05-04
3	Spectrum Analyzer	Agilent	N9020A	MY49100699	2022-05-05	2023-05-04
4	Log-periodic Antenna	SCHWARZBECK	VULB9163	5094	2022-05-20	2025-05-19
5	Horn Antenna	ETS-LINDGREN	3115	00034771	2022-05-20	2025-05-19
6	EMI Test Software	EZ	EZ EMC	N/A	/	/
7	Positioning Controller	MF	BK8807-4A-2T	2016-0808-008	/	/
8	Broadband Preamplifier	/	BP-01M18G	P190501	2022-06-16	2023-06-15

3.2.2. Block Diagram of Test Setup

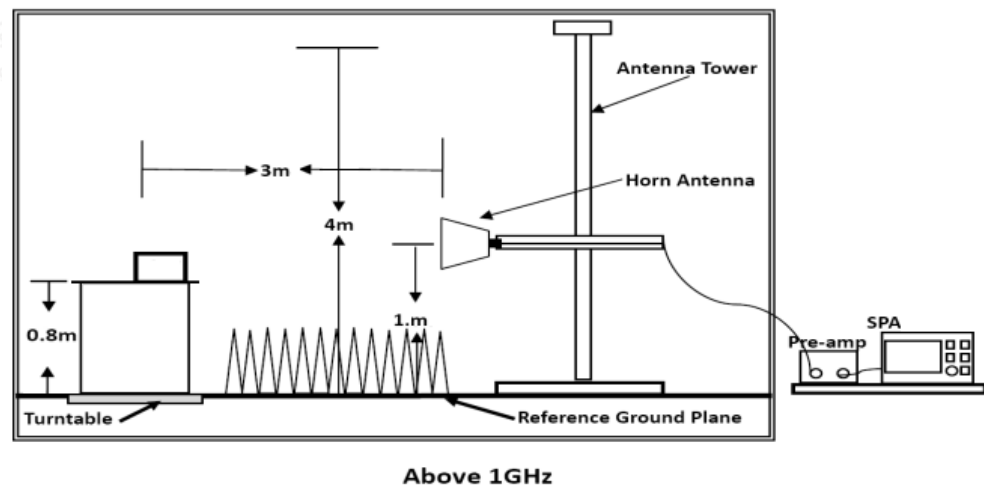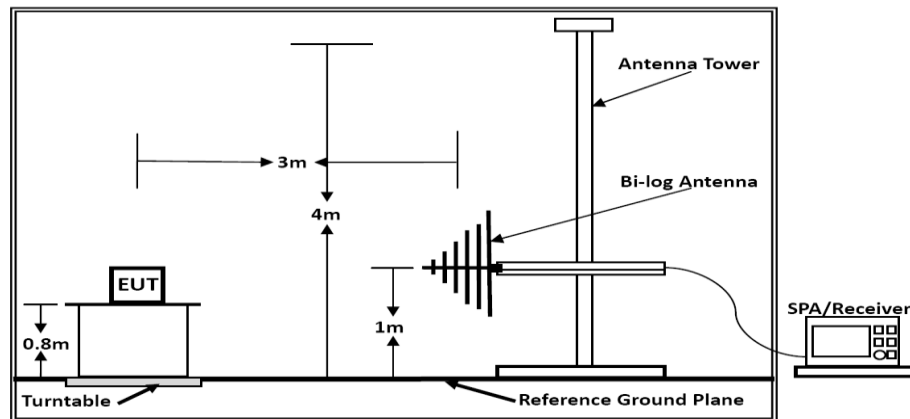

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



3.2.3. Radiated Emission Limit (Class B)

Limits for Radiated Disturbance Below 1GHz

FREQUENCY MHz	DISTANCE Meters	FIELD STRENGTHS LIMIT	
		$\mu\text{V/m}$	$\text{dB}(\mu\text{V})/\text{m}$
30 ~ 88	3	100	40
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46
960 ~ 1000	3	500	54
Remark: (1) Emission level $(\text{dB})\mu\text{V} = 20 \log \text{Emission level } \mu\text{V/m}$ (2) The smaller limit shall apply at the cross point between two frequency bands. (3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.			
Limits for Radiated Emission Above 1GHz			
Frequency (MHz)	Distance (Meters)	Peak Limit ($\text{dB}\mu\text{V/m}$)	Average Limit ($\text{dB}\mu\text{V/m}$)
Above 1000	3	74	54
***Note: The lower limit applies at the transition frequency.			

3.2.4. EUT Configuration on Measurement

The following equipment are installed on Radiated Emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

3.2.5. Operating Condition of EUT

3.2.5.1. Setup the EUT as shown in Section 3.2.2.

3.2.5.2. Let the EUT work in test Lighting and measure it.

3.2.6. Test Procedure

EUT and its simulators are placed on a turntable, which is 0.8 meter high above ground. The turntable can rotate 360 degrees to determine the position of the maximum emission level. EUT is set 3.0 meters away from the receiving antenna, which is mounted on a antenna tower. The antenna can be moved up and down between 1.0 meter and 4 meters to find out the maximum emission level. Broadband antenna (calibrated by-log antenna) is used as receiving antenna. Both horizontal and vertical polarization of the antenna is set on measurement. In order to find the maximum emission levels, all of the interface cables must be manipulated according to ANSI C63.4-2014 on radiated emission measurement.

The bandwidth of the EMI test receiver is set at 120kHz, 300kHz.
The frequency range from 30MHz to 1000MHz is checked.

3.2.7. Radiated Emission Noise Measurement Result

PASS.


The scanning waveforms please refer to the next page.





Test Model	GB390L-HDBL	Test Mode	Lighting
Environmental Conditions	22.3°C, 55% RH	Detector Function	Quasi-peak
Pol	Vertical	Distance	3m
Test Engineer	Monkey Li	Test Voltage	AC 120V/60Hz

80.0 dBuV/m

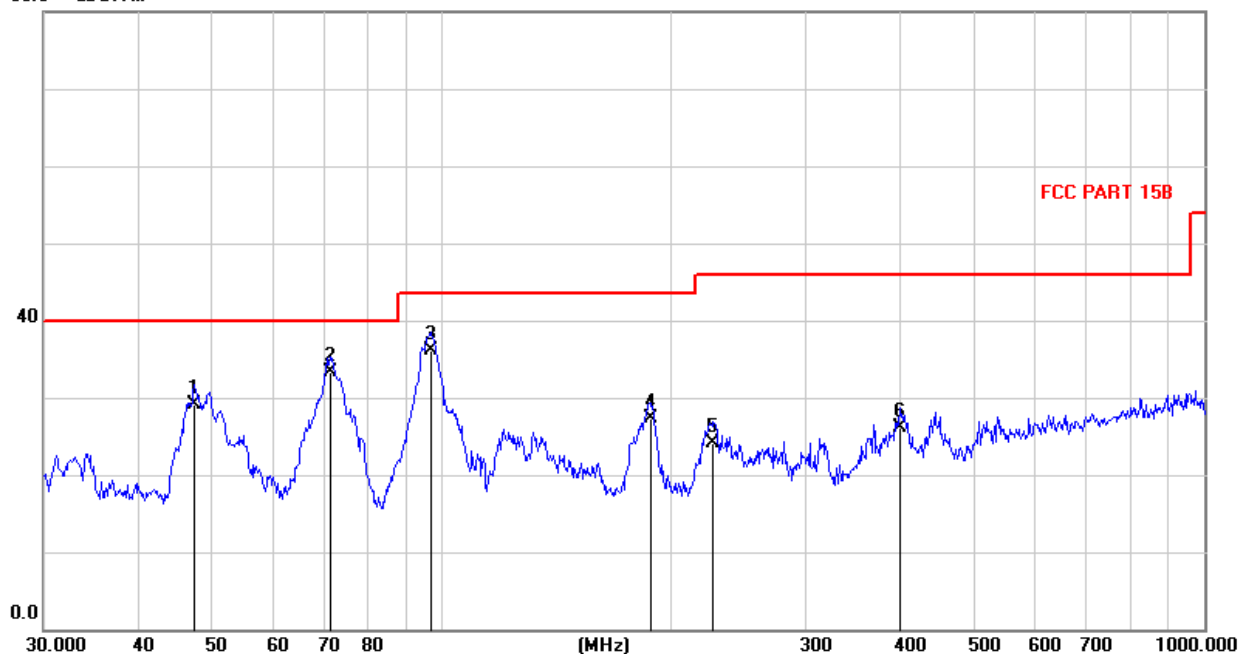

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1		47.4709	16.64	12.37	29.01	40.00	-10.99	QP
2	*	71.4552	23.08	10.15	33.23	40.00	-6.77	QP
3		96.8173	24.75	11.29	36.04	43.50	-7.46	QP
4		188.2474	17.18	10.15	27.33	43.50	-16.17	QP
5		226.9931	12.05	12.11	24.16	46.00	-21.84	QP
6		400.2564	9.36	16.67	26.03	46.00	-19.97	QP



Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Test Model	GB390L-HDBL	Test Mode	Lighting
Environmental Conditions	22.3℃, 55% RH	Detector Function	Quasi-peak
Pol	Horizontal	Distance	3m
Test Engineer	Monkey Li	Test Voltage	AC 120V/60Hz

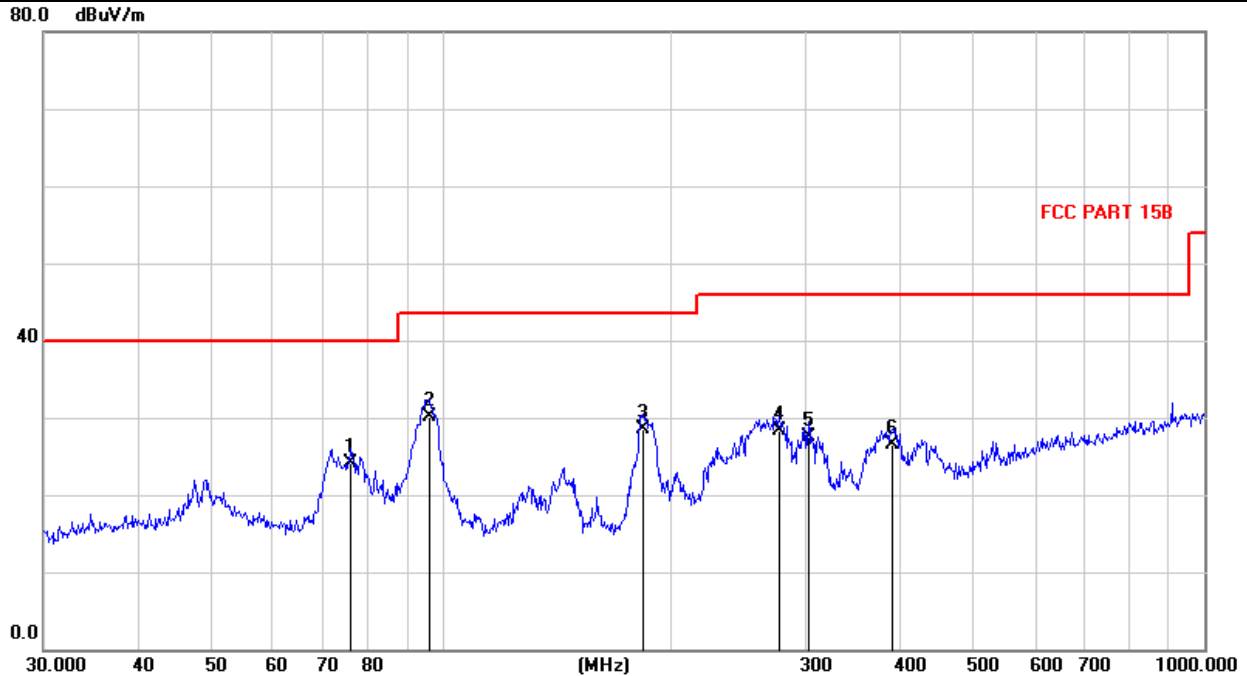

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1		76.1440	14.51	9.56	24.07	40.00	-15.93	QP
2	*	96.4362	18.96	11.06	30.02	43.50	-13.48	QP
3		183.2807	18.34	10.25	28.59	43.50	-14.91	QP
4		277.8231	14.94	13.39	28.33	46.00	-17.67	QP
5		302.8792	13.40	14.16	27.56	46.00	-18.44	QP
6		390.3802	9.89	16.63	26.52	46.00	-19.48	QP

Note:1).Pre-Scan all mode, Thus record worse case mode result in this report.

2) Margin=Reading level + Correct - Limit



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



4. TEST SETUP PHOTOGRAPHS OF EUT

Please refer to separated files for Test Setup Photos of the EUT.

5. EXTERIOR PHOTOGRAPHS OF THE EUT

Please refer to separated files for External Photos of the EUT.

6. INTERIOR PHOTOGRAPHS OF THE EUT

Please refer to separated files for Internal Photos of the EUT.

-----THE END OF TEST REPORT-----

