


REV	DESCRIPTION OF REVISION	ENG APPD	DATE
01	INITIAL DOCUMENT CREATION	M HUMPHREY	09AUG18
02	CHANGE PA RATING TO 2.5A	M HUMPHREY	10SEP18

NOTE:

1. REFER TO NETGEAR SPEC. DOC-00093 FOR COLOR TOLERANCES.
2. INK COLOR IS SHOWN TO THE RIGHT.
3. DIE LINES ARE MAGENTA COLOR AND DO NOT PRINT.
4. MAC & SERIAL NUMBERS TO BE PRINTED BY THE ODM.
5. See NTGR DOC-00112 for SN standard.
6. SN, MAC address, SSID and PASSWORD to be encoded QR (2D) barcode.
  - A. EACH DATA ELEMENT IS TO BE SEPARATED BY A COMMA WITH NO SPACE, AND TO BE PRINTED IN THIS EXACT ORDER. NO COMMA AFTER THE LAST DATA  
 ELEMENT: SERIAL NUMBER,MAC ADDRESS,SSID,PASSWORD,NETGEAR SKU NAME  
 EXAMPLE: BTA15C7300001,C863913C1799,NETGEAR17,freshpanda040,RBR50-100NAS
7. INSURE COUNTRY OF ORIGIN IS CORRECT.
  - A. IF COUNTRY OF ORIGIN IS PRE-PRINTED, UNHIDE THE APPROPRIATE COUNTRY OF ORIGIN LAYER AND INCLUDE COUNTRY OF ORIGIN ON LABEL.
  - B. IF COUNTRY OF ORIGIN IS POST-PRINTED USING A THERMAL PRINTER (OR EQUIVALENT), OMIT TEXT FROM ARTWORK (USE LAYERS).

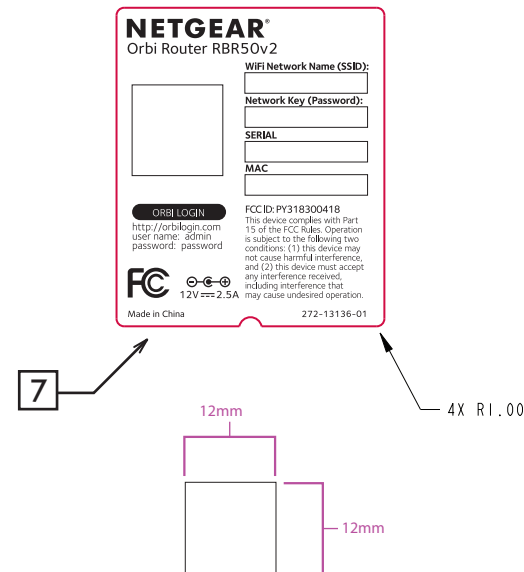

 Pantone Black

AUTHOR: M HUMPHREY	TITLE: AW,RBR50,NAS,PLBL,V2	<b>NETGEAR</b>	
SHEET: 1 of 1	THIS DOCUMENT AND THE DATA DISCLOSED HEREIN OR WHEREWITH IS NOT TO BE REPRODUCED, USED OR DISCLOSED IN WHOLE OR IN PART TO ANYONE WITHOUT THE PERMISSION OF NETGEAR, INC.	P/N: AW-14108-01	REV: 02