



Engineering and Testing for EMC and Safety Compliance


**CERTIFICATION APPLICATION REPORT
FCC PART 15.247 CERTIFICATION**

Test Lab: Rhein Tech Laboratories, Inc. Phone: 703-689-0368 360 Herndon Parkway Fax: 703-689-2056 Suite 1400 Web Site: www.rheintech.com Herndon, VA 20170 E-Mail: ATCBINFO@rheintech.com		Applicant Information: Paxar Americas, Inc. Phone: 937-865-2123 x2020 170 Monarch Lane Fax: 937-865-2048 Miamisburg, OH 45342 Email: jim.bacher@paxar.com Contact: James A. Bacher	
FCC ID:	GU69460IPLA3021	GRANTEE FRN NUMBER:	0003583150
PLAT FORM:	94xx Series	RTL WORK ORDER NUMBER:	2002190
MODEL(S):	9460IP	RTL QUOTE NUMBER:	QRTL02-593
DATE OF TEST REPORT:	April 17, 2003		
American National Standard Institute:	ANSI C63.4: Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz		
FCC Classification:	DSS – Part 15 Spread Spectrum Transmitter Frequency Hopping		
FCC Rule Part(s):	Part 15.247: Operation within the bands 920-928 MHz, 2400-2483.5 MHz and 5725-5850 MHz Frequency Hopping System		
Industry Canada Standard:	RSS-210: Low Power License-Exempt Radio Communication Devices (All Frequency Bands)		
Digital Interface Information	Digital Interface was found to be compliant		
Receiver Information	Receiver was found to be compliant		
Frequency Range (MHz)	Output Power* (W)	Frequency Tolerance	Emission Designator
2402-2480	0.112	N/A	N/A

* output power is maximum peak conducted

We, the undersigned, hereby declare that the equipment tested and referenced in this report conforms to the identified standard(s) as described in this test report.

Furthermore, there was no deviation from, additions to, or exclusions from the FCC Part 2, FCC Part 15, Industry Canada RSS-210, ANSI C63.4, ANSI/TIA/EIA603, and ANSI/TIA/EIA 603-1.

Signature: 

Date: April 17, 2003

Typed/Printed Name: Desmond A. Fraser

Position: President

TABLE OF CONTENTS

1	GENERAL INFORMATION	5
1.1	SCOPE	5
1.2	TEST FACILITY	5
1.3	RELATED SUBMITTAL(S)/GRANT(S).....	5
1.4	MODIFICATIONS	5
2	TEST INFORMATION	6
2.1	TEST JUSTIFICATION	6
2.2	EXERCISING THE EUT	6
2.3	TEST RESULT SUMMARY	6
2.4	TEST SYSTEM DETAILS	7
2.5	CONFIGURATION OF TESTED SYSTEM	7
3	COMPLIANCE WITH THE RESTRICTED BAND EDGE – FCC §15.205; IC RSS-210 §6.3	8
3.1	TEST PROCEDURE.....	8
3.2	BAND EDGE TEST EQUIPMENT	8
3.3	COMPLIANCE WITH THE RESTRICTED BAND EDGE TEST DATA	8
4	CONDUCTED LIMITS – FCC §15.207; IC RSS-210 §6.6 AND 7.4	11
5	RADIATED EMISSION LIMITS RECEIVER/DIGITAL INTERFACE – FCC §15.209; IC RSS-210 §7.3	12
5.1	RECEIVER/DIGITAL INTERFACE RADIATED EMISSION LIMITS TEST PROCEDURE.....	12
5.2	RECEIVER/DIGITAL INTERFACE RADIATED EMISSIONS TEST EQUIPMENT	12
5.3	RECEIVER/DIGITAL INTERFACE RADIATED EMISSION LIMITS TEST DATA	13
6	RADIATED EMISSION LIMITS; SPURIOUS AND HARMONICS – FCC §15.247; IC RSS-210 §6.3.....	14
6.1	RADIATED SPURIOUS EMISSION LIMITS TEST PROCEDURE.....	14
6.2	RADIATED SPURIOUS TEST EQUIPMENT	14
6.3	RADIATED EMISSIONS HARMONICS/SPURIOUS TEST DATA	15
7	CARRIER FREQUENCY SEPARATION - §15.247 (A)(1).....	17
8	HOPPING CHARACTERISTICS – FCC §15.247 (A)(1)(II); IC RSS-210 §6.2.2(O).....	18
8.1	NUMBER OF HOPPING FREQUENCIES.....	18
8.2	20 DB BANDWIDTH TEST PROCEDURE – FCC §15.247 (A)(1)(I); IC RSS-210 §5.9.1.....	19
8.3	AVERAGE TIME OF OCCUPANCY	23
9	MODULATED BANDWIDTH - §15.247(A)(2)	25
9.1	MODULATED BANDWIDTH TEST PROCEDURE – MINIMUM 6 DB BANDWIDTH.....	25
9.2	BANDWIDTH TEST EQUIPMENT	25
9.3	BANDWIDTH TEST DATA	25
9.4	MODULATED BANDWIDTH PLOTS	26
10	PEAK OUTPUT POWER - FCC §15.247(B)(1); IC RSS-210 §6.2.2(O)(B).....	29
10.1	POWER OUTPUT TEST PROCEDURE	29
10.2	POWER OUTPUT TEST EQUIPMENT	29
10.3	POWER OUTPUT TEST DATA	29
11	ANTENNA CONDUCTED SPURIOUS EMISSIONS - §15.247(C); IC RSS-210 §6.2.2(O)(E1)	30
11.1	ANTENNA CONDUCTED SPURIOUS EMISSIONS TEST PROCEDURES	30
11.2	ANTENNA CONDUCTED SPURIOUS TEST EQUIPMENT	30
11.3	ANTENNA CONDUCTED SPURIOUS DATA PLOTS	31
11.4	ANTENNA CONDUCTED SPURIOUS EMISSIONS CHANNEL 2.....	33
11.5	ANTENNA CONDUCTED SPURIOUS EMISSIONS CHANNEL 40.....	34
11.6	ANTENNA CONDUCTED SPURIOUS EMISSIONS HIGH CHANNEL 80.....	35
12	CONCLUSION	36

FIGURE INDEX

FIGURE 1:	WORST CASE CONFIGURATION OF SYSTEM UNDER TEST	7
FIGURE 2:	ATTENUATOR SCHEMATIC.....	38
FIGURE 3:	COMPONENT PLACEMENT.....	39

TABLE INDEX

TABLE 2-1:	TEST RESULT SUMMARY FOR FCC RULES AND REGULATIONS.....	6
TABLE 2-2:	EQUIPMENT UNDER TEST (EUT).....	7
TABLE 3-1:	BAND EDGE TEST EQUIPMENT	8
TABLE 5-1:	RECEIVER/DIGITAL INTERFACE RADIATED EMISSIONS TEST EQUIPMENT.....	12
TABLE 5-2:	RECEIVER/DIGITAL INTERFACE RADIATED EMISSIONS	13
TABLE 6-1:	RADIATED SPURIOUS EMISSIONS TEST EQUIPMENT.....	14
TABLE 6-2:	RADIATED EMISSIONS HARMONICS/SPURIOUS (CHANNEL 2; 2402 MHZ).....	15
TABLE 6-3:	RADIATED EMISSIONS HARMONICS/SPURIOUS (CHANNEL 40, 2440 MHZ)	15
TABLE 6-4:	RADIATED EMISSIONS HARMONICS/SPURIOUS (CHANNEL 80; 2480 MHZ).....	16
TABLE 8-1:	20 DB BANDWIDTH TEST EQUIPMENT	19
TABLE 8-2:	MODULATED BANDWIDTH TEST DATA	19
TABLE 9-1:	BANDWIDTH TEST EQUIPMENT	25
TABLE 9-2:	MINIMUM 6 DB BANDWIDTH TEST DATA	25
TABLE 10-1:	POWER OUTPUT TEST EQUIPMENT	29
TABLE 10-2:	POWER OUTPUT TEST DATA	29
TABLE 11-1:	ANTENNA CONDUCTED SPURIOUS TEST EQUIPMENT	30
TABLE 11-2:	ANTENNA CONDUCTED SPURIOUS EMISSIONS CHANNEL 2.....	33
TABLE 11-3:	ANTENNA CONDUCTED SPURIOUS EMISSIONS CHANNEL 40.....	34
TABLE 11-4:	ANTENNA CONDUCTED SPURIOUS EMISSIONS CHANNEL 80.....	35

PLOT INDEX

PLOT 3-1:	LOWER BAND EDGE: DELTA MEASUREMENT (2402 MHZ).....	9
PLOT 3-2:	UPPER BAND EDGE: DELTA MEASUREMENT (2480 MHZ).....	10
PLOT 7-1:	CARRIER FREQUENCY SEPARATION.....	17
PLOT 8-1:	NUMBER OF HOPPING FREQUENCIES	18
PLOT 8-2:	20 DB BANDWIDTH CHANNEL 2	20
PLOT 8-3:	20 DB BANDWIDTH CHANNEL 40	21
PLOT 8-4:	20 DB BANDWIDTH CHANNEL 80	22
PLOT 8-5:	TIME OF OCCUPANCY (DWEELL TIME).....	23
PLOT 8-6:	TIME OF OCCUPANCY (DWEELL TIME 30 SECOND SWEEP).....	24
PLOT 9-1:	MODULATED BANDWIDTH CHANNEL 2.....	26
PLOT 9-2:	MODULATED BANDWIDTH CHANNEL 40.....	27
PLOT 9-3:	MODULATED BANDWIDTH CHANNEL 80.....	28
PLOT 11-1:	ANTENNA CONDUCTED SPURIOUS (9 KHZ-2 GHZ) 2440 MHZ.....	31
PLOT 11-2:	ANTENNA CONDUCTED SPURIOUS (2-24 GHZ) 2440 MHZ.....	32

APPENDIX INDEX

APPENDIX A:	RF EXPOSURE INFORMATION	37
APPENDIX B:	ANTENNA SPECIFICATIONS	38
APPENDIX C:	ATTESTATION LETTER	40
APPENDIX D:	AGENCY AUTHORIZATION LETTER	41
APPENDIX E:	CONFIDENTIALITY REQUEST LETTER	42
APPENDIX F:	PRODUCT DESCRIPTION	43
APPENDIX G:	LABEL AND LABEL LOCATION	44
APPENDIX H:	SCHEMATICS	46
APPENDIX I:	BLOCK DIAGRAM	47
APPENDIX J:	MANUAL	48
APPENDIX K:	TEST PHOTOGRAPHS	49
APPENDIX L:	EXTERNAL PHOTOGRAPHS	51
APPENDIX M:	INTERNAL PHOTOGRAPHS	58

PHOTOGRAPH INDEX

PHOTOGRAPH 1:	LABEL LOCATION	44
PHOTOGRAPH 2:	SAMPLE FCC ID LABEL	45
PHOTOGRAPH 3:	RADIATED EMISSION FRONT VIEW; WORST CASE CONFIGURATION	49
PHOTOGRAPH 4:	RADIATED EMISSION REAR VIEW; WORST CASE CONFIGURATION	50
PHOTOGRAPH 5:	FRONT VIEW OF EUT	51
PHOTOGRAPH 6:	BACK VIEW OF EUT	52
PHOTOGRAPH 7:	RIGHT SIDE OF EUT	53
PHOTOGRAPH 8:	LEFT SIDE OF EUT	54
PHOTOGRAPH 9:	TOP VIEW OF EUT	55
PHOTOGRAPH 10:	BOTTOM VIEW OF EUT	56
PHOTOGRAPH 11:	EUT BACK COVER OPEN SHOWING DATA CABLE	57
PHOTOGRAPH 12:	EUT WITH FRONT COVER OPEN	58
PHOTOGRAPH 13:	EXTERNAL COVER	59
PHOTOGRAPH 14:	INSIDE LABEL	60
PHOTOGRAPH 15:	TOP OF BATTERY	61
PHOTOGRAPH 16:	BOTTOM OF BATTERY SHOWING LABEL	62
PHOTOGRAPH 17:	OUTSIDE OF TOP COVER	63
PHOTOGRAPH 18:	EUT WITH TOP COVER REMOVED	64
PHOTOGRAPH 19:	FRONT OF LCD PCB WITH TOP OF KEYPAD	65
PHOTOGRAPH 20:	BACK OF LCD PCB WITH BACK OF KEYPAD	66
PHOTOGRAPH 21:	PCMCIA PCB FRONT	67
PHOTOGRAPH 22:	PCMCIA PCB BACK	68
PHOTOGRAPH 23:	FRONT OF SYMBOL WLAN CARD	69
PHOTOGRAPH 24:	BACK OF SYMBOL WLAN CARD	70
PHOTOGRAPH 25:	TOP ASSEMBLY BRACKET	71
PHOTOGRAPH 26:	ANTENNA MOUNTED IN TOP COVER	72
PHOTOGRAPH 27:	FRONT OF ANTENNA	73
PHOTOGRAPH 28:	BACK OF ANTENNA	74
PHOTOGRAPH 29:	TOP WITHOUT RF ASSEMBLY	75
PHOTOGRAPH 30:	TOP OF SERIAL PCB	76
PHOTOGRAPH 31:	BOTTOM OF SERIAL PCB WITH CONNECTOR	77
PHOTOGRAPH 32:	INSIDE OF BACK CASE	78
PHOTOGRAPH 33:	MAIN PCB MOUNTED IN CHASSIS	79
PHOTOGRAPH 34:	MAIN PCB BACK VIEW IN CHASSIS	80
PHOTOGRAPH 35:	INSIDE BACK OF CHASSIS WITH PCB REMOVED	81
PHOTOGRAPH 36:	MAIN PCB FRONT	82
PHOTOGRAPH 37:	MAIN PCB BACK	83

1 GENERAL INFORMATION

1.1 SCOPE

FCC Rules Part 15.247: Frequency Hopping, Direct Spread Spectrum and Hybrid Systems that are in operation within the bands of 902-928 MHz, 2400-2483.5 MHz and 5725-5850 MHz.

IC RSS-210 Section 6.2.2(o): Frequency Hopping, Direct Spread Spectrum and Hybrid Systems that are in operation within the bands of 902-928 MHz, 2400-2483.5 MHz and 5725-5850 MHz.

A direct sequence (DS) system is a spread spectrum (SS) system in which the carrier has been modulated by a high speed spreading code and an information data stream. The high-speed code sequence dominates the “modulating function” and is the direct cause of the wide spreading of the transmitted signal.

1.2 TEST FACILITY

The open area test site and conducted measurement facility used to collect the radiated data is located at 360 Herndon Parkway, Suite 1400, Herndon, Virginia 20170. This site has been fully described in a report and approved by the Federal Communications Commission to perform AC line conducted and radiated emissions testing (ANSI C63.4 1992).

1.3 RELATED SUBMITTAL(S)/GRANT(S)

This is an original application for Certification for Paxar Americas, Inc., Model Name: Sierra Sport2™, Model Number: 9460IP, FCC ID: GU69460IPLA3021. The IF and LO's were investigated and tested.

1.4 MODIFICATIONS

The gain of the dipole antenna originally supplied with the EUT caused the EUT to fail FCC/Industry Canada emission requirements. In order to meet FCC/Industry Canada requirements, this antenna was replaced with a redesigned dipole antenna with the following characteristics:

Antenna	Rparallel Ohms	Series Resistor Ohms	Without Attenuation Measured dB	With Attenuation Measured dB	Gain DBi	Calculated Attenuation DB	Measured Attenuation dB
5	220	33	-30.4	-34.0	-3.6	3.3	3.6

2 TEST INFORMATION

2.1 TEST JUSTIFICATION

The EUT was tested in all three orthogonal planes in order to determine worst-case emissions. 2402 MHz, 2440 MHz and 2480 MHz were tested and investigated from 9 kHz to 24 GHz. Data for all three channels is presented in this report.

The EUT contains an internal dipole antenna mounted within a plastic case. The antenna transmits, receives, and is connected to the PCMCIA WLAN internal antenna port.

The worst-case data taken in this report represents the highest data rate at 2 Mbps. The data rate of 1 Mbps was also investigated and found to be in compliance. The change in envelope did not cause the EUT to be non-compliant in any of the aforementioned modes.

2.2 EXERCISING THE EUT

The EUT was provided with software to continuously transmit during testing. The carrier was also checked to verify that information was being transmitted.

2.3 TEST RESULT SUMMARY

TABLE 2-1: TEST RESULT SUMMARY FOR FCC RULES AND REGULATIONS

STANDARD	TEST	PASS/FAIL OR N/A
FCC 15.205	Compliance with the Restricted Band Edge	Pass
FCC 15.207	Conducted Emissions	Pass
FCC 15.209	Radiated Emissions	Pass
FCC 15.247(a)(2)	Modulated Bandwidth	Pass
FCC 15.247(b)	Power Output	Pass
FCC 15.247(c)	Antenna Conducted Spurious Emissions	Pass
FCC 15.247(d)	Power Spectral Density	Pass

2.4 TEST SYSTEM DETAILS

The FCC Identifiers for all equipment, plus descriptions of all cables used in the tested system, are identified in Table 2-2.

TABLE 2-2: EQUIPMENT UNDER TEST (EUT)

PART	MANUFACTURER	MODEL	SERIAL NUMBER	FCC ID	CABLE DESCRIPTION	RTL BAR CODE
Printer	Paxar Americas, Inc.	M0946002	00A0F8A02A46	GU69460IPLA3021	Unshielded	14757
WLAN PCMCIA Card	Symbol Technologies	LA-3021-100M-US	00A97V388	H9PLA3021-100	N/A	N/A
Battery	Paxar Americas, Inc.	120095	N/A	N/A	N/A	14761
Battery Adapter Pack	Paxar Americas, Inc.	120096	X9080080	N/A	N/A	14758
Antenna	Paxar Americas, Inc.	124897 AA	5	N/A	Shielded I/O	14948

2.5 CONFIGURATION OF TESTED SYSTEM

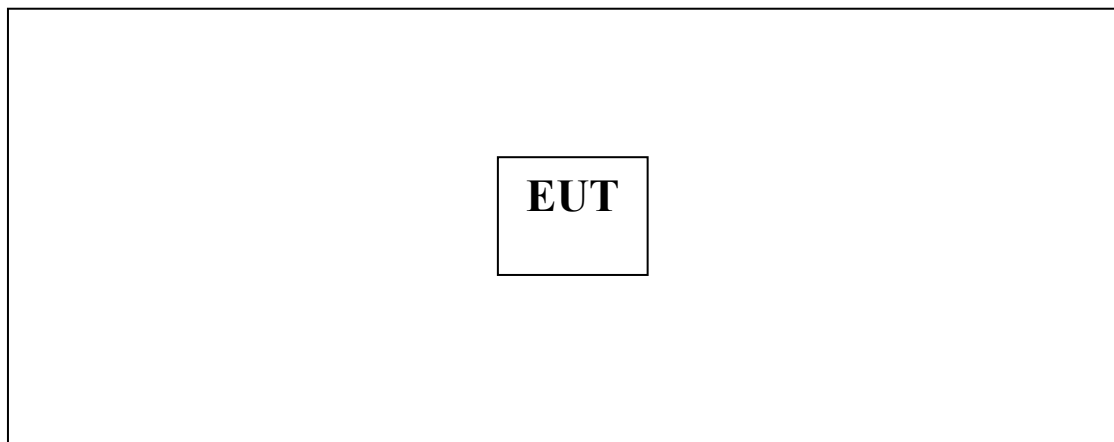


FIGURE 1: WORST CASE CONFIGURATION OF SYSTEM UNDER TEST

3 COMPLIANCE WITH THE RESTRICTED BAND EDGE – FCC §15.205; IC RSS-210 §6.3

3.1 TEST PROCEDURE

Compliance with the band edges was performed using the FCC's "Radiated Measurement at a Band Edge" guidance document. The data taken in this report represents the worst case at 2 Mbps. The data rate at 1 Mbps was also investigated and found to be in compliance.

3.2 BAND EDGE TEST EQUIPMENT

TABLE 3-1: BAND EDGE TEST EQUIPMENT

RTL ASSET #	MANUFACTURER	MODEL	PART TYPE	SERIAL NUMBER	CALIBRATION DUE DATE
900913	Hewlett Packard	85462A	EMI Receiver RF Section, (9 kHz - 6.5 GHz)	3325A00159	12/5/03
900914	Hewlett Packard	85460A	RF Filter Section, (100 kHz to 6.5 GHz)	3330A00107	12/5/03
900814	Electro-Metrics	EM-6961 (RGA-60)	Double Ridged Guide Antenna (1-18 GHz)	2310	2/26/03
901231	IW Microwave Products	KPS-1503-2400-KPS	High Frequency RF Cables	240"	1/30/04
901235	IW Microwave Products	KPS-1503-360-KPS	High Frequency RF Cables	36"	1/30/04
900931	Hewlett Packard	8566B	Spectrum Analyzer (100 Hz – 22 GHz)	3138A07771	5/10/03

3.3 COMPLIANCE WITH THE RESTRICTED BAND EDGE TEST DATA

Calculation of Lower Band Edge

The level 112.4 dBuV/m is the peak Field Strength measurement (worst case), from which the delta measurement of 63.8 dB is subtracted (reference plots), which is equivalent to a level of 48.6 dB. This level has a margin of 5.4 dB below the limit of 54 dBuV/m

Calculation: $112.4 \text{ dBuV/m} - 63.8 \text{ dB} - 54 \text{ dBuV/m} = -5.4 \text{ dB}$

Calculation of Upper Band Edge

The level 113.7 dBuV/m is the peak Field Strength measurement (worst case), from which the delta measurement of 61.0 dB is subtracted (reference plots), which is equivalent to a level of 52.7 dB. This level has a margin of 1.3 dB below the limit of 54 dBuV/m.


Calculation: $113.7 \text{ dBuV/m} - 61.0 \text{ dB} - 54 \text{ dBuV/m} = -1.3 \text{ dB}$

Frequency (MHz): 2402
Resolution Bandwidth (kHz): 300
Video Bandwidth (kHz): 300
Sweep Time (ms): 50

PLOT 3-1: LOWER BAND EDGE: DELTA MEASUREMENT (2402 MHZ)

Peak field strength of Channel 2 (1 MHz RBW/1 MHz VBW) = 112.37 dBuV/m
Average field strength of Channel 2 (1 MHz RBW/10 Hz VBW) = 111.87 dBuV/m

Delta measurement: 63.8 dB

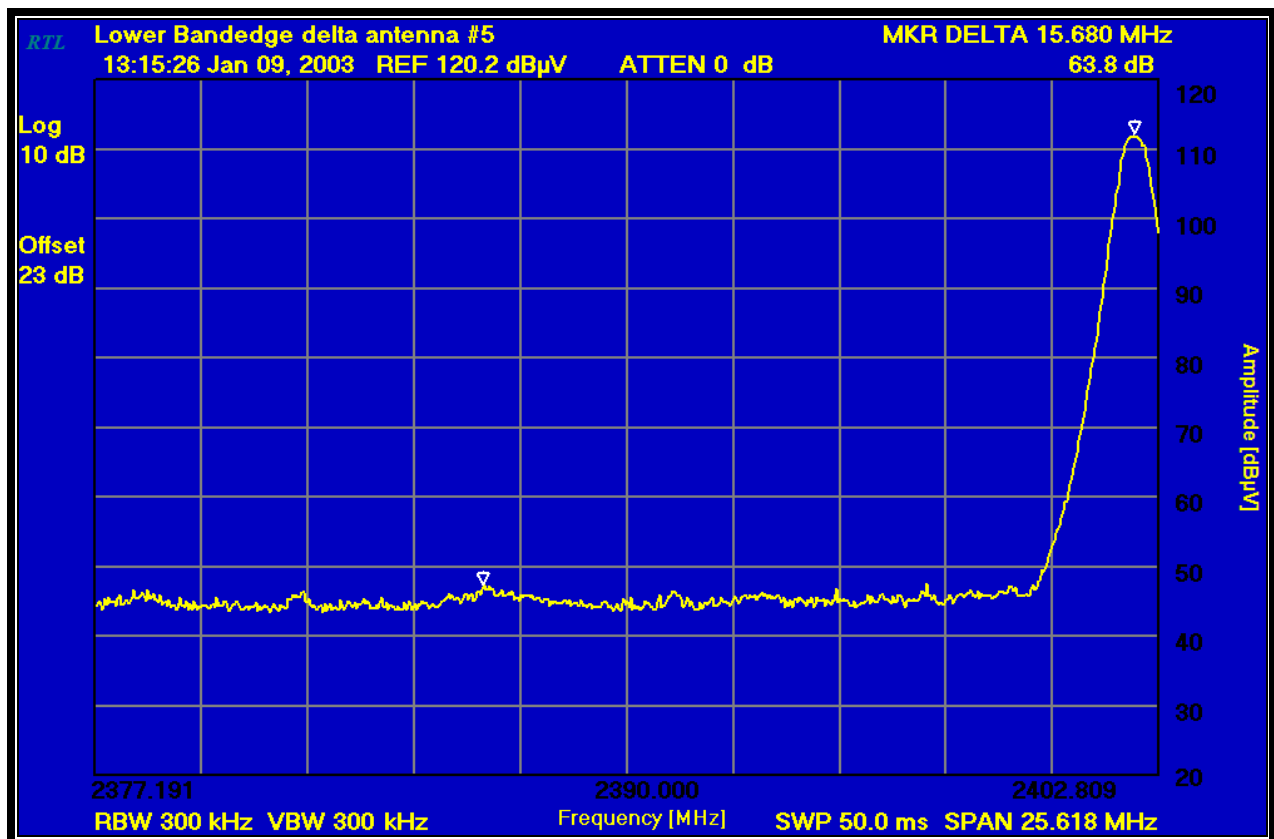

TEST PERSONNEL:

Daniel W. Baltzell
EMC Test Engineer

Daniel W. Baltzell

Signature


January 9, 2003
Date Of Test

Frequency (MHz): 2480
 Resolution Bandwidth (kHz): 300
 Video Bandwidth (kHz): 300
 Sweep Time (ms): 50

PLOT 3-2: UPPER BAND EDGE: DELTA MEASUREMENT (2480 MHZ)

Peak field strength of Upper Band Edge (1 MHz RBW/1 MHz VBW) = 113.7 dBuV/m
 Average field strength of Upper Band Edge (1 MHz RBW/10 Hz VBW) = 113.2 dBuV/m

Delta measurement = 61.0 dB

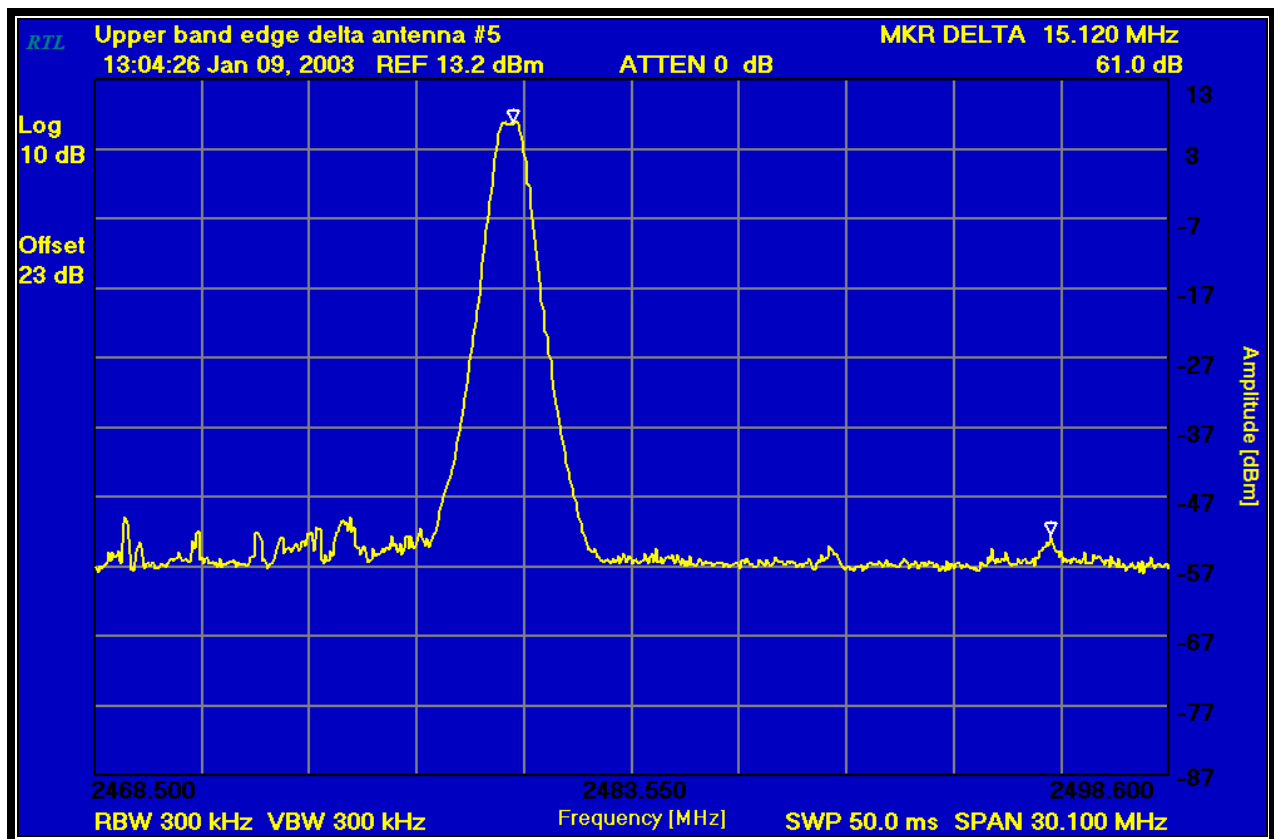

TEST PERSONNEL:

Daniel W. Baltzell
 EMC Test Engineer

Daniel W. Baltzell

Signature

January 9, 2003
 Date Of Test

Rhein Tech Laboratories
360 Herndon Parkway
Suite 1400
Herndon, VA 20170
<http://www.rheintech.com>

Client: Paxar Americas, Inc.
FCC: Part 15.247
Industry Canada: RSS-210
FCC ID: GU69460IPLA3021
Model #: 9460IP

4 CONDUCTED LIMITS – FCC §15.207; IC RSS-210 §6.6 AND 7.4

Because the EUT is battery operated, no conducted emissions tests were performed.

5 RADIATED EMISSION LIMITS RECEIVER/DIGITAL INTERFACE – FCC §15.209; IC RSS-210 §7.3

5.1 RECEIVER/DIGITAL INTERFACE RADIATED EMISSION LIMITS TEST PROCEDURE

Emissions from the digital portion of the EUT were tested and found to comply with the requirements of FCC Part 15.209.

5.2 RECEIVER/DIGITAL INTERFACE RADIATED EMISSIONS TEST EQUIPMENT

TABLE 5-1: RECEIVER/DIGITAL INTERFACE RADIATED EMISSIONS TEST EQUIPMENT

RTL ASSET #	MANUFACTURER	MODEL	PART TYPE	SERIAL NUMBER	CALIBRATION DUE DATE
900889	Hewlett Packard	85685A	RF Preselector for HP 8566B or 8568B (20 Hz-2 GHz)	3146A01309	11/21/03
900905	Rhein Tech Labs	PR-1040	Amplifier	900905	7/10/03
900931	Hewlett Packard	8566B	Spectrum Analyzer (100 Hz - 22 GHz)	3138A07771	5/10/03
900969	Hewlett Packard	85650A	Quasi-Peak Adapter	2412A00414	5/10/03
901053	Schaffner Chase	CBL6112B	Bi-Log Antenna (20 MHz - 2 GHz)	2648	5/22/03

5.3 RECEIVER/DIGITAL INTERFACE RADIATED EMISSION LIMITS TEST DATA

TABLE 5-2: RECEIVER/DIGITAL INTERFACE RADIATED EMISSIONS

Temperature: 69°F					Humidity: 84%				
Emission Frequency (MHz)	Test Detector	Antenna Polarity (H/V)	Turntable Azimuth (deg)	Antenna Height (m)	Analyzer Reading (dBuV)	Site Correction Factor (dB/m)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)
120.004	Qp	H	215	4.0	40.7	-11.1	29.6	43.5	-13.9
180.004	Qp	H	215	2.0	41.7	-12.5	29.2	43.5	-14.3
280.001	Qp	V	325	2.0	39.7	-7.3	32.4	46.0	-13.6
300.001	Qp	V	360	2.0	48.6	-6.8	41.8	46.0	-4.2
320.001	Qp	V	315	1.8	42.0	-6.1	35.9	46.0	-10.1
340.001	Qp	V	360	2.0	50.0	-5.2	44.8	46.0	-1.2
366.996	Qp	H	125	1.0	38.7	-3.8	34.9	46.0	-11.1
380.001	Qp	V	360	1.6	38.9	-3.3	35.6	46.0	-10.4
400.001	Qp	V	215	1.6	44.6	-3.3	41.3	46.0	-4.7
700.012	Qp	H	180	1.4	37.9	4.5	42.4	46.0	-3.6

QP: RES. =100 kHz, VID= 100 kHz; AV: RES. = 1 MHz, VID = 10 Hz

TEST PERSONNEL:

Kinh Ly

Kinh Ly
EMC Test Engineer

Signature

October 1, 2002
Date Of Test

6 RADIATED EMISSION LIMITS; SPURIOUS AND HARMONICS – FCC §15.247; IC RSS-210 §6.3

6.1 RADIATED SPURIOUS EMISSION LIMITS TEST PROCEDURE

Radiated Spurious Emissions applies to harmonics and spurious emissions that fall in the restricted and non-restricted bands. The restricted bands are listed in Part 15.205. The maximum permitted average field strength for the restricted band is listed in Part 15.209. The EUT was tested in the X-Y, X-Z and Y-Z orthogonal planes.

6.2 RADIATED SPURIOUS TEST EQUIPMENT

TABLE 6-1: RADIATED SPURIOUS EMISSIONS TEST EQUIPMENT

RTL ASSET #	MANUFACTURER	MODEL	PART TYPE	SERIAL NUMBER	CALIBRATION DUE DATE
900772	EMCO	3161-02	Horn Antenna (2-4 GHz)	9804-1044	3/15/04
900323	EMCO	3160-7	Horn Antennas (8.2 - 12.4 GHz)	9605-1054	6/10/04
900356	EMCO	3160-08	Horn Antennas (12.4 – 18 GHz)	9607-1044	6/10/04
900321	EMCO	3161-03	Horn Antenna (4.0-8.2 GHz)	9508-1020	4/10/04
901053	Schaffner & Chase	CBL6112B	Bilog Antenna (20 MHz - 2 GHz)	2648	5/24/03
900905	Rhein Tech Laboratories, Inc.	PR-1040	Pre Amplifier 40dB (10 MHz – 2 GHz)	1006	7/10/03
900325	EMCO	3160-9	Horn Antennas (18 - 26.5 GHz)	9605-1051	7/30/04
900814	Electro-Metrics	EM-6961 (RGA-60)	Double Ridged Guide Antenna (1 - 18 GHz)	2310	2/26/03
900889	Hewlett Packard	85685A	RF Preselector for HP 8566B or 8568B (20 Hz-2 GHz)	3146A01309	11/21/03
900905	Rhein Tech Labs	PR-1040	Amplifier	900905	7/10/03
900931	Hewlett Packard	8566B	Spectrum Analyzer (100 Hz - 22 GHz)	3138A07771	5/10/03
900930	Hewlett Packard	85662A	Spectrum Analyzer Display Section	3144A20839	5/10/03
900932	Hewlett Packard	8449B	Microwave Preamplifier, (1 to 26.5 GHz)	3008A00505	7/15/03
900969	Hewlett Packard	85650A	Quasi-Peak Adapter	2412A00414	5/10/03

6.3 RADIATED EMISSIONS HARMONICS/SPURIOUS TEST DATA

Operating Frequency (MHz): 2402
Measured Level at 100kHz (dBuV/m): 113.1
Limit (dBuV/m): 93.1

TABLE 6-2: RADIATED EMISSIONS HARMONICS/SPURIOUS (CHANNEL 2; 2402 MHZ)

Emission Frequency (MHz)	Test Detector	Antenna Polarity (H/V)	Analyzer Reading (dBuV)	Site Correction Factor (dB/m)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)
371.000	Qp	V	42.1	-7.4	34.7	93.1	-58.4
460.000	Qp	V	41.5	-6.8	34.7	93.1	-58.4
591.446	Qp	V	39.6	-5.9	33.7	93.1	-59.4
4804.000	Pk	V	42.8	13.8	56.6	64.0	-7.4
4804.000	Av	V	35.2	13.8	49.0	54.0	-5.0

QUASI-PEAK: RES: 100K, VID: 100K; PEAK: RES. =1 MHz, VID= 1MHz; AVERAGE: RES. =1 MHz, VID= 10Hz

Operating Frequency (MHz): 2440
Measured Level at 100kHz (dBuV/m): 114.1
Limit (dBuV/m): 94.1

TABLE 6-3: RADIATED EMISSIONS HARMONICS/SPURIOUS (CHANNEL 40, 2440 MHZ)

Emission Frequency (MHz)	Test Detector	Antenna Polarity (H/V)	Analyzer Reading (dBuV)	Site Correction Factor (dB/m)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)
371.000	Qp	V	42.1	-7.4	34.7	94.1	-59.4
460.000	Qp	V	41.5	-6.8	34.7	94.1	-59.4
591.446	Qp	V	39.6	-5.9	33.7	94.1	-60.4
4880.000	Pk	V	43.0	13.5	56.5	64.0	-7.5
4880.000	Av	V	33.8	13.5	47.3	54.0	-6.7
7320.000	Av	V	32.3	11.7	44.0	54.0	-10.0
12200.000	Av	V	27.6	16.5	44.1	54.0	-9.9

QUASI-PEAK: RES: 100K, VID: 100K; PEAK: RES. =1 MHz, VID= 1MHz; AVERAGE: RES. =1 MHz, VID= 10Hz


Operating Frequency (MHz): 2480
Measured Level at 100kHz (dBuV/m): 113.4
Limit (dBuV/m): 93.4

TABLE 6-4: RADIATED EMISSIONS HARMONICS/SPURIOUS (CHANNEL 80; 2480 MHZ)

Emission Frequency (MHz)	Test Detector	Antenna Polarity (H/V)	Analyzer Reading (dBuV)	Site Correction Factor (dB/m)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)
371.000	Qp	V	42.1	-7.4	34.7	93.4	-58.7
460.000	Qp	V	41.5	-6.8	34.7	93.4	-58.7
591.446	Qp	V	39.6	-5.9	33.7	93.4	-59.7
4960.000	Pk	V	45.7	13.8	59.5	64.0	-4.5
4960.000	Av	V	39.0	13.8	52.8	54.0	-1.2
7440.000	Av	V	35.0	12.2	47.2	54.0	-6.8
12400.000	Av	V	30.2	16.8	47.0	54.0	-7.0

QUASI-PEAK: RES: 100K, VID: 100K; PEAK: RES. =1 MHz, VID= 1MHz; AVERAGE: RES. =1 MHz, VID= 10Hz

TEST PERSONNEL:


 Daniel W. Baltzell EMC Test Engineer	 Signature	January 9, 2003 Date Of Test
--	---------------	---------------------------------

7 CARRIER FREQUENCY SEPARATION - §15.247 (A)(1)

Frequency Hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

Measured frequency separation = 1.02 MHz

PLOT 7-1: CARRIER FREQUENCY SEPARATION

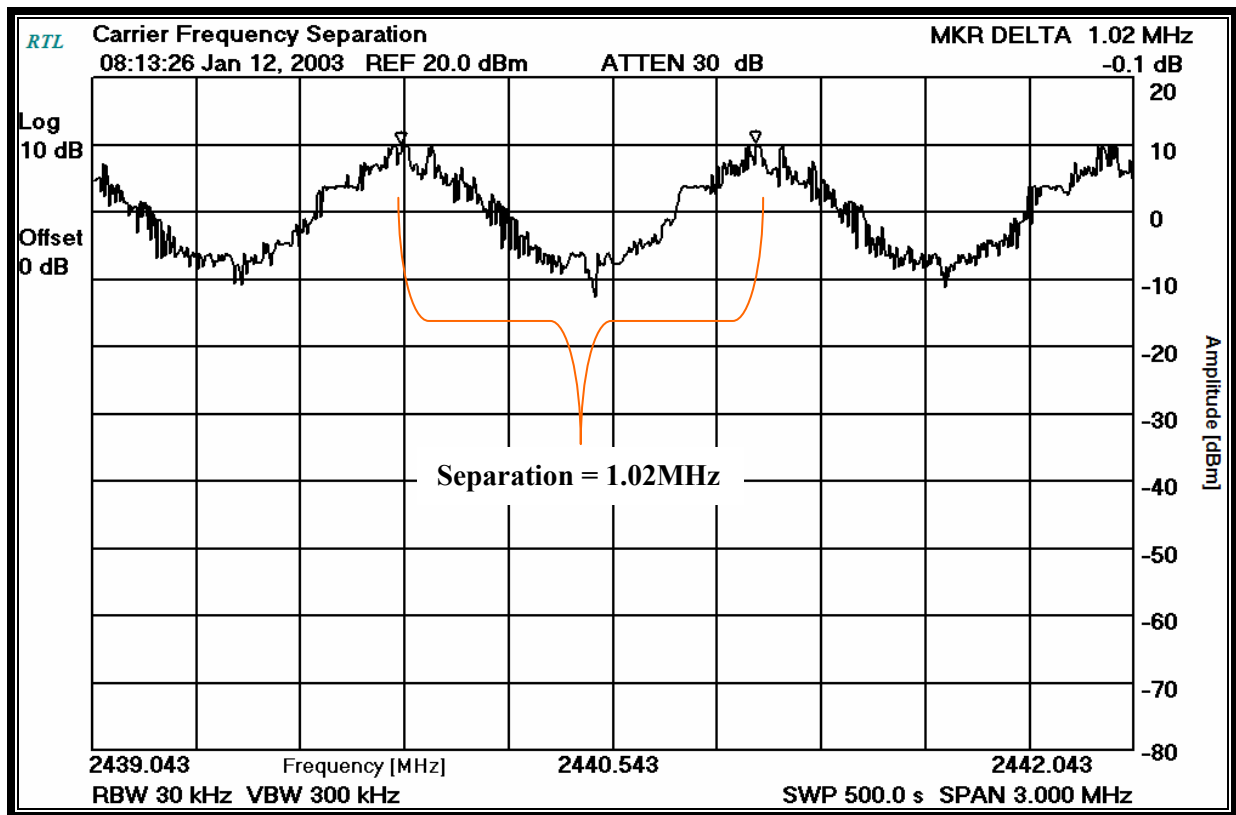

TEST PERSONNEL:

Daniel W. Baltzell
EMC Test Engineer

Daniel W. Baltzell

Signature

January 12, 2003
Date Of Test


8 HOPPING CHARACTERISTICS – FCC §15.247 (A)(1)(II); IC RSS-210 §6.2.2(O)

Frequency hopping systems operating in the 2400–2483.5 MHz and 5725–5850 MHz bands shall use at least 75 hopping frequencies. The maximum 20 dB bandwidth of the hopping channel is 1 MHz. The average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 30 second period.

8.1 NUMBER OF HOPPING FREQUENCIES

Measured number of hopping frequencies = 79

PLOT 8-1: NUMBER OF HOPPING FREQUENCIES

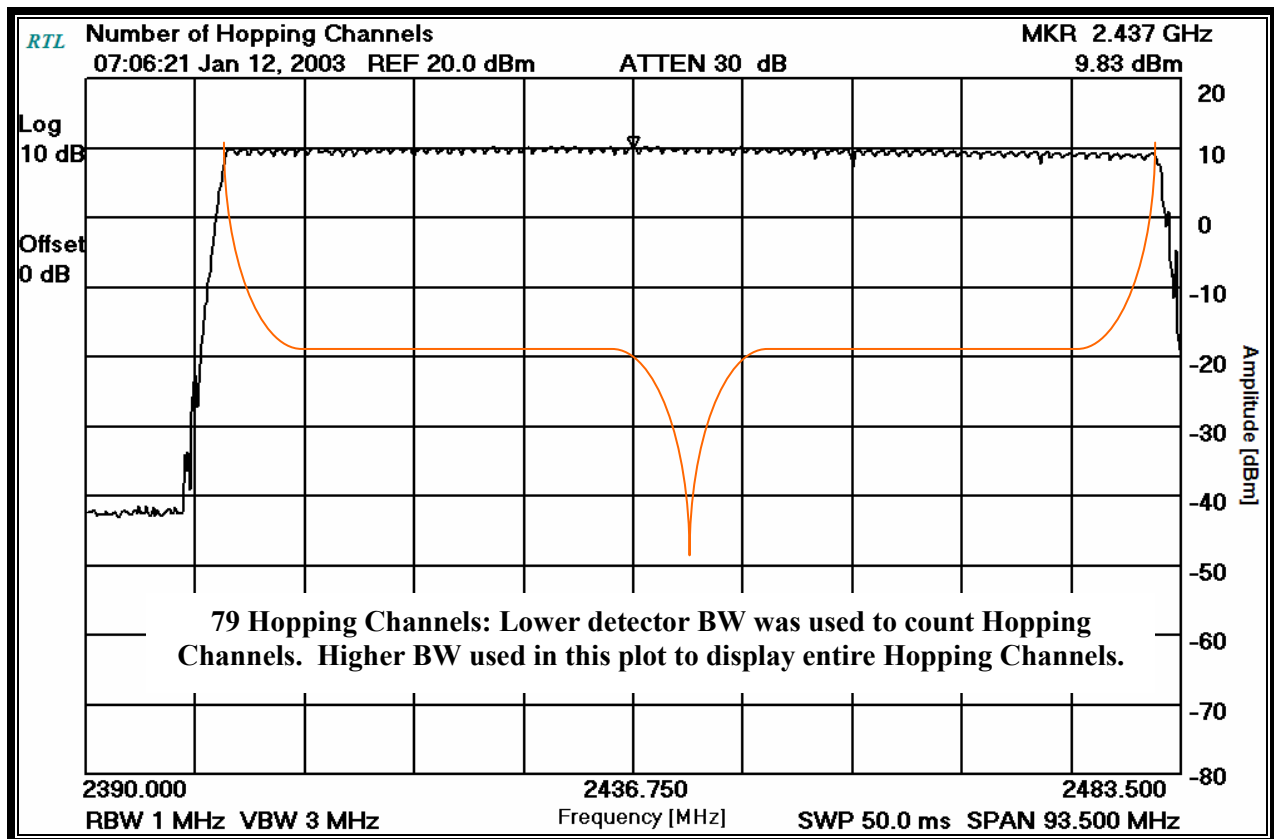

TEST PERSONNEL:

Daniel W. Baltzell
EMC Test Engineer

Daniel W. Baltzell
Signature

January 12, 2003
Date Of Test

8.2 20 DB BANDWIDTH TEST PROCEDURE – FCC §15.247 (a)(1)(i); IC RSS-210 §5.9.1

The minimum 20 dB bandwidths per RSS-210 were measured using a 50 ohm spectrum analyzer. The carrier was adjusted on the analyzer so that it was displayed entirely on the Spectrum Analyzer. The sweep time was set to 10 seconds and allowed through several sweeps with the max hold function used in peak detector mode. The resolution bandwidth was set to 100 kHz, and the video bandwidth set at 300 kHz. The minimum 20 dB bandwidths were measured using the spectrum analyzer delta marker set 20 dB down from the peak of the carrier and modulated with a 2 Mbps data rate. The table below contains the bandwidth measurement results.

TABLE 8-1 20 DB BANDWIDTH TEST EQUIPMENT

RTL ASSET #	MANUFACTURER	MODEL	PART TYPE	SERIAL NUMBER	CALIBRATION DUE DATE
900931	Hewlett Packard	8566B	Spectrum Analyzer (100Hz – 22 GHz)	3138A07771	5/10/03

TABLE 8-2 MODULATED BANDWIDTH TEST DATA

Minimum 20 dB bandwidths

CHANNEL	20 dB BANDWIDTH (kHz)
2	930
40	915
80	923


TEST PERSONNEL:

Daniel W. Baltzell		October 9, 2002
EMC Test Engineer	Signature	Date Of Test

20 dB Bandwidth Plots

Channel: 2
Channel Frequency (MHz): 2402
Resolution Bandwidth (kHz): 30
Video Bandwidth (kHz): 100
Span (MHz): 3

PLOT 8-2: 20 DB BANDWIDTH CHANNEL 2

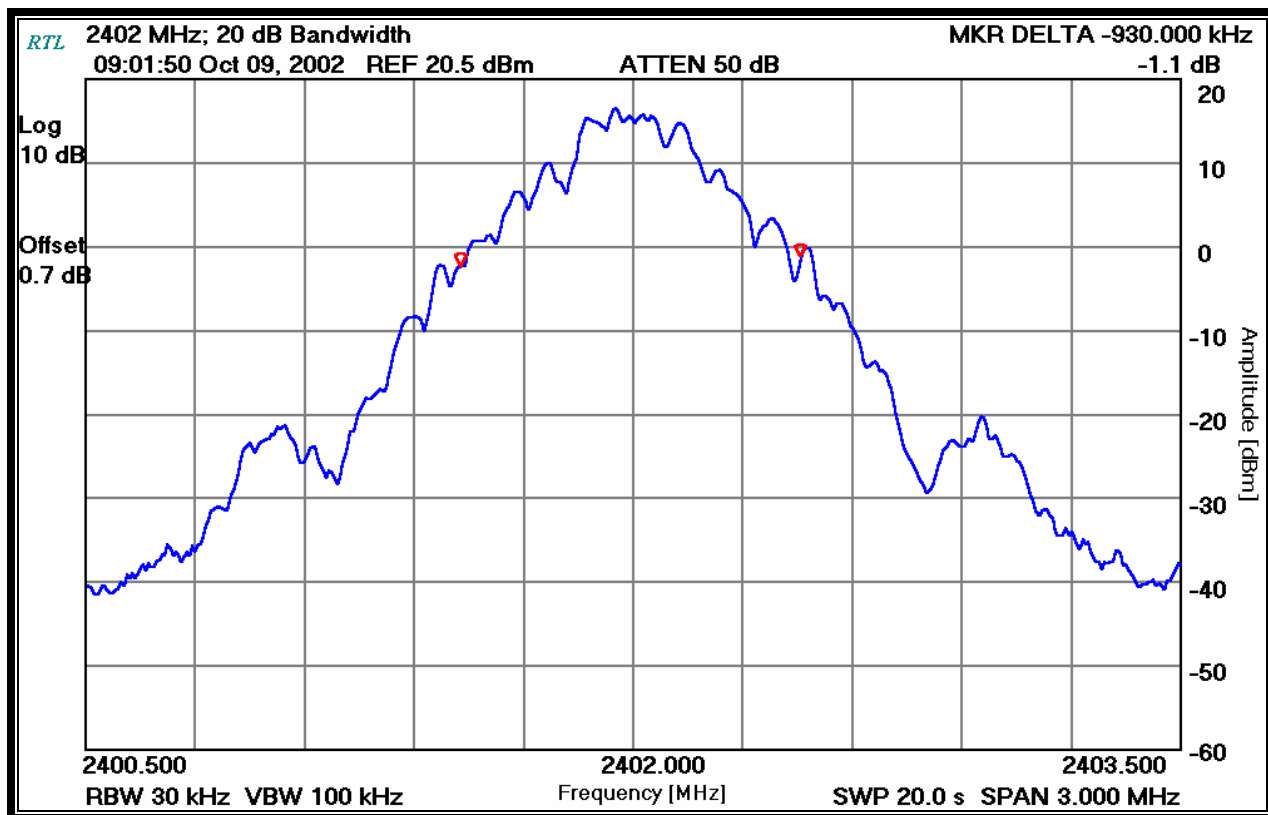

TEST PERSONNEL:


Daniel W. Baltzell
EMC Test Engineer

Signature

October 9, 2002
Date Of Test

Channel: 40
 Channel Frequency (MHz): 2440
 Resolution Bandwidth (kHz): 30
 Video Bandwidth (kHz): 100
 Span (MHz): 3

PLOT 8-3: 20 DB BANDWIDTH CHANNEL 40

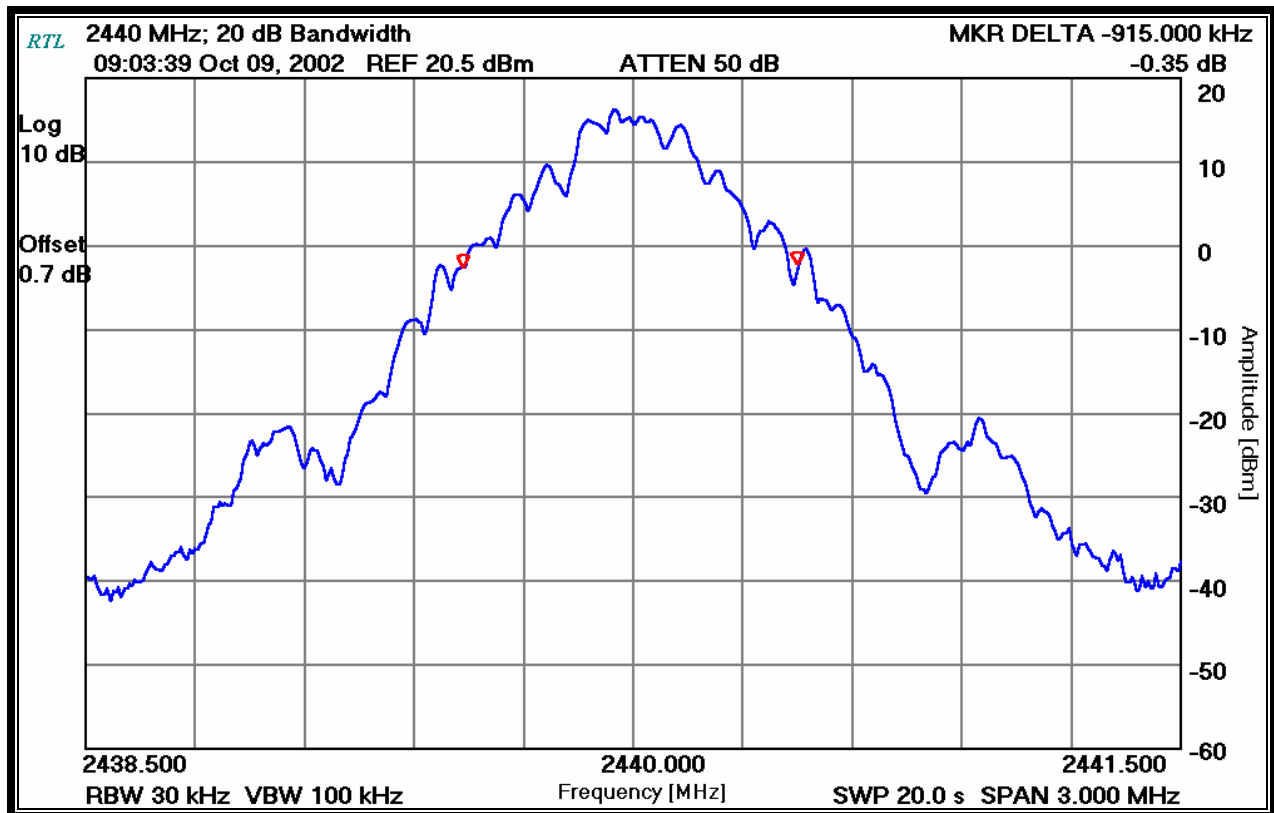

TEST PERSONNEL:

Daniel W. Baltzell
 EMC Test Engineer


Daniel W. Baltzell

Signature

October 9, 2002
 Date Of Test

Channel: 80
 Channel Frequency (MHz): 2480
 Resolution Bandwidth (kHz): 30
 Video Bandwidth (kHz): 100
 Span (MHz): 3

PLOT 8-4: 20 DB BANDWIDTH CHANNEL 80

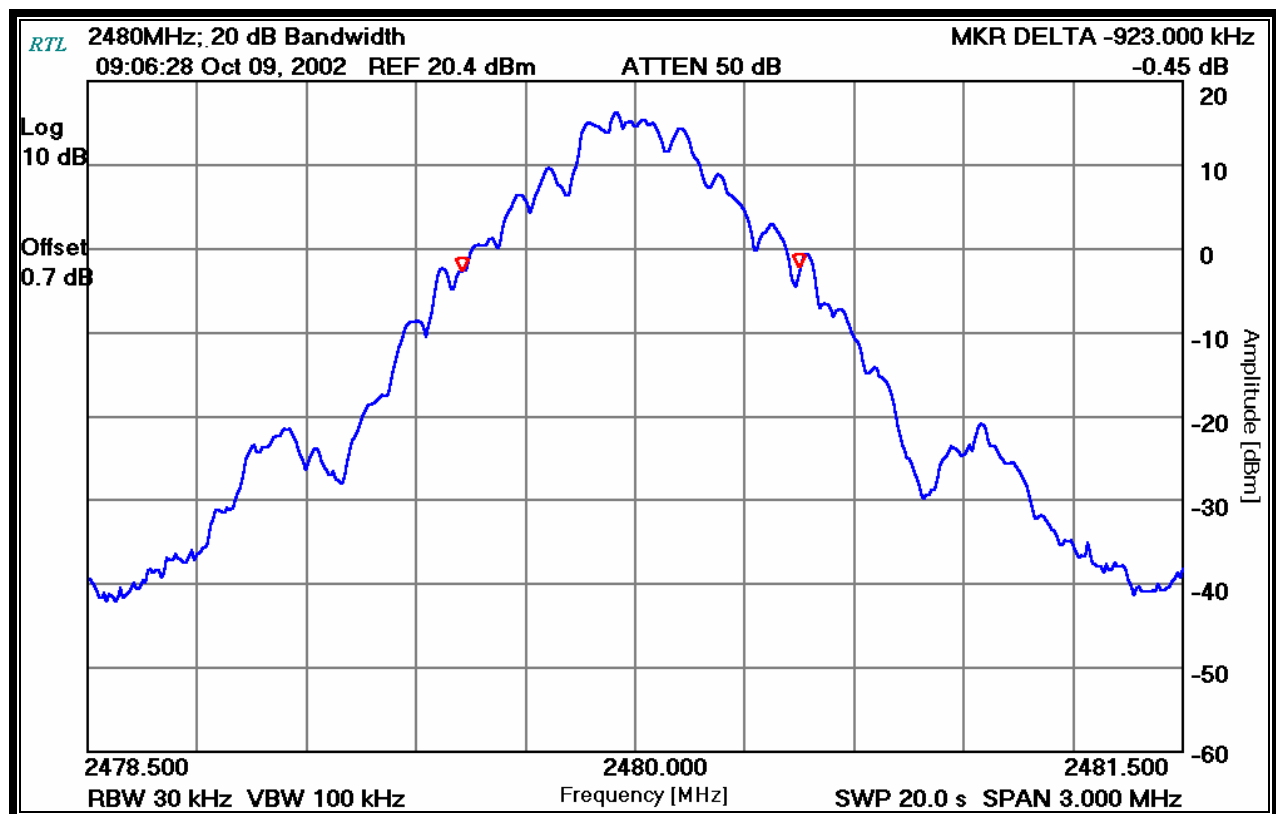

TEST PERSONNEL:

Daniel W. Baltzell
 EMC Test Engineer

Signature


October 9, 2002
 Date Of Test

8.3 AVERAGE TIME OF OCCUPANCY

The spectrum analyzer sweep was set to 0.050 second, with a zero span and max hold until a pulse from the device under test was captured. A marker delta was used to measure dwell time for this plot. The sweep was then set to single sweep for 30 seconds for the required average time and the number of pulses counted to calculate the average time of occupancy as:

Number of Pulses in 30 Seconds (23) x Dwell Time Measured (0.500 milliseconds) = 11.5 ms Average Occupancy in 30 seconds.

PLOT 8-5: TIME OF OCCUPANCY (DWEELL TIME)

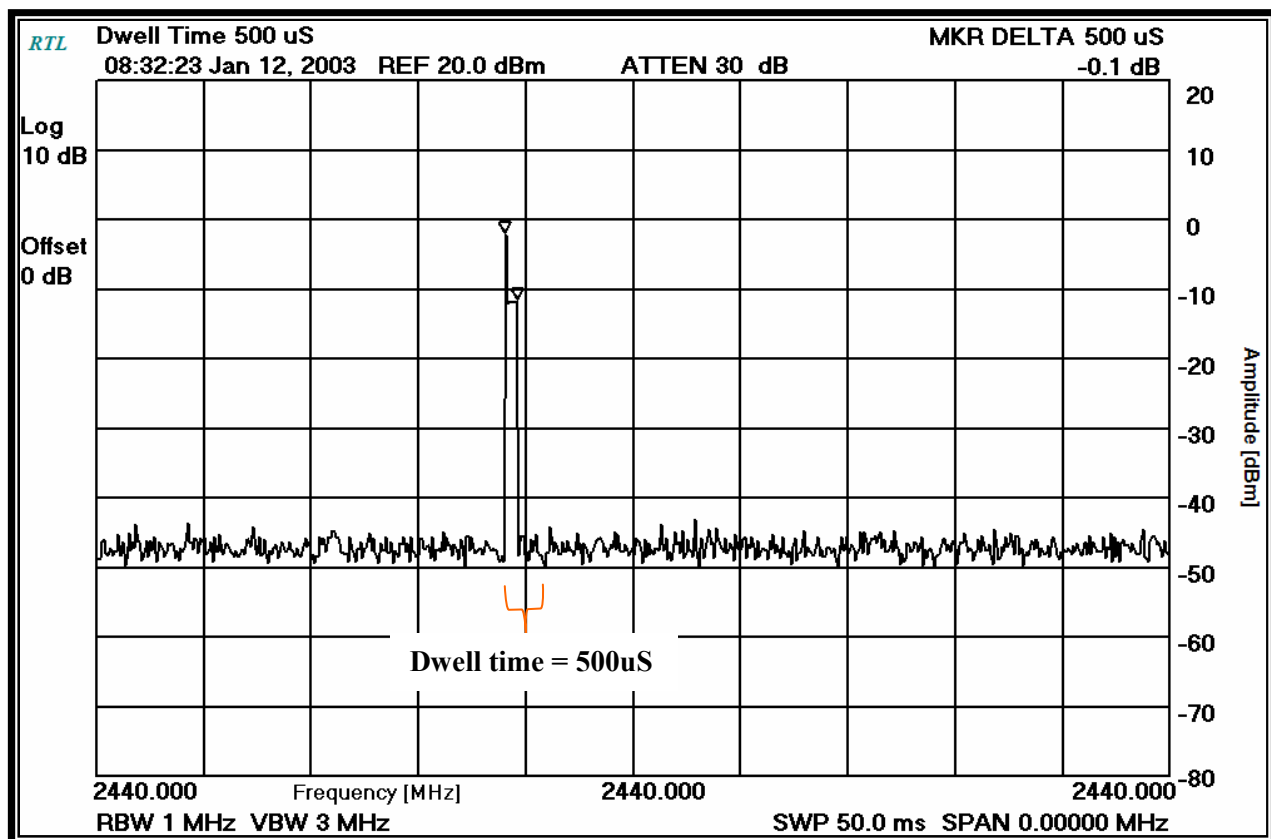


TEST PERSONNEL:

Daniel W. Baltzell
EMC Test Engineer

Daniel W. Baltzell
Signature

January 12, 2003
Date Of Test

PLOT 8-6: TIME OF OCCUPANCY (DWELL TIME 30 SECOND SWEEP)

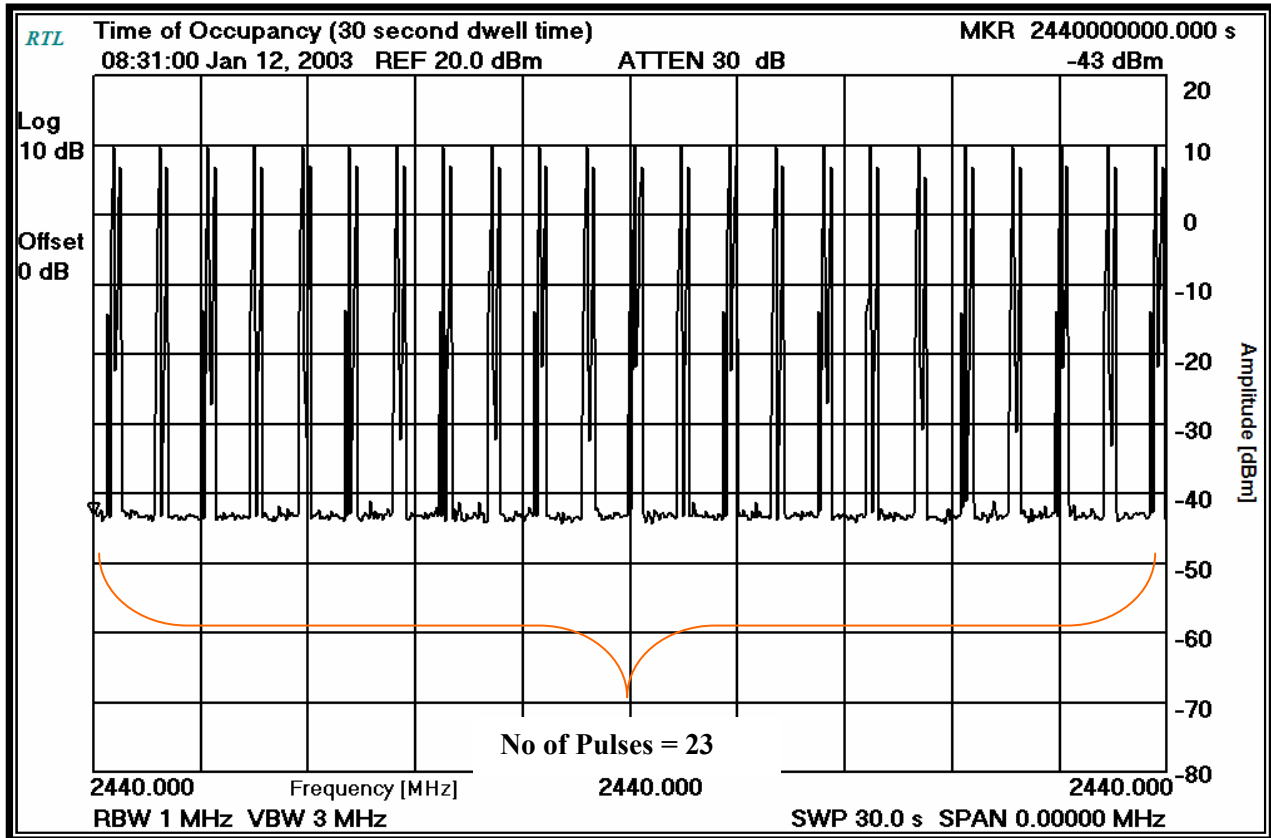

TEST PERSONNEL:

Daniel W. Baltzell
 EMC Test Engineer

Daniel W. Baltzell

Signature

January 12, 2003
 Date Of Test

9 MODULATED BANDWIDTH - §15.247(A)(2)

9.1 MODULATED BANDWIDTH TEST PROCEDURE – MINIMUM 6 DB BANDWIDTH

The minimum 6 dB bandwidths per FCC 15.247 (a)(2) were measured using a 50 ohm spectrum analyzer with the resolution bandwidth set at 100 kHz, and the video bandwidth set at 300 kHz. The device was modulated using the maximum 2 Mbps data rate. The minimum 6 dB bandwidths are presented in Table 9-2.

9.2 BANDWIDTH TEST EQUIPMENT

TABLE 9-1: BANDWIDTH TEST EQUIPMENT


RTL ASSET #	MANUFACTURER	MODEL	PART TYPE	SERIAL NUMBER	CALIBRATION DUE DATE
900931	Hewlett Packard	8566B	Spectrum Analyzer (100Hz – 22 GHz)	3138A07771	5/10/03

9.3 BANDWIDTH TEST DATA

TABLE 9-2: MINIMUM 6 DB BANDWIDTH TEST DATA

CHANNEL	6 dB BANDWIDTH (kHz)
2	339
40	338
80	338


TEST PERSONNEL:

Daniel W. Baltzell		October 9, 2002
EMC Test Engineer	Signature	Date Of Test

9.4 MODULATED BANDWIDTH PLOTS

Channel Number: 2
Frequency (MHz): 2402
Resolution Bandwidth (kHz): 30
Video Bandwidth (kHz): 100
Sweep Time (s): 20

PLOT 9-1: MODULATED BANDWIDTH CHANNEL 2

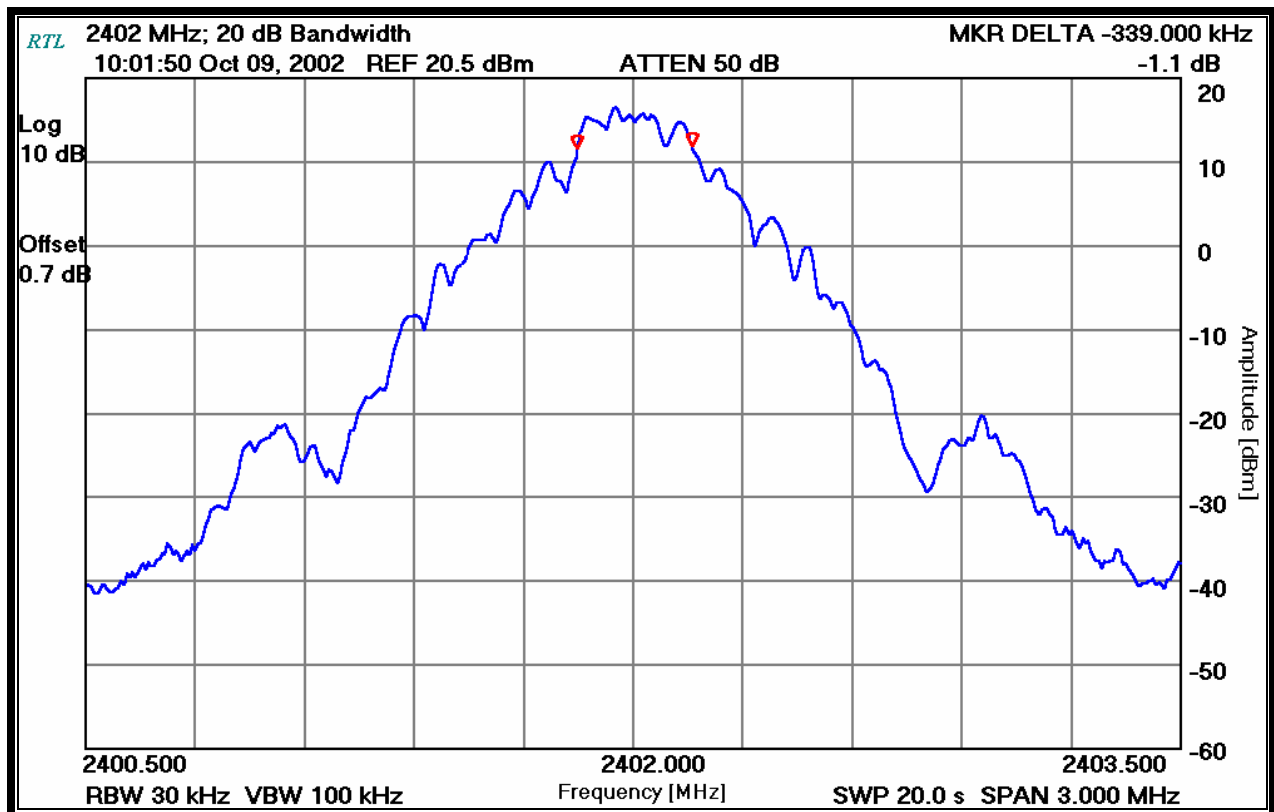

TEST PERSONNEL:


Daniel W. Baltzell
EMC Test Engineer

Signature

October 9, 2002
Date Of Test

Channel Number: 40
 Frequency (MHz): 2440
 Resolution Bandwidth (kHz): 30
 Video Bandwidth (kHz): 100
 Sweep Time (s): 20

PLOT 9-2: MODULATED BANDWIDTH CHANNEL 40

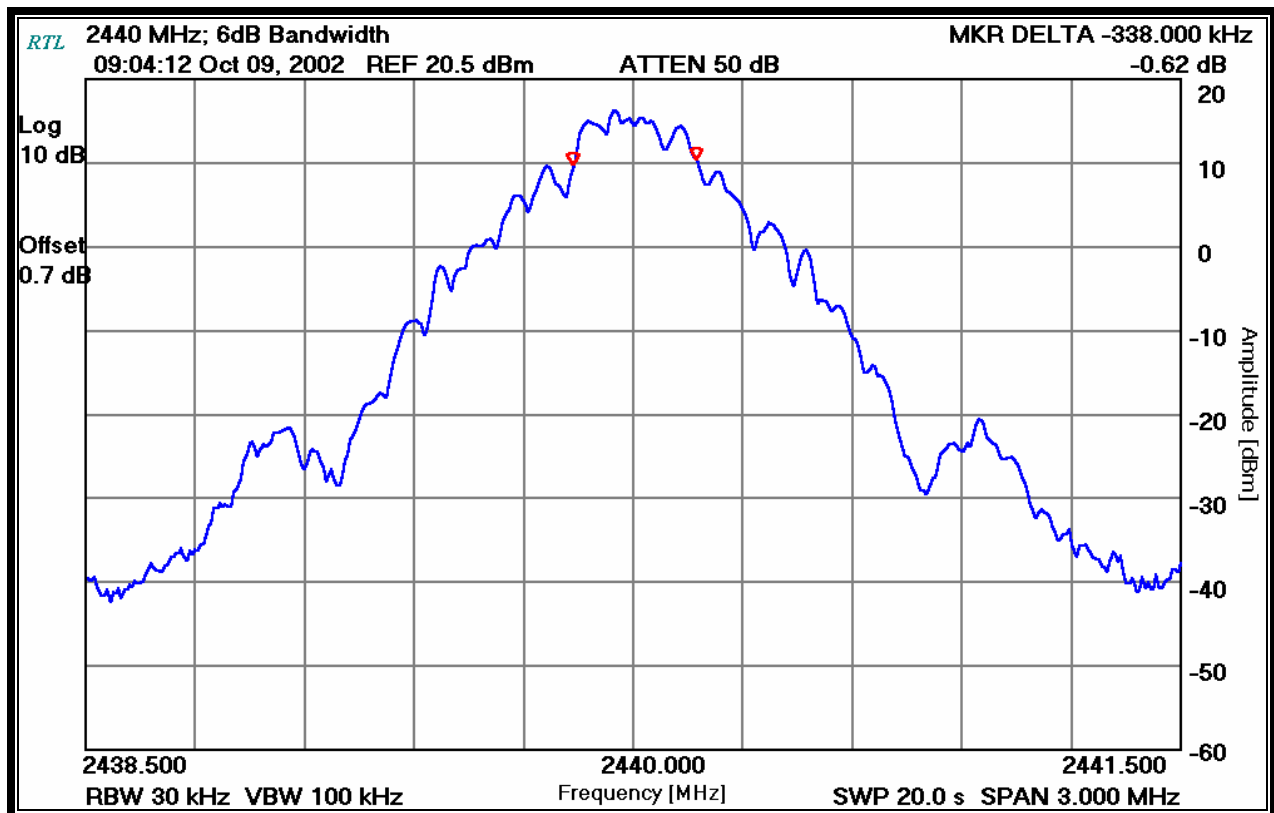

TEST PERSONNEL:

Daniel W. Baltzell
 EMC Test Engineer


Daniel W. Baltzell

Signature

October 9, 2002
 Date Of Test

Channel Number: 80
 Frequency (MHz): 2480
 Resolution Bandwidth (kHz): 30
 Video Bandwidth (kHz): 100
 Sweep Time (s): 20

PLOT 9-3: MODULATED BANDWIDTH CHANNEL 80

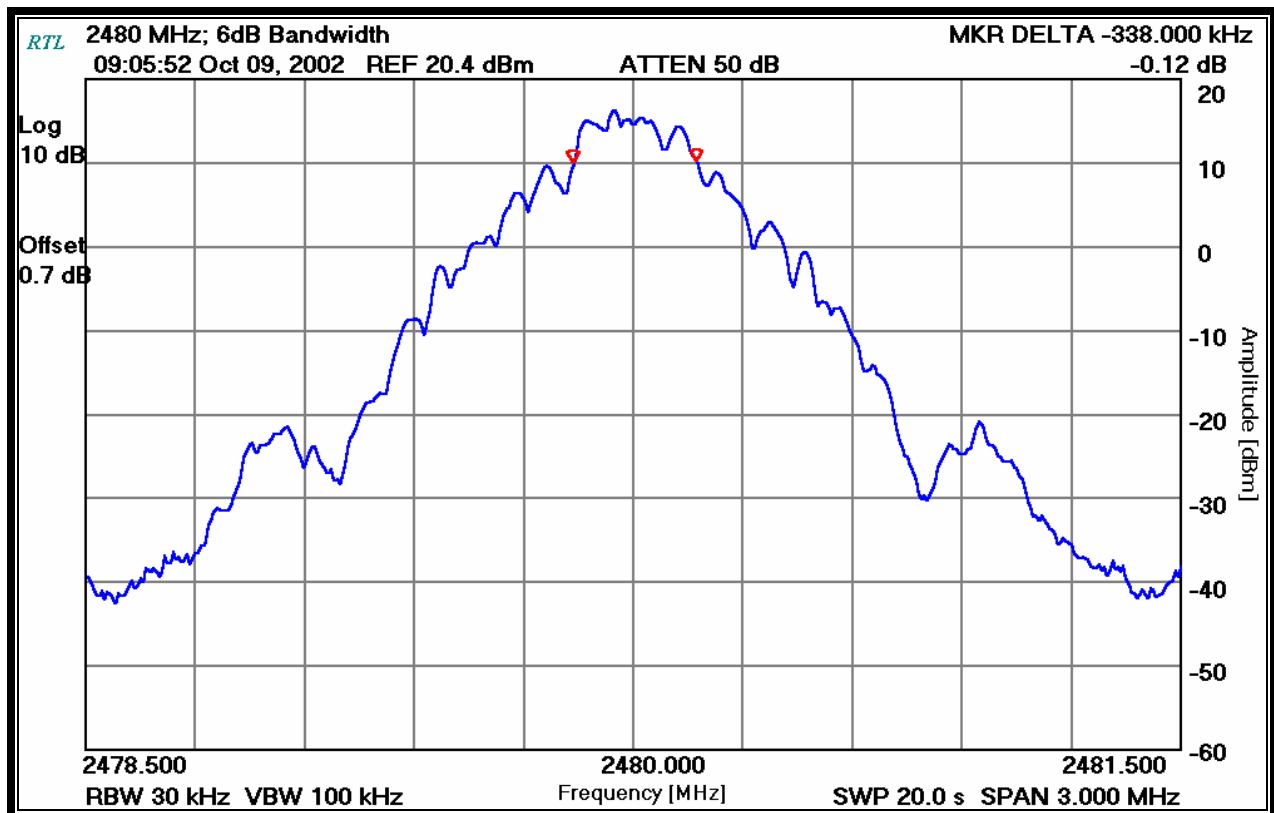

TEST PERSONNEL:

Daniel W. Baltzell
 EMC Test Engineer

Daniel W. Baltzell

Signature

October 9, 2002
 Date Of Test

10 PEAK OUTPUT POWER - FCC §15.247(B)(1); IC RSS-210 §6.2.2(o)(b)

10.1 POWER OUTPUT TEST PROCEDURE

A conducted power measurement of the EUT was taken using an Agilent 4416A EPM-P Series Power Meter with a E9323A Peak and Average Power Sensor.

10.2 POWER OUTPUT TEST EQUIPMENT

TABLE 10-1: POWER OUTPUT TEST EQUIPMENT

RTL ASSET #	MANUFACTURER	MODEL	PART TYPE	SERIAL NUMBER	CALIBRATION DUE DATE
901186	Agilent Technologies	E9323A (50 MHz-6 GHz)	Peak & Avg. Power Sensor	US40410380	6/25/03
901184	Agilent Technologies	E4416A	EPM-P Power Meter, Single Channel	GB41050573	7/5/03

10.3 POWER OUTPUT TEST DATA

TABLE 10-2: POWER OUTPUT TEST DATA

FREQUENCY (MHZ)	CHANNEL	PEAK POWER CONDUCTED OUTPUT (dBm)	PEAK POWER CONDUCTED OUTPUT (mW)
2402	2	20.5	112.2
2440	40	20.5	112.2
2480	80	20.4	109.4

TEST PERSONNEL:

Daniel W. Baltzell EMC Test Engineer	 Signature	October 8, 2002 Date Of Test
---	--	---------------------------------

11 ANTENNA CONDUCTED SPURIOUS EMISSIONS - §15.247(C); IC RSS-210 §6.2.2(o)(e1)

11.1 ANTENNA CONDUCTED SPURIOUS EMISSIONS TEST PROCEDURES

Antenna spurious emission per FCC 15.247(c) was measured from the EUT antenna port using a 50 ohm spectrum analyzer with the resolution bandwidth set at 100 kHz, and the video bandwidth set at 300 kHz. The modulated carrier was identified at 2.402 GHz for the low channel, 2.440 GHz for the mid channel and 2.480 GHz for the high channel. No other harmonics or spurs were found within 20 dB of the carrier level from 9kHz to the carrier 10th harmonic. See the Antenna Conducted Spurious Noise Table for the test results. The low, middle, and high channels were investigated and tested.

Note: Conducted plots are presented for the mid channel, while tabular data is presented for the low, mid, and high channels.


11.2 ANTENNA CONDUCTED SPURIOUS TEST EQUIPMENT

TABLE 11-1: ANTENNA CONDUCTED SPURIOUS TEST EQUIPMENT

RTL ASSET #	MANUFACTURER	MODEL	PART TYPE	SERIAL NUMBER	CALIBRATION DUE DATE
900931	Hewlett Packard	8566B	Spectrum Analyzer (100 Hz – 22 GHz)	3138A07771	5/10/03

11.3 ANTENNA CONDUCTED SPURIOUS DATA PLOTS

PLOT 11-1: ANTENNA CONDUCTED SPURIOUS (9 KHZ-2 GHZ) 2440 MHZ

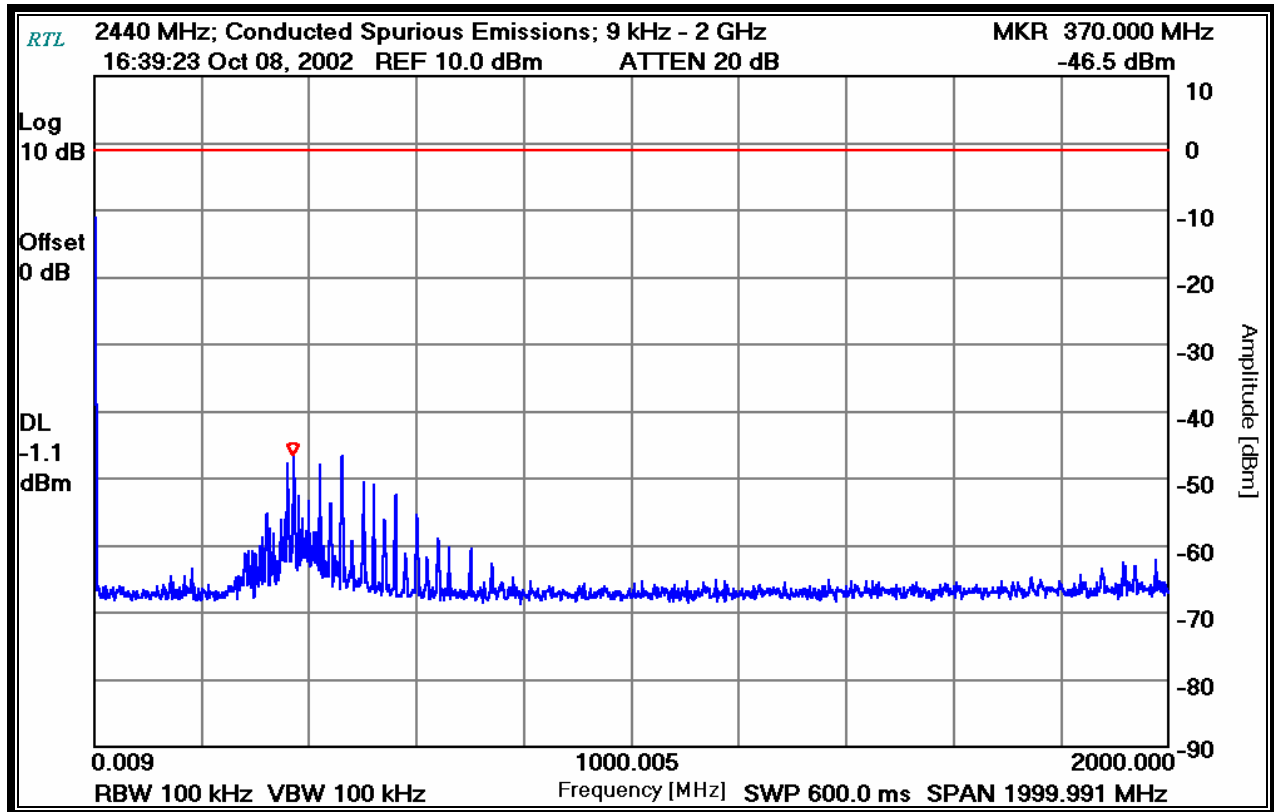

TEST PERSONNEL:


Daniel W. Baltzell
 EMC Test Engineer

Daniel W. Baltzell

Signature

October 8, 2002
 Date Of Test

PLOT 11-2: ANTENNA CONDUCTED SPURIOUS (2-24 GHz) 2440 MHz

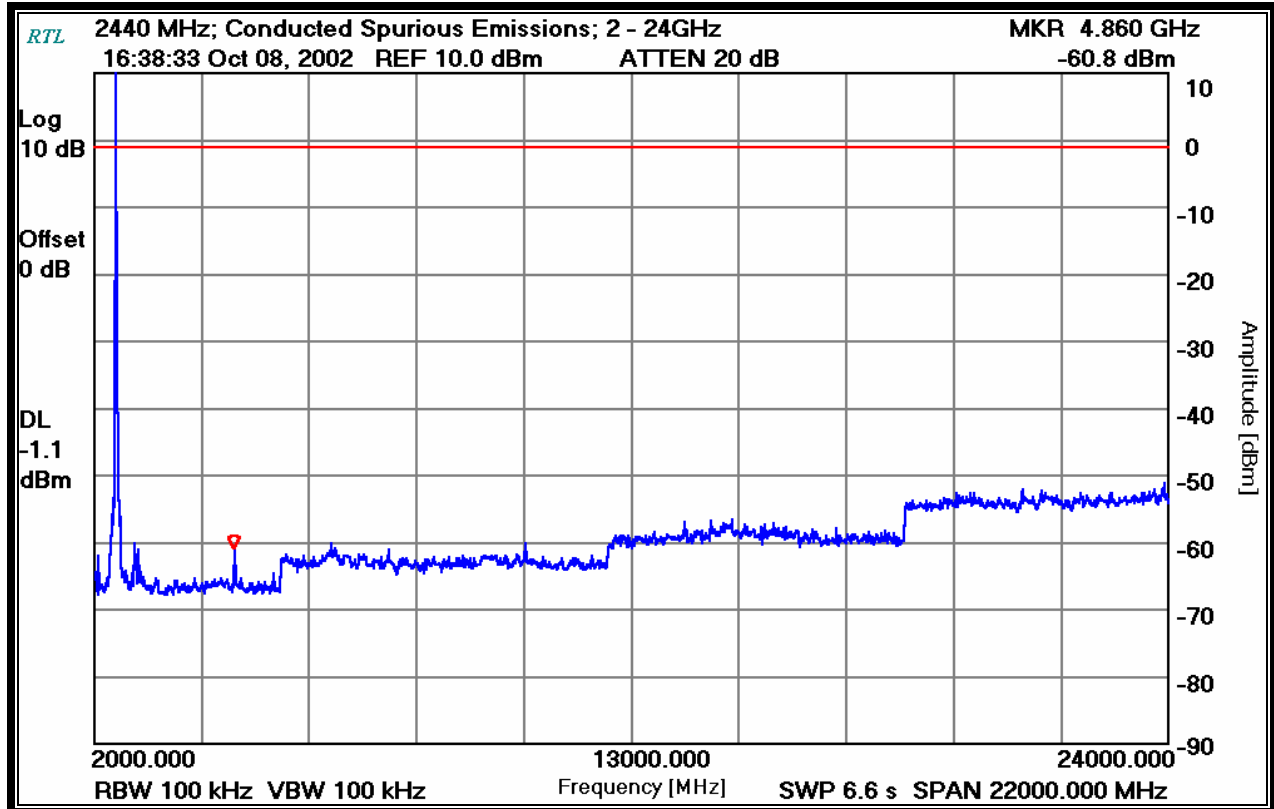

TEST PERSONNEL:

Daniel W. Baltzell
 EMC Test Engineer

Signature

October 8, 2002
 Date Of Test

11.4 ANTENNA CONDUCTED SPURIOUS EMISSIONS CHANNEL 2

Operating Frequency (MHz): 2402
Channel: 2
Measured Level at 100kHz (dBm): 17.9
Limit (dBm): -2.1

TABLE 11-2: ANTENNA CONDUCTED SPURIOUS EMISSIONS CHANNEL 2

Frequency (MHz)	Measured Level (dBm)	Measured Level (dBc)	Limit (dBc)	Margin (dB)
371.000	-44.9	62.8	20.0	-42.8
460.000	-46.1	64.0	20.0	-44.0
591.446	-37.7	55.6	20.0	-35.6
4804.000	-49.3	67.2	20.0	-47.2
7206.000	-43.2	61.1	20.0	-41.1
9608.000	-41.7	59.6	20.0	-39.6
12010.000	-43.5	61.4	20.0	-41.4
14412.000	-39.2	57.1	20.0	-37.1
16814.000	-39.8	57.7	20.0	-37.7
19216.000	-35.7	53.6	20.0	-33.6
21618.000	-34.4	52.3	20.0	-32.3
24020.000	-36.0	53.9	20.0	-33.9

TEST PERSONNEL:

Franck Schuppius
EMC Test Engineer



Signature

October 9, 2002
Date Of Test

11.5 ANTENNA CONDUCTED SPURIOUS EMISSIONS CHANNEL 40

Operating Frequency (MHz): 2440
Channel: 40
Measured Level at 100kHz (dBm): 18.9
Limit (dBm): -1.1

TABLE 11-3: ANTENNA CONDUCTED SPURIOUS EMISSIONS CHANNEL 40

Frequency (MHz)	Measured Level (dBm)	Measured Level (dBc)	Limit (dBc)	Margin (dB)
371.000	-44.9	62.8	20.0	-42.8
460.000	-45.9	63.8	20.0	-43.8
591.446	-37.7	55.6	20.0	-35.6
4880.000	-58.2	77.1	20.0	-57.1
7320.000	-53.9	72.8	20.0	-52.8
9760.000	-53.8	72.7	20.0	-52.7
12200.000	-54.9	73.8	20.0	-53.8
14640.000	-50.4	69.3	20.0	-49.3
17080.000	-51.4	70.3	20.0	-50.3
19520.000	-45.5	64.4	20.0	-44.4
21960.000	-45.1	64.0	20.0	-44.0
24400.000	-47.3	66.2	20.0	-46.2

TEST PERSONNEL:

Franck Schuppius
EMC Test Engineer



Signature

October 9, 2002
Date Of Test

11.6 ANTENNA CONDUCTED SPURIOUS EMISSIONS HIGH CHANNEL 80

Operating Frequency (MHz): 2480
Channel: 80
Measured Level at 100kHz (dBm): 18.2
Limit (dBm): -1.8

TABLE 11-4: ANTENNA CONDUCTED SPURIOUS EMISSIONS CHANNEL 80

Frequency (MHz)	Measured Level (dBm)	Measured Level (dBc)	Limit (dBc)	Margin (dB)
371.000	-44.9	63.1	20.0	-43.1
460.000	-45.9	64.1	20.0	-44.1
591.446	-37.7	55.9	20.0	-35.9
4960.000	-57.1	75.3	20.0	-55.3
7440.000	-54.5	72.7	20.0	-52.7
9920.000	-53.8	72.0	20.0	-52.0
12400.000	-54.8	73.0	20.0	-53.0
14880.000	-48.4	66.6	20.0	-46.6
17360.000	-50.7	68.9	20.0	-48.9
19840.000	-44.7	62.9	20.0	-42.9
22320.000	-46.0	64.2	20.0	-44.2
24800.000	-47.1	65.3	20.0	-45.3

TEST PERSONNEL:

Franck Schuppis
EMC Test Engineer



Signature

October 9, 2002
Date Of Test

Rhein Tech Laboratories
360 Herndon Parkway
Suite 1400
Herndon, VA 20170
<http://www.rheintech.com>

Client: Paxar Americas, Inc.
FCC: Part 15.247
Industry Canada: RSS-210
FCC ID: GU69460IPLA3021
Model #: 9460IP

12 CONCLUSION

The data in this measurement report shows that the Paxar Americas, Inc., Model Name: Sierra Sport2™, Model Number: 9460IP, FCC ID: GU69460IPLA3021 complies with all the requirements of Parts 2 and 15 of the FCC Rules and Industry Canada RSS-210.