

MEASUREMENT REPORT**FCC PART 15.407 / ISCED RSS-248 UNII 802.11a/ax OFDM WIFI 6E****Applicant Name:**

Apple Inc.
One Apple Park Way
Cupertino, CA 95014
United States

Date of Testing:

01/08/2024 - 04/05/2024

Test Report Issue Date:

4/5/2024

Test Site/Location:

Element Materials Technology, Morgan Hill, CA, USA

Test Report Serial No.:

1C2311270069-13-R1.BCG

FCC ID:

BCGA2925

IC:

579C-A2925

APPLICANT:

Apple Inc.

Application Type:

Certification

Model/HVIN:

A2925

EUT Type:

Tablet Device

Frequency Range:

5955 – 7115MHz

Modulation Type:

OFDM

FCC Classification:

15E 6GHz Low Power Dual Client (6CD)

FCC Rule Part(s):

Part 15 Subpart E (15.407)

ISCED Specification:

RSS-248 Issue 2


Test Procedure(s):

ANSI C63.10-2013, KDB 789033 D02 v02r01
KDB 662911 D01 v02r01, KDB 987594 D02 v02r01
KDB 987594 D04 v02

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.10-2013 and KDB 789033 D02 v02r01. Test results reported herein relate only to the item(s) tested.

This revised Test Report (S/N: 1C2311270069-13-R1.BCG) supersedes and replaces the previously issued test report on the same subject device for the same type of testing as indicated. Please discard or destroy the previously issued test report(s) and dispose accordingly.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.



RJ Ortanez
Executive Vice President

Prepared by: WKR0000010592

Reviewed by: WKR0000005805



FCC ID: BCGA2925 IC: 579C-A2925	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2311270069-13-R1 BCG	Test Dates: 01/08/2024 - 04/05/2024	EUT Type: Tablet Device	Page 1 of 525

V 10.5 12/15/2021


T A B L E O F C O N T E N T S

1.0	INTRODUCTION	5
1.1	Scope.....	5
1.2	Element Materials Technology Test Location	5
1.3	Test Facility / Accreditations.....	5
2.0	PRODUCT INFORMATION	6
2.1	Equipment Description	6
2.2	Device Capabilities.....	6
2.3	Antenna Description.....	10
2.4	Test Support Equipment.....	10
2.5	Test Configuration	11
2.6	Software and Firmware	11
2.7	EMI Suppression Device(s)/Modifications.....	11
3.0	DESCRIPTION OF TESTS	12
3.1	Evaluation Procedure	12
3.2	AC Line Conducted Emissions	12
3.3	Radiated Emissions.....	13
3.4	Environmental Conditions.....	13
4.0	ANTENNA REQUIREMENTS	14
5.0	MEASUREMENT UNCERTAINTY	15
6.0	TEST EQUIPMENT CALIBRATION DATA.....	16
7.0	TEST RESULTS	17
7.1	Summary.....	17
7.2	26dB & 99% Bandwidth Measurement – 802.11a/ax(SU).....	19
7.3	Conducted Output Power and Max EIRP Measurement – 802.11a/ax(SU).....	65
7.4	Maximum Power Spectral Density – 802.11a/ax(SU)	110
7.5	In-Band Emissions – 802.11a/ax(SU).....	246
7.6	Contention Based Protocol – 802.11a/ax(SU)	344
7.7	Radiated Spurious Emissions – Above 1GHz.....	366
7.8	Radiated Spurious Emissions – Below 1GHz	514
7.9	AC Line-Conducted Emissions Measurement.....	519
8.0	CONCLUSION.....	525


FCC ID: BCGA2925 IC: 579C-A2925	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2311270069-13-R1 BCG	Test Dates: 01/08/2024 - 04/05/2024	EUT Type: Tablet Device	Page 2 of 525

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.



MEASUREMENT REPORT



UNII Band	Channel Bandwidth (MHz)	Mode	Tx Frequency (MHz)	SISO						SDM Primary		SDM Diversity	
				Antenna WF5B		Antenna WF8		Antenna WF7		Summed		Summed	
				Max e.i.r.p. (mW)	Max e.i.r.p. (dBm)	Max e.i.r.p. (mW)	Max e.i.r.p. (dBm)	Max e.i.r.p. (mW)	Max e.i.r.p. (dBm)	Max e.i.r.p. (mW)	Max e.i.r.p. (dBm)	Max e.i.r.p. (mW)	Max e.i.r.p. (dBm)
5	20	802.11a/ax	5955 - 6415	7.413	8.70	6.714	8.27	6.237	7.95	7.235	8.59	6.827	8.34
6		802.11a/ax	6435 - 6515	6.838	8.35	3.866	5.87	4.565	6.59	6.695	8.26	5.181	7.14
7		802.11a/ax	6535 - 6875	6.659	8.23	4.293	6.33	4.560	6.59	6.860	8.36	5.522	7.42
8		802.11a/ax	6895 - 7115	6.893	8.38	3.838	5.84	5.834	7.66	6.819	8.34	6.043	7.81
5	40	802.11ax	5965 - 6405	14.352	11.57	13.074	11.16	12.224	10.87	14.570	11.63	13.560	11.32
6		802.11ax	6445 - 6525	13.593	11.33	8.283	9.18	8.845	9.47	13.562	11.32	10.842	10.35
7		802.11ax	6565 - 6845	13.059	11.16	8.533	9.31	9.053	9.57	13.845	11.41	11.095	10.45
8		802.11ax	6885 - 7085	13.493	11.30	7.546	8.78	11.516	10.61	13.236	11.22	12.141	10.84
5	80	802.11ax	5985 - 6385	29.512	14.70	26.315	14.20	24.820	13.95	29.138	14.64	26.623	14.25
6		802.11ax	6465	26.056	14.16	14.710	11.68	17.918	12.53	26.409	14.22	20.110	13.03
7		802.11ax	6545 - 6865	26.050	14.16	16.512	12.18	17.803	12.51	27.309	14.36	22.137	13.45
8		802.11ax	6945 - 7025	26.996	14.31	14.706	11.67	23.025	13.62	26.838	14.29	24.225	13.84
5	160	802.11ax	6025 - 6345	52.384	17.19	47.174	16.74	42.394	16.27	50.520	17.03	46.801	16.70
6		802.11ax	6505	38.441	15.85	21.414	13.31	25.200	14.01	37.562	15.75	29.068	14.63
7		802.11ax	6665 - 6825	45.269	16.56	29.950	14.76	31.232	14.95	49.013	16.90	39.456	15.96
8		802.11ax	6985	48.697	16.88	27.233	14.35	41.495	16.18	46.531	16.68	42.880	16.32

EUT Overview Low Power Indoor(Low Rate)

UNII Band	Channel Bandwidth (MHz)	Mode	Tx Frequency (MHz)	SISO						SDM Primary		SDM Diversity	
				Antenna WF5B		Antenna WF8		Antenna WF7		Summed		Summed	
				Max e.i.r.p. (mW)	Max e.i.r.p. (dBm)	Max e.i.r.p. (mW)	Max e.i.r.p. (dBm)	Max e.i.r.p. (mW)	Max e.i.r.p. (dBm)	Max e.i.r.p. (mW)	Max e.i.r.p. (dBm)	Max e.i.r.p. (mW)	Max e.i.r.p. (dBm)
5	20	802.11a/ax	5955 - 6415	7.313	8.64	6.677	8.25	6.194	7.92	7.269	8.61	6.734	8.28
6		802.11a/ax	6435 - 6515	6.858	8.36	3.840	5.84	4.524	6.56	6.710	8.27	5.217	7.17
7		802.11a/ax	6535 - 6875	6.742	8.29	4.302	6.34	4.500	6.53	6.844	8.35	5.497	7.40
8		802.11a/ax	6895 - 7115	6.860	8.36	3.886	5.90	5.830	7.66	6.741	8.29	6.113	7.86
5	40	802.11ax	5965 - 6405	14.757	11.69	13.452	11.29	12.176	10.86	14.671	11.66	13.436	11.28
6		802.11ax	6445 - 6525	13.577	11.33	8.492	9.29	8.962	9.52	13.283	11.23	10.917	10.38
7		802.11ax	6565 - 6845	13.083	11.17	8.414	9.25	9.016	9.55	13.750	11.38	10.892	10.37
8		802.11ax	6885 - 7085	13.440	11.28	7.670	8.85	11.410	10.57	13.389	11.27	12.030	10.80
5	80	802.11ax	5985 - 6385	28.596	14.56	26.291	14.20	24.266	13.85	29.408	14.68	27.243	14.35
6		802.11ax	6465	26.953	14.31	14.696	11.67	17.250	12.37	26.714	14.27	20.484	13.11
7		802.11ax	6545 - 6865	26.206	14.18	16.920	12.28	17.652	12.47	27.372	14.37	22.086	13.44
8		802.11ax	6945 - 7025	27.171	14.34	15.428	11.88	23.697	13.75	26.592	14.25	24.618	13.91
5	160	802.11ax	6025 - 6345	50.699	17.05	47.654	16.78	42.865	16.32	52.536	17.20	48.002	16.81
6		802.11ax	6505	38.265	15.83	20.855	13.19	25.229	14.02	36.707	15.65	28.934	14.61
7		802.11ax	6665 - 6825	46.313	16.66	30.172	14.80	31.645	15.00	49.126	16.91	38.915	15.90
8		802.11ax	6985	48.273	16.84	26.996	14.31	40.105	16.03	47.615	16.78	43.377	16.37

EUT Overview Low Power Indoor (Mid Rate)

UNII Band	Channel Bandwidth (MHz)	Mode	Tx Frequency (MHz)	SISO						SDM Primary		SDM Diversity	
				Antenna WF5B		Antenna WF8		Antenna WF7		Summed		Summed	
				Max e.i.r.p. (mW)	Max e.i.r.p. (dBm)	Max e.i.r.p. (mW)	Max e.i.r.p. (dBm)	Max e.i.r.p. (mW)	Max e.i.r.p. (dBm)	Max e.i.r.p. (mW)	Max e.i.r.p. (dBm)	Max e.i.r.p. (mW)	Max e.i.r.p. (dBm)
5	20	802.11a/ax	5955 - 6415	7.315	8.64	6.548	8.16	6.255	7.96	7.353	8.66	6.565	8.17
6		802.11a/ax	6435 - 6515	6.811	8.33	3.797	5.79	4.512	6.54	6.726	8.28	5.217	7.17
7		802.11a/ax	6535 - 6875	6.758	8.30	4.279	6.31	4.540	6.57	6.907	8.39	5.535	7.43
8		802.11a/ax	6895 - 7115	6.863	8.37	3.856	5.86	5.834	7.66	6.804	8.33	6.184	7.91
5	40	802.11ax	5965 - 6405	14.568	11.63	13.369	11.26	12.226	10.87	14.537	11.62	13.312	11.24
6		802.11ax	6445 - 6525	13.750	11.38	8.318	9.20	8.728	9.41	13.406	11.27	11.069	10.44
7		802.11ax	6565 - 6845	13.192	11.20	8.494	9.29	8.999	9.54	13.814	11.40	10.842	10.35
8		802.11ax	6885 - 7085	13.225	11.21	7.539	8.77	11.471	10.60	13.327	11.25	12.282	10.89
5	80	802.11ax	5985 - 6385	28.582	14.56	26.730	14.27	23.725	13.75	28.937	14.61	26.931	14.30
6		802.11ax	6465	26.491	14.23	15.042	11.77	17.628	12.46	26.167	14.18	20.817	13.18
7		802.11ax	6545 - 6865	26.442	14.22	16.939	12.29	18.026	12.56	27.121	14.33	21.984	13.42
8		802.11ax	6945 - 7025	27.555	14.40	15.164	11.81	23.025	13.62	26.962	14.31	24.449	13.88
5	160	802.11ax	6025 - 6345	52.348	17.19	46.752	16.70	43.611	16.40	52.295	17.18	47.672	16.78
6		802.11ax	6505	37.662	15.76	21.043	13.23	25.604	14.08	37.389	15.73	29.135	14.64
7		802.11ax	6665 - 6825	45.835	16.61	30.061	14.78	31.376	14.97	48.229	16.83	38.915	15.90
8		802.11ax	6985	47.490	16.77	26.675	14.26	41.486	16.18	48.389	16.85	42.782	16.31

EUT Overview Low Power Indoor (High Rate)

FCC ID: BCGA2925 IC: 579C-A2925			MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270069-13-R1 BCG	Test Dates: 01/08/2024 - 04/05/2024	EUT Type: Tablet Device	Page 3 of 525	

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

UNII Band	Channel Bandwidth (MHz)	Mode	Tx Frequency (MHz)	SISO						CDD Primary		CDD Diversity	
				Antenna WF5B		Antenna WF8		Antenna WF7		Summed		Summed	
				Max e.i.r.p. (mW)	Max e.i.r.p. (dBm)	Max e.i.r.p. (mW)	Max e.i.r.p. (dBm)	Max e.i.r.p. (mW)	Max e.i.r.p. (dBm)	Max e.i.r.p. (mW)	Max e.i.r.p. (dBm)	Max e.i.r.p. (mW)	Max e.i.r.p. (dBm)
5	20	802.11a/ax	5955 - 6415	92.662	19.67	84.198	19.25	78.451	18.95	182.810	22.62	165.577	22.19
7		802.11a/ax	6535 - 6875	131.553	21.19	82.186	19.15	85.526	19.32	260.016	24.15	171.396	22.34
5	40	802.11ax	5965 - 6405	90.824	19.58	84.762	19.28	75.614	18.79	181.134	22.58	164.059	22.15
7		802.11ax	6565 - 6845	134.184	21.28	82.433	19.16	86.457	19.37	259.418	24.14	172.584	22.37
5	80	802.11ax	5985 - 6385	91.306	19.61	81.903	19.13	75.249	18.77	179.061	22.53	160.325	22.05
7		802.11ax	6545 - 6865	134.710	21.29	86.557	19.37	90.282	19.56	263.633	24.21	173.780	22.40
5	160	802.11ax	6025 - 6345	87.922	19.44	76.630	18.84	75.561	18.78	171.002	22.33	155.239	21.91
7		802.11ax	6665 - 6825	117.328	20.69	74.165	18.70	82.813	19.18	229.615	23.61	159.221	22.02

EUT Overview Standard Power (Low Rate)

UNII Band	Channel Bandwidth (MHz)	Mode	Tx Frequency (MHz)	SISO						CDD Primary		CDD Diversity	
				Antenna WF5B		Antenna WF8		Antenna WF7		Summed		Summed	
				Max e.i.r.p. (mW)	Max e.i.r.p. (dBm)	Max e.i.r.p. (mW)	Max e.i.r.p. (dBm)	Max e.i.r.p. (mW)	Max e.i.r.p. (dBm)	Max e.i.r.p. (mW)	Max e.i.r.p. (dBm)	Max e.i.r.p. (mW)	Max e.i.r.p. (dBm)
5	20	802.11a/ax	5955 - 6415	93.132	19.69	84.178	19.25	78.379	18.94	183.231	22.63	165.959	22.20
7		802.11a/ax	6535 - 6875	132.526	21.22	81.489	19.11	86.258	19.36	262.422	24.19	174.181	22.41
5	40	802.11ax	5965 - 6405	92.427	19.66	80.556	19.06	76.771	18.85	179.061	22.53	161.808	22.09
7		802.11ax	6565 - 6845	131.401	21.19	83.062	19.19	86.756	19.38	263.027	24.20	174.985	22.43
5	80	802.11ax	5985 - 6385	91.601	19.62	83.349	19.21	74.456	18.72	181.970	22.60	161.436	22.08
7		802.11ax	6545 - 6865	134.896	21.30	80.464	19.06	87.478	19.42	260.615	24.16	174.985	22.43
5	160	802.11ax	6025 - 6345	86.139	19.35	76.384	18.83	72.260	18.59	172.584	22.37	155.597	21.92
7		802.11ax	6665 - 6825	114.551	20.59	71.450	18.54	80.724	19.07	231.739	23.65	159.588	22.03

EUT Overview Standard Power (Mid Rate)

UNII Band	Channel Bandwidth (MHz)	Mode	Tx Frequency (MHz)	SISO						CDD Primary		CDD Diversity	
				Antenna WF5B		Antenna WF8		Antenna WF7		Summed		Summed	
				Max e.i.r.p. (mW)	Max e.i.r.p. (dBm)	Max e.i.r.p. (mW)	Max e.i.r.p. (dBm)	Max e.i.r.p. (mW)	Max e.i.r.p. (dBm)	Max e.i.r.p. (mW)	Max e.i.r.p. (dBm)	Max e.i.r.p. (mW)	Max e.i.r.p. (dBm)
5	20	802.11a/ax	5955 - 6415	92.193	19.65	84.295	19.26	77.660	18.90	181.134	22.58	161.065	22.07
7		802.11a/ax	6535 - 6875	129.897	21.14	84.528	19.27	84.528	19.27	254.097	24.05	168.267	22.26
5	40	802.11ax	5965 - 6405	89.351	19.51	83.330	19.21	75.666	18.79	183.231	22.63	159.956	22.04
7		802.11ax	6565 - 6845	133.229	21.25	82.985	19.19	86.020	19.35	249.459	23.97	167.880	22.25
5	80	802.11ax	5985 - 6385	86.377	19.36	77.428	18.89	70.762	18.50	171.791	22.35	153.462	21.86
7		802.11ax	6545 - 6865	133.045	21.24	81.639	19.12	87.983	19.44	254.683	24.06	172.584	22.37
5	160	802.11ax	6025 - 6345	84.820	19.29	72.277	18.59	71.746	18.56	164.059	22.15	148.594	21.72
7		802.11ax	6665 - 6825	112.099	20.50	70.275	18.47	79.013	18.98	219.280	23.41	151.356	21.80

EUT Overview Standard Power (High Rate)

FCC ID: BCGA2925 IC: 579C-A2925	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2311270069-13-R1 BCG	Test Dates: 01/08/2024 - 04/05/2024	EUT Type: Tablet Device	Page 4 of 525

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

1.0 INTRODUCTION

1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Innovation, Science and Economic Development Canada.

1.2 Element Materials Technology Test Location

These measurement tests were conducted at the Element Materials Technology facility located at 18855 Adams Court, Morgan Hill, CA 95037. The measurement facility is compliant with the test site requirements specified in ANSI C63.4-2014 and KDB 414788 D01 v01r01.

1.3 Test Facility / Accreditations

Measurements were performed at Element Materials Technology.

- Element Materials Technology is an ISO 17025-2017 accredited test facility under the American Association for Laboratory Accreditation (A2LA) with Certificate number 2041.02 for Specific Absorption Rate (SAR), Hearing Aid Compatibility (HAC) testing, where applicable, and Electromagnetic Compatibility (EMC) testing for FCC and Innovation, Science, and Economic Development Canada rules.
- Element Washington DC LLC TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC 17065-2012 by A2LA (Certificate number 2041.03) in all scopes of FCC Rules and ISED Standards (RSS).
- Element Materials Technology facility is a registered (22831) test laboratory with the site description on file with ISED.
- Element Washington DC LLC is a Recognized U.S. Certification Assessment Body (CAB # US0110) for ISED Canada as designated by NIST under the U.S. and Canada Mutual Recognition Agreements (MRAs).

FCC ID: BCGA2925 IC: 579C-A2925	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2311270069-13-R1 BCG	Test Dates: 01/08/2024 - 04/05/2024	EUT Type: Tablet Device	Page 5 of 525

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

2.0 PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test (EUT) is the **Apple Tablet Device FCC ID: BCGA2925** and **IC: 579C-A2925**. The test data contained in this report pertains only to the emissions due to the EUT's UNII transmitter while operating in the 6GHz band.

Test Device Serial No.: M6NM4JFC3F, Q4FQVTWRL2, CWF7TCY9J3, DLXH09000190000DHFV, DJY7WLOW1Y, RN4PMJXLWF.

2.2 Device Capabilities

This device contains the following capabilities:

802.11b/g/n/ax WLAN, 802.11a/n/ac/ax UNII, Bluetooth (1x, EDR, LE1M, LE2M, HDR4, HDR8), 802.11a/ax WIFI 6E, NB UNII (1x, HDR4, HDR8), WPT, 802.15.4

This device supports BT Beamforming

Standard Power (SP) mode is supported for U-NII Bands 5 and 7. Lower Power Indoor (LPI) mode is supported for U-NII Bands 5, 6, 7, 8. Throughout the report, data of Standard Power mode is denoted as SP while data of Lower Power Indoor mode is denoted as LPI.

Band 5		Band 6		Band 7		Band 8	
Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)
1	5955	97	6435	117	6535	189	6895
:	:	:	:	:	:	:	:
45	6175	105	6475	149	6695	209	6995
:	:	:	:	:	:	:	:
93	6415	113	6515	185	6875	233	7115

Table 2-1. 802.11a / 802.11ax (20MHz) Frequency / Channel Operations

Band 5		Band 6		Band 7		Band 8	
Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)
3	5965	99	6445	123	6565	187	6885
:	:	:	:	:	:	:	:
43	6165	107	6485	155	6725	211	7005
:	:	:	:	:	:	:	:
91	6405	115	6525	179	6845	227	7085

Table 2-2. 802.11ax (40MHz BW) Frequency / Channel Operations

FCC ID: BCGA2925 IC: 579C-A2925	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2311270069-13-R1 BCG	Test Dates: 01/08/2024 - 04/05/2024	EUT Type: Tablet Device	Page 6 of 525

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

Band 5

Ch.	Frequency (MHz)
7	5985
:	:
39	6145
:	:
87	6385

Band 6

Ch.	Frequency (MHz)
103	6465

Band 7

Ch.	Frequency (MHz)
119	6545
:	:
151	6705
:	:
183	6865

Band 8

Ch.	Frequency (MHz)
199	6945
:	:
215	7025

Table 2-3. 802.11ax (80MHz BW) Frequency / Channel Operations

Band 5

Ch.	Frequency (MHz)
15	6025
:	:
47	6185
:	:
79	6345

Band 6

Ch.	Frequency (MHz)
111	6505

Band 7

Ch.	Frequency (MHz)
143	6665
:	:
175	6825

Band 8

Ch.	Frequency (MHz)
207	6985

Table 2-4. 802.11ax (160MHz BW) Frequency / Channel Operations

Notes:

- 6GHz NII operation is possible in 20MHz, 40MHz, 80MHz and 160MHz channel bandwidths. The maximum achievable duty cycles for all modes were determined based on measurements performed on a spectrum analyzer in zero-span mode with RBW = 8MHz, VBW = 50MHz, and detector = peak per the guidance of Section B)2)b) KDB 789033 D02 v02r01 and ANSI C63.10-2013. The RBW and VBW were both greater than 50/T, where T is the minimum transmission duration, and the number of sweep points across T was greater than 100. The duty cycles are as follows:

Measured Duty Cycles						
802.11 Mode/Band		Duty Cycle [%]				
		Antenna WF5B	Antenna WF8	Antenna WF7	CDD/SDM (Primary)	CDD/SDM (Diversity)
6GHz	a (Low Rate)	97.10	97.70	97.75	-	-
	a (Mid Rate)	95.10	95.70	95.74	-	-
	a (High Rate)	94.21	91.39	91.90	-	-
	ax(SU) (HE20 Low Rate)	97.19	95.90	95.96	96.18	95.92
	ax(SU) (HE20 Mid Rate)	95.52	93.33	93.13	93.35	92.88
	ax(SU) (HE20 High Rate)	92.96	87.48	86.94	87.32	86.48
	ax(SU) (HE40 Low Rate)	97.81	95.72	95.52	95.96	95.48
	ax(SU) (HE40 Mid Rate)	95.35	93.09	92.92	92.70	92.88
	ax(SU) (HE40 High Rate)	93.41	86.28	88.98	86.32	86.28
	ax(SU) (HE80 Low Rate)	97.05	95.48	95.52	95.08	96.14
	ax(SU) (HE80 Mid Rate)	95.39	92.45	92.92	92.70	92.66
	ax(SU) (HE80 High Rate)	91.47	85.86	86.68	86.12	85.88
	ax(SU) (HE160 Low Rate)	96.58	93.73	93.99	93.93	94.17
	ax(SU) (HE160 Mid Rate)	93.71	90.80	90.80	90.59	89.72
	ax(SU) (HE160 High Rate)	87.92	83.08	83.77	82.81	83.35

Table 2-5. Measured Duty Cycles

FCC ID: BCGA2925 IC: 579C-A2925	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2311270069-13-R1 BCG	Test Dates: 01/08/2024 - 04/05/2024	EUT Type: Tablet Device	Page 7 of 525

V 10.5 12/15/2021

2. The device employs MIMO technology. Below are the possible configurations.

WiFi Configuration		SISO			Primary						Diversity					
					SDM		CDD		STBC		SDM		CDD		STBC	
		Antenna WF5B	Antenna WF8	Antenna WF7	Antenna WF5B	Antenna WF8	Antenna WF5B	Antenna WF8	Antenna WF5B	Antenna WF8	Antenna WF8	Antenna WF7	Antenna WF8	Antenna WF7	Antenna WF8	Antenna WF7
6GHz	11a	✓	✓	✓	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗
	11ax(SU) (20MHz)	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
	11ax(SU) (40MHz)	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
	11ax(SU) (80MHz)	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
	11ax(SU) (160MHz)	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓

Table 2-6. WIFI Configurations

✓ = Support ; ✗ = NOT Support

SISO = Single Input Single Output

SDM = Spatial Diversity Multiplexing – MIMO function

CDD = Cyclic Delay Diversity - 2Tx Function

STBC = Space-Time Block Coding – 2Tx Function

Data Rate(s) Tested: 6, 9, 12, 18, 24, 36, 48, 54Mbps (802.11a)

8/8.6, 16/17.2, 24/25.8, 33/34.4, 49/51.6, 65/68.8, 73/77.4, 81/86.0, 98/103.2, 108/114.7, 122/129.0, 135/143.4 Mbps (ax – 20MHz)
 16/17.2, 33/34.4, 49/51.6, 65/68.8, 98/103.2, 130/137.6, 146/154.9, 163/172.1, 195/206.5, 217/229.4, 244/258.1, 271/286.8 Mbps (ax – 40MHz BW)
 34/36.0, 68/72.1, 102/108.1, 136/144.1, 204/216.2, 272/288.2, 306/324.4, 340/360.3, 408/432.4, 453/480.4, 510/540.4, 567/600.5 Mbps (ax – 80MHz BW)
 68.1/72.1, 136.1/144.1, 204.2/216.2, 272.2/288.2, 408.3/432.4, 544.4/576.5, 612.5/648.5, 680.6/720.6, 816.7/864.7, 907.4/960.8, 1020.8/1080.9, 1134.3/1201 Mbps (ax – 160MHz BW)
 16.3/17.2, 32.5/34.4, 48.8/51.6, 65/68.8, 97.5/103.2, 130/137.6, 146.3/154.9, 162.5/172.1, 195/206.5, 216.7/229.4, 243.8/258.1, 270.8/286.8 Mbps (MIMO ax – 20MHz)
 32.5/34.4, 65/68.8, 97.5/103.2, 130/137.6, 195/206.5, 260/275.3, 292.5/309.7, 325/344.1, 390/412.9, 433.3/458.8, 487.5/516.2, 541.7/573.5 Mbps (MIMO ax – 40MHz BW)
 68.1/72.1, 136.1/144.1, 204.2/216.2, 272.2/288.2, 408.3/432.4, 544.4/576.5, 612.5/648.5, 680.6/720.6, 816.7/864.7, 907.4/960.8, 1020.8/1080.9, 1134.3/1201 Mbps (MIMO ax – 80MHz BW)
 136.1/144.1, 272.2/288.2, 408.3/432.4, 544.4/576.5, 816.7/864.7, 1088.9/1152.9, 1225/1297.1, 1361.1/1441.2, 1633.3/1729.4, 1814.8/1921.6, 2041.7/2161.8, 2268.5/2402 Mbps (MIMO ax – 160MHz BW)

FCC ID: BCGA2925 IC: 579C-A2925	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2311270069-13-R1 BCG	Test Dates: 01/08/2024 - 04/05/2024	EUT Type: Tablet Device	Page 8 of 525

V 10.5 12/15/2021

3. This device supports simultaneous transmission operations, which allows for multiple transmitters to transmit simultaneously on the same antenna. The table below shows all configurations possible.

Antenna	Simultaneous Tx Config	Wifi 2GHz	Bluetooth	Thread	Wifi 5GHz	Wifi 6GHz	NB UNII
		802.11 b/g/n/ax	BDR, EDR, HDR4/8, LE1/2M	802.15.4	802.11 a/n/ac/ax	802.11 a/ax	BDR, HDR4/8
WF8	Config 1	✓	✗	✗	✗	✗	✓
WF8	Config 2	✗	✓	✗	✓	✗	✗
WF8	Config 3	✗	✓	✗	✗	✓	✗
WF8	Config 4	✗	✗	✓	✓	✗	✗
WF8	Config 5	✗	✗	✓	✗	✓	✗
WF7	Config 6	✓	✗	✗	✗	✗	✓
WF7	Config 7	✗	✓	✗	✓	✗	✗
WF7	Config 8	✗	✓	✗	✗	✓	✗
WF7	Config 9	✗	✗	✓	✓	✗	✗
WF7	Config 10	✗	✗	✓	✗	✓	✗

Table 2-7. Simultaneous Transmission Configurations

✓ = Support; ✗ = Not Support

4. All the above simultaneous transmission configurations have been tested and the worst-case configuration was found to be Config 2 and reported in RF Bluetooth and RF UNII OFDM Test reports.
5. Specific 2.4GHz Wi-Fi antenna that can only transmit simultaneously with 2.4GHz Bluetooth antenna is listed in the SAR test report. For BT (2.4GHz) in connected mode and Wi-Fi (2.4GHz) - Wi-Fi max power will not exceed minimum of (13.5dBm, SAR max cap, Reg max cap) power. For BT (2.4GHz) in disconnected mode and Wi-Fi (2.4GHz) - BT will be using iPA only and Wi-Fi max power will not exceed minimum of (SAR max cap, Reg max cap) power. Bluetooth can simultaneously transmit with IEEE 802.11a/n/ac/ax 5/6 GHz on separate antenna.

FCC ID: BCGA2925 IC: 579C-A2925	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2311270069-13-R1 BCG	Test Dates: 01/08/2024 - 04/05/2024	EUT Type: Tablet Device	Page 9 of 525

V 10.5 12/15/2021

2.3 Antenna Description

Following antenna gains were provided by the manufacturer.

UNII Band	Tx Frequency (MHz)	Highest Antenna Gain			Lowest Antenna Gain		
		Antenna WF5B	Antenna WF8	Antenna WF7	Antenna WF5B	Antenna WF8	Antenna WF7
5	5955-6415	1.7	1.3	1.0	0.8	0.6	0.3
6	6435-6515	2.4	-0.1	0.6	2.4	-0.1	0.6
7	6535-6875	3.3	1.4	1.6	2.1	0.4	1.0
8	6895-7115	2.2	-0.3	1.5	2.0	-0.9	-0.1

Table 2-8. Antenna Gain

2.4 Test Support Equipment

1	Apple MacBook Pro	Model:	A2141	S/N:	C02H604EQ05D
	w/AC/DC Adapter	Model:	A2166	S/N:	C4H042705ZNP00WA6
2	Apple USB-C Cable	Model:	Spartan	S/N:	GXK1336018XKTR024
3	USB-C Cable	Model:	A246C	S/N:	DWH80115BK826GV19
	w/ AC Adapter	Model:	A2305	S/N:	C4H95160004PF4F4V
4	Apple Pencil	Model:	A2538	S/N:	KJ26TCFXJW
5	DC Power Supply	Model:	KPS3010D	S/N:	N/A
6	Netgear AP	Model:	RAXE500	S/N:	6JX215GA10A5
7	Broadcom AP	Model:	N/A	S/N:	N/A

Table 2-9. Test Support Equipment List

FCC ID: BCGA2925 IC: 579C-A2925		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270069-13-R1 BCG	Test Dates: 01/08/2024 - 04/05/2024	EUT Type: Tablet Device	Page 10 of 525

2.5 Test Configuration

The EUT was tested per the guidance of ANSI C63.10-2013, KDB 789033 D02 v02r01 and KDB 987594 D02 v02r01. ANSI C63.10-2013 was used to reference the appropriate EUT setup for radiated spurious emissions testing and AC line conducted testing. See Sections 3.2 for AC line conducted emissions test setups, 3.3 for radiated emissions test setups, and 7.2, 7.3, 7.4, and 7.5 for antenna port conducted emissions test setups.

There are two vendors of the WiFi/Bluetooth radio modules, variant 1 and variant 2. Both radio modules have the same mechanical outline, same on-board antenna matching circuit, identical antenna structure, and are built and tested to conform to the same specifications and to operate within the same tolerances. The worst case configuration was found between the two variants. The EUT was also investigated with and without charger.

For emissions from 1GHz – 18GHz, low, mid, and high channels were tested with highest power and worst case configuration. The emissions below 1GHz and above 18GHz were tested with the highest transmitting power and the worst case channel.

The EUT was manipulated through three orthogonal planes of X-orientation (flatbed), Y-orientation (landscape), and Z-orientation (portrait) during the testing. Only the worst case emissions were reported in this test report.

For AC line conducted and radiated test below 1GHz, following configuration were investigated and EUT powered by AC/DC adaptor was the worst case.

- EUT powered by AC/DC adaptor via USB-C cable with wire charger
- EUT powered by host PC via USB-C cable with wire charger

802.11ax HE20/40/80/160 2TX SDM mode test data provided in this report covers 802.11ax HE20/40/80/160 2TX STBC mode.

For 802.11ax-RU test results, see separate UNII 6E OFDMA report, 1C2311270069-14.BCG.

The data rates have been classified into three different groups; low data rate, middle data rate, and high data rate. All three groups of data rate have been investigated and only the worst case data rate per group is reported. The worst case data rate for each group per mode are as follows:

- 802.11a:
 - Low Data Rate: 12Mbps
 - Mid Data Rate: 24Mbps
 - High Data Rate: 54Mbps
- 802.11ax(SU) HE20/HE40/HE80/HE160:
 - Low Data Rate: MCS2
 - Mid Data Rate: MCS4
 - High Data Rate: MCS11

2.6 Software and Firmware

The test was conducted with firmware 21E8197 installed on the EUT.

2.7 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and/or no modifications were made during testing.

FCC ID: BCGA2925 IC: 579C-A2925	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2311270069-13-R1 BCG	Test Dates: 01/08/2024 - 04/05/2024	EUT Type: Tablet Device	Page 11 of 525

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

3.0 DESCRIPTION OF TESTS

3.1 Evaluation Procedure

The measurement procedures described in the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices (ANSI C63.10-2013) and the guidance provided in KDB 789033 D02 v02r01 were used in the measurement of the EUT.

Deviation from measurement procedure.....None

3.2 AC Line Conducted Emissions

The line-conducted facility is located inside a 7m x 3.66m x 2.7m shielded enclosure. The shielded enclosure is manufactured by AP Americas. The shielding effectiveness of the shielded room is in accordance with MIL-Std-285 or NSA 65-6. A 1m x 1.5m wooden table 80cm high is placed 40cm away from the vertical wall and 80cm away from the sidewall of the shielded room. Two 10kHz-30MHz, 50Ω/50μH Line-Impedance Stabilization Networks (LISNs) are bonded to the shielded room floor. Power to the LISNs is filtered by external high-current high-insertion loss power line filters. The external power line filter is EPCOS 2X60A Power Line Filter (100dB Attenuation, 14kHz-18GHz) and the two EPCOs 2X48A filters (100dB Minimum Insertion Loss, 14kHz - 10GHz). These filters attenuate ambient signal noise from entering the measurement lines. These filters are also bonded to the shielded enclosure.

The EUT is powered from one LISN and the support equipment is powered from the second LISN. If the EUT is a DC-powered device, power will be derived from the source power supply it normally will be powered from and this supply line(s) will be connected to the second LISN. All interconnecting cables more than 1 meter were shortened to a 1 meter length by non-inductive bundling (serpentine fashion) and draped over the back edge of the test table. All cables were at least 40cm above the horizontal reference ground plane. Power cables for support equipment were routed down to the second LISN while ensuring that that cables were not draped over the second LISN.

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the spectrum analyzer and exploratory measurements were made to determine the frequencies producing the maximum emission from the EUT. The spectrum was scanned from 150kHz to 30MHz with a spectrum analyzer. The detector function was set to peak mode for exploratory measurements while the bandwidth of the analyzer was set to 10kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Once the worst case emissions have been identified, the one EUT cable configuration/arrangement and mode of operation that produced these emissions is used for final measurements on the same test site. The analyzer is set to CISPR quasi-peak and average detectors with a 9kHz resolution bandwidth for final measurements.

Line conducted emissions test results are shown in Section 7.9. Automated test software was used to perform the AC line conducted emissions testing. Automated measurement software utilized is Rohde & Schwarz EMC32, Version 10.50.40.

FCC ID: BCGA2925 IC: 579C-A2925		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270069-13-R1 BCG	Test Dates: 01/08/2024 - 04/05/2024	EUT Type: Tablet Device	Page 12 of 525

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

3.3 Radiated Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Figure 5.7 of Clause 5 in ANSI C63.4-2014. Absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections for measurements above 1GHz. An 80cm tall test table made of Styrodur is placed on top of the turn table. For measurements above 1GHz, an additional Styrodur pedestal is placed on top of the test table to bring the total table height to 1.5m.

Per KDB 414788, radiated emission test sites other than open-field test sites (e.g., shielded anechoic chambers), may be employed for emission measurements below 30MHz if characterized so that the measurements correspond to those obtained at an open-field test site. To determine test site equivalency, a reference sample transmitting at 149kHz was measured on an open field test site (asphalt with no ground plane) and then measured in the 3m semi-anechoic chamber. A calibrated 60cm loop antenna was used while the reference device was rotated through the X, Y and Z axis in order to capture the worst case level. A maximum deviation of 2.77dB at 149kHz was measured when comparing the 3 meter semi-anechoic chamber to the open field site.

For all measurements, the spectrum was scanned through all EUT azimuths and from 1 to 4 meter receive antenna height using a broadband antenna from 30MHz up to the upper frequency shown in 15.33 depending on the highest frequency generated or used in the device or on which the device operates or tunes. For frequencies above 1GHz, linearly polarized double ridge horn antennas were used. For frequencies below 30MHz, a calibrated loop antenna was used. When exploratory measurements were necessary, they were performed at 1 meter test distance inside the semi-anechoic chamber using broadband antennas, broadband amplifiers, and spectrum analyzers to determine the frequencies and modes producing the maximum emissions. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The test set-up was placed on top of the 1 x 1.5 meter table. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Appropriate precaution was taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, mode of operation, turntable azimuth, and receive antenna height was noted for each frequency found.

Final measurements were made in the semi-anechoic chamber using calibrated, linearly polarized broadband and horn antennas. The test setup was configured to the setup that produced the worst case emissions. The spectrum analyzer was set to investigate all frequencies required for testing to compare the highest radiated disturbances with respect to the specified limits. The turntable containing the EUT was rotated through 360 degrees and the height of the receive antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by changing the orientation of the EUT through three orthogonal planes and changing the polarity of the receive antenna, whichever produced the worst-case emissions.

3.4 Environmental Conditions

The temperature is controlled within range of 15°C to 35°C. The relative humidity is controlled within range of 10% to 75%. The atmospheric pressure is monitored within the range 86-106kPa (860-1060mbar).

FCC ID: BCGA2925 IC: 579C-A2925	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2311270069-13-R1 BCG	Test Dates: 01/08/2024 - 04/05/2024	EUT Type: Tablet Device	Page 13 of 525

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

4.0 ANTENNA REQUIREMENTS

Excerpt from §15.203 of the FCC Rules/Regulations:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- The antennas of the EUT are **permanently attached**.
- There are no provisions for connection to an external antenna.

Conclusion:

The EUT complies with the requirement of §15.203.

FCC ID: BCGA2925 IC: 579C-A2925	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2311270069-13-R1 BCG	Test Dates: 01/08/2024 - 04/05/2024	EUT Type: Tablet Device	Page 14 of 525

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

5.0 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.23-2012. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95% level of confidence. The measurement uncertainty shown below meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Contribution	Expanded Uncertainty ($\pm$ dB)
Conducted Bench Top Measurements	2.07
Line Conducted Disturbance	1.91
Radiated Disturbance (<30MHz)	4.12
Radiated Disturbance (30MHz - 1GHz)	4.85
Radiated Disturbance (1 - 18GHz)	5.08
Radiated Disturbance (>18GHz)	4.59

FCC ID: BCGA2925 IC: 579C-A2925		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270069-13-R1 BCG	Test Dates: 01/08/2024 - 04/05/2024	EUT Type: Tablet Device	Page 15 of 525

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

6.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST). Measurements antennas used during testing were calibrated in accordance to the requirements of ANSI C63.5-2017.

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
Agilent Technologies	N9030A	3Hz-44GHz PXA Signal Analyzer	6/21/2023	Annual	6/21/2024	MY49430244
Anritsu	ML2496A	Power Meter	4/4/2023	Annual	4/4/2024	1840005
Anritsu	MA2411B	Pulse Power Sensor	8/22/2023	Annual	8/22/2024	1726262
Anritsu	MA2411B	Pulse Power Sensor	4/5/2023	Annual	4/5/2024	1726261
ETS-Lindgren	3117	Double Ridged Guide Antenna (1-18 GHz)	3/30/2023	Annual	3/30/2024	00218555
Keysight Technology	N9040B	UXA Signal Analyzer	3/10/2023	Annual	3/10/2024	MY57212015
Rohde & Schwarz	TS-PR18	Pre-Amplifier (1GHz - 18GHz)	8/31/2023	Annual	8/31/2024	100052
Rohde & Schwarz	FSV40	Signal Analyzer (10Hz-40GHz)	5/11/2023	Annual	5/11/2024	101619
Rohde & Schwarz	ESW44	EMI Test Receiver	6/6/2023	Annual	6/6/2024	101668
Rohde & Schwarz	TS-PR8	Pre-Amplifier (30MHz - 8GHz)	6/22/2023	Annual	6/22/2024	102356
Rohde & Schwarz	TS-PR1840	Pre-Amplifier (18GHz - 40GHz)	6/2/2023	Annual	6/2/2024	100050
Rohde & Schwarz	HFH2-Z2	Loop Antenna	5/1/2023	Annual	5/1/2024	100519
Rohde & Schwarz	ENV216	Two-Line V-Network	6/8/2023	Annual	6/8/2024	192052
Schwarzbeck	VULB 9162	Bilog Antenna (30MHz - 6GHz)	4/17/2023	Annual	4/17/2024	00304

Table 6-1. Test Equipment List

Note:

For equipment listed above that has a calibration date or calibration due date that falls within the test date range, care was taken to ensure that this equipment was used after the calibration date and before the calibration due date.

FCC ID: BCGA2925 IC: 579C-A2925		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270069-13-R1 BCG	Test Dates: 01/08/2024 - 04/05/2024	EUT Type: Tablet Device	Page 16 of 525

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

7.0 TEST RESULTS

7.1 Summary

Company Name: Apple Inc.
 FCC ID: BCGA2925
 IC: 579C-A2925
 FCC Classification: 15E 6GHz Low Power Dual Client (6CD)

FCC Part Section(s) / KDB Reference	RSS Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
2.1049, 15.407(a)(11)	RSS Gen [6.7], RSS-248 [4.4]	Occupied Bandwidth/ 26dB Bandwidth	99% of the occupied bandwidth of any channel must be contained within each of its respective U-NII sub bands < 320MHz (5.925 - 7.125GHz)	CONDUCTED	PASS	Section 7.2
15.407(a)(8)	RSS-248 [4.5.3]	Maximum Power Spectral Density	< -1dBm/MHz e.i.r.p. for Low Power Indoor		PASS	Section 7.4
15.407(a)(7)	RSS-248 [4.5.5]		< 17dBm/MHz e.i.r.p. for Standard Power		PASS	Section 7.4
15.407(a)(8)	RSS-248 [4.5.3]	Maximum Radiated Output Power	< 24dBm over the frequency band of operation for Low Power Indoor		PASS	Section 7.3
15.407(a)(7)	RSS-248 [4.5.5]		< 30dBm over the frequency band of operation for Standard Power		PASS	Section 7.3
15.407(b)(7)	RSS-248 [4.6.2]	In-Band Emissions	EUT must meet the limits detailed in 15.407(b)(7) and RSS-248 [4.6.2]b)		PASS	Section 7.5
15.407(d)(6)	RSS-248 [4.7]	Contention Based Protocol	EUT must detect AWGN signal with 90% (or better) certainty		PASS	Section 7.6
15.407(a)(7)	RSS-248 [4.5.5]	Proper Power Adjustment, Client Devices Connected to a Standard Power Access Point	EUT maintains its power level at least 6 dB lower than that of the standard-power access point		PASS	See UNII 6E OFDMA Test Report (1C231127 0069-14.BCG)
987594 D02 v02r01	N/A	Dual Client Test, Demonstration of Proper Power Adjustment based on Associated AP	EUT maximum power level shall not exceed 30dBm EIRP when connected to Standard Power AP, and 24dBm EIRP when connected to Low Power Indoor AP		PASS	
15.407(b)(6)	RSS-248 [4.6.2]	Undesirable Emissions	< -27dBm/MHz e.i.r.p. outside of the 5.925 – 7.125GHz band	RADIATED	PASS	Section 7.7
15.205, 15.209	RSS-Gen [8.9]	General Field Strength Limits (Restricted Bands and Radiated Emission Limits)	Emissions in restricted bands must meet the radiated limits detailed in 15.209		PASS	Section 7.7, 7.8
15.207	RSS-Gen [8.8]	AC Conducted Emissions (150kHz – 30MHz)	< FCC 15.207 & RSS-Gen [8.8] limits	LINE CONDUCTED	PASS	Section 7.9

Table 7-1. Summary of Test Results

FCC ID: BCGA2925 IC: 579C-A2925	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2311270069-13-R1 BCG	Test Dates: 01/08/2024 - 04/05/2024	EUT Type: Tablet Device	Page 17 of 525

V 10.5 12/15/2021

Notes:

- 1) All channels, modes, and modulations/data rates were investigated among all UNII bands. The test results shown in the following sections represent the worst case emissions.
- 2) The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
- 3) All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables and attenuators.
- 4) For conducted spurious emissions, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is Element EMC Software Tool v1.2.
- 5) For radiated band edge, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is Element "Chamber Automation," Version 3.0.0.
- 6) All radiated measurements were tested at the highest supported power setting per band.

FCC ID: BCGA2925 IC: 579C-A2925	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2311270069-13-R1 BCG	Test Dates: 01/08/2024 - 04/05/2024	EUT Type: Tablet Device	Page 18 of 525

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

7.2 26dB & 99% Bandwidth Measurement – 802.11a/ax(SU)

§2.1049; §15.407; RSS-Gen [6.7]

Test Overview and Limit

The bandwidth at 26dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the antenna terminal while the EUT is operating at its maximum duty cycle, at its maximum power control level, as defined in ANSI C63.10-2013 and KDB 789033 D02 v02r01, and at the appropriate frequencies. The spectrum analyzer's bandwidth measurement function is configured to measure the 26dB bandwidth.

Test Procedure Used

ANSI C63.10-2013 – Section 12.4

KDB 789033 D02 v02r01 – Section C

Test Settings

1. The signal analyzers' automatic bandwidth measurement capability was used to perform the 26dB bandwidth measurement. The "X" dB bandwidth parameter was set to $X = 26$. The automatic bandwidth measurement function also has the capability of simultaneously measuring the 99% occupied bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = approximately 1% of the emission bandwidth
3. $VBW \geq 3 \times RBW$
4. Detector = Peak
5. Trace mode = max hold

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-1. Test Instrument & Measurement Setup

Test Notes

1. All antenna configurations and data rates were investigated and only the worst case are reported.
2. All RU's were investigated and only worst case partially-loaded and fully-loaded RU's were reported.
3. Low, mid, and high channels were tested and tabular data has been reported. Only mid channel bandwidth plots have been reported.
4. OBW are not affected by Standard Power (SP) and Low Power Indoor (LPI) and has been reported same.

FCC ID: BCGA2925 IC: 579C-A2925	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2311270069-13-R1 BCG	Test Dates: 01/08/2024 - 04/05/2024	EUT Type: Tablet Device	Page 19 of 525

V 10.5 12/15/2021

7.2.1 Antenna WF5B 26dB & 99% Bandwidth Measurements

	Frequency [MHz]	Channel	802.11 MODE	Data Rate [Mbps]	Measured 99% Occupied Bandwidth [MHz]	Measured 26dB Bandwidth [MHz]	Maximum Bandwidth Limit [MHz]	Pass / Fail
Band 5	5955	1	a	12	16.69	20.63	320	Pass
	6175	45	a	12	16.65	20.68	320	Pass
	6415	93	a	12	16.65	20.81	320	Pass
	5955	1	ax (20MHz)	24/25.8 (MCS2)	19.08	20.93	320	Pass
	6175	45	ax (20MHz)	24/25.8 (MCS2)	19.01	21.18	320	Pass
	6415	93	ax (20MHz)	24/25.8 (MCS2)	19.04	21.05	320	Pass
	5695	3	ax (40MHz)	49/51.6 (MCS2)	37.89	41.67	320	Pass
	6165	43	ax (40MHz)	49/51.6 (MCS2)	37.89	41.50	320	Pass
	6405	91	ax (40MHz)	49/51.6 (MCS2)	37.90	41.24	320	Pass
	5985	7	ax (80MHz)	102/108.1 (MCS2)	77.20	81.32	320	Pass
	6145	39	ax (80MHz)	102/108.1 (MCS2)	77.17	81.37	320	Pass
	6385	87	ax (80MHz)	102/108.1 (MCS2)	77.17	82.27	320	Pass
	6025	15	ax (160MHz)	183.8/216.2 (MCS2)	156.04	164.62	320	Pass
	6185	47	ax (160MHz)	183.8/216.2 (MCS2)	156.36	164.94	320	Pass
	6345	79	ax (160MHz)	183.8/216.2 (MCS2)	156.02	164.62	320	Pass
Band 6	6435	97	a	12	16.68	20.73	320	Pass
	6475	105	a	12	16.64	20.74	320	Pass
	6515	113	a	12	16.69	20.77	320	Pass
	6345	97	ax (20MHz)	24/25.8 (MCS2)	19.00	20.77	320	Pass
	6475	105	ax (20MHz)	24/25.8 (MCS2)	19.05	21.01	320	Pass
	6515	113	ax (20MHz)	24/25.8 (MCS2)	19.01	21.02	320	Pass
	6445	99	ax (40MHz)	49/51.6 (MCS2)	37.92	41.53	320	Pass
	6485	107	ax (40MHz)	49/51.6 (MCS2)	37.91	41.39	320	Pass
	6525	115	ax (40MHz)	49/51.6 (MCS2)	37.93	41.51	320	Pass
	6465	103	ax (80MHz)	102/108.1 (MCS2)	77.20	81.29	320	Pass
Band 7	6505	111	ax (160MHz)	183.8/216.2 (MCS2)	156.59	165.04	320	Pass
	6535	117	a	12	16.71	20.79	320	Pass
	6695	149	a	12	16.67	20.62	320	Pass
	6875	185	a	12	16.67	20.87	320	Pass
	6535	117	ax (20MHz)	24/25.8 (MCS2)	18.99	21.18	320	Pass
	6695	149	ax (20MHz)	24/25.8 (MCS2)	18.99	21.12	320	Pass
	6875	185	ax (20MHz)	24/25.8 (MCS2)	19.01	21.40	320	Pass
	6565	123	ax (40MHz)	49/51.6 (MCS2)	37.87	41.22	320	Pass
	6725	155	ax (40MHz)	49/51.6 (MCS2)	37.91	41.36	320	Pass
	6885	179	ax (40MHz)	49/51.6 (MCS2)	37.89	41.48	320	Pass
	6545	119	ax (80MHz)	102/108.1 (MCS2)	77.14	81.20	320	Pass
	6705	151	ax (80MHz)	102/108.1 (MCS2)	77.18	81.65	320	Pass
	6865	183	ax (80MHz)	102/108.1 (MCS2)	77.14	81.35	320	Pass
Band 8	6665	143	ax (160MHz)	183.8/216.2 (MCS2)	155.95	164.70	320	Pass
	6825	175	ax (160MHz)	183.8/216.2 (MCS2)	156.35	164.37	320	Pass
	6895	189	a	12	16.66	20.62	320	Pass
	6995	209	a	12	16.73	20.63	320	Pass
	7115	233	a	12	16.64	20.84	320	Pass
	6895	189	ax (20MHz)	24/25.8 (MCS2)	18.98	21.20	320	Pass
	6995	209	ax (20MHz)	24/25.8 (MCS2)	19.00	21.09	320	Pass
	7115	233	ax (20MHz)	24/25.8 (MCS2)	19.02	21.06	320	Pass
	6925	187	ax (40MHz)	49/51.6 (MCS2)	37.89	41.29	320	Pass
	7005	211	ax (40MHz)	49/51.6 (MCS2)	37.92	41.39	320	Pass
	7085	227	ax (40MHz)	49/51.6 (MCS2)	37.92	41.13	320	Pass
	6945	199	ax (80MHz)	102/108.1 (MCS2)	77.06	81.14	320	Pass
	7025	215	ax (80MHz)	102/108.1 (MCS2)	77.13	81.74	320	Pass
	6985	207	ax (160MHz)	183.8/216.2 (MCS2)	156.41	164.19	320	Pass

Table 7-2. Conducted Bandwidth Measurements Antenna WF5B (Low Data Rate)

FCC ID: BCGA2925 IC: 579C-A2925	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2311270069-13-R1 BCG	Test Dates: 01/08/2024 - 04/05/2024	EUT Type: Tablet Device	Page 20 of 525

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

	Frequency [MHz]	Channel	802.11 MODE	Data Rate [MHz]	Measured 99% Occupied Bandwidth [MHz]	Measured 26dB Bandwidth [MHz]	Maximum Bandwidth Limit [MHz]	Pass / Fail
Band 5	5955	1	a	24	16.65	20.78	320	Pass
	6175	45	a	24	16.58	20.66	320	Pass
	6415	93	a	24	16.68	20.77	320	Pass
	5955	1	ax (20MHz)	49/51.6 (MCS4)	19.01	21.04	320	Pass
	6175	45	ax (20MHz)	49/51.6 (MCS4)	18.99	20.96	320	Pass
	6415	93	ax (20MHz)	49/51.6 (MCS4)	19.00	21.03	320	Pass
	5965	3	ax (40MHz)	98/103.2 (MCS4)	37.87	41.22	320	Pass
	6165	43	ax (40MHz)	98/103.2 (MCS4)	37.91	41.10	320	Pass
	6405	91	ax (40MHz)	98/103.2 (MCS4)	37.91	40.94	320	Pass
	5985	7	ax (80MHz)	204/216.2 (MCS4)	77.05	81.31	320	Pass
	6145	39	ax (80MHz)	204/216.2 (MCS4)	77.20	81.26	320	Pass
	6385	87	ax (80MHz)	204/216.2 (MCS4)	77.17	81.85	320	Pass
	6025	15	ax (160MHz)	367.5/432.4 (MCS4)	156.08	164.48	320	Pass
	6185	47	ax (160MHz)	367.5/432.4 (MCS4)	156.14	164.03	320	Pass
	6345	79	ax (160MHz)	367.5/432.4 (MCS4)	156.23	164.66	320	Pass
Band 6	6435	97	a	24	16.64	20.94	320	Pass
	6475	105	a	24	16.61	20.69	320	Pass
	6515	113	a	24	16.66	20.65	320	Pass
	6435	97	ax (20MHz)	49/51.6 (MCS4)	19.00	21.17	320	Pass
	6475	105	ax (20MHz)	49/51.6 (MCS4)	19.00	21.17	320	Pass
	6515	113	ax (20MHz)	49/51.6 (MCS4)	18.98	20.88	320	Pass
	6445	99	ax (40MHz)	98/103.2 (MCS4)	37.84	40.95	320	Pass
	6485	107	ax (40MHz)	98/103.2 (MCS4)	37.94	41.42	320	Pass
	6525	115	ax (40MHz)	98/103.2 (MCS4)	37.96	41.26	320	Pass
	6465	103	ax (80MHz)	204/216.2 (MCS4)	77.14	81.43	320	Pass
Band 7	6505	111	ax (160MHz)	367.5/432.4 (MCS4)	156.40	165.14	320	Pass
	6535	117	a	24	16.62	20.44	320	Pass
	6695	149	a	24	16.65	20.81	320	Pass
	6875	185	a	24	16.66	20.79	320	Pass
	6535	117	ax (20MHz)	49/51.6 (MCS4)	19.05	20.88	320	Pass
	6695	149	ax (20MHz)	49/51.6 (MCS4)	18.96	21.00	320	Pass
	6875	185	ax (20MHz)	49/51.6 (MCS4)	18.99	21.02	320	Pass
	6565	123	ax (40MHz)	98/103.2 (MCS4)	37.91	40.95	320	Pass
	6725	155	ax (40MHz)	98/103.2 (MCS4)	37.91	41.16	320	Pass
	6885	179	ax (40MHz)	98/103.2 (MCS4)	37.86	41.18	320	Pass
	6545	119	ax (80MHz)	204/216.2 (MCS4)	77.25	81.71	320	Pass
	6705	151	ax (80MHz)	204/216.2 (MCS4)	77.20	81.12	320	Pass
	6865	183	ax (80MHz)	204/216.2 (MCS4)	77.10	81.35	320	Pass
	6665	143	ax (160MHz)	367.5/432.4 (MCS4)	155.96	163.57	320	Pass
	6825	175	ax (160MHz)	367.5/432.4 (MCS4)	156.28	164.36	320	Pass
Band 8	6895	189	a	24	16.62	20.66	320	Pass
	6995	209	a	24	16.64	20.78	320	Pass
	7115	233	a	24	16.65	20.80	320	Pass
	6895	189	ax (20MHz)	49/51.6 (MCS4)	19.01	20.98	320	Pass
	6995	209	ax (20MHz)	49/51.6 (MCS4)	19.02	20.95	320	Pass
	7115	233	ax (20MHz)	49/51.6 (MCS4)	19.00	21.05	320	Pass
	6885	187	ax (40MHz)	98/103.2 (MCS4)	37.93	41.55	320	Pass
	7005	211	ax (40MHz)	98/103.2 (MCS4)	37.87	41.26	320	Pass
	7085	227	ax (40MHz)	98/103.2 (MCS4)	37.87	41.04	320	Pass
	6945	199	ax (80MHz)	204/216.2 (MCS4)	77.26	81.22	320	Pass
	7025	215	ax (80MHz)	204/216.2 (MCS4)	77.09	81.21	320	Pass
	6985	207	ax (160MHz)	367.5/432.4 (MCS4)	156.62	164.14	320	Pass

Table 7-3. Conducted Bandwidth Measurements Antenna WF5B (Mid Data Rate)

FCC ID: BCGA2925 IC: 579C-A2925	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2311270069-13-R1 BCG	Test Dates: 01/08/2024 - 04/05/2024	EUT Type: Tablet Device	Page 21 of 525

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

	Frequency [MHz]	Channel	802.11 MODE	Data Rate [MHz]	Measured 99% Occupied Bandwidth [MHz]	Measured 26dB Bandwidth [MHz]	Maximum Bandwidth Limit [MHz]	Pass / Fail
Band 5	5955	1	a	54	16.65	20.65	320	Pass
	6175	45	a	54	16.56	20.61	320	Pass
	6415	93	a	54	16.61	20.49	320	Pass
	5955	1	ax (20MHz)	135/143.4 (MCS11)	18.97	21.23	320	Pass
	6175	45	ax (20MHz)	135/143.4 (MCS11)	19.04	20.91	320	Pass
	6415	93	ax (20MHz)	135/143.4 (MCS11)	19.01	21.06	320	Pass
	5965	3	ax (40MHz)	271/286.8 (MCS11)	37.82	41.07	320	Pass
	6165	43	ax (40MHz)	271/286.8 (MCS11)	37.89	40.96	320	Pass
	6405	91	ax (40MHz)	271/286.8 (MCS11)	37.88	40.90	320	Pass
	5985	7	ax (80MHz)	567/600.5 (MCS11)	77.19	81.34	320	Pass
	6145	39	ax (80MHz)	567/600.5 (MCS11)	77.13	81.26	320	Pass
	6385	87	ax (80MHz)	567/600.5 (MCS11)	77.03	81.25	320	Pass
	6025	15	ax (160MHz)	1020.8/1201 (MCS11)	156.48	164.47	320	Pass
Band 6	6185	47	ax (160MHz)	1020.8/1201 (MCS11)	156.15	164.92	320	Pass
	6345	79	ax (160MHz)	1020.8/1201 (MCS11)	156.19	164.81	320	Pass
	6435	97	a	54	16.59	20.59	320	Pass
	6475	105	a	54	16.62	20.41	320	Pass
	6515	113	a	54	16.61	20.62	320	Pass
	6435	97	ax (20MHz)	135/143.4 (MCS11)	19.00	21.09	320	Pass
	6475	105	ax (20MHz)	135/143.4 (MCS11)	19.00	21.24	320	Pass
	6515	113	ax (20MHz)	135/143.4 (MCS11)	19.01	20.81	320	Pass
	6445	99	ax (40MHz)	271/286.8 (MCS11)	37.87	41.38	320	Pass
	6485	107	ax (40MHz)	271/286.8 (MCS11)	37.94	41.48	320	Pass
Band 7	6525	115	ax (40MHz)	271/286.8 (MCS11)	37.96	41.01	320	Pass
	6465	103	ax (80MHz)	567/600.5 (MCS11)	77.17	81.22	320	Pass
	6505	111	ax (160MHz)	1020.8/1201 (MCS11)	156.26	164.90	320	Pass
	6535	117	a	54	16.57	20.41	320	Pass
	6695	149	a	54	16.56	20.60	320	Pass
	6875	185	a	54	16.59	20.56	320	Pass
	6535	117	ax (20MHz)	135/143.4 (MCS11)	19.02	20.95	320	Pass
	6695	149	ax (20MHz)	135/143.4 (MCS11)	19.00	21.10	320	Pass
	6875	185	ax (20MHz)	135/143.4 (MCS11)	19.01	21.01	320	Pass
	6565	123	ax (40MHz)	271/286.8 (MCS11)	37.85	41.20	320	Pass
	6725	155	ax (40MHz)	271/286.8 (MCS11)	37.94	41.09	320	Pass
	6885	179	ax (40MHz)	271/286.8 (MCS11)	37.95	41.12	320	Pass
	6545	119	ax (80MHz)	567/600.5 (MCS11)	76.97	81.46	320	Pass
Band 8	6705	151	ax (80MHz)	567/600.5 (MCS11)	77.11	81.05	320	Pass
	6865	183	ax (80MHz)	567/600.5 (MCS11)	77.16	81.05	320	Pass
	6665	143	ax (160MHz)	1020.8/1201 (MCS11)	156.20	165.02	320	Pass
	6825	175	ax (160MHz)	1020.8/1201 (MCS11)	156.05	165.31	320	Pass
	6895	189	a	54	16.59	20.54	320	Pass
	6995	209	a	54	16.61	20.48	320	Pass
	7115	233	a	54	16.63	20.54	320	Pass
	6895	189	ax (20MHz)	135/143.4 (MCS11)	19.01	21.15	320	Pass
	6995	209	ax (20MHz)	135/143.4 (MCS11)	19.00	21.13	320	Pass
	7115	233	ax (20MHz)	135/143.4 (MCS11)	19.01	20.86	320	Pass
	6885	187	ax (40MHz)	271/286.8 (MCS11)	37.89	41.01	320	Pass
	7005	211	ax (40MHz)	271/286.8 (MCS11)	37.90	40.99	320	Pass
	7085	227	ax (40MHz)	271/286.8 (MCS11)	37.88	41.07	320	Pass
	6945	199	ax (80MHz)	567/600.5 (MCS11)	77.02	81.05	320	Pass
	7025	215	ax (80MHz)	567/600.5 (MCS11)	77.03	81.23	320	Pass
	6985	207	ax (160MHz)	1020.8/1201 (MCS11)	156.36	165.18	320	Pass


Table 7-4. Conducted Bandwidth Measurements Antenna WF5B (High Data Rate)

FCC ID: BCGA2925 IC: 579C-A2925	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2311270069-13-R1 BCG	Test Dates: 01/08/2024 - 04/05/2024	EUT Type: Tablet Device	Page 22 of 525


V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.


Low Data Rate

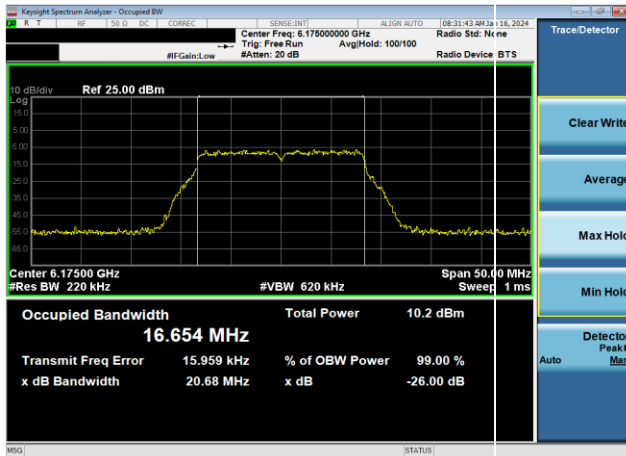


Plot 7-1. 26dB & 99% Bandwidth Plot Antenna WF5B (20MHz 802.11a (UNII Band 5) – Ch. 45, 12Mbps)

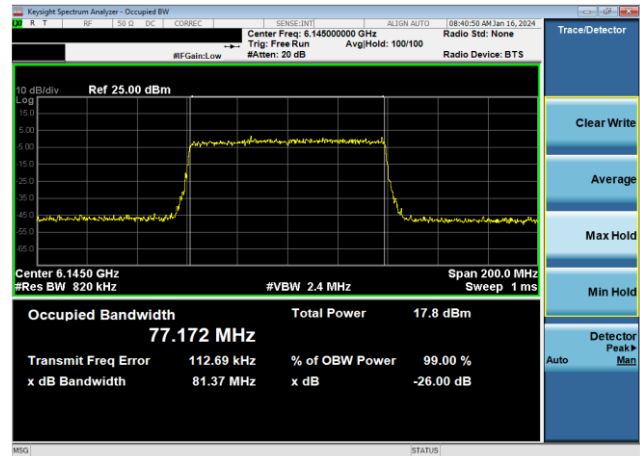


Plot 7-4. 26dB & 99% Bandwidth Plot Antenna WF5B (80MHz 802.11ax (UNII Band 5) – Ch. 39, MCS2)

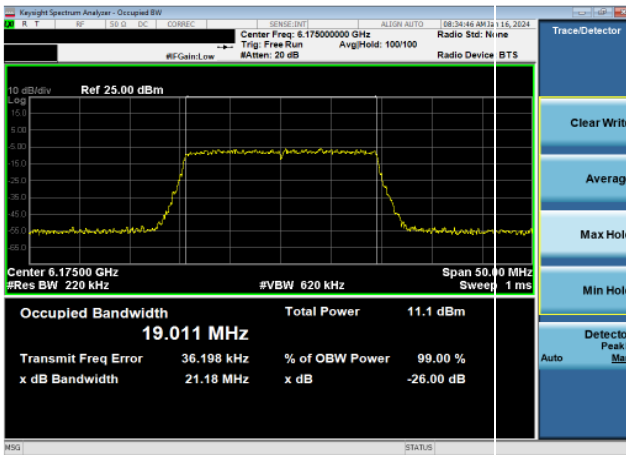


Plot 7-2. 26dB & 99% Bandwidth Plot Antenna WF5B (20MHz 802.11ax (UNII Band 5) – Ch. 45, MCS2)

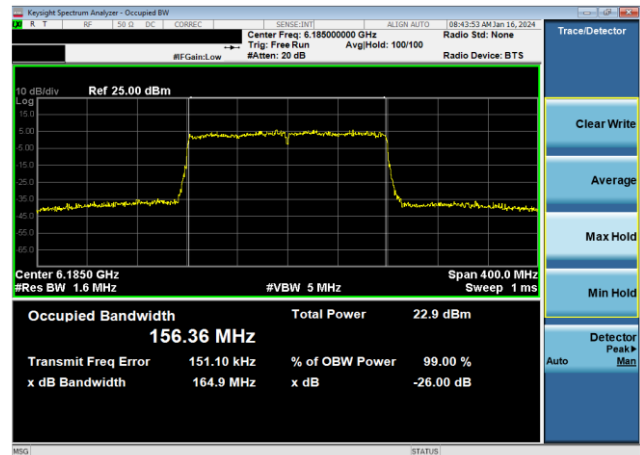

Plot 7-5. 26dB & 99% Bandwidth Plot Antenna WF5B (160MHz 802.11ax (UNII Band 5) – Ch. 47, MCS2)

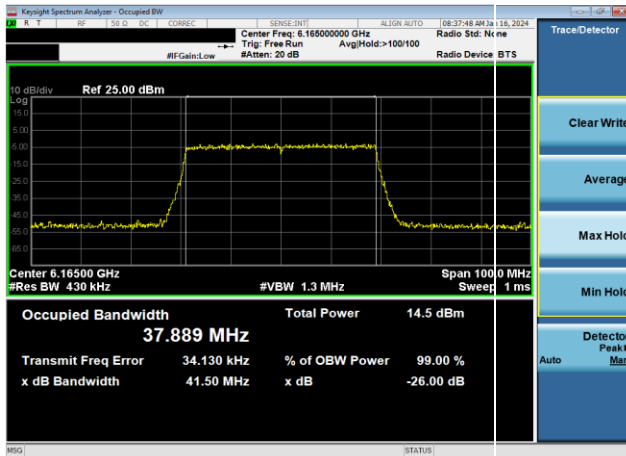

Plot 7-3. 26dB & 99% Bandwidth Plot Antenna WF5B (40MHz 802.11ax (UNII Band 5) – Ch. 43, MCS2)

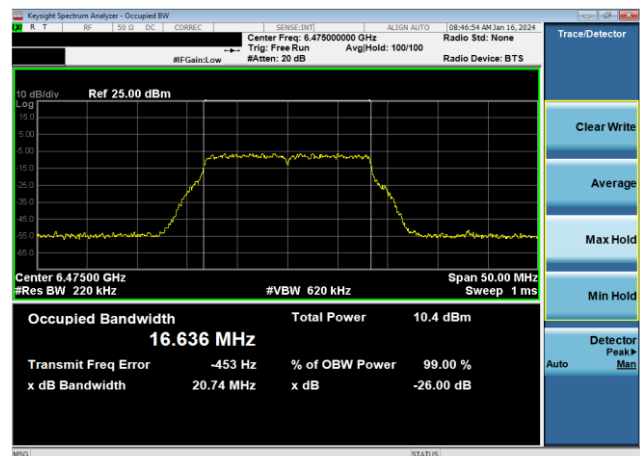


Plot 7-6. 26dB & 99% Bandwidth Plot Antenna WF5B (20MHz 802.11a (UNII Band 6) – Ch. 105, 12Mbps)


FCC ID: BCGA2925 IC: 579C-A2925		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270069-13-R1 BCG	Test Dates: 01/08/2024 - 04/05/2024	EUT Type: Tablet Device	Page 23 of 525

V 10.5 12/15/2021


Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

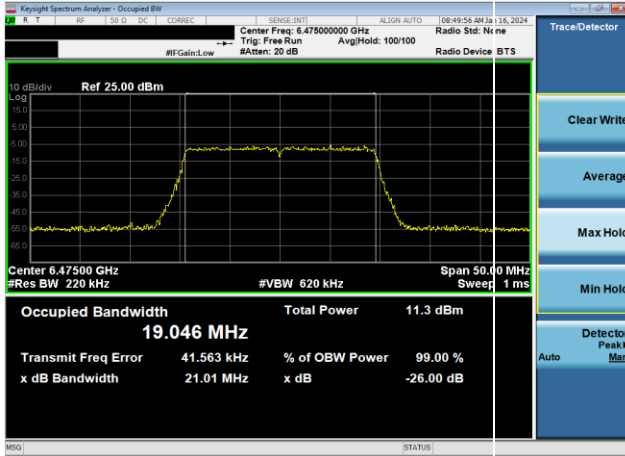


Plot 7-7. 26dB & 99% Bandwidth Plot Antenna WF5B (20MHz 802.11ax (UNII Band 6) – Ch. 105, MCS2)

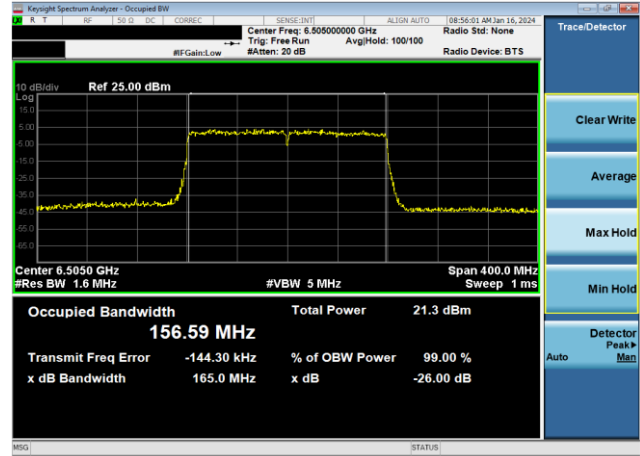


Plot 7-10. 26dB & 99% Bandwidth Plot Antenna WF5B (160MHz 802.11ax (UNII Band 6) – Ch. 111, MCS2)

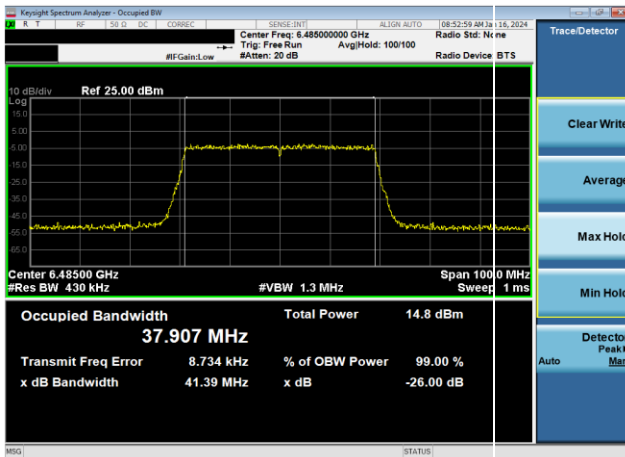


Plot 7-8. 26dB & 99% Bandwidth Plot Antenna WF5B (40MHz 802.11ax (UNII Band 6) – Ch. 107, MCS2)

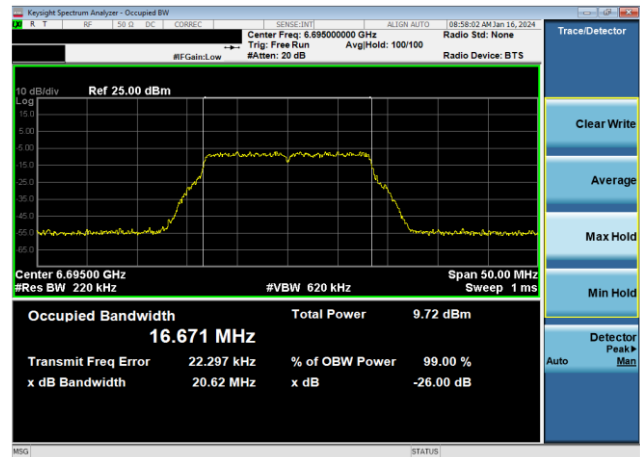

Plot 7-11. 26dB & 99% Bandwidth Plot Antenna WF5B (20MHz 802.11a (UNII Band 7) – Ch. 149, 12Mbps)

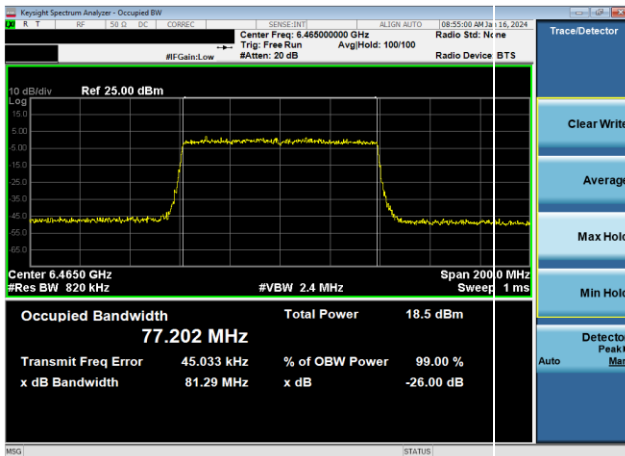

Plot 7-9. 26dB & 99% Bandwidth Plot Antenna WF5B (80MHz 802.11ax (UNII Band 6) – Ch. 103, MCS2)

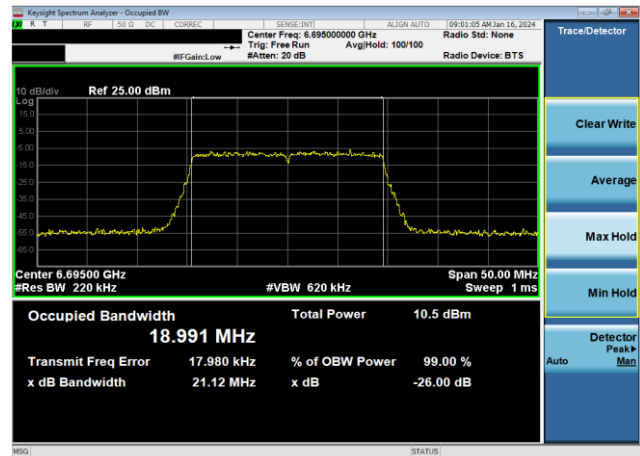


Plot 7-12. 26dB & 99% Bandwidth Plot Antenna WF5B (20MHz 802.11ax (UNII Band 7) – Ch. 149, MCS2)


FCC ID: BCGA2925 IC: 579C-A2925	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2311270069-13-R1 BCG	Test Dates: 01/08/2024 - 04/05/2024	EUT Type: Tablet Device	Page 24 of 525

V 10.5 12/15/2021


Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

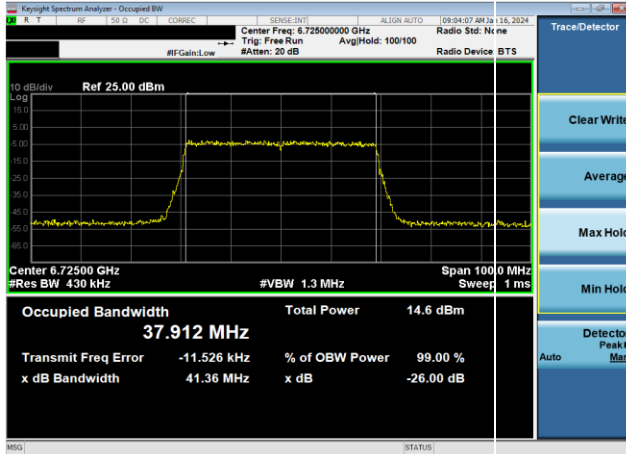


Plot 7-13. 26dB & 99% Bandwidth Plot Antenna WF5B (40MHz 802.11ax (UNII Band 7) – Ch. 155, MCS2)

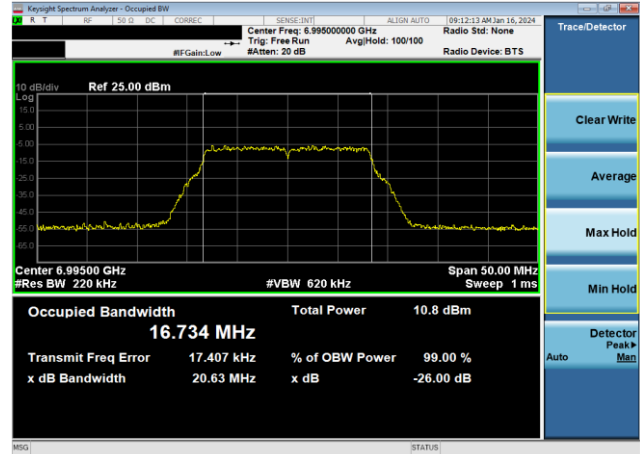


Plot 7-16. 26dB & 99% Bandwidth Plot Antenna WF5B (20MHz 802.11a (UNII Band 8) – Ch. 209, 12Mbps)

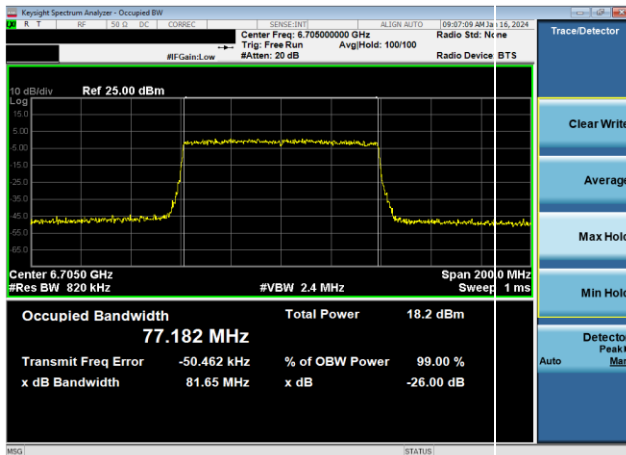


Plot 7-14. 26dB & 99% Bandwidth Plot Antenna WF5B (80MHz 802.11ax (UNII Band 7) – Ch. 151, MCS2)

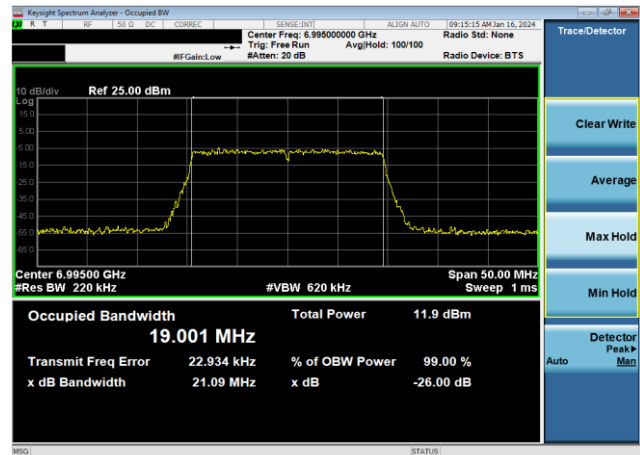

Plot 7-17. 26dB & 99% Bandwidth Plot Antenna WF5B (20MHz 802.11ax (UNII Band 8) – Ch. 209, MCS2)

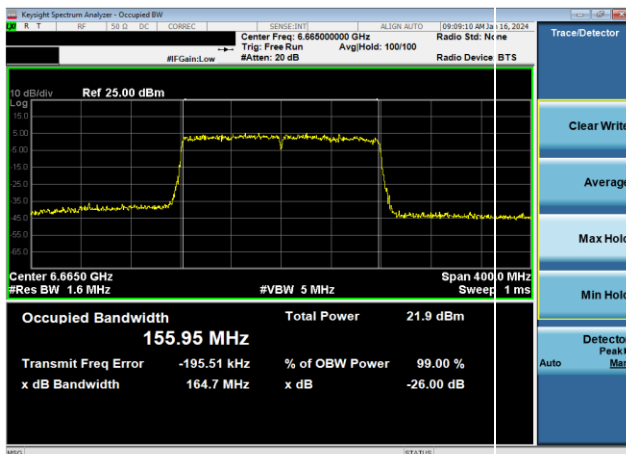


Plot 7-15. 26dB & 99% Bandwidth Plot Antenna WF5B (160MHz 802.11ax (UNII Band 7) – Ch. 143, MCS2)

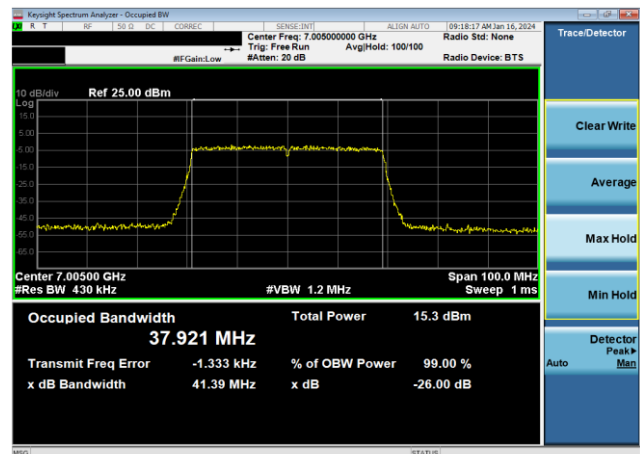


Plot 7-18. 26dB & 99% Bandwidth Plot Antenna WF5B (40MHz 802.11ax (UNII Band 8) – Ch. 211, MCS2)

FCC ID: BCGA2925 IC: 579C-A2925		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270069-13-R1 BCG	Test Dates: 01/08/2024 - 04/05/2024	EUT Type: Tablet Device	Page 25 of 525

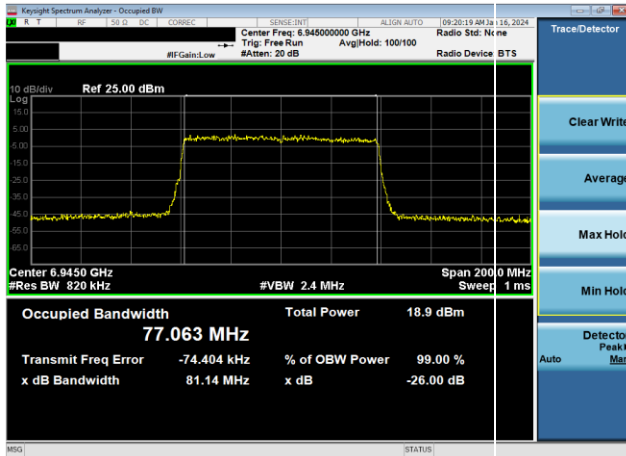

Plot 7-19. 26dB & 99% Bandwidth Plot Antenna WF5B (80MHz 802.11ax (UNII Band 8) – Ch. 199, MCS2)

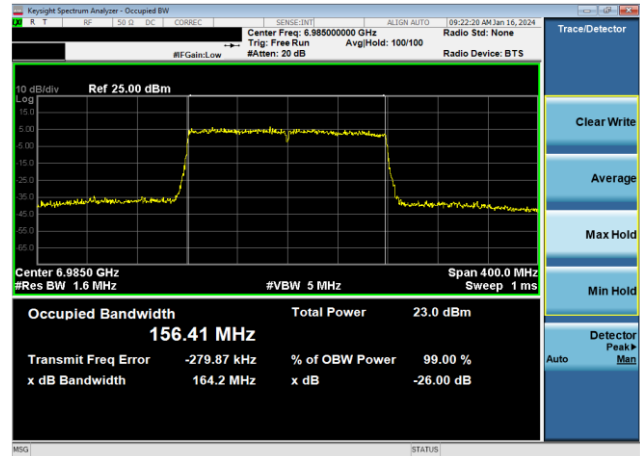


Plot 7-20. 26dB & 99% Bandwidth Plot Antenna WF5B (160MHz 802.11ax (UNII Band 8) – Ch. 207, MCS2)

FCC ID: BCGA2925 IC: 579C-A2925	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2311270069-13-R1 BCG	Test Dates: 01/08/2024 - 04/05/2024	EUT Type: Tablet Device	Page 26 of 525


V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.


Mid Data Rate

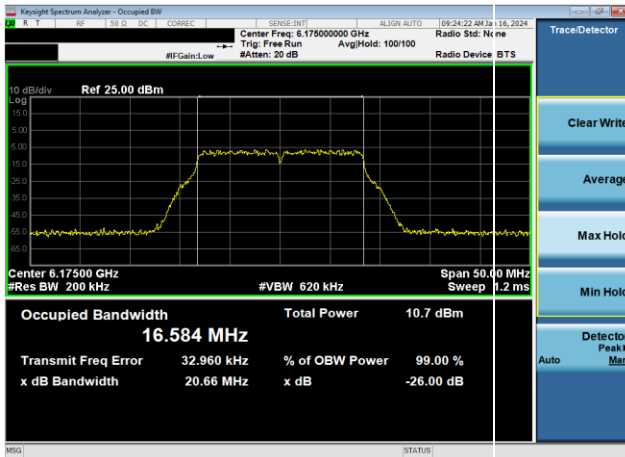


Plot 7-21. 26dB & 99% Bandwidth Plot Antenna WF5B (20MHz 802.11a (UNII Band 5) – Ch. 45, 24Mbps)

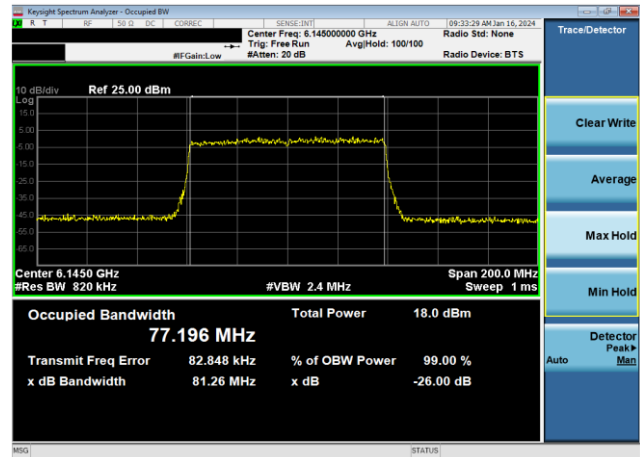


Plot 7-24. 26dB & 99% Bandwidth Plot Antenna WF5B (80MHz 802.11ax (UNII Band 5) – Ch. 39, MCS4)

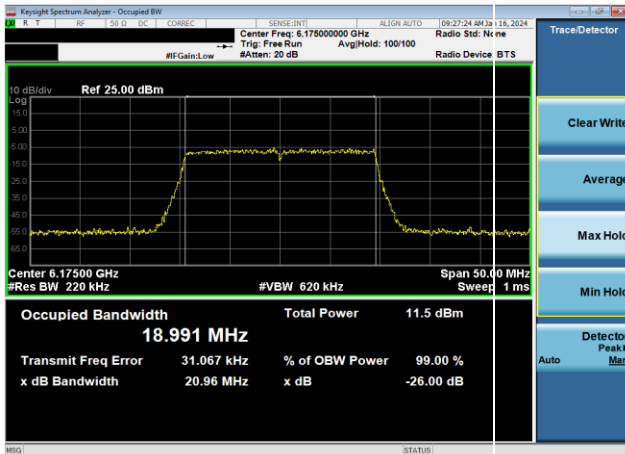


Plot 7-22. 26dB & 99% Bandwidth Plot Antenna WF5B (20MHz 802.11ax (UNII Band 5) – Ch. 45, MCS4)

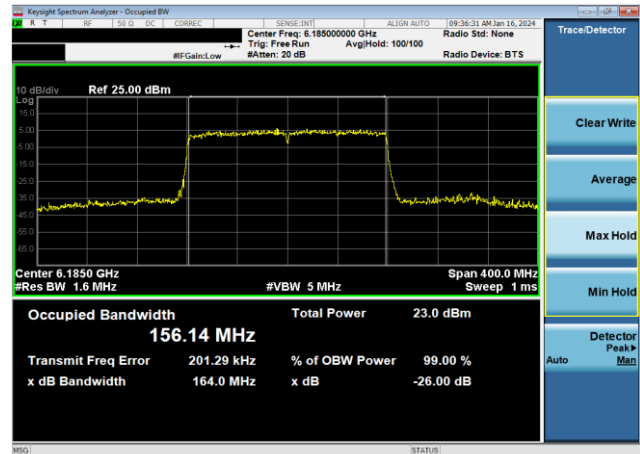

Plot 7-25. 26dB & 99% Bandwidth Plot Antenna WF5B (160MHz 802.11ax (UNII Band 5) – Ch. 47, MCS4)

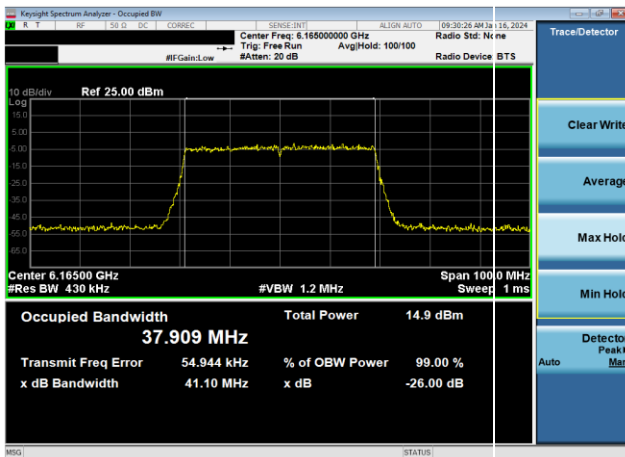

Plot 7-23. 26dB & 99% Bandwidth Plot Antenna WF5B (40MHz 802.11ax (UNII Band 5) – Ch. 43, MCS4)

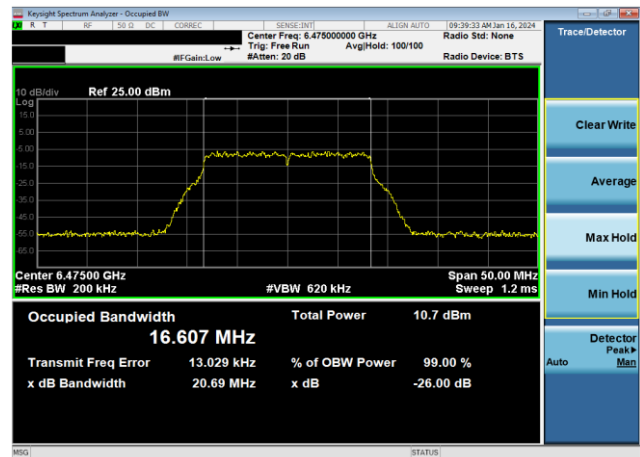


Plot 7-26. 26dB & 99% Bandwidth Plot Antenna WF5B (20MHz 802.11a (UNII Band 6) – Ch. 105, 24Mbps)


FCC ID: BCGA2925 IC: 579C-A2925		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270069-13-R1 BCG	Test Dates: 01/08/2024 - 04/05/2024	EUT Type: Tablet Device	Page 27 of 525

V 10.5 12/15/2021


Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

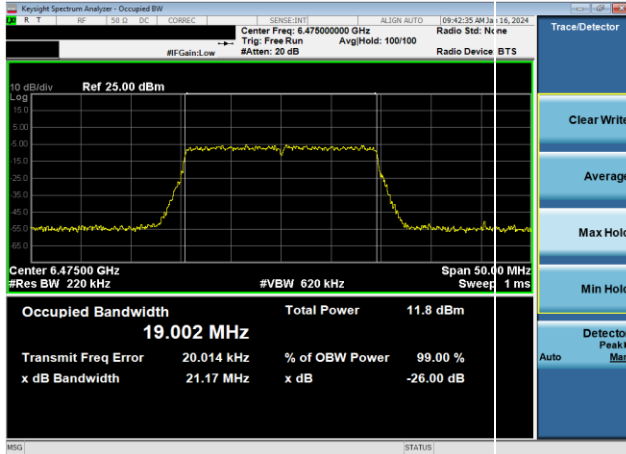


Plot 7-27. 26dB & 99% Bandwidth Plot Antenna WF5B (20MHz 802.11ax (UNII Band 6) – Ch. 105, MCS4)

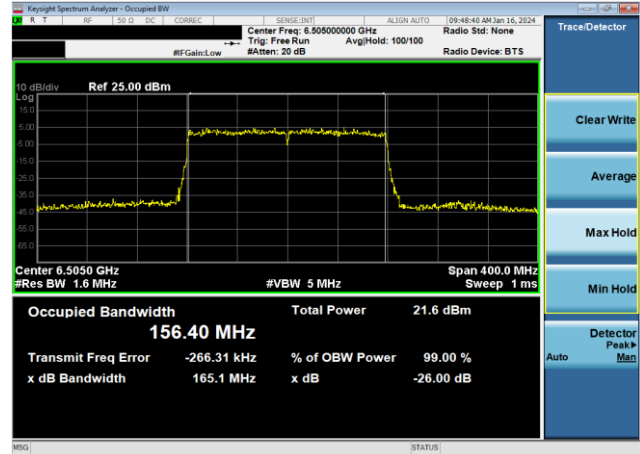


Plot 7-30. 26dB & 99% Bandwidth Plot Antenna WF5B (160MHz 802.11ax (UNII Band 6) – Ch. 111, MCS4)

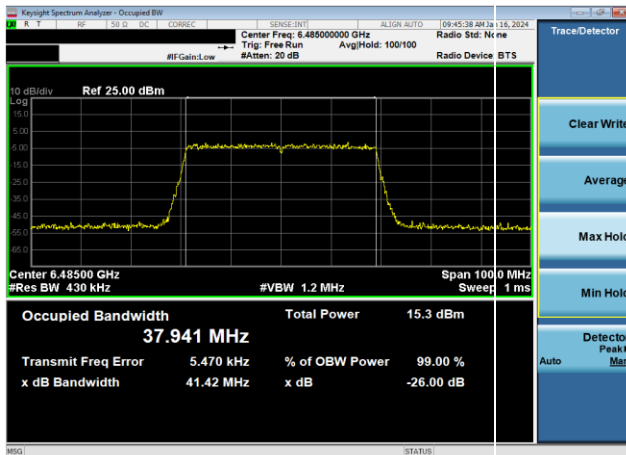


Plot 7-28. 26dB & 99% Bandwidth Plot Antenna WF5B (40MHz 802.11ax (UNII Band 6) – Ch. 107, MCS4)

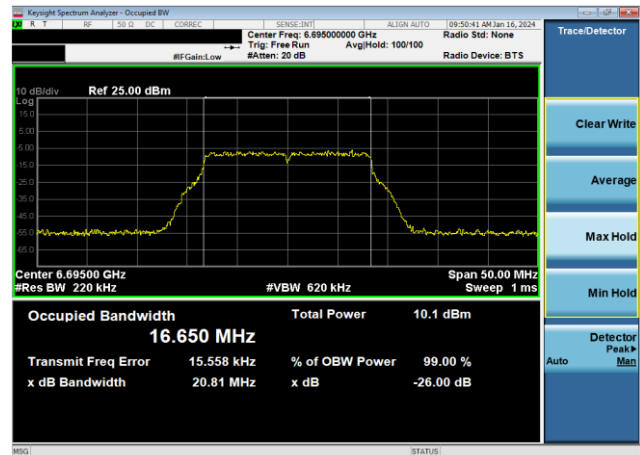

Plot 7-31. 26dB & 99% Bandwidth Plot Antenna WF5B (20MHz 802.11a (UNII Band 7) – Ch. 149, 24Mbps)

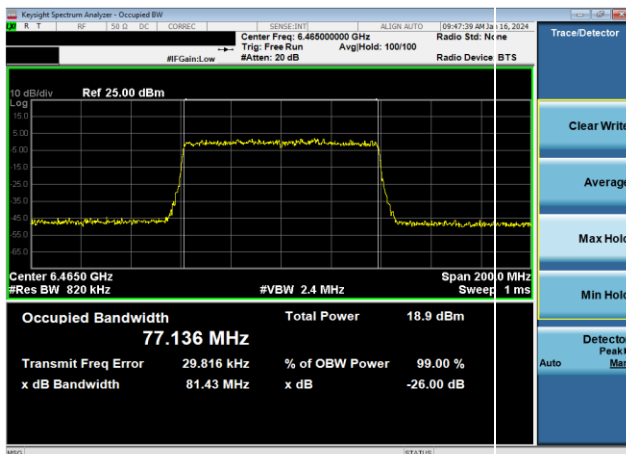


Plot 7-29. 26dB & 99% Bandwidth Plot Antenna WF5B (80MHz 802.11ax (UNII Band 6) – Ch. 103, MCS4)

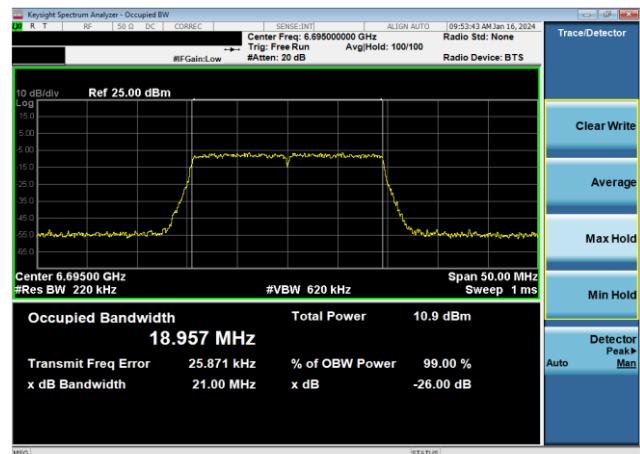


Plot 7-32. 26dB & 99% Bandwidth Plot Antenna WF5B (20MHz 802.11ax (UNII Band 7) – Ch. 149, MCS4)


FCC ID: BCGA2925 IC: 579C-A2925		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270069-13-R1 BCG	Test Dates: 01/08/2024 - 04/05/2024	EUT Type: Tablet Device	Page 28 of 525

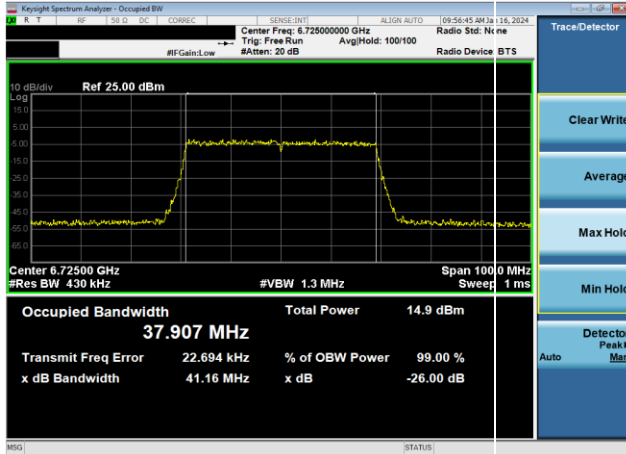


Plot 7-33. 26dB & 99% Bandwidth Plot Antenna WF5B (40MHz 802.11ax (UNII Band 7) – Ch. 155, MCS4)

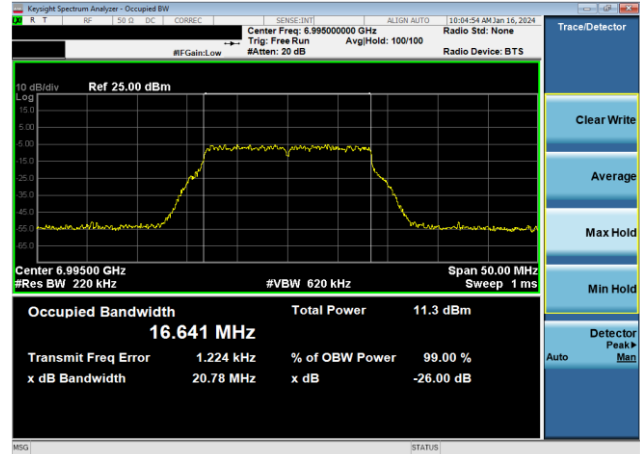


Plot 7-36. 26dB & 99% Bandwidth Plot Antenna WF5B (20MHz 802.11a (UNII Band 8) – Ch. 209, 24Mbps)

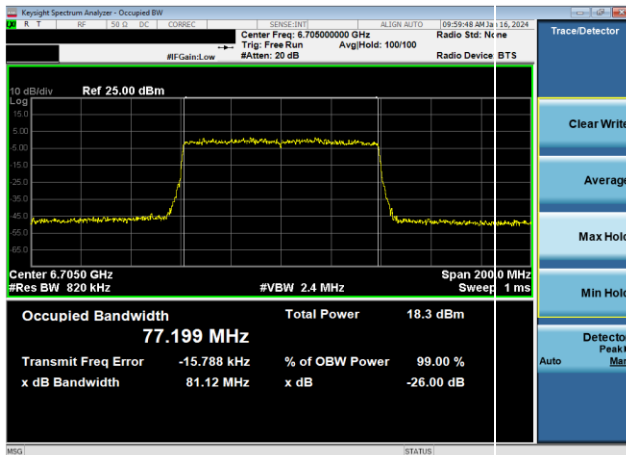


Plot 7-34. 26dB & 99% Bandwidth Plot Antenna WF5B (80MHz 802.11ax (UNII Band 7) – Ch. 151, MCS4)

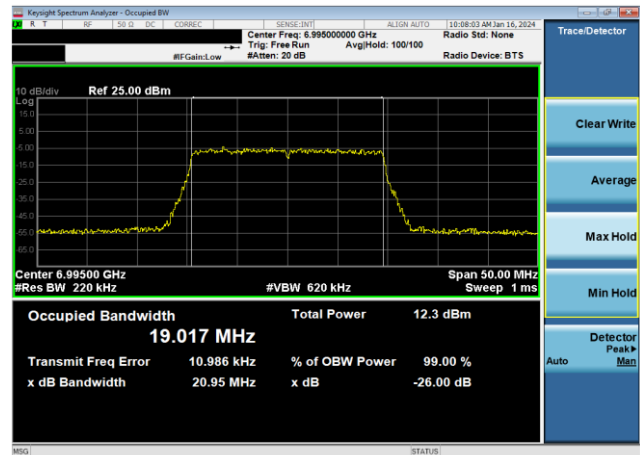

Plot 7-37. 26dB & 99% Bandwidth Plot Antenna WF5B (20MHz 802.11ax (UNII Band 8) – Ch. 209, MCS4)

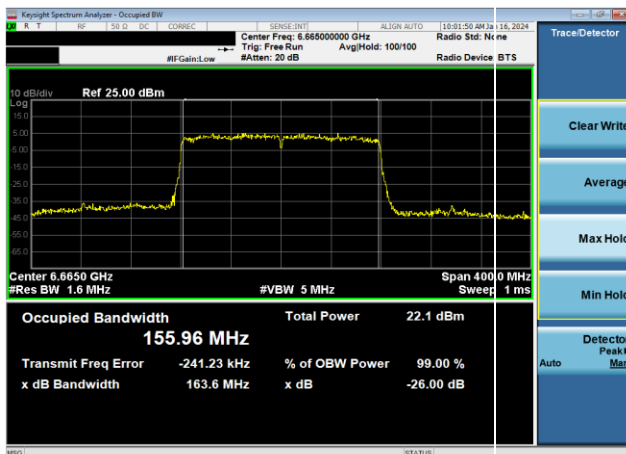


Plot 7-35. 26dB & 99% Bandwidth Plot Antenna WF5B (160MHz 802.11ax (UNII Band 7) – Ch. 143, MCS4)

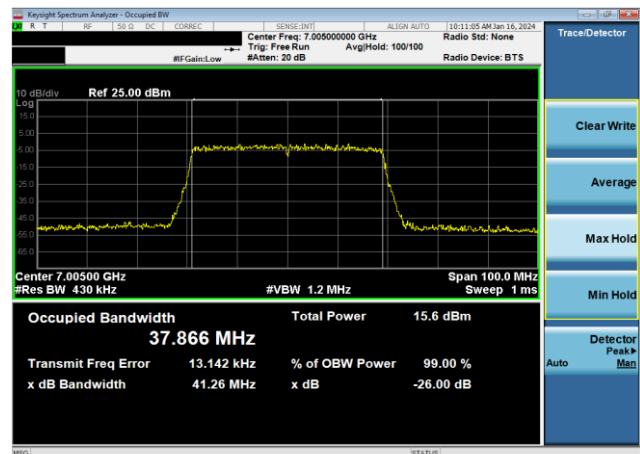


Plot 7-38. 26dB & 99% Bandwidth Plot Antenna WF5B (40MHz 802.11ax (UNII Band 8) – Ch. 211, MCS4)

FCC ID: BCGA2925 IC: 579C-A2925		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270069-13-R1 BCG	Test Dates: 01/08/2024 - 04/05/2024	EUT Type: Tablet Device	Page 29 of 525

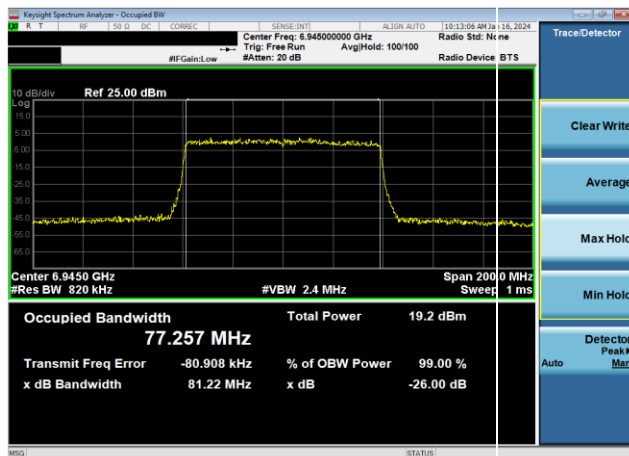

Plot 7-39. 26dB & 99% Bandwidth Plot Antenna WF5B (80MHz 802.11ax (UNII Band 8) – Ch. 199, MCS4)

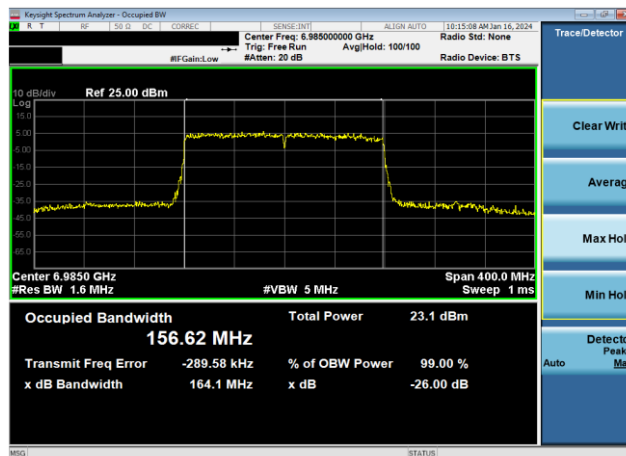


Plot 7-40. 26dB & 99% Bandwidth Plot Antenna WF5B (160MHz 802.11ax (UNII Band 8) – Ch. 207, MCS4)

FCC ID: BCGA2925 IC: 579C-A2925	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2311270069-13-R1 BCG	Test Dates: 01/08/2024 - 04/05/2024	EUT Type: Tablet Device	Page 30 of 525


V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.


High Data Rate

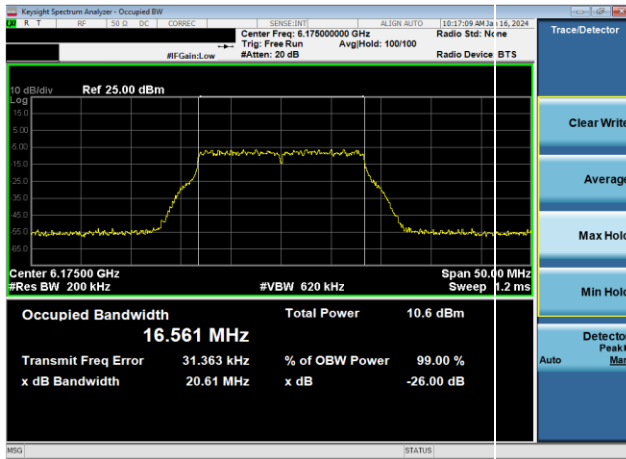


Plot 7-41. 26dB & 99% Bandwidth Plot Antenna WF5B (20MHz) 802.11a (UNII Band 5) – Ch. 45, 54Mbps)

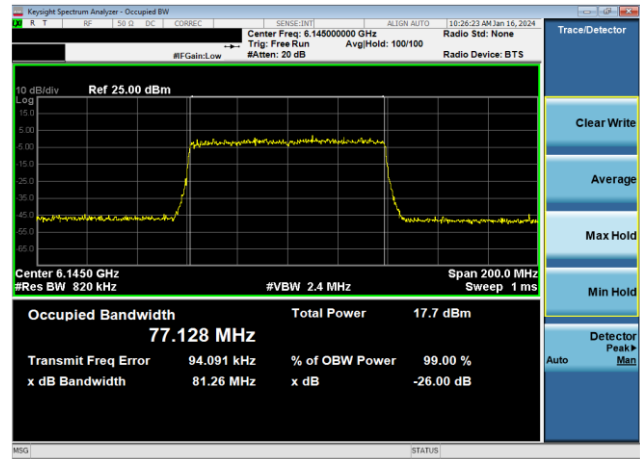


Plot 7-44. 26dB & 99% Bandwidth Plot Antenna WF5B (80MHz) 802.11ax (UNII Band 5) – Ch. 39, MCS11)

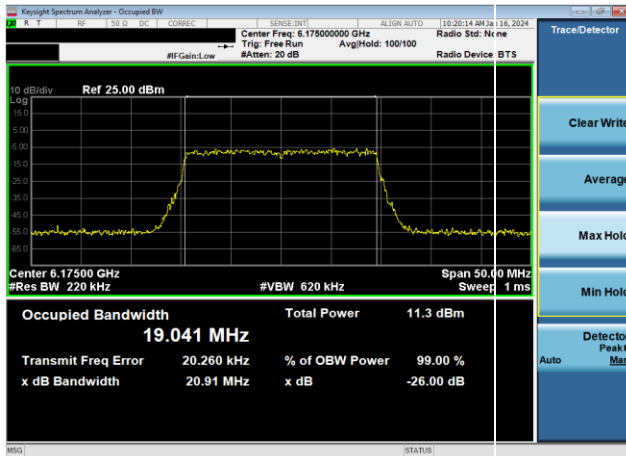


Plot 7-42. 26dB & 99% Bandwidth Plot Antenna WF5B (20MHz) 802.11ax (UNII Band 5) – Ch. 45, MCS11)

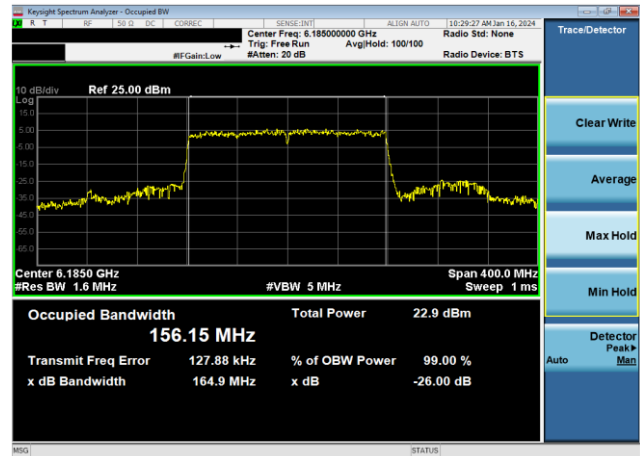

Plot 7-45. 26dB & 99% Bandwidth Plot Antenna WF5B (160MHz) 802.11ax (UNII Band 5) – Ch. 47, MCS11)

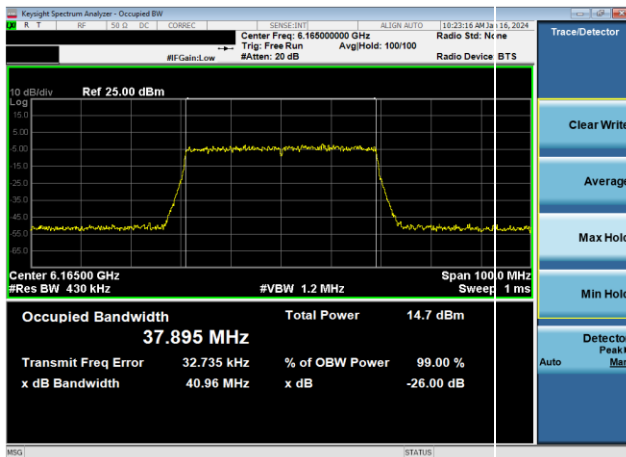

Plot 7-43. 26dB & 99% Bandwidth Plot Antenna WF5B (40MHz) 802.11ax (UNII Band 5) – Ch. 43, MCS11)

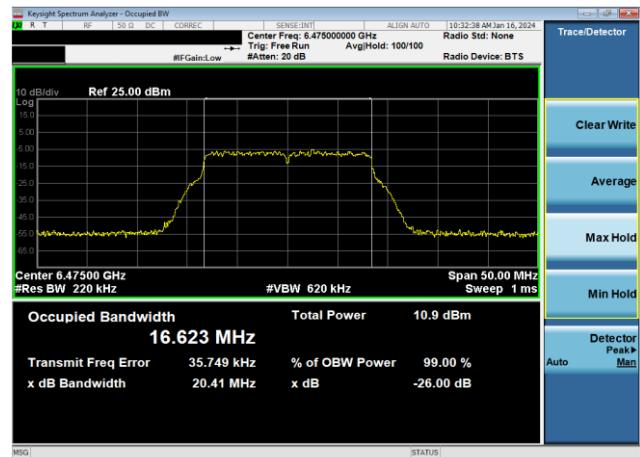


Plot 7-46. 26dB & 99% Bandwidth Plot Antenna WF5B (20MHz) 802.11a (UNII Band 6) – Ch. 105, 54Mbps)


FCC ID: BCGA2925 IC: 579C-A2925		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270069-13-R1 BCG	Test Dates: 01/08/2024 - 04/05/2024	EUT Type: Tablet Device	Page 31 of 525

V 10.5 12/15/2021


Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

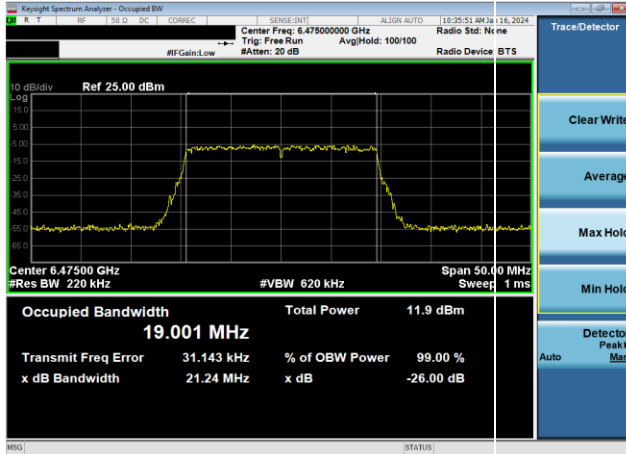


Plot 7-47. 26dB & 99% Bandwidth Plot Antenna WF5B (20MHz 802.11ax (UNII Band 6) – Ch. 105, MCS11)

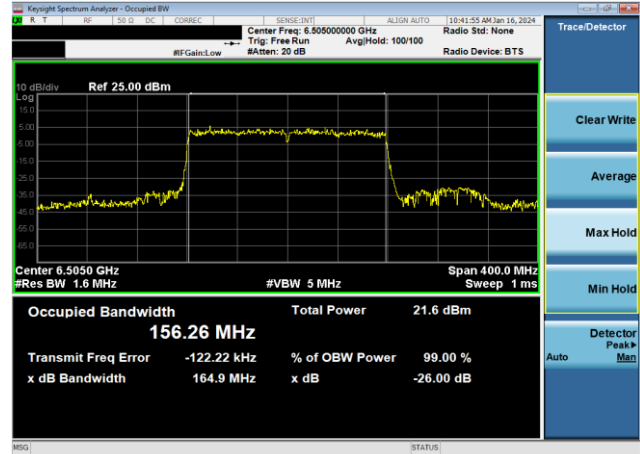


Plot 7-50. 26dB & 99% Bandwidth Plot Antenna WF5B (160MHz 802.11ax (UNII Band 6) – Ch. 111, MCS11)

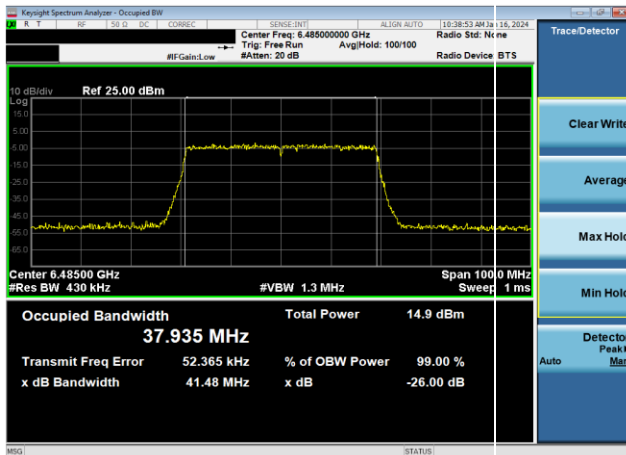


Plot 7-48. 26dB & 99% Bandwidth Plot Antenna WF5B (40MHz 802.11ax (UNII Band 6) – Ch. 107, MCS11)

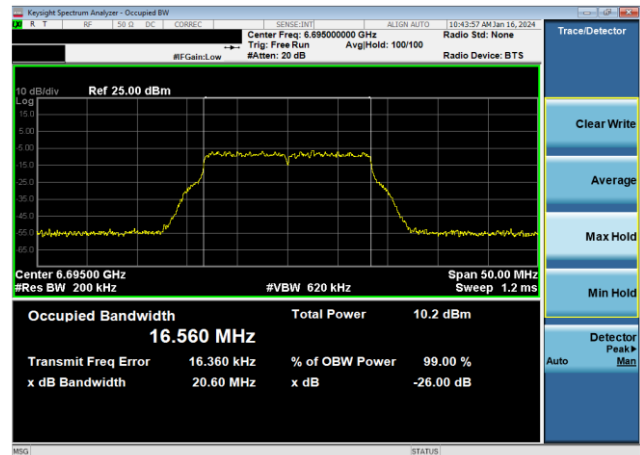

Plot 7-51. 26dB & 99% Bandwidth Plot Antenna WF5B (20MHz 802.11a (UNII Band 7) – Ch. 149, 54Mbps)

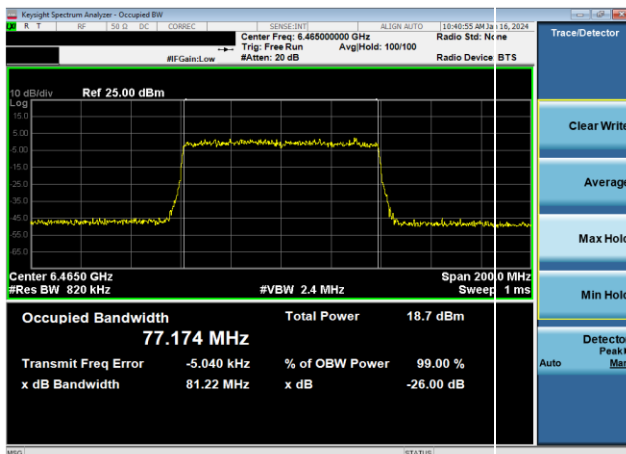


Plot 7-49. 26dB & 99% Bandwidth Plot Antenna WF5B (80MHz 802.11ax (UNII Band 6) – Ch. 103, MCS11)

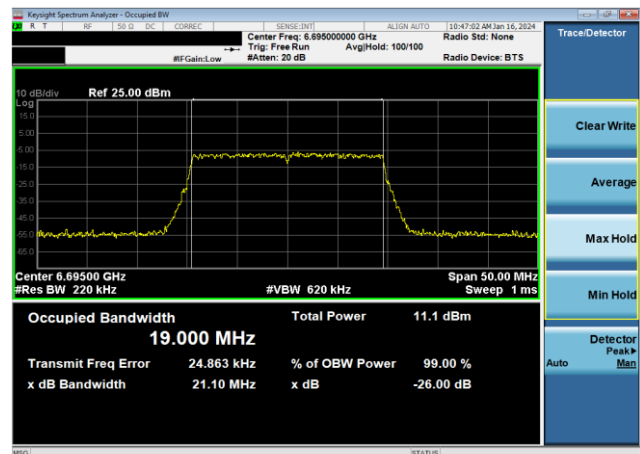


Plot 7-52. 26dB & 99% Bandwidth Plot Antenna WF5B (20MHz 802.11ax (UNII Band 7) – Ch. 149, MCS11)


FCC ID: BCGA2925 IC: 579C-A2925		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270069-13-R1 BCG	Test Dates: 01/08/2024 - 04/05/2024	EUT Type: Tablet Device	Page 32 of 525

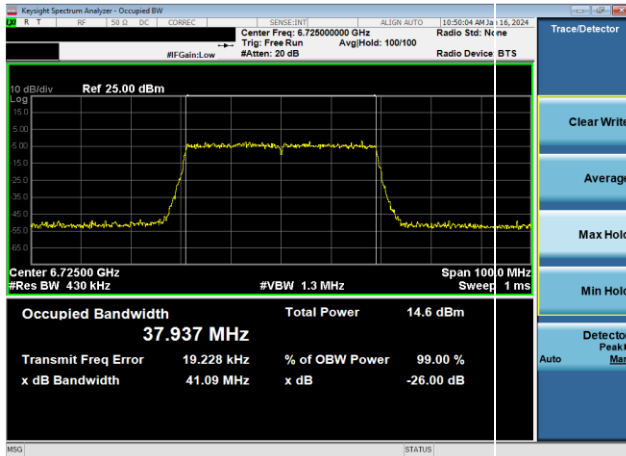


Plot 7-53. 26dB & 99% Bandwidth Plot Antenna WF5B (40MHz 802.11ax (UNII Band 7) – Ch. 155, MCS11)

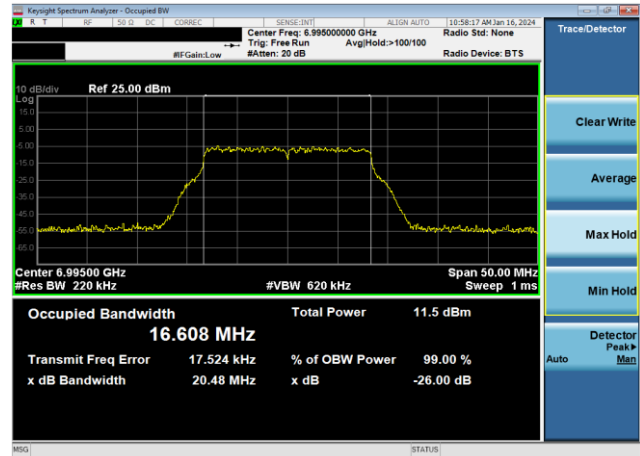


Plot 7-56. 26dB & 99% Bandwidth Plot Antenna WF5B (20MHz 802.11a (UNII Band 8) – Ch. 209, 54Mbps)

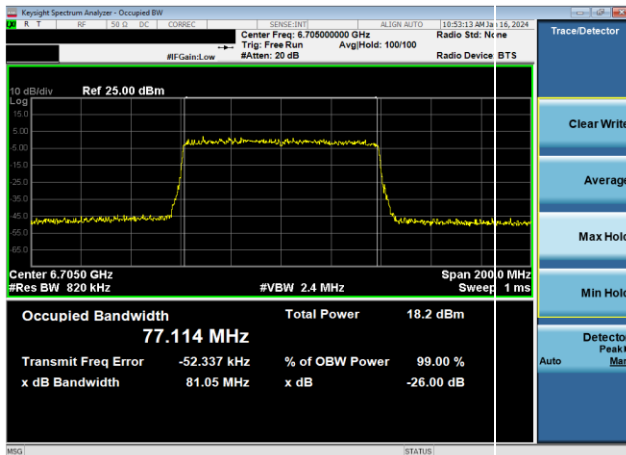


Plot 7-54. 26dB & 99% Bandwidth Plot Antenna WF5B (80MHz 802.11ax (UNII Band 7) – Ch. 151, MCS11)

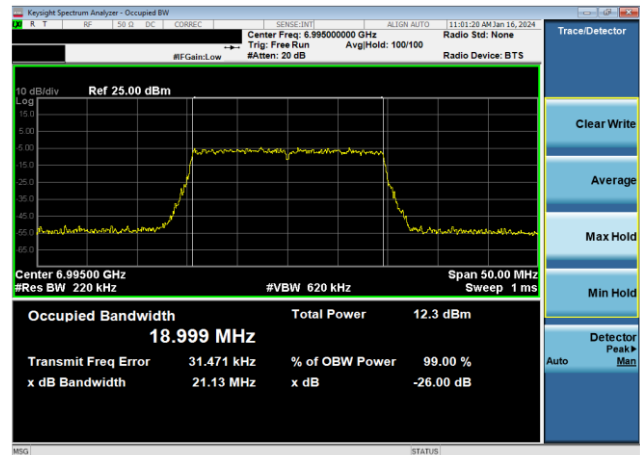

Plot 7-57. 26dB & 99% Bandwidth Plot Antenna WF5B (20MHz 802.11ax (UNII Band 8) – Ch. 209, MCS11)

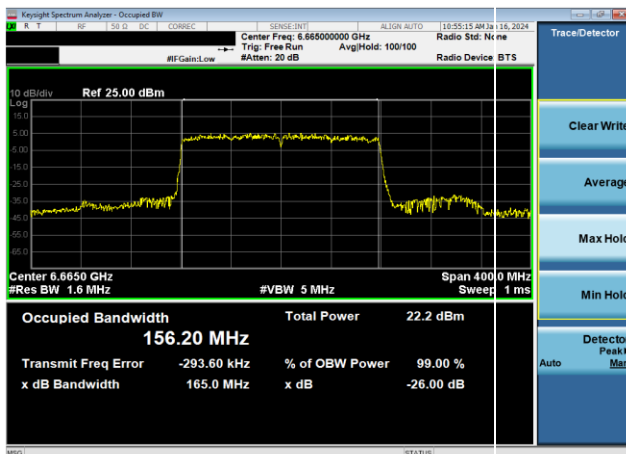

Plot 7-55. 26dB & 99% Bandwidth Plot Antenna WF5B (160MHz 802.11ax (UNII Band 7) – Ch. 143, MCS11)

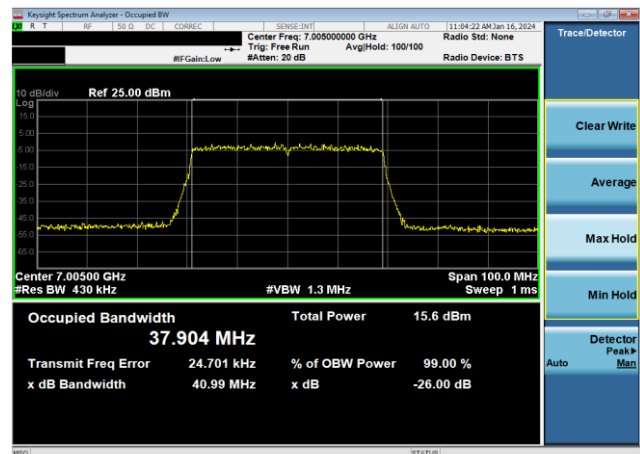


Plot 7-58. 26dB & 99% Bandwidth Plot Antenna WF5B (40MHz 802.11ax (UNII Band 8) – Ch. 211, MCS11)


FCC ID: BCGA2925 IC: 579C-A2925		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270069-13-R1 BCG	Test Dates: 01/08/2024 - 04/05/2024	EUT Type: Tablet Device	Page 33 of 525

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

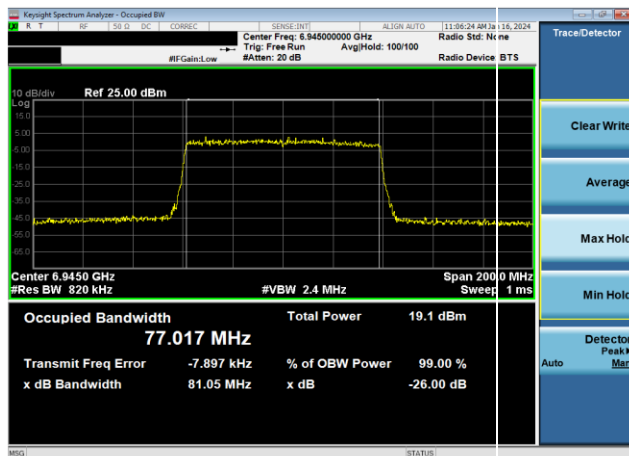

Plot 7-59. 26dB & 99% Bandwidth Plot Antenna WF5B (80MHz 802.11ax (UNII Band 8) – Ch. 199, MCS11)

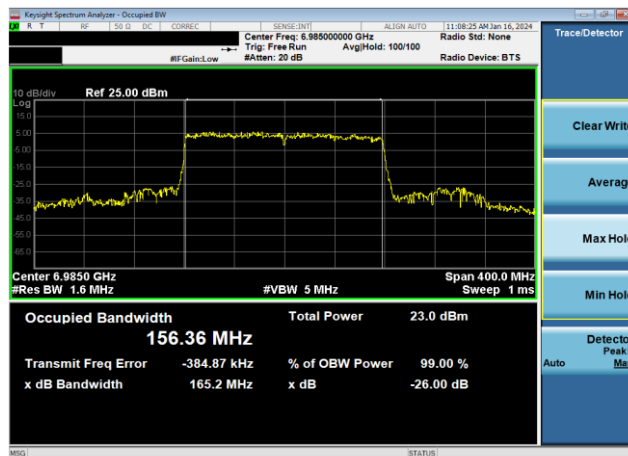

Plot 7-60. 26dB & 99% Bandwidth Plot Antenna WF5B (160MHz 802.11ax (UNII Band 8) – Ch. 207, MCS11)

FCC ID: BCGA2925 IC: 579C-A2925	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2311270069-13-R1 BCG	Test Dates: 01/08/2024 - 04/05/2024	EUT Type: Tablet Device	Page 34 of 525

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

7.2.2 Antenna WF8 26dB & 99% Bandwidth Measurements

	Frequency [MHz]	Channel	802.11 MODE	Data Rate [Mbps]	Measured 99% Occupied Bandwidth [MHz]	Measured 26dB Bandwidth [MHz]	Maximum Bandwidth Limit [MHz]	Pass / Fail
Band 5	5955	1	a	12	16.72	20.85	320	Pass
	6175	45	a	12	16.70	20.86	320	Pass
	6415	93	a	12	16.73	20.87	320	Pass
	5955	1	ax (20MHz)	24/25.8 (MCS2)	19.03	21.23	320	Pass
	6175	45	ax (20MHz)	24/25.8 (MCS2)	19.03	21.19	320	Pass
	6415	93	ax (20MHz)	24/25.8 (MCS2)	19.04	21.18	320	Pass
	5695	3	ax (40MHz)	49/51.6 (MCS2)	37.99	41.55	320	Pass
	6165	43	ax (40MHz)	49/51.6 (MCS2)	37.96	41.46	320	Pass
	6405	91	ax (40MHz)	49/51.6 (MCS2)	37.91	41.49	320	Pass
	5985	7	ax (80MHz)	102/108.1 (MCS2)	77.19	81.56	320	Pass
	6145	39	ax (80MHz)	102/108.1 (MCS2)	77.23	82.10	320	Pass
	6385	87	ax (80MHz)	102/108.1 (MCS2)	77.20	81.94	320	Pass
	6025	15	ax (160MHz)	183.8/216.2 (MCS2)	156.21	164.56	320	Pass
	6185	47	ax (160MHz)	183.8/216.2 (MCS2)	156.21	165.02	320	Pass
Band 6	6345	79	ax (160MHz)	183.8/216.2 (MCS2)	156.46	164.79	320	Pass
	6435	97	a	12	16.72	20.90	320	Pass
	6475	105	a	12	16.72	20.88	320	Pass
	6515	113	a	12	16.73	20.89	320	Pass
	6345	97	ax (20MHz)	24/25.8 (MCS2)	19.02	21.27	320	Pass
	6475	105	ax (20MHz)	24/25.8 (MCS2)	19.05	21.22	320	Pass
	6515	113	ax (20MHz)	24/25.8 (MCS2)	19.04	21.19	320	Pass
	6445	99	ax (40MHz)	49/51.6 (MCS2)	37.98	41.62	320	Pass
	6485	107	ax (40MHz)	49/51.6 (MCS2)	37.90	41.60	320	Pass
	6525	115	ax (40MHz)	49/51.6 (MCS2)	37.94	41.61	320	Pass
Band 7	6465	103	ax (80MHz)	102/108.1 (MCS2)	77.31	81.66	320	Pass
	6505	111	ax (160MHz)	183.8/216.2 (MCS2)	156.27	165.54	320	Pass
	6535	117	a	12	16.69	20.89	320	Pass
	6695	149	a	12	16.70	20.89	320	Pass
	6875	185	a	12	16.70	20.78	320	Pass
	6535	117	ax (20MHz)	24/25.8 (MCS2)	19.02	21.19	320	Pass
	6695	149	ax (20MHz)	24/25.8 (MCS2)	19.03	21.28	320	Pass
	6875	185	ax (20MHz)	24/25.8 (MCS2)	19.04	21.38	320	Pass
	6565	123	ax (40MHz)	49/51.6 (MCS2)	37.90	41.41	320	Pass
	6725	155	ax (40MHz)	49/51.6 (MCS2)	37.93	41.39	320	Pass
	6885	179	ax (40MHz)	49/51.6 (MCS2)	37.99	41.47	320	Pass
	6545	119	ax (80MHz)	102/108.1 (MCS2)	77.24	82.00	320	Pass
	6705	151	ax (80MHz)	102/108.1 (MCS2)	77.25	81.72	320	Pass
	6865	183	ax (80MHz)	102/108.1 (MCS2)	77.25	81.64	320	Pass
Band 8	6665	143	ax (160MHz)	183.8/216.2 (MCS2)	156.19	164.70	320	Pass
	6825	175	ax (160MHz)	183.8/216.2 (MCS2)	156.38	164.85	320	Pass
	6895	189	a	12	16.73	20.82	320	Pass
	6995	209	a	12	16.69	20.89	320	Pass
	7115	233	a	12	16.73	20.89	320	Pass
	6895	189	ax (20MHz)	24/25.8 (MCS2)	19.02	21.25	320	Pass
	6995	209	ax (20MHz)	24/25.8 (MCS2)	19.03	21.21	320	Pass
	7115	233	ax (20MHz)	24/25.8 (MCS2)	19.05	21.11	320	Pass
	6925	187	ax (40MHz)	49/51.6 (MCS2)	37.95	41.47	320	Pass
	7005	211	ax (40MHz)	49/51.6 (MCS2)	37.92	41.37	320	Pass
	7085	227	ax (40MHz)	49/51.6 (MCS2)	37.93	41.32	320	Pass
	6945	199	ax (80MHz)	102/108.1 (MCS2)	77.20	81.63	320	Pass
	7025	215	ax (80MHz)	102/108.1 (MCS2)	77.22	81.91	320	Pass
	6985	207	ax (160MHz)	183.8/216.2 (MCS2)	156.42	165.25	320	Pass

Table 7-5. Conducted Bandwidth Measurements Antenna WF8 (Low Data Rate)

FCC ID: BCGA2925 IC: 579C-A2925	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2311270069-13-R1.BCG	Test Dates: 01/08/2024 - 04/05/2024	EUT Type: Tablet Device	Page 35 of 525

V 10.5 12/15/2021

	Frequency [MHz]	Channel	802.11 MODE	Data Rate [MHz]	Measured 99% Occupied Bandwidth [MHz]	Measured 26dB Bandwidth [MHz]	Maximum Bandwidth Limit [MHz]	Pass / Fail
Band 5	5955	1	a	24	16.68	20.84	320	Pass
	6175	45	a	24	16.67	20.88	320	Pass
	6415	93	a	24	16.67	20.87	320	Pass
	5955	1	ax (20MHz)	49/51.6 (MCS4)	19.02	21.12	320	Pass
	6175	45	ax (20MHz)	49/51.6 (MCS4)	19.02	21.29	320	Pass
	6415	93	ax (20MHz)	49/51.6 (MCS4)	19.02	21.28	320	Pass
	5965	3	ax (40MHz)	98/103.2 (MCS4)	37.91	41.13	320	Pass
	6165	43	ax (40MHz)	98/103.2 (MCS4)	37.96	41.51	320	Pass
	6405	91	ax (40MHz)	98/103.2 (MCS4)	37.92	41.40	320	Pass
	5985	7	ax (80MHz)	204/216.2 (MCS4)	77.24	81.70	320	Pass
	6145	39	ax (80MHz)	204/216.2 (MCS4)	77.19	81.77	320	Pass
	6385	87	ax (80MHz)	204/216.2 (MCS4)	77.30	81.60	320	Pass
	6025	15	ax (160MHz)	367.5/432.4 (MCS4)	156.12	164.85	320	Pass
	6185	47	ax (160MHz)	367.5/432.4 (MCS4)	156.34	164.69	320	Pass
	6345	79	ax (160MHz)	367.5/432.4 (MCS4)	156.41	164.98	320	Pass
Band 6	6435	97	a	24	16.66	20.79	320	Pass
	6475	105	a	24	16.67	20.82	320	Pass
	6515	113	a	24	16.68	20.78	320	Pass
	6435	97	ax (20MHz)	49/51.6 (MCS4)	19.01	21.26	320	Pass
	6475	105	ax (20MHz)	49/51.6 (MCS4)	18.99	21.08	320	Pass
	6515	113	ax (20MHz)	49/51.6 (MCS4)	19.03	21.08	320	Pass
	6445	99	ax (40MHz)	98/103.2 (MCS4)	37.95	41.47	320	Pass
	6485	107	ax (40MHz)	98/103.2 (MCS4)	37.95	41.43	320	Pass
	6525	115	ax (40MHz)	98/103.2 (MCS4)	37.95	41.29	320	Pass
	6465	103	ax (80MHz)	204/216.2 (MCS4)	77.18	81.53	320	Pass
	6505	111	ax (160MHz)	367.5/432.4 (MCS4)	156.35	164.82	320	Pass
Band 7	6535	117	a	24	16.66	20.88	320	Pass
	6695	149	a	24	16.67	20.88	320	Pass
	6875	185	a	24	16.66	20.87	320	Pass
	6535	117	ax (20MHz)	49/51.6 (MCS4)	19.02	21.05	320	Pass
	6695	149	ax (20MHz)	49/51.6 (MCS4)	19.02	21.18	320	Pass
	6875	185	ax (20MHz)	49/51.6 (MCS4)	19.01	21.10	320	Pass
	6565	123	ax (40MHz)	98/103.2 (MCS4)	37.92	41.34	320	Pass
	6725	155	ax (40MHz)	98/103.2 (MCS4)	37.92	41.22	320	Pass
	6885	179	ax (40MHz)	98/103.2 (MCS4)	37.93	41.41	320	Pass
	6545	119	ax (80MHz)	204/216.2 (MCS4)	77.28	81.64	320	Pass
	6705	151	ax (80MHz)	204/216.2 (MCS4)	77.21	81.51	320	Pass
	6865	183	ax (80MHz)	204/216.2 (MCS4)	77.26	81.57	320	Pass
	6665	143	ax (160MHz)	367.5/432.4 (MCS4)	156.17	165.49	320	Pass
	6825	175	ax (160MHz)	367.5/432.4 (MCS4)	156.24	164.89	320	Pass
Band 8	6895	189	a	24	16.67	20.77	320	Pass
	6995	209	a	24	16.66	20.85	320	Pass
	7115	233	a	24	16.67	20.76	320	Pass
	6895	189	ax (20MHz)	49/51.6 (MCS4)	19.03	21.39	320	Pass
	6995	209	ax (20MHz)	49/51.6 (MCS4)	19.03	21.16	320	Pass
	7115	233	ax (20MHz)	49/51.6 (MCS4)	19.02	21.23	320	Pass
	6885	187	ax (40MHz)	98/103.2 (MCS4)	37.92	41.29	320	Pass
	7005	211	ax (40MHz)	98/103.2 (MCS4)	37.90	41.10	320	Pass
	7085	227	ax (40MHz)	98/103.2 (MCS4)	37.88	41.29	320	Pass
	6945	199	ax (80MHz)	204/216.2 (MCS4)	77.24	81.77	320	Pass
	7025	215	ax (80MHz)	204/216.2 (MCS4)	77.16	81.37	320	Pass
	6985	207	ax (160MHz)	367.5/432.4 (MCS4)	156.31	164.87	320	Pass

Table 7-6. Conducted Bandwidth Measurements Antenna WF8 (Mid Data Rate)

FCC ID: BCGA2925 IC: 579C-A2925	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2311270069-13-R1.BCG	Test Dates: 01/08/2024 - 04/05/2024	EUT Type: Tablet Device	Page 36 of 525

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

	Frequency [MHz]	Channel	802.11 MODE	Data Rate [MHz]	Measured 99% Occupied Bandwidth [MHz]	Measured 26dB Bandwidth [MHz]	Maximum Bandwidth Limit [MHz]	Pass / Fail
Band 5	5955	1	a	54	16.64	20.69	320	Pass
	6175	45	a	54	16.60	20.63	320	Pass
	6415	93	a	54	16.64	20.66	320	Pass
	5955	1	ax (20MHz)	135/143.4 (MCS11)	19.05	21.21	320	Pass
	6175	45	ax (20MHz)	135/143.4 (MCS11)	19.06	21.24	320	Pass
	6415	93	ax (20MHz)	135/143.4 (MCS11)	19.06	21.29	320	Pass
	5965	3	ax (40MHz)	271/286.8 (MCS11)	37.89	41.25	320	Pass
	6165	43	ax (40MHz)	271/286.8 (MCS11)	37.91	41.58	320	Pass
	6405	91	ax (40MHz)	271/286.8 (MCS11)	37.90	41.39	320	Pass
	5985	7	ax (80MHz)	567/600.5 (MCS11)	77.24	81.44	320	Pass
	6145	39	ax (80MHz)	567/600.5 (MCS11)	77.22	81.77	320	Pass
	6385	87	ax (80MHz)	567/600.5 (MCS11)	77.21	81.70	320	Pass
	6025	15	ax (160MHz)	1020.8/1201 (MCS11)	156.05	165.23	320	Pass
	6185	47	ax (160MHz)	1020.8/1201 (MCS11)	156.12	165.23	320	Pass
Band 6	6345	79	ax (160MHz)	1020.8/1201 (MCS11)	156.11	164.92	320	Pass
	6435	97	a	54	16.64	20.67	320	Pass
	6475	105	a	54	16.65	20.68	320	Pass
	6515	113	a	54	16.65	20.70	320	Pass
	6435	97	ax (20MHz)	135/143.4 (MCS11)	19.02	21.33	320	Pass
	6475	105	ax (20MHz)	135/143.4 (MCS11)	19.04	21.06	320	Pass
	6515	113	ax (20MHz)	135/143.4 (MCS11)	19.03	21.25	320	Pass
	6445	99	ax (40MHz)	271/286.8 (MCS11)	37.90	41.29	320	Pass
	6485	107	ax (40MHz)	271/286.8 (MCS11)	37.93	41.10	320	Pass
	6525	115	ax (40MHz)	271/286.8 (MCS11)	37.89	41.40	320	Pass
Band 7	6465	103	ax (80MHz)	567/600.5 (MCS11)	77.24	81.79	320	Pass
	6505	111	ax (160MHz)	1020.8/1201 (MCS11)	156.07	165.20	320	Pass
	6535	117	a	54	16.65	20.64	320	Pass
	6695	149	a	54	16.65	20.68	320	Pass
	6875	185	a	54	16.64	20.67	320	Pass
	6535	117	ax (20MHz)	135/143.4 (MCS11)	19.06	21.25	320	Pass
	6695	149	ax (20MHz)	135/143.4 (MCS11)	19.06	21.34	320	Pass
	6875	185	ax (20MHz)	135/143.4 (MCS11)	19.04	21.28	320	Pass
	6565	123	ax (40MHz)	271/286.8 (MCS11)	37.93	41.45	320	Pass
	6725	155	ax (40MHz)	271/286.8 (MCS11)	37.93	41.16	320	Pass
	6885	179	ax (40MHz)	271/286.8 (MCS11)	37.94	41.09	320	Pass
	6545	119	ax (80MHz)	567/600.5 (MCS11)	77.29	81.53	320	Pass
Band 8	6705	151	ax (80MHz)	567/600.5 (MCS11)	77.25	81.41	320	Pass
	6865	183	ax (80MHz)	567/600.5 (MCS11)	77.17	81.73	320	Pass
	6665	143	ax (160MHz)	1020.8/1201 (MCS11)	156.10	165.52	320	Pass
	6825	175	ax (160MHz)	1020.8/1201 (MCS11)	156.33	164.70	320	Pass
	6895	189	a	54	16.65	20.69	320	Pass
	6995	209	a	54	16.64	20.67	320	Pass
	7115	233	a	54	16.65	20.73	320	Pass
	6895	189	ax (20MHz)	135/143.4 (MCS11)	19.04	21.28	320	Pass
	6995	209	ax (20MHz)	135/143.4 (MCS11)	19.02	21.04	320	Pass
	7115	233	ax (20MHz)	135/143.4 (MCS11)	19.01	21.32	320	Pass
	6885	187	ax (40MHz)	271/286.8 (MCS11)	37.89	41.02	320	Pass
	7005	211	ax (40MHz)	271/286.8 (MCS11)	37.90	41.11	320	Pass
	7085	227	ax (40MHz)	271/286.8 (MCS11)	37.94	40.96	320	Pass
	6945	199	ax (80MHz)	567/600.5 (MCS11)	77.28	81.47	320	Pass
	7025	215	ax (80MHz)	567/600.5 (MCS11)	77.19	81.74	320	Pass
	6985	207	ax (160MHz)	1020.8/1201 (MCS11)	156.01	165.67	320	Pass


Table 7-7. Conducted Bandwidth Measurements Antenna WF8 (High Data Rate)

FCC ID: BCGA2925 IC: 579C-A2925	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2311270069-13-R1.BCG	Test Dates: 01/08/2024 - 04/05/2024	EUT Type: Tablet Device	Page 37 of 525


V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.


Low Data Rate

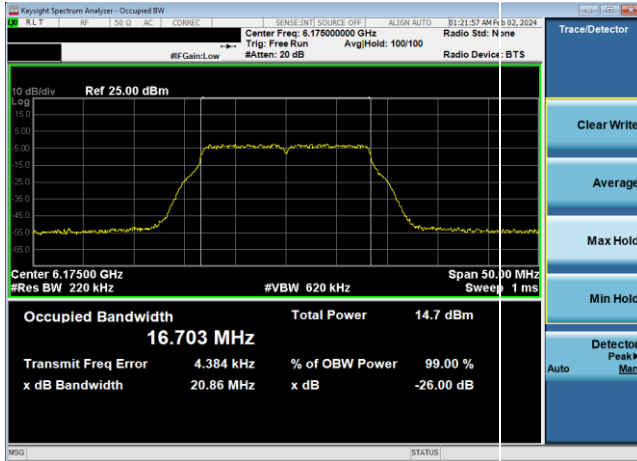


Plot 7-61. 26dB & 99% Bandwidth Plot Antenna WF8 (20MHz 802.11a (UNII Band 5) – Ch. 45, 12Mbps)

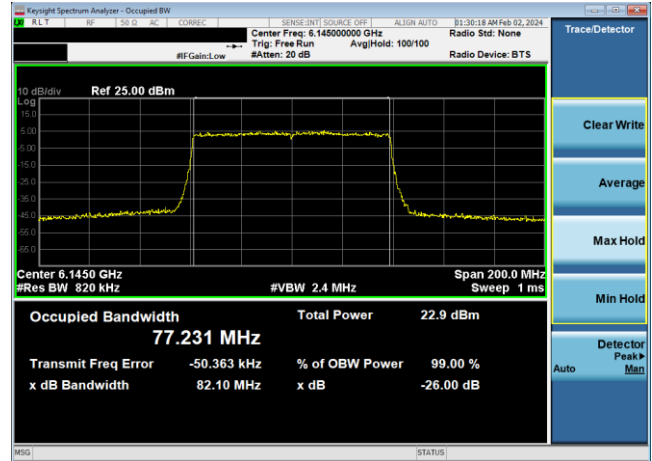


Plot 7-64. 26dB & 99% Bandwidth Plot Antenna WF8 (80MHz 802.11ax (UNII Band 5) – Ch. 39, MCS2)

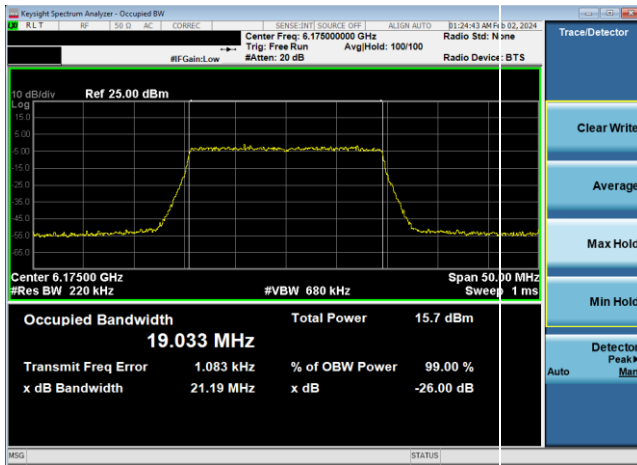


Plot 7-62. 26dB & 99% Bandwidth Plot Antenna WF8 (20MHz 802.11ax (UNII Band 5) – Ch. 45, MCS2)

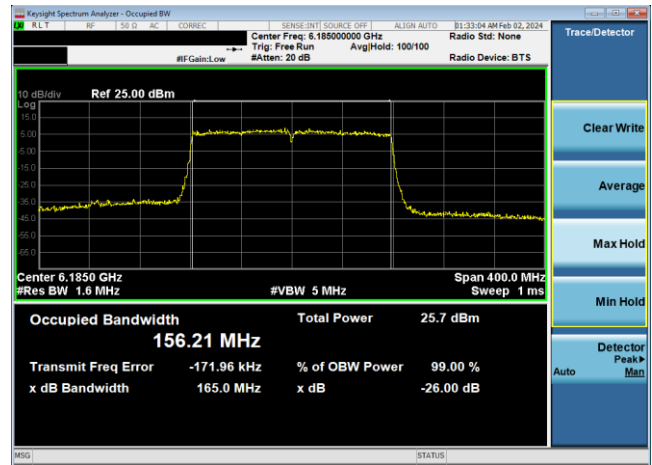

Plot 7-65. 26dB & 99% Bandwidth Plot Antenna WF8 (160MHz 802.11ax (UNII Band 5) – Ch. 47, MCS2)

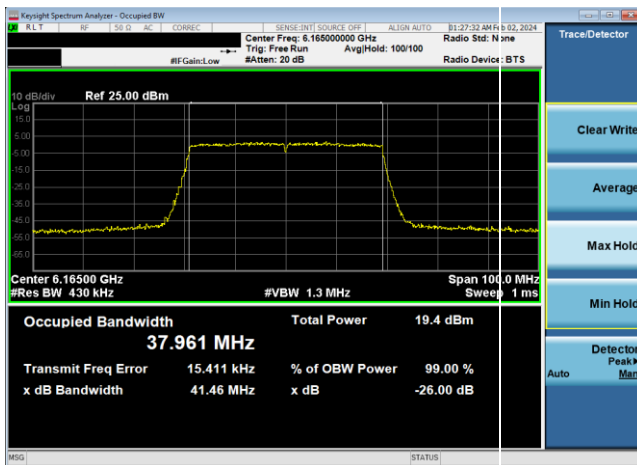

Plot 7-63. 26dB & 99% Bandwidth Plot Antenna WF8 (40MHz 802.11ax (UNII Band 5) – Ch. 43, MCS2)





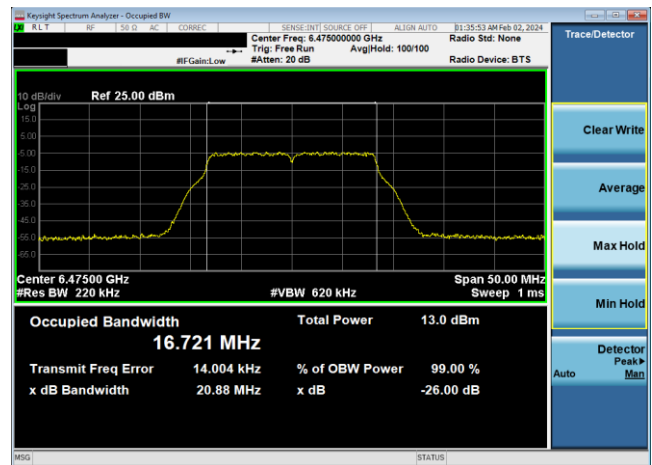


Plot 7-66. 26dB & 99% Bandwidth Plot Antenna WF8 (20MHz 802.11a (UNII Band 6) – Ch. 105, 12Mbps)

FCC ID: BCGA2925 IC: 579C-A2925		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270069-13-R1.BCG	Test Dates: 01/08/2024 - 04/05/2024	EUT Type: Tablet Device	Page 38 of 525

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

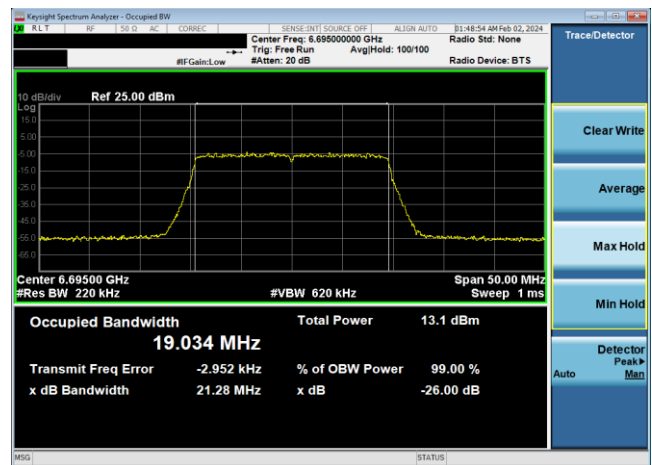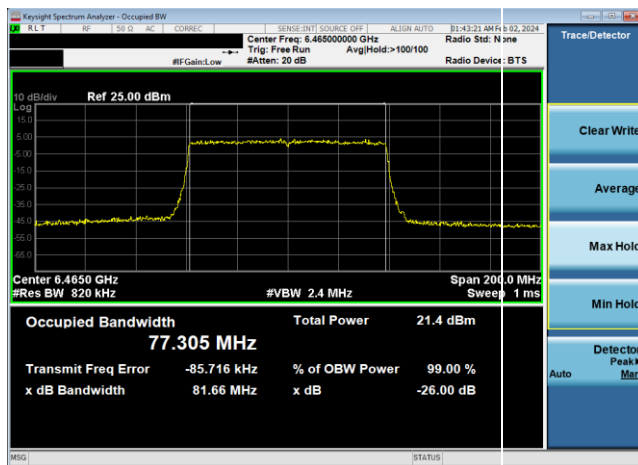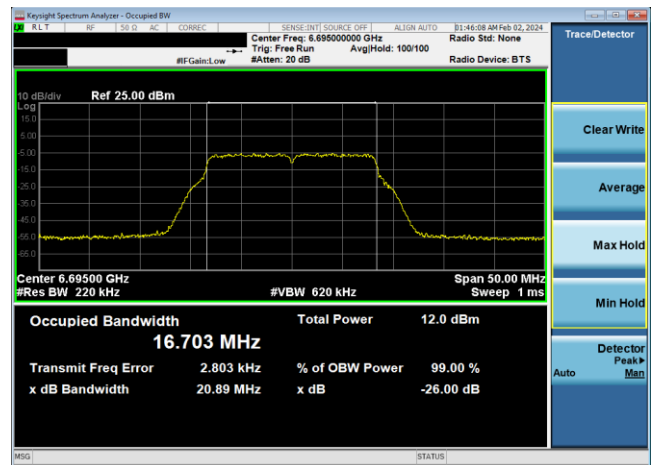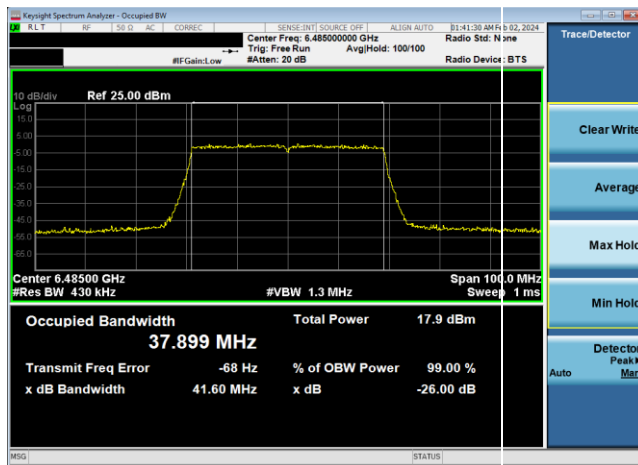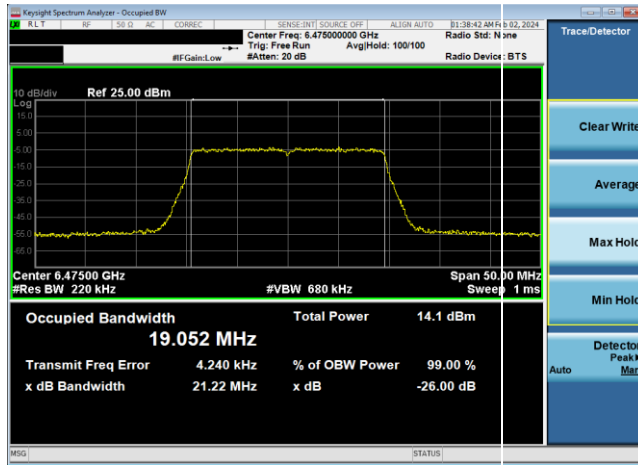

FCC ID: BCGA2925 IC: 579C-A2925		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270069-13-R1.BCG	Test Dates: 01/08/2024 - 04/05/2024	EUT Type: Tablet Device	Page 39 of 525