


Appendix C. Radiated Emission Co-location Report

1. Results of Radiated Emissions for Co-located


Temperature	25.1°C	Humidity	50%
Test Engineer	YC Chen	Configurations	2.4G + 5G

Horizontal

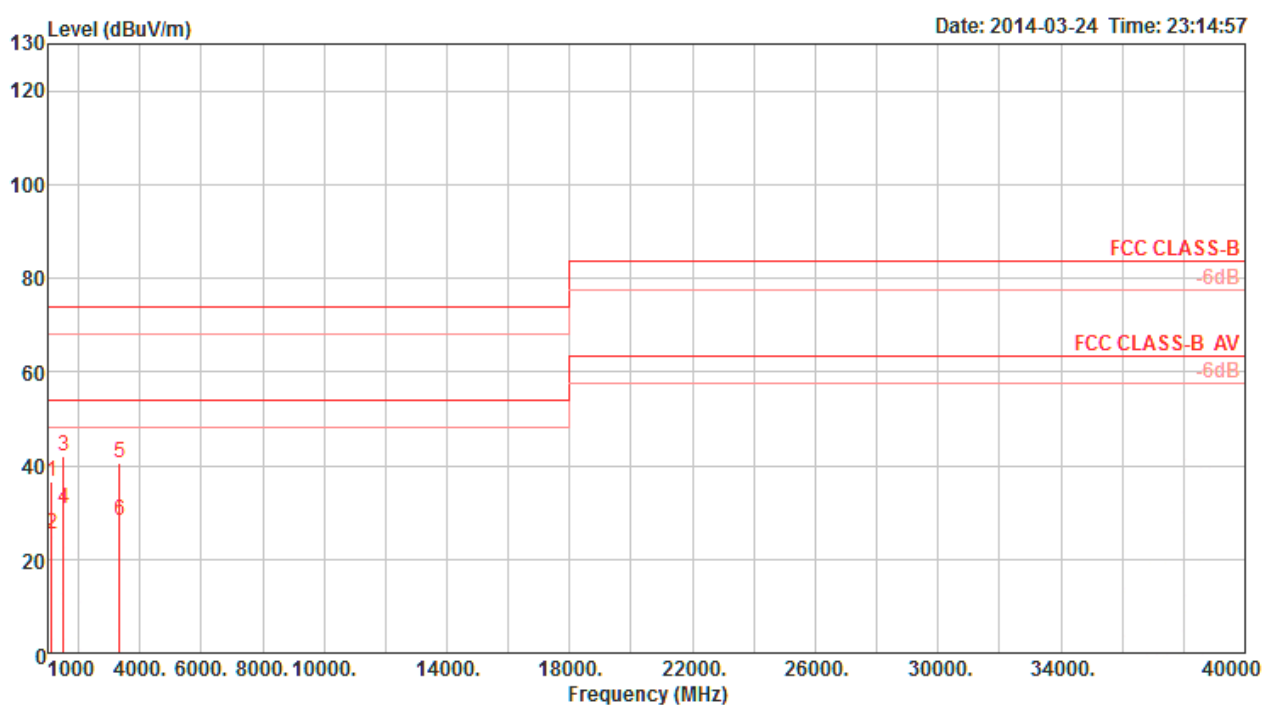

	Freq	Level	Limit	Over	Read	Cable	Preamp			T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	Limit	Level	Loss	Factor	Factor	Remark	deg	cm	
1	1123.91	36.59	74.00	-37.41	46.25	1.93	35.72	-9.66	Peak	321	100	HORIZONTAL
2	1124.90	25.22	54.00	-28.78	34.88	1.93	35.72	-9.66	Average	321	100	HORIZONTAL
3	1499.82	41.88	74.00	-32.12	49.18	2.25	35.05	-7.30	Peak	178	100	HORIZONTAL
4	1499.94	30.61	54.00	-23.39	37.91	2.25	35.05	-7.30	Average	178	100	HORIZONTAL
5	3324.91	40.73	74.00	-33.27	42.11	3.47	34.77	-1.38	Peak	115	100	HORIZONTAL
6	3327.80	28.19	54.00	-25.81	29.57	3.47	34.77	-1.38	Average	115	100	HORIZONTAL

Vertical

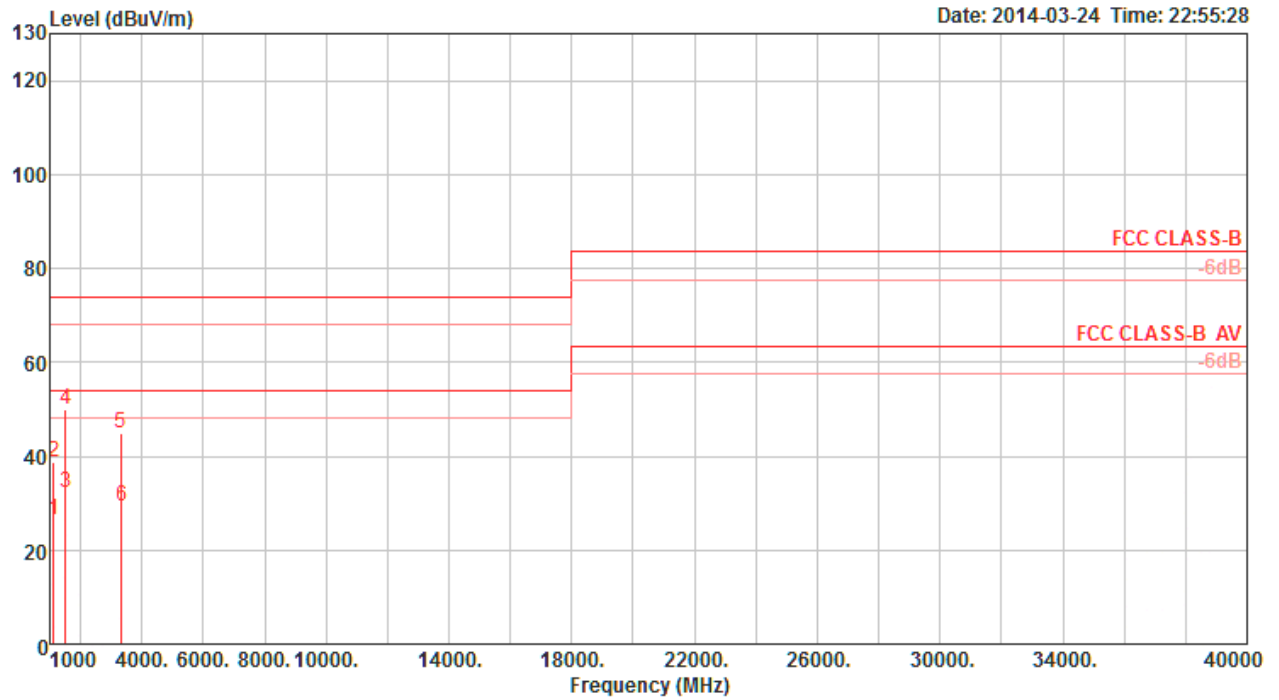

	Freq	Level	Limit	Over	Read	Cable	Preamp			T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	Limit	Level	Loss	Factor	Factor	Remark	deg	cm	
1	1124.75	26.51	54.00	-27.49	36.17	1.93	35.72	-9.66	Average	245	100	VERTICAL
2	1124.92	38.69	74.00	-35.31	48.35	1.93	35.72	-9.66	Peak	285	100	VERTICAL
3	1499.88	32.13	54.00	-21.87	39.43	2.25	35.05	-7.30	Average	285	100	VERTICAL
4	1499.97	50.01	74.00	-23.99	57.31	2.25	35.05	-7.30	Peak	266	100	VERTICAL
5	3308.99	44.73	74.00	-29.27	46.16	3.46	34.77	-1.43	Peak	46	100	VERTICAL
6	3326.06	29.23	54.00	-24.77	30.61	3.47	34.77	-1.38	Average	46	100	VERTICAL