


Maximum location: X=17.00, Y=-8.00  
D. SAR 1g & 10g


|                |          |
|----------------|----------|
| SAR 10g (W/Kg) | 0.231616 |
| SAR 1g (W/Kg)  | 0.422731 |

E. Z Axis Scan

|            |        |        |        |        |        |
|------------|--------|--------|--------|--------|--------|
| Z (mm)     | 0.00   | 4.00   | 8.00   | 12.00  | 16.00  |
| SAR (W/Kg) | 0.7106 | 0.4602 | 0.2951 | 0.1915 | 0.1277 |

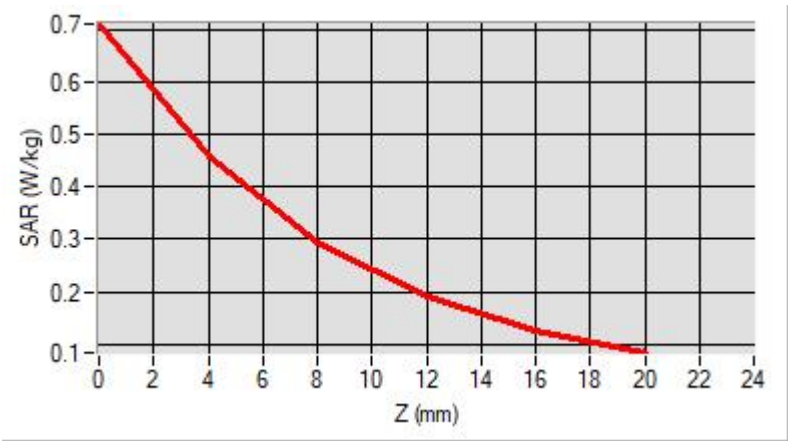

F. 3D Image

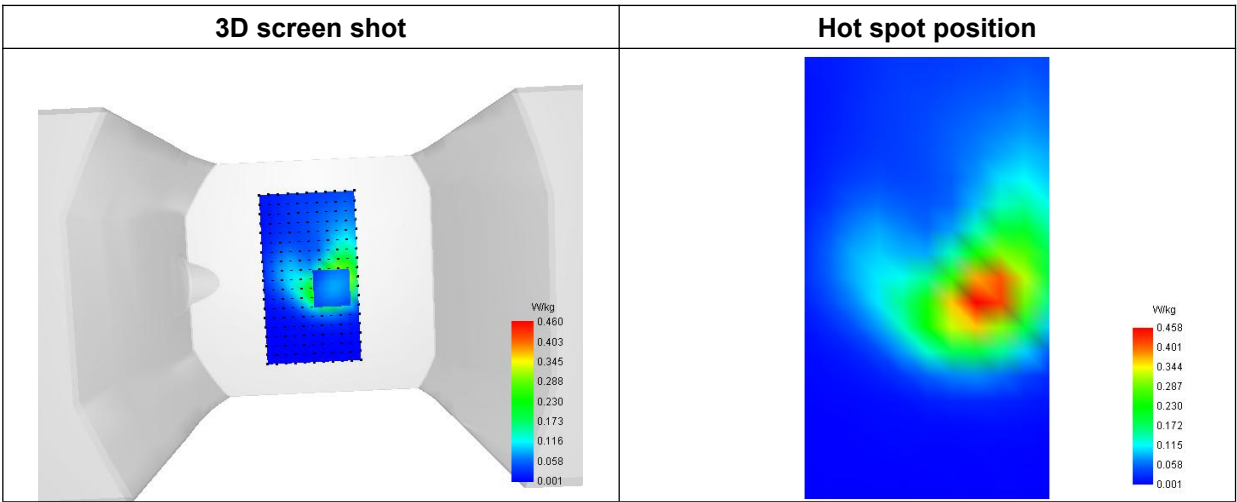

MEASUREMENT 105

Type: Phone measurement (Complete)  
Date of measurement: 2024-05-06  
Measurement duration: 12 minutes 3 seconds  
E-field Probe: SSE2 - SN 18/21 EPGO356; ConvF: 1.67; Calibrated: 2023-07-07


A. Experimental conditions

|                 |                                   |
|-----------------|-----------------------------------|
| Area Scan       | dx=8mm dy=8mm                     |
| Zoom Scan       | dx=5mm dy=5mm dz=4mm              |
| Phantom         | Flat Plane                        |
| Device Position | Back                              |
| Band            | NR n71                            |
| Channels        | DFT-s-OFDM QPSK, 20MHz, 1RB, High |
| Signal          | Duty Cycle 1:1                    |

B. SAR Measurement Results

|                                   |            |
|-----------------------------------|------------|
| Frequency (MHz)                   | 688.000000 |
| Relative Permittivity (real part) | 42.234951  |
| Conductivity (S/m)                | 0.903071   |
| Power Variation (%)               | -0.524900  |
| Ambient Temperature               | 22.2       |
| Liquid Temperature                | 22.2       |

C. SAR Surface and Volume

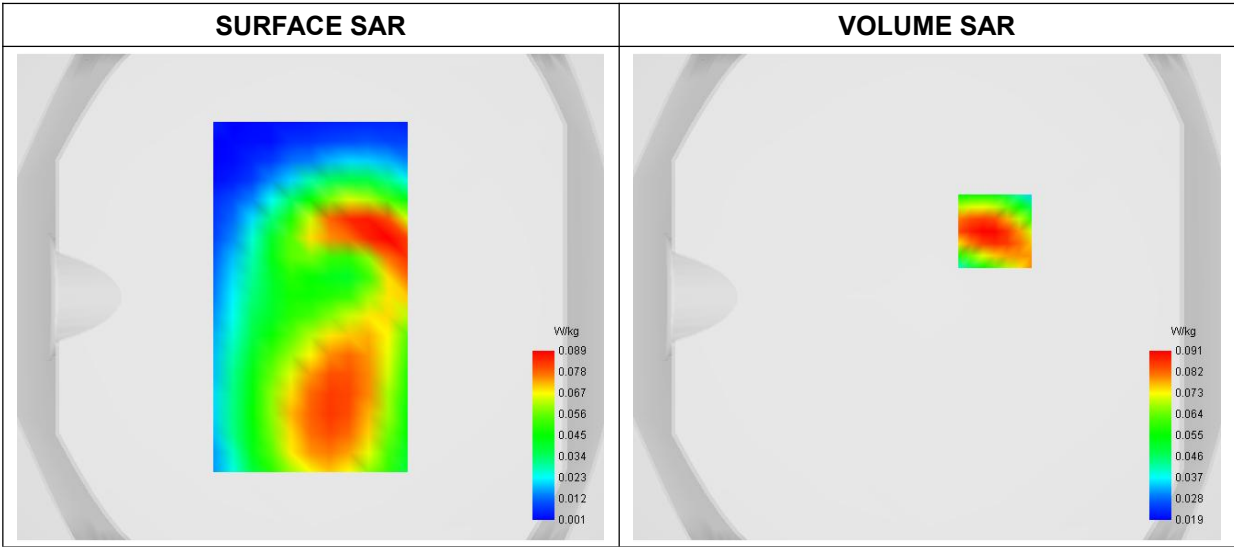


Maximum location: X=28.00, Y=27.00  
D. SAR 1g & 10g


|                |          |
|----------------|----------|
| SAR 10g (W/Kg) | 0.057374 |
| SAR 1g (W/Kg)  | 0.087243 |

E. Z Axis Scan

|            |        |        |        |        |        |
|------------|--------|--------|--------|--------|--------|
| Z (mm)     | 0.00   | 4.00   | 8.00   | 12.00  | 16.00  |
| SAR (W/Kg) | 0.1358 | 0.0905 | 0.0628 | 0.0469 | 0.0372 |

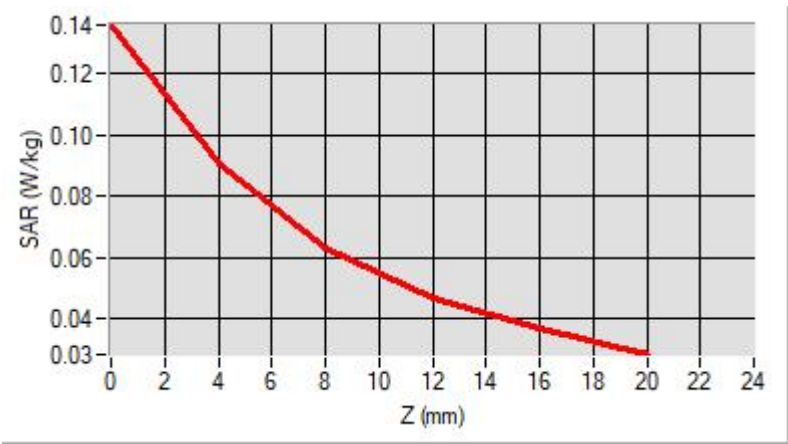

F. 3D Image

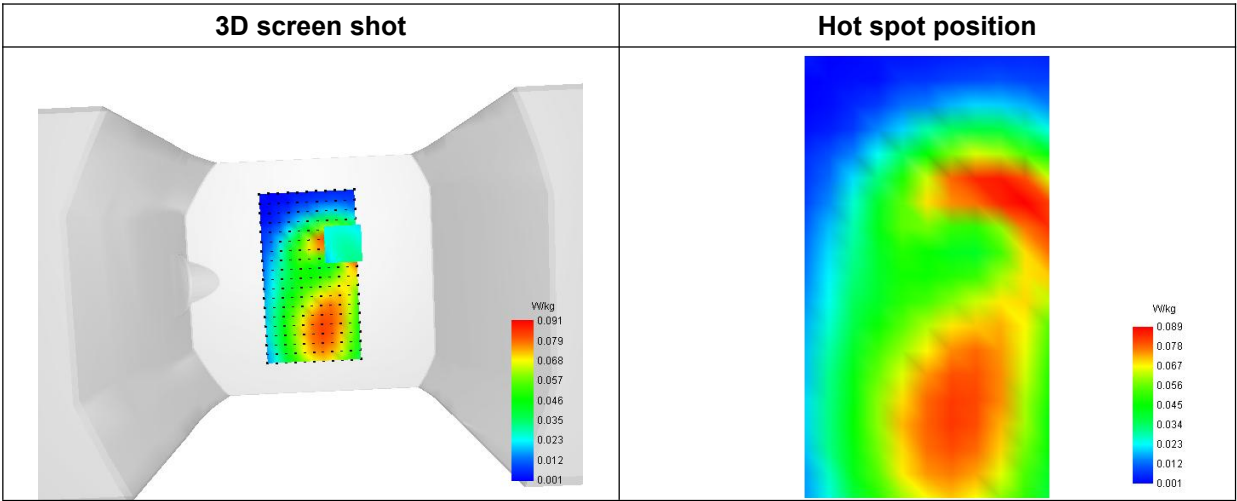

MEASUREMENT 106

Type: Phone measurement (Complete)  
Date of measurement: 2023-06-05  
Measurement duration: 12 minutes 3 seconds  
E-field Probe: SSE2 - SN 18/21 EPGO356; ConvF: 2.07; Calibrated: 2023-07-07


A. Experimental conditions

|                 |                                      |
|-----------------|--------------------------------------|
| Area Scan       | dx=8mm dy=8mm                        |
| Zoom Scan       | dx=5mm dy=5mm dz=4mm                 |
| Phantom         | Flat Plane                           |
| Device Position | Back                                 |
| Band            | NR n77_3450-3550MHz                  |
| Channels        | DFT-s-OFDM QPSK, 100MHz, 1RB, Middle |
| Signal          | Duty Cycle 1:1                       |

B. SAR Measurement Results

|                                   |             |
|-----------------------------------|-------------|
| Frequency (MHz)                   | 3500.000000 |
| Relative Permittivity (real part) | 36.861835   |
| Conductivity (S/m)                | 3.054129    |
| Power Variation (%)               | -0.948500   |
| Ambient Temperature               | 22.4        |
| Liquid Temperature                | 22.4        |

C. SAR Surface and Volume

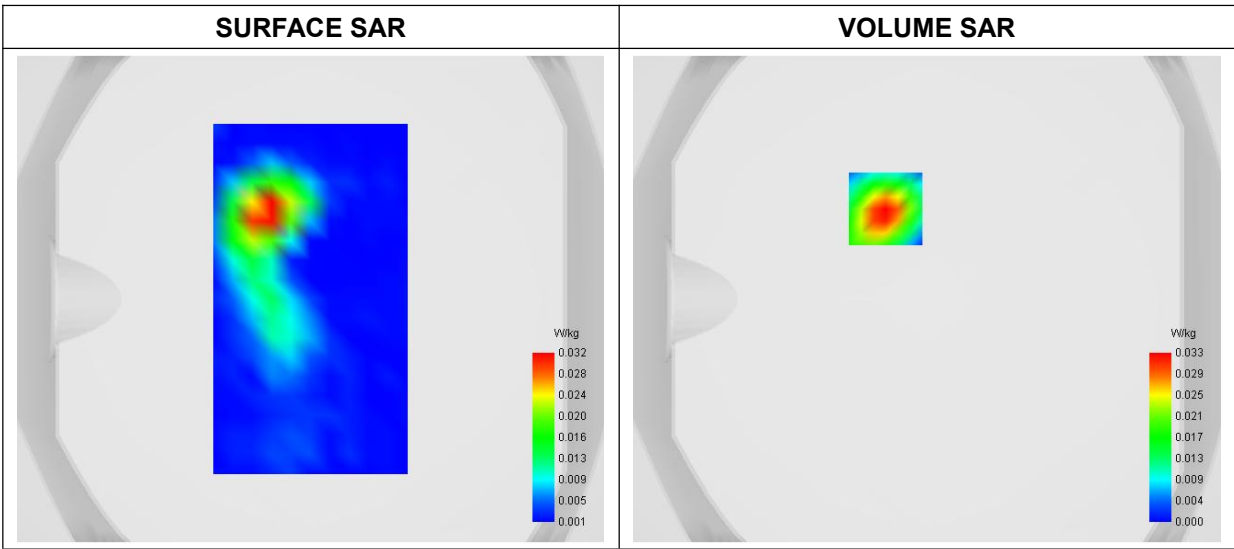


Maximum location: X=-17.00, Y=37.00  
D. SAR 1g & 10g


|                |          |
|----------------|----------|
| SAR 10g (W/Kg) | 0.013064 |
| SAR 1g (W/Kg)  | 0.032468 |

E. Z Axis Scan

|            |        |        |        |        |        |
|------------|--------|--------|--------|--------|--------|
| Z (mm)     | 0.00   | 4.00   | 8.00   | 12.00  | 16.00  |
| SAR (W/Kg) | 0.0846 | 0.0334 | 0.0110 | 0.0034 | 0.0015 |

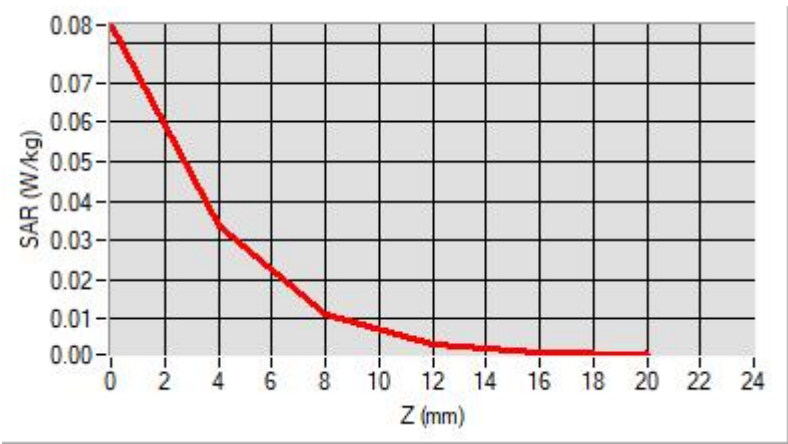

F. 3D Image

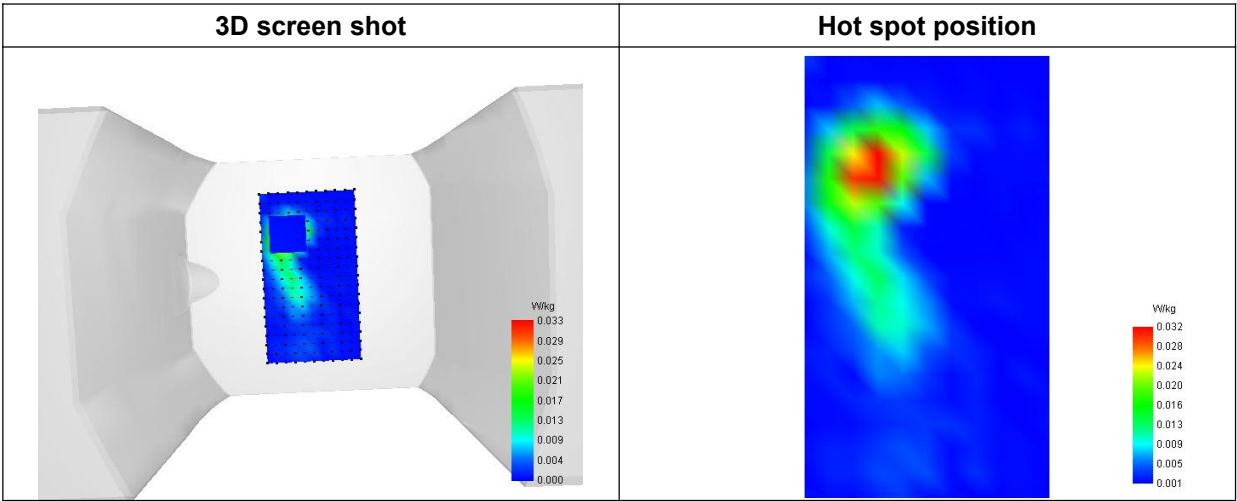

MEASUREMENT 107

Type: Phone measurement (Complete)  
Date of measurement: 2023-06-05  
Measurement duration: 12 minutes 3 seconds  
E-field Probe: SSE2 - SN 18/21 EPGO356; ConvF: 2.27; Calibrated: 2023-07-07


A. Experimental conditions

|                 |                                   |
|-----------------|-----------------------------------|
| Area Scan       | dx=8mm dy=8mm                     |
| Zoom Scan       | dx=5mm dy=5mm dz=4mm              |
| Phantom         | Flat Plane                        |
| Device Position | Back                              |
| Band            | NR n77_3700-3980MHz               |
| Channels        | DFT-s-OFDM QPSK, 100MHz, 1RB, Low |
| Signal          | Duty Cycle 1:1                    |

B. SAR Measurement Results

|                                   |             |
|-----------------------------------|-------------|
| Frequency (MHz)                   | 3750.000000 |
| Relative Permittivity (real part) | 35.462541   |
| Conductivity (S/m)                | 3.323747    |
| Power Variation (%)               | 0.475600    |
| Ambient Temperature               | 22.4        |
| Liquid Temperature                | 22.4        |

C. SAR Surface and Volume

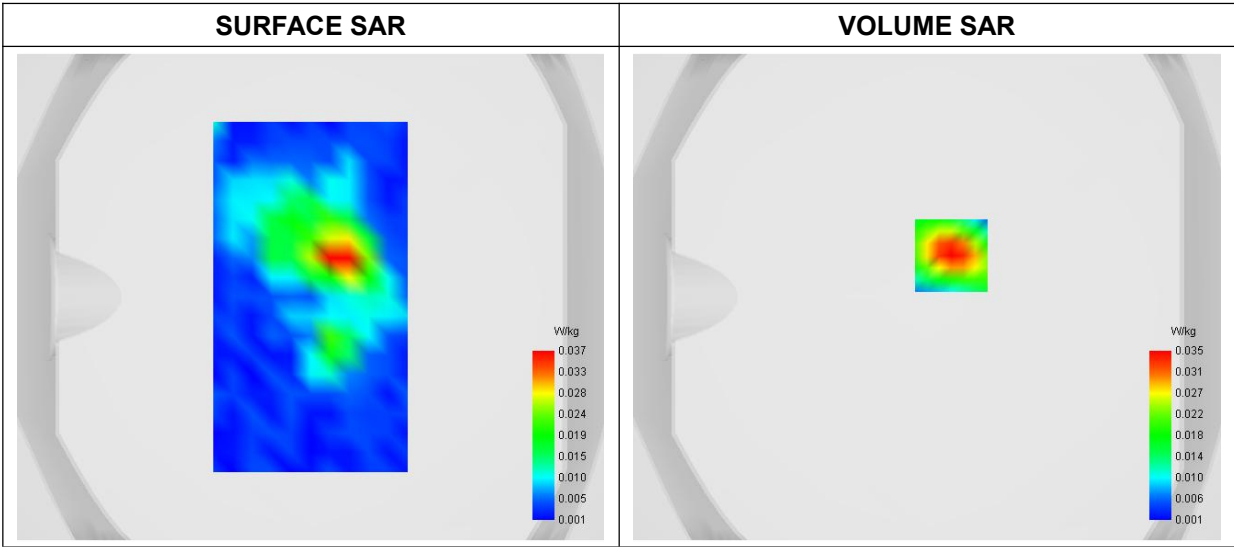


Maximum location: X=10.00, Y=17.00  
D. SAR 1g & 10g



|                |          |
|----------------|----------|
| SAR 10g (W/Kg) | 0.015394 |
| SAR 1g (W/Kg)  | 0.035449 |

E. Z Axis Scan

|            |        |        |        |        |        |
|------------|--------|--------|--------|--------|--------|
| Z (mm)     | 0.00   | 4.00   | 8.00   | 12.00  | 16.00  |
| SAR (W/Kg) | 0.0984 | 0.0349 | 0.0099 | 0.0033 | 0.0028 |

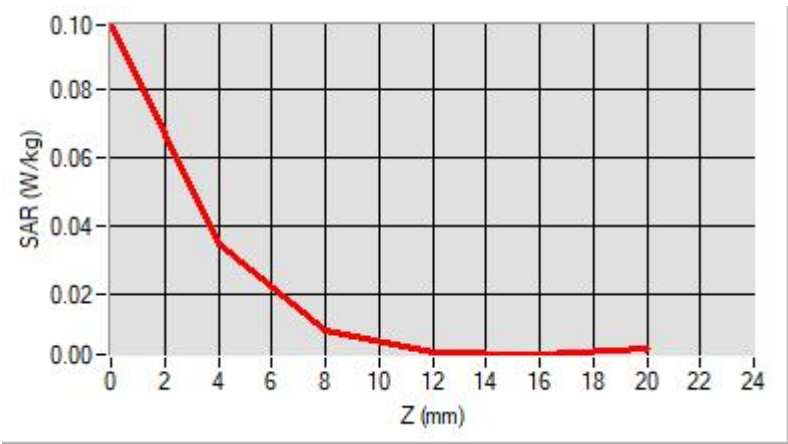

F. 3D Image
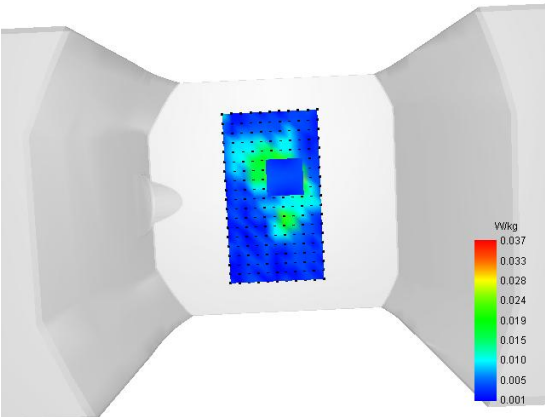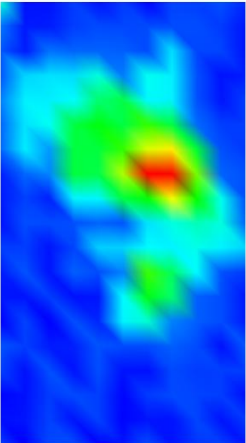
|                                                                                     |                                                                                      |
|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|
| 3D screen shot                                                                      | Hot spot position                                                                    |
|  |  |

MEASUREMENT 108

Type: Phone measurement (Complete)  
Date of measurement: 2024-05-14  
Measurement duration: 12 minutes 3 seconds  
E-field Probe: SSE2 - SN 18/21 EPGO356; ConvF: 2.11; Calibrated: 2023-07-07


A. Experimental conditions

|                 |                               |
|-----------------|-------------------------------|
| Area Scan       | dx=8mm dy=8mm                 |
| Zoom Scan       | dx=5mm dy=5mm dz=4mm          |
| Phantom         | Flat Plane                    |
| Device Position | Back                          |
| Band            | DC_7A_n2A                     |
| Channels        | CP-OFDM-QPSK, 20MHz, 1RB, Low |
| Signal          | Duty Cycle 1:1                |

B. SAR Measurement Results

|                                   |             |
|-----------------------------------|-------------|
| Frequency (MHz)                   | 1860.000000 |
| Relative Permittivity (real part) | 40.422911   |
| Conductivity (S/m)                | 1.761483    |
| Power Variation (%)               | 2.801100    |
| Ambient Temperature               | 22.5        |
| Liquid Temperature                | 22.5        |

C. SAR Surface and Volume

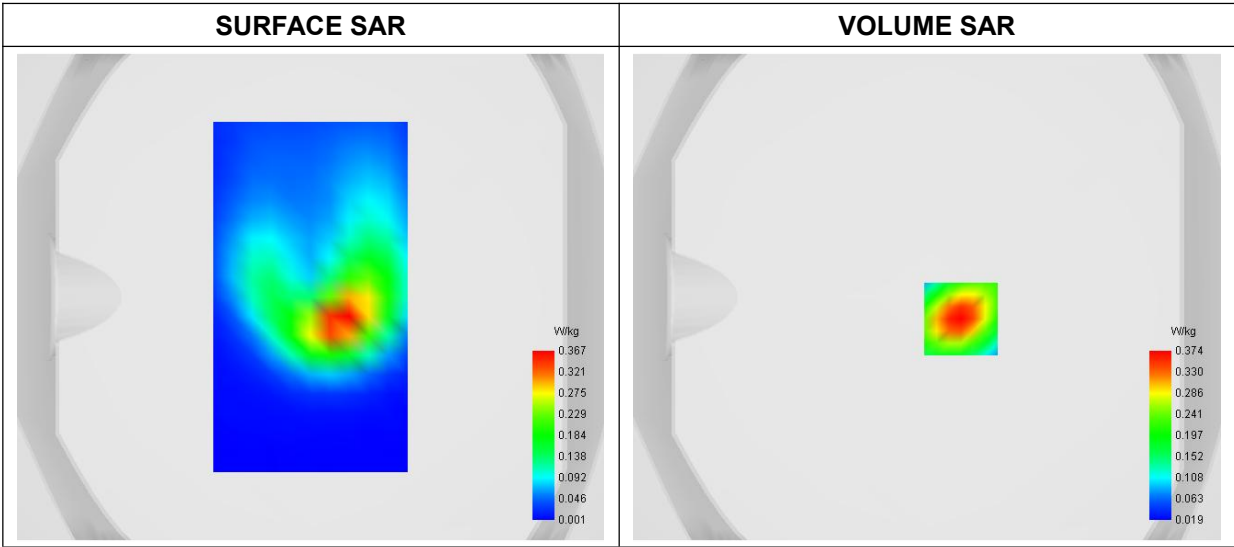


Maximum location: X=14.00, Y=-9.00  
D. SAR 1g & 10g

|                |          |
|----------------|----------|
| SAR 10g (W/Kg) | 0.181780 |
| SAR 1g (W/Kg)  | 0.343859 |

E. Z Axis Scan

|            |        |        |        |        |        |
|------------|--------|--------|--------|--------|--------|
| Z (mm)     | 0.00   | 4.00   | 8.00   | 12.00  | 16.00  |
| SAR (W/Kg) | 0.5989 | 0.3745 | 0.2301 | 0.1422 | 0.0900 |

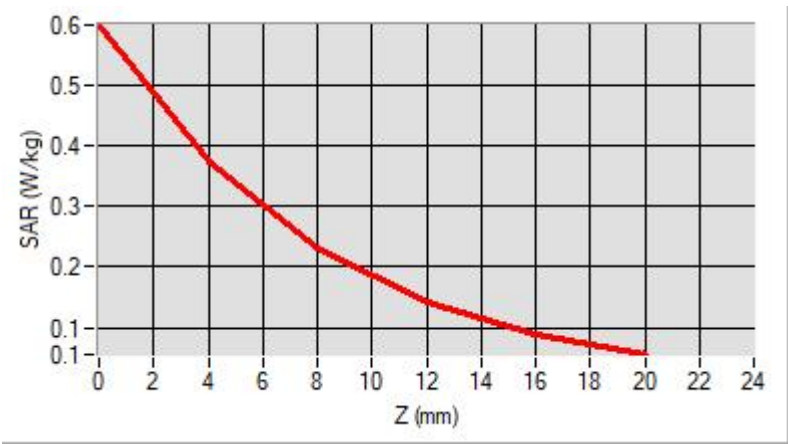

F. 3D Image

|                                                                                                                                                                                                                                                           |                                                                                                                                                                                             |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 3D screen shot                                                                                                                                                                                                                                            | Hot spot position                                                                                                                                                                           |
| <p>A 3D model of a device with a hot spot visualization. The hot spot is located in the center of the device, showing a color gradient from blue (low SAR) to red (high SAR). A color bar on the right indicates SAR values from 0.001 to 0.374 W/kg.</p> | <p>A 2D visualization of the hot spot position, showing a color gradient from blue (low SAR) to red (high SAR). A color bar on the right indicates SAR values from 0.001 to 0.367 W/kg.</p> |

MEASUREMENT 109

Type: Phone measurement (Complete)  
Date of measurement: 2024-05-09  
Measurement duration: 12 minutes 3 seconds  
E-field Probe: SSE2 - SN 18/21 EPGO356; ConvF: 1.71; Calibrated: 2023-07-07


A. Experimental conditions

|                 |                                   |
|-----------------|-----------------------------------|
| Area Scan       | dx=8mm dy=8mm                     |
| Zoom Scan       | dx=5mm dy=5mm dz=4mm              |
| Phantom         | Flat Plane                        |
| Device Position | Back                              |
| Band            | DC_66A_n5A                        |
| Channels        | DFT-s-OFDM QPSK, 20MHz, 1RB, High |
| Signal          | Duty Cycle 1:1                    |

B. SAR Measurement Results

|                                   |            |
|-----------------------------------|------------|
| Frequency (MHz)                   | 839.000000 |
| Relative Permittivity (real part) | 42.014129  |
| Conductivity (S/m)                | 0.922694   |
| Power Variation (%)               | 2.517800   |
| Ambient Temperature               | 22.2       |
| Liquid Temperature                | 22.2       |

C. SAR Surface and Volume

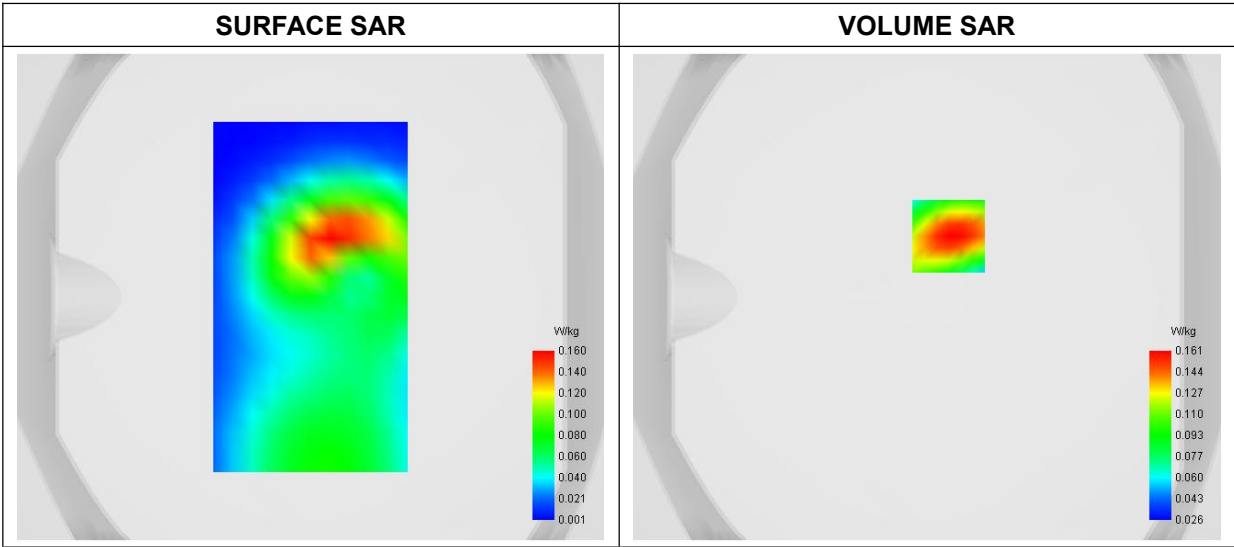


Maximum location: X=9.00, Y=25.00

D. SAR 1g & 10g


|                |          |
|----------------|----------|
| SAR 10g (W/Kg) | 0.095336 |
| SAR 1g (W/Kg)  | 0.150779 |

E. Z Axis Scan

|            |        |        |        |        |        |
|------------|--------|--------|--------|--------|--------|
| Z (mm)     | 0.00   | 4.00   | 8.00   | 12.00  | 16.00  |
| SAR (W/Kg) | 0.2248 | 0.1606 | 0.1149 | 0.0836 | 0.0623 |

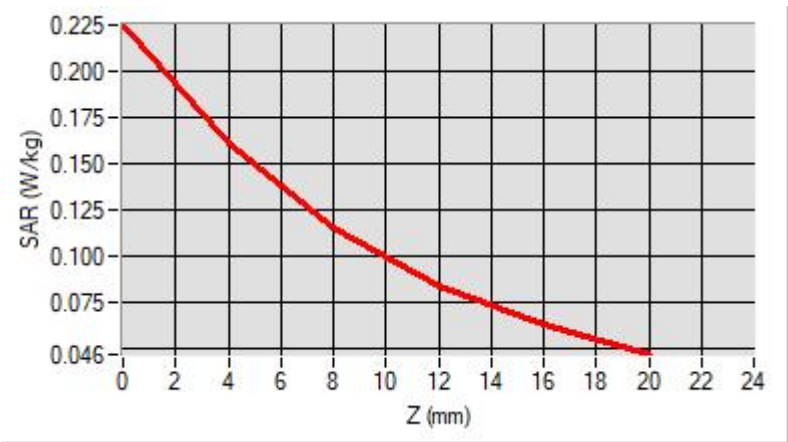

F. 3D Image

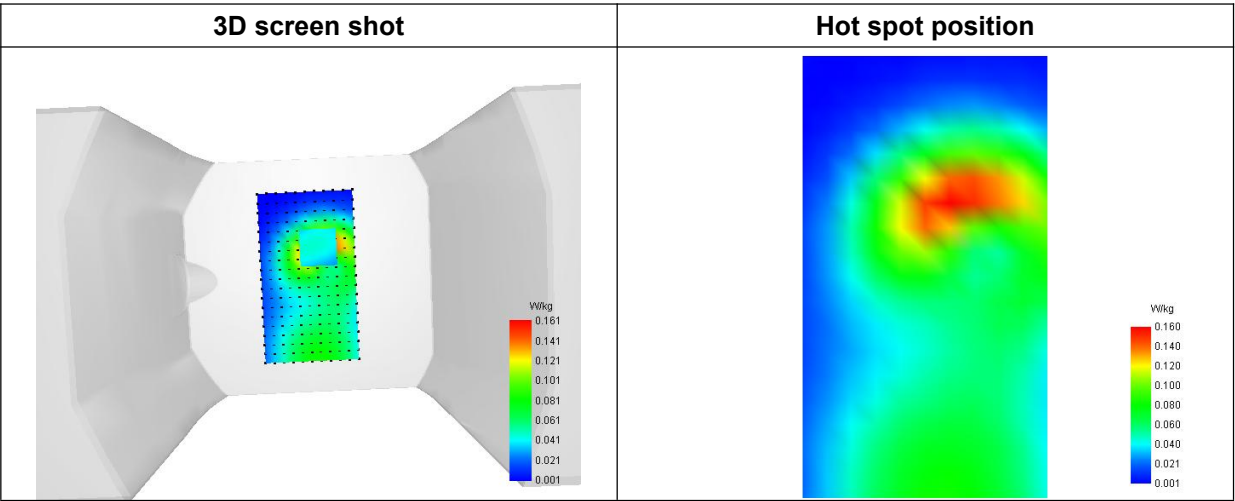

MEASUREMENT 110

Type: Phone measurement (Complete)  
Date of measurement: 2024-05-20  
Measurement duration: 12 minutes 3 seconds  
E-field Probe: SSE2 - SN 18/21 EPGO356; ConvF: 2.22; Calibrated: 2023-07-07


A. Experimental conditions

|                 |                                   |
|-----------------|-----------------------------------|
| Area Scan       | dx=8mm dy=8mm                     |
| Zoom Scan       | dx=5mm dy=5mm dz=4mm              |
| Phantom         | Flat Plane                        |
| Device Position | Back                              |
| Band            | DC_4A_n41A                        |
| Channels        | DFT-s-OFDM QPSK, 20MHz, 1RB, High |
| Signal          | Duty Cycle 1:1                    |

B. SAR Measurement Results

|                                   |             |
|-----------------------------------|-------------|
| Frequency (MHz)                   | 2640.000000 |
| Relative Permittivity (real part) | 38.872918   |
| Conductivity (S/m)                | 1.931523    |
| Power Variation (%)               | 2.517900    |
| Ambient Temperature               | 22.1        |
| Liquid Temperature                | 22.1        |

C. SAR Surface and Volume

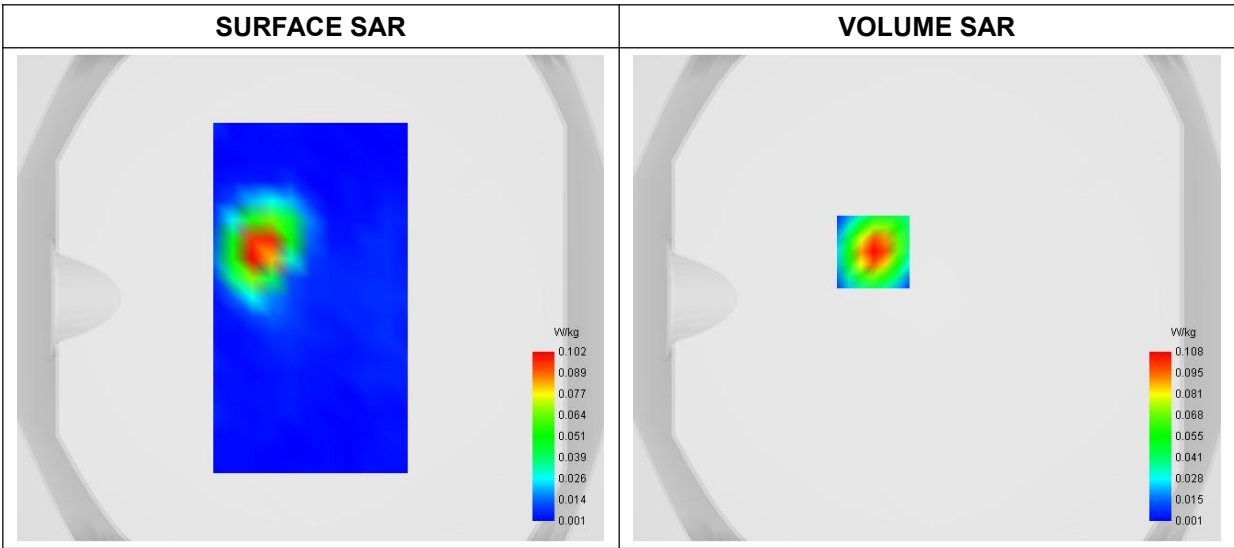


Maximum location: X=-22.00, Y=19.00  
D. SAR 1g & 10g


|                |          |
|----------------|----------|
| SAR 10g (W/Kg) | 0.041989 |
| SAR 1g (W/Kg)  | 0.096409 |

E. Z Axis Scan

|            |        |        |        |        |        |
|------------|--------|--------|--------|--------|--------|
| Z (mm)     | 0.00   | 4.00   | 8.00   | 12.00  | 16.00  |
| SAR (W/Kg) | 0.1973 | 0.1078 | 0.0563 | 0.0290 | 0.0155 |

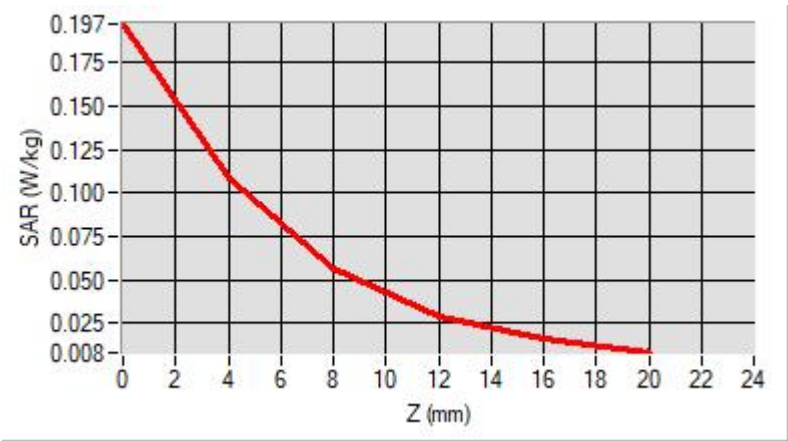

F. 3D Image

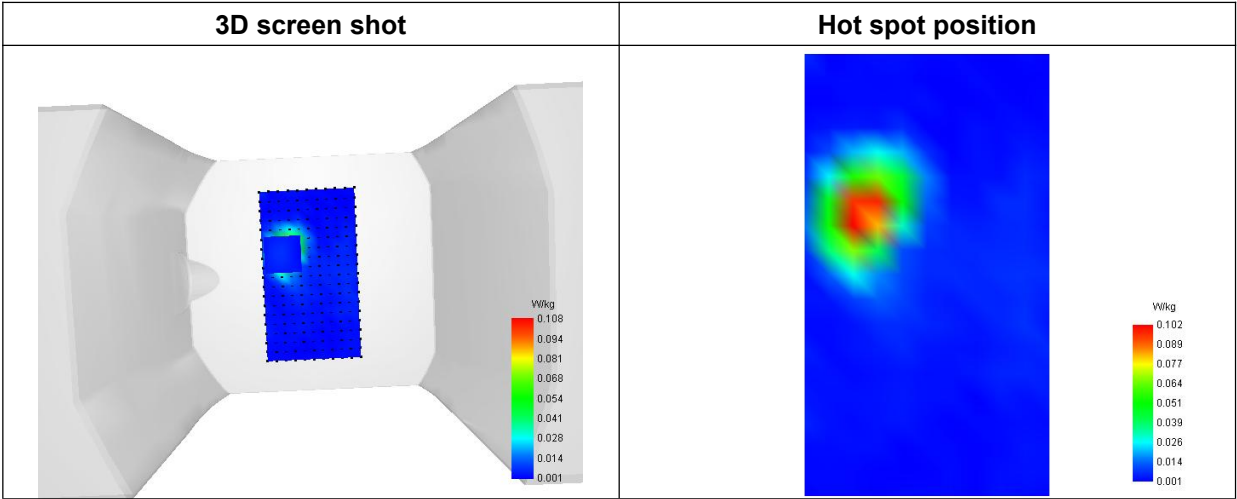

MEASUREMENT 111

Type: Phone measurement (Complete)  
Date of measurement: 2024-05-14  
Measurement duration: 12 minutes 3 seconds  
E-field Probe: SSE2 - SN 18/21 EPGO356; ConvF: 2.11; Calibrated: 2023-07-07


A. Experimental conditions

|                 |                                     |
|-----------------|-------------------------------------|
| Area Scan       | dx=8mm dy=8mm                       |
| Zoom Scan       | dx=5mm dy=5mm dz=4mm                |
| Phantom         | Flat Plane                          |
| Device Position | Back                                |
| Band            | NR DC_5A_n66A                       |
| Channels        | DFT-s-OFDM QPSK, 20MHz, 1RB, Middle |
| Signal          | Duty Cycle 1:1                      |

B. SAR Measurement Results

|                                   |             |
|-----------------------------------|-------------|
| Frequency (MHz)                   | 1720.000000 |
| Relative Permittivity (real part) | 40.424216   |
| Conductivity (S/m)                | 1.761368    |
| Power Variation (%)               | 1.581200    |
| Ambient Temperature               | 22.2        |
| Liquid Temperature                | 22.2        |

C. SAR Surface and Volume

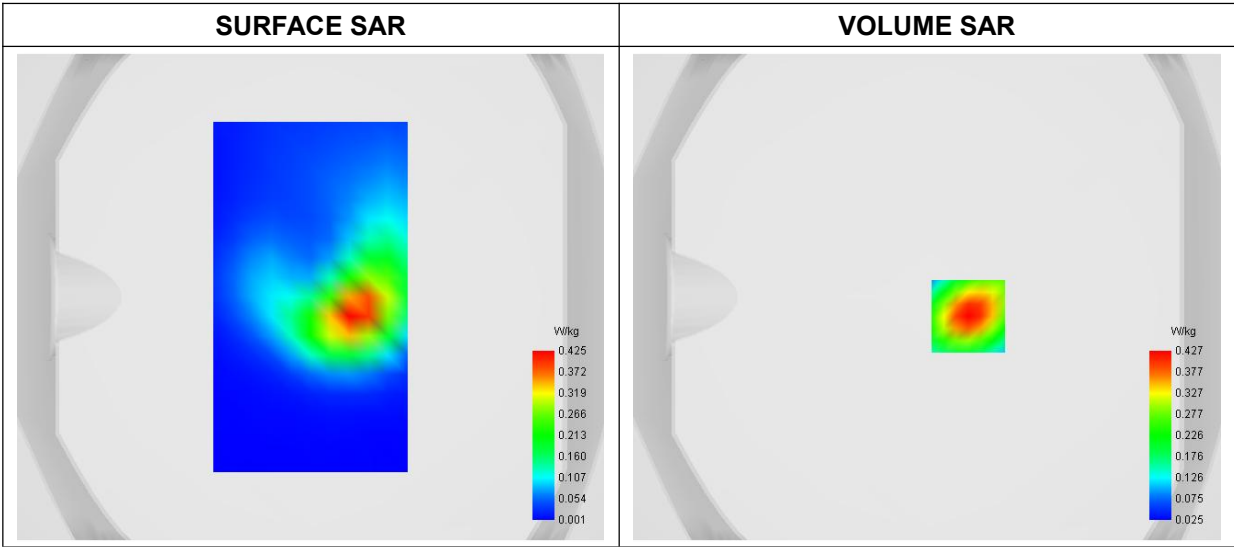


Maximum location: X=17.00, Y=-8.00  
D. SAR 1g & 10g


|                |          |
|----------------|----------|
| SAR 10g (W/Kg) | 0.216316 |
| SAR 1g (W/Kg)  | 0.392743 |

E. Z Axis Scan

|            |        |        |        |        |        |
|------------|--------|--------|--------|--------|--------|
| Z (mm)     | 0.00   | 4.00   | 8.00   | 12.00  | 16.00  |
| SAR (W/Kg) | 0.6530 | 0.4274 | 0.2765 | 0.1801 | 0.1195 |

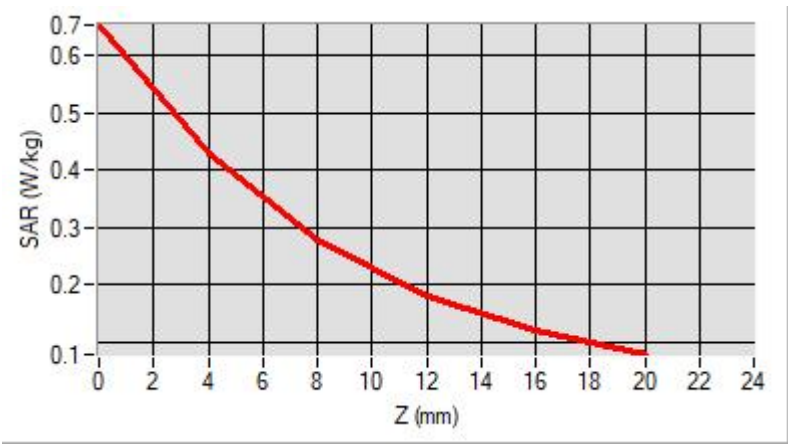

F. 3D Image

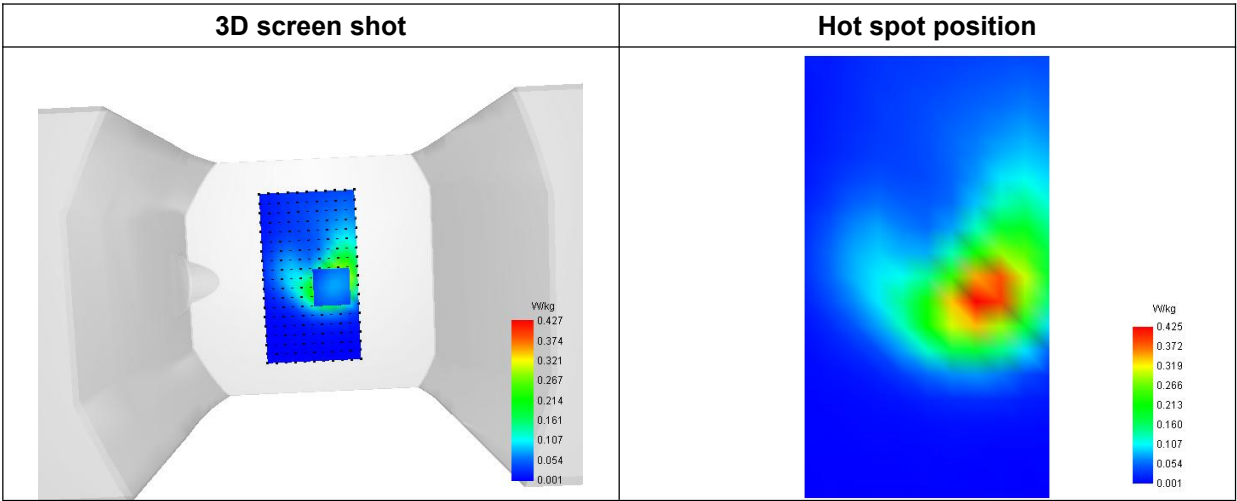

MEASUREMENT 112

Type: Phone measurement (Complete)  
Date of measurement: 2023-06-05  
Measurement duration: 12 minutes 3 seconds  
E-field Probe: SSE2 - SN 18/21 EPGO356; ConvF: 2.07; Calibrated: 2023-07-07


A. Experimental conditions

|                 |                                      |
|-----------------|--------------------------------------|
| Area Scan       | dx=8mm dy=8mm                        |
| Zoom Scan       | dx=5mm dy=5mm dz=4mm                 |
| Phantom         | Flat Plane                           |
| Device Position | Back                                 |
| Band            | NR n77_3450-3550MHz                  |
| Channels        | DFT-s-OFDM QPSK, 100MHz, 1RB, Middle |
| Signal          | Duty Cycle 1:1                       |

B. SAR Measurement Results

|                                   |             |
|-----------------------------------|-------------|
| Frequency (MHz)                   | 3500.000000 |
| Relative Permittivity (real part) | 36.861835   |
| Conductivity (S/m)                | 3.054129    |
| Power Variation (%)               | 0.179400    |
| Ambient Temperature               | 22.4        |
| Liquid Temperature                | 22.4        |

C. SAR Surface and Volume

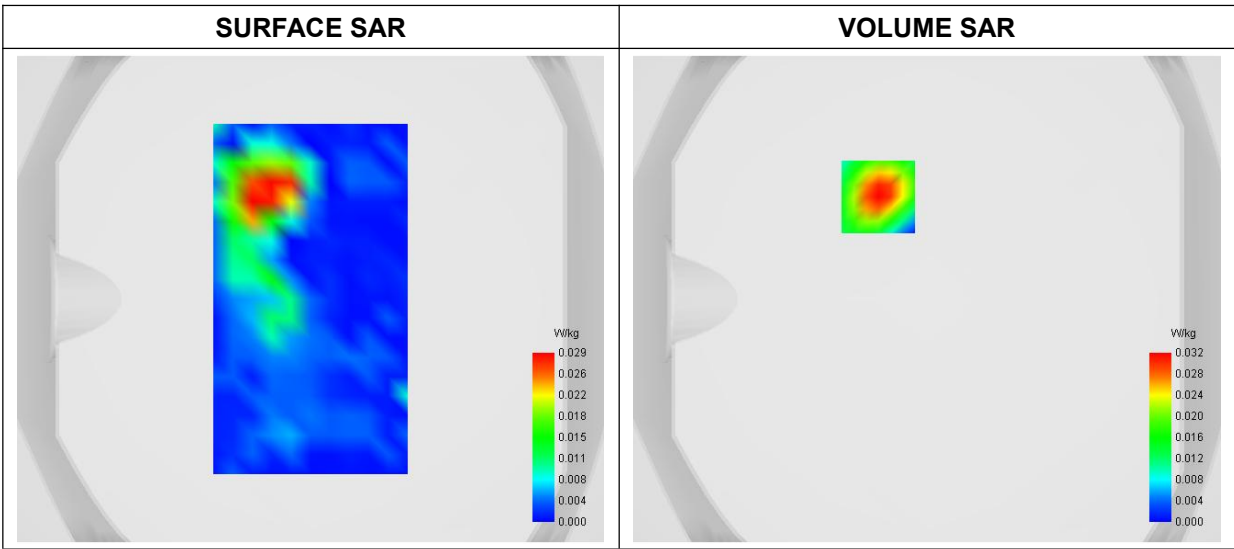


Maximum location: X=-20.00, Y=42.00  
D. SAR 1g & 10g

|                |          |
|----------------|----------|
| SAR 10g (W/Kg) | 0.013563 |
| SAR 1g (W/Kg)  | 0.032566 |

E. Z Axis Scan

|            |        |        |        |        |        |
|------------|--------|--------|--------|--------|--------|
| Z (mm)     | 0.00   | 4.00   | 8.00   | 12.00  | 16.00  |
| SAR (W/Kg) | 0.0872 | 0.0322 | 0.0095 | 0.0025 | 0.0011 |

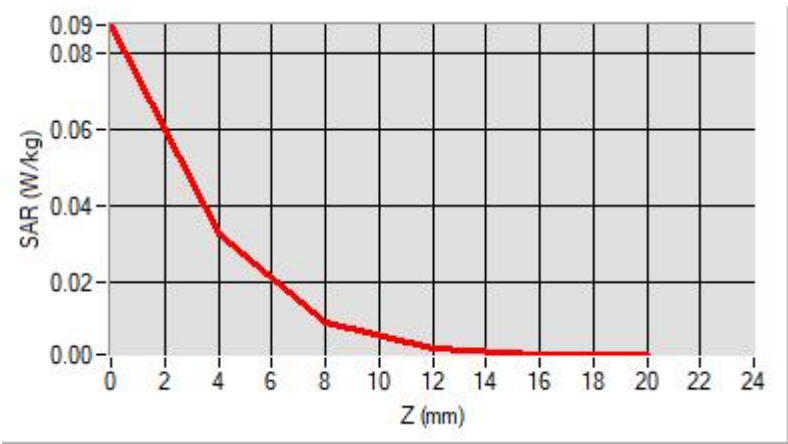

F. 3D Image

|                                                                                                                                                                                                                                                                              |                                                                                                                                                                                                                                           |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 3D screen shot                                                                                                                                                                                                                                                               | Hot spot position                                                                                                                                                                                                                         |
| <p>A 3D model of a device, possibly a mobile phone, showing the SAR distribution. The color bar on the right indicates SAR values from 0.000 to 0.032 W/kg. The highest SAR values are concentrated in the center of the device, indicated by the red and yellow colors.</p> | <p>A 2D heatmap showing the hot spot position. The color bar on the right indicates SAR values from 0.000 to 0.029 W/kg. The highest SAR values are concentrated in the center of the device, indicated by the red and yellow colors.</p> |

MEASUREMENT 113

Type: Phone measurement (Complete)  
Date of measurement: 2023-06-05  
Measurement duration: 12 minutes 3 seconds  
E-field Probe: SSE2 - SN 18/21 EPGO356; ConvF: 2.07; Calibrated: 2023-07-07


A. Experimental conditions

|                 |                                    |
|-----------------|------------------------------------|
| Area Scan       | dx=8mm dy=8mm                      |
| Zoom Scan       | dx=5mm dy=5mm dz=4mm               |
| Phantom         | Flat Plane                         |
| Device Position | Back                               |
| Band            | NR n77_3700-3980MHz                |
| Channels        | DFT-s-OFDM QPSK, 100MHz, 1RB, High |
| Signal          | Duty Cycle 1:1                     |

B. SAR Measurement Results

|                                   |             |
|-----------------------------------|-------------|
| Frequency (MHz)                   | 3840.000000 |
| Relative Permittivity (real part) | 34.931881   |
| Conductivity (S/m)                | 3.644621    |
| Power Variation (%)               | 0.484600    |
| Ambient Temperature               | 22.4        |
| Liquid Temperature                | 22.4        |

C. SAR Surface and Volume

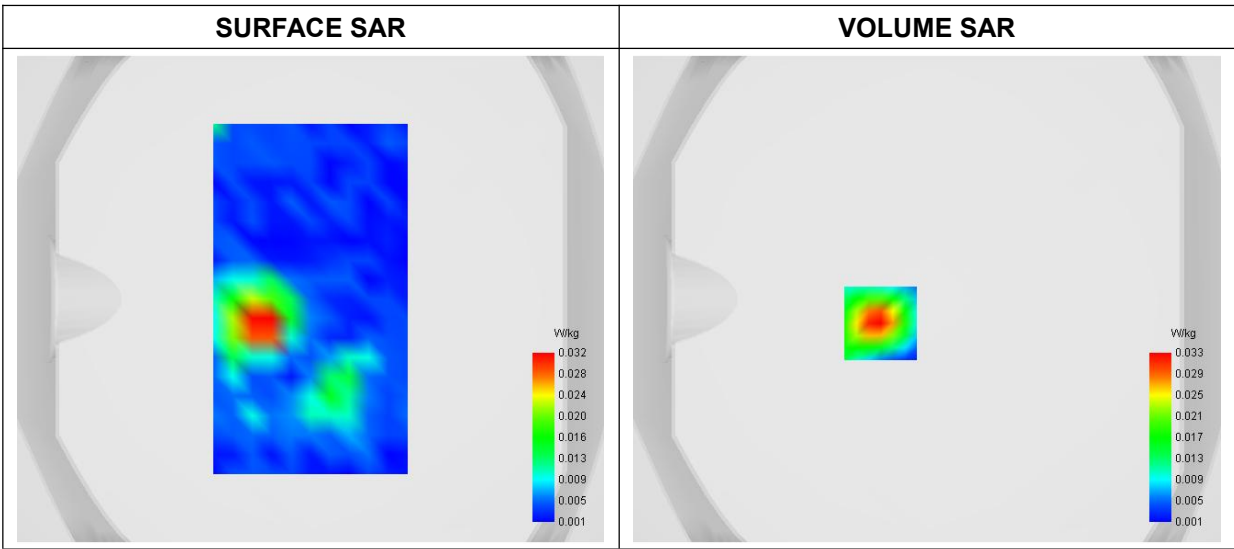


Maximum location: X=-19.00, Y=-10.00  
D. SAR 1g & 10g



|                |          |
|----------------|----------|
| SAR 10g (W/Kg) | 0.013510 |
| SAR 1g (W/Kg)  | 0.031695 |

E. Z Axis Scan

|            |        |        |        |        |        |
|------------|--------|--------|--------|--------|--------|
| Z (mm)     | 0.00   | 4.00   | 8.00   | 12.00  | 16.00  |
| SAR (W/Kg) | 0.0936 | 0.0332 | 0.0095 | 0.0031 | 0.0027 |

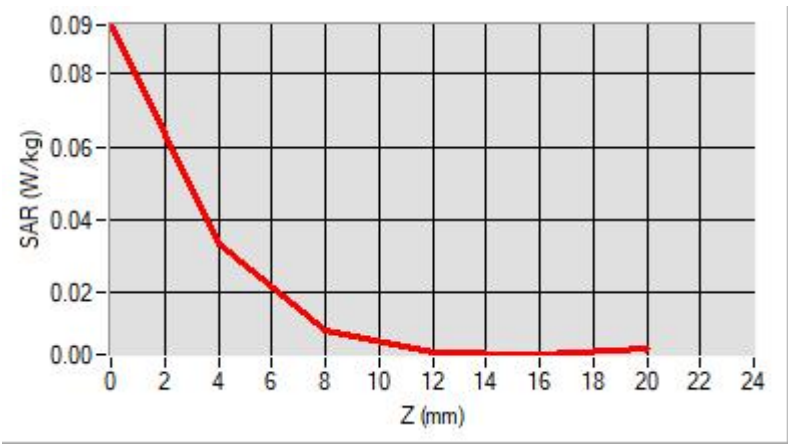

F. 3D Image
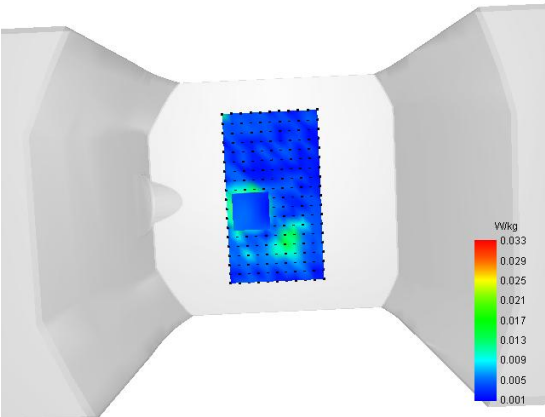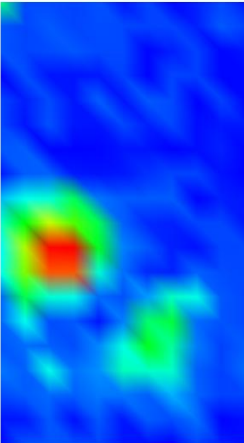
|                                                                                     |                                                                                      |
|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|
| 3D screen shot                                                                      | Hot spot position                                                                    |
|  |  |

MEASUREMENT 114

Type: Phone measurement (Complete)  
Date of measurement: 2024-05-25  
Measurement duration: 12 minutes 3 seconds  
E-field Probe: SSE2 - SN 18/21 EPGO356; ConvF: 1.91; Calibrated: 2023-07-07


A. Experimental conditions

|                 |                           |
|-----------------|---------------------------|
| Area Scan       | dx=8mm dy=8mm             |
| Zoom Scan       | dx=5mm dy=5mm dz=4mm      |
| Phantom         | Flat Plane                |
| Device Position | Top                       |
| Band            | WiFi(5.2GHz)_802.11a-ANT0 |
| Channels        | High                      |
| Signal          | Duty Cycle: 1:1           |

B. SAR Measurement Results

|                                   |             |
|-----------------------------------|-------------|
| Frequency (MHz)                   | 5240.000000 |
| Relative Permittivity (real part) | 37.492911   |
| Conductivity (S/m)                | 4.631483    |
| Power Variation (%)               | 0.374800    |
| Ambient Temperature               | 22.8        |
| Liquid Temperature                | 22.8        |

C. SAR Surface and Volume

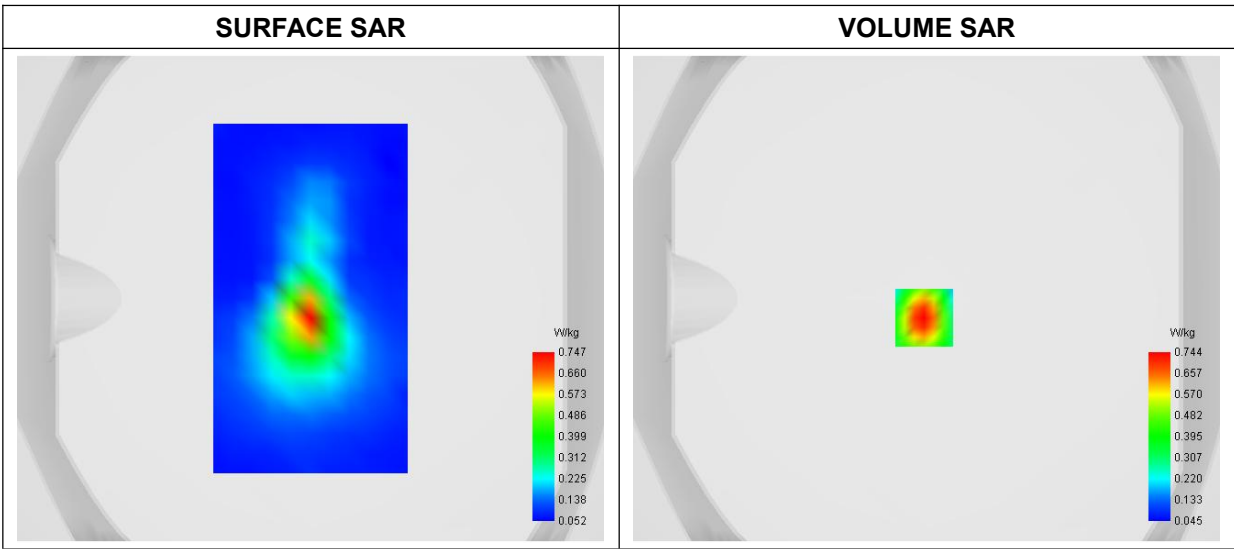


Maximum location: X=-1.00, Y=-8.00  
D. SAR 1g & 10g


|                |          |
|----------------|----------|
| SAR 10g (W/Kg) | 0.173130 |
| SAR 1g (W/Kg)  | 0.425413 |

E. Z Axis Scan

|            |        |        |        |        |        |        |        |        |        |
|------------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| Z (mm)     | 0.00   | 2.00   | 4.00   | 6.00   | 8.00   | 10.00  | 12.00  | 14.00  | 16.00  |
| SAR (W/Kg) | 1.2840 | 0.7443 | 0.4066 | 0.2155 | 0.1194 | 0.0743 | 0.0558 | 0.0515 | 0.0558 |

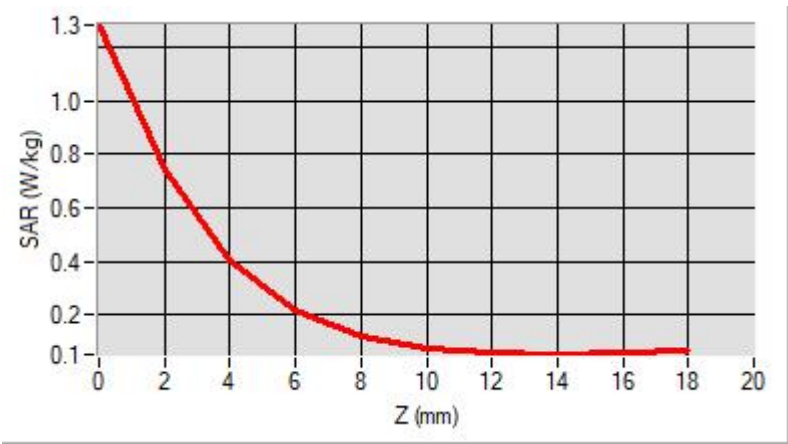

F. 3D Image

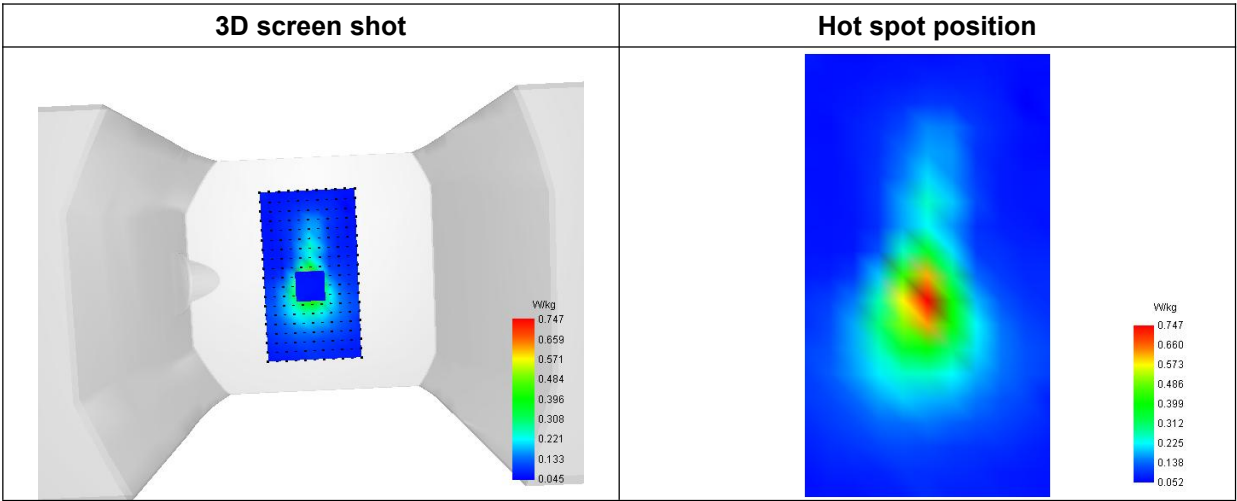

MEASUREMENT 115

Type: Phone measurement (Complete)  
Date of measurement: 2024-05-27  
Measurement duration: 12 minutes 3 seconds  
E-field Probe: SSE2 - SN 18/21 EPGO356; ConvF: 2.15; Calibrated: 2023-07-07


A. Experimental conditions

|                 |                           |
|-----------------|---------------------------|
| Area Scan       | dx=8mm dy=8mm             |
| Zoom Scan       | dx=4mm dy=4mm dz=2mm      |
| Phantom         | Flat Plane                |
| Device Position | Top                       |
| Band            | WiFi(5.8GHz)_802.11a-ANT0 |
| Channels        | High                      |
| Signal          | Duty Cycle: 1:1           |

B. SAR Measurement Results

|                                   |             |
|-----------------------------------|-------------|
| Frequency (MHz)                   | 5825.000000 |
| Relative Permittivity (real part) | 36.231718   |
| Conductivity (S/m)                | 5.241544    |
| Power Variation (%)               | 3.284700    |
| Ambient Temperature               | 22.8        |
| Liquid Temperature                | 22.8        |

C. SAR Surface and Volume

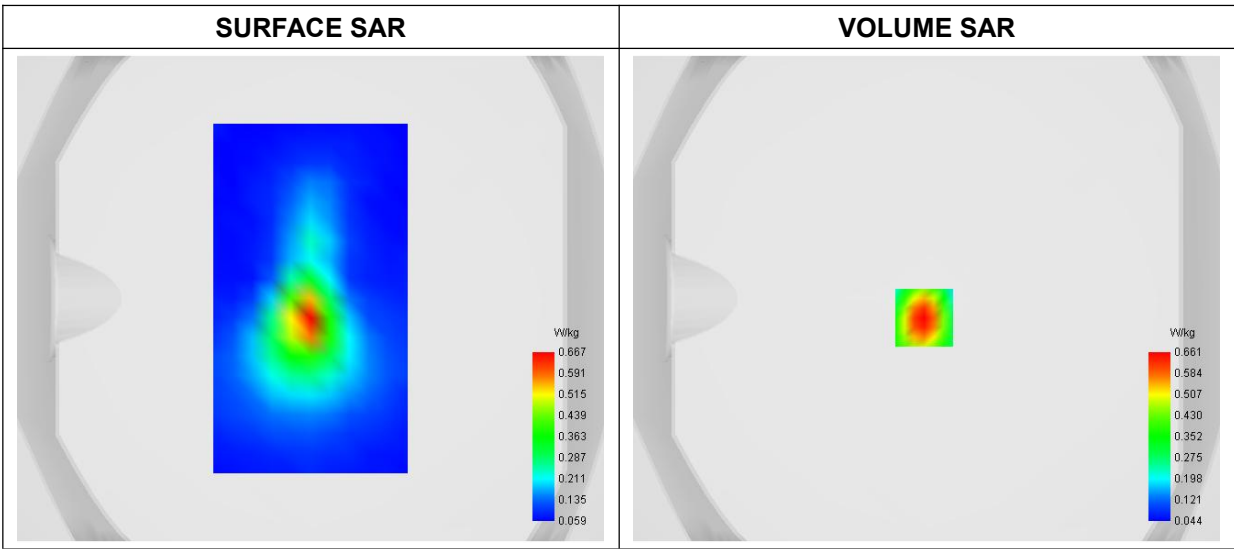


Maximum location: X=-1.00, Y=-8.00  
D. SAR 1g & 10g


|                |          |
|----------------|----------|
| SAR 10g (W/Kg) | 0.164801 |
| SAR 1g (W/Kg)  | 0.383323 |

E. Z Axis Scan

|            |        |        |        |        |        |        |        |        |        |
|------------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| Z (mm)     | 0.00   | 2.00   | 4.00   | 6.00   | 8.00   | 10.00  | 12.00  | 14.00  | 16.00  |
| SAR (W/Kg) | 1.1332 | 0.6609 | 0.3650 | 0.1974 | 0.1133 | 0.0740 | 0.0587 | 0.0569 | 0.0635 |

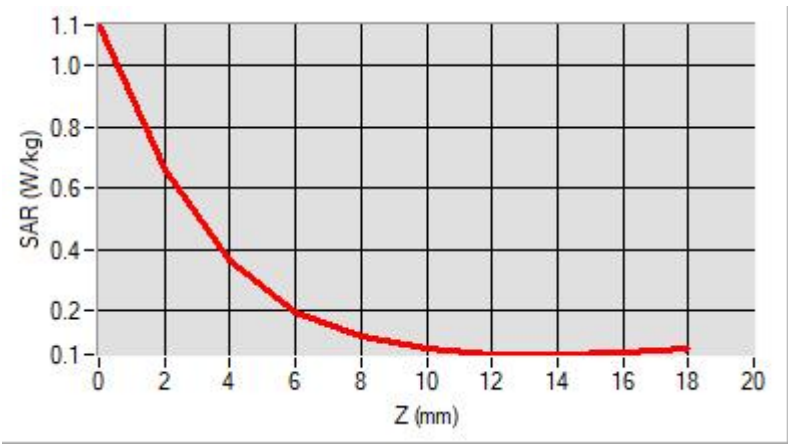

F. 3D Image

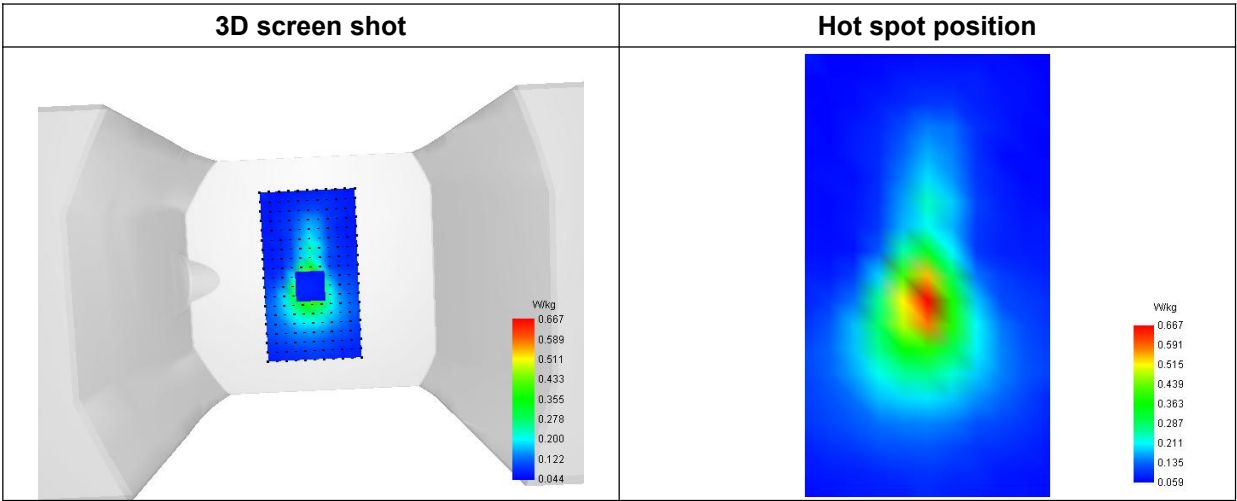

MEASUREMENT 116

Type: Phone measurement (Complete)  
Date of measurement: 2024-05-23  
Measurement duration: 12 minutes 3 seconds  
E-field Probe: SSE2 - SN 18/21 EPGO356; ConvF: 2.29; Calibrated: 2023-07-07


A. Experimental conditions

|                 |                           |
|-----------------|---------------------------|
| Area Scan       | dx=8mm dy=8mm             |
| Zoom Scan       | dx=5mm dy=5mm dz=4mm      |
| Phantom         | Flat Plane                |
| Device Position | Back                      |
| Band            | WiFi(2.4GHz)_802.11b-ANT7 |
| Channels        | Low                       |
| Signal          | Duty Cycle: 1:1           |

B. SAR Measurement Results

|                                   |             |
|-----------------------------------|-------------|
| Frequency (MHz)                   | 2412.000000 |
| Relative Permittivity (real part) | 39.121856   |
| Conductivity (S/m)                | 1.764196    |
| Power Variation (%)               | 3.457400    |
| Ambient Temperature               | 22.1        |
| Liquid Temperature                | 22.1        |

C. SAR Surface and Volume

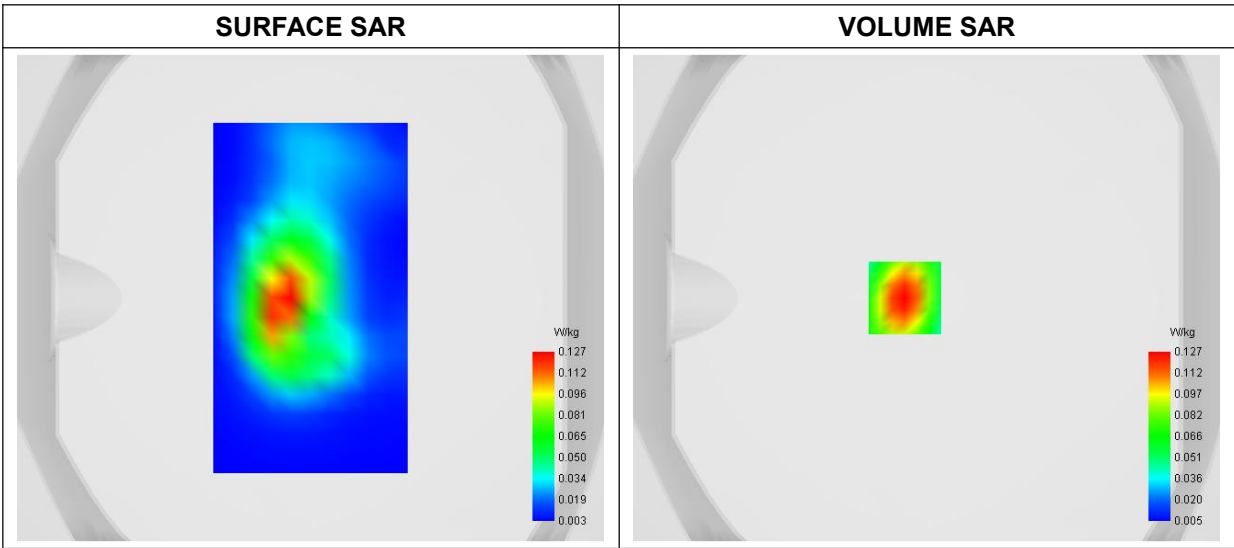


Maximum location: X=-9.00, Y=0.00  
D. SAR 1g & 10g


|                |          |
|----------------|----------|
| SAR 10g (W/Kg) | 0.058231 |
| SAR 1g (W/Kg)  | 0.117484 |

E. Z Axis Scan

|            |        |        |        |        |        |
|------------|--------|--------|--------|--------|--------|
| Z (mm)     | 0.00   | 4.00   | 8.00   | 12.00  | 16.00  |
| SAR (W/Kg) | 0.2234 | 0.1274 | 0.0698 | 0.0377 | 0.0205 |

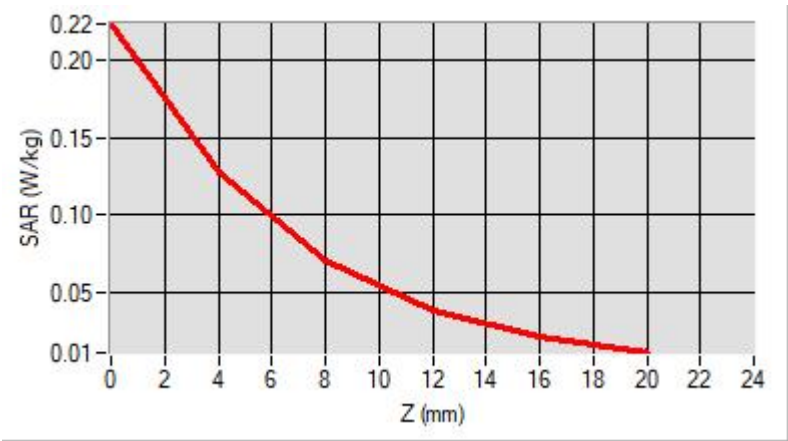

F. 3D Image

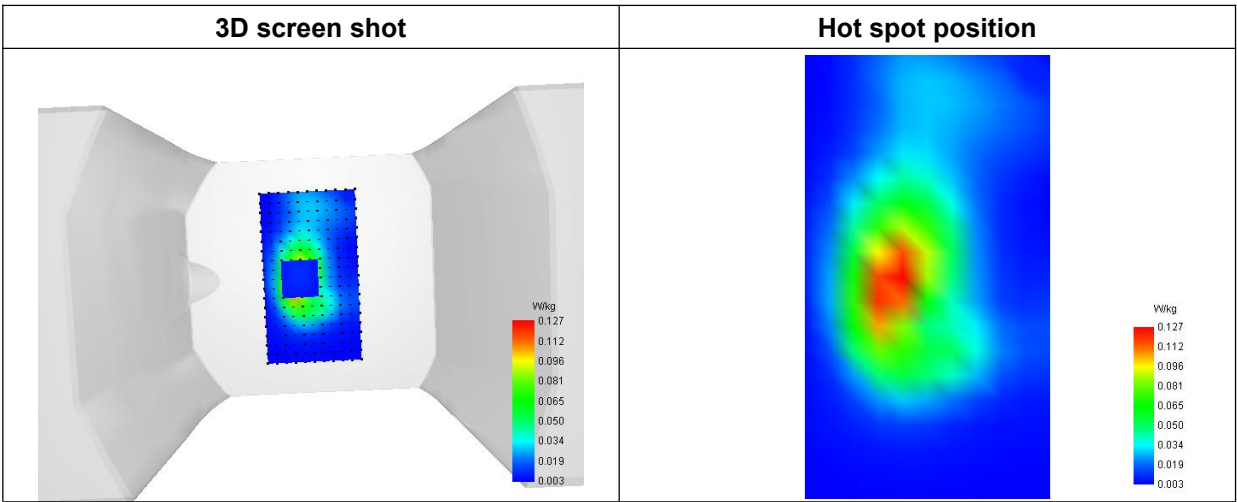

MEASUREMENT 117

Type: Measurement (Complete)  
Date of measurement: 2024-05-23  
Measurement duration: 12 minutes 3 seconds  
E-field Probe: SSE2 - SN 18/21 EPGO356; ConvF: 2.29; Calibrated: 2023-07-07


A. Experimental conditions

|                 |                      |
|-----------------|----------------------|
| Area Scan       | dx=8mm dy=8mm        |
| Zoom Scan       | dx=5mm dy=5mm dz=4mm |
| Phantom         | Flat Plane           |
| Device Position | Back                 |
| Band            | Bluetooth- GFSK_ANT7 |
| Channels        | Middle               |
| Signal          | Duty Cycle: 1:1      |

B. SAR Measurement Results

|                                   |             |
|-----------------------------------|-------------|
| Frequency (MHz)                   | 2480.000000 |
| Relative Permittivity (real part) | 39.121295   |
| Conductivity (S/m)                | 1.768914    |
| Power Variation (%)               | 3.115600    |
| Ambient Temperature               | 22.1        |
| Liquid Temperature                | 22.1        |

C. SAR Surface and Volume

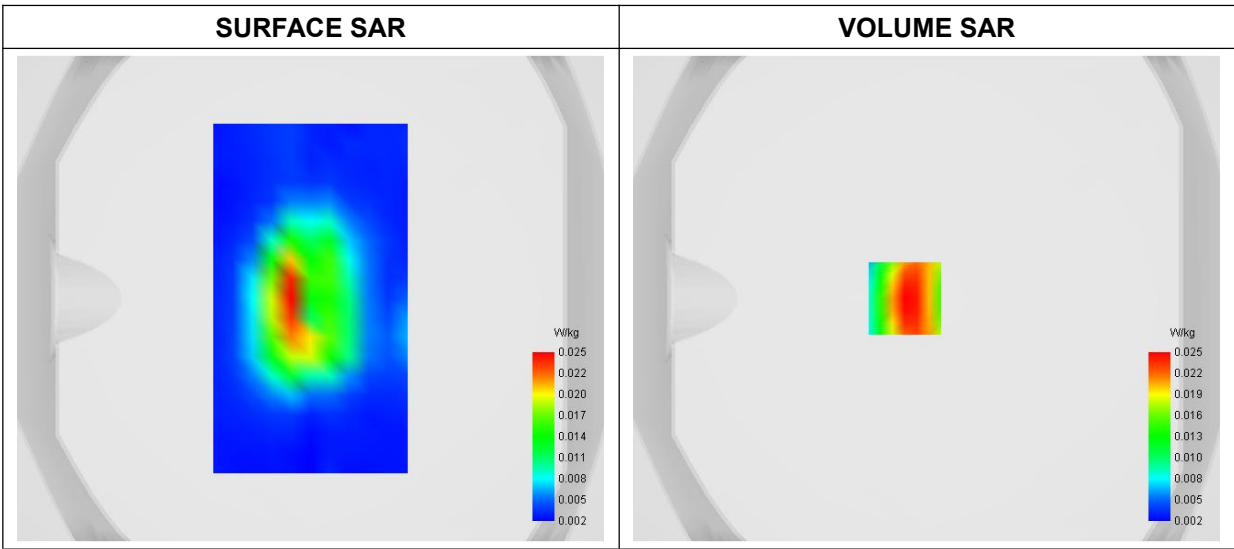


Maximum location: X=-9.00, Y=0.00  
D. SAR 1g & 10g


|                |          |
|----------------|----------|
| SAR 10g (W/Kg) | 0.012600 |
| SAR 1g (W/Kg)  | 0.024283 |

E. Z Axis Scan

|            |        |        |        |        |        |
|------------|--------|--------|--------|--------|--------|
| Z (mm)     | 0.00   | 4.00   | 8.00   | 12.00  | 16.00  |
| SAR (W/Kg) | 0.0471 | 0.0249 | 0.0129 | 0.0071 | 0.0047 |

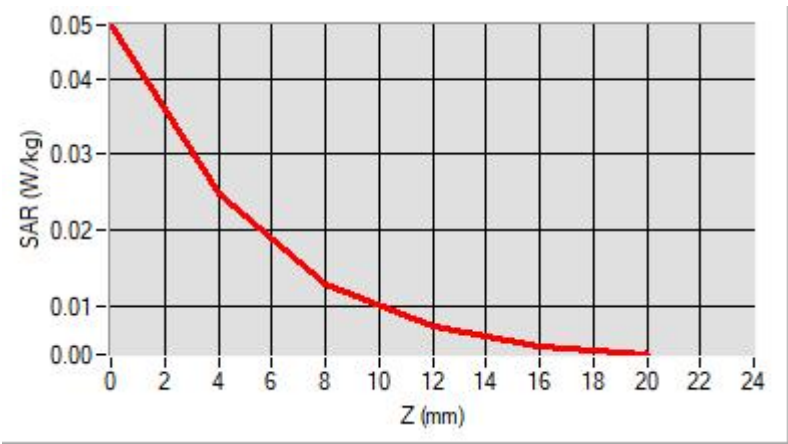

F. 3D Image

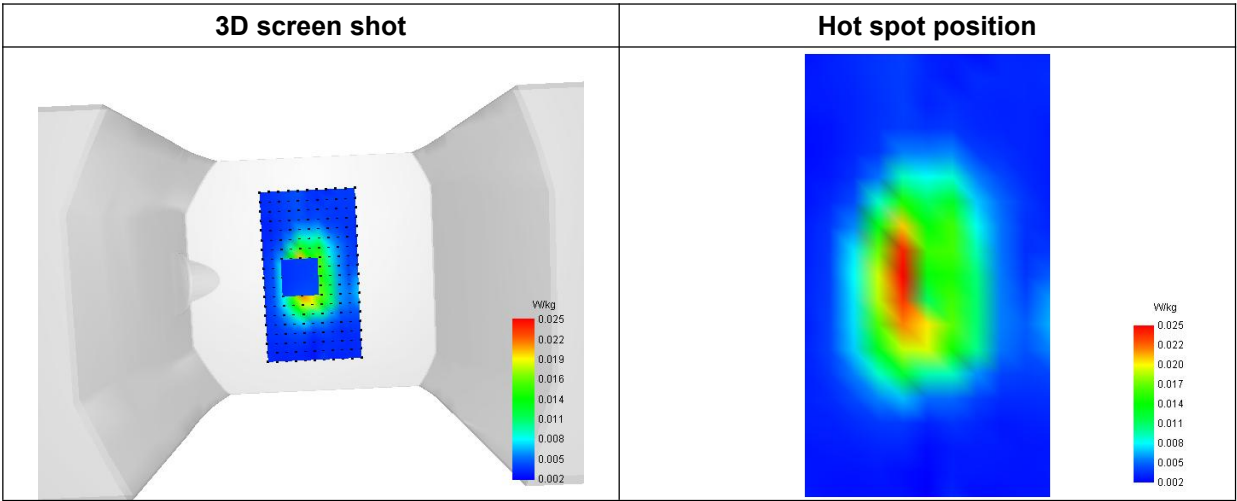

## Annex C. EUT Photos

---


### EUT View 1



### EUT View 2



Antenna View

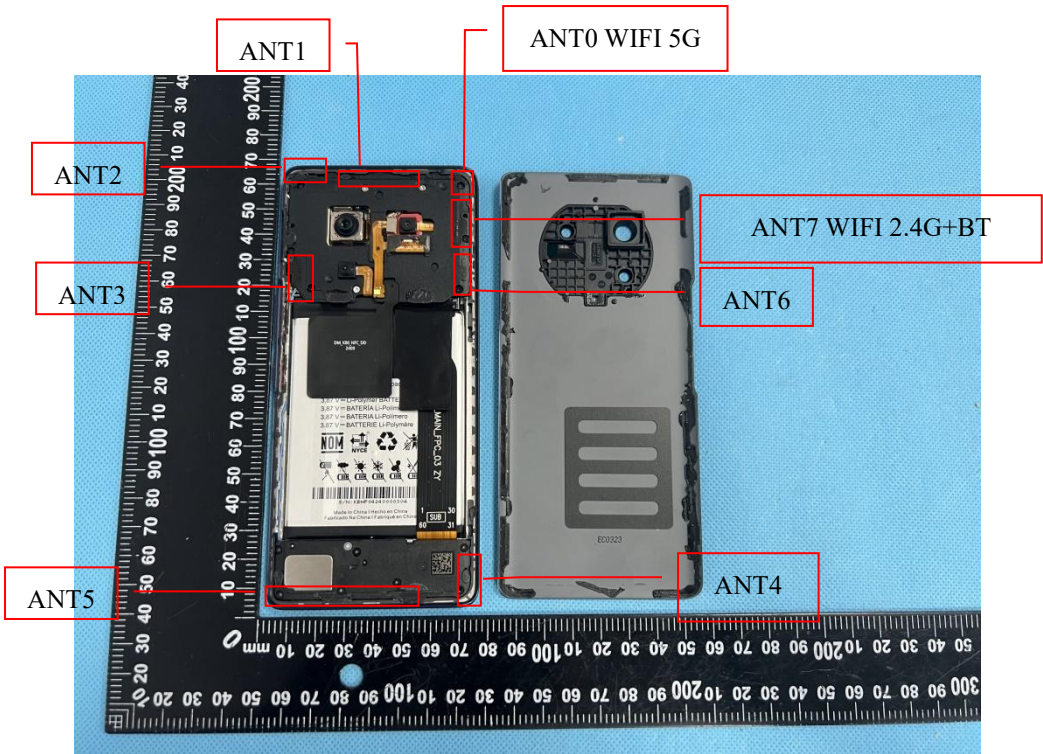


## Annex D. Test Setup Photos


---

### Head Exposure Conditions


**Right Cheek**

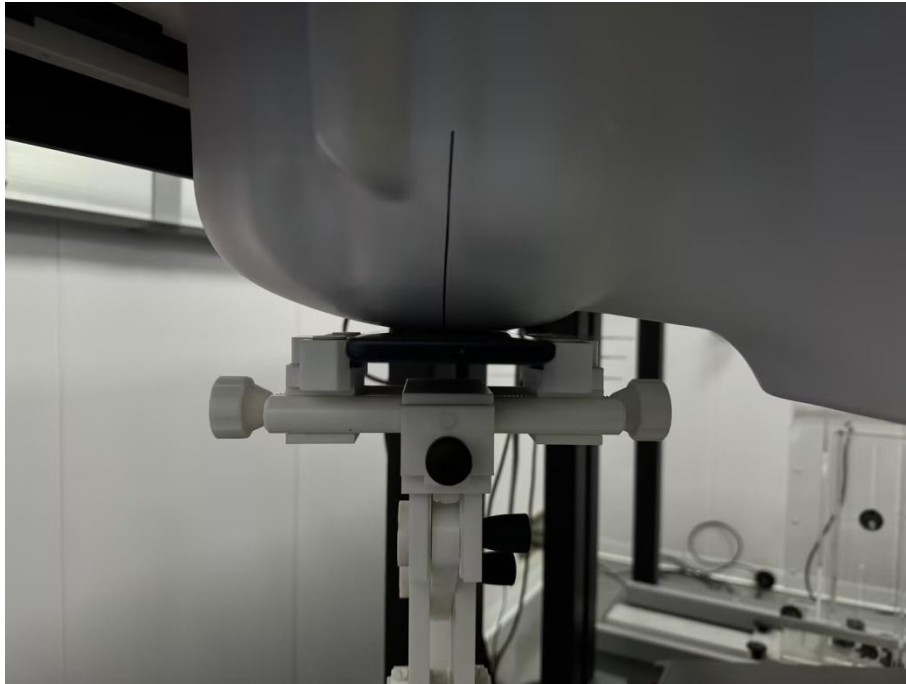


**Right Tilt**

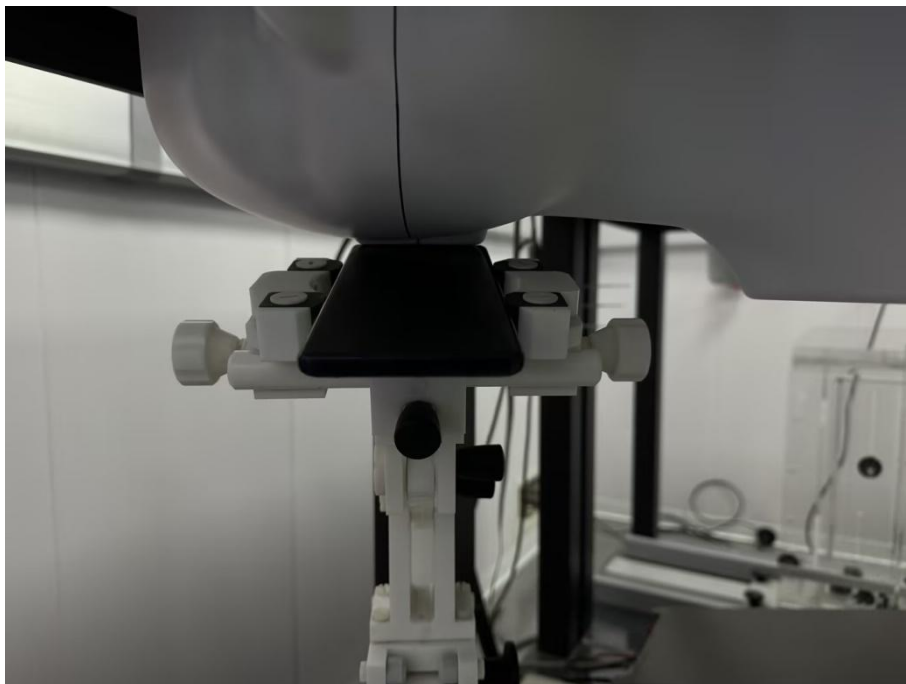

**Left Cheek**

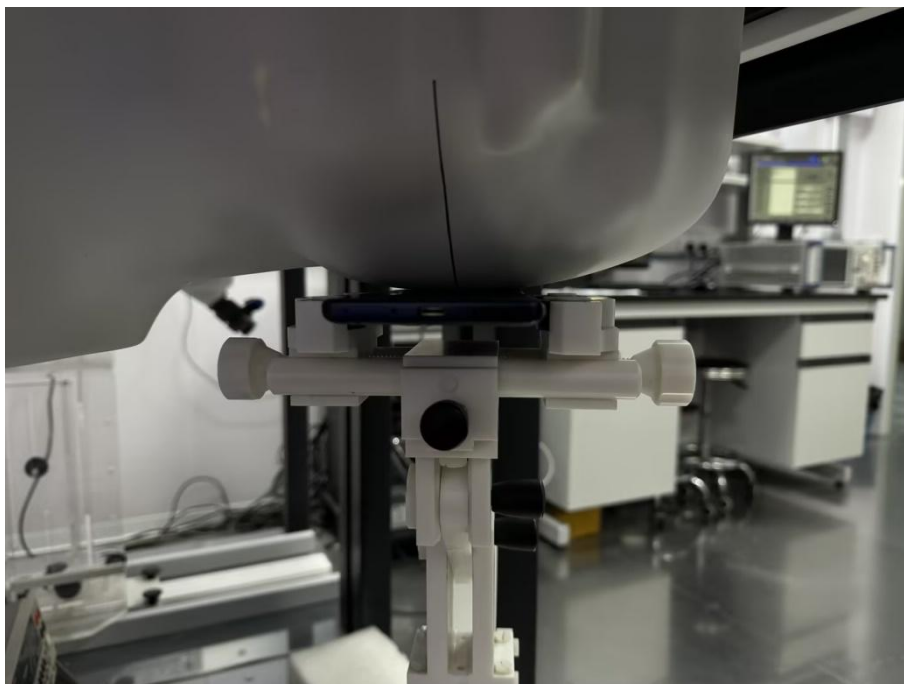


**Left Tilt**

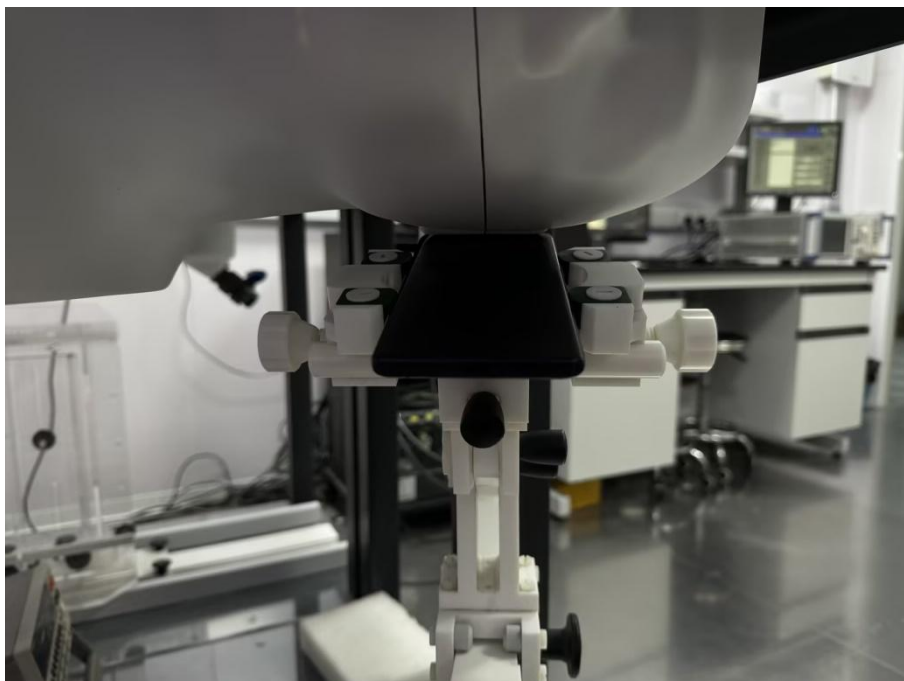


## Hotspot SAR mode Exposure Conditions

Test distance: 10mm

**Body Front**

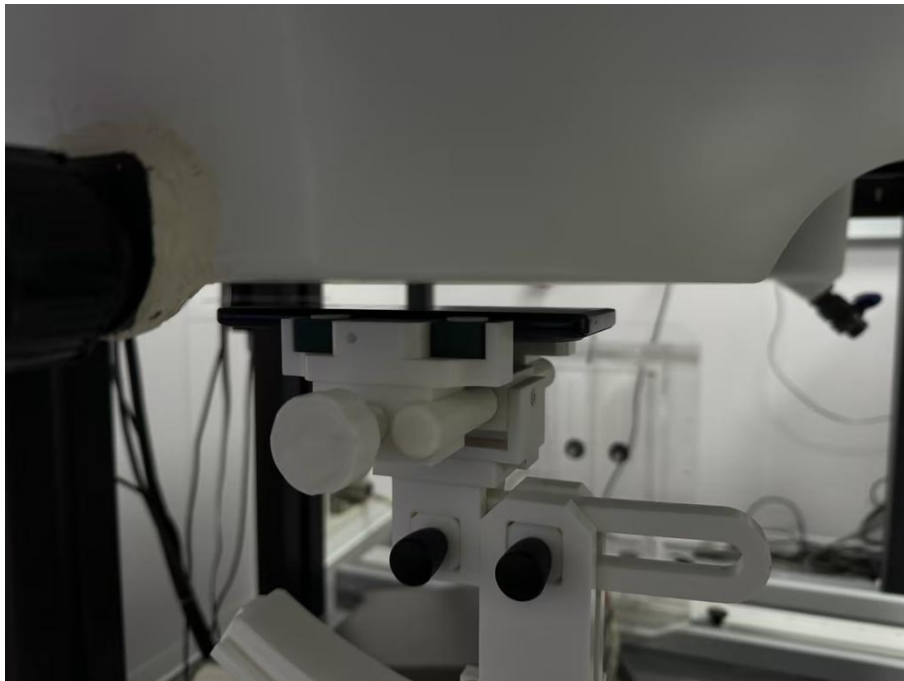


**Body Back**

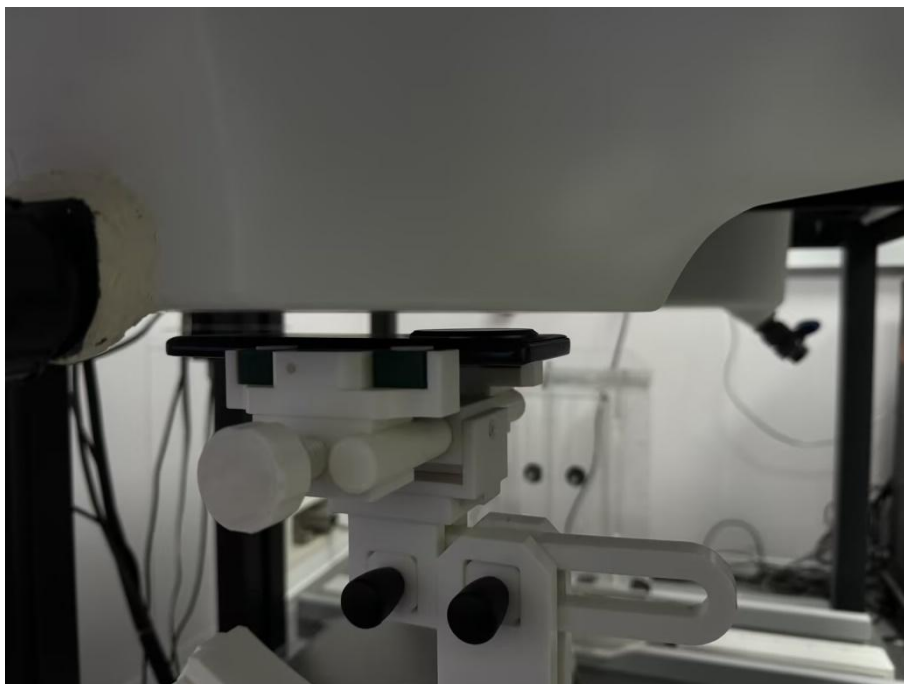


**Body Right**




**Body Left**

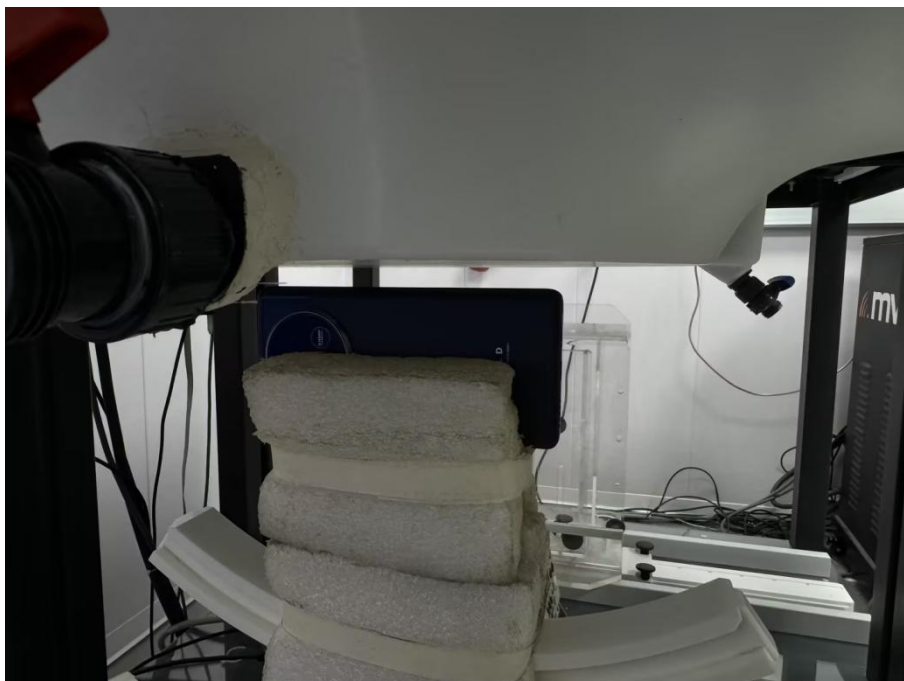

**Body Top**

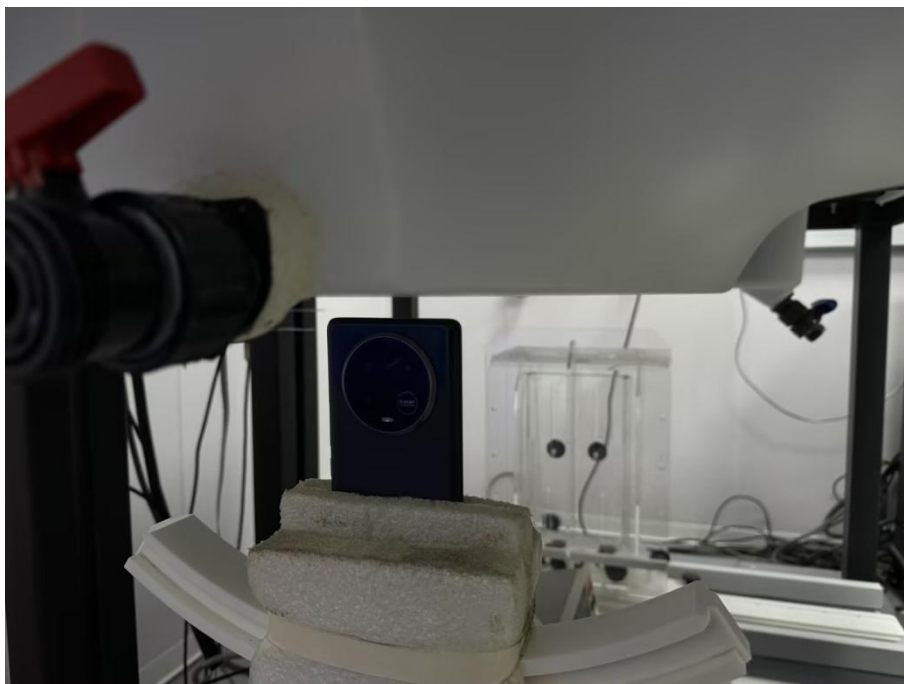


**Body Bottom**

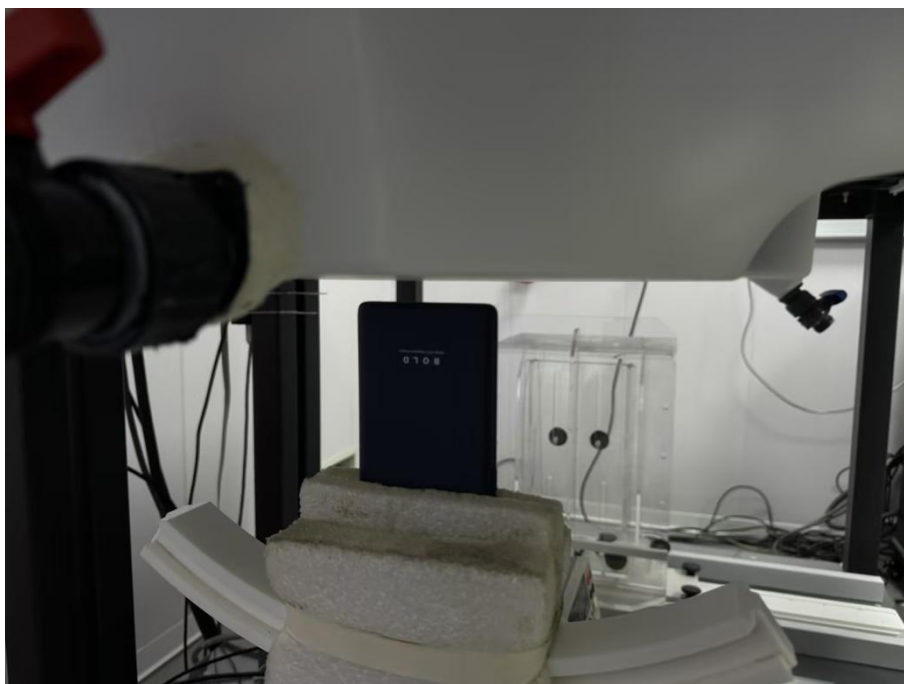

**Body-worn SAR mode Exposure Conditions**

**Test distance: 15mm**

**Body Front**

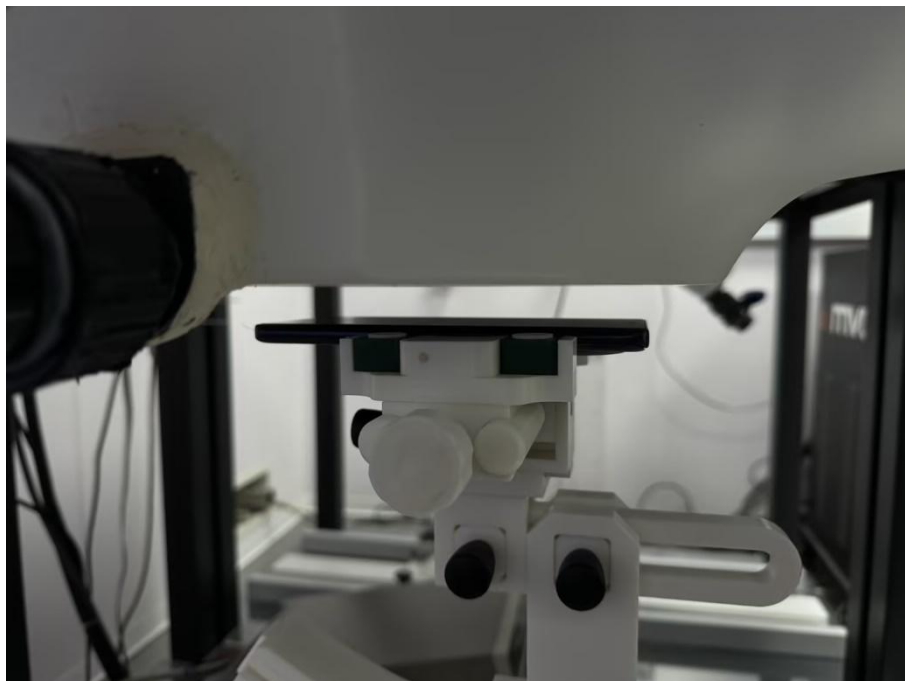

**Body Back**




**Body Right**



**Body Left**



**Body Top**

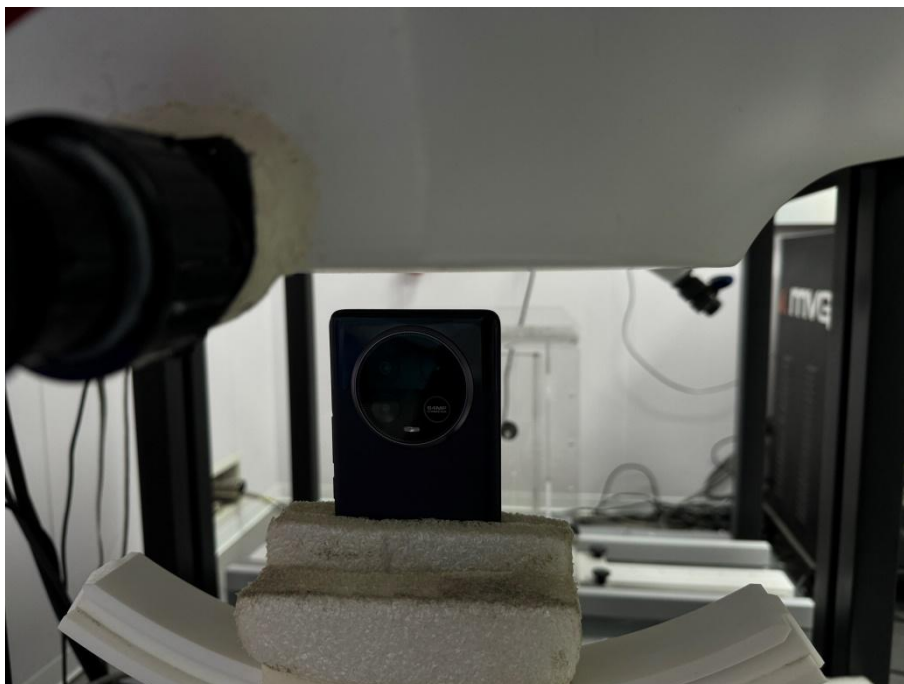

**Body Bottom**

