

# FCC Test Report

## Report No.: AGC00803240604FR01

FCC ID	:	2AKHJ-MD280
APPLICATION PURPOSE	:	Original Equipment
PRODUCT DESIGNATION	:	Wireless Mouse
BRAND NAME	:	N/A
MODEL NAME	:	MD280
APPLICANT	:	Shenzhen Hangshi Electronic Technology Co., Ltd.
DATE OF ISSUE	:	Jul. 29, 2024
STANDARD(S)	:	FCC Part 15 Subpart C §15.247
<b>REPORT VERSION</b>	:	V1.0







## **Report Revise Record**

Report Version	Revise Time	Issued Date	Valid Version	Notes	
V1.0	/	Jul. 29, 2024	Valid	Initial Release	



## **Table of Contents**

1. General Information	5
2. Product Information	6
2.1 Product Technical Description	6
2.2 Test Frequency List	6
2.3 Related Submittal(S) / Grant (S)	7
2.4 Test Methodology	7
2.5 Receiver Input Bandwidth	7
2.6 Equally Average Use of Frequencies and Behaviour	7
2.7 Pseudorandom Frequency Hopping Sequence	
2.8 Special Accessories	
2.9 Equipment Modifications	
2.10 Antenna Requirement	
3. Test Environment	
3.1 Address of The Test Laboratory	
3.2 Test Facility	
3.3 Environmental Conditions	
3.4 Measurement Uncertainty	11
3.5 List of Equipment Used	
4. System Test Configuration	
4.1 EUT Configuration	
4.2 EUT Exercise	
4.3 Configuration of Tested System	
4.4 Equipment Used in Tested System	
4.5 Summary of Test Results	
5. Description of Test Modes	
6. RF Output Power Measurement	
6.1 Provisions Applicable	
6.2 Measurement Procedure	
6.3 Measurement Setup (Block Diagram of Configuration)	
6.4 Measurement Result	
7. 20dB Bandwidth and 99% Occupied Bandwidth Measurement	
7.1 Provisions Applicable	
7.2 Measurement Procedure	
7.3 Measurement Setup (Block Diagram of Configuration)	
7.4 Measurement Results	
8. Conducted Band Edge and Out-of-Band Emissions	
8.1 Provisions Applicable	
8.2 Measurement Procedure	
8.3 Measurement Setup (Block Diagram of Configuration)	
	05



9. Radiated Spurious Emission	
9.1 Measurement Limit	
9.2 Measurement Procedure	
9.3 Measurement Setup (Block Diagram of Configuration)	
9.4 Measurement Result	
10. Number of Hopping Frequency Measurement	45
10.1 Provisions Applicable	45
10.2 Measurement Procedure	45
10.3 Measurement Setup (Block Diagram of Configuration)	45
10.4 Measurement Result	45
11. Time of Occupancy (Dwell Time) Measurement	
11.1 Provisions Applicable	47
11.2 Measurement Procedure	47
11.3 Measurement Setup (Block Diagram of Configuration)	
11.4 Measurement Result	
12. Frequency Separation Measurement	51
12.1 Provisions Applicable	51
12.2 Measurement Procedure	51
12.3 Measurement Setup (Block Diagram of Configuration)	51
12.4 Measurement Result	51
13. AC Power Line Conducted Emission Test	53
13.1 Measurement Limit	
13.2 Measurement Setup (Block Diagram of Configuration)	
13.3 Preliminary Procedure of Line Conducted Emission Test	
13.4 Final Procedure of Line Conducted Emission Test	54
13.5 Measurement Results	54
Appendix I: Photographs of Test Setup	57
Appendix II: Photographs of Test EUT	57



## 1. General Information

Applicant	Shenzhen Hangshi Electronic Technology Co., Ltd.
Address	2nd Floor, Building A1, Zone G, Democratic Western Industrial Zone, Park, Shajing Street, Bao'an District, Shenzhen, 518104, China.
Manufacturer	Shenzhen Hangshi Electronic Technology Co., Ltd.
Address	2nd Floor, Building A1, Zone G, Democratic Western Industrial Zone, Park, Shajing Street, Bao'an District, Shenzhen, 518104, China.
Factory	Shenzhen Hangshi Electronic Technology Co., Ltd.
Address	2nd Floor, Building A1, Zone G, Democratic Western Industrial Zone, Park, Shajing Street, Bao'an District, Shenzhen, 518104, China.
Product Designation	Wireless Mouse
Brand Name	N/A
Test Model	MD280
Series Model(s)	N/A
Difference Description	N/A
Date of receipt of test item	Jun. 24, 2024
Date of Test	Jun. 24, 2024 to Jul. 29, 2024
Deviation from Standard	No any deviation from the test method
Condition of Test Sample	Normal
Test Result	Pass
Test Report Form No	AGCER-FCC-BR-V1

Note: The test results of this report relate only to the tested sample identified in this report.

Prepared By

TCI Li

Cici Li (Project Engineer)

Jul. 29, 2024

**Reviewed By** 

alin Lin

Jul. 29, 2024

Approved By

Calvin Liu (Reviewer)

Max Zhang (Authorized Officer)

Max Zhang

Jul. 29, 2024



## 2. Product Information

## 2.1 Product Technical Description

Frequency Band	2400MHz-2483.5MHz
Operation Frequency Range	2402MHz-2480MHz
Bluetooth Version	V5.0
Modulation Type	BR 🖾 GFSK, EDR 🗍 $\pi$ /4-DQPSK, $\square$ 8DPSK
Number of channels	79 Channels
Channel Separation	1 MHz
Maximum Transmitter Power	-3.655dBm
Hardware Version	V1.0
Software Version	V1.0
Antenna Designation	PCB Antenna
Antenna Gain	-1dBi
Power Supply	DC 3.7V by battery or DC 5V by adapter

## 2.2 Test Frequency List

Frequency Band	Channel Number	Frequency			
2400~2483.5MHz	0	2402 MHz			
	1	2403 MHz			
	:	:			
	39	2441MHz			
	:	:			
	77	2479 MHz			
	78	2480 MHz			
Note: f = 2402 + 1k MHz, k = 0,, 78 ; "f "is the operating frequency (MHz); "k" is the operating channel.					



## 2.3 Related Submittal(S) / Grant (S)

This submittal(s) (test report) is intended for FCC ID: **2AKHJ-MD280**, filing to comply with Part 2, Part 15 of the Federal Communication Commission rules.

## 2.4 Test Methodology

The tests were performed according to following standards:

No.	Identity	Document Title			
1	FCC 47 CFR Part 2	Frequency allocations and radio treaty matters; general rules and regulation			
2	FCC 47 CFR Part 15	Radio Frequency Devices			
3	ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices			
4	KDB 558074 D01 15.247 Meas Guidance v05r02	Guidance for compliance measurements on Digital Transmission Systems, Frequency Hopping Spread Spectrum system, and Hybrid system devices operating under Section 15.247 of the FCC rules			

## 2.5 Receiver Input Bandwidth

The input bandwidth of the receiver is 1.3MHz, in every connection one Bluetooth device is the master and the other one is slave. The master determines the hopping sequence. The slave follows this sequence. Both devices shift between RX and TX time slot according to the clock of the master. Additionally, the type of connection (e.g. single of multi slot packet) is set up at the beginning of the connection. The master adapts its hopping frequency and its TX/RX timing according to the packet type of the connection. Also, the slave of the connection will use these settings. Repeating of a packet has no influence on the hopping sequence. The hopping sequence generated by the master of the connection will be followed in any case. That means, a repeated packet will not be send on the same frequency, it is send on the next frequency of the hopping sequence.

## 2.6 Equally Average Use of Frequencies and Behaviour.

The generation of the hopping sequence in connection mode depends essentially on two input values:

1. LAP/UAP of the master of the connection.

2. Internal master clock.

The LAP (lower address part) are the 24 LSB's of the 48 BD\_ADDRESS. The BD\_ADDRESS is an unambiguous number of every Bluetooth unit. The UAP (upper address part) are the 24MSB's of the 48BD\_ADDRESS

The internal clock of a Bluetooth unit is derived from a free running clock which is never adjusted and is never turned off. For behavior action with other units only offset is used. It has no relation to the time of the day. Its resolution is at least half the RX/TX slot length of 312.5us. The clock has a cycle of about one day(23h30).

In most case it is implemented as 28 bits counter. For the deriving of the hopping sequence the entire. LAP (24 bits),4LSB's(4bits) (Input 1) and the 27MSB's of the clock (Input 2) are used. With this input values different mathematical procedures (permutations, additions, XOR-operations) are performed to generate the Sequence. This will be done at the beginning of every new transmission.

Regarding short transmissions the Bluetooth system has the following behavior:


The first connection between the two devices is established, a hopping sequence was generated. For Transmitting the wanted data the complete hopping sequence was not used. The connection ended. The second connection will be established. A new hopping sequence is generated. Due to the fact the Bluetooth clock has a different value, because the period between the two transmission is longer (and it Cannot be shorter) than the minimum resolution of the clock(312.5us). The hopping sequence will always differ from the first one.



## 2.7 Pseudorandom Frequency Hopping Sequence

The pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first ONE of 9 consecutive ONEs; i.e. the shift register is initialized with nine ones.

- Number of shift register stages: 9
- Length of pseudo-random sequence: 29 1 = 511 bits
- Longest sequence of zeros: 8 (non-inverted signal)



Linear Feedback Shift Register for Generation of The PRBS Sequence

An example of Pseudorandom Frequency Hopping Sequence as follow:

44	35	78	03		20	76	02	19		 21	64	75
				7		Ĩ				 1		
			i			i				1		
			i i			i				1		
			<u>_</u>	i		_!			l	 _i		

Each frequency used equally on the average by each transmitter.

The system receivers have input bandwidths that match the hopping channel bandwidths of their Corresponding transmitters and shift frequencies in synchronization with the transmitted signals.



## 2.8 Special Accessories

Not available for this EUT intended for grant.

## **2.9 Equipment Modifications**

Not available for this EUT intended for grant.

## 2.10 Antenna Requirement

#### Standard Requirement

## 15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

## 15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi

#### EUT Antenna:

The non-detachable antenna inside the device cannot be replaced by the user at will. The gain of the antenna is -1dBi.



## 3. Test Environment

## 3.1 Address of The Test Laboratory

Laboratory: Attestation of Global Compliance (Shenzhen) Co., Ltd.

Address: 1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

## 3.2 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

## CNAS-Lab Code: L5488

Attestation of Global Compliance (Shenzhen) Co., Ltd. has been assessed and proved to follow CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories.)

## A2LA-Lab Cert. No.: 5054.02

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to follow ISO/IEC 17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

## FCC-Registration No.: 975832

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files with Registration 975832.

## IC-Registration No.: 24842(CAB identifier: CN0063)

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the Certification and Engineering Bureau of Industry Canada. The acceptance letter from the IC is maintained in our files with Registration 24842.



## **3.3 Environmental Conditions**

	Normal Conditions
Temperature range (°C)	15 - 35
Relative humidity range	20 % - 75 %
Pressure range (kPa)	86 - 106
Power supply	DC 3.7V

## **3.4 Measurement Uncertainty**

The reported uncertainty of measurement y  $\pm$ U, where expended uncertainty U is based on a standard

uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95%.					
Item	Measurement Uncertainty				
Uncertainty of Conducted Emission for AC Port	$U_c = \pm 2.9 \text{ dB}$				
Uncertainty of Radiated Emission below 1GHz	$U_c = \pm 3.9 \text{ dB}$				
Uncertainty of Radiated Emission above 1GHz	$U_c = \pm 4.9 \text{ dB}$				
Uncertainty of total RF power, conducted	$U_c = \pm 0.8 \text{ dB}$				
Uncertainty of RF power density, conducted	$U_c = \pm 2.6 \text{ dB}$				
Uncertainty of spurious emissions, conducted	$U_c = \pm 2 \%$				
Uncertainty of Occupied Channel Bandwidth	U <sub>c</sub> = ±2 %				



## 3.5 List of Equipment Used

• R	RF Conducted Test System								
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)		
$\boxtimes$	AGC-ER-E036	Spectrum Analyzer	Agilent	N9020A	MY49100060	2024-05-24	2025-05-23		
$\boxtimes$	AGC-ER-E062	Power Sensor	Agilent	U2021XA	MY54110007	2024-02-01	2025-01-31		
$\boxtimes$	AGC-ER-E063	Power Sensor	Agilent	U2021XA	MY54110009	2024-02-01	2025-01-31		
$\boxtimes$	AGC-EM-A001	6dB Attenuator	Eeatsheep	LM-XX-6-5W	N/A	2023-09-21	2025-09-20		
	AGC-ER-E083	Signal Generator	Agilent	E4421B	US39340815	2024-05-23	2025-05-22		
$\boxtimes$	N/A	RF Connection Cable	N/A	1#	N/A	Each time	N/A		
	N/A	RF Connection Cable	N/A	2#	N/A	Each time	N/A		

• F	Radiated Spurious Emission						
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)
$\boxtimes$	AGC-EM-E046	EMI Test Receiver	R&S	ESCI	10096	2024-02-01	2025-01-31
	AGC-EM-E116	EMI Test Receiver	R&S	ESCI	100034	2024-05-24	2025-05-23
$\boxtimes$	AGC-EM-E061	Spectrum Analyzer	Agilent	N9010A	MY53470504	2024-05-28	2025-05-27
$\boxtimes$	AGC-EM-E086	Loop Antenna	ZHINAN	ZN30900C	18051	2024-03-05	2026-03-04
$\boxtimes$	AGC-EM-E001	Wideband Antenna	SCHWARZBECK	VULB9168	D69250	2023-05-11	2025-05-10
$\boxtimes$	AGC-EM-E029	Broadband Ridged Horn Antenna	ETS	3117	00034609	2024-03-31	2025-03-30
$\boxtimes$	AGC-EM-E082	Horn Antenna	SCHWARZBECK	BBHA 9170	#768	2023-09-24	2025-09-23
$\boxtimes$	AGC-EM-E146	Pre-amplifier	ETS	3117-PA	00246148	2022-08-04	2024-08-03
$\boxtimes$	AGC-EM-A119	2.4GHz Filter	SongYi	N/A	N/A	2024-05-23	2025-05-22
$\square$	AGC-EM-A138	6dB Attenuator	Eeatsheep	LM-XX-6-5W	N/A	2023-06-09	2025-06-08
	AGC-EM-A139	6dB Attenuator	Eeatsheep	LM-XX-6-5W	N/A	2023-06-09	2025-06-08

• A	AC Power Line Conducted Emission						
Used	Equipment No.	Test Equipment	nuinment   Manutacturer   Model No   Serial No				Next Cal. Date (YY-MM-DD)
$\boxtimes$	AGC-EM-E045	EMI Test Receiver	R&S	ESPI	101206	2024-05-28	2025-05-27
$\boxtimes$	AGC-EM-A130	6dB Attenuator	Eeatsheep	LM-XX-6-5W	DC-6GZ	2023-06-09	2025-06-08
$\square$	AGC-EM-E023	AMN	R&S	100086	ESH2-Z5	2024-05-28	2025-05-27



• Te	Test Software					
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Version Information	
$\boxtimes$	AGC-EM-S001	CE Test System	R&S	ES-K1	V1.71	
	AGC-EM-S003	RE Test System	FARA	EZ-EMC	V.RA-03A	
$\boxtimes$	AGC-EM-S004	RE Test System	Tonscend	TS <sup>+</sup> Ver2.1(JS32-RE)	4.0.0.0	
$\boxtimes$	AGC-ER-S012	BT/WIFI Test System	Tonscend	JS1120-2	2.6	
$\boxtimes$	AGC-EM-S011	RSE Test System	Tonscend	TS+-Ver2.1(JS36-RSE)	4.0.0.0	



## 4. System Test Configuration

## 4.1 EUT Configuration


The EUT configuration for testing is installed on RF field strength measurement to meet the Commission's requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

## 4.2 EUT Exercise

The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

## 4.3 Configuration of Tested System

Radiated Emission Configure:



Conducted Emission Configure:

EUT	AE
-----	----

## 4.4 Equipment Used in Tested System

The following peripheral devices and interface cables were connected during the measurement: Test Accessories Come From The Laboratory

No.	Equipment	Manufacturer	Model No.	Specification Information	Cable	
1	Control Box		USB-TTL			
2	Adapter	Huawei	HW-200440C00	Input(AC): 100V-240V 50/60Hz 2.4A Output(DC): USB-C(5V/3A;9V/3A;10V/4A;11V/6A;1 2V/3A;15V/3A;20V4.4A) USB-A(5V/2A;10V/4A;11V/6A;20V/4.4 A)		
Tes	Test Accessories Come From The Manufacturer					

No.	Equipment	Manufacturer	Model No.	Specification Information	Cable
1					

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.



## 4.5 Summary of Test Results

Item	FCC Rules	Description of Test	Result
1	§15.203&15.247(b)(4)	Antenna Equipment	Pass
2	§15.247 (b)(1)	RF Output Power P	
3	§15.247 (a)(1)	20 dB Bandwidth Pas	
4	§15.247 (d)	Conducted Band Edge and Out-of-Band Emissions Pa	
5	§15.209	Radiated Spurious Emission Pa	
6	§15.247 (a)(1)(iii)	Number of Hopping Frequency Pas	
7	§15.247 (a)(1)(iii)	Time of Occupancy Pas	
8	§15.247 (a)(1)	Frequency Separation Pass	
9	§15.207	AC Power Line Conducted Emission Pass	



## 5. Description of Test Modes

	Summary table of Test Cases					
Test Item	Data Rate / Modulation					
rest item	Bluetooth – BR (GFSK)					
Conducted & Test Cases	Mode 1: Bluetooth Tx CH00_2402 MHz_1Mbps (Battery powered or AC/DC adapter/Connect PC) Mode 2: Bluetooth Tx CH39_2441 MHz_1Mbps (Battery powered or AC/DC adapter/Connect PC) Mode 3: Bluetooth Tx CH78_2480 MHz_1Mbps (Battery powered or AC/DC adapter/Connect PC) Mode4: Bluetooth Tx Hopping-1Mbps (Battery powered or AC/DC adapter/Connect PC)					
AC Conducted Emission Note:	Mode 1: Bluetooth Link + Battery + USB Cable (Charging from AC Adapter/ Connect PC)					
2. The bat 3. For Rac 4. For Cor	e result of the worst case was recorded in the report, if no other cases. tery is full-charged during the test. diated Emission, 3axis were chosen for testing for each applicable mode. houtced Test method, a temporary antenna connector is provided by the manufacture. Software Setting Diagram States RF Test - V2.10,en(Built on Mar 28 302) FileD Help(D) FileD					
	[RCV:=]04 0E 04 01 6C 20 00 04 0E 06 01 1F 20 00 98 22         fcc_power         DDDDck [RCV:=]04 0E 06 01 1F 20 00 3D 30					



## 6. RF Output Power Measurement

## **6.1 Provisions Applicable**

The maximum out power permissible output power is 1 Watt for all frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels.

The maximum out power permissible output power is 0.125 watts for all other frequency hopping systems in the 2400-2483.5 MHz band.


## **6.2 Measurement Procedure**

⊠For Peak power test:

- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2. Span: Approximately five times the 20 dB bandwidth, centered on a hopping channel.
- 3. RBW > 20 dB bandwidth of the emission being measured.
- 4. VBW  $\geq$ RBW.
- 5. Sweep: Auto.
- 6. Detector function: Peak.
- 7. Trace: Max hold.
- 8. Allow trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. The indicated level is the peak output power, after any corrections for external attenuators and cables.

## 6.3 Measurement Setup (Block Diagram of Configuration)


For peak power test setup

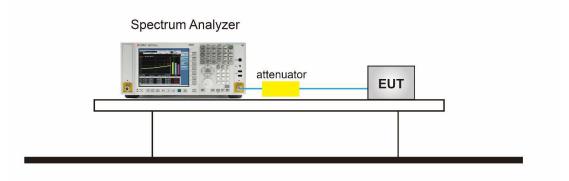




## **6.4 Measurement Result**

Test Data of Conducted Output Power					
Test Mode	Test Frequency (MHz)	Peak Power (dBm)	Limits (dBm)	Pass or Fail	
	2402	-4.401	≤21	Pass	
GFSK	2441	-4.041	≤21	Pass	
	2480	-3.655	≤21	Pass	





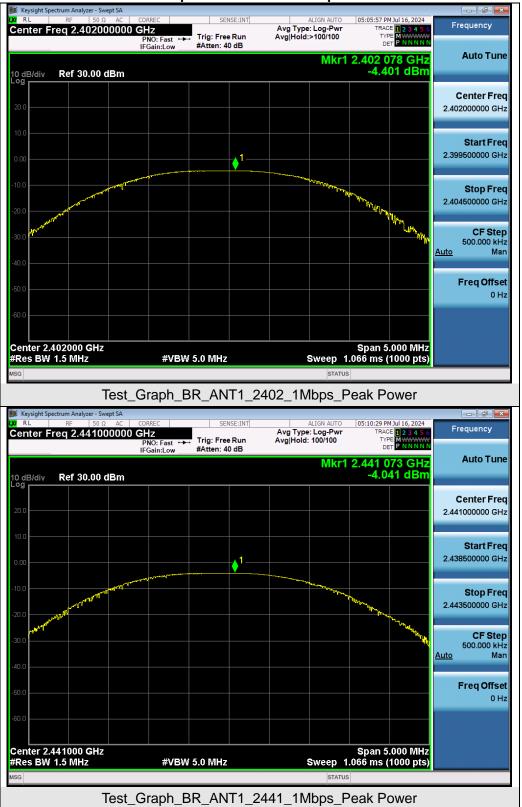

#### **Test Graphs of Conducted Output Power**







## 7. 20dB Bandwidth and 99% Occupied Bandwidth Measurement

## 7.1 Provisions Applicable


There is no corresponding limit requirement for this test item.

## 7.2 Measurement Procedure

The testing follows the ANSI C63.10 Section 6.9.3 (OBW) and 6.9.2 (20dB BW).

- The 20dB bandwidth spectrum analyzer setting reference is as follows:
- 1. Set RBW ≥ 1% to 5% of the 20dB bandwidth
- 2. VBW = Approximately three times RBW
- 3. Span = Approximately 2 to 5 times the 20dB bandwidth, centered on a hopping channel
- 4. Detector = Peak
- 5. Trace mode = Max hold
- 6. Sweep = Auto couple
- 7. Allow the trace to stabilize
- 8. Measure the maximum width of the emission that is constrained by the frequencies associated
- 9. with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 20
- 10. dB relative to the maximum level in the fundamental emission.
- The 99% bandwidth spectrum analyzer setting reference is as follows:
- 1. Span = 1.5 times to 5 times the OBW
- 2. Set RBW = 1% to 5% the OBW
- 3. VBW  $\geq$  3 × RBW
- 4. Detector = Peak
- 5. Trace mode = Max hold
- 6. Sweep = Auto couple
- 7. Allow the trace was allowed to stabilize


## 7.3 Measurement Setup (Block Diagram of Configuration)

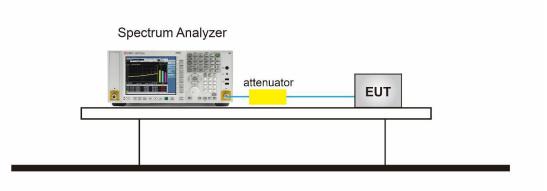



#### 7.4 Measurement Results

Test Data of Occupied Bandwidth and -20dB Bandwidth					
Test Mode	Test Frequency (MHz)	99% Occupied Bandwidth (MHz)	-20dB Bandwidth (MHz)	Limits	Pass or Fail
	2402	0.878	0.953	N/A	Pass
GFSK	2441	0.914	0.940	N/A	Pass
	2480	0.971	1.040	N/A	Pass

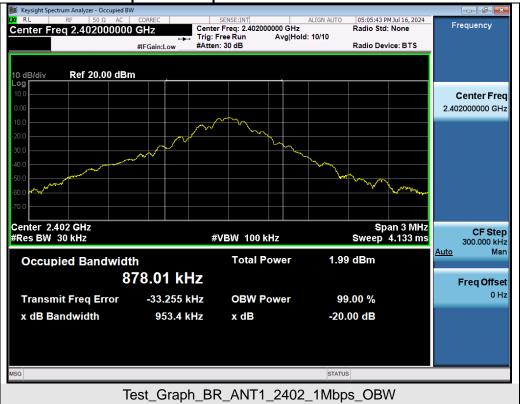

## Test Graphs of Occupied Bandwidth and -20 Bandwidth







## 8. Conducted Band Edge and Out-of-Band Emissions

## **8.1 Provisions Applicable**


In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

## 8.2 Measurement Procedure

The testing follows the ANSI C63.10 Section 6.10.4 and 7.8.8:


- Reference level measurement
- 1. Span = Wide enough to capture the peak level of the emission operating on the channel closest to the band edge, as well as any modulation products which fall outside of the authorized band of operation.
- 2. RBW = 100kHz
- 3. VBW = 300kHz
- 4. Detector = Peak
- 5. Sweep time = Auto couple
- 6. Trace mode = Max hold
- 7. Allow the trace to stabilize. Set the marker on the emission at the band edge, or on the highest modulation product outside of the band, if this level is greater than that at the band edge. Enable the marker-delta function, then use the marker-to-peak function to move the marker to the peak of the in-band emission.
- Emission level measurement
- 1. Span = Wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic. Typically, several plots are required to cover this entire span.
- 2. RBW = 100kHz
- 3. VBW = 300kHz
- 4. Detector = Peak
- 5. Sweep time = Auto couple
- 6. Trace mode = Max hold
- 7. Trace was allowed to stabilize
- 8. Set the marker on the peak of any spurious emission recorded. The level displayed must comply with the limit specified in this section.

## 8.3 Measurement Setup (Block Diagram of Configuration)

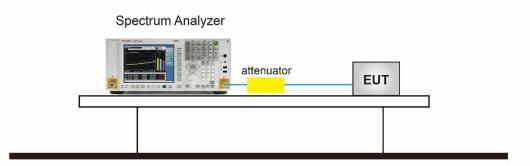




#### **8.4 Measurement Results**

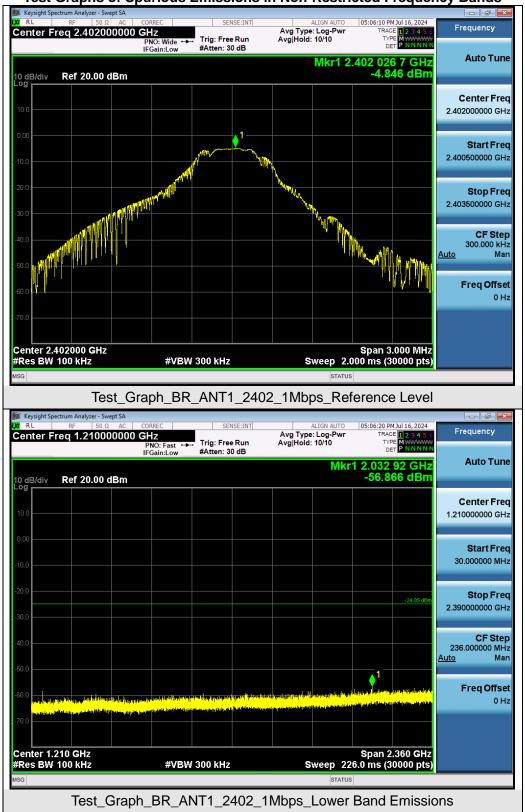


## Test Graphs of Spurious Emissions in Non-Restricted Frequency Bands




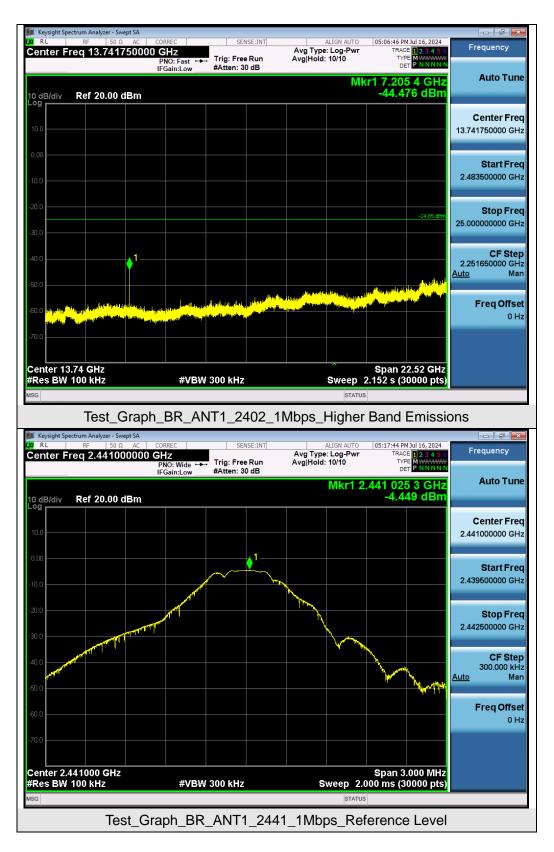




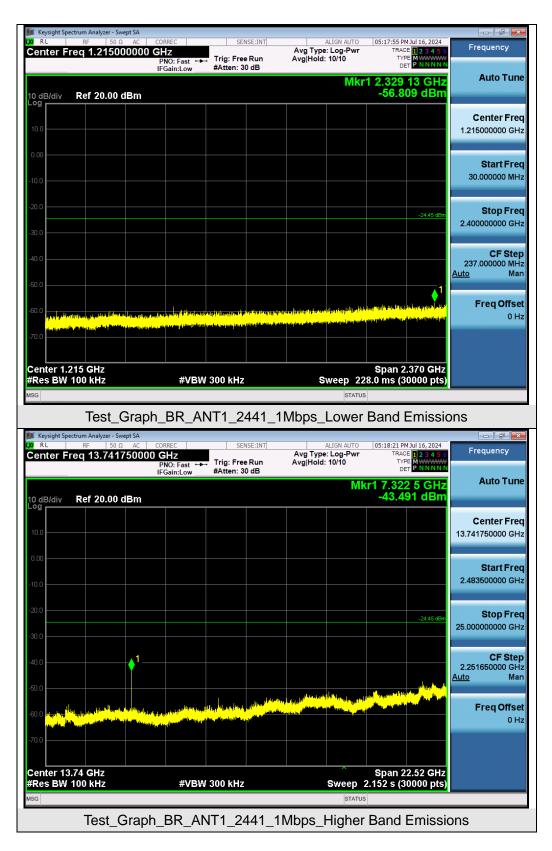



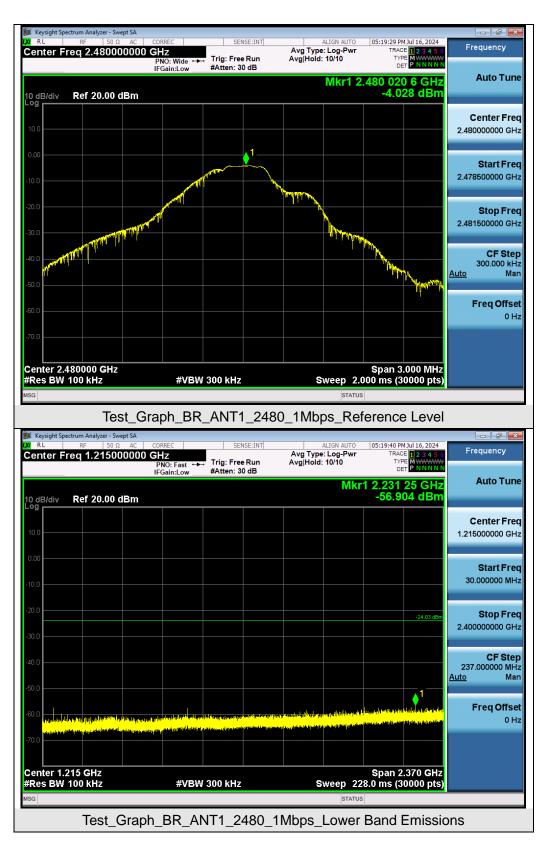



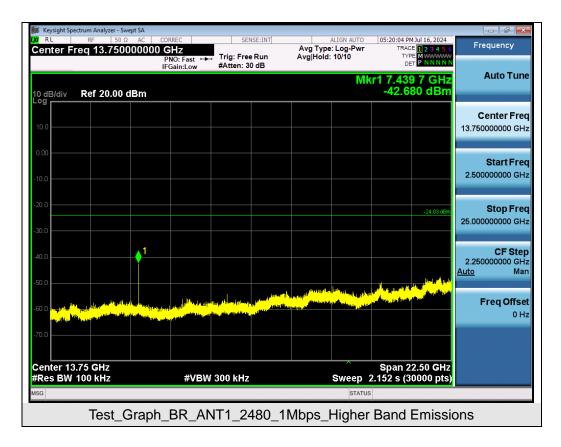






#### Test Graphs of Band Edge Emissions in Non-Restricted Frequency Bands



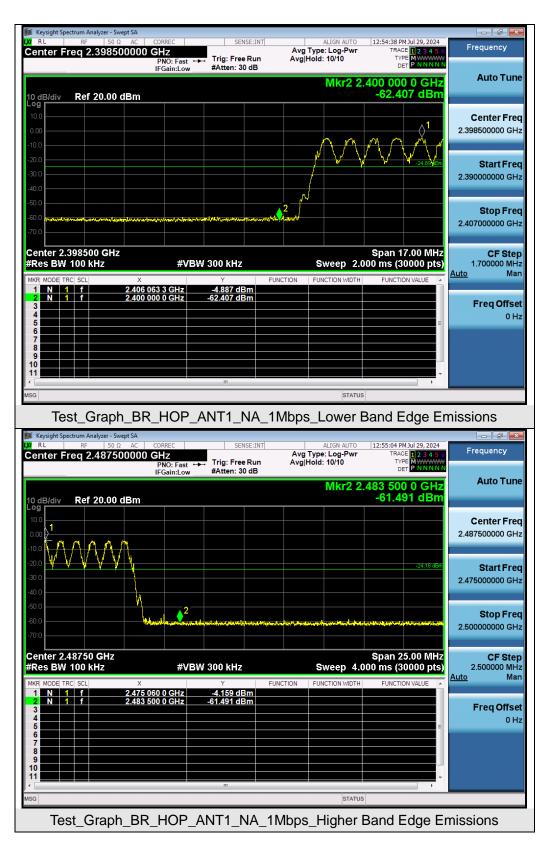



## 9. Radiated Spurious Emission

## 9.1 Measurement Limit

15.209 Limit in the below table has to be followed

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

Note: All modes were tested for restricted band radiated emission, the test records reported below are the worst result compared to other modes.

## 9.2 Measurement Procedure

- 1. The EUT was placed on the top of the turntable 0.8 or 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
- 2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- 3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
- 4. For each suspected emission, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
- 5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
- 6. For emissions above 1GHz, use 1MHz RBW and 3MHz VBW for peak reading. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- 7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection"

Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.



absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.

- 8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
- 9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- 10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High Low scan is not required in this case.

Spectrum Parameter	Setting		
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP		
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP		
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP		
Start ~Stop Frequency	1GHz~26.5GHz 1MHz/3MHz for Peak, 1MHz/3MHz for Average		

#### The following table is the setting of spectrum analyzer and receiver.

Receiver Parameter	Setting			
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP			
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP			
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP			



## • Quasi-Peak Measurements below 1GHz

- 1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
- 2. Span was set greater than 1MHz
- 3. RBW = as shown in the table above
- 4. Detector = CISPR quasi-peak
- 5. Sweep time = auto couple
- 6. Trace was allowed to stabilize

## • Peak Measurements above 1GHz


- 1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
- 2. RBW = 1MHz
- 3. VBW = 3MHz
- 4. Detector = peak
- 5. Sweep time = auto couple
- 6. Trace mode = max hold
- 7. Trace was allowed to stabilize

## <u>Average Measurements above 1GHz</u>


- 1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
- 2. RBW = 1MHz
- 3. VBW  $\geq$  [3 × RBW]
- 4. Detector = Power averaging (rms)
- 5. Averaging type = power (i.e., rms)
- 6. Sweep time = auto
- 7. Perform a trace average of at least 100 traces.
- 8. The applicable correction factor is [10\*log (1 / D)], where D is the duty cycle. The factor had been edited in the "Input Correction" of the Spectrum Analyzer.




## 9.3 Measurement Setup (Block Diagram of Configuration)

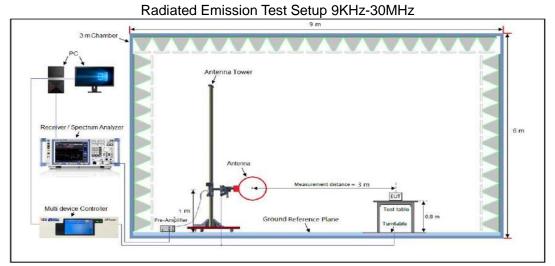

Radiated Emission Test Setup 30MHz-1000MHz

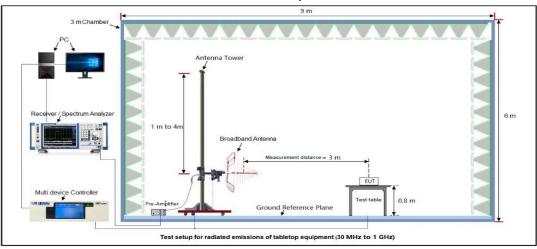

Radiated Emission Test Setup Above 1000MHz

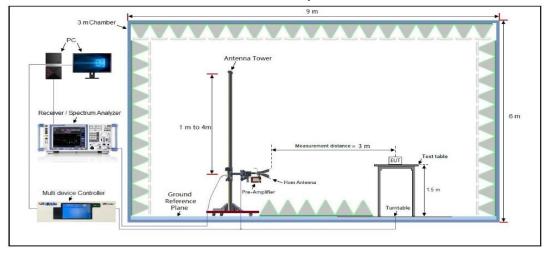

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

 Attestation of Global Compliance(Shenzhen)Co., Ltd

 Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

 Tel: +86-755 2523 4088
 E-mail: agc@agccert.com

 Web: http://www.agccert.com/



#### 9.4 Measurement Result

## Radiated Emission Below 30MHz

The amplitude of spurious emissions from 9kHz to 30MHz which are attenuated more than 20 dB below the permissible value need not be reported.

Radiated Emission Test Results at 30MHz-1GHz										
EUT N	lame	Wireless Mouse				Model Na	Model Name		MD280	
Tempe	erature	<b>23.0</b> ℃				Relative H	Relative Humidity 58.		8.6%	
Press	ure	960hPa			Test Volta	Test Voltage		Normal Voltage		
Test N	lode	Mode 3			Antenna	Antenna Polarity		Horizontal		
	130 120 110 90 80 80 60 60 50 40 30 20 10 0 -10 30M	QP Limi     QP Dete		100M	FCC Part 15	man Mananak			16	
Final Data List										
NO.	Frec [MHz		Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity	
1	33.8	8	26.75	12.12	40.00	13.25	100	254	Horizontal	
2	100.8	31	29.07	17.03	43.50	14.43	100	107	Horizontal	
3	155.1	3	23.01	17.50	43.50	20.49	100	350	Horizontal	
4	273.4	17	22.88	11.06	46.00	23.12	100	258	Horizontal	
5	461.6	65	28.94	24.36	46.00	17.06	100	164	Horizontal	
6	830.2	25	35.88	28.48	46.00	10.12	100	217	Horizontal	



			Radi	ated Emiss	ion Test Res	ults at 30MHz	z-1GHz			
	lame	Wire	Wireless Mouse			Model Na	me	MD280		
Temp	erature	<b>23.0℃</b>				Relative I	Humidity	58.6%		
Press	ure	960ł	nPa			Test Volta	age	Normal Voltage		
Test N	est Mode 3 Antenna Polarity Vertical									
	130				FCC Part 150					
	110									
	100									
	90 80									
	۳۵ ۲۵									
	[ɯ//Ŋrlɡp] exel[dd] bab 50									
	ه 50 40									
	30	*			1			June Stranger And Mark	1 ma	
	20		~	M V	human	man man man man man man	munder to be			
	0									
	-10 30M			100M					1G	
Final I	Data List	QP Limit QP Detec			Frequency[Hz	]				
	Fred	• I	Level	Factor	Limit	Margin	Height	Angle		
NO.	[MH:		[dBµV/m]	[dB]	[dBµV/m]	[dB]	[cm]	[°]	Polarity	
1	33.8	8	27.60	12.12	40.00	12.40	100	3	Vertical	
	1			45.00	40.00	14.92	100	1	Vertical	
2	67.8	3	25.08	15.36	40.00					
2 3	67.8 101.7		25.08 32.47	15.36	43.50	11.03	100	360	Vertical	
		78				11.03 15.86	100 100	360 301	Vertical Vertical	
3	101.7	78 77	32.47	16.98	43.50					

## **RESULT: Pass**

Note: 1. Factor=Antenna Factor + Cable loss, Margin= Limit-Level.

2. All test modes had been pre-tested. The mode 3 is the worst case and recorded in the report.



JT Name	Wireless Mo	use	Mode	el Name	MD280	)	
	23.0℃	400		ive Humidity		58.6% Normal Voltage	
mperature	23.00		Relat	ive number	58.0%		
essure	960hPa		Test	Voltage	Norma		
est Mode	Mode 1		Ante	nna Polarity	Horizo	ntal	
	·						
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type	
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type	
4804.000	45.23	0.08	45.31	74	-28.69	peak	
4804.000	36.82	0.08	36.9	54	-17.1	AVG	
7206.000	42.41	2.21	44.62	74	-29.38	peak	
7206.000	33.96	2.21	36.17	54	-17.83	AVG	
Remark:							
	nna Factor + Cabl	e Loss – Pre-	amplifier.				
	nna Factor + Cable Wireless Mo			el Name	MD280	)	
Factor = Anter			Mode	el Name	MD280	)	
Factor = Anter	Wireless Mo		Mode		58.6%	) I Voltage	
Factor = Anter JT Name mperature	Wireless Mo 23.0℃		Mode Relat Test	ive Humidity	58.6%	l Voltage	
Factor = Anter	Wireless Mo 23.0℃ 960hPa Mode 1	use	Mode Relat Test Ante	ive Humidity Voltage nna Polarity	58.6% Norma Vertica	l Voltage	
Factor = Anter	Wireless Mo 23.0℃ 960hPa Mode 1 Meter Reading	USE Factor	Mode Relat Test Ante Emission Level	ive Humidity Voltage nna Polarity Limits	58.6% Norma Vertica Margin	l Voltage	
Factor = Anter	Wireless Mo 23.0°C 960hPa Mode 1 Meter Reading (dBµV)	USE Factor (dB)	Mode Relat Test Anter Emission Level (dBµV/m)	ive Humidity Voltage nna Polarity Limits (dBµV/m)	58.6% Norma Vertica Margin (dB)	I Voltage I Value Type	
Factor = Anter	Wireless Mo 23.0°C 960hPa Mode 1 Meter Reading (dBµV) 45.87	USE Factor (dB) 0.08	Mode Relat Test Anter Emission Level (dBµV/m) 45.95	ive Humidity Voltage nna Polarity Limits (dBµV/m) 74	58.6% Norma Vertica Margin (dB) -28.05	I Voltage I Value Type peak	
Factor = Anter	Wireless Mo           23.0 °C           960hPa           Mode 1           Meter Reading           (dBµV)           45.87           36.56	USE Factor (dB) 0.08 0.08	Mode Relat Test Ante Emission Level (dBµV/m) 45.95 36.64	ive Humidity Voltage nna Polarity Limits (dBµV/m) 74 54	58.6% Norma Vertica Margin (dB) -28.05 -17.36	I Voltage I Value Type peak AVG	
Factor = Anter	Wireless Mo           23.0 °C           960hPa           Mode 1           Meter Reading           (dBµV)           45.87           36.56           42.34	USE Factor (dB) 0.08 0.08 2.21	Mode           Relat           Test           Anter           Emission Level           (dBµV/m)           45.95           36.64           44.55	ive Humidity Voltage nna Polarity Limits (dBµV/m) 74 54 74	58.6% Norma Vertica Margin (dB) -28.05 -17.36 -29.45	I Voltage I Value Type peak AVG peak	
Factor = Anter	Wireless Mo           23.0 °C           960hPa           Mode 1           Meter Reading           (dBµV)           45.87           36.56	USE Factor (dB) 0.08 0.08	Mode Relat Test Ante Emission Level (dBµV/m) 45.95 36.64	ive Humidity Voltage nna Polarity Limits (dBµV/m) 74 54	58.6% Norma Vertica Margin (dB) -28.05 -17.36	I Voltage I Value Type peak AVG	
Factor = Anter           JT Name           emperature           ressure           est Mode           Frequency           (MHz)           4804.000           7206.000           7206.000	Wireless Mo           23.0 °C           960hPa           Mode 1           Meter Reading           (dBµV)           45.87           36.56           42.34	USE Factor (dB) 0.08 0.08 2.21	Mode           Relat           Test           Anter           Emission Level           (dBµV/m)           45.95           36.64           44.55	ive Humidity Voltage nna Polarity Limits (dBµV/m) 74 54 74	58.6% Norma Vertica Margin (dB) -28.05 -17.36 -29.45	I Voltage I Value Type peak AVG peak	
Factor = Anter	Wireless Mo           23.0 °C           960hPa           Mode 1           Meter Reading           (dBµV)           45.87           36.56           42.34	USE Factor (dB) 0.08 0.08 2.21 2.21	Mode           Relat           Test           Anter           Emission Level           (dBμV/m)           45.95           36.64           44.55           34.79	ive Humidity Voltage nna Polarity Limits (dBµV/m) 74 54 74	58.6% Norma Vertica Margin (dB) -28.05 -17.36 -29.45	I Voltage I Value Type peak AVG peak	

# Radiated Emissions Test Results Above 1GHz

## **RESULT: Pass**



Radiated Emissions Test I	Results for Above 1GHz	

EUT	Name		Wireless I	Nouse		Mode	el Name		MD280		
Tem	perature		<b>23.0</b> ℃			Rela	tive Humid	ity	58.6%		
Pres	sure		960hPa			Test	Voltage		Norma		
Test	Mode		Mode 2			Ante	nna Polari	ty	Horizontal		
	Frequence	cy I	Meter Reading	Factor	Emissio	n Level	Limits		Margin	Value Typ	
	(MHz)		(dBµV)	(dB)	(dBµ\	//m)	(dBµV/m)		(dB)	value Typ	
	4882.000	0	46.41	0.14	46.5	55	74		-27.45	peak	
	4882.000	0	37.59	0.14	37.7	73	54		-16.27	AVG	
	7323.000	0	42.35	2.36	44.7	71	74		-29.29	peak	
-	7323.000	0	33.62	2.36	35.9	98	54		-18.02	AVG	
-											
-	Remark:										
-		ntenna	Factor + Ca	able Loss – P	re-amplifier.						
EUT	Name		Wireless I	Nouse		Mode	el Name		MD280	)	
Tem	perature		<b>23.0</b> ℃			Rela	tive Humid	ity	58.6%		
Pres	sure		960hPa			Test	Voltage		Norma	I Voltage	
Test	Mode		Mode 2			Ante	nna Polari	ty	Vertica	al	
r		1			1						
Fr	requency		Reading	Factor	Emission Lev		Limits	Marg		Value Type	
	(MHz)		dBμV)	(dB)	(dBµV/m)	(	dBµV/m)	(dB)	)		
	882.000		15.59	0.14	45.73		74	-28.2		peak	
-	882.000		38.75	0.14	38.89		54	-15.1		AVG	
	323.000		1.42	2.36	43.78		74	-30.2		peak	
7	323.000	3	32.53	2.36	34.89		54	-19.1	1	AVG	
Rem											
Fact	or = Anten	ina Fac	tor + Cable	<u>Loss – Pre-a</u>	mplifier.						

## **RESULT: Pass**



#### **Radiated Emissions Test Results for Above 1GHz**

	Wireless Mou	ISE	Model	l Name	MD280		
Temperature	<b>23.0</b> ℃		Relati	ve Humidity	58.6%		
Pressure	960hPa		Test V	/oltage	Normal	Normal Voltage	
Test Mode	Mode 3		Anten	na Polarity	Horizont	al	
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type	
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type	
4960.000	46.96	0.22	47.18	74	-26.82	peak	
4960.000	38.84	0.22	39.06	54	-14.94	AVG	
7440.000	41.12	2.64	43.76	74	-30.24	peak	
7440.000	32.63	2.64	35.27	54	-18.73	AVG	
	++					+	
Remark:			1	II			
Factor = Anter	nna Factor + Cable	Loss – Pre-	amplifier.				
EUT Name	Wireless Mou	ss Mouse			110000		
		130	wode	l Name	MD280		
Temperature	23.0°C			I Name ve Humidity	58.6%		
Temperature Pressure			Relati			Voltage	
Pressure	<b>23.0</b> ℃		Relati Test V	ve Humidity	58.6%	√oltage	
Pressure Test Mode	23.0℃ 960hPa Mode 3		Relati Test V Anten	ve Humidity /oltage na Polarity	58.6% Normal V Vertical		
Pressure Test Mode Frequency	23.0°C 960hPa Mode 3	Factor	Relati Test V Anten Emission Level	ve Humidity /oltage na Polarity Limits	58.6% Normal V Vertical	Voltage Value Type	
Pressure Test Mode Frequency (MHz)	23.0 °C 960hPa Mode 3 Meter Reading (dBµV)	Factor (dB)	Emission Level (dBµV/m)	ve Humidity /oltage na Polarity	58.6% Normal Vertical Margin (dB)	- Value Type	
Pressure Test Mode Frequency (MHz) 4960.000	23.0°C         960hPa         Mode 3         Meter Reading         (dBμV)         46.52	Factor (dB) 0.22	Emission Level (dBµV/m) 46.74	ve Humidity /oltage na Polarity Limits (dBµV/m) 74	58.6% Normal Vertical Margin (dB) -27.26		
Pressure Test Mode Frequency (MHz) 4960.000 4960.000	23.0 °C         960hPa         Mode 3         Meter Reading         (dBμV)         46.52         38.32	Factor (dB) 0.22 0.22	Relati           Test V           Anten           Emission Level           (dBµV/m)           46.74           38.54	Ve Humidity /oltage ma Polarity Limits (dBµV/m) 74 54	58.6% Normal Vertical Margin (dB) -27.26 -15.46	- Value Type peak AVG	
Pressure Test Mode Frequency (MHz) 4960.000	23.0°C         960hPa         Mode 3         Meter Reading         (dBμV)         46.52	Factor (dB) 0.22	Emission Level (dBµV/m) 46.74	ve Humidity /oltage na Polarity Limits (dBµV/m) 74	58.6% Normal Vertical Margin (dB) -27.26	Value Type	
Pressure Test Mode Frequency (MHz) 4960.000 4960.000 7440.000	23.0 °C         960hPa         Mode 3         Meter Reading         (dBµV)         46.52         38.32         42.44	Factor (dB) 0.22 0.22 2.64	Relati           Test V           Anten           Emission Level           (dBµV/m)           46.74           38.54           45.08	ve Humidity /oltage ma Polarity Limits (dBµV/m) 74 54 74	58.6% Normal V Vertical Margin (dB) -27.26 -15.46 -28.92	Value Type peak AVG peak	
Pressure Test Mode Frequency (MHz) 4960.000 4960.000 7440.000	23.0 °C         960hPa         Mode 3         Meter Reading         (dBµV)         46.52         38.32         42.44	Factor (dB) 0.22 0.22 2.64	Relati           Test V           Anten           Emission Level           (dBµV/m)           46.74           38.54           45.08	ve Humidity /oltage ma Polarity Limits (dBµV/m) 74 54 74	58.6% Normal V Vertical Margin (dB) -27.26 -15.46 -28.92	Value Type peak AVG peak	

#### **RESULT: Pass**

Note:


- 1. The amplitude of other spurious emissions from 1G to 25 GHz which are attenuated more than 20 dB below the permissible value need not be reported.
- 2. Factor = Antenna Factor + Cable loss Pre-amplifier gain, Margin = Emission Level-Limit.
- 3. The "Factor" value can be calculated automatically by software of measurement system.




EUT Name	Wireless Mouse	Model Name	MD280
Temperature	<b>23.0℃</b>	Relative Humidity	58.6%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Antenna Polarity	Horizontal

#### Band Edge Emission Test Results for Restricted Bands

Test Graph for Peak Measurement

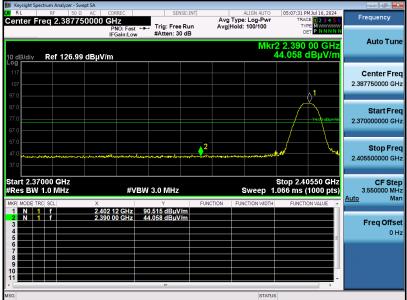

Test Graph for Average Measurement

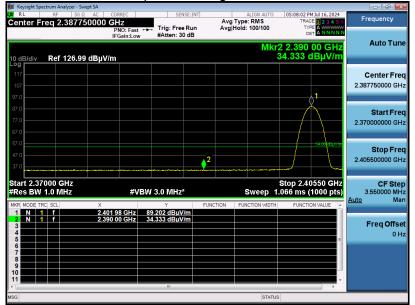


## **RESULT: Pass**




EUT Name	Wireless Mouse	Model Name	MD280
Temperature	<b>23.0</b> ℃	Relative Humidity	58.6%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Antenna Polarity	Vertical

Test Graph for Peak Measurement

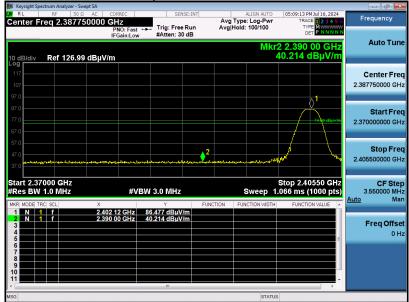

Test Graph for Average Measurement

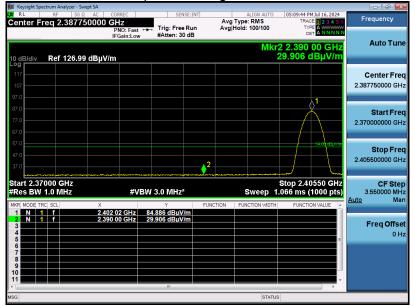


# **RESULT: Pass**




EUT Name	Wireless Mouse	Model Name	MD280
Temperature	<b>23.0</b> ℃	Relative Humidity	58.6%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 3	Antenna Polarity	Horizontal

Test Graph for Peak Measurement

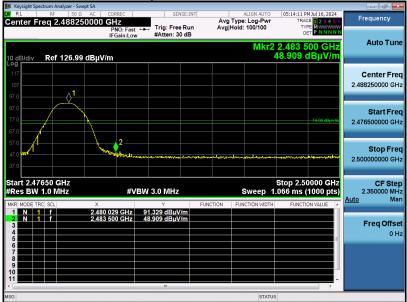

Test Graph for Average Measurement

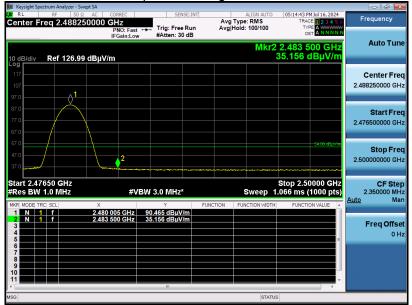


## **RESULT: Pass**




EUT Name	Wireless Mouse	Model Name	MD280
Temperature	<b>23.0</b> ℃	Relative Humidity	58.6%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 3	Antenna Polarity	Vertical

Test Graph for Peak Measurement

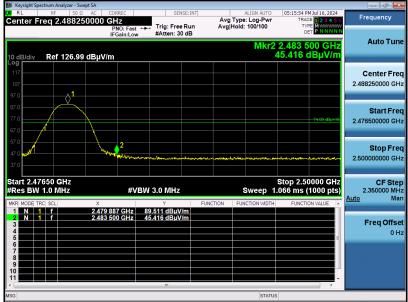

Test Graph for Average Measurement

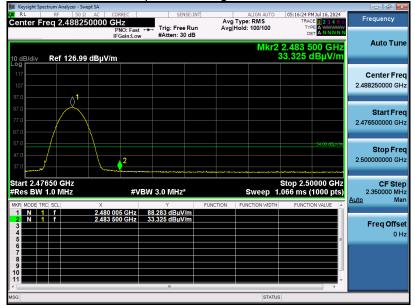

## **RESULT: Pass**

Note: The factor had been edited in the "Input Correction" of the Spectrum Analyzer.



# **10. Number of Hopping Frequency Measurement**

#### **10.1 Provisions Applicable**


This frequency hopping system must employ a minimum of 15 hopping channels.

#### **10.2 Measurement Procedure**

The EUT shall have its hopping function enabled. Use the following spectrum analyzer settings:

- 1. Span = The frequency band of operation. Depending on the number of channels the device
- 2. supports, it may be necessary to divide the frequency range of operation across multiple spans, to allow the individual channels to be clearly seen.
- 3. RBW: To identify clearly the individual channels, set the RBW to less than 30% of the channel spacing or the 20 dB bandwidth, whichever is smaller.
- 4. VBW  $\geq$  RBW
- 5. Sweep time = Auto couple
- 6. Detector = Peak
- 7. Trace mode = Max hold
- 8. Allow the trace to stabilize


## 10.3 Measurement Setup (Block Diagram of Configuration)

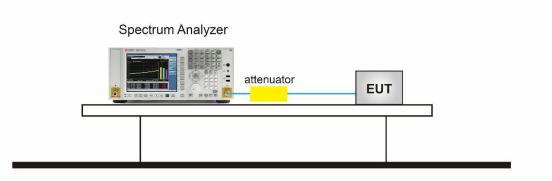

#### **10.4 Measurement Result**

	Test Data of Number of Hopping	Frequency	
Test Mode	Number of Hopping Frequency	Limits	Pass or Fail
GFSK Hopping	79	>=15	Pass



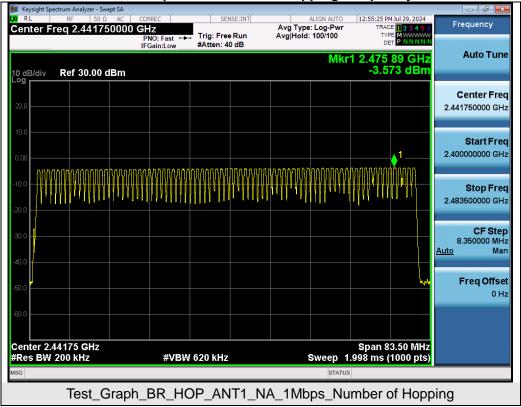

#### Test Graphs of Number of Hopping Frequency



# 11. Time of Occupancy (Dwell Time) Measurement

#### **11.1 Provisions Applicable**


The maximum permissible time of occupancy is 400ms within a period of 400ms multiplied by the number of hopping channels employed.

#### **11.2 Measurement Procedure**

The EUT shall have its hopping function enabled. Use the following spectrum analyzer settings:


- 1. Span = Zero span, centered on a hopping channel.
- 2. RBW shall be  $\leq$  channel spacing and where possible RBW should be set >> 1 / T, where T is the expected dwell time per channel.
- 3. VBW  $\geq$  RBW
- 4. Sweep time = As necessary to capture the entire dwell time per hopping channel
- 5. Detector = Peak
- 6. Trace mode = Free Run
- 7. Use the marker-delta function to determine the transmit time per hop. If this value varies with different modes of operation (data rate, modulation format, number of hopping channels, etc.), then repeat this test for each variation in transmit time. An oscilloscope may be used instead of a spectrum analyzer. The EUT shall show compliance with the appropriate regulatory limit for the number of hopping channels. A plot of the data shall be included in the test report.

#### 11.3 Measurement Setup (Block Diagram of Configuration)

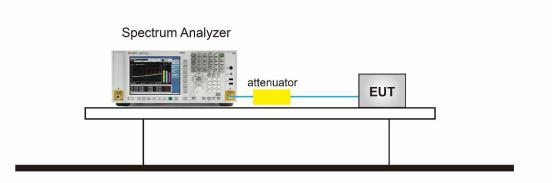


#### **11.4 Measurement Result**

		Test Data of D	well Time		
Channel	Time of Pulse for DH5 (ms)	Number of hops in the period specified in the requirements	Dwell Time (ms)	Limit (ms)	Pass or Fail
2402	2.853	28.0*4	319.536	400	Pass
2441	2.853	28.0*4	319.536	400	Pass
2480	2.854	28.0*4	319.648	400	Pass






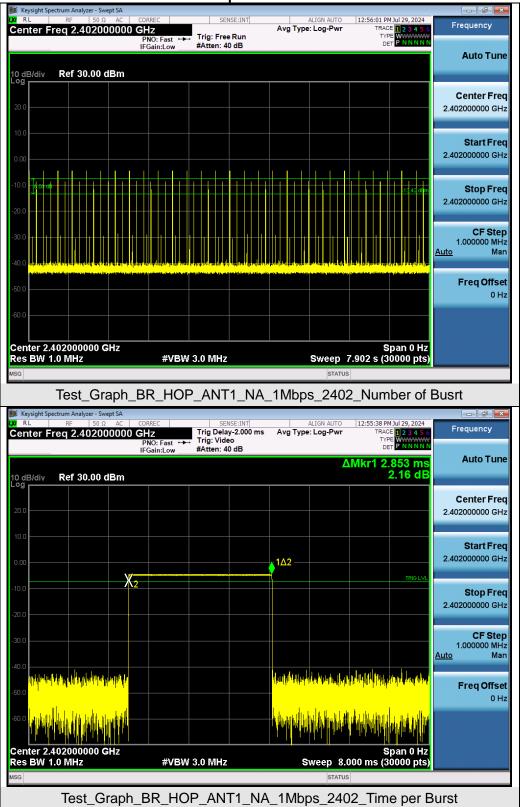


#### **Test Graphs of Dwell Time**



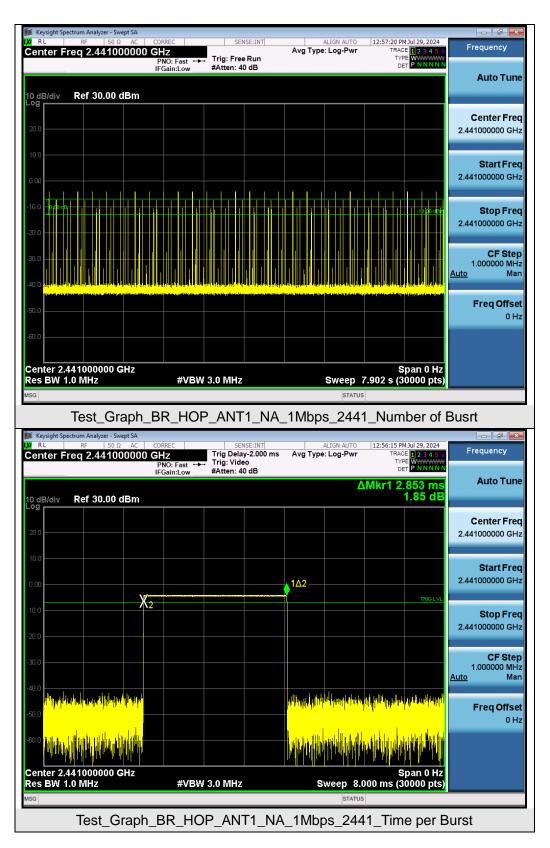



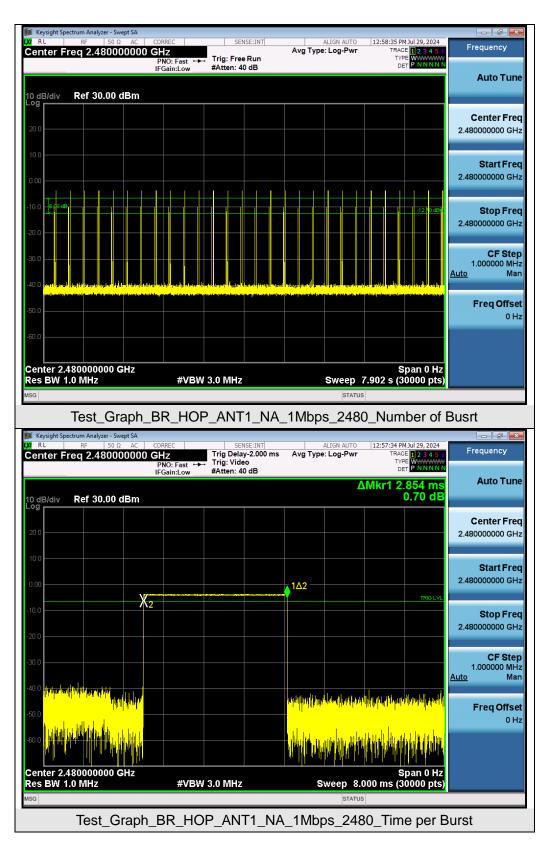



# **12. Frequency Separation Measurement**

#### **12.1 Provisions Applicable**

When the power is less than 0.125W: The minimum permissible channel separation for this system is 2/3 the value of the 20dB BW.


When the power is less than 1W: The minimum permissible channel separation for this system is 20dB BW.

#### **12.2 Measurement Procedure**

The EUT shall have its hopping function enabled. Use the following spectrum analyzer settings:

- 1. Span: Wide enough to capture the peaks of two adjacent channels.
- 2. RBW: Start with the RBW set to approximately 30% of the channel spacing; adjust as necessary to best identify the center of each individual channel.
- 3. Video (or average) bandwidth (VBW)  $\geq$  RBW.
- 4. Sweep: Auto.
- 5. Detector function: Peak.
- 6. Trace: Max hold. g) Allow the trace to stabilize.
- 7. Use the marker-delta function to determine the separation between the peaks of the adjacent channels.


#### 12.3 Measurement Setup (Block Diagram of Configuration)

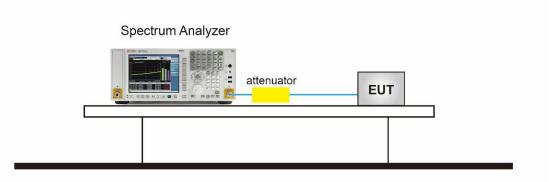

#### **12.4 Measurement Result**

	Test Data of Frequency Separa	tion	
Test Mode	Channel Separation (MHz)	Limits (MHz)	Pass or Fail
GFSK Hopping	0.997	≥0.693	Pass



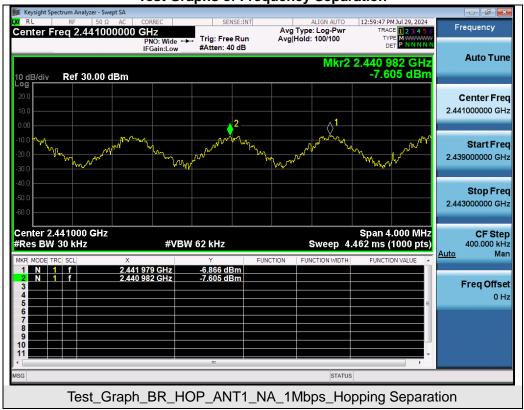

#### **Test Graphs of Frequency Separation**



# **13. AC Power Line Conducted Emission Test**

### 13.1 Measurement Limit


Fraguanay	Maximum RF Line Voltage				
Frequency	Q.P. (dBµV)	Average (dBµV)			
150kHz~500kHz	66-56	56-46			
500kHz~5MHz	56	46			
5MHz~30MHz	60	50			

Note:

1. The lower limit shall apply at the transition frequency.

2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

## 13.2 Measurement Setup (Block Diagram of Configuration)

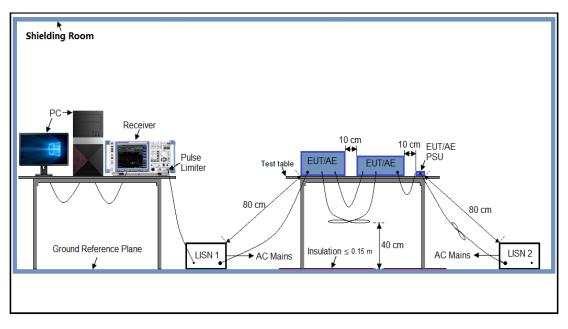



## **13.3 Preliminary Procedure of Line Conducted Emission Test**

- 1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
- 2. Support equipment, if needed, was placed as per ANSI C63.10.
- 3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.
- 4. All support equipment received AC120V/60Hz power from a LISN, if any.
- 5. The EUT received DC 5V power from adapter which received AC120V/60Hz power from a LISN.
- 6. The test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7. Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
- 8. During the above scans, the emissions were maximized by cable manipulation.
- 9. The test mode(s) were scanned during the preliminary test.


Then, the EUT configuration and cable configuration of the above highest emission level were recorded for reference of final testing.

## 13.4 Final Procedure of Line Conducted Emission Test

- 1. EUT and support equipment was set up on the test bench as per step 2 of the preliminary test.
- A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less – 2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.
- 3. The test data of the worst case condition(s) was reported on the Summary Data page.

## **13.5 Measurement Results**



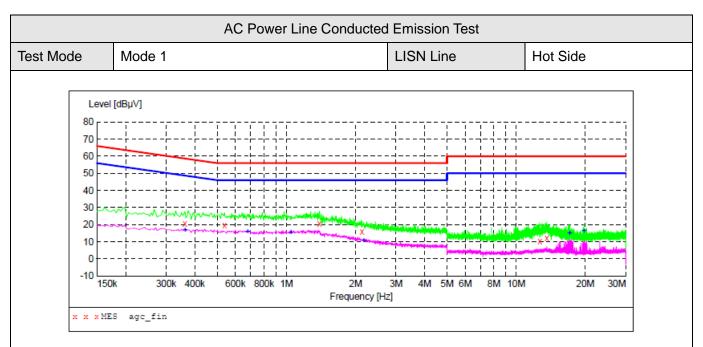

#### MEASUREMENT RESULT: "agc\_fin"

2024/6/27 22: Frequency MHz		Transd dB	Limit dBµV	Margin dB	Detector	Line
0.362000 0.538000 1.394000 2.134000 12.690000 13.602000	20.50 19.60 20.40 16.00 10.30 12.00	6.1 6.2 6.2 6.8 6.8	59 56 56 60 60	38.2 36.4 35.6 40.0 49.7 48.0	QP	L1 L1 L1 L1 L1 L1

#### MEASUREMENT RESULT: "agc\_fin2"

Frequency MHz	Level dBµV	Transd dB		Margin dB	Detector	Line
0.362000	16.70	6.1	49	32.0	AV	L1
0.678000	15.90	6.2	46	30.1	AV	L1
1.046000	15.60	6.2	46	30.4	AV	L1
2.170000	10.90	6.3	46	35.1	AV	L1
17.082000	14.90	7.0	50	35.1	AV	L1
19.710000	16.20	7.1	50	33.8	AV	L1


## **RESULT: PASS**

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/



2

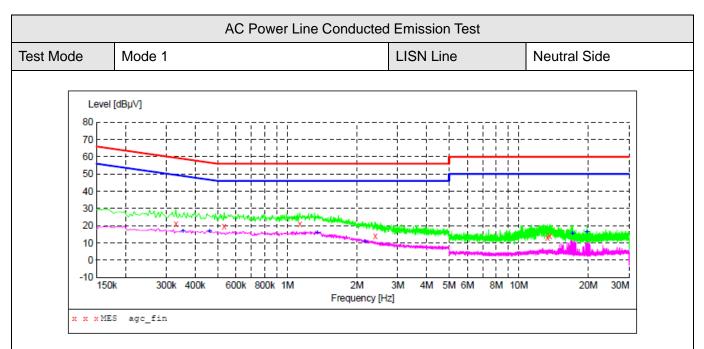

#### MEASUREMENT RESULT: "agc\_fin"

2024/6/27 22: Frequency MHz		Transd dB	Limit dBµV	Margin dB	Detector	Line
0.330000	21.00	6.1	60	38.5	QP	N
0.534000	19.70	6.2	56	36.3	QP	N
1.134000	20.90	6.2	56	35.1	QP	N
2.402000	14.20	6.3	56	41.8	QP	N
13.298000	13.00	6.8	60	47.0	QP	N
13.622000	13.80	6.8	60	46.2	QP	Ν

#### MEASUREMENT RESULT: "agc\_fin2"

1	2024/6/27 22: Frequency		Transd	Limit	Margin	Detector	Line
	MHz	dBµV	dB	dBµV	dB		
	0.354000	16.70	6.1	49		AV	N
	0.462000	16.60	6.1	47	30.1	AV	N
	1.346000	15.90	6.2	46	30.1	AV	N
	2.166000	10.90	6.3	46	35.1	AV	N
	17.082000	15.60	7.0	50	34.4	AV	N
	19.710000	16.30	7.1	50	33.7	AV	N

#### **RESULT: PASS**

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

 Attestation of Global Compliance(Shenzhen)Co., Ltd

 Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

 Tel: +86-755 2523 4088
 E-mail: agc@agccert.com



Report No.: AGC00803240604FR01 Page 57 of 57

## **Appendix I: Photographs of Test Setup**

Refer to the Report No.: AGC00803240604AP02

# Appendix II: Photographs of Test EUT

Refer to the Report No.: AGC00803240604AP03

-----End of Report-----



# Conditions of Issuance of Test Reports

1. All samples and goods are accepted by the Attestation of Global Compliance (Shenzhen) Co., Ltd (the "Company") solely for testing and reporting in accordance with the following terms and conditions. The company provides its services on the basis that such terms and conditions constitute express agreement between the company and any person, firm or company requesting its services (the "Clients").

2. Any report issued by Company as a result of this application for testing services (the "Report") shall be issued in confidence to the Clients and the Report will be strictly treated as such by the Company. It may not be reproduced either in its entirety or in part and it may not be used for advertising or other unauthorized purposes without the written consent of the Company. The Clients to whom the Report is issued may, however, show or send it, or a certified copy thereof prepared by the Company to its customer, supplier or other persons directly concerned. The Company will not, without the consent of the Clients, enter into any discussion or correspondence with any third party concerning the contents of the Report, unless required by the relevant governmental authorities, laws or court orders.

3. The Company shall not be called or be liable to be called to give evidence or testimony on the Report in a court of law without its prior written consent, unless required by the relevant governmental authorities, laws or court orders.

4. In the event of the improper use of the report as determined by the Company, the Company reserves the right to withdraw it, and to adopt any other additional remedies which may be appropriate.

5. Samples submitted for testing are accepted on the understanding that the Report issued cannot form the basis of, or be the instrument for, any legal action against the Company.

6. The Company will not be liable for or accept responsibility for any loss or damage however arising from the use of information contained in any of its Reports or in any communication whatsoever about its said tests or investigations.

7. Clients wishing to use the Report in court proceedings or arbitration shall inform the Company to that effect prior to submitting the sample for testing.

8. The Company is not responsible for recalling the electronic version of the original report when any revision is made to them. The Client assumes the responsibility to providing the revised version to any interested party who uses them.

9. Subject to the variable length of retention time for test data and report stored hereinto as otherwise specifically required by individual accreditation authorities, the Company will only keep the supporting test data and information of the test report for a period of six years. The data and information will be disposed of after the aforementioned retention period has elapsed. Under no circumstances shall we provide any data and information which has been disposed of after retention period. Under no circumstances shall we be liable for damage of any kind, including (but not limited to) compensatory damages, lost profits, lost data, or any form of special, incidental, indirect, consequential or punitive damages of any kind, whether based on breach of contract of warranty, tort (including negligence), product liability or otherwise, even if we are informed in advance of the possibility of such damages.