

No. 1 Workshop, M-10, Middle section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057

 Telephone:
 +86 (0) 755 2601 2053

 Fax:
 +86 (0) 755 2671 0594

 Email:
 ee.shenzhen@sgs.com

Report No.: SZEM141100660701 Page: 1 of 93

# **FCC REPORT**

Test Result:	PASS *
Date of Issue:	2015-06-29
Date of Test:	2014-12-19
Date of Receipt:	2014-12-10
Standards:	47 CFR Part 15, Subpart C (2014)
FCC ID:	IBAAVPSB1630
Trade mark:	Creative
Model No.(EUT):	SB1630
Product Name:	Creative iRoar
Manufacturer:	Creative Technology Ltd.
Applicant:	Creative Labs Inc.
Application No:	SZEM1411006607CR

In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:



#### Jack Zhang EMC Laboratory Manager

The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS International Electrical Approvals or testing done by SGS International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by SGS International Electrical Approvals in writing.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. All test results in this report can be traceable to National or International Standards.



Report No.: SZEM141100660701 Page: 2 of 93

# 2 Version

Revision Record					
Version	Chapter	Date	Modifier	Remark	
00		2015-06-29		Original	

Authorized for issue by:		
Tested By	Eric Fu (Eric Fu)/Project Engineer	2014-12-19 Date
Prepared By	(Linlin Lv)/Clerk	2015-01-08
Checked By	(Owen Zhou) /Reviewer	2015-06-29

<sup>&</sup>quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM141100660701 Page: 3 of 93

# 3 Test Summary

Test Item	Test Requirement	Test method	Result
Antenna Requirement	47 CFR Part 15, Subpart C Section 15.203/15.247 (c)	ANSI C63.10 (2009)	PASS
AC Power Line Conducted Emission	47 CFR Part 15, Subpart C Section 15.207	ANSI C63.10 (2009)	PASS
Conducted Peak Output Power	47 CFR Part 15, Subpart C Section 15.247 (b)(1)	ANSI C63.10 (2009)	PASS
20dB Occupied Bandwidth	47 CFR Part 15, Subpart C Section 15.247 (a)(1)	ANSI C63.10 (2009)	PASS
Carrier Frequencies Separation	47 CFR Part 15, Subpart C Section 15.247 (a)(1)	ANSI C63.10 (2009)	PASS
Hopping Channel Number	ping Channel Number 47 CFR Part 15, Subpart C Section 15.247 (b)		PASS
Dwell Time	47 CFR Part 15, Subpart C Section 15.247 (a)(1)	ANSI C63.10 (2009)	PASS
Pseudorandom Frequency Hopping Sequence	47 CFR Part 15, Subpart C Section 15.247(b)(4)&TCB Exclusion List (7 July 2002)	ANSI C63.10 (2009)	PASS
Band-edge for RF Conducted Emissions	47 CFR Part 15, Subpart C Section 15.247(d)	ANSI C63.10 (2009)	PASS
RF Conducted Spurious Emissions	47 CFR Part 15, Subpart C Section 15.247(d)	ANSI C63.10 (2009)	PASS
Radiated Spurious emissions	47 CFR Part 15, Subpart C Section 15.205/15.209	ANSI C63.10 (2009)	PASS
Restricted bands around fundamental frequency (Radiated Emission)	47 CFR Part 15, Subpart C Section 15.205/15.209	ANSI C63.10 (2009)	PASS

<sup>&</sup>quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM141100660701 Page: 4 of 93

# 4 Contents

Page
------

1	со	OVER PAGE	1
2	VE	RSION	2
3	TE	ST SUMMARY	3
4	со	DNTENTS	4
5	GE	NERAL INFORMATION	5
	5.1 5.2	CLIENT INFORMATION	5
	5.3 5.4 5.5	TEST ENVIRONMENT DESCRIPTION OF SUPPORT UNITS TEST LOCATION	7
	5.6 5.7	TEST FACILITY DEVIATION FROM STANDARDS	8
	5.8 5.9	Abnormalities from Standard Conditions Other Information Requested by the Customer	8
6	5.10 TE	EQUIPMENT LIST	
	6.1	ANTENNA REQUIREMENT	12
	6.2 6.3	CONDUCTED EMISSIONS CONDUCTED PEAK OUTPUT POWER	
	6.4 6.5	20dB Occupy Bandwidth Carrier Frequencies Separation	
	6.6 6.7	HOPPING CHANNEL NUMBER DWELL TIME	40
	6.8 6.9	BAND-EDGE FOR RF CONDUCTED EMISSIONS	58
	6.10 6.11	OTHER REQUIREMENTS FREQUENCY HOPPING SPREAD SPECTRUM SYSTEM RADIATED SPURIOUS EMISSION	79
		11.1       Radiated Emission below 1GHz         11.2       Transmitter Emission above 1GHz         Restricted Bands around fundamental frequency	84
	0.12	TESTINGTED BANDS ANOUND I UNDAMIENTALT NEQUENCT	



Report No.: SZEM141100660701 Page: 5 of 93

# 5 General Information

### 5.1 Client Information

Applicant:	Creative Labs Inc.		
Address of Applicant:	1901, McCarthy Boulevard, Milpitas, CA 95035, United States		
Manufacturer:	Creative Technology Ltd.		
Address of Manufacturer:	31, International Business Park, #03-01, Creative Resource, Singapore 609921		

### 5.2 General Description of EUT

Product Name:	Creative iRoar			
Model No.:	SB1630			
Trade mark:	Creative			
Operation Frequency:	2402MHz~2480MHz			
Bluetooth Version:	V2.1+EDR			
Modulation Technique:	Frequency Hopping Spread Spectrum(FHSS)			
Modulation Type:	GFSK, π/4DQPSK, 8DPSK			
EUT Function:	Portable Bluetooth audio and speakerphone			
Number of Channel:	79			
Hopping Channel Type:	Adaptive Frequency Hopping systems			
Sample Type:	Portable production			
Test Power Grade:	255,44 (manufacturer declare )			
Test Software of EUT:	Bluetest 3 (manufacturer declare )			
Antenna Type:	Integral			
Antenna Gain:	0.606dBi			
Power Supply:	Switching Mode Power Supply			
	Model: GPE024W-150160-Z			
	Input: 100~240V~50/60Hz 0.75A			
	Output: 15V == 1600mA 24W			
	Internal rechargeable battery : DC 11.34V 2950mAh 33.45Wh			
Test Voltage:	AC 120V 60Hz			
USB Cable:	1.5m (Shielded)			
Power adapter cable:	1.8m (Unshielded)			

<sup>&</sup>quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sqs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sqs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM141100660701 Page: 6 of 93

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2402MHz	21	2422MHz	41	2442MHz	61	2462MHz
2	2403MHz	22	2423MHz	42	2443MHz	62	2463MHz
3	2404MHz	23	2424MHz	43	2444MHz	63	2464MHz
4	2405MHz	24	2425MHz	44	2445MHz	64	2465MHz
5	2406MHz	25	2426MHz	45	2446MHz	65	2466MHz
6	2407MHz	26	2427MHz	46	2447MHz	66	2467MHz
7	2408MHz	27	2428MHz	47	2448MHz	67	2468MHz
8	2409MHz	28	2429MHz	48	2449MHz	68	2469MHz
9	2410MHz	29	2430MHz	49	2450MHz	69	2470MHz
10	2411MHz	30	2431MHz	50	2451MHz	70	2471MHz
11	2412MHz	31	2432MHz	51	2452MHz	71	2472MHz
12	2413MHz	32	2433MHz	52	2453MHz	72	2473MHz
13	2414MHz	33	2434MHz	53	2454MHz	73	2474MHz
14	2415MHz	34	2435MHz	54	2455MHz	74	2475MHz
15	2416MHz	35	2436MHz	55	2456MHz	75	2476MHz
16	2417MHz	36	2437MHz	56	2457MHz	76	2477MHz
17	2418MHz	37	2438MHz	57	2458MHz	77	2478MHz
18	2419MHz	38	2439MHz	58	2459MHz	78	2479MHz
19	2420MHz	39	2440MHz	59	2460MHz	79	2480MHz
20	2421MHz	40	2441MHz	60	2461MHz		

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Channel	Frequency
The Lowest channel	2402MHz
The Middle channel	2441MHz
The Highest channel	2480MHz





Report No.: SZEM141100660701 Page: 7 of 93

### 5.3 Test Environment

Operating Environment:	
Temperature:	25.0 °C
Humidity:	53 % RH
Atmospheric Pressure:	1015mbar

### 5.4 Description of Support Units

The EUT has been tested with associated equipment below.

Description	Manufacturer	Model No.
Resistance load	Supply by Lab	None

### 5.5 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen Branch E&E Lab,

No. 1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, Guangdong, China. 518057.

Tel: +86 755 2601 2053 Fax: +86 755 2671 0594 No tests were sub-contracted.

<sup>&</sup>quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM141100660701 Page: 8 of 93

### 5.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

### • CNAS (No. CNAS L2929)

CNAS has accredited SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

VCCI

The 10m Semi-anechoic chamber and Shielded Room (7.5m x 4.0m x 3.0m) of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: G-823, R-4188, T-1153 and C-2383 respectively.

### • FCC – Registration No.: 556682

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 556682.

### Industry Canada (IC)

Two 3m Semi-anechoic chambers of SGS-CSTC Standards Technical Services Co., Ltd. have been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 4620C-1 & 4620C-2.

### 5.7 Deviation from Standards

None.

### 5.8 Abnormalities from Standard Conditions

None.

### 5.9 Other Information Requested by the Customer

None.



Report No.: SZEM141100660701 Page: 9 of 93

### 5.10 Equipment List

	Conducted Emission				
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Due date (yyyy-mm-dd)
1	Shielding Room	ZhongYu Electron	GB-88	SEL0042	2015-06-10
2	LISN	Rohde & Schwarz	ENV216	SEL0152	2015-10-24
3	LISN	ETS-LINDGREN	3816/2	SEL0021	2015-05-16
4	8 Line ISN	Fischer Custom Communications Inc.	FCC-TLISN- T8-02	SEL0162	2015-08-30
5	4 Line ISN	Fischer Custom Communications Inc.	FCC-TLISN- T4-02	SEL0163	2015-08-30
6	2 Line ISN	Fischer Custom Communications Inc.	FCC-TLISN- T2-02	SEL0164	2015-08-30
7	EMI Test Receiver	Rohde & Schwarz	ESCI	SEL0022	2015-05-16
8	Coaxial Cable	SGS	N/A	SEL0025	2015-05-29
9	DC Power Supply	Zhao Xin	RXN-305D	SEL0117	2015-10-24
10	Humidity/ Temperature Indicator	Shanhai Qixiang	ZJ1-2B	SEL0103	2015-10-24
11	Barometer	Chang Chun	DYM3	SEL0088	2015-05-16

<sup>&</sup>quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM141100660701 Page: 10 of 93

	RE in Chamber				
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Due date (yyyy-mm-dd)
1	3m Semi-Anechoic Chamber	ETS-LINDGREN	N/A	SEL0017	2015-06-10
2	EMI Test Receiver	Agilent Technologies	N9038A	SEL0312	2015-09-16
3	EMI Test software	AUDIX	E3	SEL0050	N/A
4	BiConiLog Antenna (26-3000MHz)	ETS-LINDGREN	3142C	SEL0015	2015-10-24
5	Double-ridged horn (1-18GHz)	ETS-LINDGREN	3117	SEL0006	2015-10-24
6	Horn Antenna (18-26GHz)	ETS-LINDGREN	3160	SEL0076	2015-10-24
7	Pre-amplifier (0.1-1300MHz)	Agilent Technologies	8447D	SEL0053	2015-05-16
8	Pre-Amplifier (0.1-26.5GHz)	Compliance Directions Systems Inc.	PAP-0126	SEL0168	2015-10-24
9	Coaxial cable	SGS	N/A	SEL0027	2015-05-29
10	Coaxial cable	SGS	N/A	SEL0189	2015-05-29
11	Coaxial cable	SGS	N/A	SEL0121	2015-05-29
12	Coaxial cable	SGS	N/A	SEL0178	2015-05-29
13	Band filter	Amindeon	82346	SEL0094	2015-05-16
14	Barometer	Chang Chun	DYM3	SEL0088	2015-05-16
15	DC Power Supply	Zhao Xin	RXN-305D	SEL0117	2015-10-24
16	Humidity/ Temperature Indicator	Shanhai Qixiang	ZJ1-2B	SEL0103	2015-10-24
17	Signal Generator (10M-27GHz)	Rohde & Schwarz	SMR27	SEL0067	2015-05-16
18	Signal Generator	Rohde & Schwarz	SMY01	SEL0155	2015-10-24
19	Loop Antenna	Beijing Daze	ZN30401	SEL0203	2015-06-04

<sup>&</sup>quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sqs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sqs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM141100660701 Page: 11 of 93

	RF connected test					
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Due date (yyyy-mm-dd)	
1	DC Power Supply	Zhao Xin	RXN-305D	SEL0117	2015-10-24	
2	Humidity/ Temperature Indicator	HYGRO	ZJ1-2B	SEL0033	2015-10-24	
3	Spectrum Analyzer	Rohde & Schwarz	FSP	SEL0154	2015-10-24	
4	Coaxial cable	SGS	N/A	SEL0178	2015-05-29	
5	Coaxial cable	SGS	N/A	SEL0179	2015-05-29	
6	Barometer	ChangChun	DYM3	SEL0088	2015-05-16	
7	Signal Generator	Rohde & Schwarz	SML03	SEL0068	2015-05-16	
8	Band filter	amideon	82346	SEL0094	2015-05-16	
9	POWER METER	R & S	NRVS	SEL0144	2015-10-24	
10	Attenuator	Beijin feihang taida	TST-2-6dB	SEL0205	2015-05-16	
11	Power Divider(splitter)	Agilent Technologies	11636B	SEL0130	2015-10-24	

Note: The calibration interval is one year, all the instruments are valid.

<sup>&</sup>quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sqs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sqs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM141100660701 Page: 12 of 93

# 6 Test results and Measurement Data

### 6.1 Antenna Requirement

#### Standard requirement: 47 CFR Part 15C Section 15.203 /247(c)

#### 15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

#### EUT Antenna:



The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is 0.606dBi.




Report No.: SZEM141100660701 Page: 13 of 93

Test Requirement:	47 CFR Part 15C Section 15.2	47 CFR Part 15C Section 15.207		
Test Method:	ANSI C63.10: 2009			
Test Frequency Range	150kHz to 30MHz			
Limit:		Limit (dBuV)		
	Frequency range (MHz)	Quasi-peak	Average	
	0.15-0.5	66 to 56*	56 to 46*	
	0.5-5	56	46	
	5-30	60	50	
	* Decreases with the logarithm	n of the frequency.		_1
Test Procedure:	<ul> <li>room.</li> <li>2) The EUT was connected to Impedance Stabilization N impedance. The power call connected to a second LIS reference plane in the sam measured. A multiple sock power cables to a single L exceeded.</li> <li>3) The tabletop EUT was place ground reference plane. A placed on the horizontal grief the EUT shall be 0.4 m vertical ground reference plane. The LISN unit under test and bonded mounted on top of the ground state of the ground the state of the ground test points the EUT and associated exceeded.</li> </ul>	<ol> <li>2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50Ω/50µH + 5Ω linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.</li> <li>3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,</li> <li>4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.</li> <li>5) In order to find the maximum emission, the relative positions of</li> </ol>		inear t the was ear he the of 2.

### 6.2 Conducted Emissions



Report No.: SZEM141100660701 Page: 14 of 93

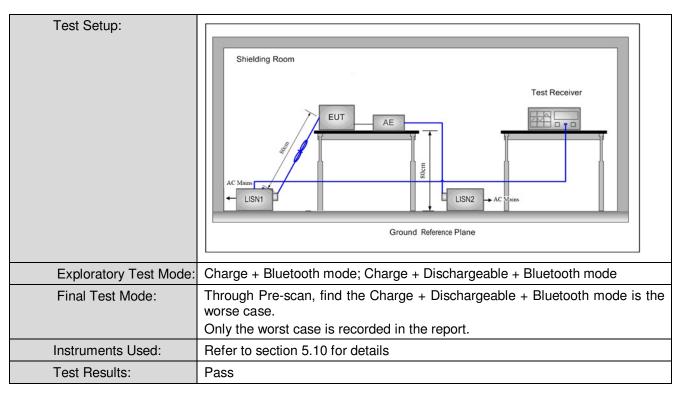


#### **Measurement Data**

An initial pre-scan was performed on the live and neutral lines with peak detector.

Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected.




Report No.: SZEM141100660701 Page: 15 of 93

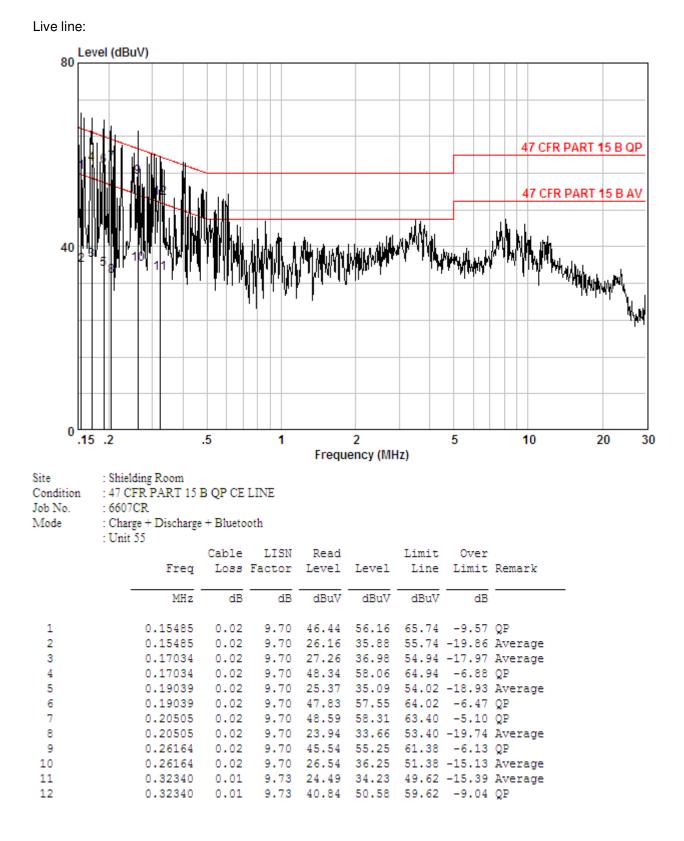



Report No.: SZEM141100660701 Page: 16 of 93

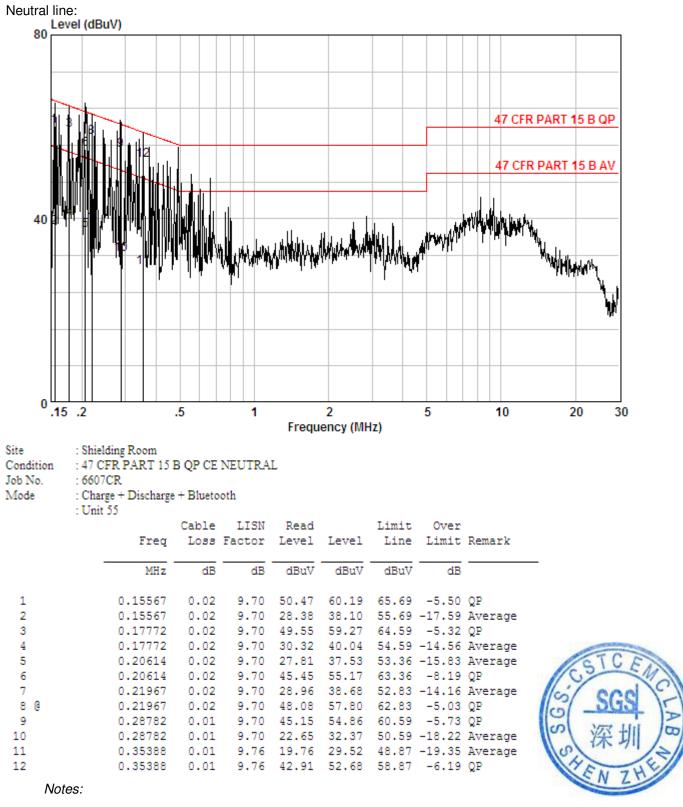

1. The following Quasi-Peak and Average measurements were performed on the EUT:

2. Final Test Level = Receiver Reading + LISN Factor + Cable Loss.



Report No.: SZEM141100660701 Page: 17 of 93

### 6.3 Conducted Peak Output Power

Test Requirement:	47 CFR Part 15C Section 15.247 (b)(1)		
Test Method:	ANSI C63.10:2009		
Test Setup:	Spectrum Analyzer E.U.T Non-Conducted Table Ground Reference Plane Remark: Offset the High-Frequency cable loss 1.5dB in the spectrum analyzer.		
Limit:	20dBm		
Exploratory Test Mode:	Non-hopping transmitting with all kind of modulation and all kind of data type		
Final Test Mode:	Through Pre-scan, find the DH1 of data type is the worse case of GFSK modulation type, 2-DH1 of data type is worse case of $\pi/4DQPSK$ modulation type, 3-DH1 of data type is worse case of 8DPSK modulation type.		
Instruments Used:	Refer to section 5.10 for details		
Test Results:	Pass		

<sup>&</sup>quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."




Report No.: SZEM141100660701 Page: 18 of 93

#### **Measurement Data**

GFSK mode					
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result		
Lowest	1.79	20.00	Pass		
Middle	2.13	20.00	Pass		
Highest	1.97	20.00	Pass		
	π/4DQPSK m	ode			
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result		
Lowest	1.22	20.00	Pass		
Middle	1.52	20.00	Pass		
Highest	1.19	20.00	Pass		
	8DPSK mode				
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result		
Lowest	1.40	20.00	Pass		
Middle	1.57	20.00	Pass		
Highest	1.28	20.00	Pass		




Report No.: SZEM141100660701 Page: 19 of 93

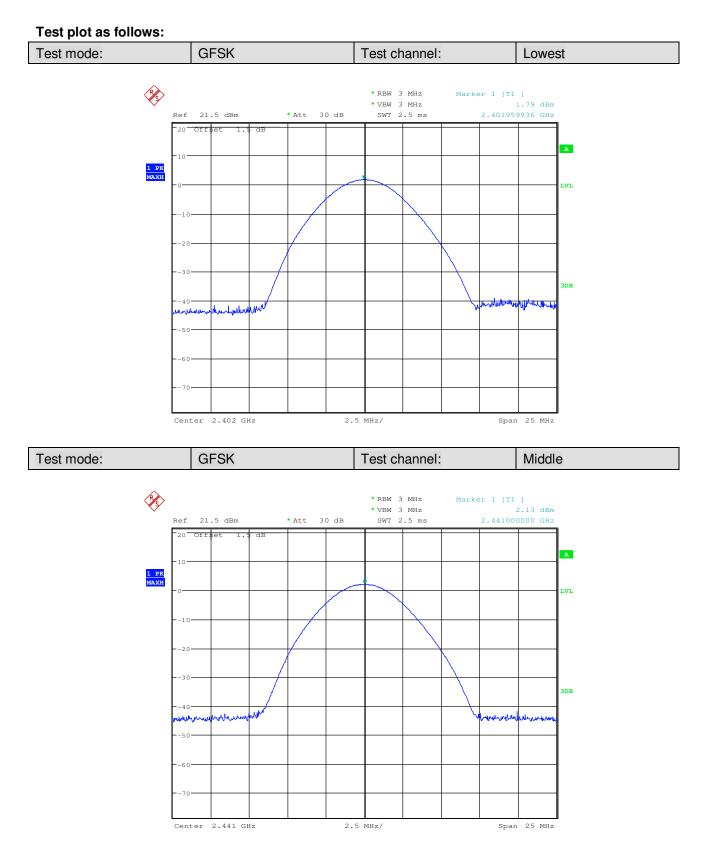




Report No.: SZEM141100660701 Page: 20 of 93

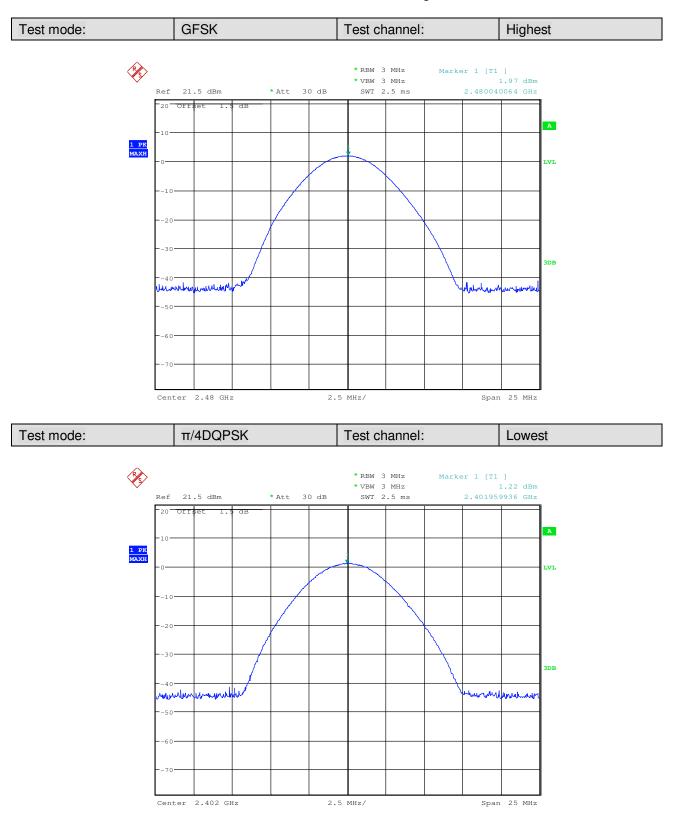




Report No.: SZEM141100660701 Page: 21 of 93

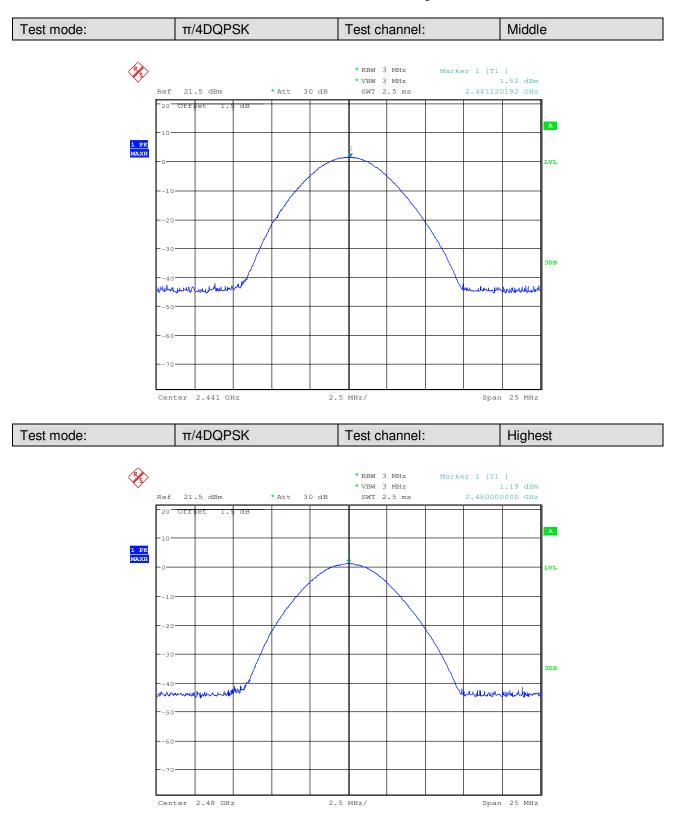




Report No.: SZEM141100660701 Page: 22 of 93

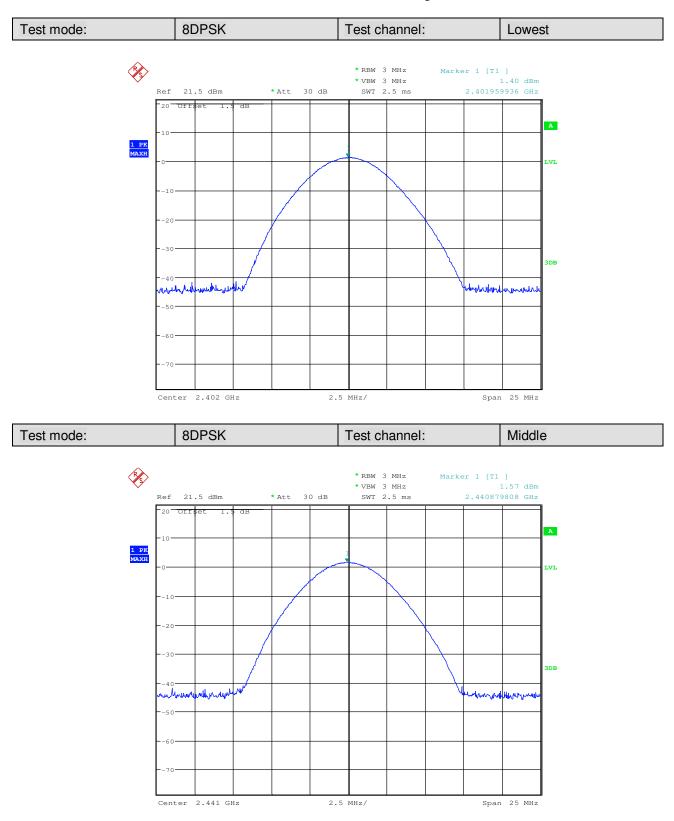



Report No.: SZEM141100660701 Page: 23 of 93

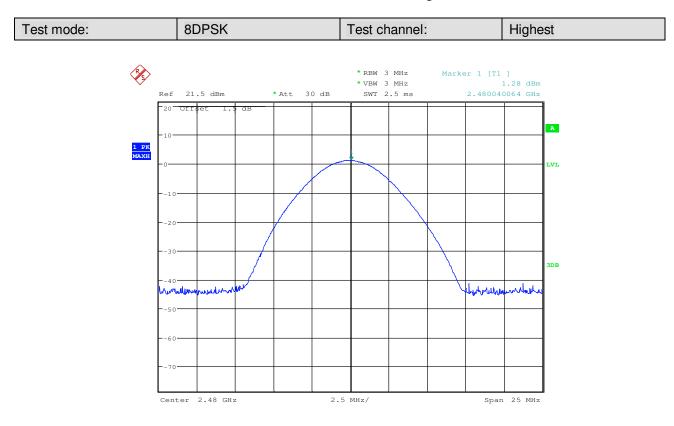



Report No.: SZEM141100660701 Page: 24 of 93

### 6.4 20dB Occupy Bandwidth


Test Requirement:	47 CFR Part 15C Section 15.247 (a)(1)		
Test Method:	ANSI C63.10:2009		
Test Setup:	ANSI C63.10:2009		
	Ground Reference Plane		
Limit:	NA		
Exploratory Test Mode:	Non-hopping transmitting with all kind of modulation and all kind of data type		
Final Test Mode:	Through Pre-scan, find the DH1 of data type is the worse case of GFSK modulation type, 2-DH1 of data type is worse case of $\pi/4DQPSK$ modulation type, 3-DH1 of data type is worse case of 8DPSK modulation type		
Instruments Used:	Refer to section 5.10 for details		
Test Results:	Pass		

#### Measurement Data

Test channel	20dB Occupy Bandwidth (kHz)		
	GFSK	π/4DQPSK	8DPSK
Lowest	875.000	1254.808	1221.154
Middle	879.808	1225.962	1221.154
Highest	879.808	1225.962	1221.154




Report No.: SZEM141100660701 Page: 25 of 93

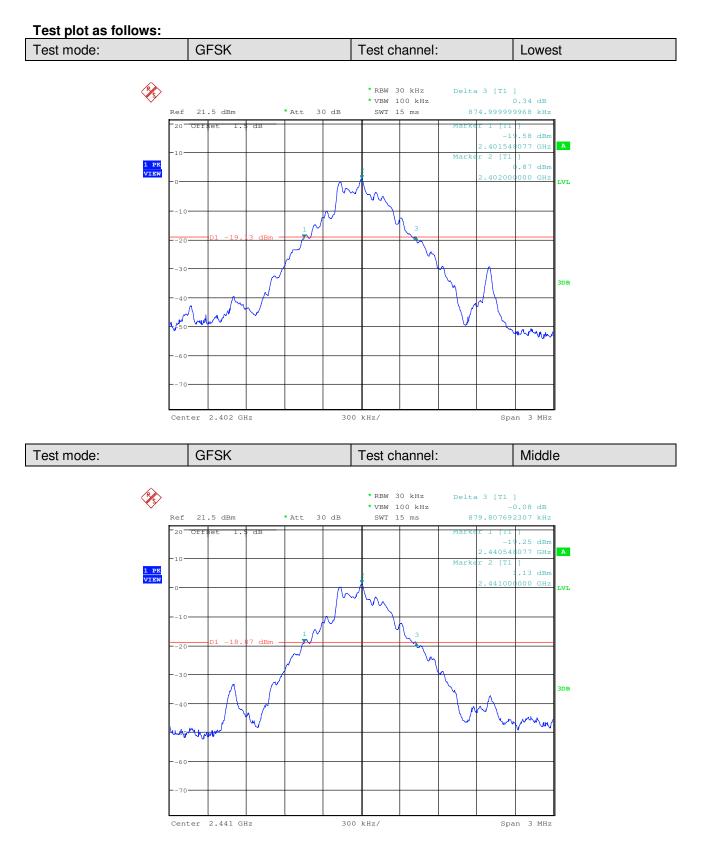




Report No.: SZEM141100660701 Page: 26 of 93

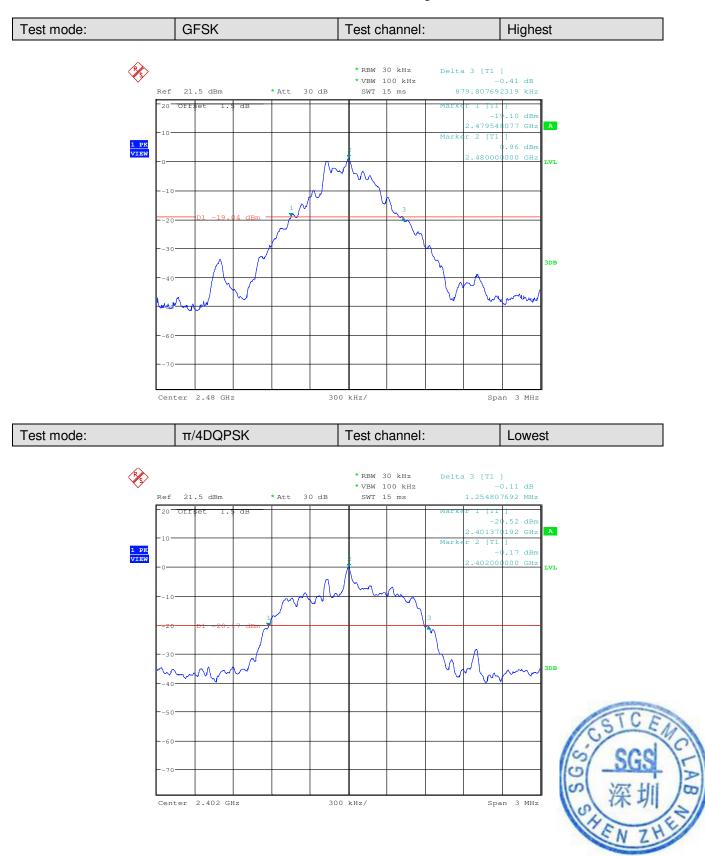




Report No.: SZEM141100660701 Page: 27 of 93

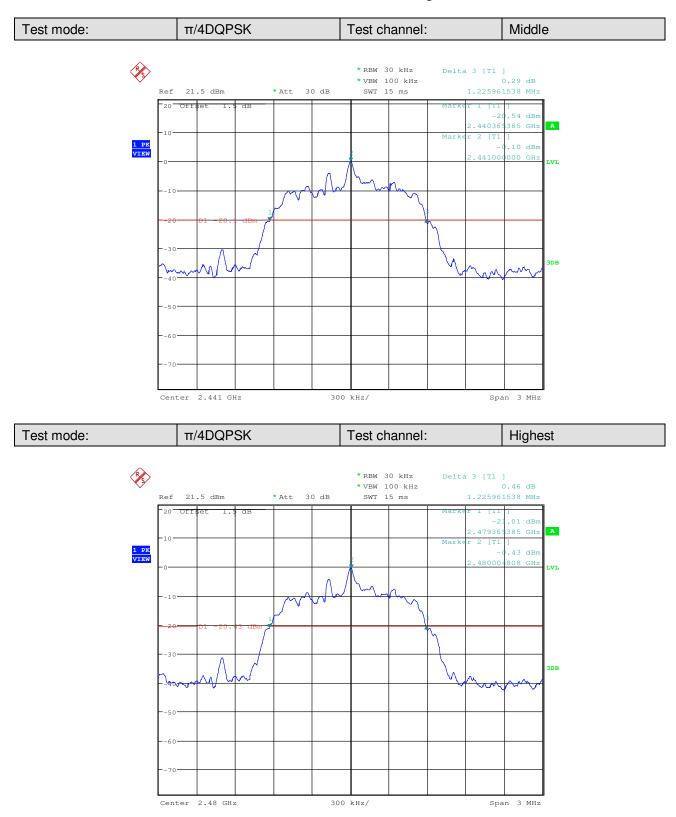




Report No.: SZEM141100660701 Page: 28 of 93

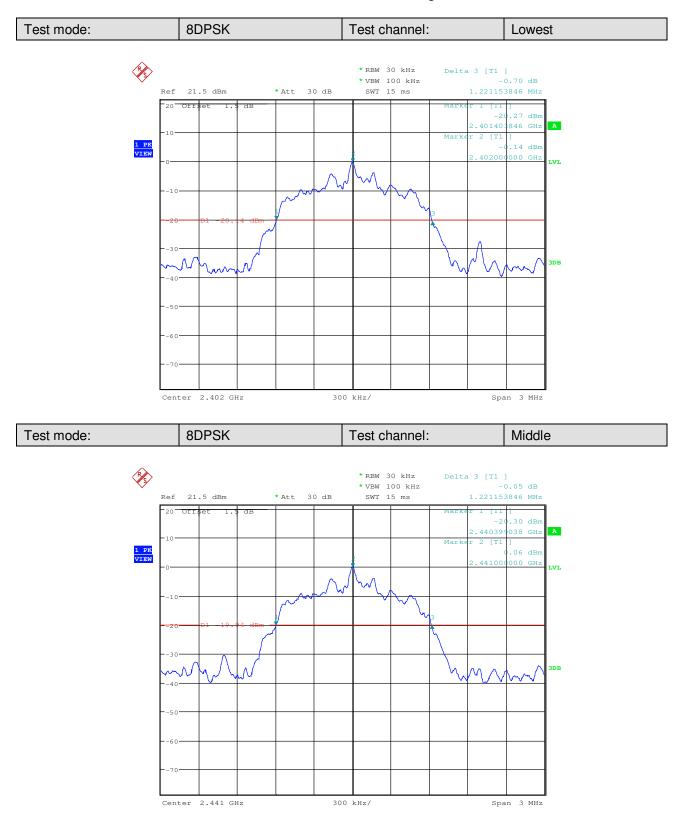



Report No.: SZEM141100660701 Page: 29 of 93

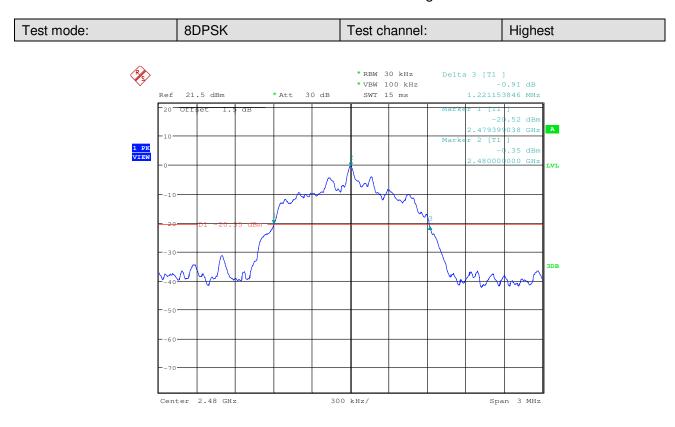



Report No.: SZEM141100660701 Page: 30 of 93

### 6.5 Carrier Frequencies Separation

Test Requirement:	47 CFR Part 15C Section 15.247 (a)(1)		
Test Method:	ANSI C63.10:2009		
Test Setup:	Spectrum Analyzer E.U.T Non-Conducted Table Ground Reference Plane		
Limit:	2/3 of the 20dB bandwidth		
	Remark: the transmission power is less than 0.125W.		
Exploratory Test Mode:	Hopping transmitting with all kind of modulation and all kind of data type		
Final Test Mode:	Through Pre-scan, find the DH1 of data type is the worse case of GFSK modulation type, 2-DH1 of data type is worse case of $\pi/4DQPSK$ modulation type, 3-DH1 of data type is worse case of 8DPSK modulation type.		
Instruments Used:	Refer to section 5.10 for details		
Test Results:	Pass		

<sup>&</sup>quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sqs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sqs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM141100660701 Page: 31 of 93

#### **Measurement Data**


GFSK mode			
Test channel	Carrier Frequencies Separation (kHz)	Limit (kHz)	Result
Lowest	1002	≥587	Pass
Middle	1002	≥587	Pass
Highest	1002	≥587	Pass
	π/4DQPSK m	ode	
Test channel	Carrier Frequencies Separation (kHz)	Limit (kHz)	Result
Lowest	1002	≥837	Pass
Middle	1002	≥837	Pass
Highest	1002	≥837	Pass
	8DPSK mo	de	
Test channel	Carrier Frequencies Separation (kHz)	Limit (kHz)	Result
Lowest	1002	≥814	Pass
Middle	1002	≥814	Pass
Highest	1002	≥814	Pass

Note: According to section 6.4,

Mode	20dB bandwidth (kHz) (worse case)	Limit (kHz) (Carrier Frequencies Separation)
GFSK	879.808	587
π/4DQPSK	1254.808	837
8DPSK	1221.154	814




Report No.: SZEM141100660701 Page: 32 of 93

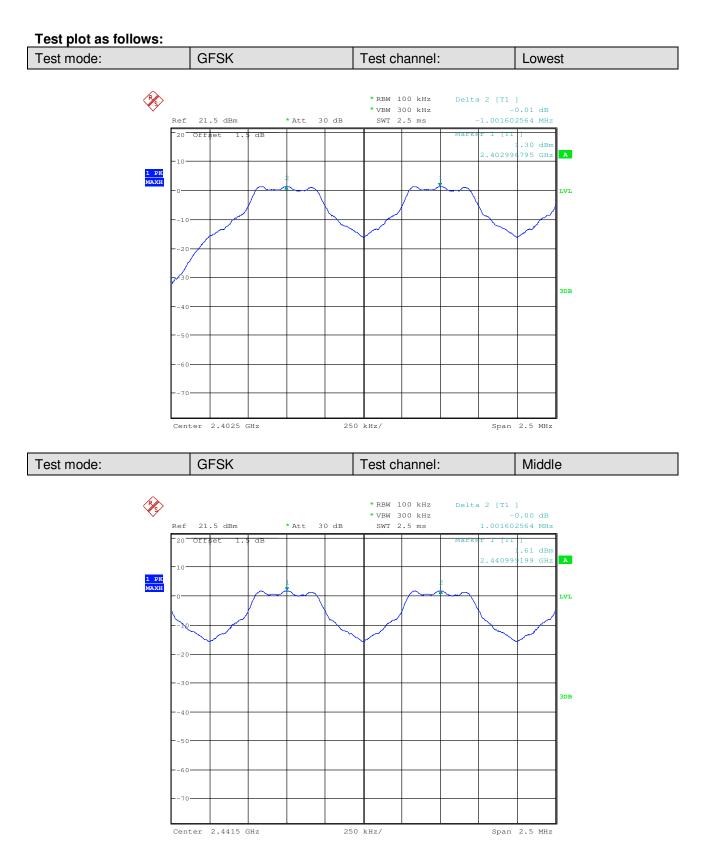




Report No.: SZEM141100660701 Page: 33 of 93

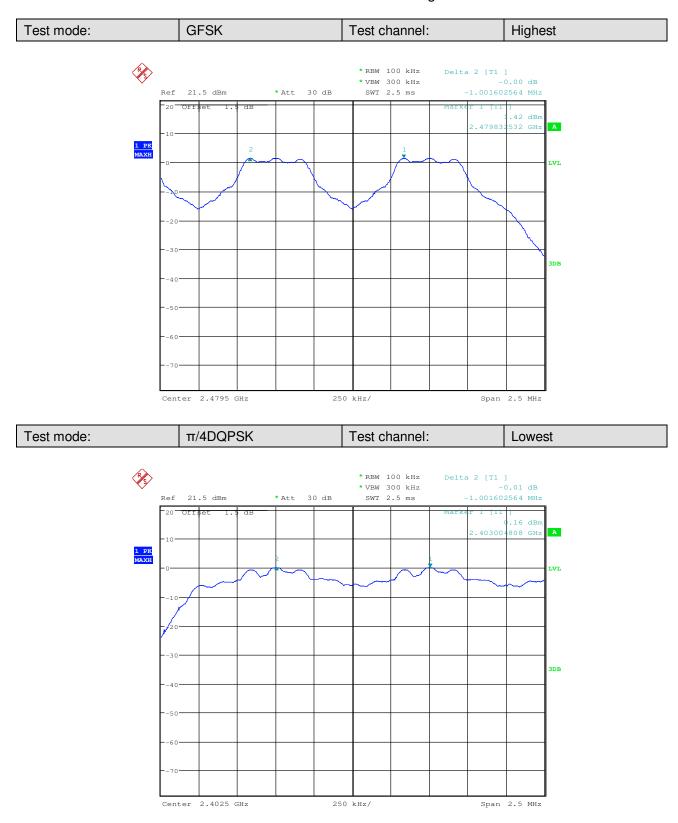




Report No.: SZEM141100660701 Page: 34 of 93

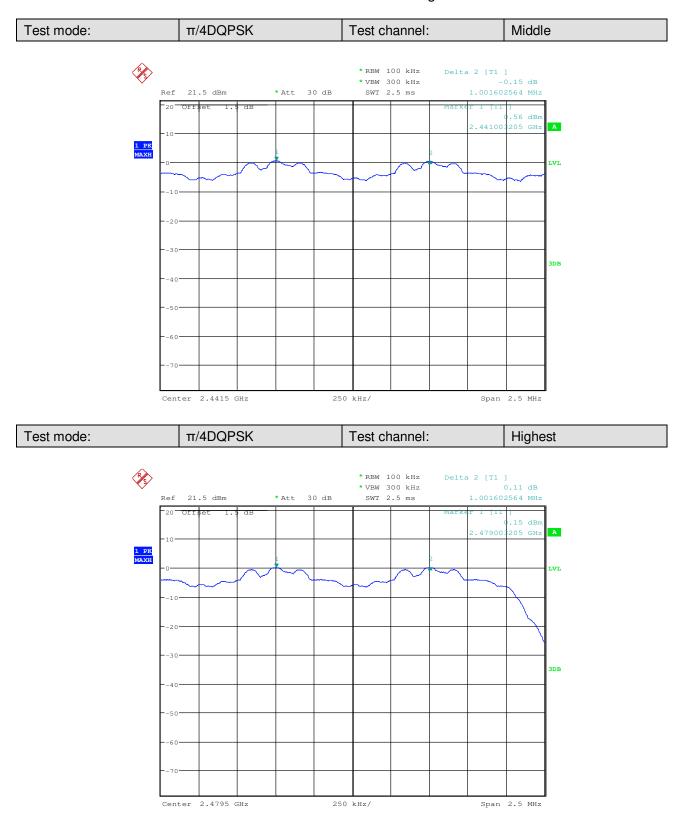




Report No.: SZEM141100660701 Page: 35 of 93

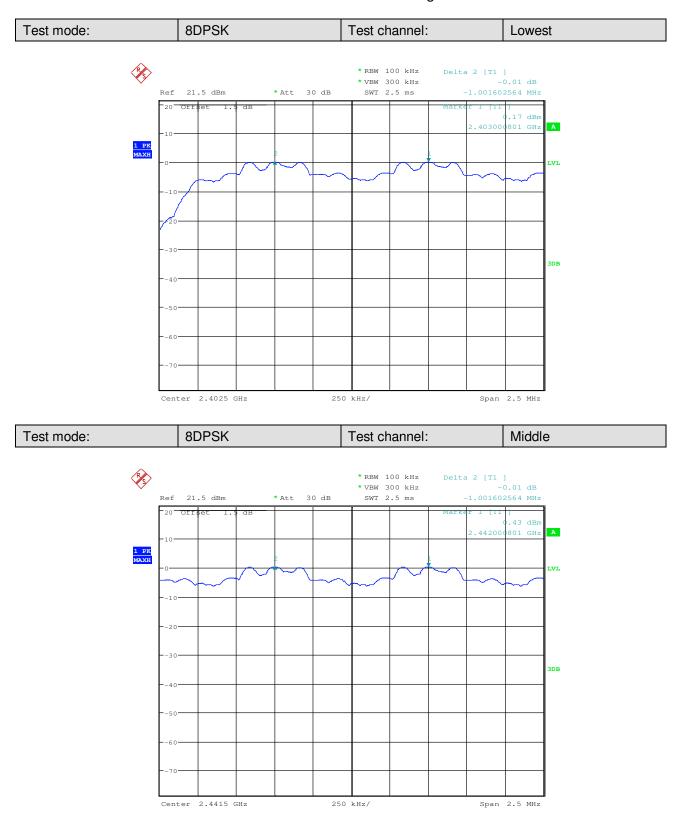



Report No.: SZEM141100660701 Page: 36 of 93

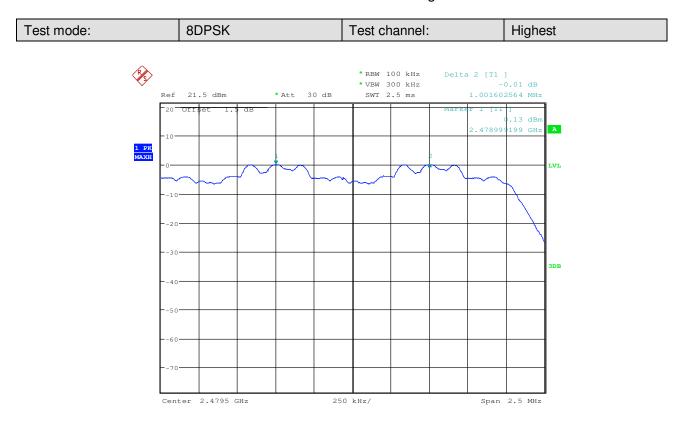





Report No.: SZEM141100660701 Page: 37 of 93

#### 6.6 Hopping Channel Number

Test Requirement:	47 CFR Part 15C Section 15.247 (b)	
Test Method:	ANSI C63.10:2009	
Test Setup:	Spectrum Analyzer E.U.T Non-Conducted Table Ground Reference Plane	
Limit:	At least 15 channels	
Test Mode:	Hopping transmitting with all kind of modulation	
Instruments Used:	Refer to section 5.10 for details	
Test Results:	Pass	


#### **Measurement Data**

Mode	Hopping channel numbers	Limit
GFSK	79	≥15
π/4DQPSK	79	≥15
8DPSK	79	≥15

<sup>&</sup>quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."




Report No.: SZEM141100660701 Page: 38 of 93

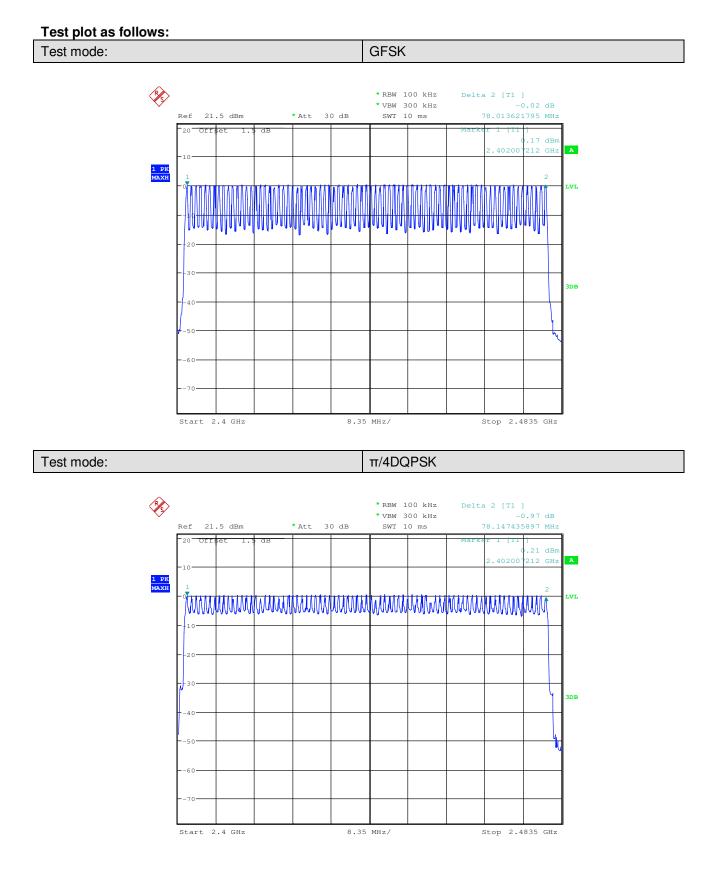



Report No.: SZEM141100660701 Page: 39 of 93

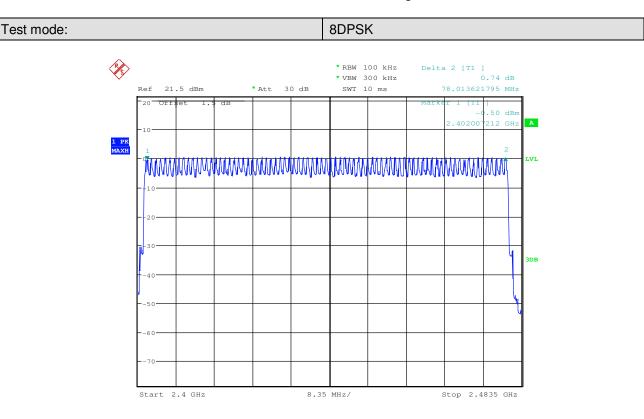



Report No.: SZEM141100660701 Page: 40 of 93

#### 6.7 Dwell Time

Test Requirement:	47 CFR Part 15C Section 15.247 (a)(1)	
Test Method:	ANSI C63.10:2009	
Test Setup:	Spectrum Analyzer E.U.T Non-Conducted Table	
	Ground Reference Plane	
Instruments Used:	Refer to section 5.10 for details	
Test Mode:	Hopping transmitting with all kind of modulation and all kind of data type.	
Limit:	0.4 Second	
Test Results:	Pass	

#### **Measurement Data**

Mode	Packet	Dwell time (second)	Limit (second)
GFSK	DH1	0.16288	0.4
	DH3	0.28272	0.4
	DH5	0.33055	0.4
π/4DQPSK	2-DH1	0.16672	0.4
	2-DH3	0.28464	0.4
	2-DH5	0.33187	0.4
8DPSK	3-DH1	0.16672	0.4
	3-DH3	0.28336	0.4
	3-DH5	0.33363	0.4

# SGS

# SGS-CSTC Standards Technical Services Ltd.

Report No.: SZEM141100660701 Page: 41 of 93


#### **Remark:**

The test period: T= 0.4 Second/Channel x 79 Channel = 31.6 s On (ms)\*total number=dwell time (ms) The lowest channel (2402MHz), as below: DH1 time slot=0.509 (ms)\*total number=162.88 (ms) DH3 time slot=1.767 (ms)\* total number = 282.72 (ms) DH5 time slot=3.005 (ms)\* total number = 330.55 (ms) 2-DH1 time slot=0.521 (ms)\*total number=166.72 (ms) 2-DH3 time slot=1.779 (ms)\* total number = 284.64 (ms) 2-DH5 time slot=3.017 (ms)\* total number = 331.87 (ms) 3-DH1 time slot=0.521 (ms)\*total number=166.72 (ms) 3-DH3 time slot=1.771 (ms)\* total number = 283.36 (ms) 3-DH5 time slot=3.033 (ms)\* total number = 333.63 (ms)




Report No.: SZEM141100660701 Page: 42 of 93

#### Test plot as follows:

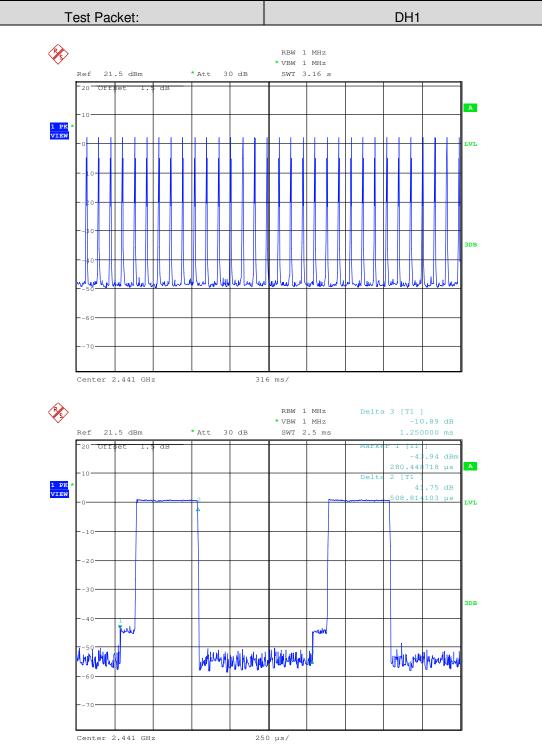




Report No.: SZEM141100660701 Page: 43 of 93

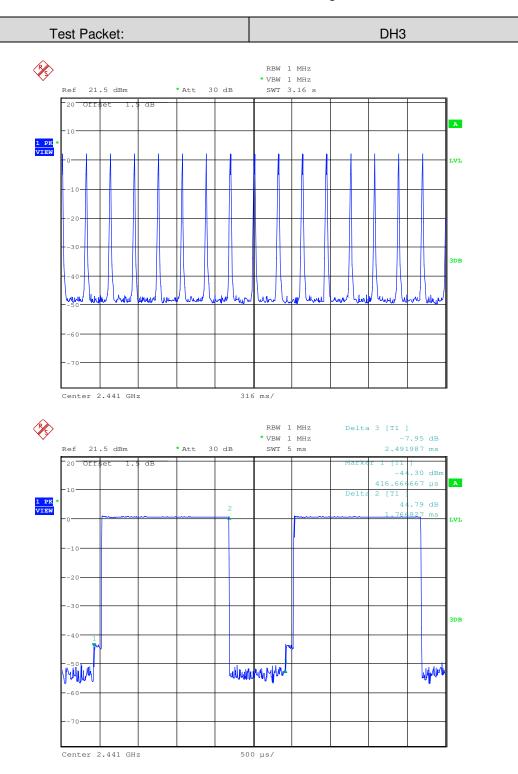




Report No.: SZEM141100660701 Page: 44 of 93

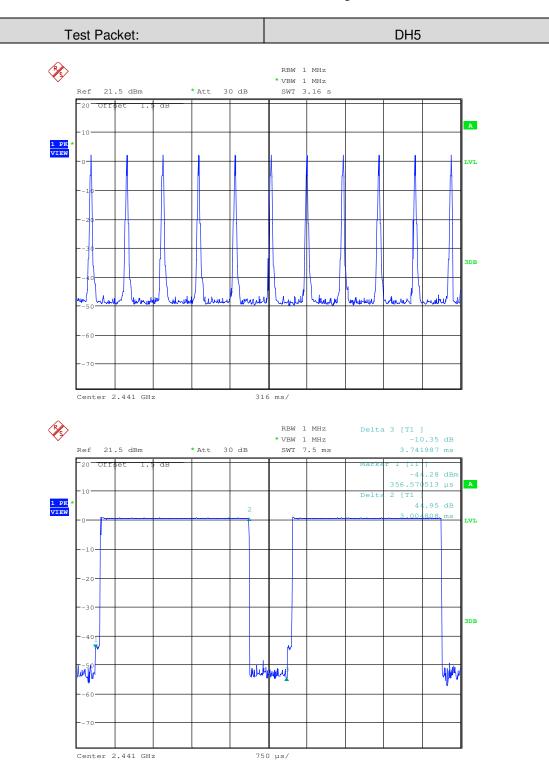




Report No.: SZEM141100660701 Page: 45 of 93

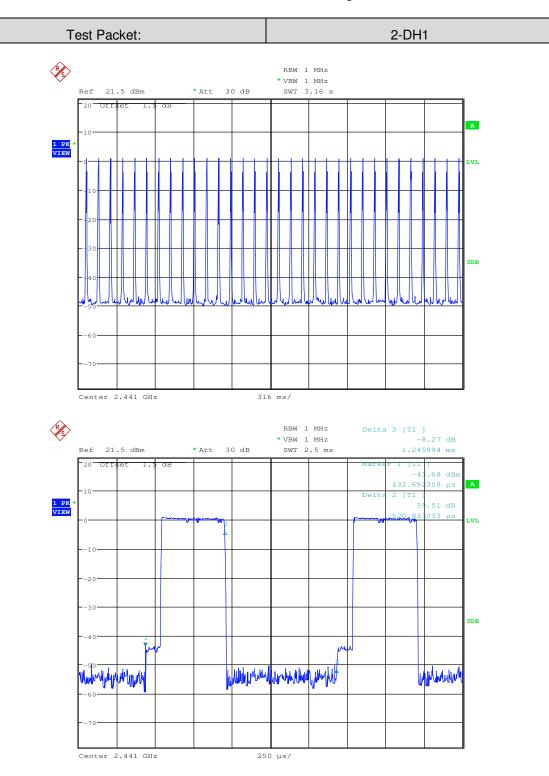




Report No.: SZEM141100660701 Page: 46 of 93

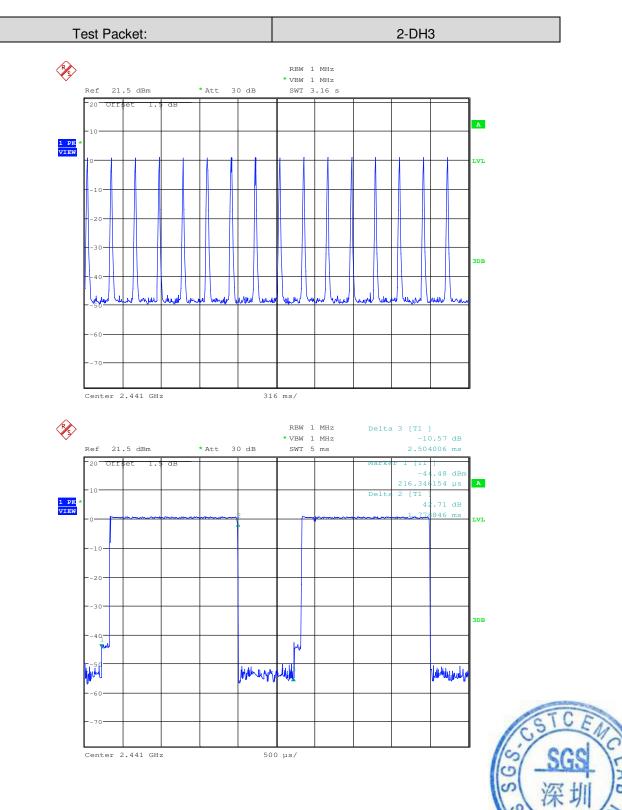




Report No.: SZEM141100660701 Page: 47 of 93

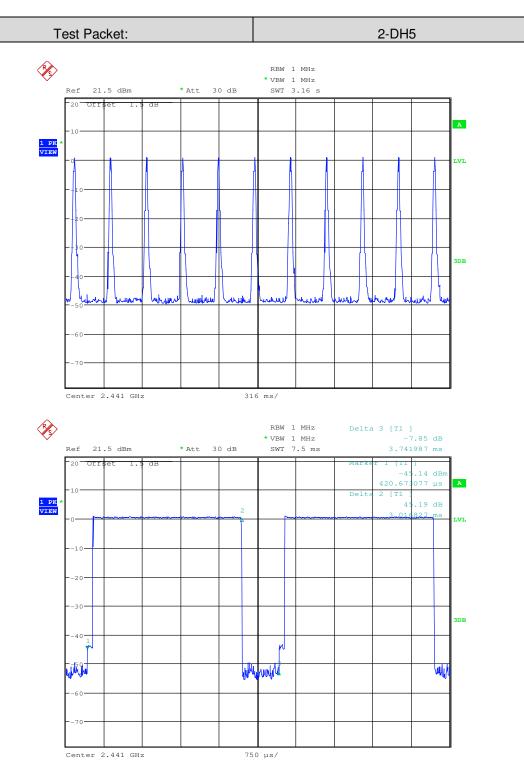




Report No.: SZEM141100660701 Page: 48 of 93

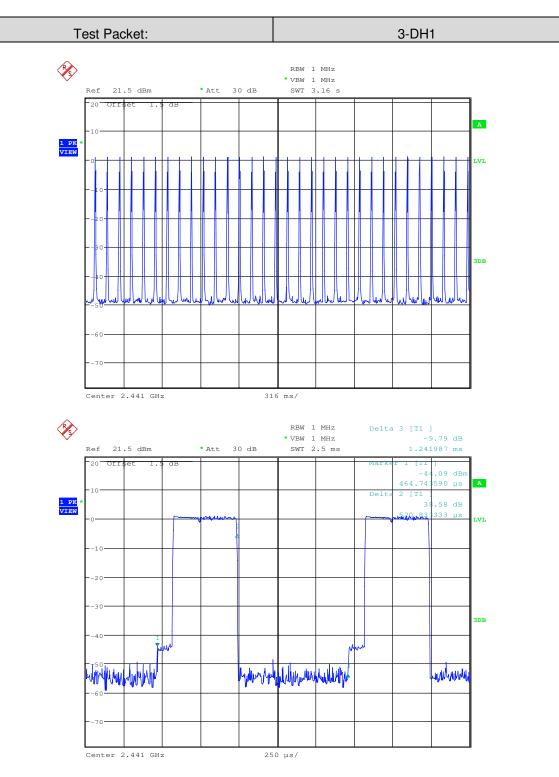




Report No.: SZEM141100660701 Page: 49 of 93

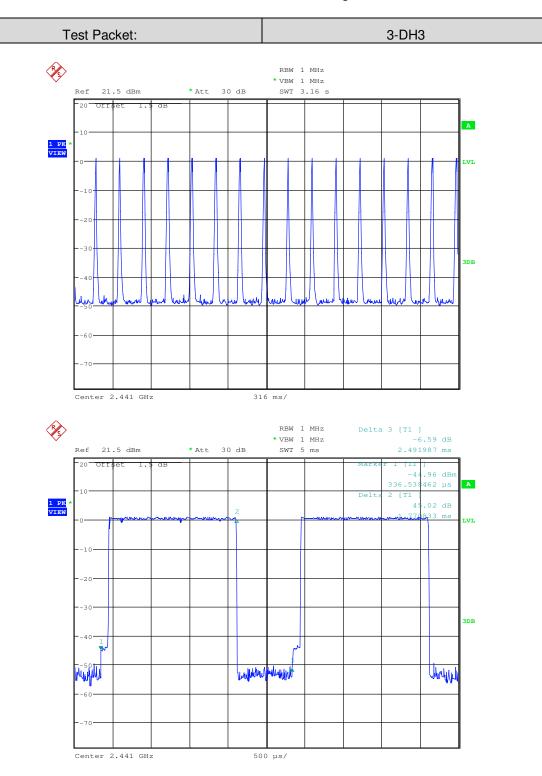



Report No.: SZEM141100660701 Page: 50 of 93

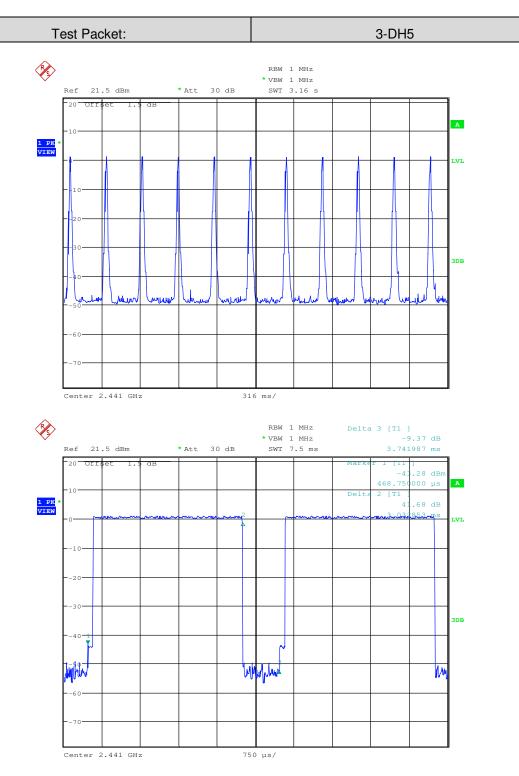



Report No.: SZEM141100660701 Page: 51 of 93


#### 6.8 Band-edge for RF Conducted Emissions

Test Requirement:	47 CFR Part 15C Section 15.247 (d)	
Test Method:	ANSI C63.10:2009	
Test Setup:	Spectrum Analyzer E.U.T Non-Conducted Table Ground Reference Plane Remark: Offset the High-Frequency cable loss 1.5dB in the spectrum analyzer.	
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.	
Exploratory Test Mode:	Hopping and Non-hopping transmitting with all kind of modulation and all kind of data type	
Final Test Mode:	Through Pre-scan, find the DH1 of data type is the worse case of GFSK modulation type, 2-DH1 of data type is worse case of $\pi$ /4DQPSK modulation type, 3-DH1 of data type is worse case of 8DPSK modulation type.	
Instruments Used:	Refer to section 5.10 for details	
Test Results:	Pass	

<sup>&</sup>quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."




Report No.: SZEM141100660701 Page: 52 of 93

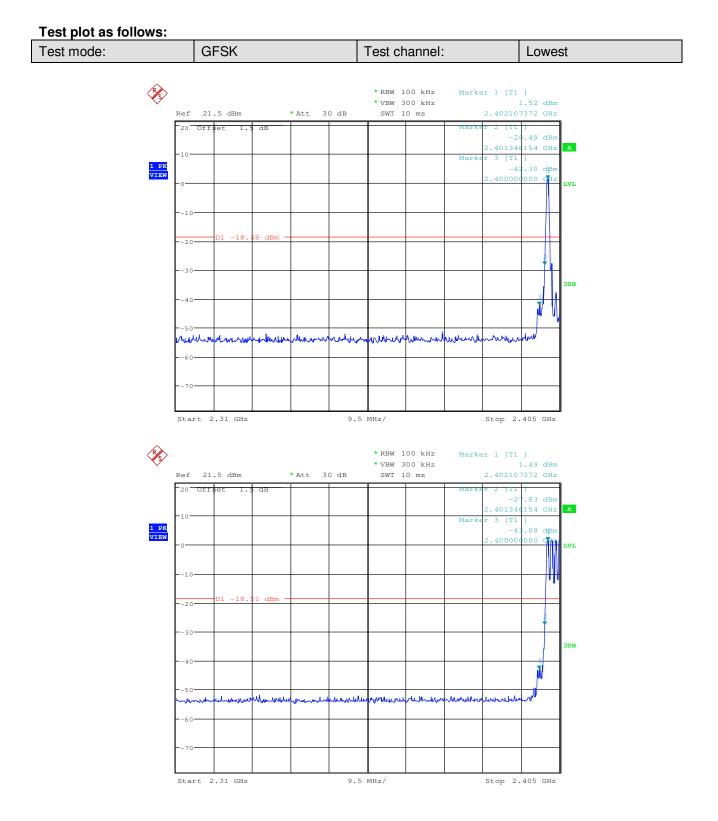




Report No.: SZEM141100660701 Page: 53 of 93

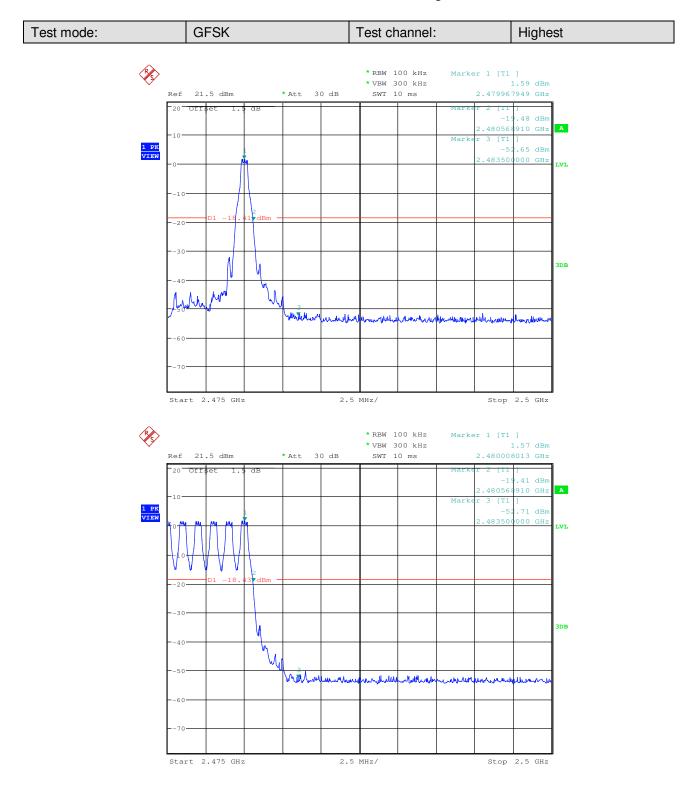




Report No.: SZEM141100660701 Page: 54 of 93

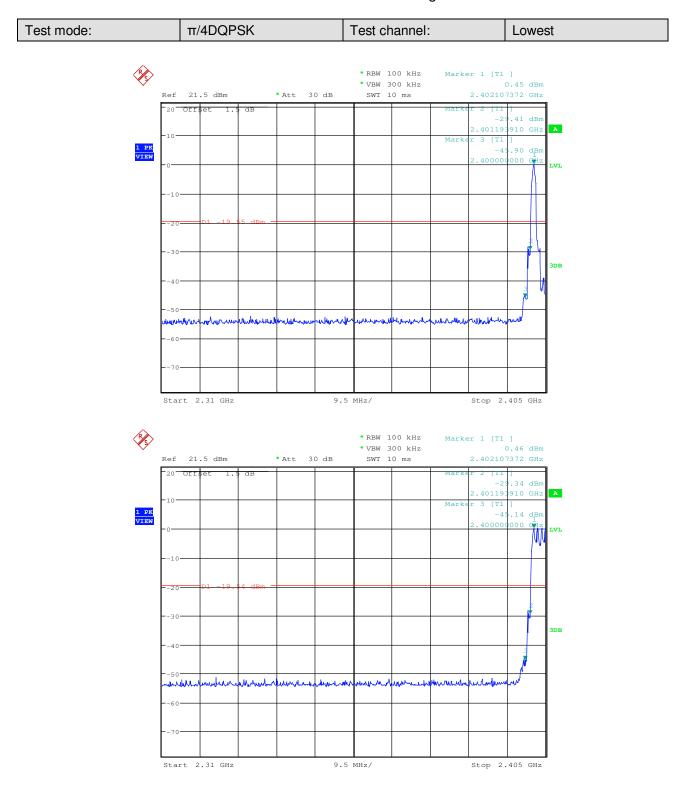




Report No.: SZEM141100660701 Page: 55 of 93

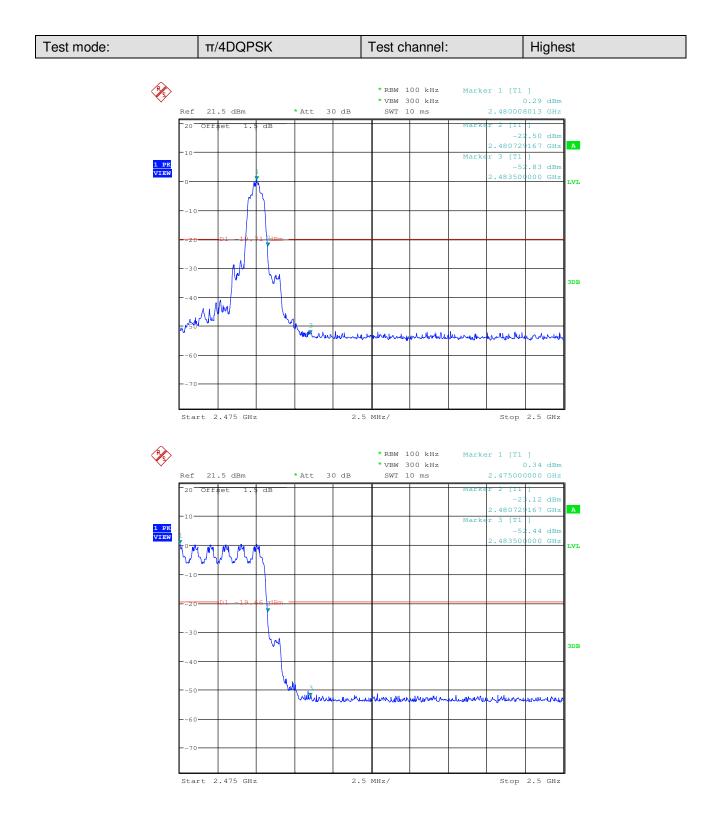

<sup>&</sup>quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sqs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sqs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."




Report No.: SZEM141100660701 Page: 56 of 93

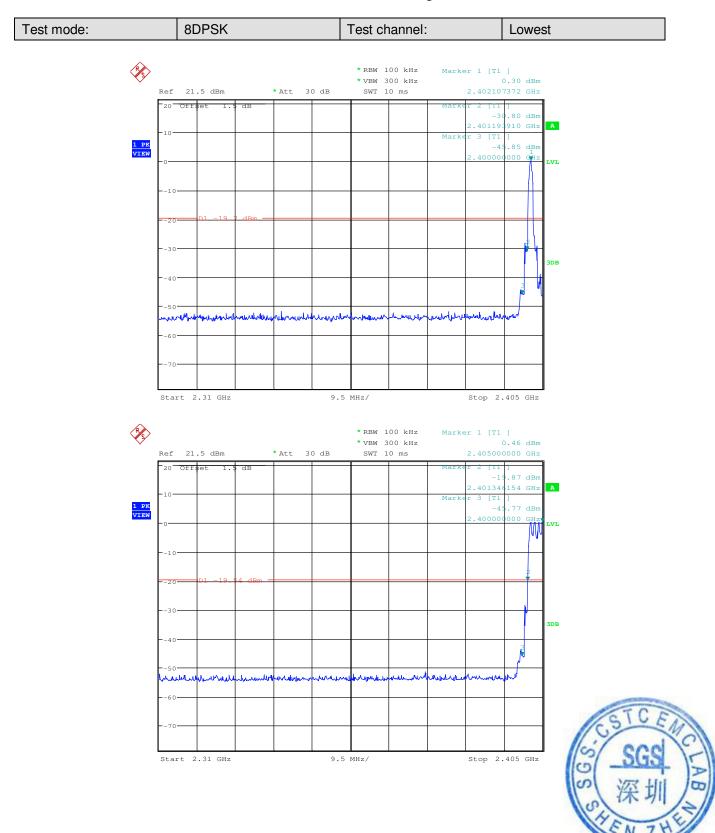



Report No.: SZEM141100660701 Page: 57 of 93

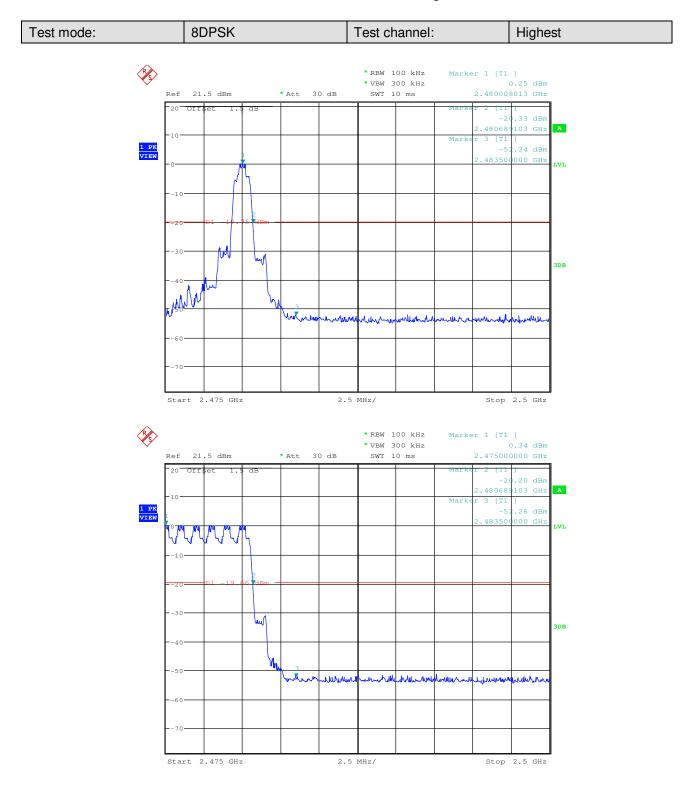



Report No.: SZEM141100660701 Page: 58 of 93


#### 6.9 Spurious RF Conducted Emissions

Test Requirement:	47 CFR Part 15C Section 15.247 (d)	
Test Method:	ANSI C63.10:2009	
Test Setup:	Spectrum Analyzer E.U.T Non-Conducted Table Ground Reference Plane	
	Remark: Offset the High-Frequency cable loss 1.5dB in the spectrum analyzer.	
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.	
Exploratory Test Mode:	Non-hopping transmitting with all kind of modulation and all kind of data type	
Final Test Mode:	Through Pre-scan, find the DH1 of data type is the worse case of GFSK modulation type, 2-DH1 of data type is worse case of $\pi$ /4DQPSK modulation type, 3-DH1 of data type is worse case of 8DPSK modulation type.	
Instruments Used:	Refer to section 5.10 for details	
Test Results:	Pass	

<sup>&</sup>quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sqs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sqs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."




Report No.: SZEM141100660701 Page: 59 of 93

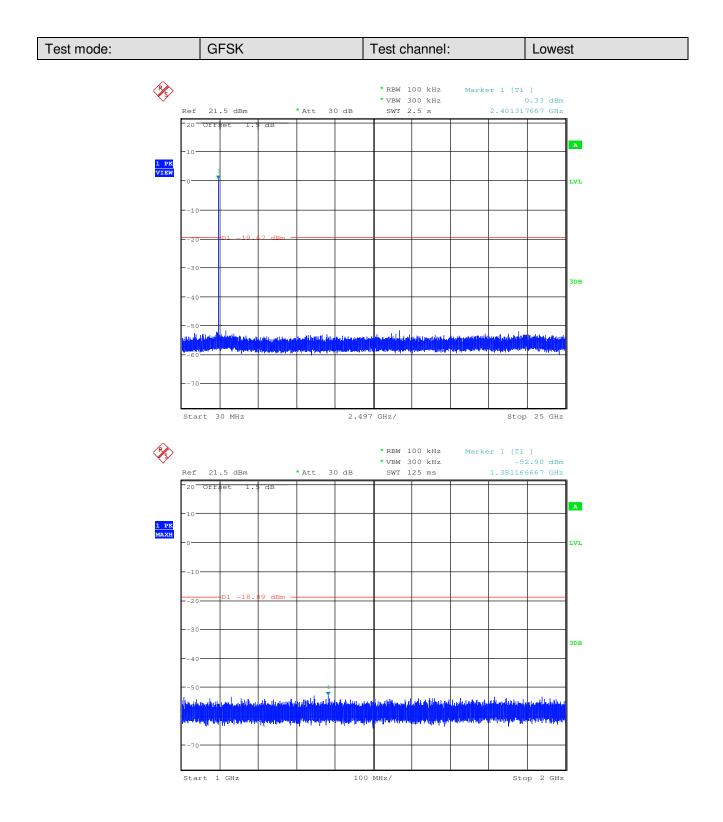




Report No.: SZEM141100660701 Page: 60 of 93

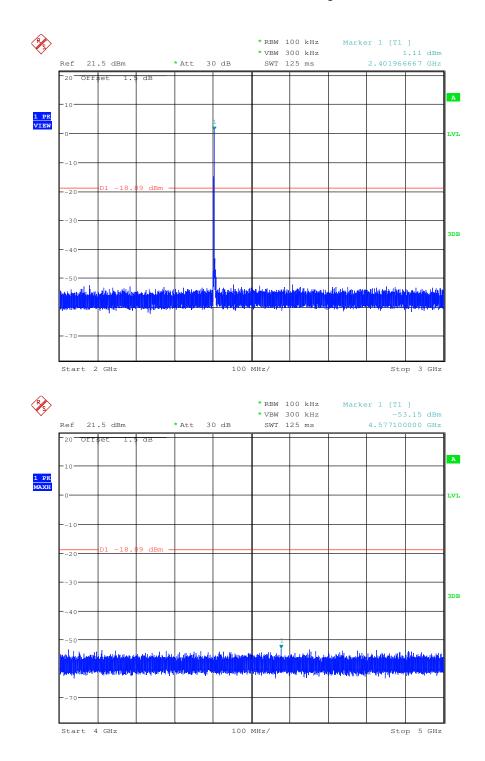




Report No.: SZEM141100660701 Page: 61 of 93

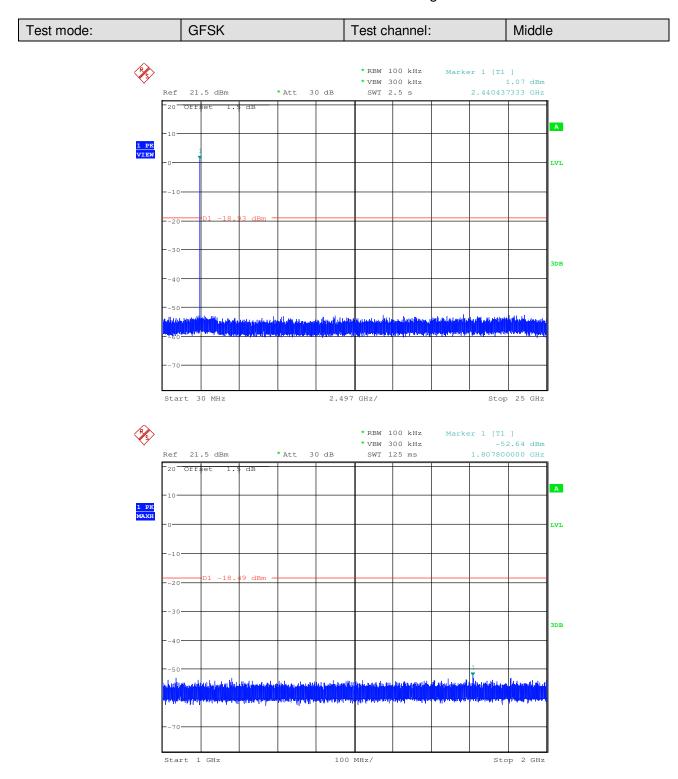




Report No.: SZEM141100660701 Page: 62 of 93

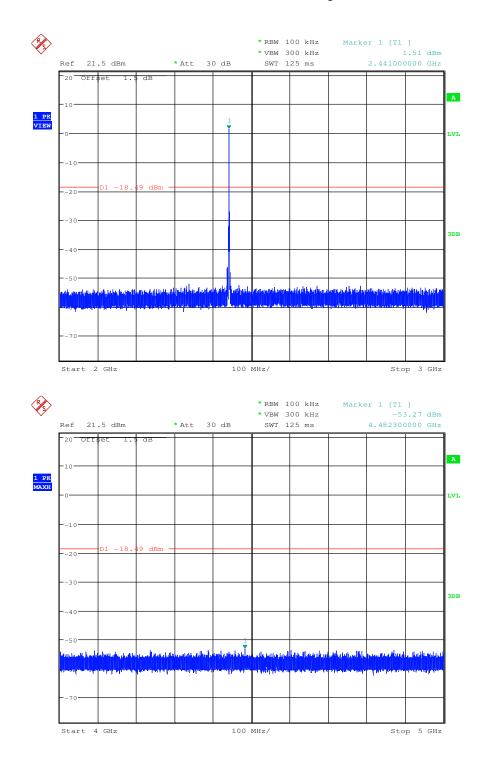




Report No.: SZEM141100660701 Page: 63 of 93

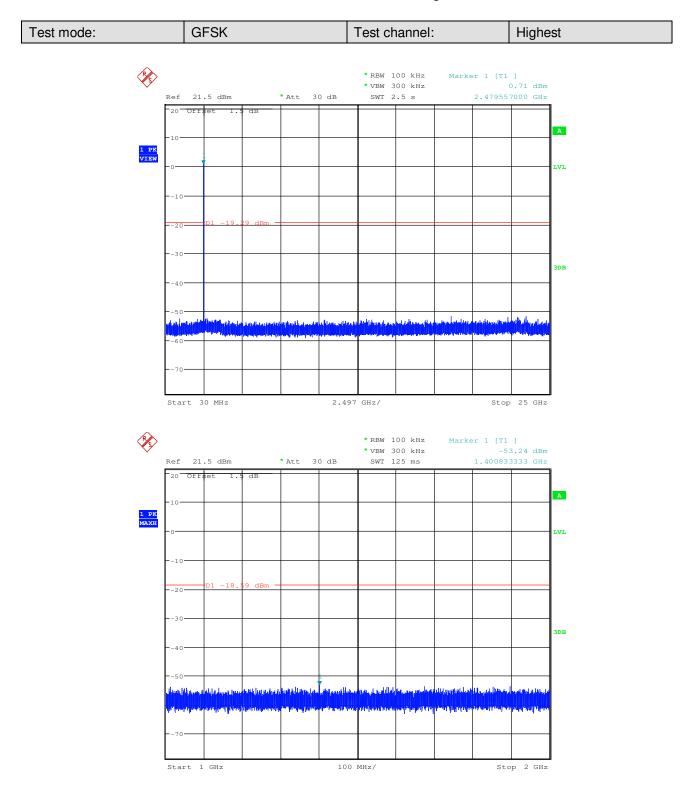




Report No.: SZEM141100660701 Page: 64 of 93

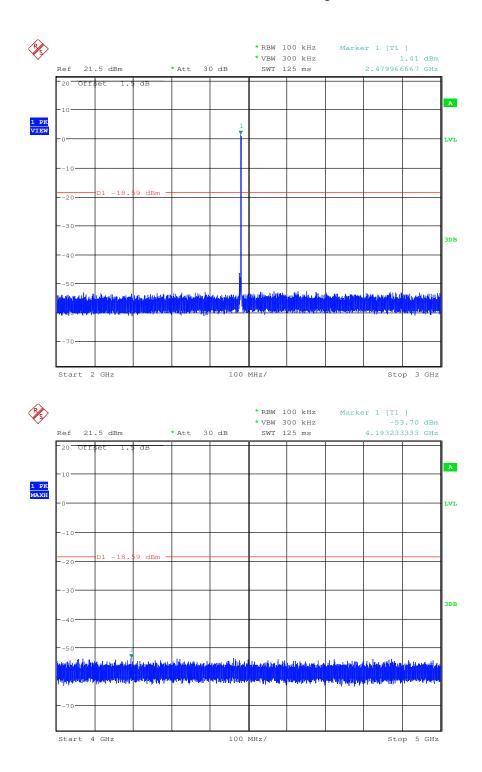




Report No.: SZEM141100660701 Page: 65 of 93

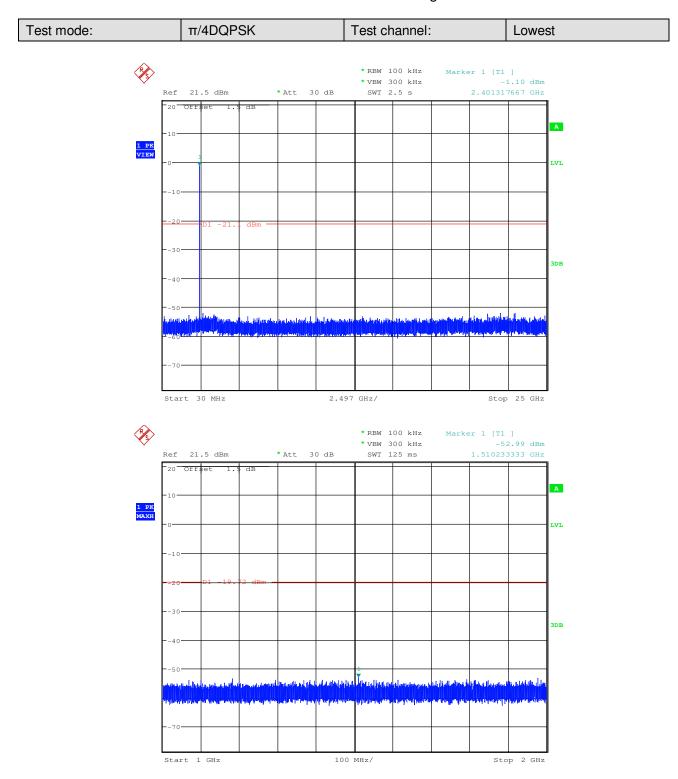




Report No.: SZEM141100660701 Page: 66 of 93

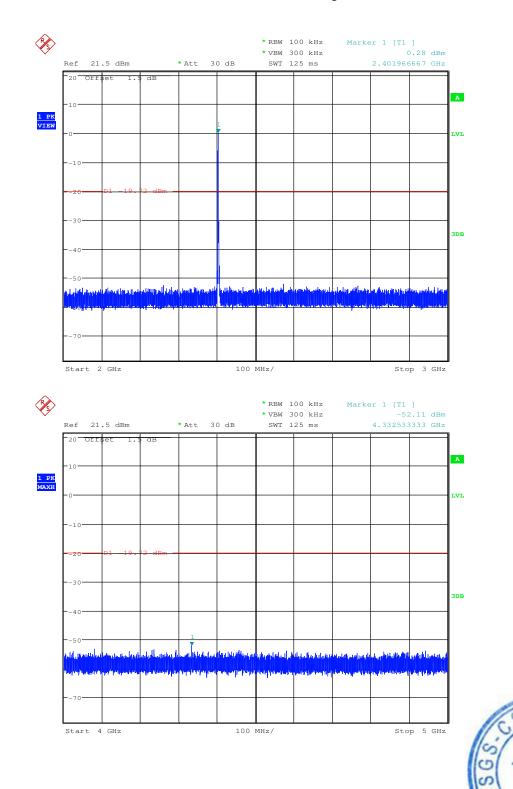




Report No.: SZEM141100660701 Page: 67 of 93

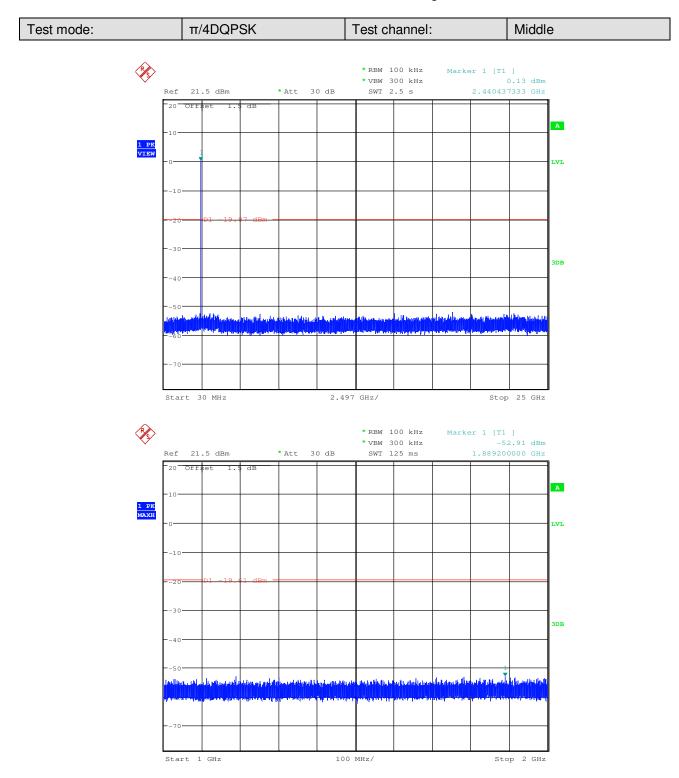




Report No.: SZEM141100660701 Page: 68 of 93

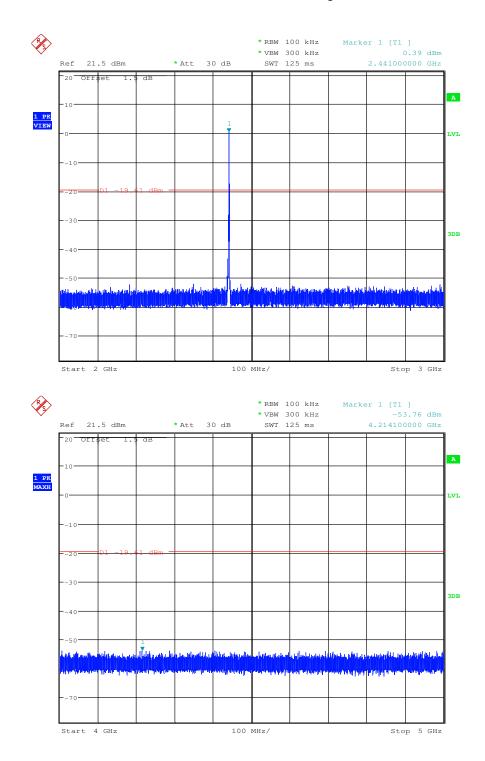




Report No.: SZEM141100660701 Page: 69 of 93

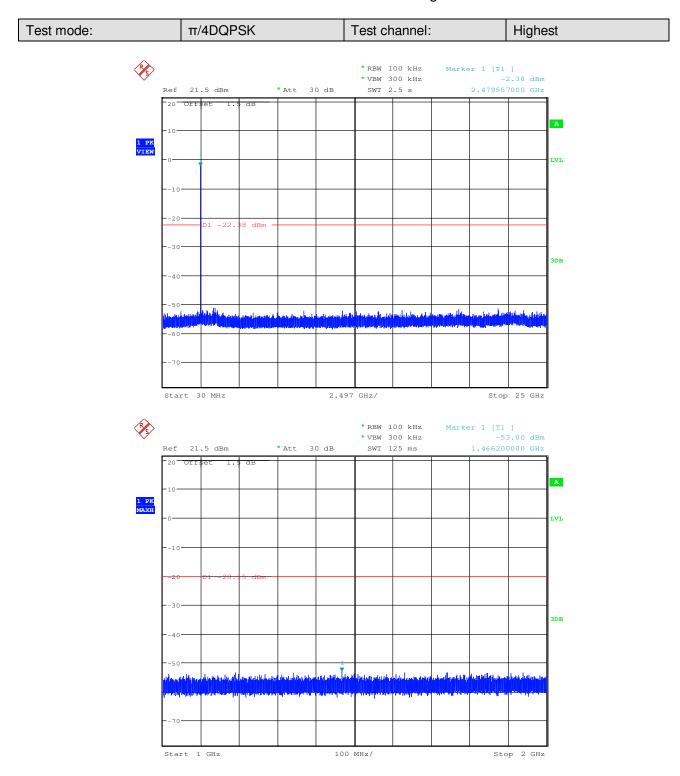




Report No.: SZEM141100660701 Page: 70 of 93

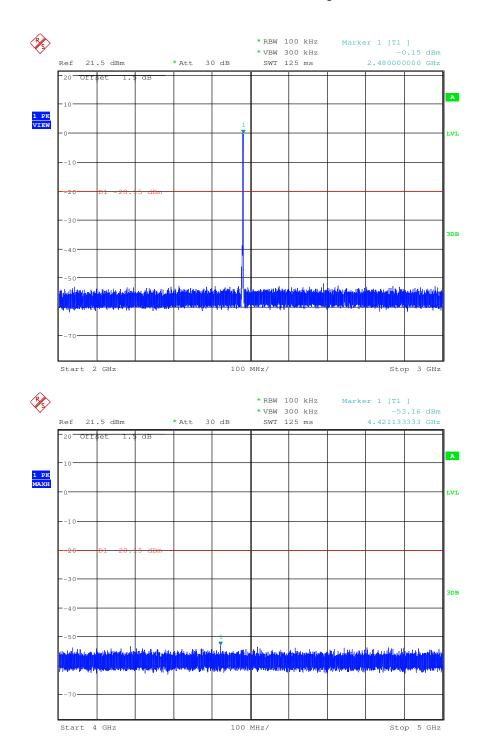




Report No.: SZEM141100660701 Page: 71 of 93

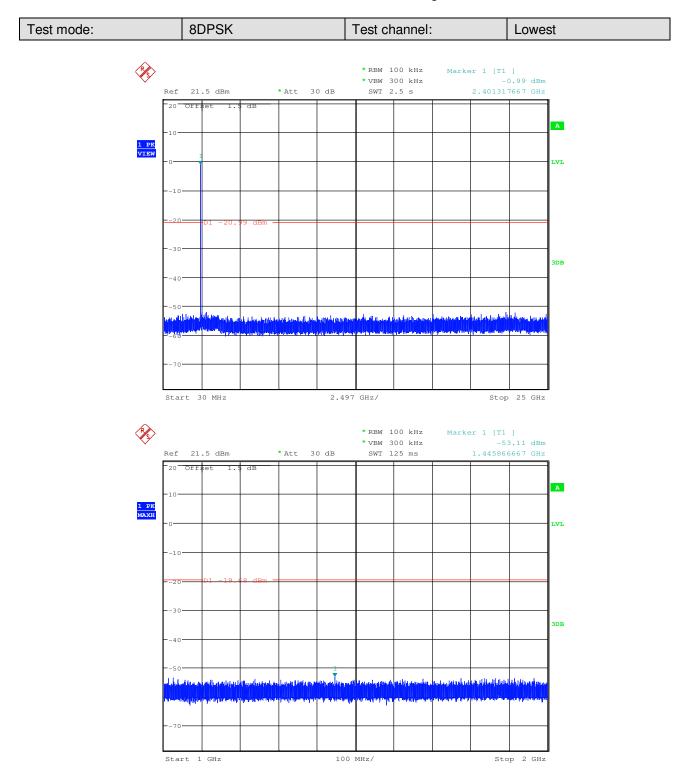




Report No.: SZEM141100660701 Page: 72 of 93

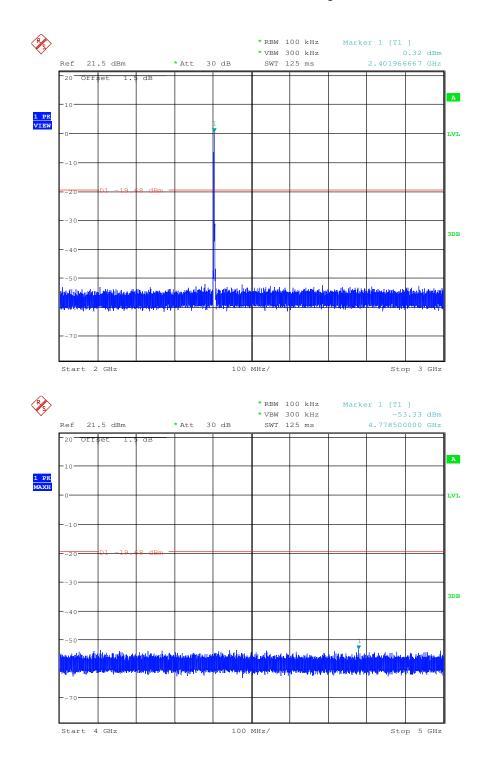




Report No.: SZEM141100660701 Page: 73 of 93

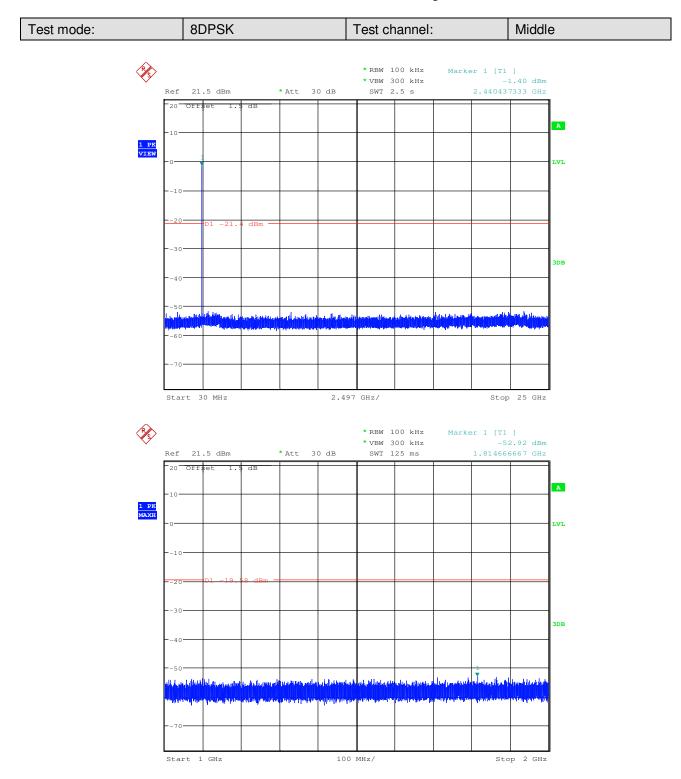




Report No.: SZEM141100660701 Page: 74 of 93

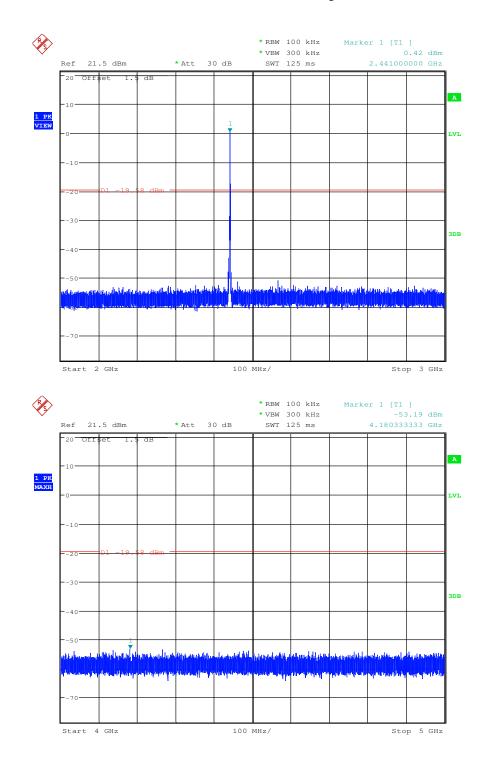




Report No.: SZEM141100660701 Page: 75 of 93

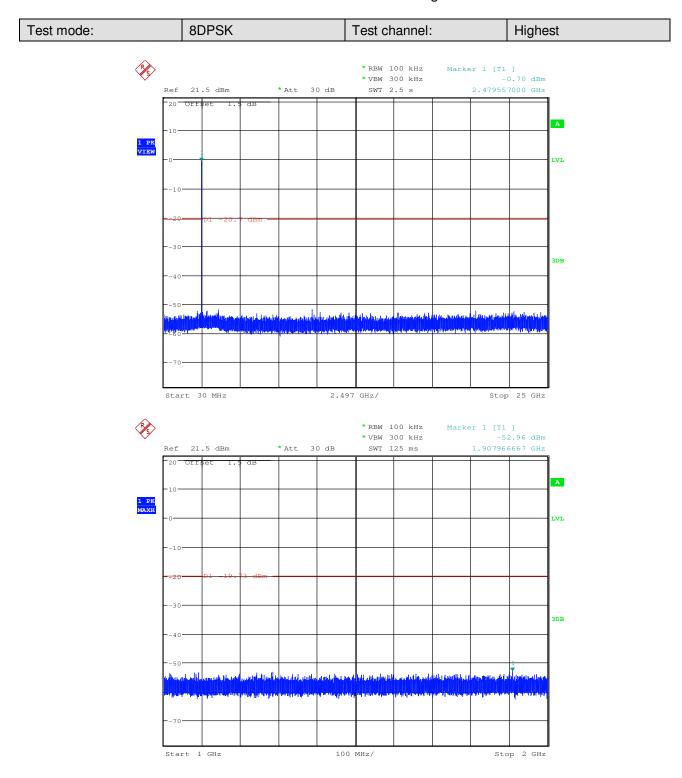



Report No.: SZEM141100660701 Page: 76 of 93

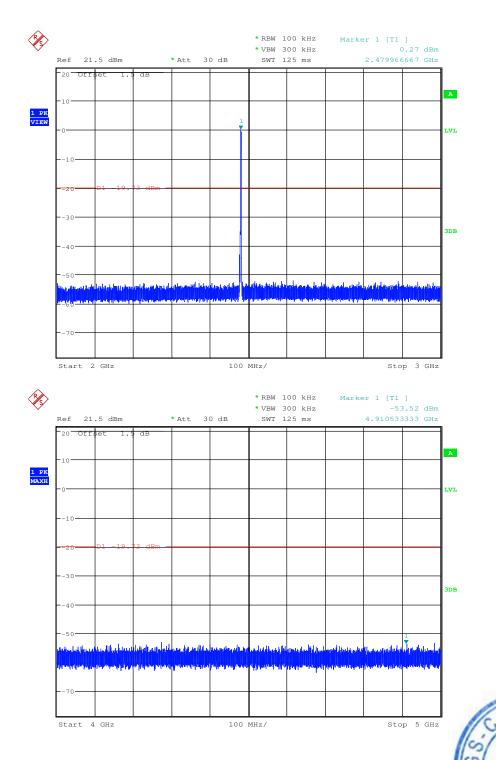

#### Remark:

Pretest 9kHz to 25GHz, find the highest point when testing, so only the worst data were shown in the test report. Per FCC Part 15.33 (a) and 15.31 (o) ,The amplitude of spurious emissions from intentional radiators which are attenuated more than 20 dB below the permissible value need not be reported unless specifically required elsewhere in this part.



Report No.: SZEM141100660701 Page: 77 of 93

#### 6.10 Other requirements Frequency Hopping Spread Spectrum System

Test Requirement:	47 CFR Part 15C Section 15.247 (a)(1), (h) requirement:
rate from a Pseudorandom on the average by each tra	annel frequencies that are selected at the system hopping ordered list of hopping frequencies. Each frequency must be used equally nsmitter. The system receivers shall have input bandwidths that match the as of their corresponding transmitters and shall shift frequencies in ansmitted signals.
channels during each trans receiver, must be designed transmitter be presented w employing short transmissi	spectrum systems are not required to employ all available hopping smission. However, the system, consisting of both the transmitter and the I to comply with all of the regulations in this section should the ith a continuous data (or information) stream. In addition, a system on bursts must comply with the definition of a frequency hopping system smissions over the minimum number of hopping channels specified in
the system to recognize of independently chooses and The coordination of frequer	pence within a frequency hopping spread spectrum system that permits her users within the spectrum band so that it individually and d adapts its hopsets to avoid hopping on occupied channels is permitted. hey hopping systems in any other manner for the express purpose of occupancy of individual hopping frequencies by multiple transmitters is
Compliance for section 1	5.247(a)(1)
stage shift register whose 5 outputs are added in a moc stage. The sequence begin with nine ones. • Number of shift register st	dulo-two addition stage. And the result is fed back to the input of the first s with the first ONE of 9 consecutive ONEs; i.e. the shift register is initialized rages: 9 sequence: $2^9 - 1 = 511$ bits
Linear Feedback	Shift Register for Generation of the PRBS sequence
An example of Pseudorand	om Frequency Hopping Sequence as follow:
20 62 46 77	
	lly on the average by each transmitter.
bandwidths that match the	re Specification, Bluetooth receivers are designed to have input and IF e hopping channel bandwidths of any Bluetooth transmitters and shift tion with the transmitted signals.
· · · · · · · · · · · · · · · · · · ·	

<sup>&</sup>quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sqs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sqs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM141100660701 Page: 78 of 93

#### Compliance for section 15.247(g)

According to Bluetooth Core Specification, the Bluetooth system transmits the packet with the pseudorandom hopping frequency with a continuous data and the short burst transmission from the Bluetooth system is also transmitted under the frequency hopping system with the pseudorandom hopping frequency system.

#### Compliance for section 15.247(h)

According to Bluetooth Core specification, the Bluetooth system incorporates with an adaptive system to detect other user within the spectrum band so that it individually and independently to avoid hopping on the occupied channels.

According to the Bluetooth Core specification, the Bluetooth system is designed not have the ability to coordinated with other FHSS System in an effort to avoid the simultaneous occupancy of individual hopping frequencies by multiple transmitter.

<sup>&</sup>quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sqs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sqs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM141100660701 Page: 79 of 93


Test Requirement:	47 CFR Part 15C Section 15.209 and 15.205								
Test Method:	ANSI C63.10: 2009								
Test Site:	Measurement Distance	Measurement Distance: 3m (Semi-Anechoic Chamber)							
Receiver Setup:	Frequency		Detector	RBW	VBW	Remark			
	0.009MHz-0.090MH	z	Peak	10kHz	z 30kHz	Peak			
	0.009MHz-0.090MH	z	Average	10kHz	z 30kHz	Average			
	0.090MHz-0.110MH	Z	Quasi-peak	10kHz	z 30kHz	Quasi-peak			
	0.110MHz-0.490MH	z	Peak	10kHz	z 30kHz	Peak			
	0.110MHz-0.490MH	Z	Average	10kHz	z 30kHz	Average			
	0.490MHz -30MHz		Quasi-peak	10kHz	z 30kHz	Quasi-peak			
	30MHz-1GHz		Quasi-peak	100 kH	lz 300kHz	Quasi-peak			
	Above 1GHz		Peak	1MHz	z 3MHz	Peak			
			Peak	1MHz	z 10Hz	Average			
Limit:	Frequency		eld strength crovolt/meter)	Limit (dBuV/m)	Remark	Measuremei distance (m			
	0.009MHz-0.490MHz	2	400/F(kHz)	-	-	300			
	0.490MHz-1.705MHz	24	4000/F(kHz)	-	-	30			
	1.705MHz-30MHz		30	-	-	30			
	30MHz-88MHz		100	40.0	Quasi-peak	3			
	88MHz-216MHz		150	43.5	Quasi-peak	3			
	216MHz-960MHz		200	46.0	Quasi-peak	3			
	960MHz-1GHz		500	54.0	Quasi-peak	3			
	Above 1GHz 500		54.0	Average	3				
Note: 15.35(b), Unless otherwise specified, the limit on peak radio freq emissions is 20dB above the maximum permitted average emiss applicable to the equipment under test. This peak limit applies to peak emission level radiated by the device.									

#### 6.11 Radiated Spurious Emission

<sup>&</sup>quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sqs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sqs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM141100660701 Page: 80 of 93

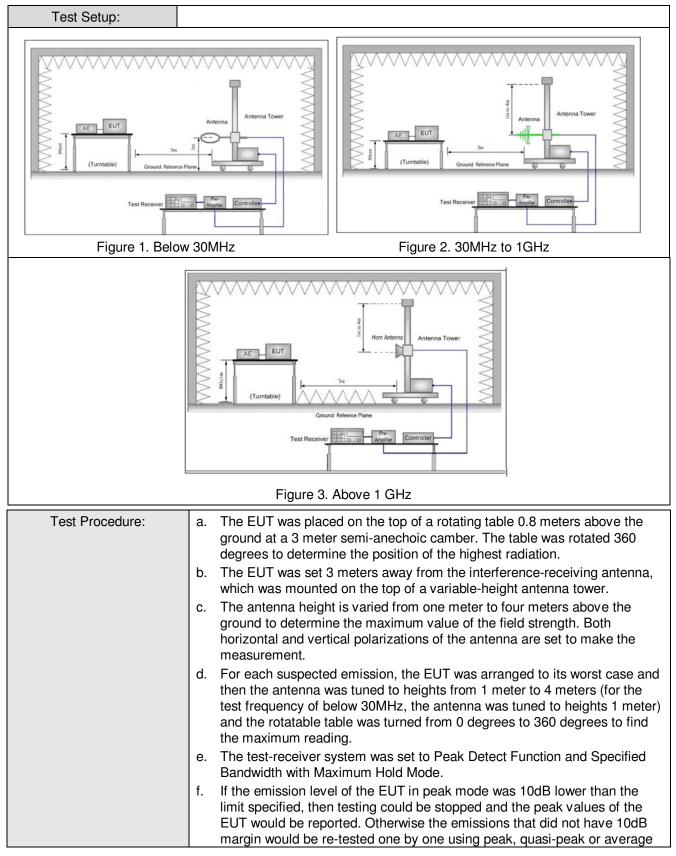



Report No.: SZEM141100660701 Page: 81 of 93


	method as specified and then reported in a data sheet.
	g. Test the EUT in the lowest channel (2402MHz),the middle channel (2441MHz),the Highest channel (2480MHz)
	h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is worse case.
	i. Repeat above procedures until all frequencies measured was complete.
Exploratory	Non-hopping transmitting mode with all kind of modulation and all kind of
Test Mode:	data type
	Transmitting mode, Charge + Transmitting mode, Charge + Discharge + Transmitting mode.
	Through Pre-scan, find the DH1 of data type and GFSK modulation is the worse case.
	Pretest the EUT at Transmitting mode, Charge + Transmitting and Charge + Discharge + Transmitting mode, found the Charge + Discharge + Transmitting mode which it is worse case.
	For below 1GHz part, through pre-scan, the worst case is the lowest channel.
	Only the worst case is recorded in the report.
Instruments Used:	Refer to section 5.10 for details
Test Results:	Pass
Instruments Used:	For below 1GHz part, through pre-scan, the worst case is the lowest ch Only the worst case is recorded in the report. Refer to section 5.10 for details



Report No.: SZEM141100660701 Page: 82 of 93

#### 6.11.1 Radiated Emission below 1GHz

30MHz~1GHz (QP)		
Test mode:	Charge + Discharge + Transmitting mode	Vertical

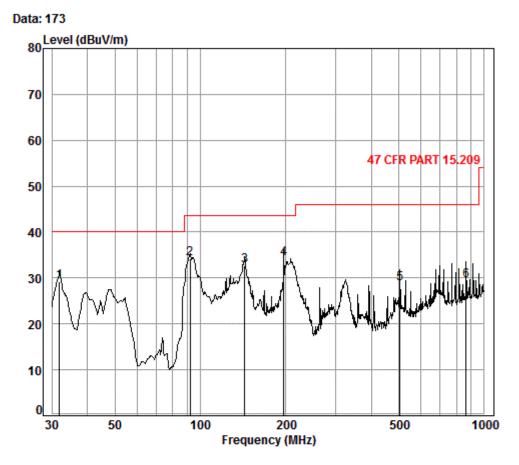


Condition: 47 CFR PART 15.209 3m 3142C Vertical Job No. : 6607CR

	Freq	Cable Loss		Preamp Factor		Level		Over Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 2 3 4	31.95 92.14 143.33 196.51	0.60 1.12 1.30 1.39	8.79 8.40	27.35 27.21 26.94 26.71	51.55 49.96	34.25 32.72	43.50 43.50	-9.25 -10.78
5 6	504.71 863.06	2.61 3.46	17.93	27.69 26.96	35.93	28.78	46.00	-17.22



Report No.: SZEM141100660701 Page: 83 of 93

Test mode:	Charge + Discharge + Transmitting mode	Horizontal
------------	--	------------

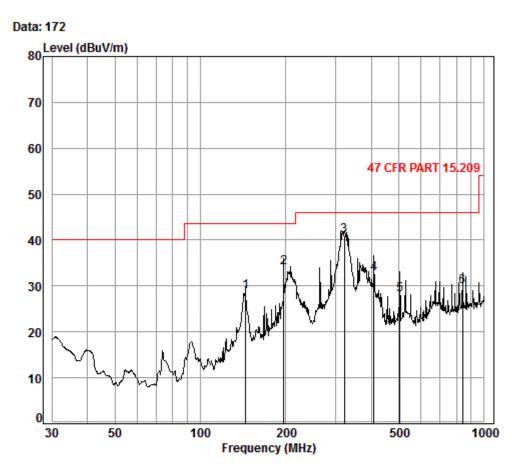

Condition: 47 CFR PART 15.209 3m 3142C Horizontal Job No. : 6607CR

	Freq		Ant Factor	Preamp Factor		Level		Over Limit
-	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 2 3 4 5	144.33 196.51 322.00 408.95 504.71	1.39 1.97 2.24	10.17 14.69	26.94 26.71 26.58 27.19 27.69	49.10 50.96 41.32	33.95 41.04	43.50 46.00 46.00	-9.55 -4.96 -13.29
6	839.18		22.40			29.96		



Report No.: SZEM141100660701 Page: 84 of 93

#### 6.11.2 Transmitter Emission above 1GHz

Lowest channel

Peak value:

Freq.(MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Ant.F. (dB/m)	Amp.G. (dB)	Cbl.L. (dB)	Pol.
0140 700		, , , , , , , , , , , , , , , , , , ,			· · · ·		M
3148.700	51.4	74.0	22.6	32.1	35.2	7.7	V
4804.000	52.6	74.0	21.4	34.3	35.1	7.6	V
6552.322	55.6	74.0	18.4	35.3	33.7	9.0	V
7206.000	58.6	74.0	15.4	35.8	33.8	9.9	V
9608.000	61.6	74.0	12.4	37.2	32.5	12.0	V
12578.888	63.1	74.0	10.9	38.0	32.0	15.0	V
3246.085	50.8	74.0	23.2	32.0	34.9	6.9	Н
4804.000	53.0	74.0	21.0	34.3	35.1	7.6	Н
6587.637	58.1	74.0	15.9	35.4	33.7	9.0	Н
7206.000	59.8	74.0	14.2	35.8	33.8	9.9	Н
9608.000	62.0	74.0	12.0	37.2	32.5	12.0	Н
12534.116	66.0	74.0	8.0	38.0	32.1	15.0	Н

Average value:

Freq.(MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Ant.F. (dB/m)	Amp.G. (dB)	Cbl.L. (dB)	Pol.
3148.700	38.7	54.0	15.3	32.1	35.2	7.7	V
4804.000	39.6	54.0	14.4	34.3	35.1	7.6	V
6552.322	43.2	54.0	10.8	35.3	33.7	9.0	V
7206.000	44.8	54.0	9.2	35.8	33.8	9.9	V
9608.000	48.2	54.0	5.8	37.2	32.5	12.0	V
12578.888	49.5	54.0	4.5	38.0	32.0	15.0	V
3246.085	37.2	54.0	16.8	32.0	34.9	6.9	Н
4804.000	39.5	54.0	14.5	34.3	35.1	7.6	Н
6587.818	43.6	54.0	10.4	35.4	33.7	9.0	Н
7206.000	46.5	54.0	7.5	35.8	33.8	9.9	Н
9608.000	48.6	54.0	5.4	37.2	32.5	12.0	Н
12534.116	49.8	54.0	4.2	38.0	32.1	15.0	Н



Report No.: SZEM141100660701 Page: 85 of 93

#### Middle channel

Freq.(MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Ant.F. (dB/m)	Amp.G. (dB)	Cbl.L. (dB)	Pol.
3746.382	49.9	74.0	24.1	32.9	35.6	6.8	V
4882.000	52.0	74.0	22.0	34.5	35.2	7.6	V
6552.322	55.6	74.0	18.4	35.4	33.6	9.0	V
7323.000	57.5	74.0	16.5	35.7	33.9	10.0	V
9764.000	61.3	74.0	12.7	37.3	32.1	12.3	V
11708.903	63.4	74.0	10.6	37.7	31.7	13.4	V
3814.113	50.5	74.0	23.5	33.2	35.5	6.8	Н
4882.000	53.0	74.0	21.0	34.5	35.2	7.6	Н
6558.236	58.1	74.0	15.9	35.4	33.6	9.0	Н
7323.000	58.4	74.0	15.6	35.7	33.9	10.0	Н
9764.000	62.0	74.0	12.0	37.3	32.1	12.3	Н
11920.589	63.1	74.0	10.9	37.7	31.8	13.9	Н

Average value:							
Freq.(MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Ant.F. (dB/m)	Amp.G. (dB)	Cbl.L. (dB)	Pol.
3746.382	37.2	54.0	16.8	32.9	35.6	6.8	V
4882.000	39.7	54.0	14.3	34.5	35.2	7.6	V
6552.322	43.2	54.0	10.8	35.4	33.6	9.0	V
7323.000	44.9	54.0	9.1	35.7	33.9	10.0	V
9764.000	48.5	54.0	5.5	37.3	32.1	12.3	V
11708.903	49.7	54.0	4.3	37.7	31.7	13.4	V
3813.113	37.4	54.0	16.6	33.2	35.5	6.8	Н
4882.000	39.6	54.0	14.4	34.5	35.2	7.6	Н
6558.236	43.7	54.0	10.3	35.4	33.6	9.0	Н
7323.000	45.2	54.0	8.8	35.7	33.9	10.0	Н
9764.000	48.5	54.0	5.5	37.3	32.1	12.3	Н
11920.589	49.9	54.0	4.1	37.7	31.8	13.9	Н



Report No.: SZEM141100660701 Page: 86 of 93

#### Highest channel

Peak	val	lue
i can	va	uc.

Freq.(MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Ant.F. (dB/m)	Amp.G. (dB)	Cbl.L. (dB)	Pol.
3556.687	50.5	74.0	23.5	32.3	35.4	6.8	V
4960.000	51.6	74.0	22.4	34.6	35.3	7.6	V
6552.322	55.8	74.0	18.2	35.3	33.7	9.0	V
7440.000	59.8	74.0	14.2	35.8	33.9	10.1	V
9920.000	62.1	74.0	11.9	37.3	32.1	12.3	V
11256.332	62.8	74.0	11.2	37.5	31.2	13.6	V
3499.792	49.9	74.0	24.1	32.3	35.4	6.8	Н
4960.000	52.1	74.0	21.9	34.6	35.3	7.6	н
6505.529	56.3	74.0	17.7	35.2	33.7	8.9	н
7440.000	58.4	74.0	15.6	35.8	33.9	10.1	Н
9920.000	61.7	74.0	12.3	37.3	32.1	12.3	Н
12092.690	63.1	74.0	10.9	37.9	31.8	14.5	Н

Average value:							
Freq.(MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Ant.F. (dB/m)	Amp.G. (dB)	Cbl.L. (dB)	Pol.
3556.687	36.8	54.0	17.2	32.3	35.4	6.8	V
4960.000	38.6	54.0	15.4	34.6	35.3	7.6	V
6552.322	43.2	54.0	10.8	35.3	33.7	9.0	V
7440.000	45.0	54.0	9.0	35.8	33.9	10.1	V
9920.000	48.7	54.0	5.3	37.3	32.1	12.3	V
11256.332	49.8	54.0	4.2	37.5	31.2	13.6	V
3499.792	36.8	54.0	17.2	32.3	35.4	6.8	Н
4960.000	38.9	54.0	15.1	34.6	35.3	7.6	Н
6505.529	43.4	54.0	10.6	35.2	33.7	8.9	Н
7440.000	45.0	54.0	9.0	35.8	33.9	10.1	THE
9920.000	48.6	54.0	5.4	37.3	32.1	12,3 0	HEAR
12092.690	49.7	54.0	4.3	37.9	31.8	14.5	SGS



Report No.: SZEM141100660701 Page: 87 of 93

#### Remark:

- The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:
   Final Test Level = Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor
- 2) Scan from 9kHz to 25GHz, the disturbance above 13GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.

<sup>&</sup>quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sqs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sqs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM141100660701 Page: 88 of 93

#### 6.12 Restricted bands around fundamental frequency

Test Requirement:	47 CFR Part 15C Section 15.209 and 15.205						
Test Method:	ANSI C63.10: 2009	ANSI C63.10: 2009					
Test Site:	Aeasurement Distance: 3m (Semi-Anechoic Chamber)						
Limit:	Frequency Limit (dBuV/m@3m) Remark						
	30MHz-88MHz	40.0	Quasi-peak Value				
	88MHz-216MHz	43.5	Quasi-peak Value				
	216MHz-960MHz	46.0	Quasi-peak Value				
	960MHz-1GHz	54.0	Quasi-peak Value				
	Above 1GHz	54.0	Average Value				
		74.0	Peak Value				
Test Setup:							
Image: Setup.         Image: Setup. <td< td=""></td<>							
Figure 1. 30MH	z to 1GHz	Figure 2. Above	e 1 GHz				

<sup>&</sup>quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."




Report No.: SZEM141100660701 Page: 89 of 93

Test Procedure:	<ul> <li>a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation.</li> <li>b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.</li> <li>c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.</li> <li>d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.</li> <li>e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</li> <li>f. Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest channel</li> <li>g. Test the EUT in the lowest channel , the Highest channel</li> <li>h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is worse case.</li> <li>i. Repeat above procedures until all frequencies measured was complete.</li> </ul>
Exploratory Test Mode:	Non-hopping transmitting mode with all kind of modulation and all kind of data type Transmitting mode, Charge + Transmitting mode and Charge + Discharge + Transmitting mode
Final Test Mode:	Through Pre-scan, find the DH5 of data type and GFSK modulation is the worse case. Pretest the EUT at Transmitting mode, Charge + Transmitting mode and Charge + Discharge + Transmitting mode found the Charge + Discharge
	+ Transmitting mode which it is worse case Only the worst case is recorded in the report.
Instruments Used:	-




Report No.: SZEM141100660701 Page: 90 of 93

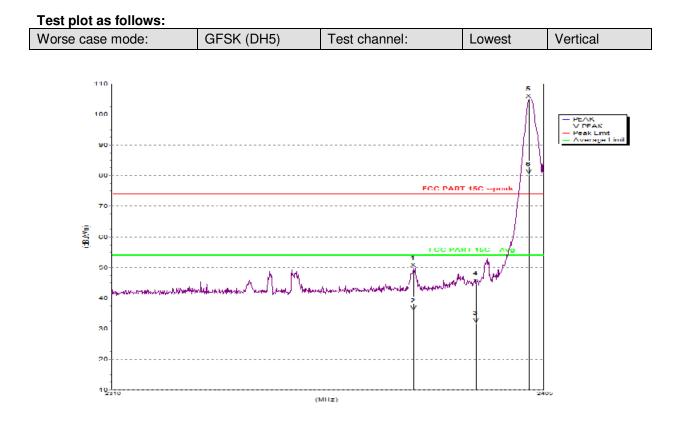

Freq.(MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Ant.F. (dB/m)	Amp.G. (dB)	Cbl.L. (dB)	Pol.
Peak						· · · ·	
2376.120	49.8	74.0	24.2	28.6	34.8	4.6	V
2389.990	44.7	74.0	29.3	28.7	34.8	4.6	V
2401.865	105.0	74.0	-31.0	28.8	34.9	4.6	V
Average							
2376.120	35.8	54.0	18.2	28.6	34.8	4.6	V
2389.990	31.8	54.0	22.2	28.7	34.8	4.6	V
2401.865	80.37	54.0	-26.4	28.8	34.9	4.6	V



Report No.: SZEM141100660701 Page: 91 of 93

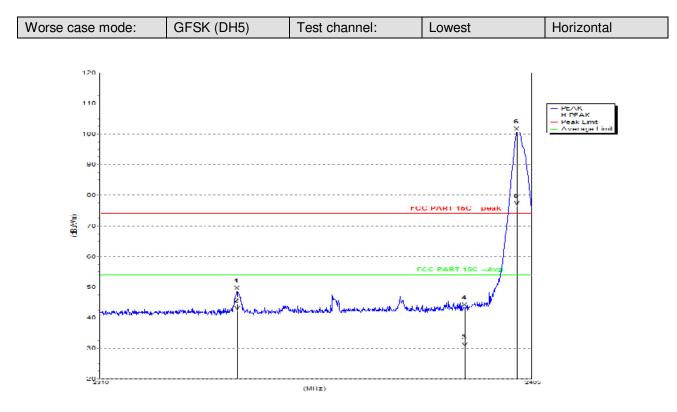


Freq.(MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Ant.F. (dB/m)	Amp.G. (dB)	Cbl.L. (dB)	Pol.
Peak							
2339.925	48.6	74.0	25.4	28.5	34.7	4.6	Н
2390.000	43.2	74.0	30.8	28.7	34.8	4.6	Н
2401.770	100.7	74.0	-26.7	28.8	34.9	4.6	н
Average							
2339.925	42.3	54.0	11.7	28.5	34.7	4.6	Н
2390.000	30.3	54.0	23.7	28.7	34.8	4.6	Н
2401.770	76.6	54.0	-22.6	28.8	34.9	4.6	Н

<sup>&</sup>quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sqs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sqs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."




Report No.: SZEM141100660701 Page: 92 of 93

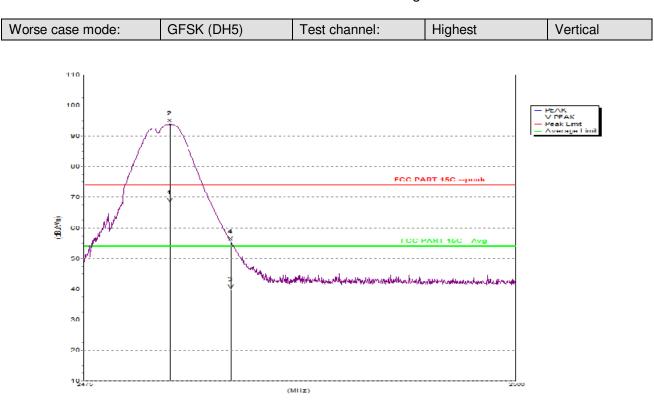

Freq.(MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Ant.F. (dB/m)	Amp.G. (dB)	CbI.L. (dB)	Pol.
Peak							
2479.975	94.0	74.0	-20.0	29.3	35.0	4.5	V
2483.500	55.4	74.0	18.6	29.3	35.0	4.5	V
Average							
2479.975	68.2	54.0	-14.2	29.3	35.0	4.5	V
2483.500	39.8	54.0	14.2	29.3	35.0	4.5	V



Report No.: SZEM141100660701 Page: 93 of 93

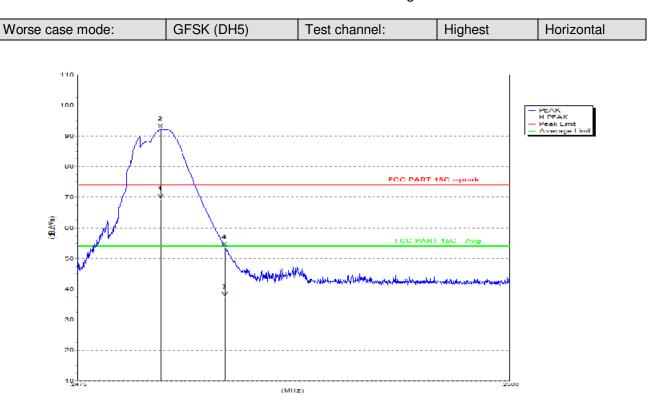

Freq.(MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Ant.F. (dB/m)	Amp.G. (dB)	CbI.L. (dB)	Pol.
Peak							
2479.800	92.3	74.0	-18.3	29.3	35.0	4.5	Н
2483.500	53.7	74.0	20.3	29.3	35.0	4.5	Н
Average							
2479.800	69.5	54.0	-15.5	29.3	35.0	4.5	Н
2483.500	37.3	54.0	16.7	29.3	35.0	4.5	Н

Note:

The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor