



Appendix B: Test Results


APPENDIX B: TEST RESULTS	1
APPENDIX B.1: TEST RESULTS OF CONDUCTED POWER SPECTRAL DENSITY	2
<i>GFSK Mode, 1Mbps.....</i>	<i>2</i>
<i>GFSK Mode, 2Mbps.....</i>	<i>5</i>
APPENDIX B.2: TEST RESULTS OF 6dB BANDWIDTH	8
<i>GFSK Mode, 1Mbps.....</i>	<i>8</i>
<i>GFSK Mode, 2Mbps.....</i>	<i>14</i>
APPENDIX B.3: TEST RESULTS OF 99% BANDWIDTH.....	20
<i>GFSK Mode, 1Mbps.....</i>	<i>20</i>
<i>GFSK Mode, 2Mbps.....</i>	<i>26</i>
APPENDIX B.4: TEST RESULTS OF CONDUCTED SPURIOUS EMISSIONS MEASURED IN 100 kHz BANDWIDTH.....	32
<i>GFSK Mode, 1Mbps.....</i>	<i>32</i>
<i>GFSK Mode, 2Mbps.....</i>	<i>40</i>
APPENDIX B.5: TEST RESULTS OF RADIATED SPURIOUS EMISSIONS	48
<i>30 MHz to 1GHz.....</i>	<i>48</i>
<i>1GHz-18GHz</i>	<i>52</i>
APPENDIX B.6: TEST RESULTS OF RADIATED EMISSIONS IN RESTRICTED BANDS	68
APPENDIX B.7: TEST PLOTS OF CONDUCTED EMISSION ON AC MAINS.....	74
<i>Normal Operation with charging and input by Built-in Microphone.....</i>	<i>74</i>

Appendix B.1: Test Results of Conducted Power Spectral Density


GFSK Mode, 1Mbps



Ant 0

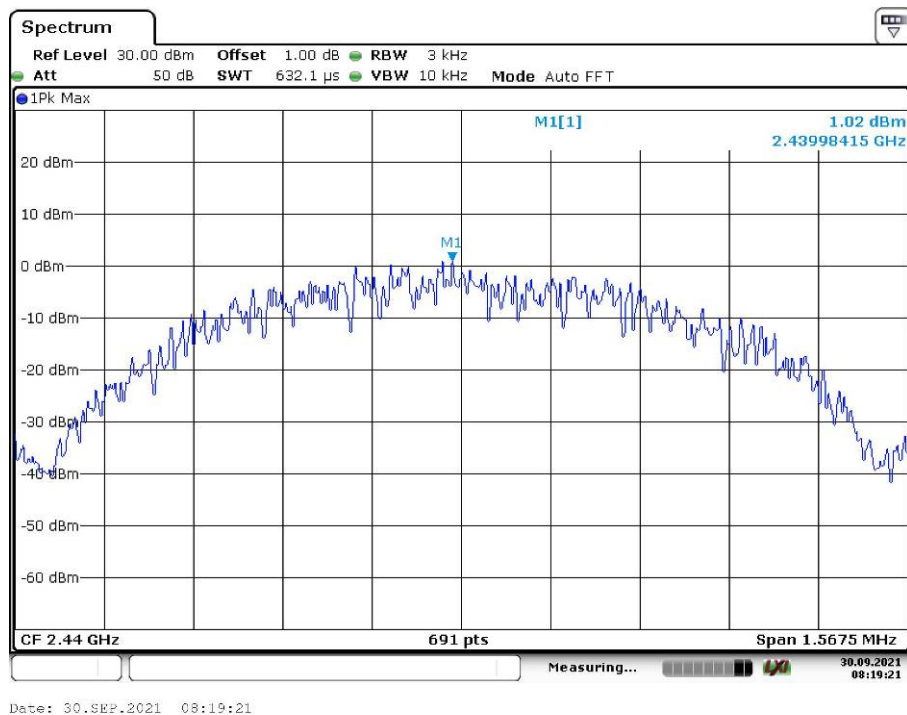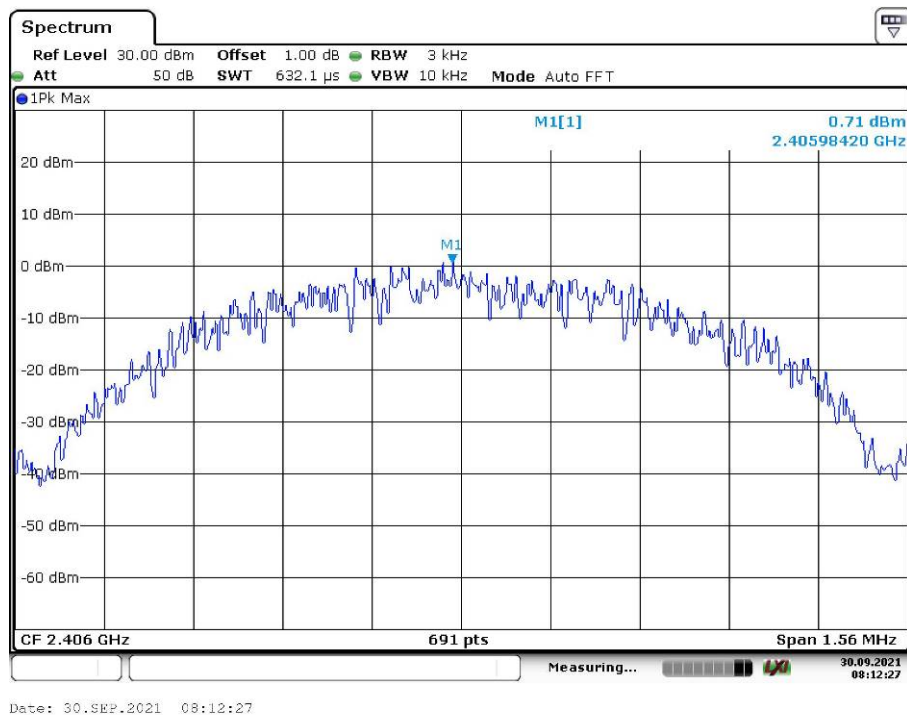


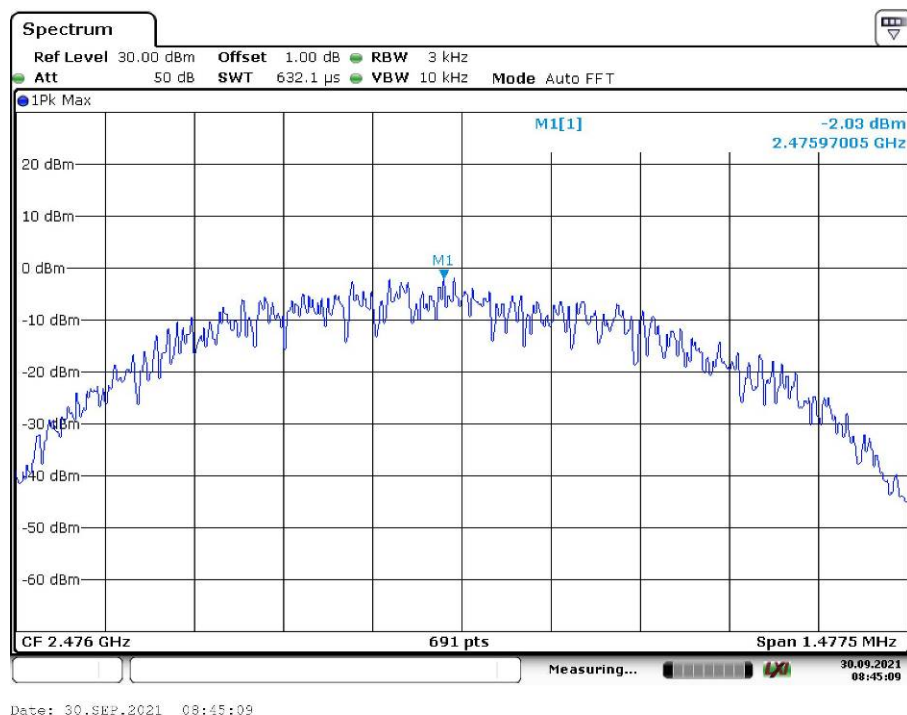



Ant 1

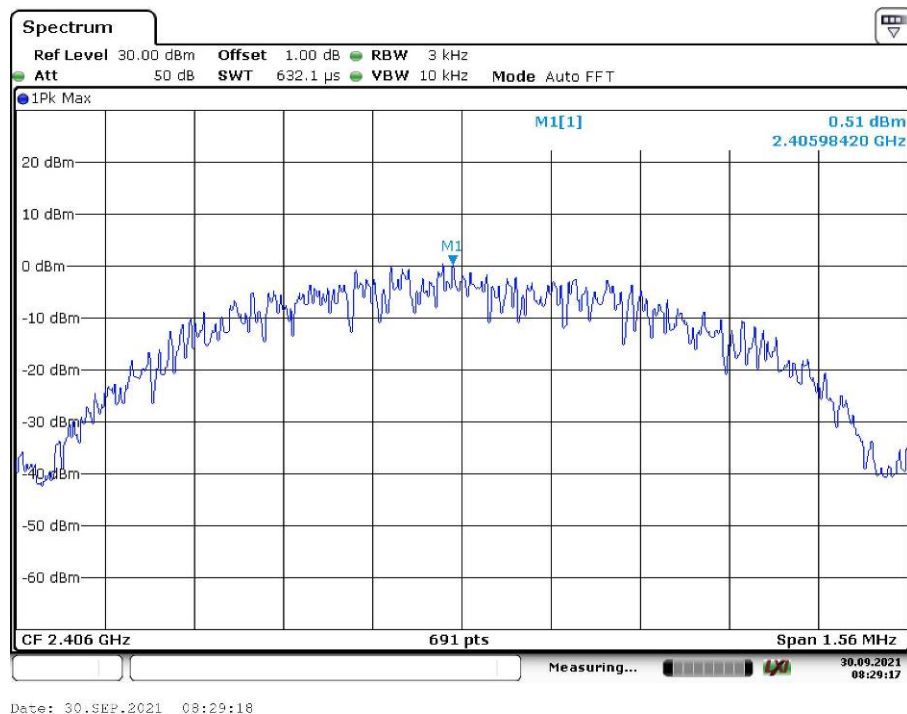

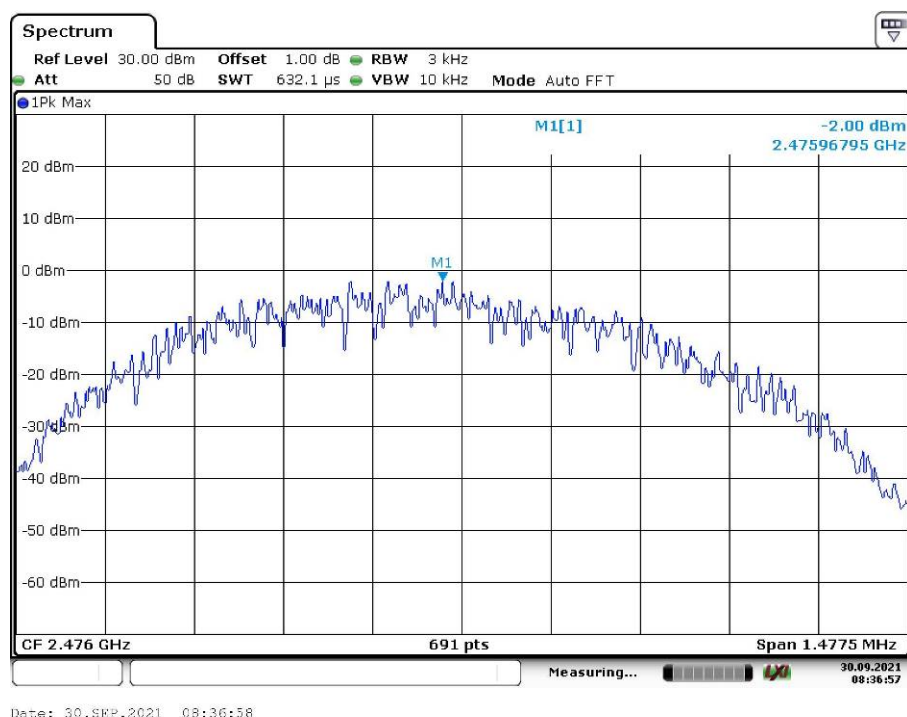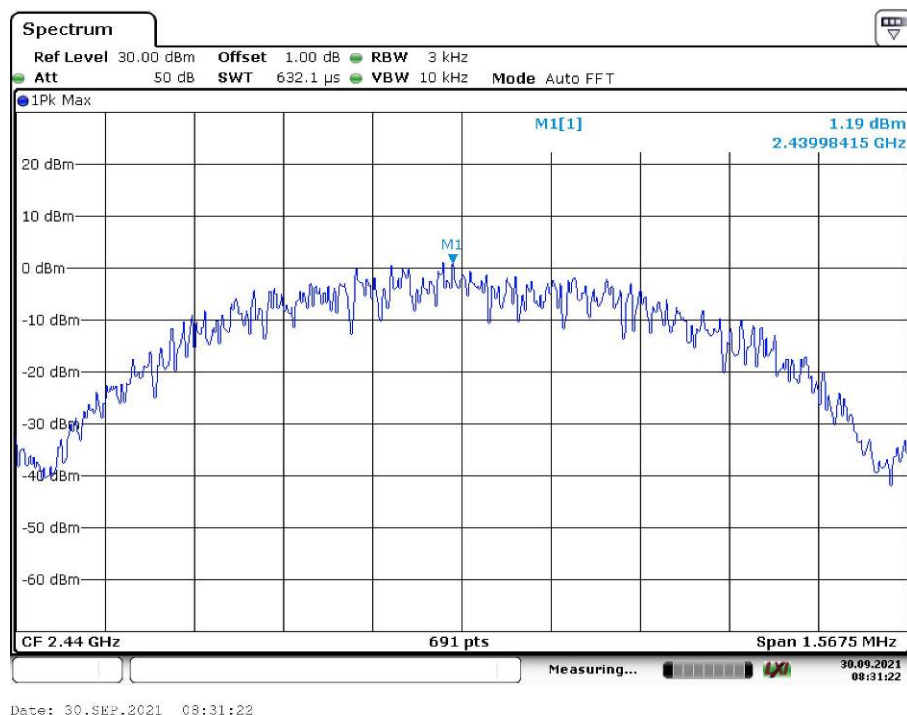




GFSK Mode, 2Mbps
Ant 0

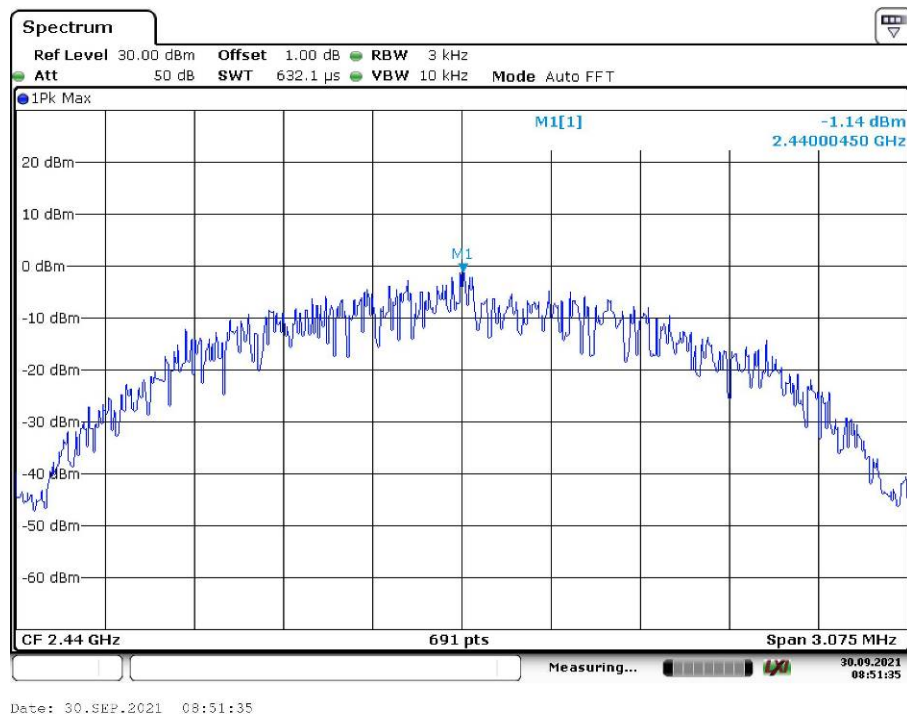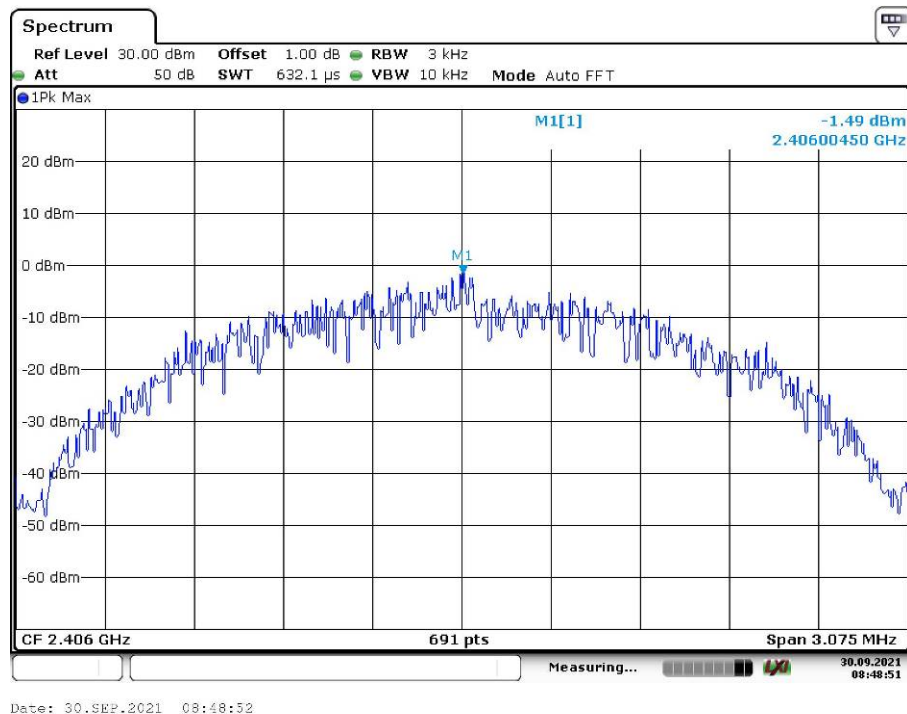

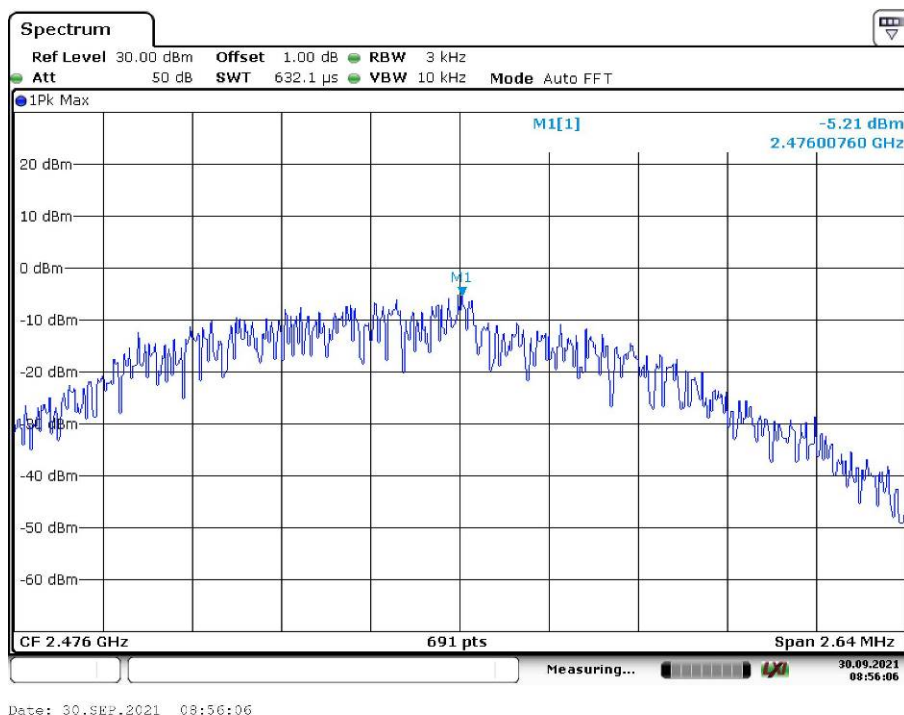

Ant 1

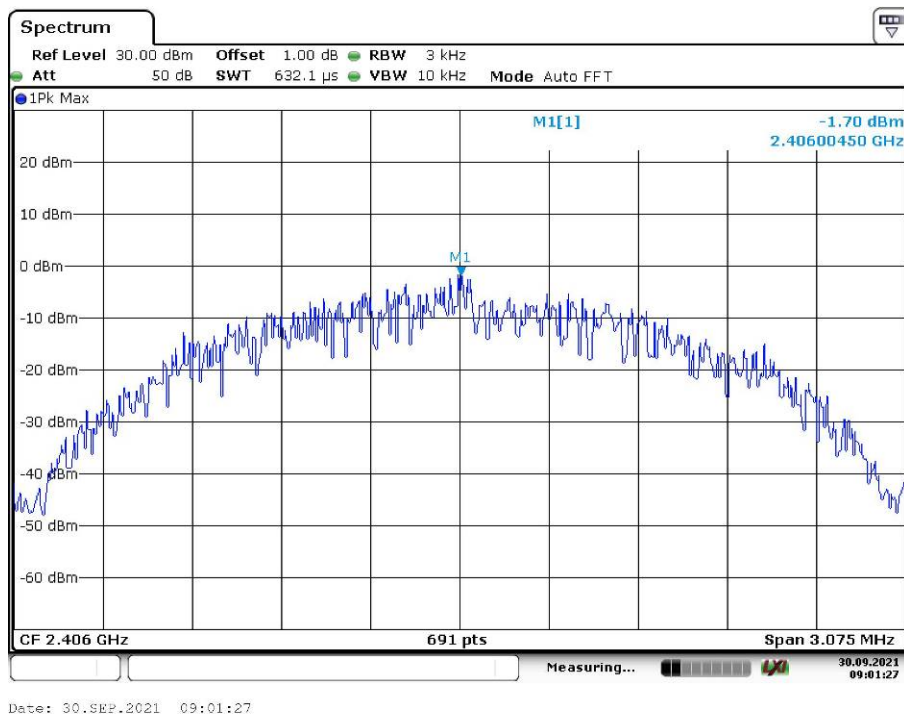

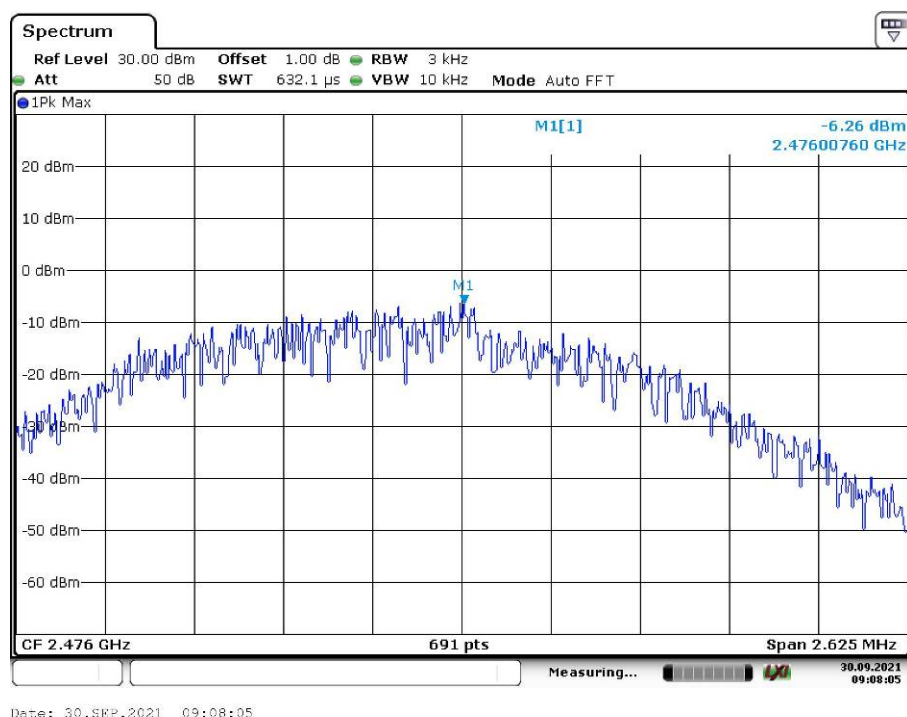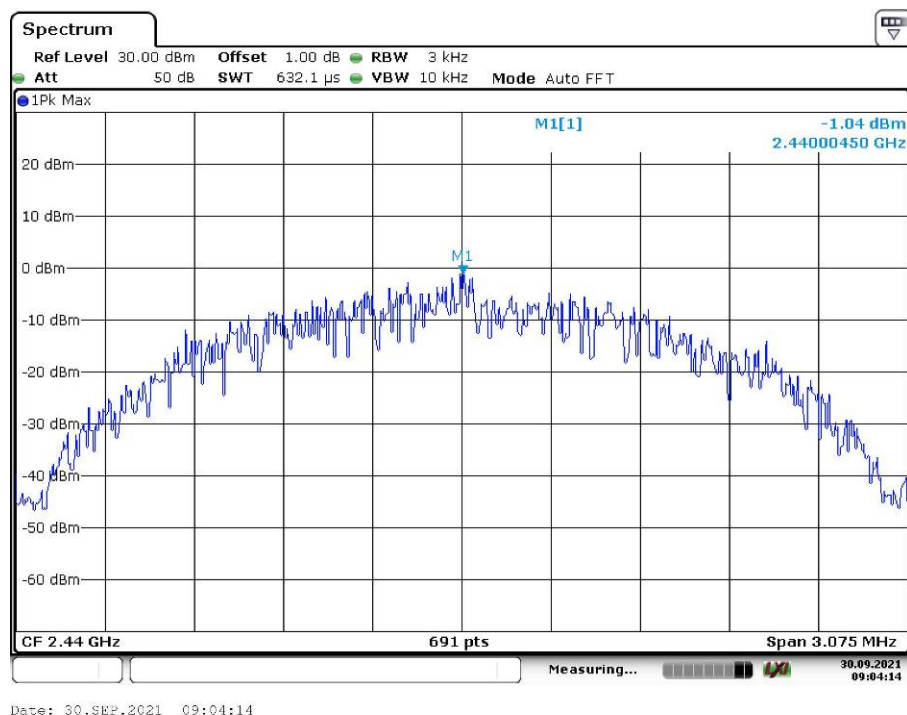

Appendix B.2: Test Results of 6dB Bandwidth

GFSK Mode, 1Mbps
Ant 0

Minimum Emission Bandwidth 6 dB (2406 MHz; 10.000 dBm; 1 MHz)

Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v04 and ANSI C63.10-2013


6 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2406.000000	0.712872	0.500000	---	2405.643564	2406.356436

(continuation of the "6 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
2406.000000	16.4	PASS

6 dB Bandwidth

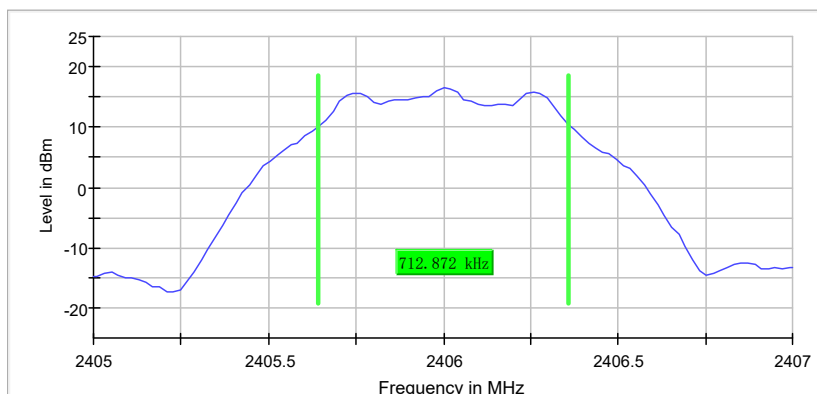

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.40500 GHz	2.40500 GHz
Stop Frequency	2.40700 GHz	2.40700 GHz
Span	2.000 MHz	2.000 MHz
RBW	100.000 kHz	~ 100.000 kHz
VBW	300.000 kHz	~ 300.000 kHz
SweepPoints	101	~ 40
Sweeptime	18.938 µs	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	14 / max. 150	max. 150
Stable	5 / 5	5
Max Stable Difference	0.04 dB	0.50 dB

Minimum Emission Bandwidth 6 dB (2440 MHz; 10.000 dBm; 1 MHz)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v04 and ANSI C63.10-2013

6 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2440.000000	0.732674	0.500000	---	2439.643564	2440.376238

(continuation of the "6 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
2440.000000	16.3	PASS

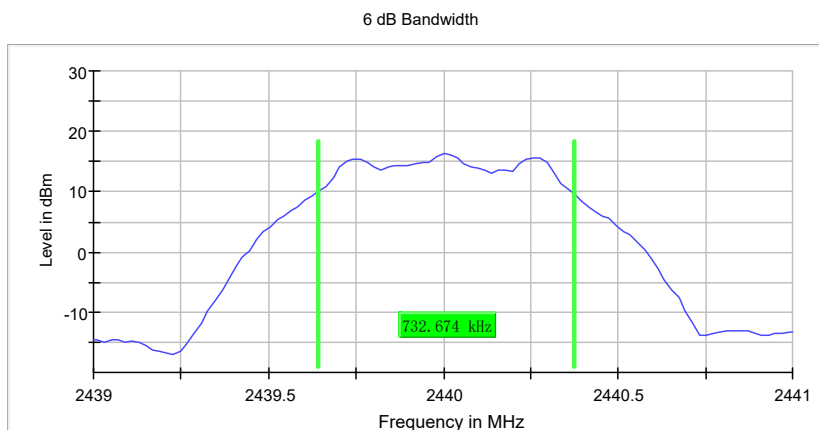

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.43900 GHz	2.43900 GHz
Stop Frequency	2.44100 GHz	2.44100 GHz
Span	2.000 MHz	2.000 MHz
RBW	100.000 kHz	~ 100.000 kHz
VBW	300.000 kHz	~ 300.000 kHz
SweepPoints	101	~ 40
Sweeptime	18.938 µs	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamplifier	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	8 / max. 150	max. 150
Stable	5 / 5	5
Max Stable Difference	0.13 dB	0.50 dB

Minimum Emission Bandwidth 6 dB (2476 MHz; 10.000 dBm; 1 MHz)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v04 and ANSI C63.10-2013

6 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2476.000000	0.712872	0.500000	---	2475.603960	2476.316832

(continuation of the "6 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
2476.000000	11.3	PASS

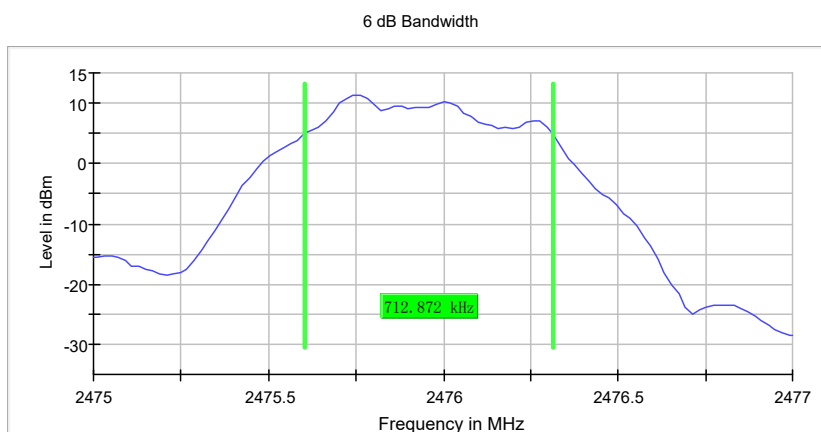

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.47500 GHz	2.47500 GHz
Stop Frequency	2.47700 GHz	2.47700 GHz
Span	2.000 MHz	2.000 MHz
RBW	100.000 kHz	~ 100.000 kHz
VBW	300.000 kHz	~ 300.000 kHz
SweepPoints	101	~ 40
Sweeptime	18.938 µs	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamplifier	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	8 / max. 150	max. 150
Stable	5 / 5	5
Max Stable Difference	0.46 dB	0.50 dB

Ant 1

Minimum Emission Bandwidth 6 dB (2406 MHz; 10.000 dBm; 1 MHz)

Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v04 and ANSI C63.10-2013


6 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2406.000000	0.712872	0.500000	---	2405.643564	2406.356436

(continuation of the "6 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
2406.000000	16.1	PASS

6 dB Bandwidth

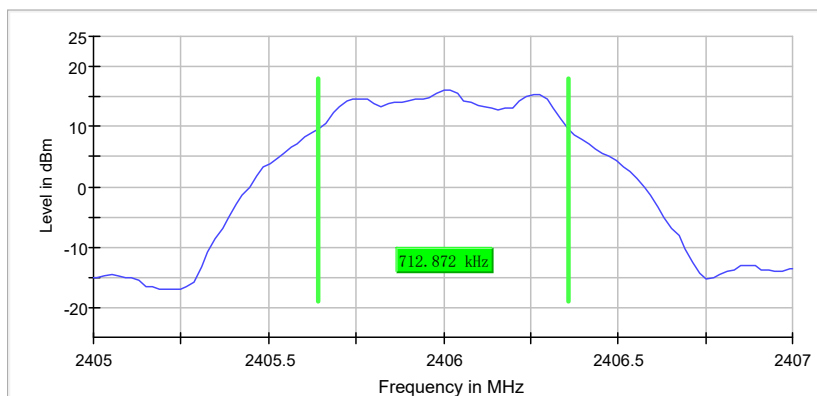

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.40500 GHz	2.40500 GHz
Stop Frequency	2.40700 GHz	2.40700 GHz
Span	2.000 MHz	2.000 MHz
RBW	100.000 kHz	~ 100.000 kHz
VBW	300.000 kHz	~ 300.000 kHz
SweepPoints	101	~ 40
Sweptime	18.938 µs	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamplifier	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	7 / max. 150	max. 150
Stable	5 / 5	5
Max Stable Difference	0.12 dB	0.50 dB

Minimum Emission Bandwidth 6 dB (2440 MHz; 10.000 dBm; 1 MHz)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v04 and ANSI C63.10-2013

6 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2440.000000	0.712872	0.500000	---	2439.643564	2440.356436

(continuation of the "6 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
2440.000000	16.6	PASS

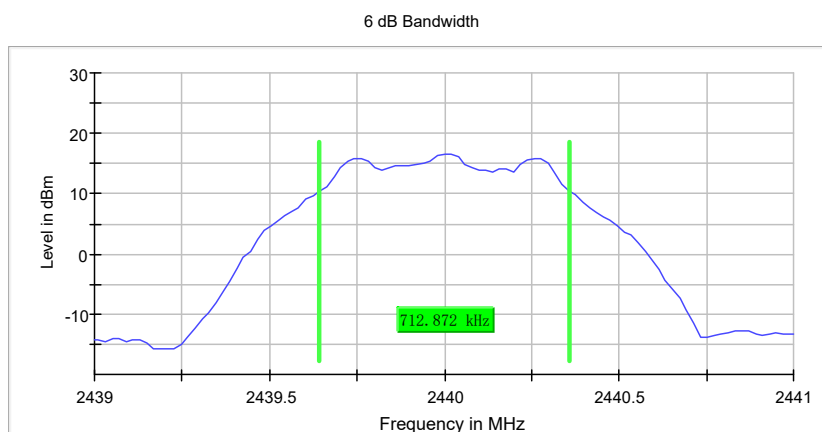

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.43900 GHz	2.43900 GHz
Stop Frequency	2.44100 GHz	2.44100 GHz
Span	2.000 MHz	2.000 MHz
RBW	100.000 kHz	~ 100.000 kHz
VBW	300.000 kHz	~ 300.000 kHz
SweepPoints	101	~ 40
Sweeptime	18.938 µs	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamplifier	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	7 / max. 150	max. 150
Stable	5 / 5	5
Max Stable Difference	0.00 dB	0.50 dB

Minimum Emission Bandwidth 6 dB (2476 MHz; 10.000 dBm; 1 MHz)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v04 and ANSI C63.10-2013

6 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2476.000000	0.712872	0.500000	---	2475.603960	2476.316832

(continuation of the "6 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
2476.000000	9.7	PASS

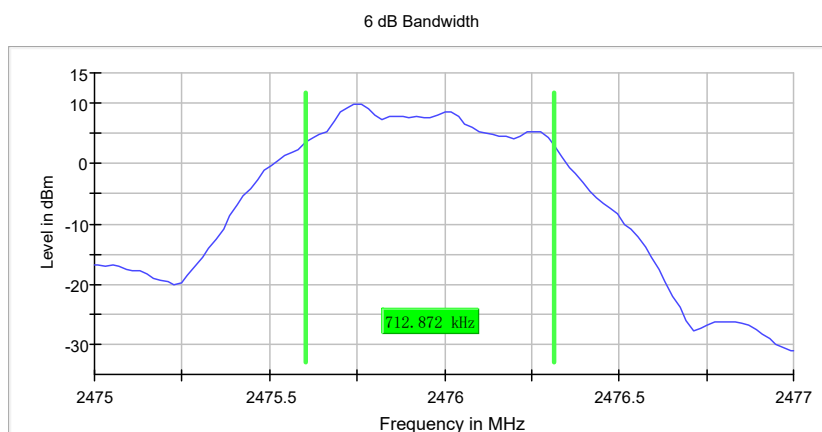

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.47500 GHz	2.47500 GHz
Stop Frequency	2.47700 GHz	2.47700 GHz
Span	2.000 MHz	2.000 MHz
RBW	100.000 kHz	~ 100.000 kHz
VBW	300.000 kHz	~ 300.000 kHz
SweepPoints	101	~ 40
Sweptime	18.938 µs	AUTO
Reference Level	0.000 dBm	0.000 dBm
Attenuation	20.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweptype	FFT	AUTO
Preamplifier	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	8 / max. 150	max. 150
Stable	5 / 5	5
Max Stable Difference	0.16 dB	0.50 dB

GFSK Mode, 2Mbps
Ant 0

Minimum Emission Bandwidth 6 dB (2406 MHz; 10.000 dBm; 2 MHz)

Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v04 and ANSI C63.10-2013


6 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2406.000000	1.227722	0.500000	---	2405.405941	2406.633663

(continuation of the "6 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
2406.000000	16.4	PASS

6 dB Bandwidth

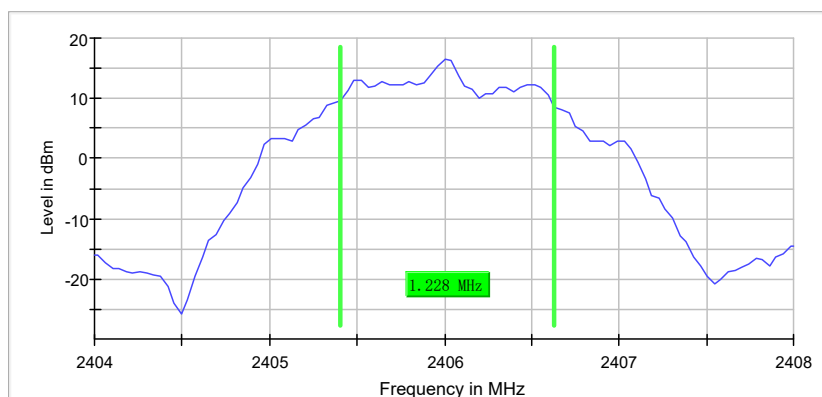

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.40400 GHz	2.40400 GHz
Stop Frequency	2.40800 GHz	2.40800 GHz
Span	4.000 MHz	4.000 MHz
RBW	100.000 kHz	~ 100.000 kHz
VBW	300.000 kHz	~ 300.000 kHz
SweepPoints	101	~ 80
Sweptime	18.938 µs	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	13 / max. 150	max. 150
Stable	5 / 5	5
Max Stable Difference	0.27 dB	0.50 dB

Minimum Emission Bandwidth 6 dB (2440 MHz; 10.000 dBm; 2 MHz)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v04 and ANSI C63.10-2013

6 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2440.000000	1.227722	0.500000	---	2439.405941	2440.633663

(continuation of the "6 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
2440.000000	16.3	PASS

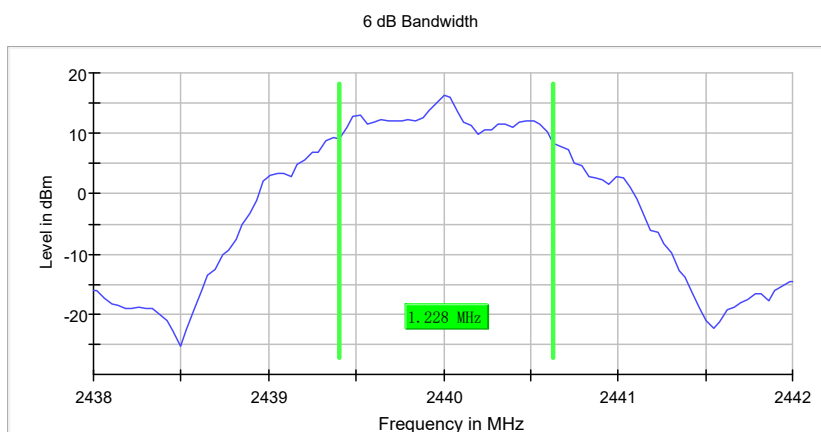

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.43800 GHz	2.43800 GHz
Stop Frequency	2.44200 GHz	2.44200 GHz
Span	4.000 MHz	4.000 MHz
RBW	100.000 kHz	~ 100.000 kHz
VBW	300.000 kHz	~ 300.000 kHz
SweepPoints	101	~ 80
SweepTime	18.938 µs	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	9 / max. 150	max. 150
Stable	5 / 5	5
Max Stable Difference	0.14 dB	0.50 dB

Minimum Emission Bandwidth 6 dB (2476 MHz; 10.000 dBm; 2 MHz)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v04 and ANSI C63.10-2013

6 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2476.000000	0.990099	0.500000	---	2475.207921	2476.198020

(continuation of the "6 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
2476.000000	10.9	PASS

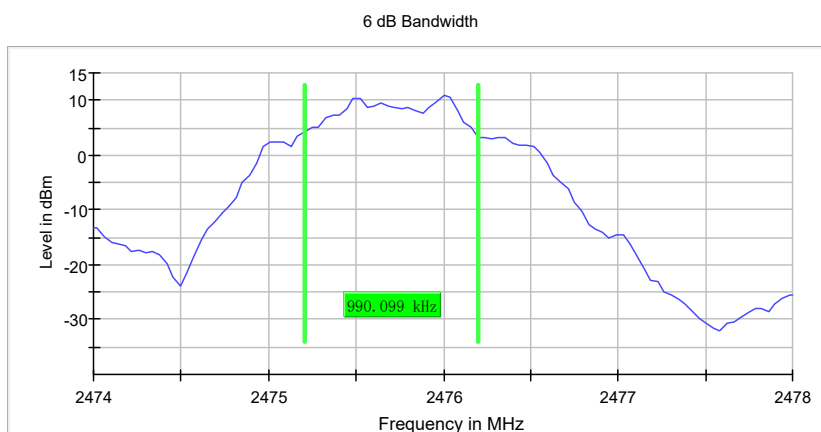

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.47400 GHz	2.47400 GHz
Stop Frequency	2.47800 GHz	2.47800 GHz
Span	4.000 MHz	4.000 MHz
RBW	100.000 kHz	~ 100.000 kHz
VBW	300.000 kHz	~ 300.000 kHz
SweepPoints	101	~ 80
Sweeptime	18.938 µs	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamplifier	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	10 / max. 150	max. 150
Stable	5 / 5	5
Max Stable Difference	0.24 dB	0.50 dB

Ant 1

Minimum Emission Bandwidth 6 dB (2406 MHz; 10.000 dBm; 2 MHz)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v04 and ANSI C63.10-2013

6 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2406.000000	1.188118	0.500000	---	2405.405941	2406.594059

(continuation of the "6 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
2406.000000	16.1	PASS

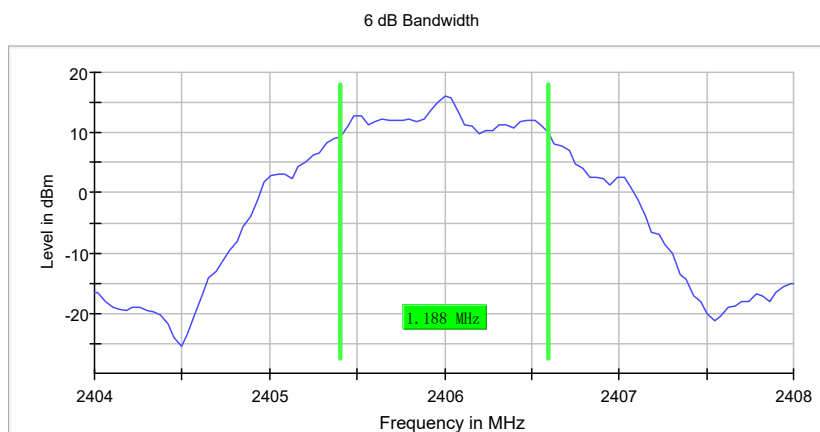

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.40400 GHz	2.40400 GHz
Stop Frequency	2.40800 GHz	2.40800 GHz
Span	4.000 MHz	4.000 MHz
RBW	100.000 kHz	~ 100.000 kHz
VBW	300.000 kHz	~ 300.000 kHz
SweepPoints	101	~ 80
Sweeptime	18.938 µs	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	10 / max. 150	max. 150
Stable	5 / 5	5
Max Stable Difference	0.32 dB	0.50 dB

Minimum Emission Bandwidth 6 dB (2440 MHz; 10.000 dBm; 2 MHz)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v04 and ANSI C63.10-2013

6 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2440.000000	1.227722	0.500000	---	2439.405941	2440.633663

(continuation of the "6 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
2440.000000	16.6	PASS

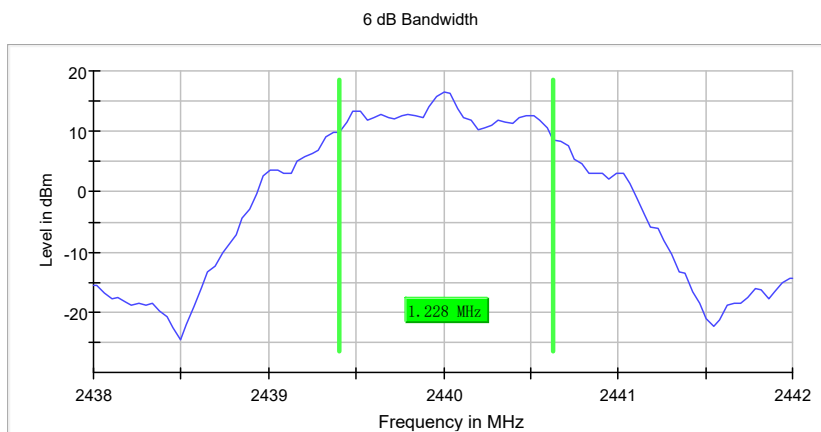

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.43800 GHz	2.43800 GHz
Stop Frequency	2.44200 GHz	2.44200 GHz
Span	4.000 MHz	4.000 MHz
RBW	100.000 kHz	~ 100.000 kHz
VBW	300.000 kHz	~ 300.000 kHz
SweepPoints	101	~ 80
SweepTime	18.938 µs	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamplifier	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	10 / max. 150	max. 150
Stable	5 / 5	5
Max Stable Difference	0.00 dB	0.50 dB

Minimum Emission Bandwidth 6 dB (2476 MHz; 10.000 dBm; 2 MHz)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v04 and ANSI C63.10-2013

6 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2476.000000	0.990099	0.500000	---	2475.207921	2476.198020

(continuation of the "6 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
2476.000000	8.5	PASS

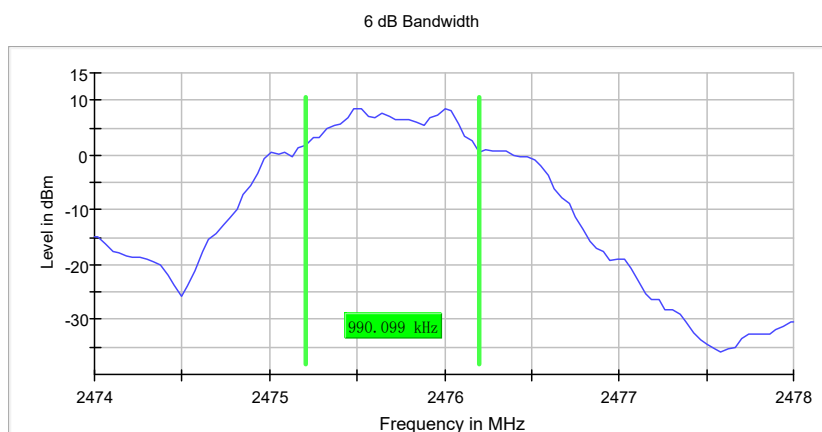

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.47400 GHz	2.47400 GHz
Stop Frequency	2.47800 GHz	2.47800 GHz
Span	4.000 MHz	4.000 MHz
RBW	100.000 kHz	~ 100.000 kHz
VBW	300.000 kHz	~ 300.000 kHz
SweepPoints	101	~ 80
SweepTime	18.938 µs	AUTO
Reference Level	0.000 dBm	0.000 dBm
Attenuation	20.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	11 / max. 150	max. 150
Stable	5 / 5	5
Max Stable Difference	0.02 dB	0.50 dB

Appendix B.3: Test Results of 99% Bandwidth

GFSK Mode, 1Mbps
Ant 0

Occupied Channel Bandwidth 99% (2406 MHz; 10.000 dBm; 1 MHz)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v04 and ANSI C63.10-2013

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2406.000000	1.040000	---	---	2405.497500	2406.537500

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
2406.000000	PASS

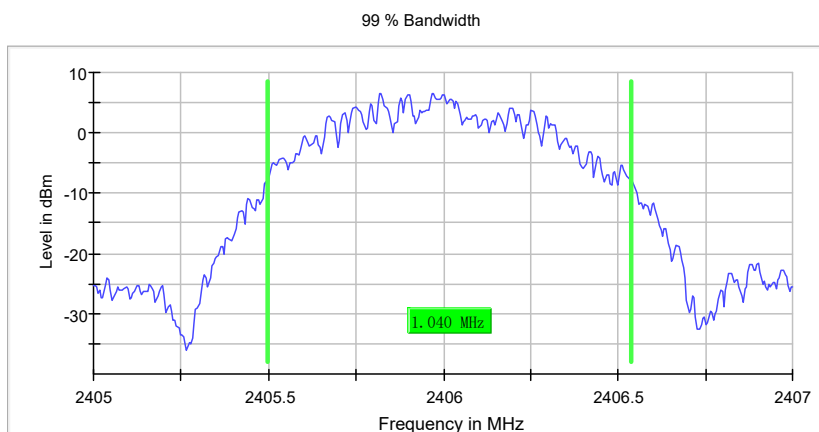

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.40500 GHz	2.40500 GHz
Stop Frequency	2.40700 GHz	2.40700 GHz
Span	2.000 MHz	2.000 MHz
RBW	10.000 kHz	>= 10.000 kHz
VBW	30.000 kHz	>= 30.000 kHz
SweepPoints	400	~ 400
SweepTime	189.648 µs	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamplifier	off	off
Stablemode	Trace	Trace
Stablevalue	0.30 dB	0.30 dB
Run	6 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.13 dB	0.30 dB

Occupied Channel Bandwidth 99% (2440 MHz; 10.000 dBm; 1 MHz)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v04 and ANSI C63.10-2013

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2440.000000	1.045000	---	---	2439.492500	2440.537500

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
2440.000000	PASS

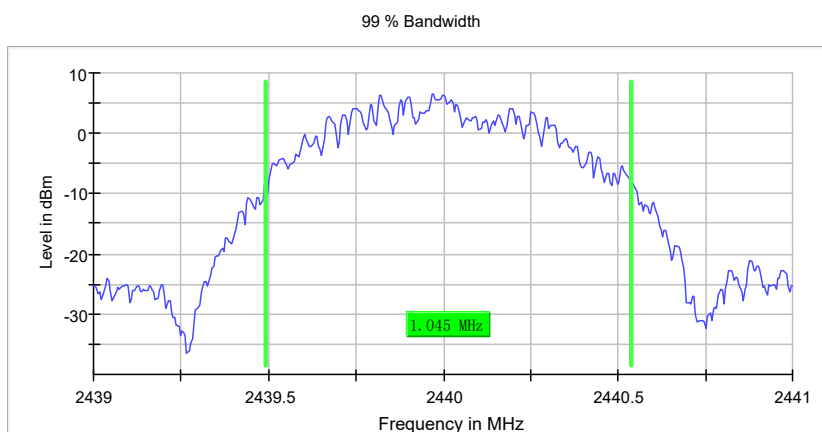

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.43900 GHz	2.43900 GHz
Stop Frequency	2.44100 GHz	2.44100 GHz
Span	2.000 MHz	2.000 MHz
RBW	10.000 kHz	>= 10.000 kHz
VBW	30.000 kHz	>= 30.000 kHz
SweepPoints	400	~ 400
Sweptime	189.648 µs	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweptype	FFT	AUTO
Preamplifier	off	off
Stablemode	Trace	Trace
Stablevalue	0.30 dB	0.30 dB
Run	5 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.27 dB	0.30 dB

Occupied Channel Bandwidth 99% (2476 MHz; 10.000 dBm; 1 MHz)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v04 and ANSI C63.10-2013

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2476.000000	0.985000	---	---	2475.442500	2476.427500

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
2476.000000	PASS

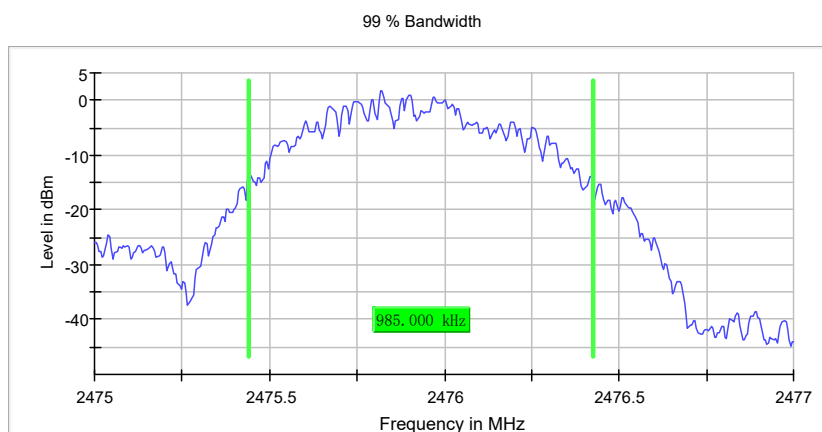

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.47500 GHz	2.47500 GHz
Stop Frequency	2.47700 GHz	2.47700 GHz
Span	2.000 MHz	2.000 MHz
RBW	10.000 kHz	>= 10.000 kHz
VBW	30.000 kHz	>= 30.000 kHz
SweepPoints	400	~ 400
Sweeptime	189.648 µs	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamplifier	off	off
Stablemode	Trace	Trace
Stablevalue	0.30 dB	0.30 dB
Run	5 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.17 dB	0.30 dB

Ant 1

Occupied Channel Bandwidth 99% (2406 MHz; 10.000 dBm; 1 MHz)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v04 and ANSI C63.10-2013

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2406.000000	1.040000	---	---	2405.497500	2406.537500

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
2406.000000	PASS

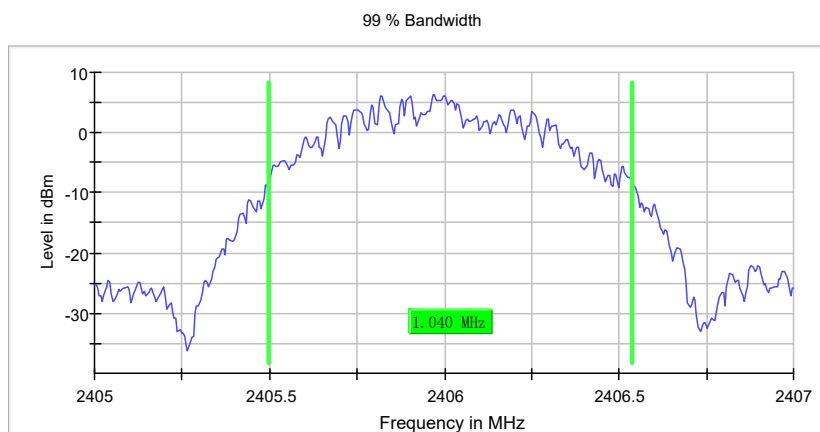

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.40500 GHz	2.40500 GHz
Stop Frequency	2.40700 GHz	2.40700 GHz
Span	2.000 MHz	2.000 MHz
RBW	10.000 kHz	>= 10.000 kHz
VBW	30.000 kHz	>= 30.000 kHz
SweepPoints	400	~ 400
Sweeptime	189.648 µs	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30 dB	0.30 dB
Run	7 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.15 dB	0.30 dB

Occupied Channel Bandwidth 99% (2440 MHz; 10.000 dBm; 1 MHz)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v04 and ANSI C63.10-2013

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2440.000000	1.045000	---	---	2439.492500	2440.537500

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
2440.000000	PASS

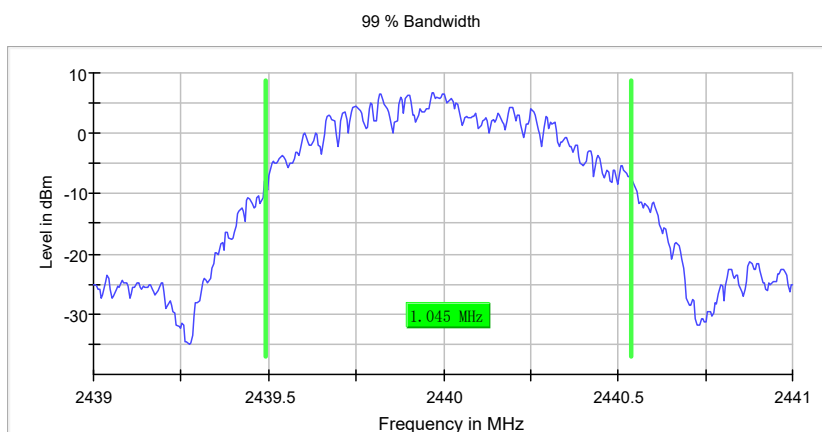

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.43900 GHz	2.43900 GHz
Stop Frequency	2.44100 GHz	2.44100 GHz
Span	2.000 MHz	2.000 MHz
RBW	10.000 kHz	>= 10.000 kHz
VBW	30.000 kHz	>= 30.000 kHz
SweepPoints	400	~ 400
Sweeptime	189.648 µs	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamplifier	off	off
Stablemode	Trace	Trace
Stablevalue	0.30 dB	0.30 dB
Run	5 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.18 dB	0.30 dB

Occupied Channel Bandwidth 99% (2476 MHz; 10.000 dBm; 1 MHz)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v04 and ANSI C63.10-2013

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2476.000000	0.985000	---	---	2475.442500	2476.427500

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
2476.000000	PASS

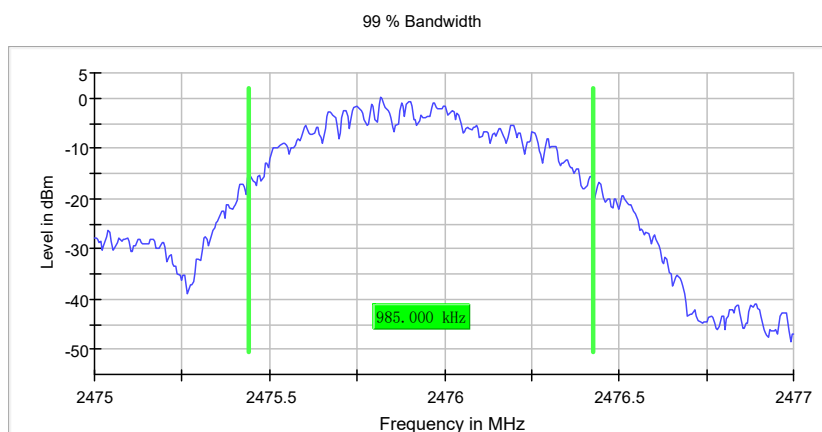

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.47500 GHz	2.47500 GHz
Stop Frequency	2.47700 GHz	2.47700 GHz
Span	2.000 MHz	2.000 MHz
RBW	10.000 kHz	>= 10.000 kHz
VBW	30.000 kHz	>= 30.000 kHz
SweepPoints	400	~ 400
Sweeptime	189.648 µs	AUTO
Reference Level	0.000 dBm	0.000 dBm
Attenuation	20.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamplifier	off	off
Stablemode	Trace	Trace
Stablevalue	0.30 dB	0.30 dB
Run	5 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.19 dB	0.30 dB

GFSK Mode, 2Mbps

Ant 0

Occupied Channel Bandwidth 99% (2406 MHz; 10.000 dBm; 2 MHz)

Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v04 and ANSI C63.10-2013


99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2406.000000	2.050000	---	---	2405.005000	2407.055000

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
2406.000000	PASS

99 % Bandwidth

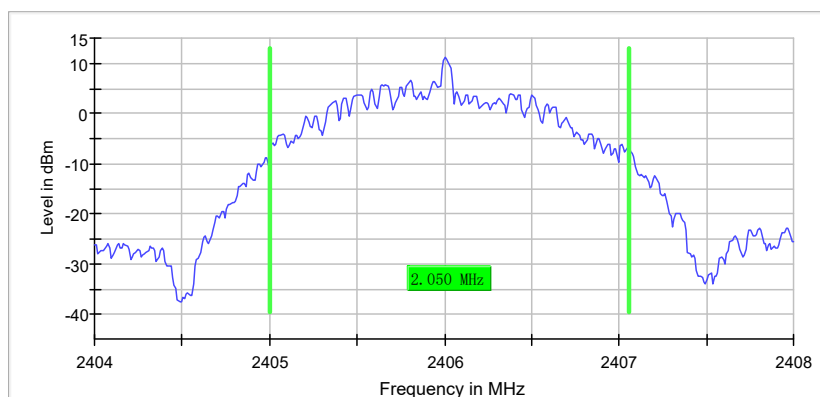**Measurement**

Setting	Instrument Value	Target Value
Start Frequency	2.40400 GHz	2.40400 GHz
Stop Frequency	2.40800 GHz	2.40800 GHz
Span	4.000 MHz	4.000 MHz
RBW	20.000 kHz	>= 20.000 kHz
VBW	100.000 kHz	>= 60.000 kHz
SweepPoints	400	~ 400
Sweeptime	94.824 µs	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamplifier	off	off
Stablemode	Trace	Trace
Stablevalue	0.30 dB	0.30 dB
Run	6 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.23 dB	0.30 dB

Occupied Channel Bandwidth 99% (2440 MHz; 10.000 dBm; 2 MHz)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v04 and ANSI C63.10-2013

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2440.000000	2.050000	---	---	2439.005000	2441.055000

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
2440.000000	PASS

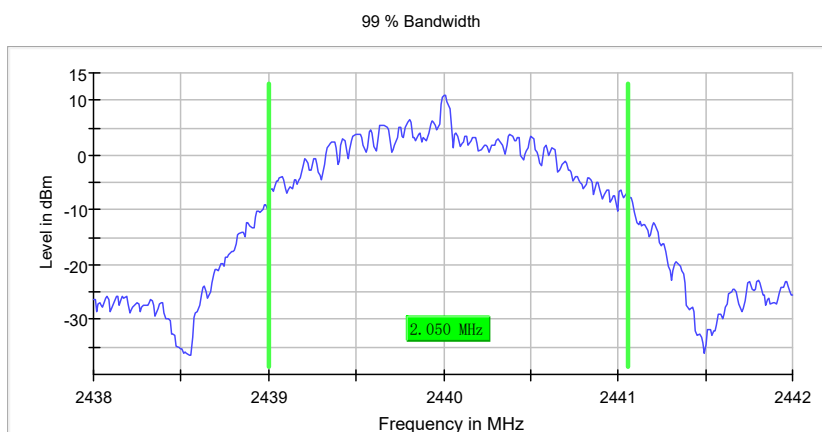

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.43800 GHz	2.43800 GHz
Stop Frequency	2.44200 GHz	2.44200 GHz
Span	4.000 MHz	4.000 MHz
RBW	20.000 kHz	>= 20.000 kHz
VBW	100.000 kHz	>= 60.000 kHz
SweepPoints	400	~ 400
SweepTime	94.824 µs	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamplifier	off	off
Stablemode	Trace	Trace
Stablevalue	0.30 dB	0.30 dB
Run	9 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.11 dB	0.30 dB

Occupied Channel Bandwidth 99% (2476 MHz; 10.000 dBm; 2 MHz)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v04 and ANSI C63.10-2013

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2476.000000	1.760000	---	---	2474.875000	2476.635000

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
2476.000000	PASS

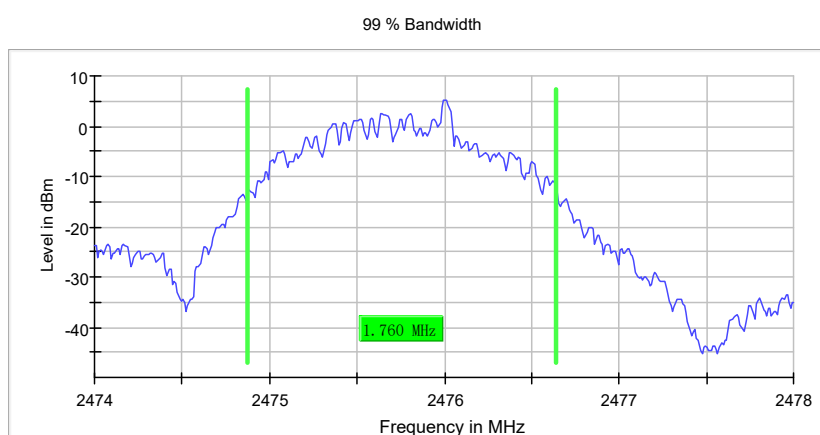

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.47400 GHz	2.47400 GHz
Stop Frequency	2.47800 GHz	2.47800 GHz
Span	4.000 MHz	4.000 MHz
RBW	20.000 kHz	>= 20.000 kHz
VBW	100.000 kHz	>= 60.000 kHz
SweepPoints	400	~ 400
SweepTime	94.824 µs	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamplifier	off	off
Stablemode	Trace	Trace
Stablevalue	0.30 dB	0.30 dB
Run	7 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.13 dB	0.30 dB

Ant 1

Occupied Channel Bandwidth 99% (2406 MHz; 10.000 dBm; 2 MHz)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v04 and ANSI C63.10-2013

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2406.000000	2.050000	---	---	2405.005000	2407.055000

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
2406.000000	PASS

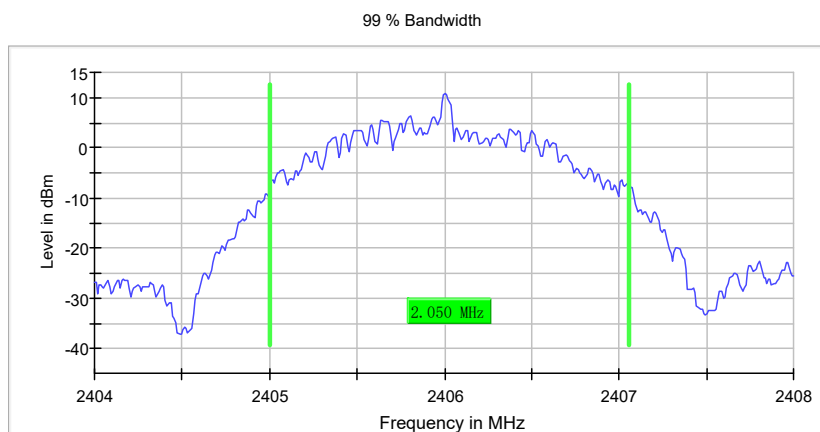

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.40400 GHz	2.40400 GHz
Stop Frequency	2.40800 GHz	2.40800 GHz
Span	4.000 MHz	4.000 MHz
RBW	20.000 kHz	>= 20.000 kHz
VBW	100.000 kHz	>= 60.000 kHz
SweepPoints	400	~ 400
Sweeptime	94.824 µs	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamplifier	off	off
Stablemode	Trace	Trace
Stablevalue	0.30 dB	0.30 dB
Run	11 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.09 dB	0.30 dB

Occupied Channel Bandwidth 99% (2440 MHz; 10.000 dBm; 2 MHz)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v04 and ANSI C63.10-2013

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2440.000000	2.050000	---	---	2439.005000	2441.055000

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
2440.000000	PASS

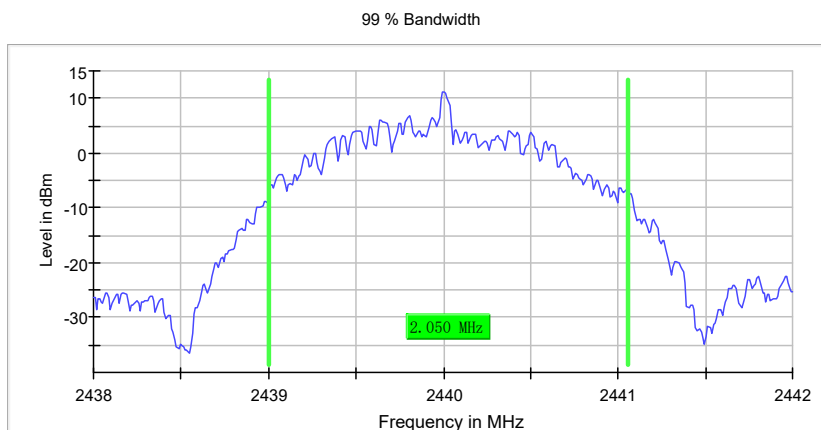

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.43800 GHz	2.43800 GHz
Stop Frequency	2.44200 GHz	2.44200 GHz
Span	4.000 MHz	4.000 MHz
RBW	20.000 kHz	>= 20.000 kHz
VBW	100.000 kHz	>= 60.000 kHz
SweepPoints	400	~ 400
SweepTime	94.824 µs	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamplifier	off	off
Stablemode	Trace	Trace
Stablevalue	0.30 dB	0.30 dB
Run	6 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.16 dB	0.30 dB

Occupied Channel Bandwidth 99% (2476 MHz; 10.000 dBm; 2 MHz)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v04 and ANSI C63.10-2013

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2476.000000	1.750000	---	---	2474.865000	2476.615000

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
2476.000000	PASS

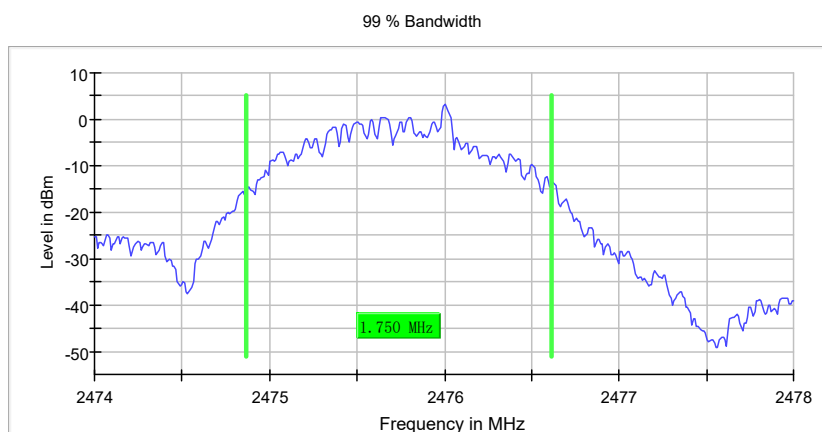



Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.47400 GHz	2.47400 GHz
Stop Frequency	2.47800 GHz	2.47800 GHz
Span	4.000 MHz	4.000 MHz
RBW	20.000 kHz	>= 20.000 kHz
VBW	100.000 kHz	>= 60.000 kHz
SweepPoints	400	~ 400
SweepTime	94.824 µs	AUTO
Reference Level	0.000 dBm	0.000 dBm
Attenuation	20.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamplifier	off	off
Stablemode	Trace	Trace
Stablevalue	0.30 dB	0.30 dB
Run	7 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.16 dB	0.30 dB


Appendix B.4: Test Results of Conducted Spurious Emissions Measured in 100 kHz Bandwidth

GFSK Mode, 1Mbps


Ant 0
Low Channel:

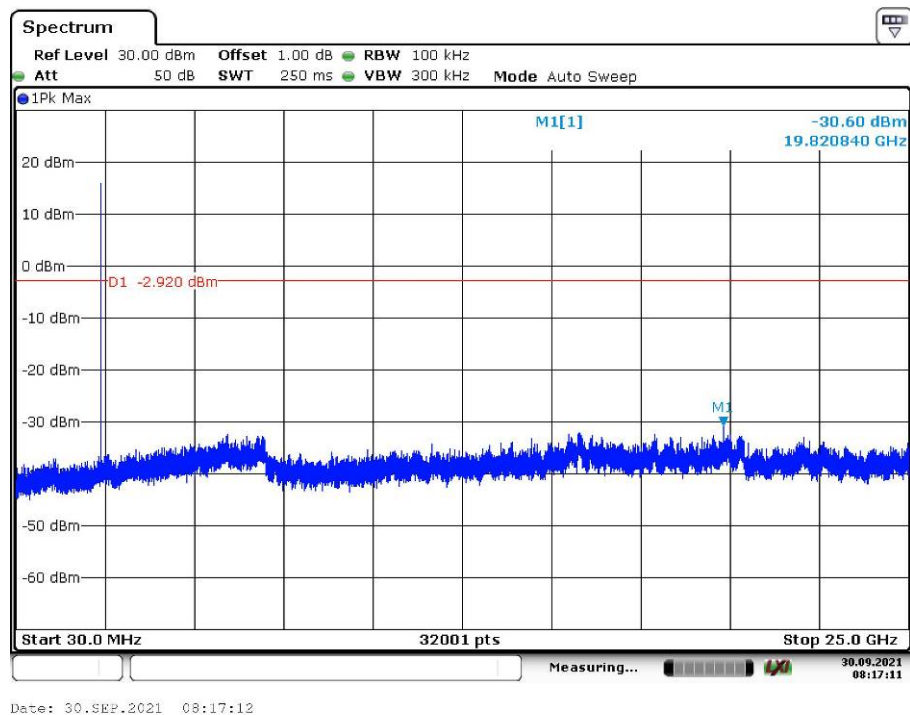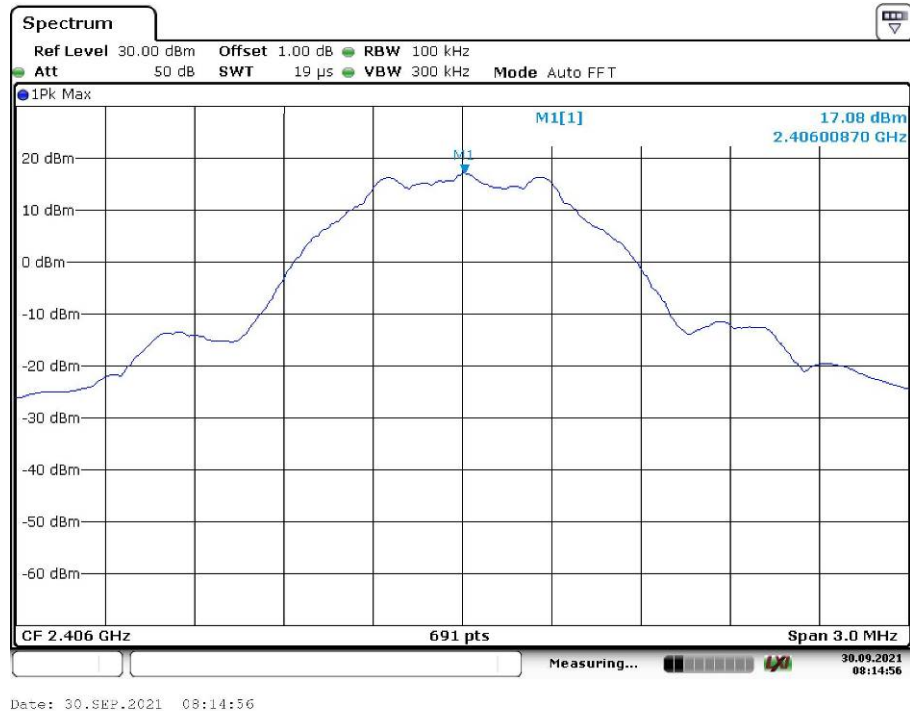

Middle Channel:

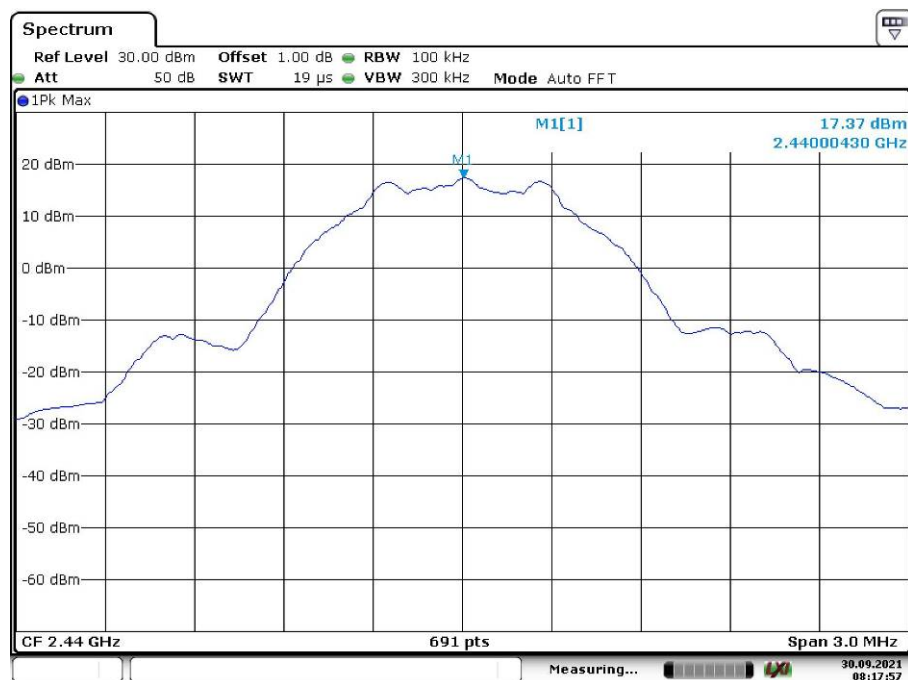

Date: 30.SEP.2021 08:17:57

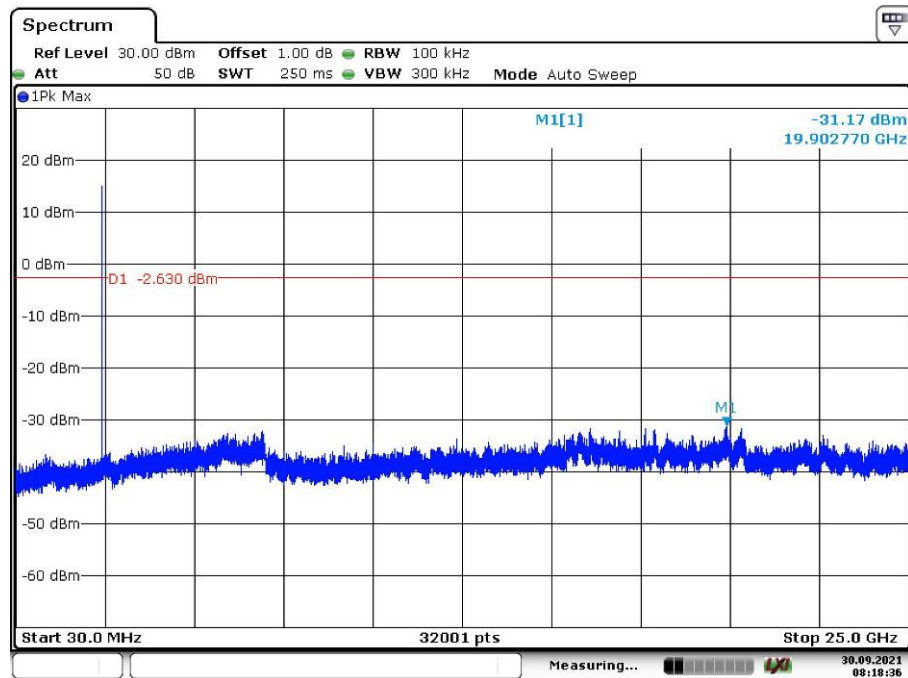


Date: 30.SEP.2021 08:18:36

High Channel:




Date: 30.SEP.2021 08:21:23

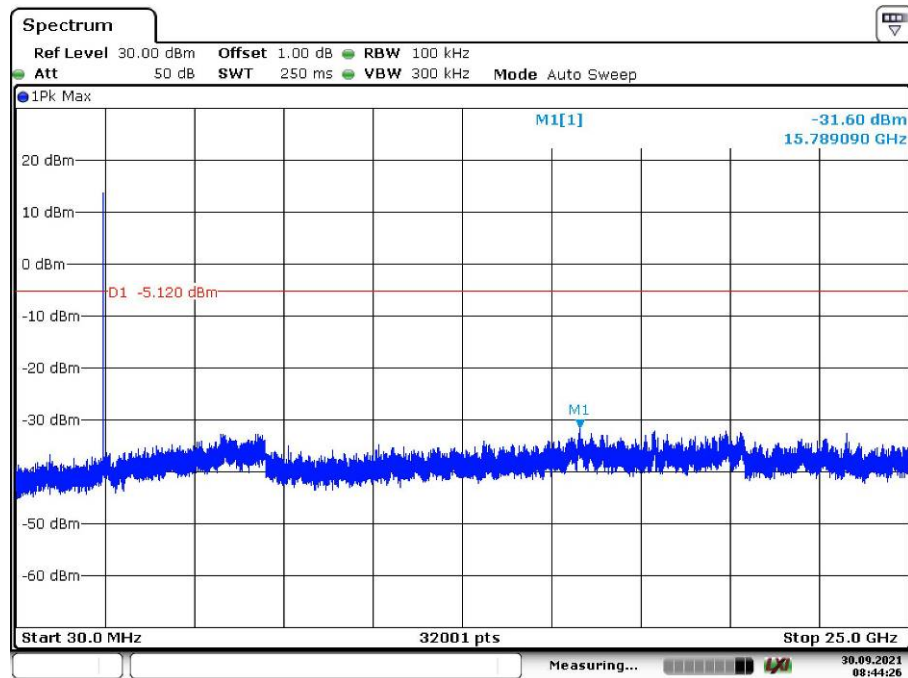


Date: 30.SEP.2021 08:44:27

Band Edge, Low Channel:


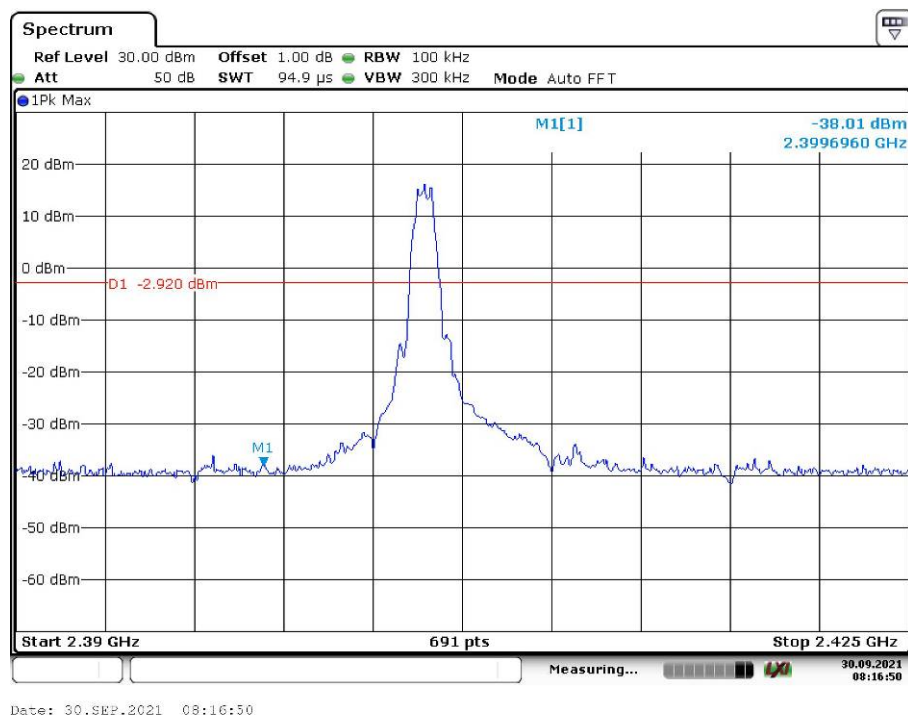


Band Edge, High Channel:

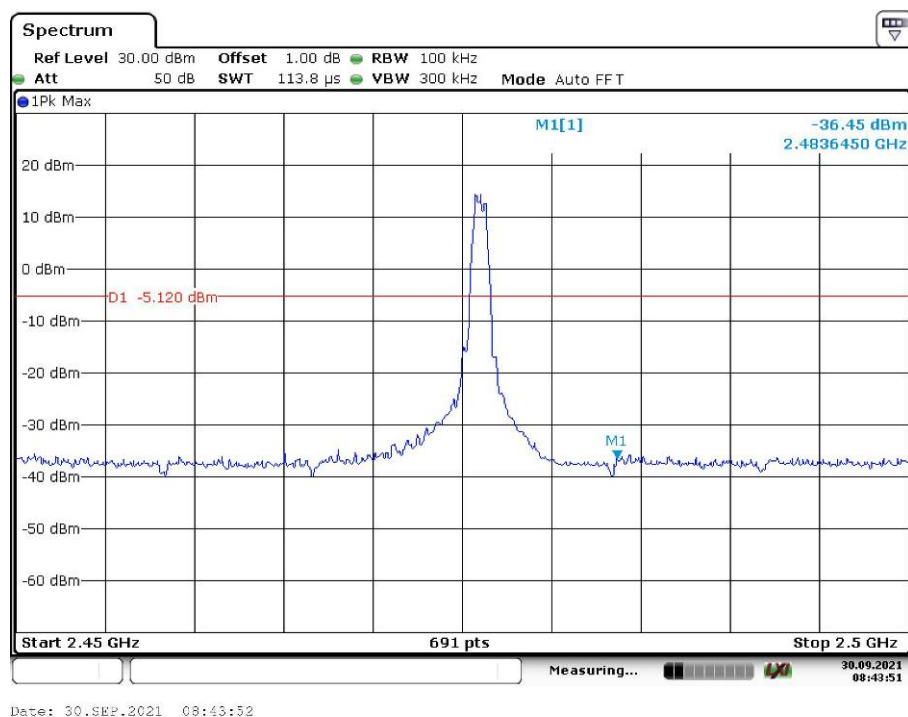


Ant 1


Low Channel:

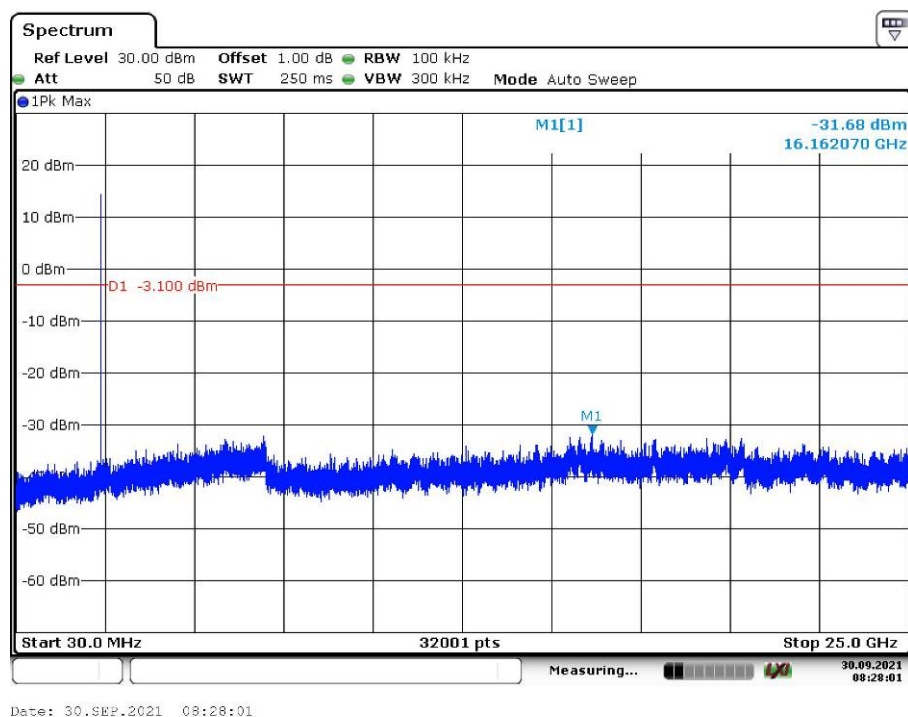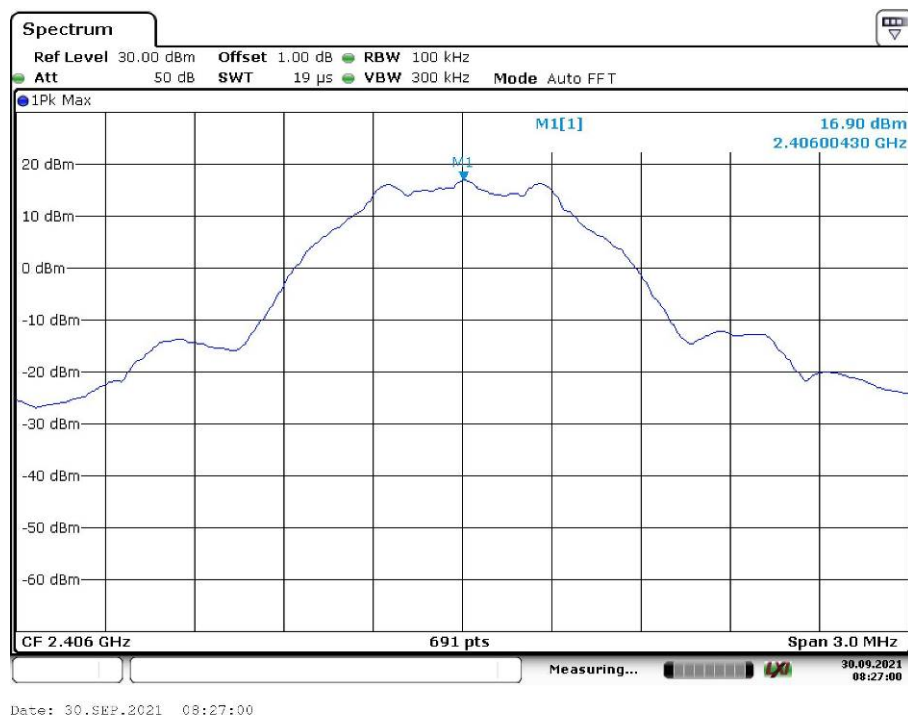

Middle Channel:

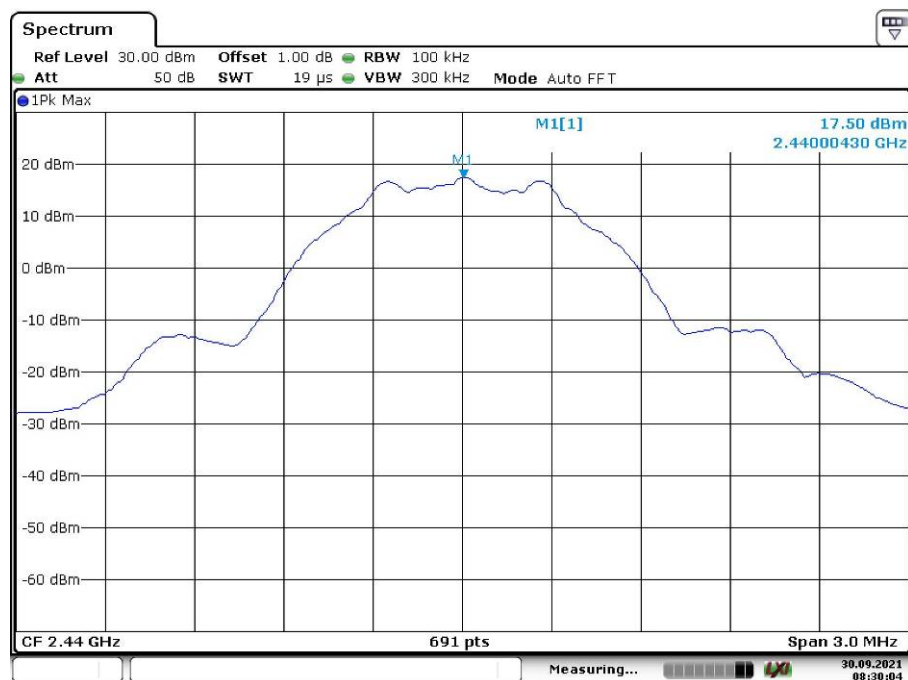


Date: 30.SEP.2021 08:30:05

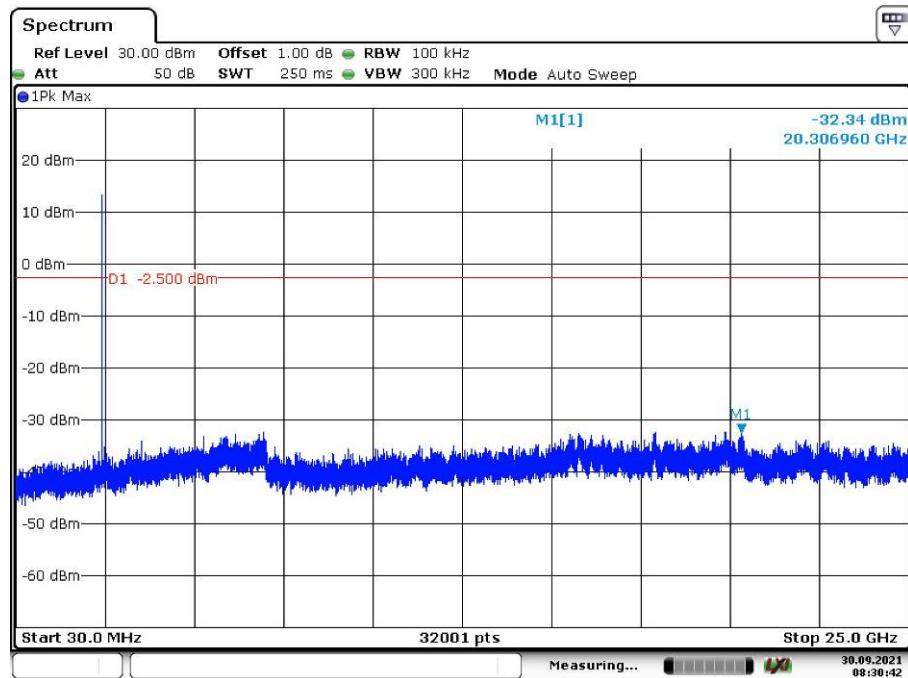


Date: 30.SEP.2021 08:30:43

High Channel:

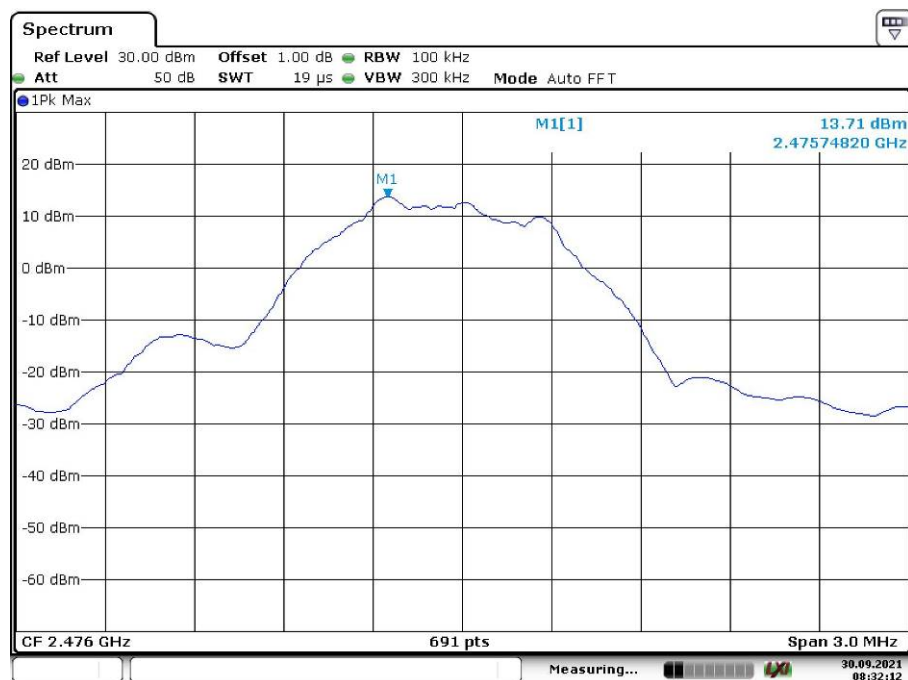


Date: 30.SEP.2021 08:32:13

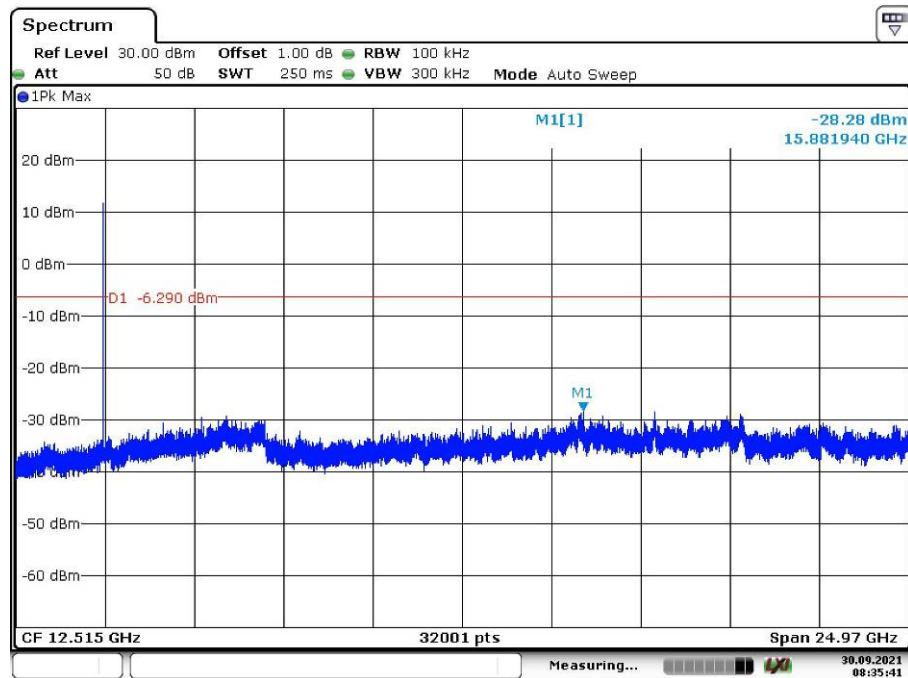


Date: 30.SEP.2021 08:35:42

Band Edge, Low Channel:

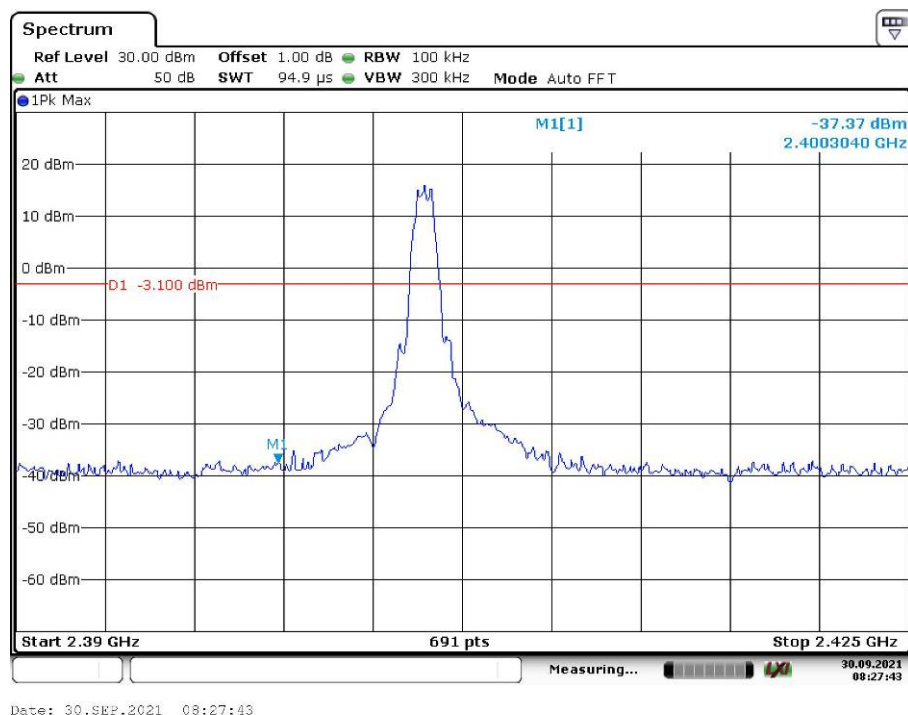



Band Edge, High Channel:

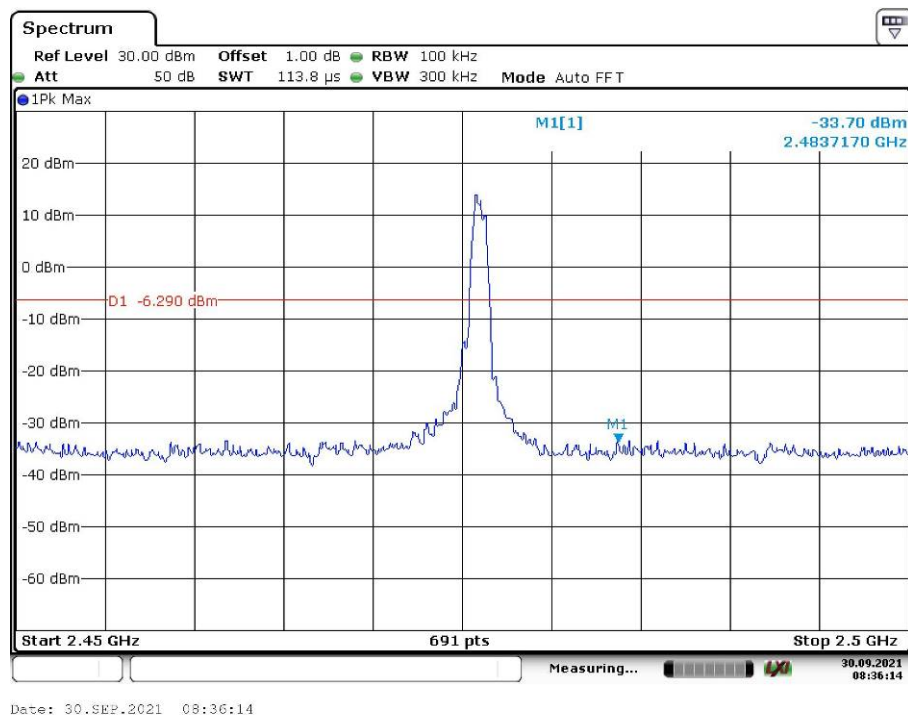

GFSK Mode, 2Mbps

Ant 0


Low Channel:

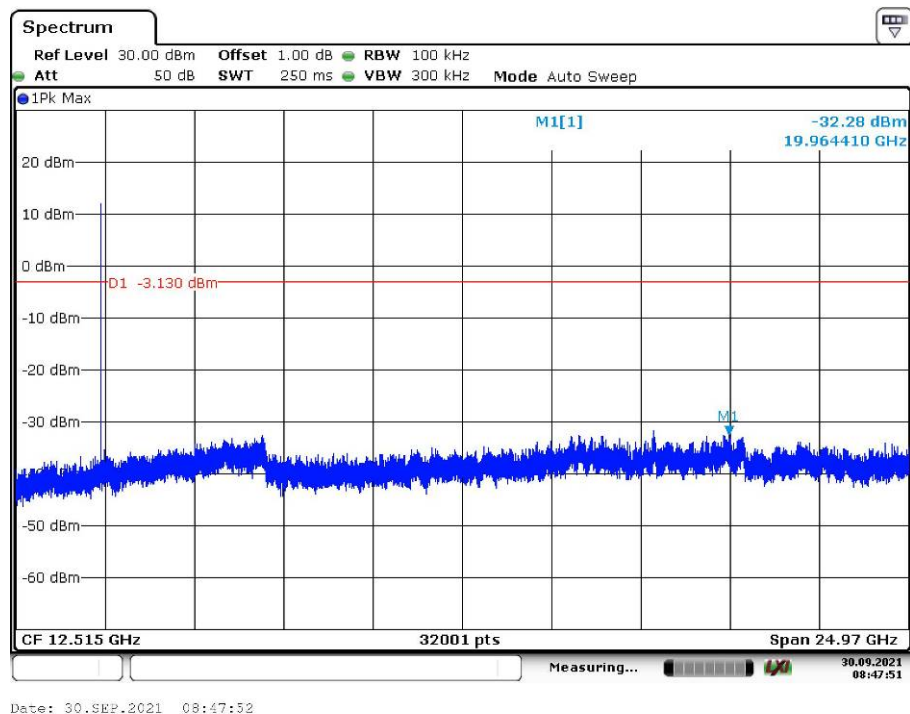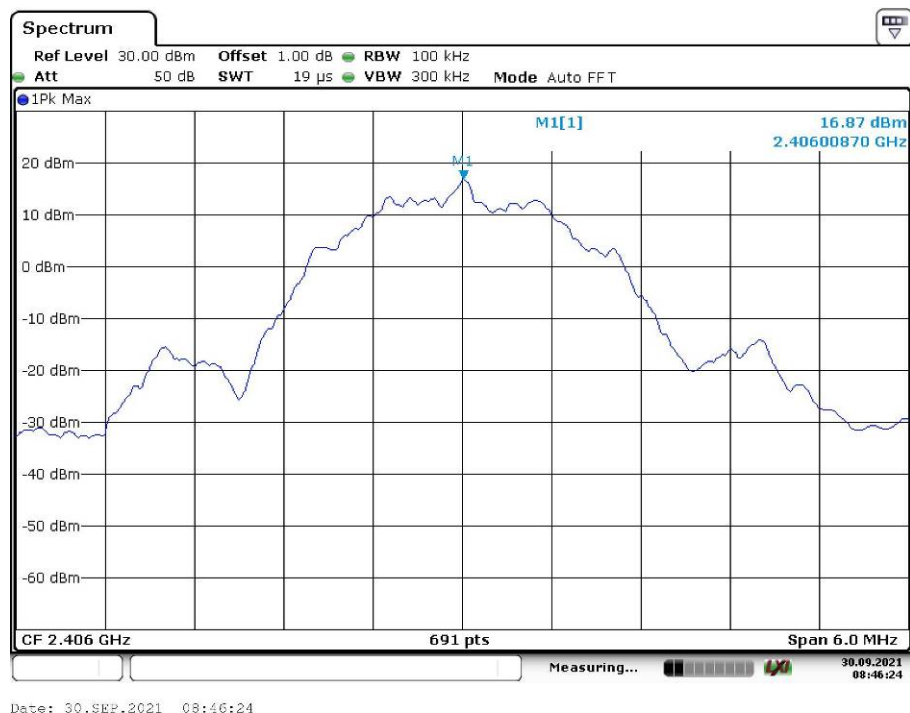

Middle Channel:




Date: 30.SEP.2021 08:49:54

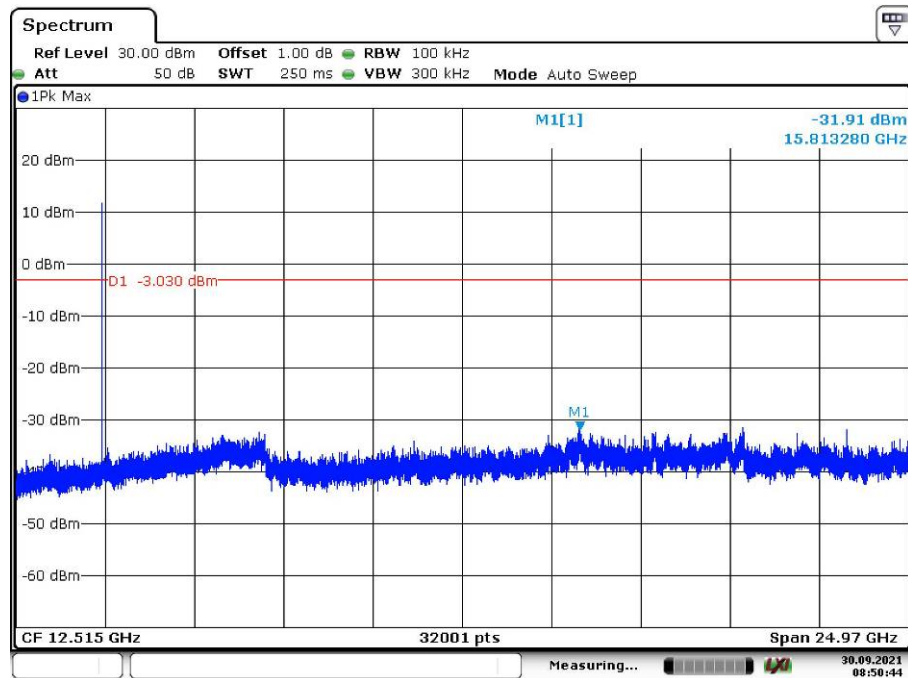


Date: 30.SEP.2021 08:50:44

High Channel:

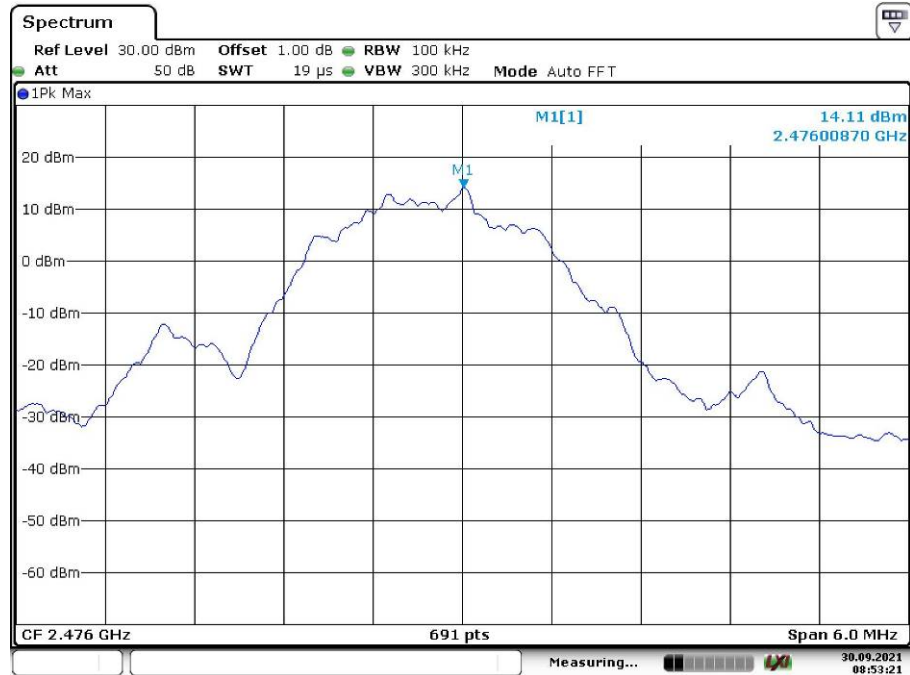


Date: 30.SEP.2021 08:53:21

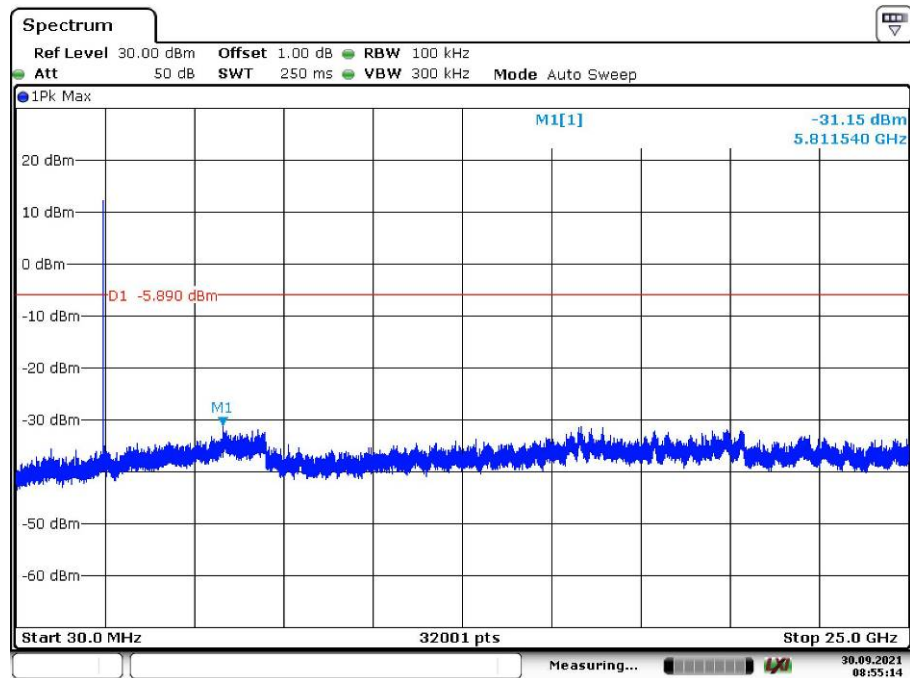


Date: 30.SEP.2021 08:55:14

Band Edge, Low Channel:


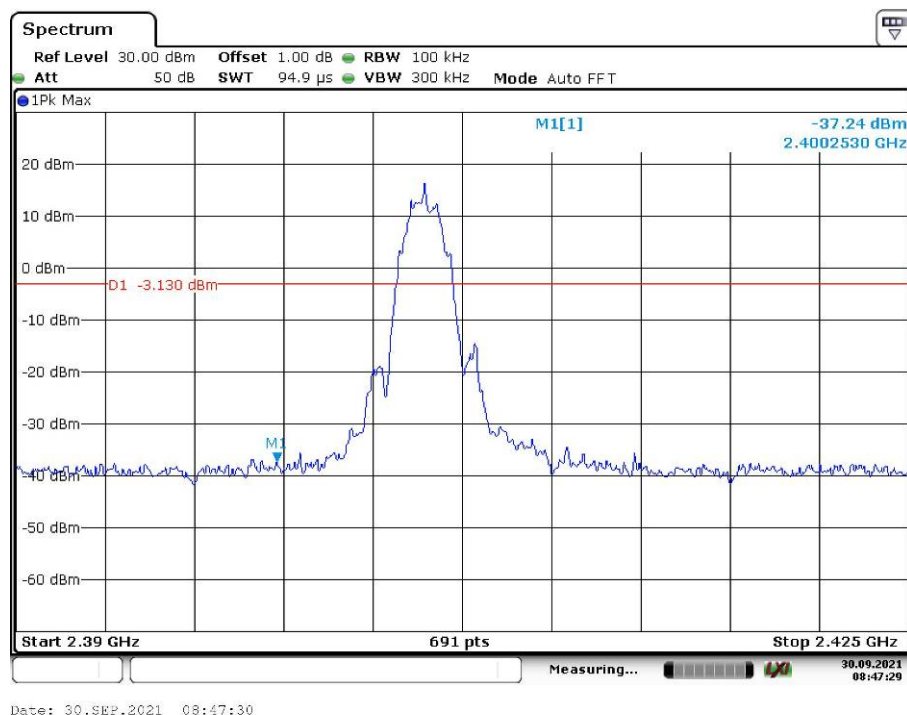


Band Edge, High Channel:

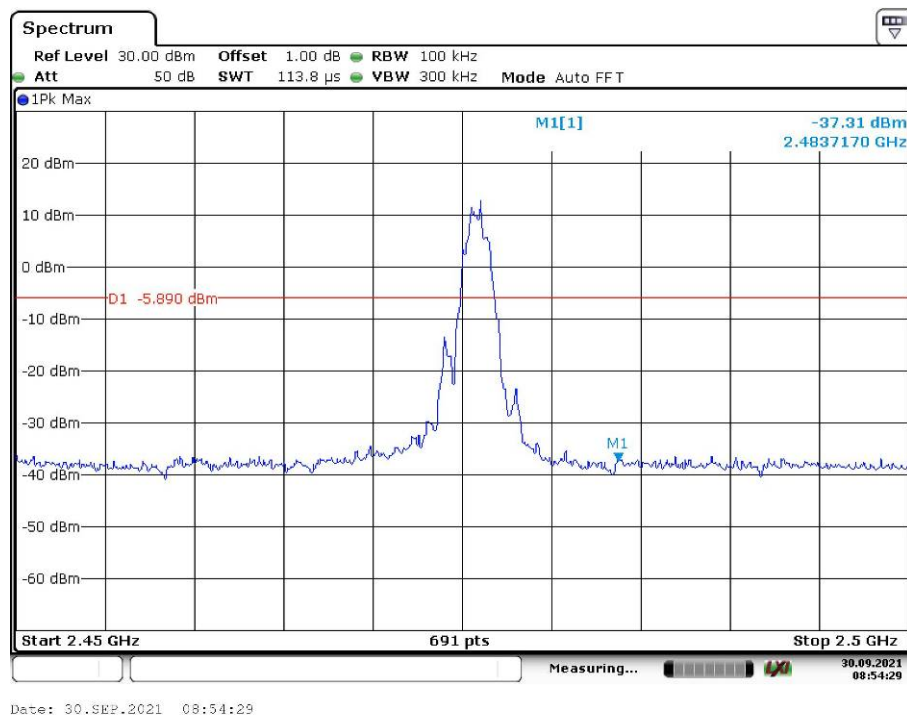

Ant 1


Low Channel:

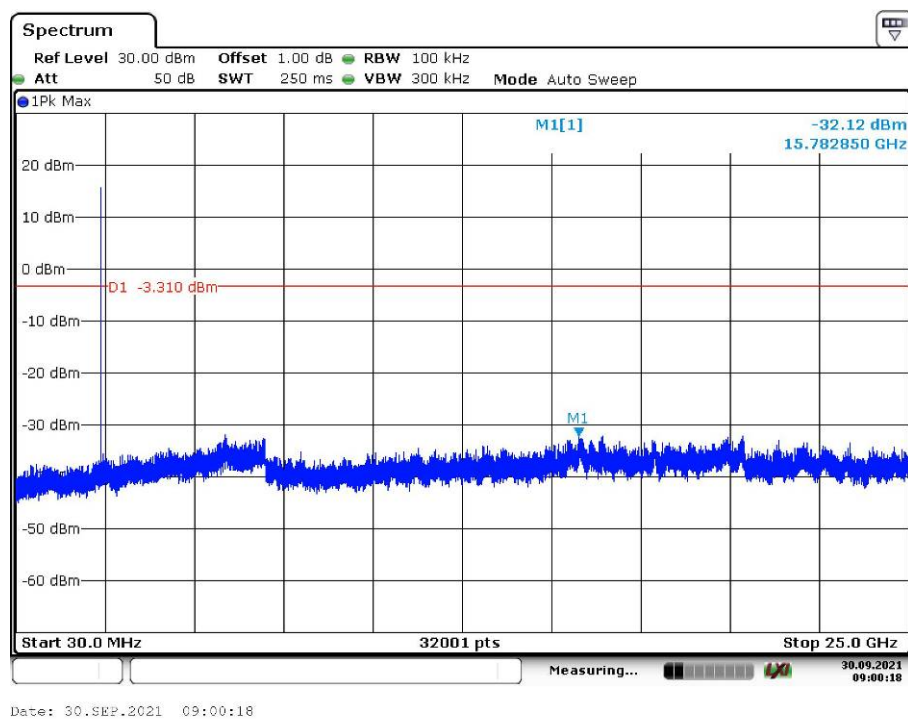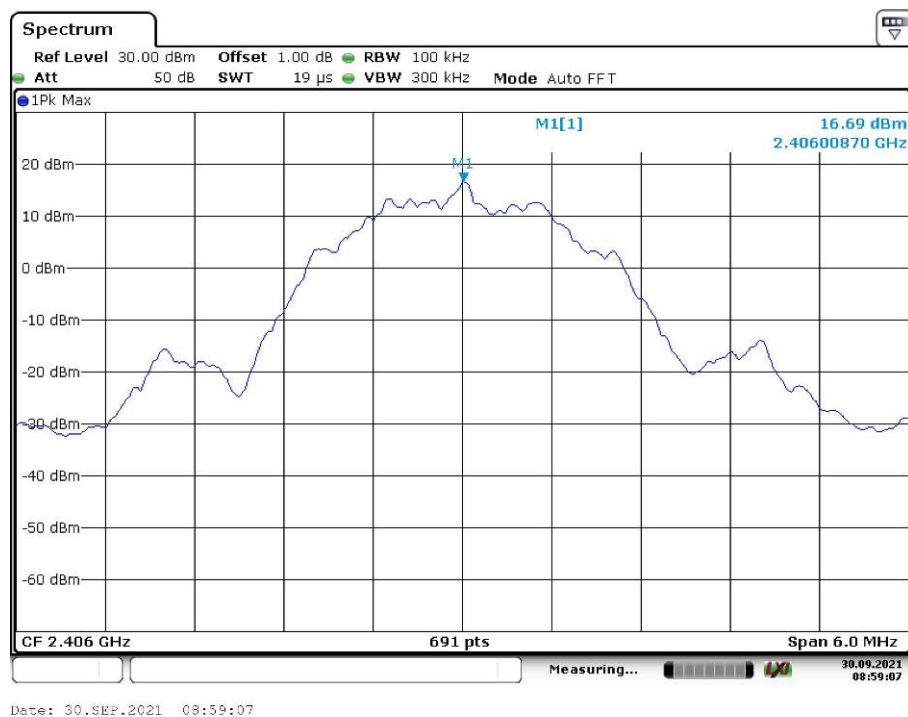

Middle Channel:



Date: 30.SEP.2021 09:02:45

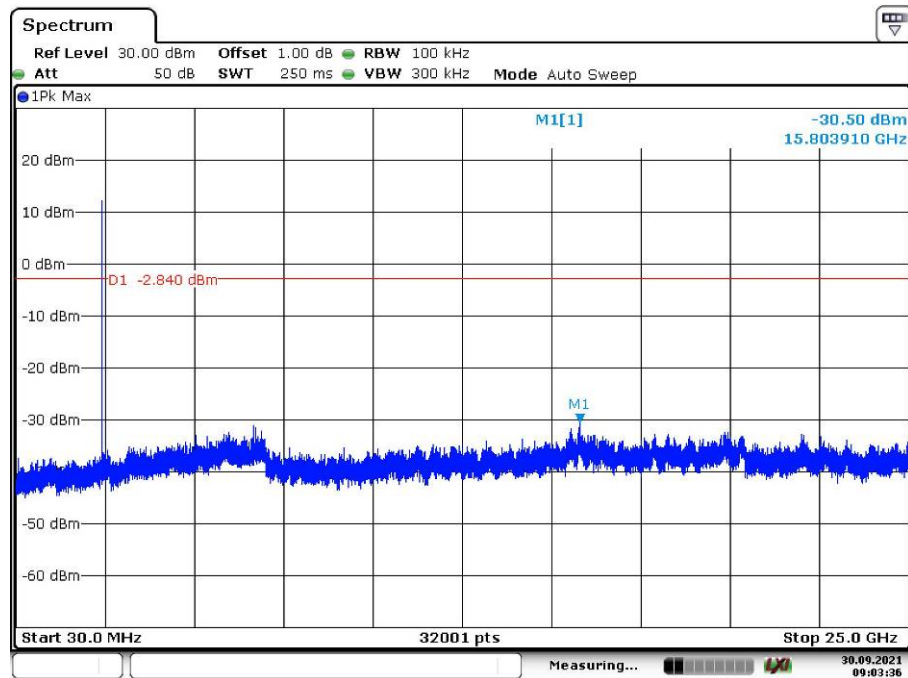


Date: 30.SEP.2021 09:03:36

High Channel:




Date: 30.SEP.2021 09:05:32

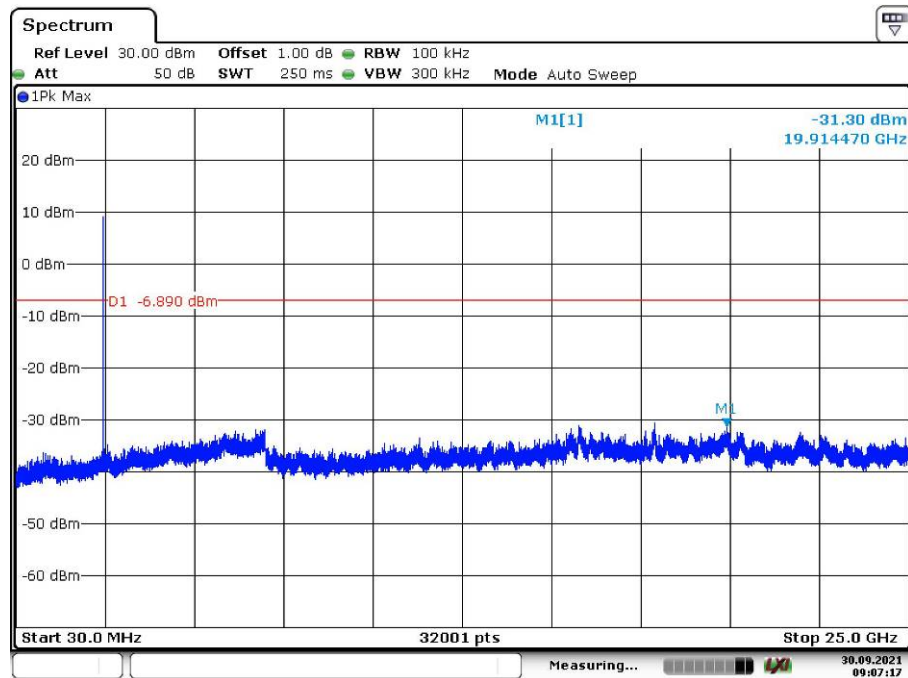


Date: 30.SEP.2021 09:07:18

Band Edge, Low Channel:

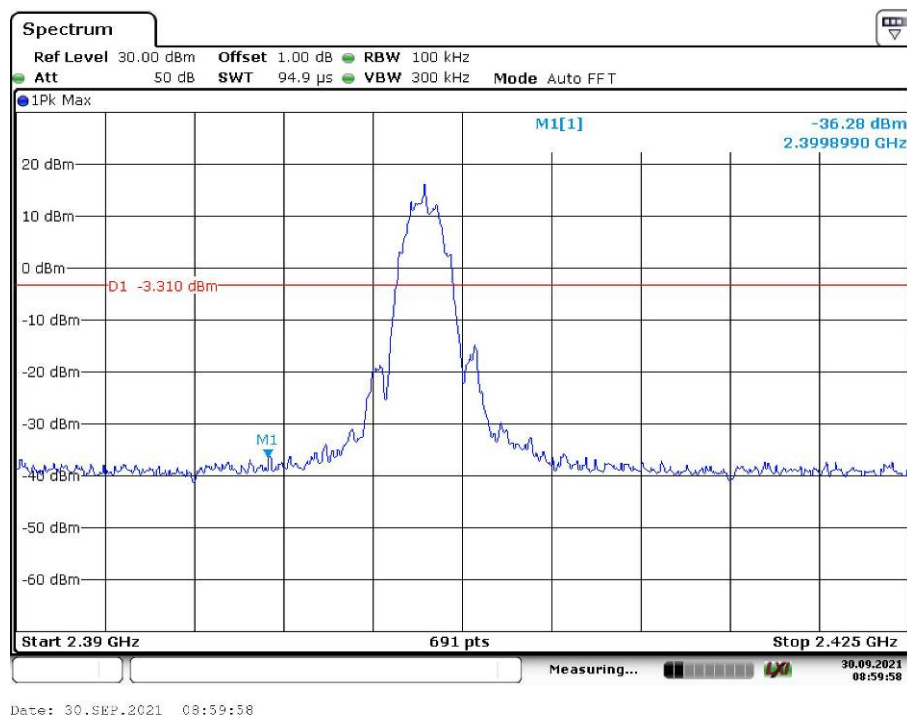

Band Edge, High Channel:

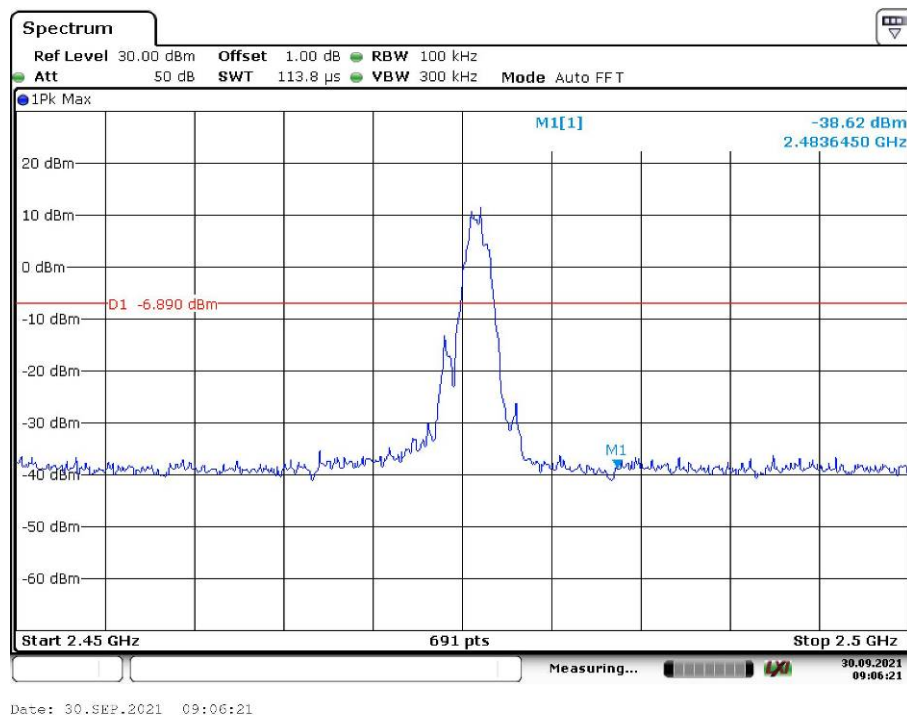


Appendix B.5: Test Results of Radiated Spurious Emissions

Note:

- 1) This testing was carried out on different modulations, but only the worst case was presented in this report.
 - 2) Testing was carried out within frequency range 9kHz to the tenth harmonics. The measurement results below 30MHz and 18GHz - 26.5GHz were greater than 20dB below the limit, so only the radiated spurious emissions from 30MHz to 18GHz were reported.
- 30 MHz to 1GHz

EUT Information

EUT Name:	DJI MIC Transmitter
Model:	AST01
Test Mode:	Low channel
Test Voltage::	Battery
Remark:	Temp 23 Humi:45%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

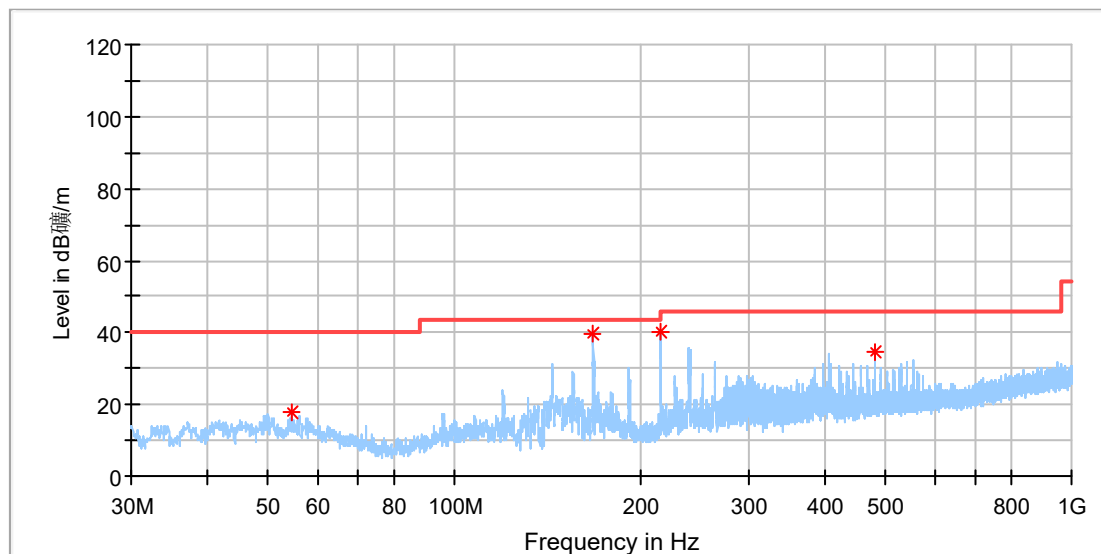


Critical_Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
54.541000	17.62	40.00	22.38	100.0	H	214.0	-18.4
167.982500	39.82	43.50	3.68	100.0	H	17.0	-21.3
215.706500	40.38	43.50	3.12	100.0	H	154.0	-18.7
480.031500	34.52	46.00	11.48	100.0	H	17.0	-12.2

EUT Information

EUT Name: DJI MIC Transmitter
Model: AST01
Test Mode: Low channel
Test Voltage:: Battery
Remark: Temp 23 Humi:45%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

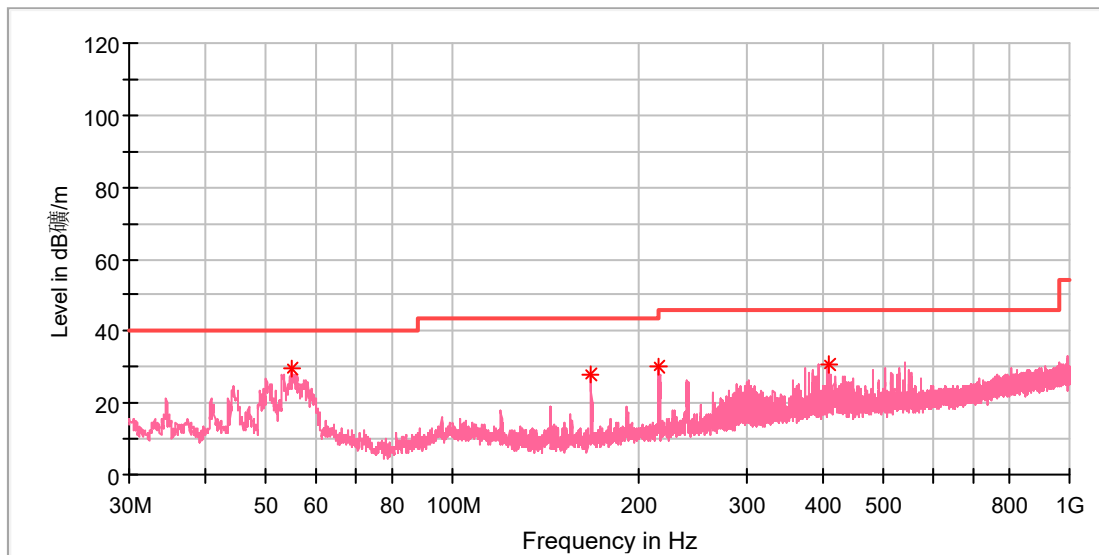


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
54.832000	29.49	40.00	10.51	100.0	V	296.0	-18.4
167.982500	28.04	43.50	15.46	100.0	V	261.0	-21.3
216.288500	29.99	46.00	16.01	100.0	V	66.0	-18.7
406.214500	30.55	46.00	15.45	100.0	V	191.0	-13.6

EUT Information

EUT Name: DJI MIC Transmitter
Model: AST01
Test Mode: High channel (CH 37)
Test Voltage:: Battery
Remark: Temp 23 Humi:45%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

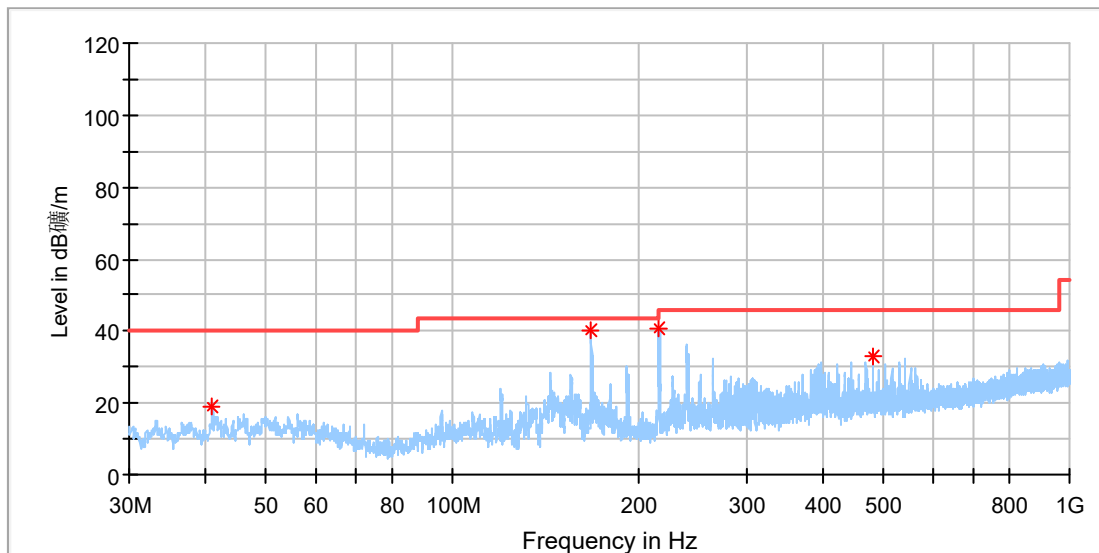


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
40.912500	18.87	40.00	21.13	100.0	H	63.0	-19.9
168.031000	40.42	43.50	3.08	100.0	H	347.0	-21.3
216.046000	40.65	46.00	5.35	100.0	H	160.0	-18.7
480.031500	32.74	46.00	13.26	100.0	H	0.0	-12.2

EUT Information

EUT Name: DJI MIC Transmitter
Model: AST01
Test Mode: High channel (CH 37)
Test Voltage:: Battery
Remark: Temp 23 Humi:45%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

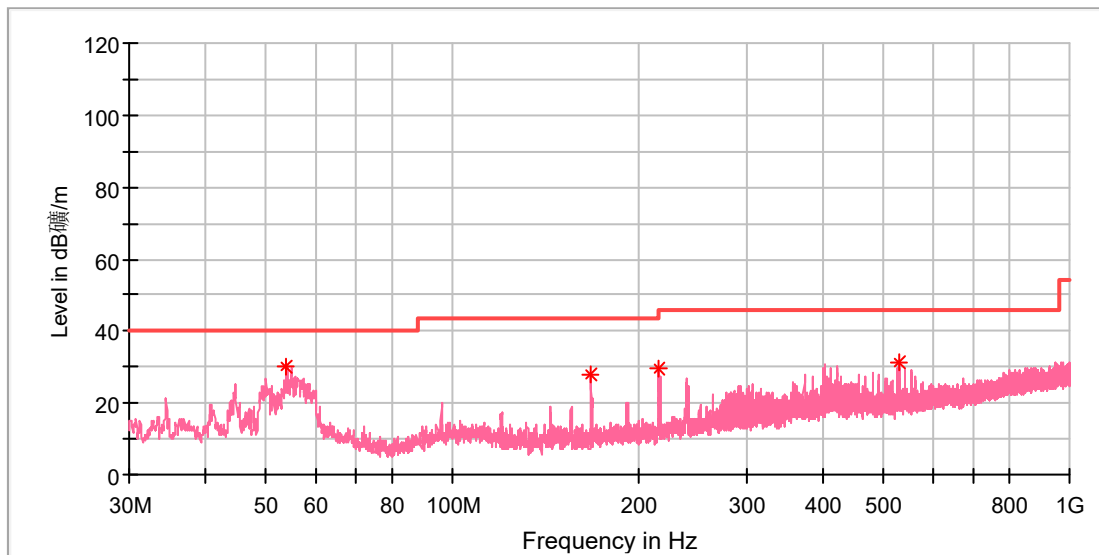

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
53.910500	30.16	40.00	9.84	100.0	V	253.0	-18.4
168.031000	28.15	43.50	15.35	100.0	V	288.0	-21.3
216.046000	29.74	46.00	16.26	100.0	V	86.0	-18.7
528.046500	31.46	46.00	14.54	100.0	V	79.0	-11.4

1GHz-18GHz

Note: The highest waveform in the figure is 2.4GHz Fundamental.

EUT Information

EUT Name:	DJI MIC Transmitter
Model:	AST01
Test Mode:	Low channel
Test Voltage::	Battery
Remark:	Temp 23 Humi:45%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

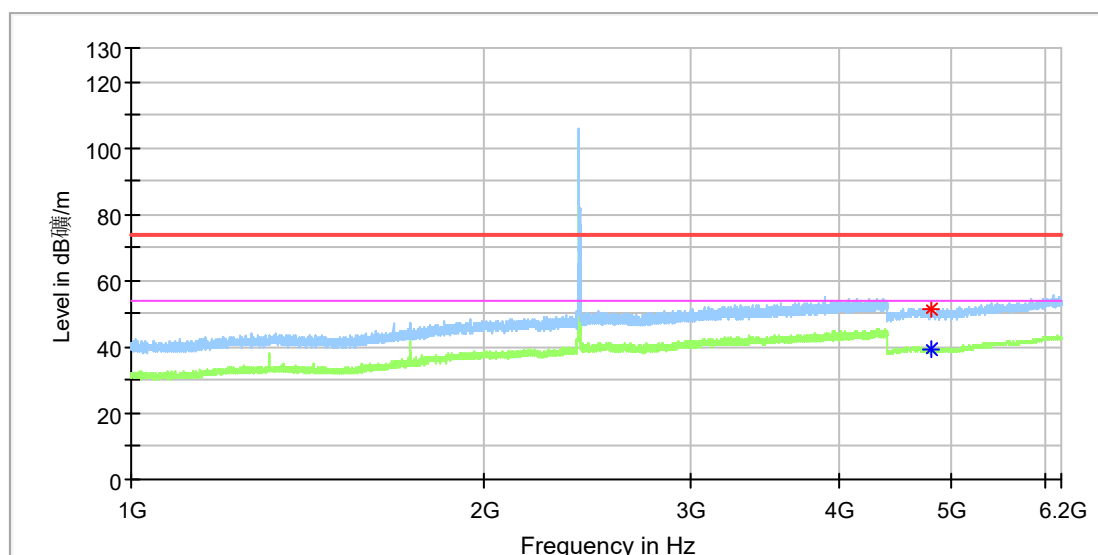


Critical_Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4809.500000	---	39.52	54.00	14.48	100.0	H	186.0	11.8
4810.000000	51.38	---	74.00	22.62	100.0	H	122.0	11.8

EUT Information

EUT Name: DJI MIC Transmitter
Model: AST01
Test Mode: Low channel
Test Voltage:: Battery
Remark: Temp 23 Humi:45%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

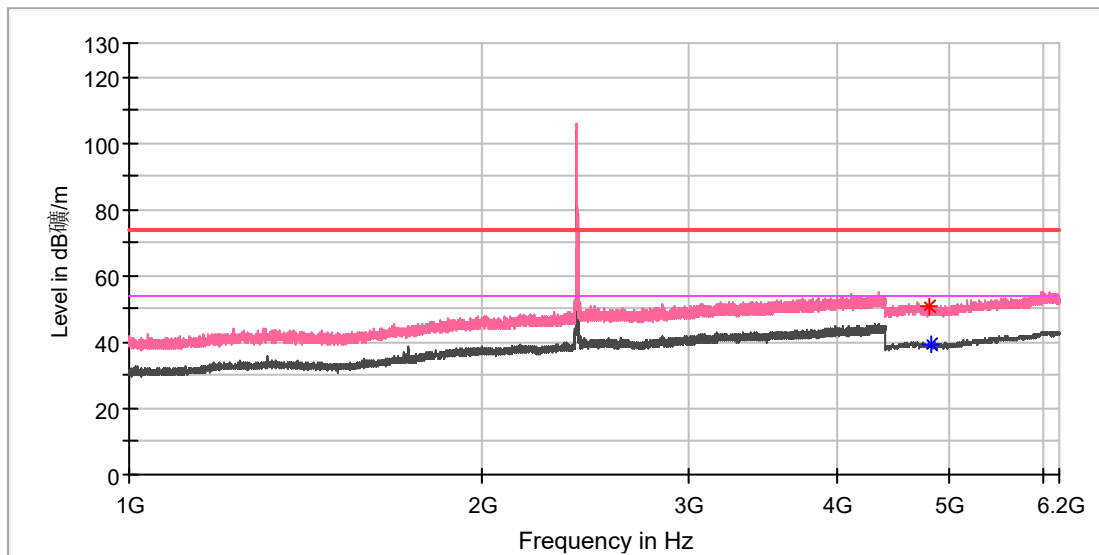


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4808.500000	50.52	---	74.00	23.48	100.0	V	338.0	11.8
4812.000000	---	39.24	54.00	14.76	100.0	V	149.0	11.8

EUT Information

EUT Name: DJI MIC Transmitter
Model: AST01
Test Mode: Low channel
Test Voltage:: Battery
Remark: Temp 23 Humi:45%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

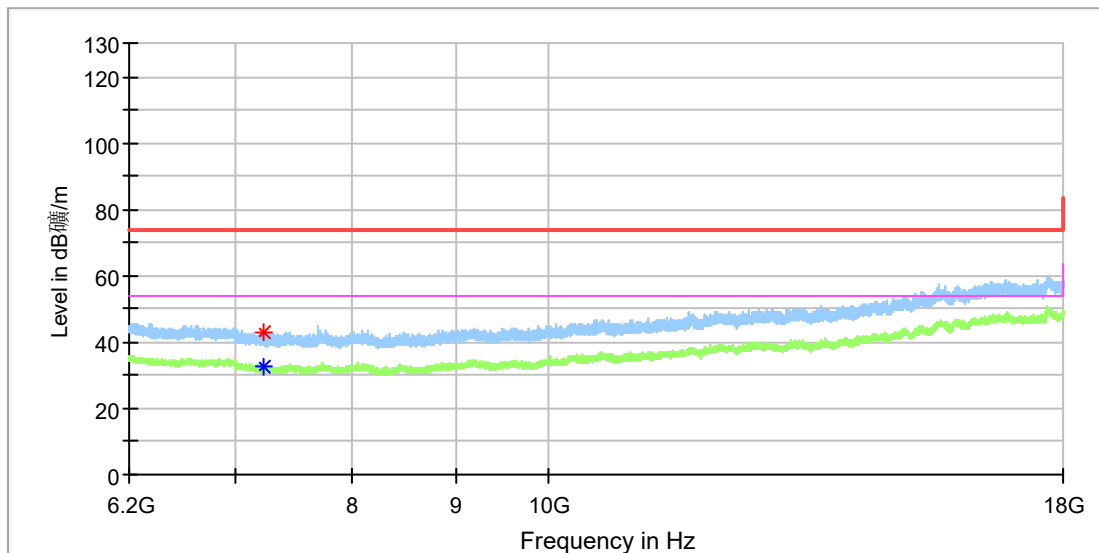


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7218.733333	---	32.37	54.00	21.63	100.0	H	189.0	8.7
7229.550000	43.03	---	74.00	30.97	100.0	H	176.0	8.6

EUT Information

EUT Name: DJI MIC Transmitter
Model: AST01
Test Mode: Low channel
Test Voltage:: Battery
Remark: Temp 23 Humi:45%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

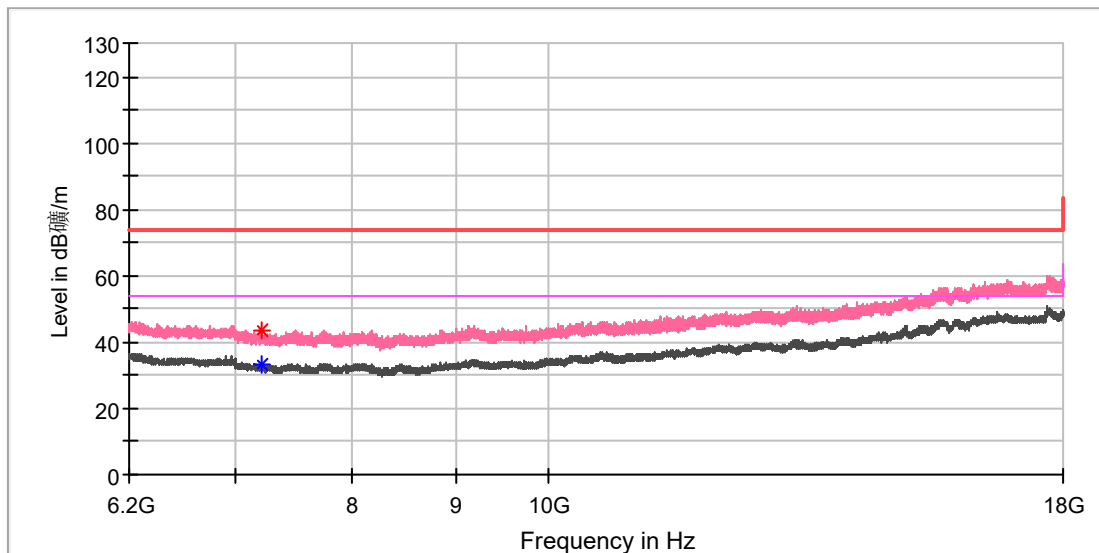


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7212.833333	43.57	---	74.00	30.43	100.0	V	256.0	8.7
7216.766667	---	33.00	54.00	21.00	100.0	V	87.0	8.7

EUT Information

EUT Name: DJI MIC Transmitter
Model: AST01
Test Mode: Mid channel
Test Voltage:: Battery
Remark: Temp 23 Humi:45%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

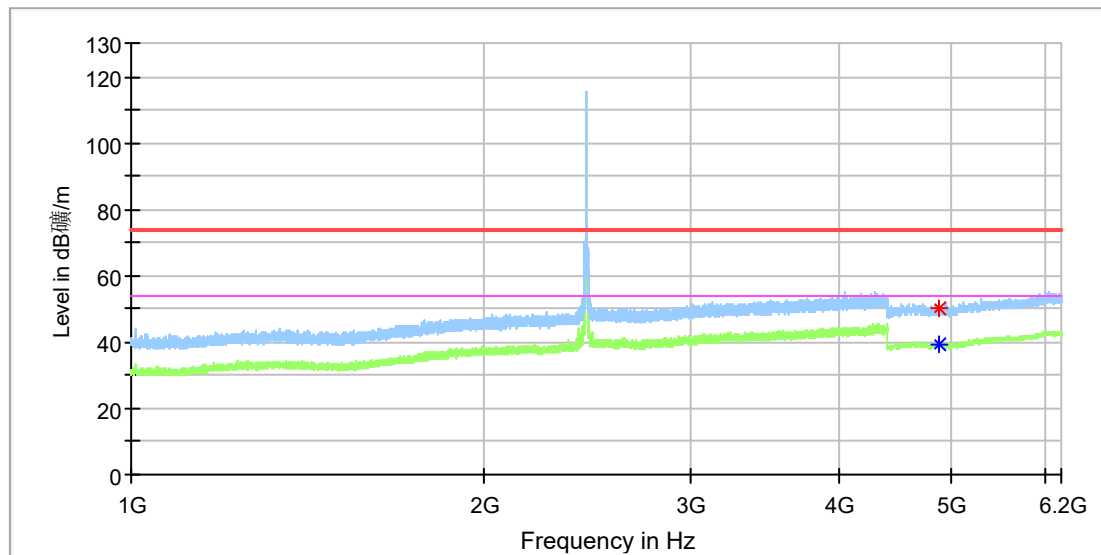


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4876.500000	49.95	---	74.00	24.05	100.0	H	56.0	11.8
4879.500000	---	39.35	54.00	14.65	100.0	H	71.0	11.8

EUT Information

EUT Name: DJI MIC Transmitter
Model: AST01
Test Mode: Mid channel
Test Voltage:: Battery
Remark: Temp 23 Humi:45%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

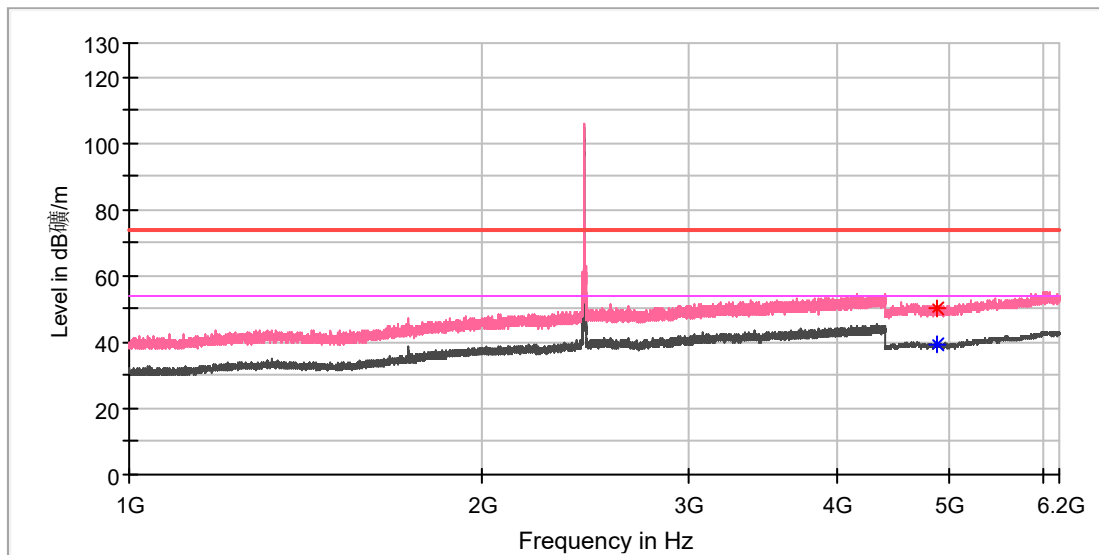


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4878.000000	50.34	---	74.00	23.66	100.0	V	328.0	11.8
4878.000000	---	39.04	54.00	14.96	100.0	V	328.0	11.8

EUT Information

EUT Name: DJI MIC Transmitter
Model: AST01
Test Mode: Mid channel
Test Voltage:: Battery
Remark: Temp 23 Humi:45%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

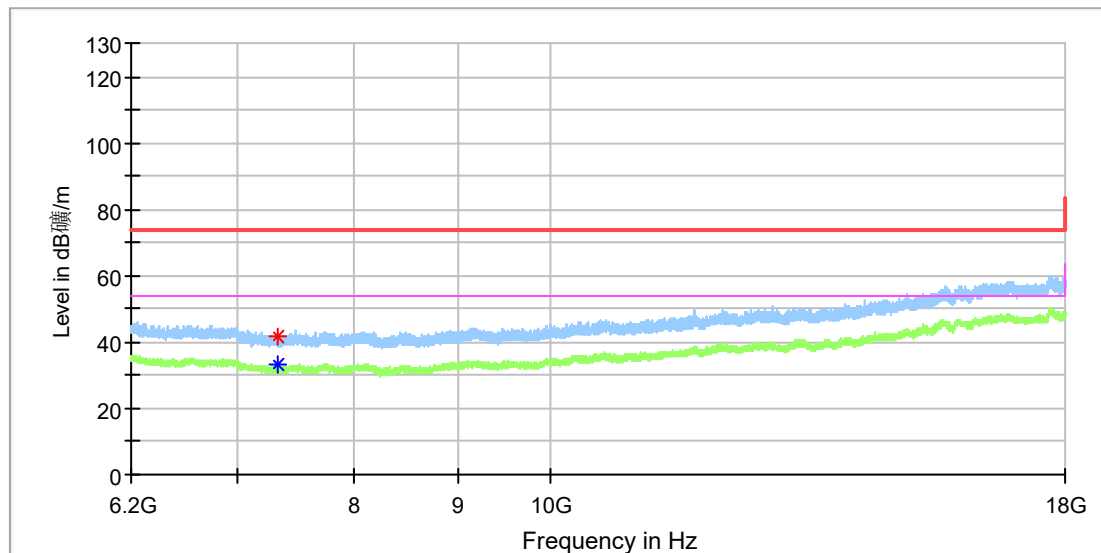


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7322.475000	41.73	---	74.00	32.27	100.0	H	354.0	8.2
7328.375000	---	33.07	54.00	20.93	100.0	H	224.0	8.1

EUT Information

EUT Name: DJI MIC Transmitter
Model: AST01
Test Mode: Mid channel
Test Voltage:: Battery
Remark: Temp 23 Humi:45%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

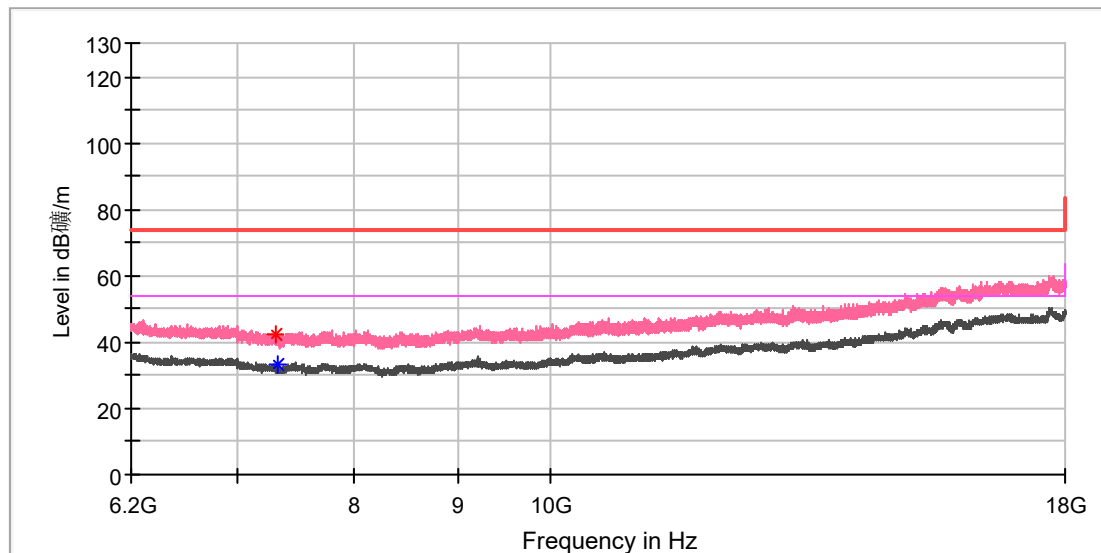


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7315.100000	42.35	---	74.00	31.65	100.0	V	0.0	8.2
7319.033333	---	33.02	54.00	20.98	100.0	V	304.0	8.2

EUT Information

EUT Name: DJI MIC Transmitter
Model: AST01
Test Mode: High channel (CH 36)
Test Voltage:: Battery
Remark: Temp 23 Humi:45%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

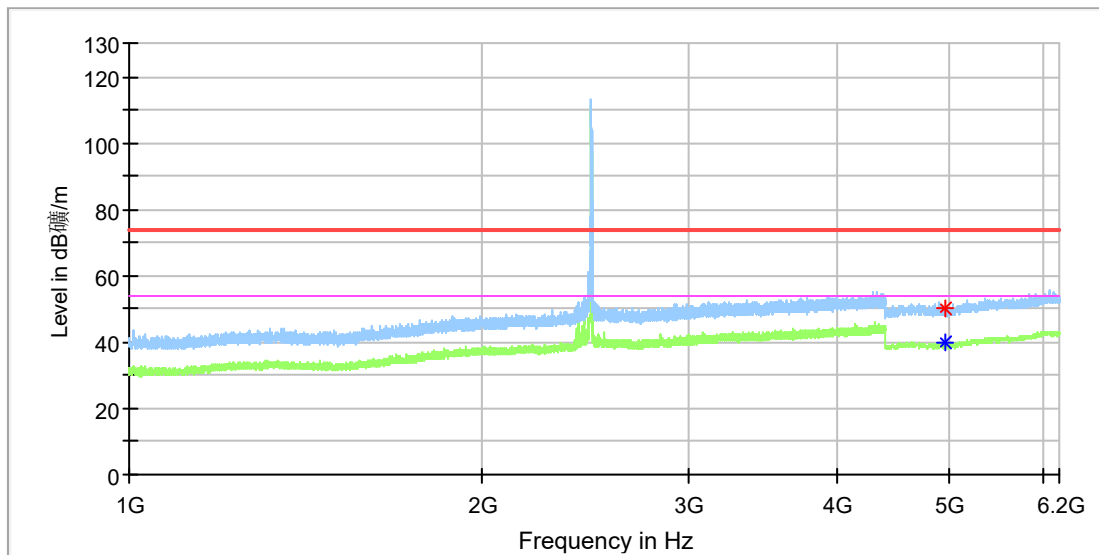


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4951.500000	---	39.63	54.00	14.37	100.0	H	293.0	11.8
4952.500000	50.36	---	74.00	23.64	100.0	H	32.0	11.8

EUT Information

EUT Name: DJI MIC Transmitter
Model: AST01
Test Mode: High channel (CH 36)
Test Voltage:: Battery
Remark: Temp 23 Humi:45%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

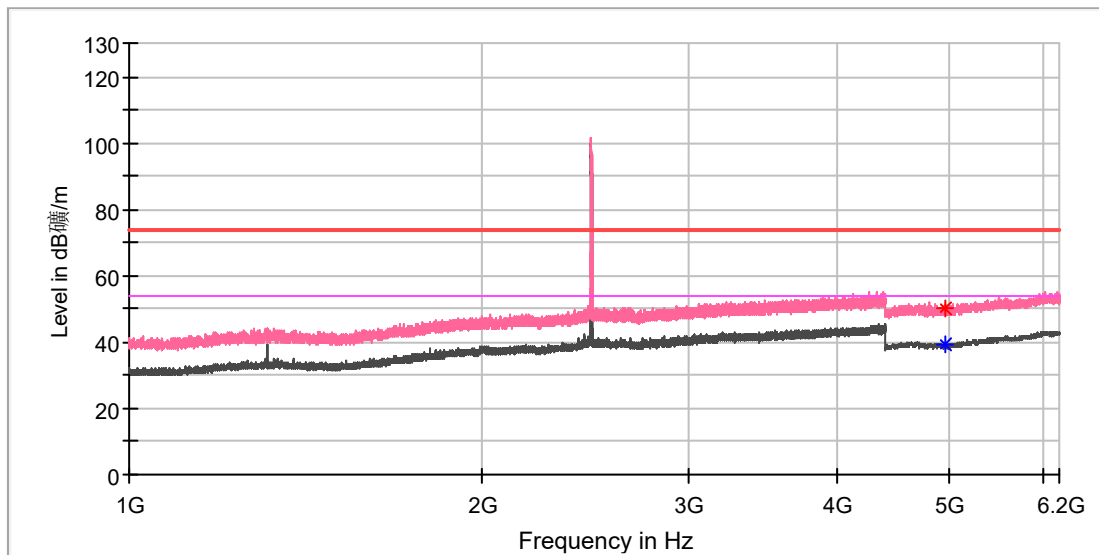


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4945.500000	---	39.39	54.00	14.61	100.0	V	69.0	11.8
4957.500000	50.43	---	74.00	23.57	100.0	V	105.0	11.8

EUT Information

EUT Name: DJI MIC Transmitter
Model: AST01
Test Mode: High channel (CH 36)
Test Voltage:: Battery
Remark: Temp 23 Humi:45%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

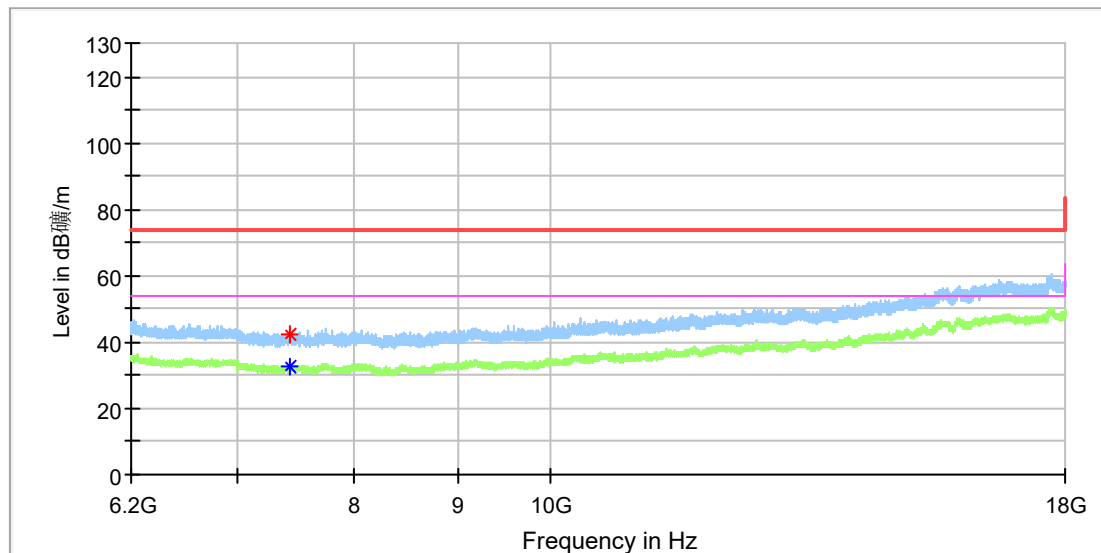


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7422.775000	42.22	---	74.00	31.78	100.0	H	255.0	8.4
7429.658333	---	32.93	54.00	21.07	100.0	H	350.0	8.4

EUT Information

EUT Name: DJI MIC Transmitter
Model: AST01
Test Mode: High channel (CH 36)
Test Voltage:: Battery
Remark: Temp 23 Humi:45%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

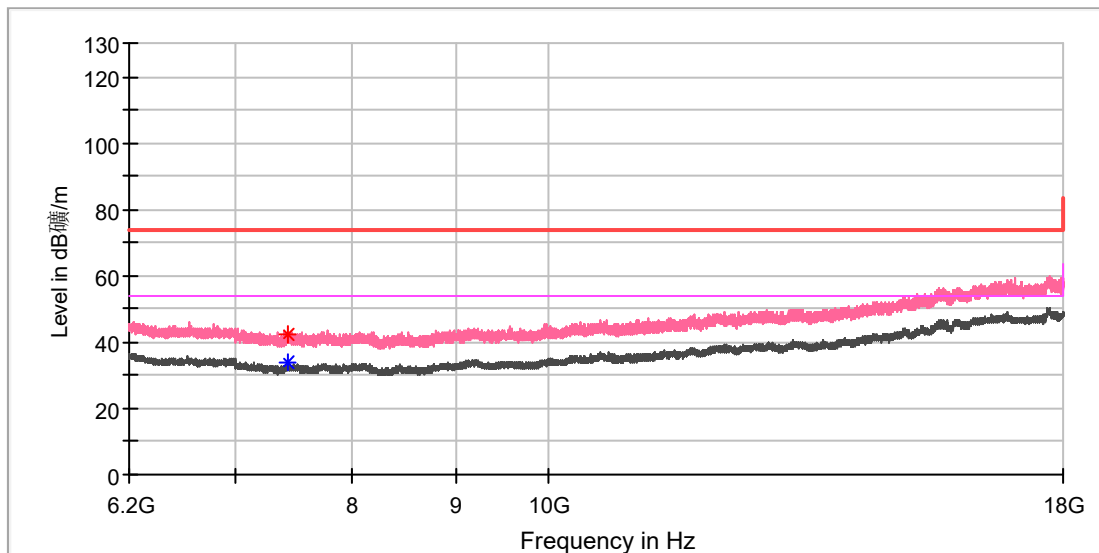


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7421.300000	---	33.97	54.00	20.03	100.0	V	43.0	8.4
7423.266667	42.21	---	74.00	31.79	100.0	V	194.0	8.4

EUT Information

EUT Name: DJI MIC Transmitter
Model: AST01
Test Mode: High channel (CH 37)
Test Voltage:: Battery
Remark: Temp 23 Humi:45%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

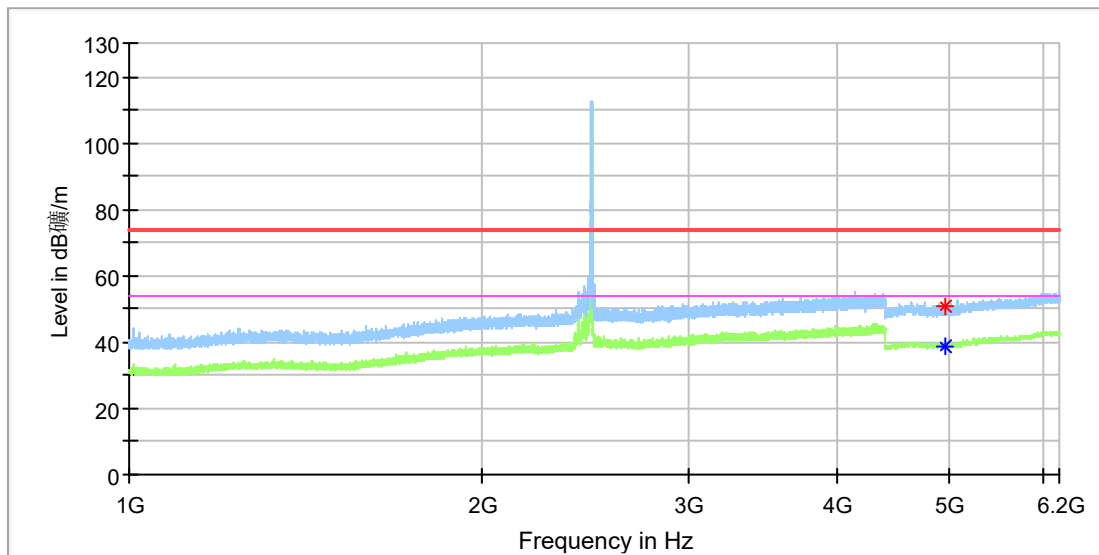


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4955.500000	---	38.96	54.00	15.04	100.0	H	198.0	11.8
4957.500000	51.04	---	74.00	22.96	100.0	H	35.0	11.8

EUT Information

EUT Name: DJI MIC Transmitter
Model: AST01
Test Mode: High channel (CH 37)
Test Voltage:: Battery
Remark: Temp 23 Humi:45%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

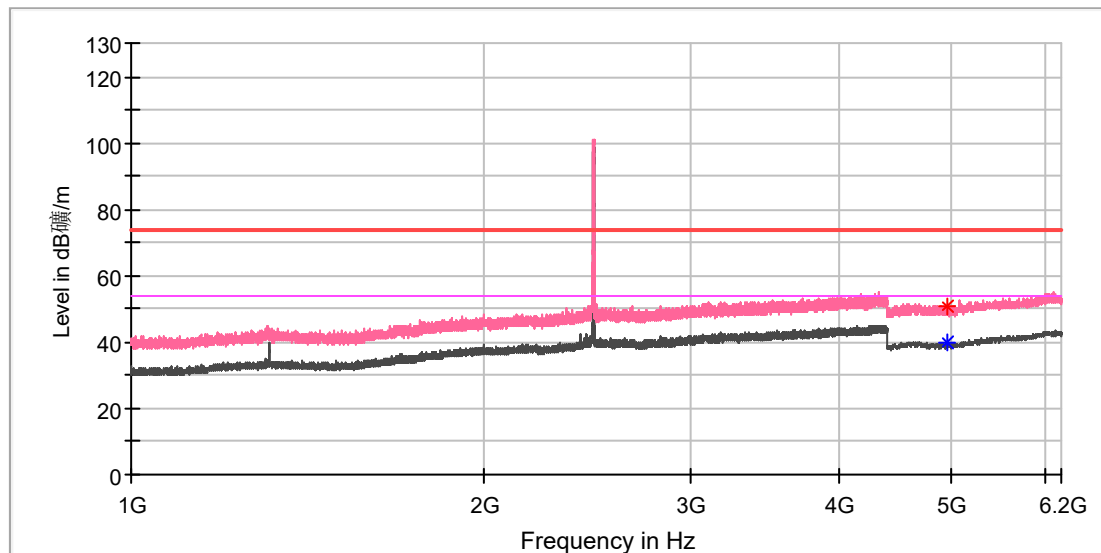


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4953.000000	---	39.79	54.00	14.21	100.0	V	118.0	11.8
4957.000000	50.58	---	74.00	23.42	100.0	V	5.0	11.8

EUT Information

EUT Name: DJI MIC Transmitter
Model: AST01
Test Mode: High channel (CH 37)
Test Voltage:: Battery
Remark: Temp 23 Humi:45%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

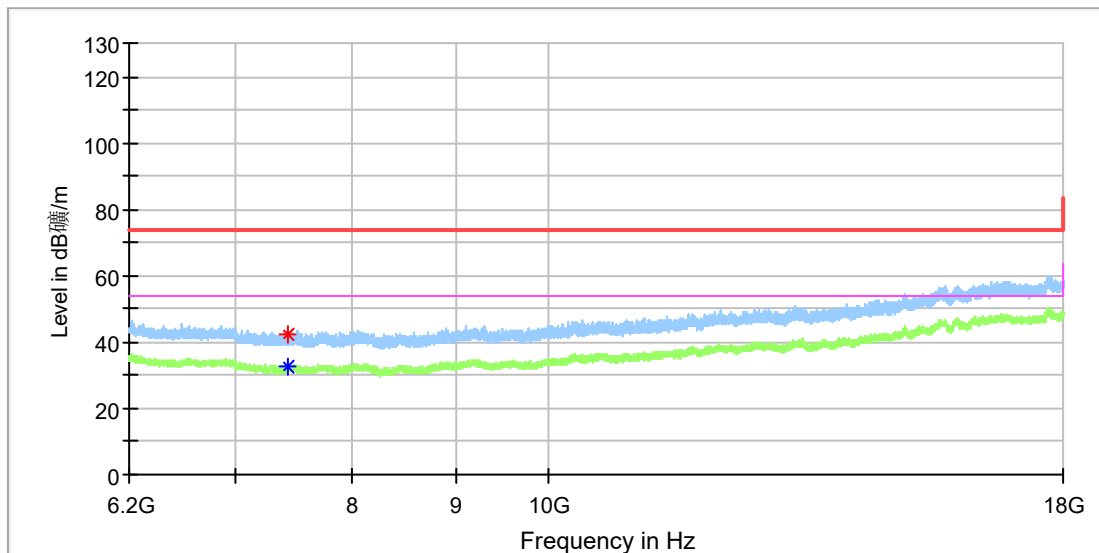


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7425.725000	42.61	---	74.00	31.39	100.0	H	73.0	8.4
7427.691667	---	32.74	54.00	21.26	100.0	H	209.0	8.4

EUT Information

EUT Name: DJI MIC Transmitter
Model: AST01
Test Mode: High channel (CH 37)
Test Voltage:: Battery
Remark: Temp 23 Humi:45%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

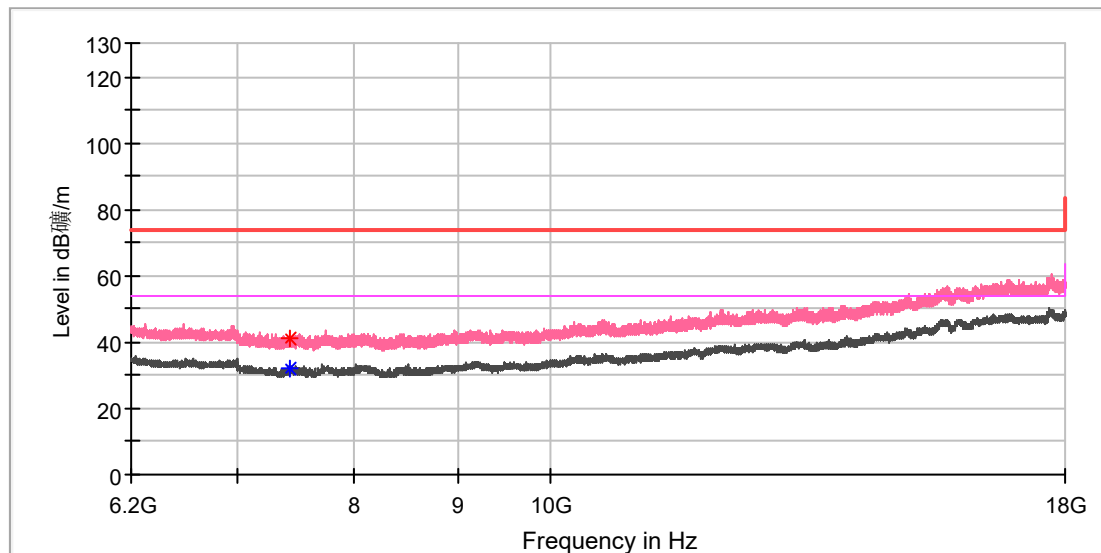


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7427.691667	---	31.87	54.00	22.13	100.0	V	108.0	8.4
7428.675000	41.18	---	74.00	32.82	100.0	V	232.0	8.4

Appendix B.6: Test Results of Radiated Emissions in Restricted Bands

EUT Information

EUT Name:	DJI MIC Transmitter
Model:	AST01
Test Mode:	Low channel
Test Voltage::	Battery
Remark:	Temp 23 Humi:45%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

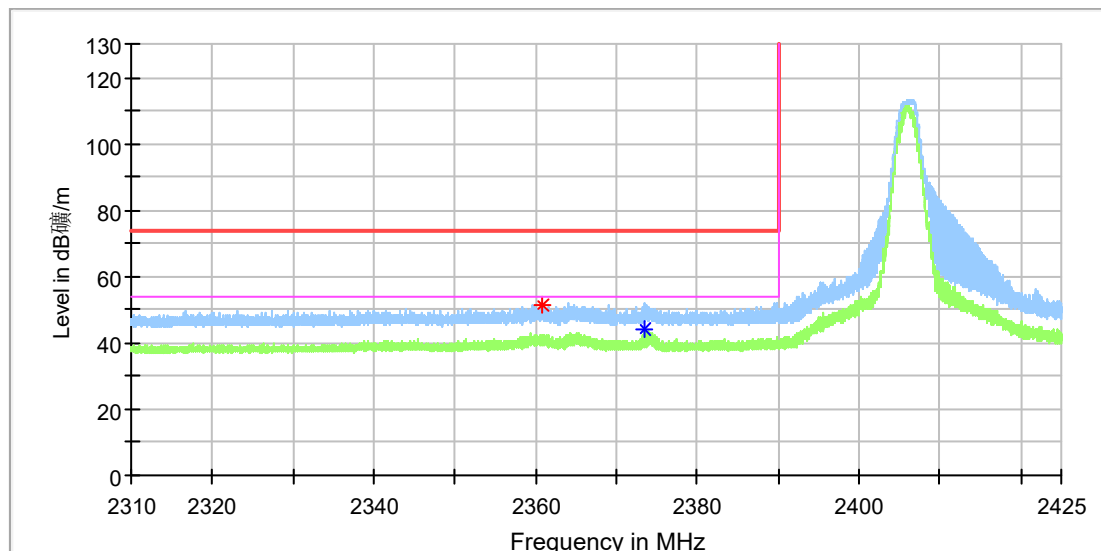


Critical_Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2360.801250	51.60	---	74.00	22.40	100.0	H	252.0	6.9
2373.468500	---	44.01	54.00	9.99	100.0	H	264.0	6.9

EUT Information

EUT Name: DJI MIC Transmitter
Model: AST01
Test Mode: Low channel
Test Voltage:: Battery
Remark: Temp 23 Humi:45%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

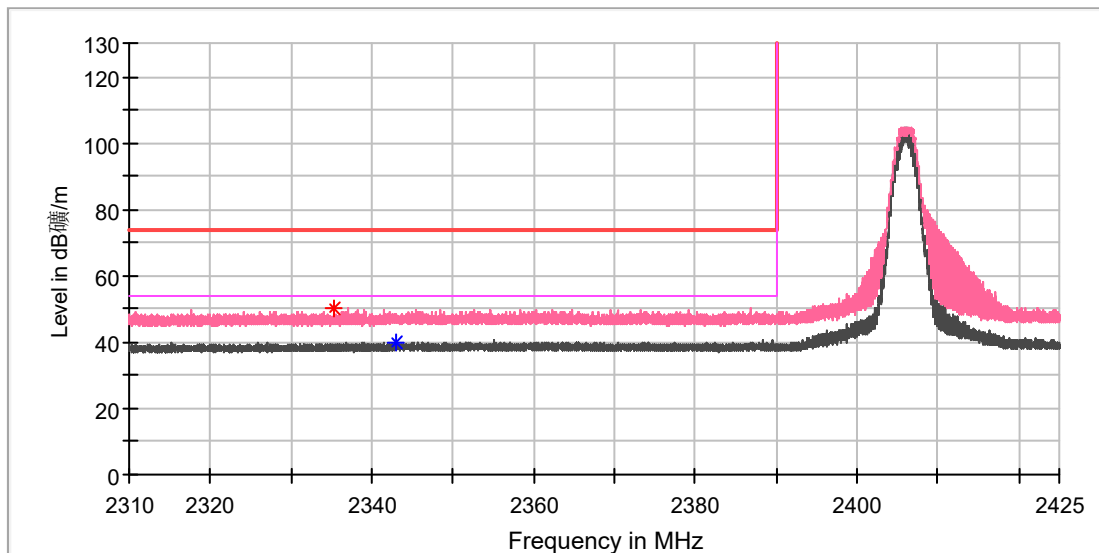


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2335.374750	50.34	---	74.00	23.66	100.0	V	132.0	6.8
2342.855500	---	40.14	54.00	13.86	100.0	V	142.0	6.8

EUT Information

EUT Name: DJI MIC Transmitter
Model: AST01
Test Mode: High channel (CH 36)
Test Voltage:: Battery
Remark: Temp 23 Humi:45%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

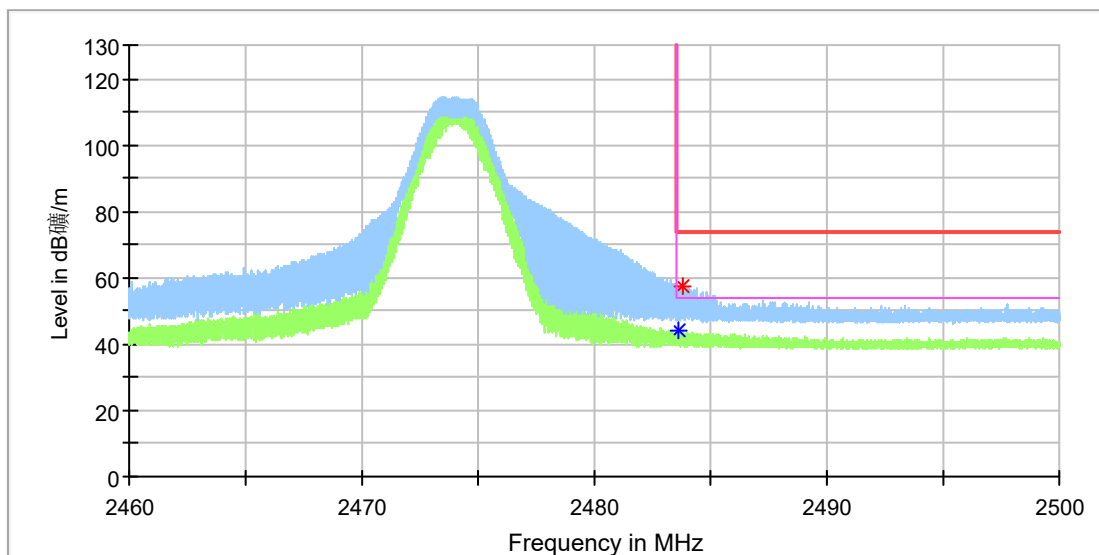


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2483.578000	---	44.07	54.00	9.93	100.0	H	267.0	7.4
2483.754000	57.55	---	74.00	16.45	100.0	H	257.0	7.4

EUT Information

EUT Name: DJI MIC Transmitter
Model: AST01
Test Mode: High channel (CH 36)
Test Voltage:: Battery
Remark: Temp 23 Humi:45%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

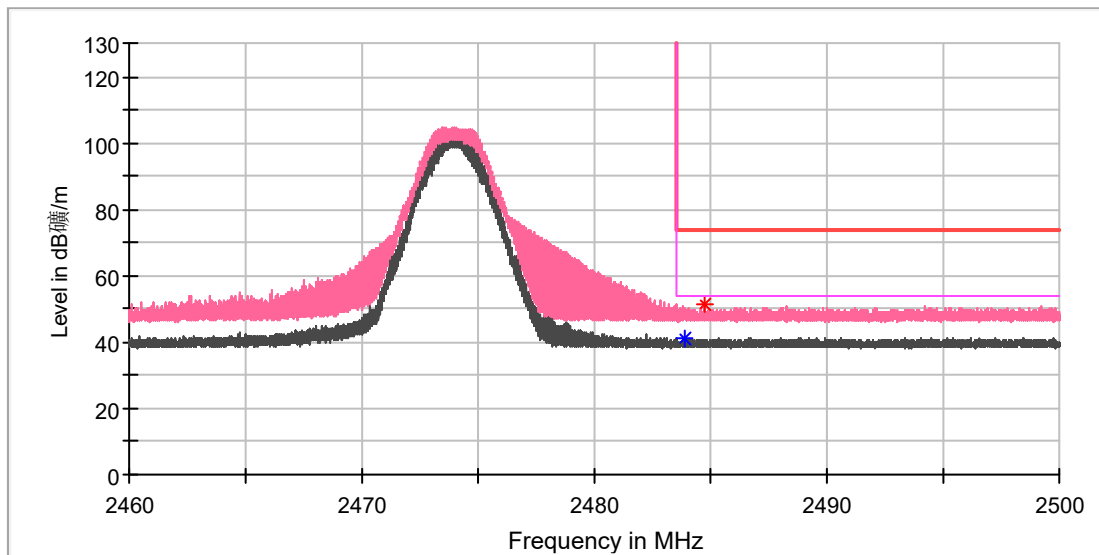


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2483.902000	---	41.02	54.00	12.98	100.0	V	153.0	7.4
2484.770000	51.44	---	74.00	22.56	100.0	V	140.0	7.4

EUT Information

EUT Name: DJI MIC Transmitter
Model: AST01
Test Mode: High channel (CH 37)
Test Voltage:: Battery
Remark: Temp 23 Humi:45%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

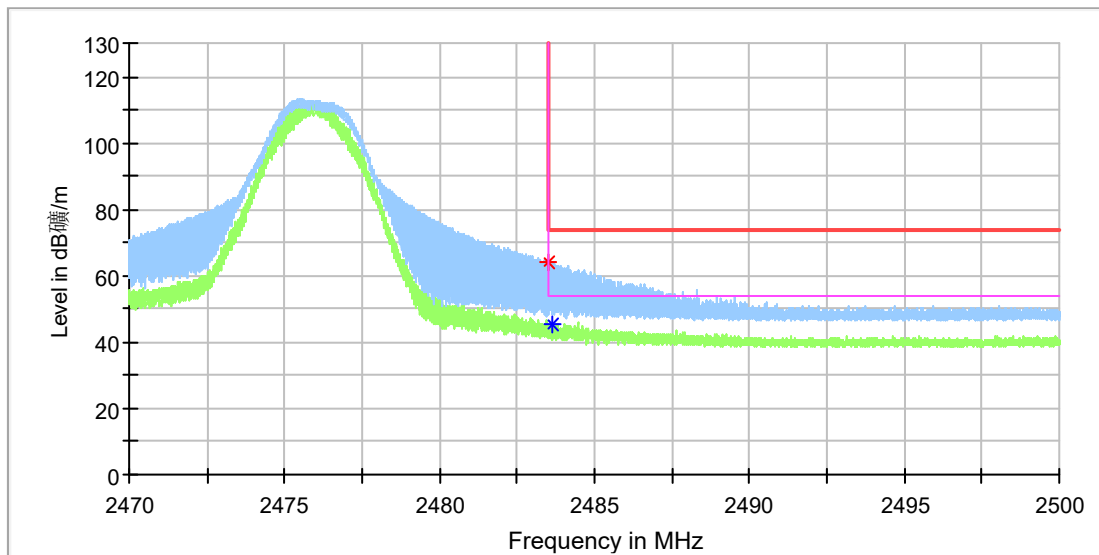


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2483.520000	63.94	---	74.00	10.06	100.0	H	252.0	7.4
2483.644000	---	45.59	54.00	8.41	100.0	H	272.0	7.4

EUT Information

EUT Name: DJI MIC Transmitter
Model: AST01
Test Mode: High channel (CH 37)
Test Voltage:: Battery
Remark: Temp 23 Humi:45%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

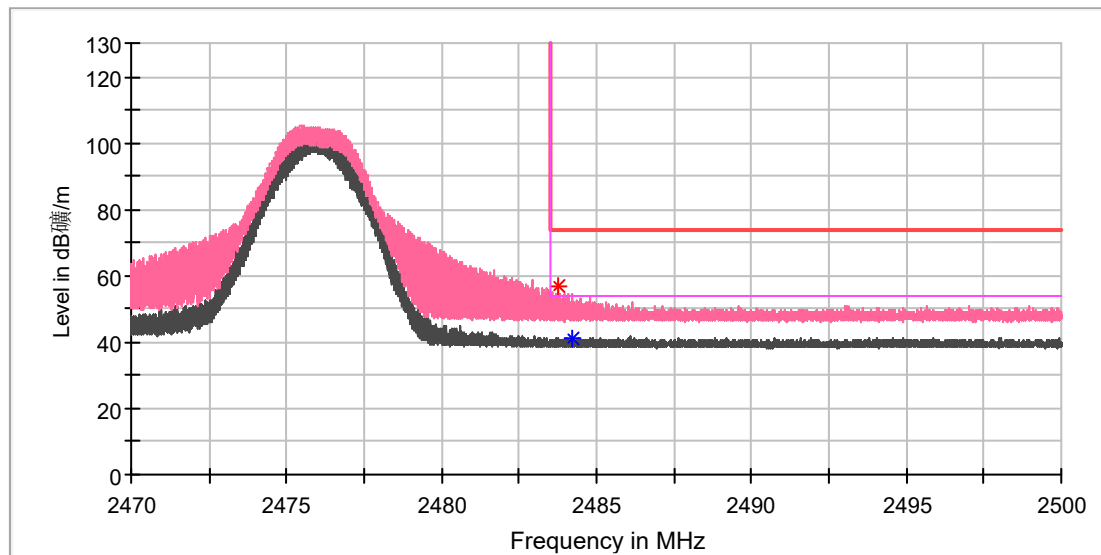

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2483.798000	56.79	---	74.00	17.21	100.0	V	207.0	7.4
2484.202000	---	41.30	54.00	12.70	100.0	V	207.0	7.4

Appendix B.7: Test Plots of Conducted Emission on AC Mains

Normal Operation with charging and input by Built-in Microphone

EUT Information

EUT Name:	DJI MIC Transmitter
Order No:	168328768
Model:	AST01
Test Mode:	Normal Operation with charging and input by Built-in Microphone
Test Voltage:	AC 120V/60Hz
Test By:	Shower Dai
Review By:	Gary Chen
Remark:	SR1

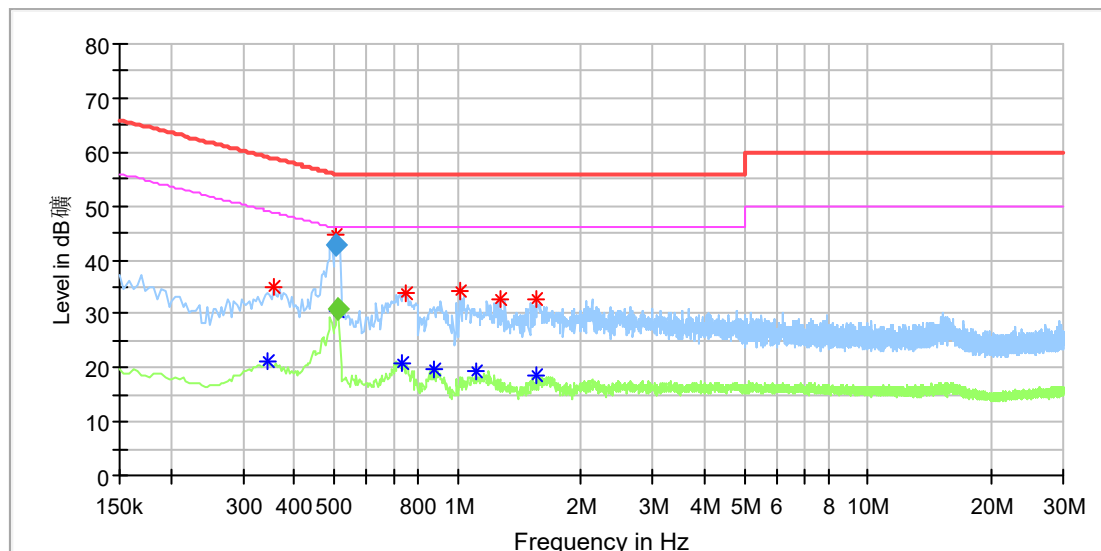

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Line	Corr. (dB)
0.346000	---	21.33	49.06	27.73	L1	9.7
0.358000	34.88	---	58.78	23.89	L1	9.7
0.508000	44.48	---	56.00	11.52	L1	9.7
0.512000	---	30.52	46.00	15.48	L1	9.7
0.736000	---	20.99	46.00	25.01	L1	9.7
0.748000	33.70	---	56.00	22.30	L1	9.7
0.880000	---	19.61	46.00	26.39	L1	9.7
1.012000	34.11	---	56.00	21.89	L1	9.7
1.108000	---	19.27	46.00	26.73	L1	9.7
1.268000	32.61	---	56.00	23.39	L1	9.7
1.552000	32.66	---	56.00	23.34	L1	9.8
1.564000	---	18.61	46.00	27.39	L1	9.8

Final_Result

Frequency (MHz)	QuasiPeak (dBμV)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.508000	42.86	---	56.00	13.14	1000.0	9.000	L1	9.7
0.512000	---	30.87	46.00	15.13	1000.0	9.000	L1	9.7

EUT Information

EUT Name: DJI MIC Transmitter
 Order No: 168328768
 Model: AST01
 Test Mode: Normal Operation with charging and input by Built-in Microphone
 Test Voltage: AC 120V/60Hz
 Test By: Shower Dai
 Review By: Gary Chen
 Remark: SR1

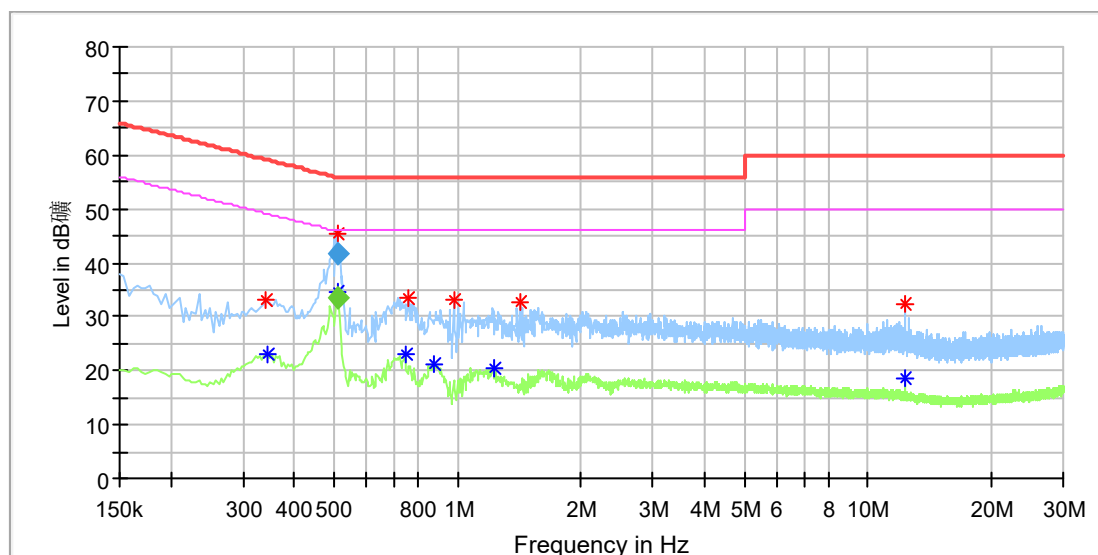

Critical_Freqs

Frequency (MHz)	MaxPeak (dBμV)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Line	Corr. (dB)
0.342000	33.11	---	59.16	26.05	N	9.7
0.346000	---	23.20	49.06	25.86	N	9.7
0.512000	---	34.78	46.00	11.22	N	9.7
0.512000	45.46	---	56.00	10.54	N	9.7
0.748000	---	23.15	46.00	22.85	N	9.7
0.760000	33.34	---	56.00	22.66	N	9.7
0.880000	---	21.35	46.00	24.65	N	9.7
0.980000	33.17	---	56.00	22.83	N	9.7
1.236000	---	20.46	46.00	25.54	N	9.7
1.416000	32.72	---	56.00	23.28	N	9.7
12.288000	---	18.64	50.00	31.36	N	10.2
12.288000	32.36	---	60.00	27.64	N	10.2

Final_Result

Frequency (MHz)	QuasiPeak (dBμV)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.512000	41.75	---	56.00	14.25	1000.0	9.000	N	9.7
0.512000	---	33.52	46.00	12.48	1000.0	9.000	N	9.7