












Report No.: AAEMT/RF/230604-01-03

#### Antenna 1:








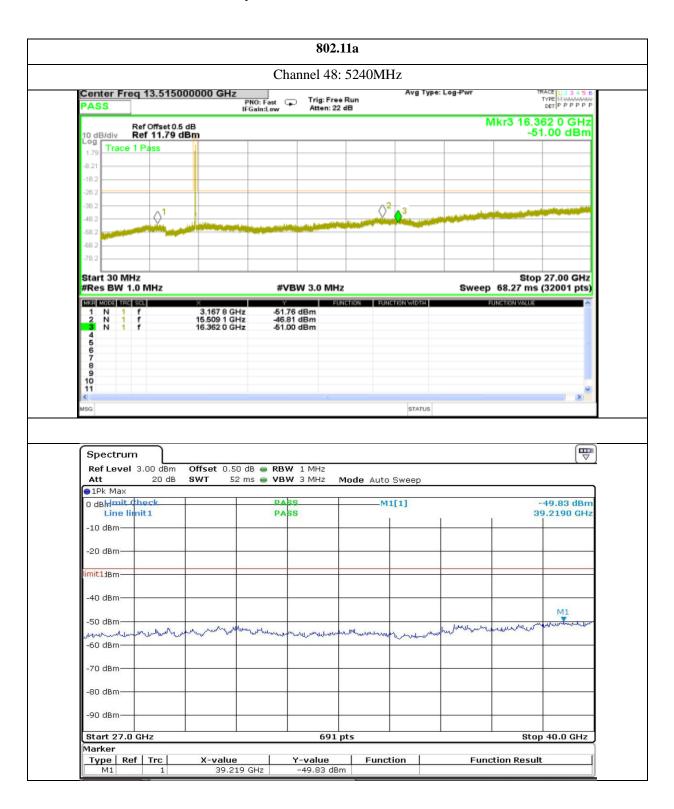





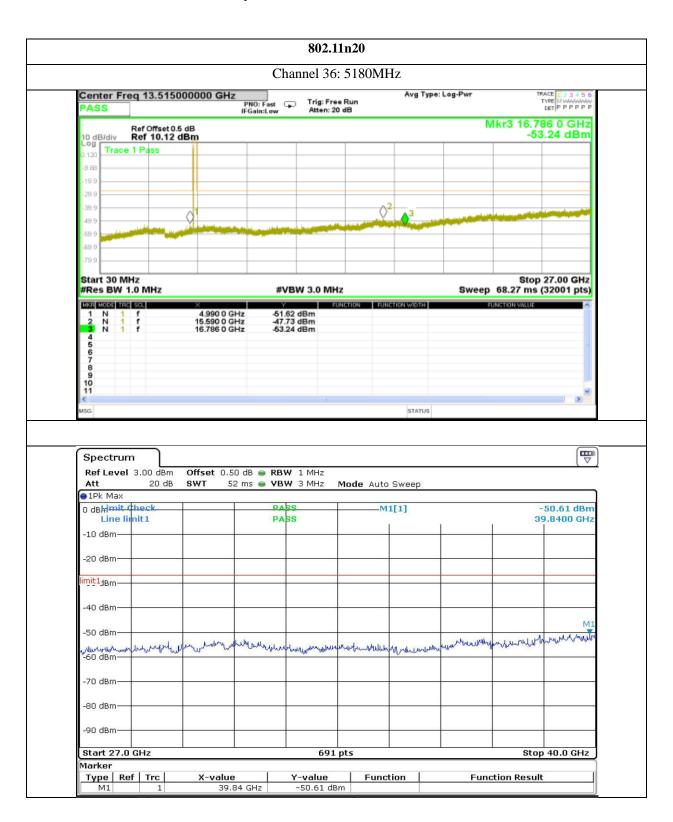


















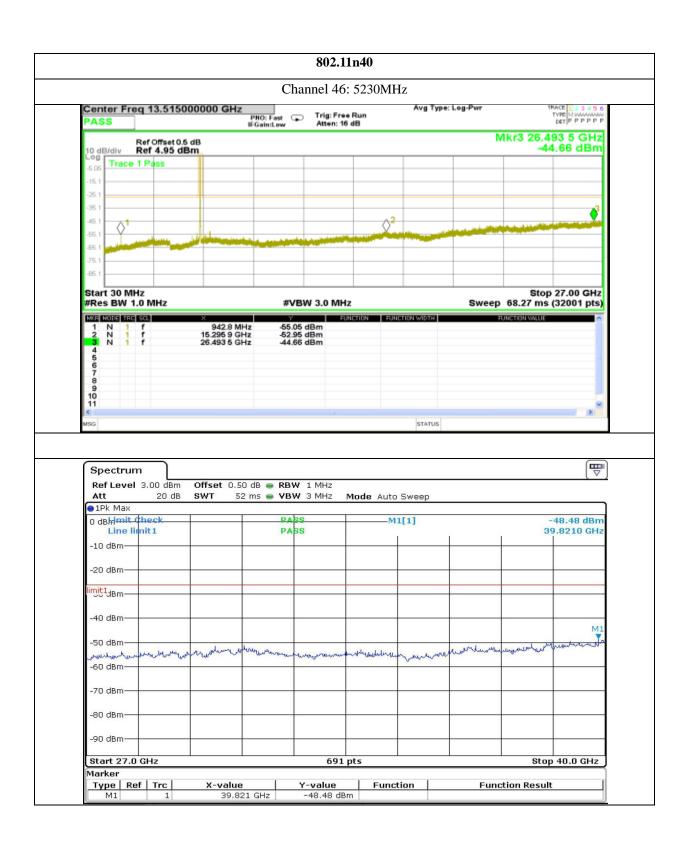












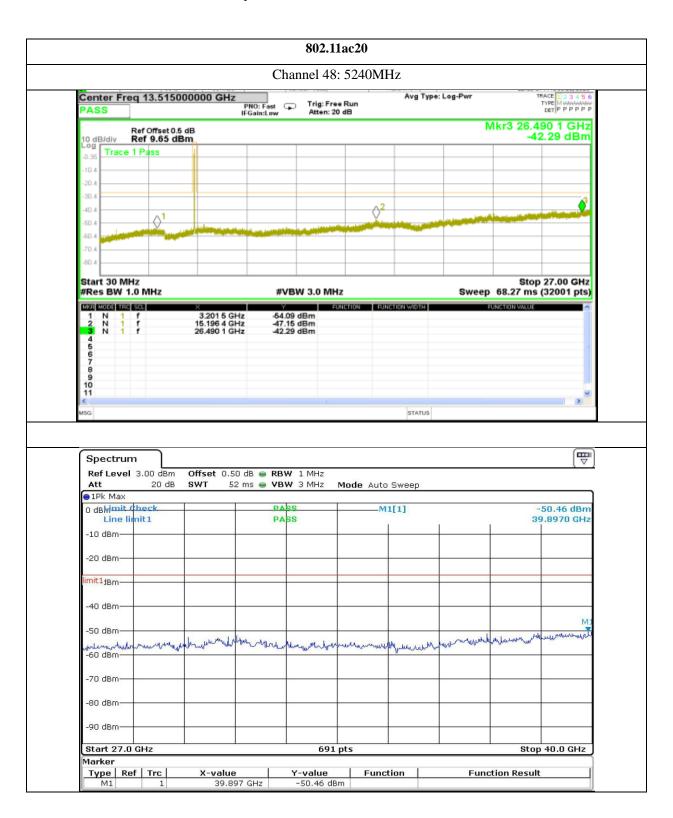












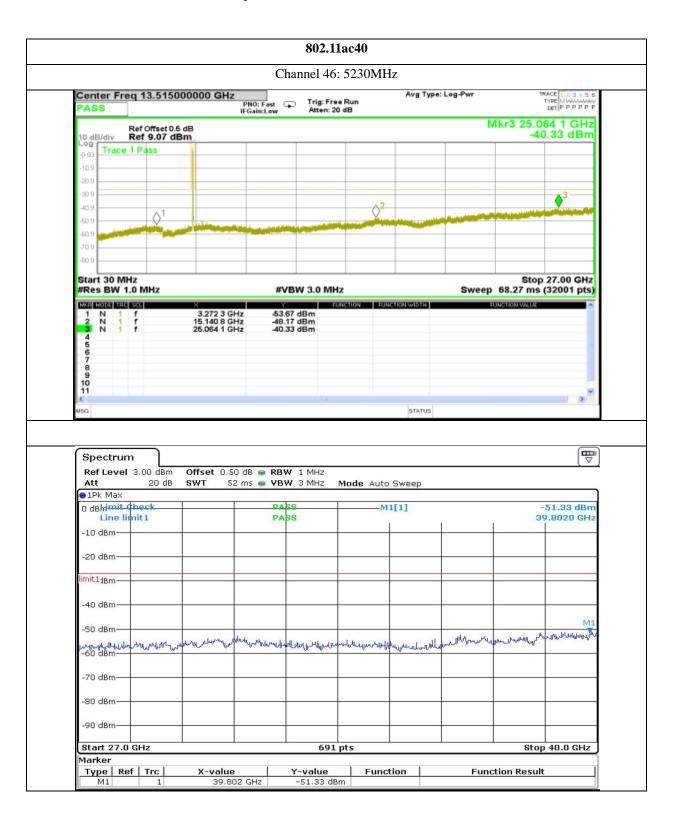



















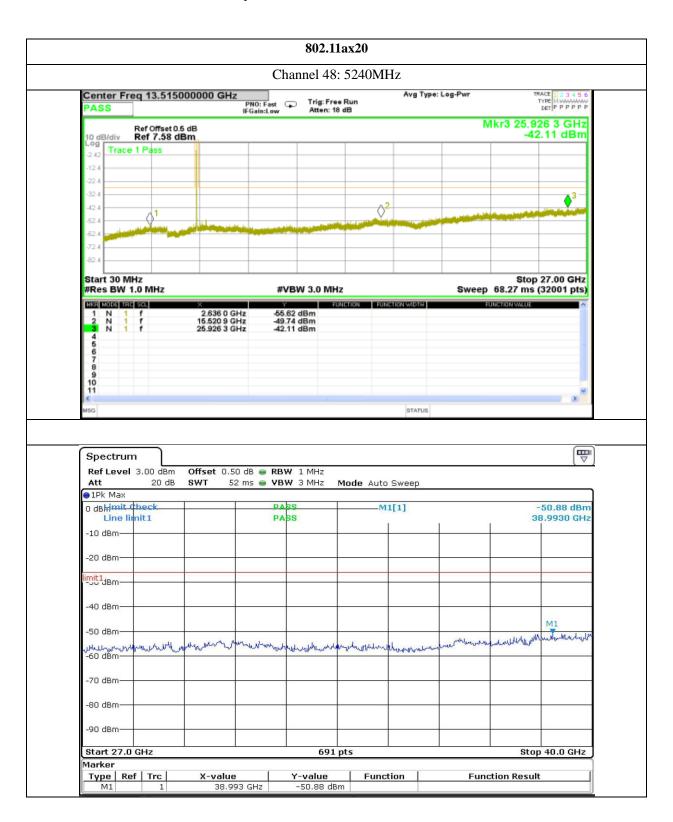






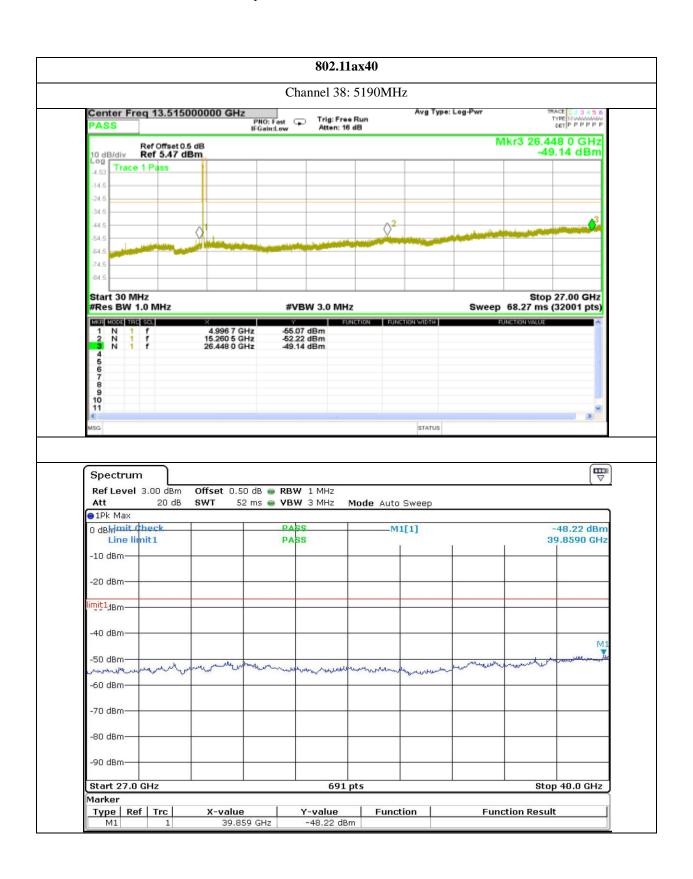





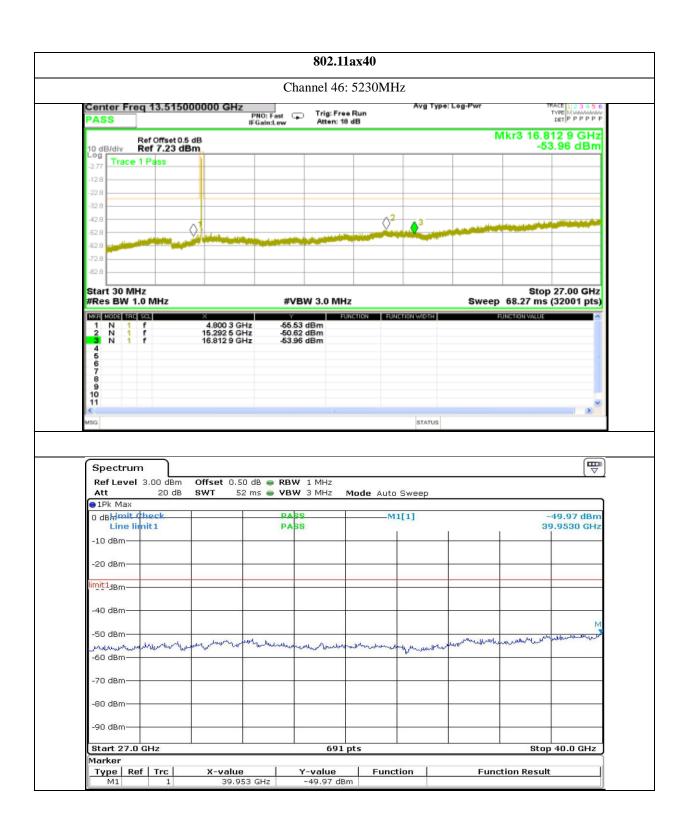



















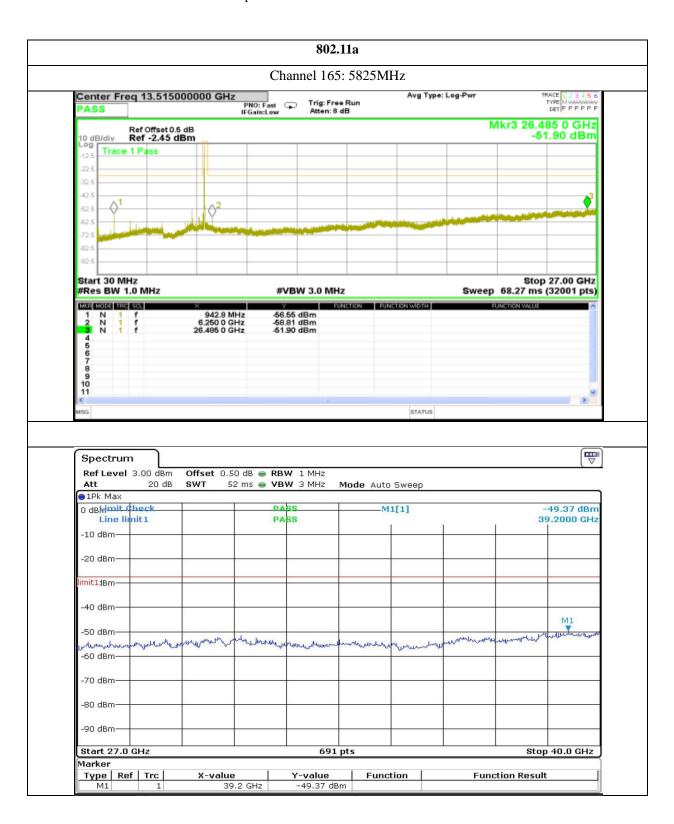






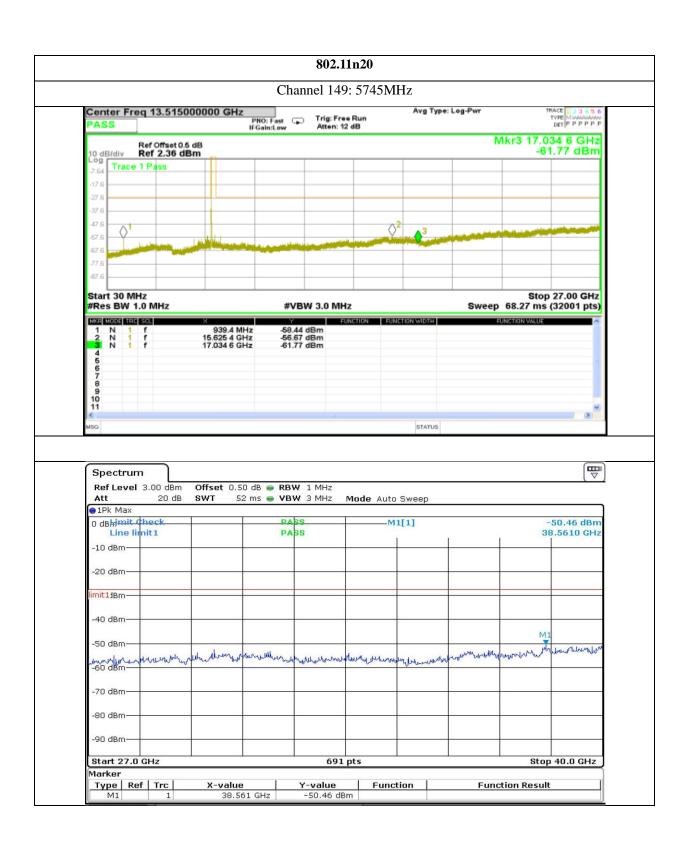






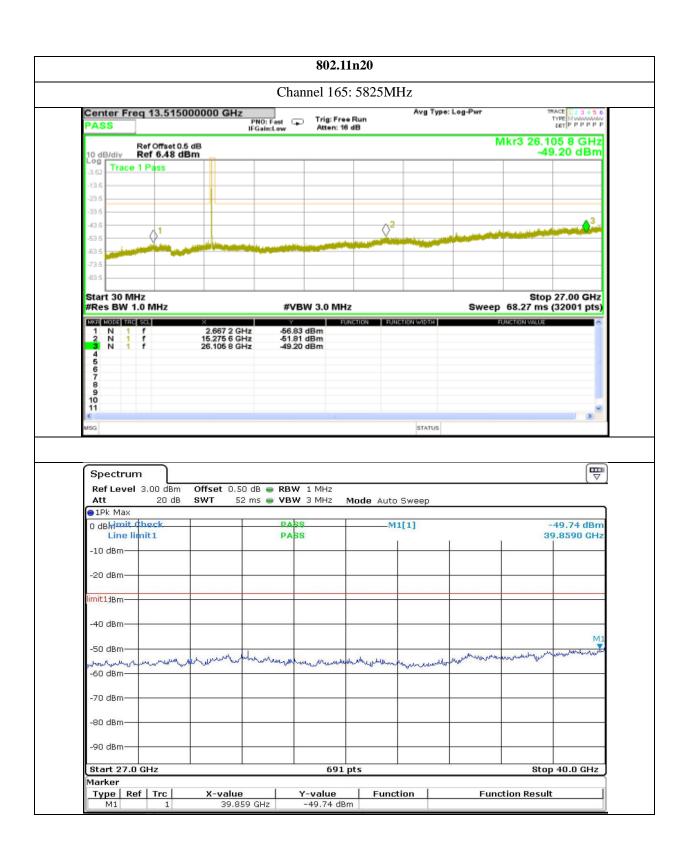






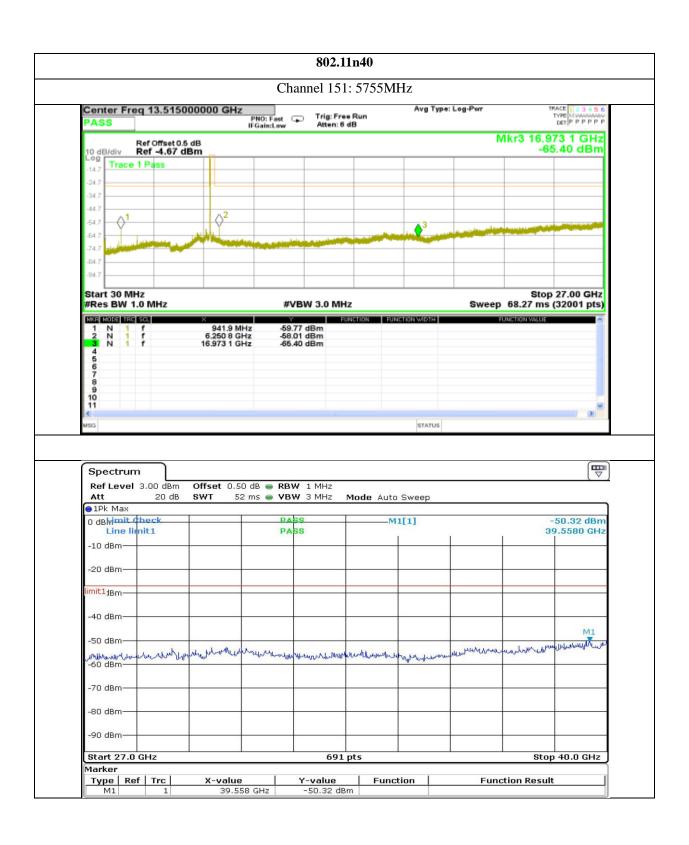






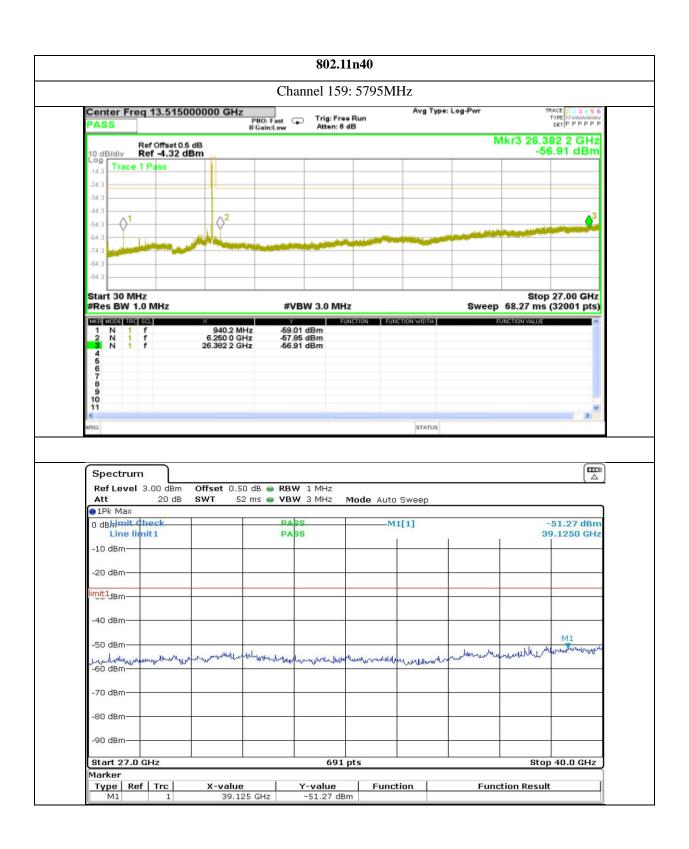






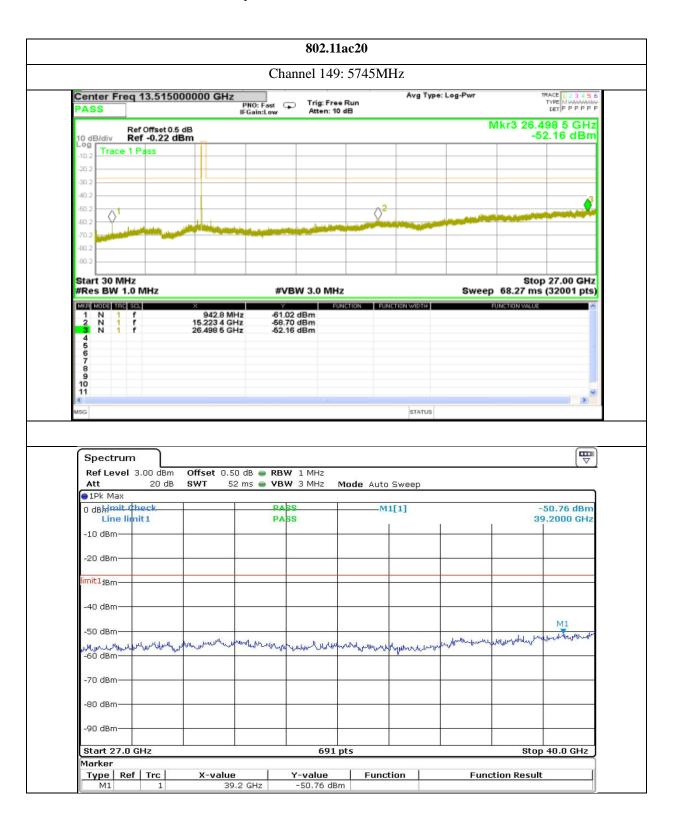





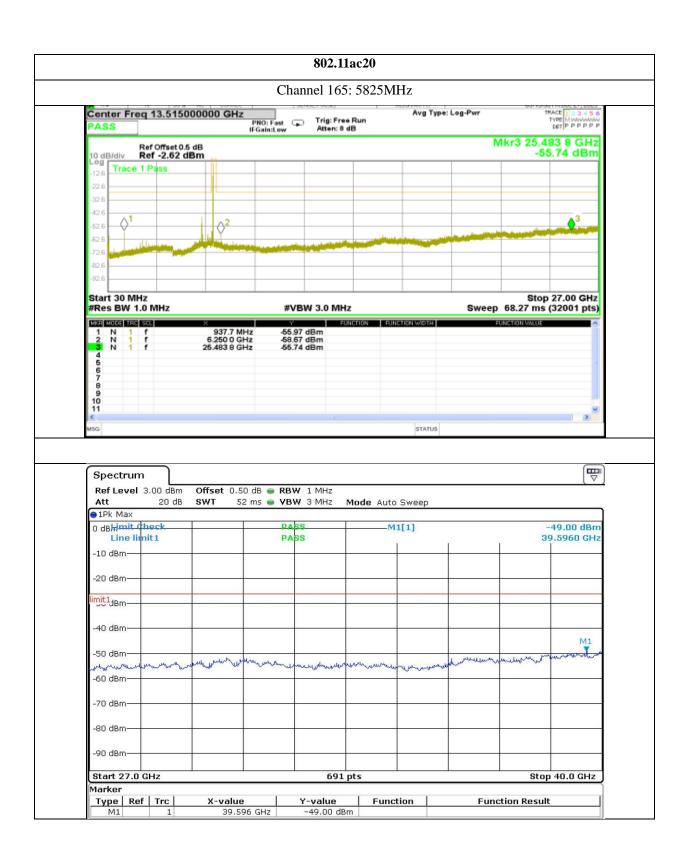












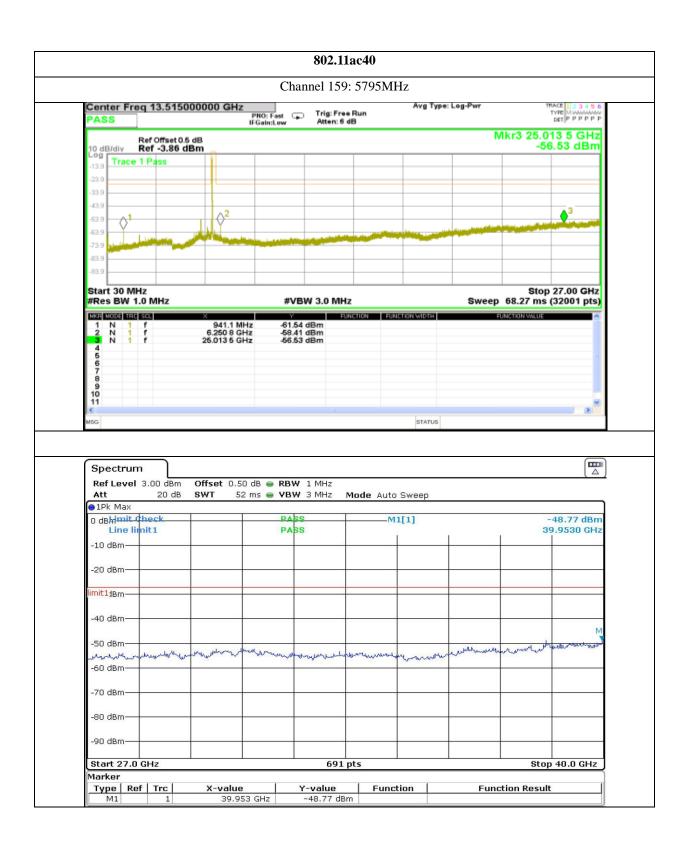












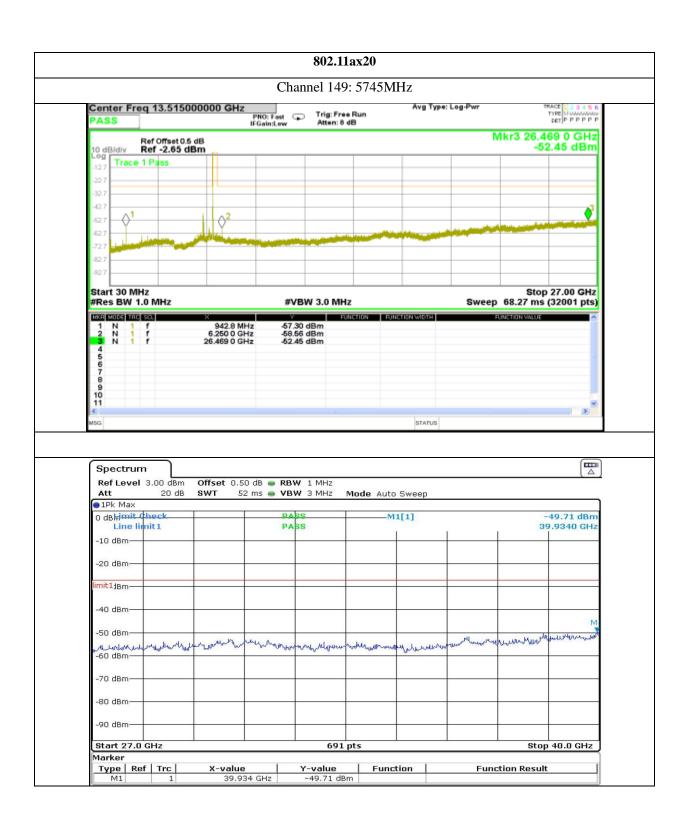



















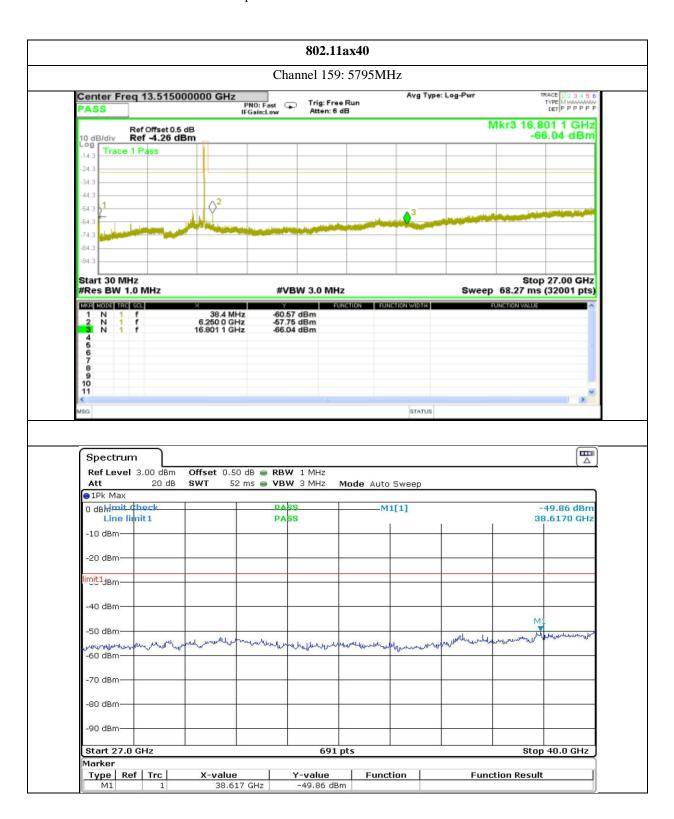





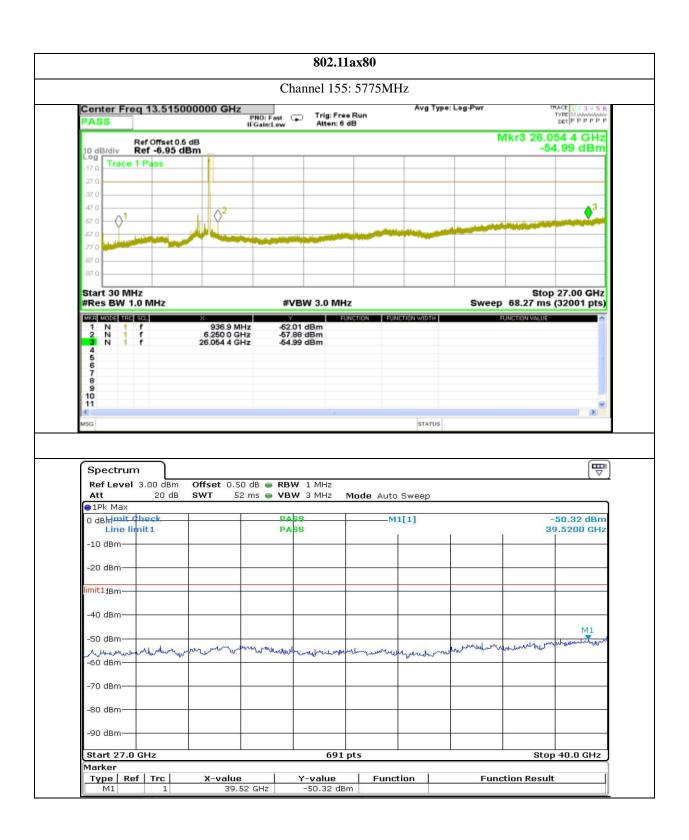





Report No.: AAEMT/RF/230604-01-03

### 11. ANTENNA REQUIREMENTS

#### 11.1. Limit

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

#### 11.2. EUT ANTENNA

The antennas used for this product are Dish type Antenna and that no antenna other than that furnished by the responsible party shall be used with the device, the maximum peak gain of the transmit antenna is 27 dBi. and the antenna connector is designed with permanent attachment and no consideration of replacement. Therefore the EUT is considered sufficient to comply with the provision.

\*\*End of Report\*\*