

FCC 47 CFR PART 22H and 24E**RF Test Report**

Product Type : Module
Applicant : Sierra Wireless Inc.
Address : 13811 Wireless Way Richmond, British Columbia V6V 3A4
Trade Name : Airprime
Model Number : AR7552
Test Specification : FCC 47 CFR PART 22H: Oct, 2014
FCC 47 CFR PART 24E: Oct, 2014
CANADA RSS-132 ISSUE 3: Jan. 2013
CANADA RSS-133 ISSUE 6: Jan. 2013
Canada RSS-Gen ISSUE 4: Nov., 2014
ANSI/TIA/EIA-603-C
Application Purpose : Original
Receive Date : Apr. 29, 2015
Test Period : Apr. 29 ~ May 05, 2015
Issue Date : May 27, 2015

Issue by

A Test Lab Techno Corp.
No. 140-1, Changan Street, Bade City,
Taoyuan County 334, Taiwan R.O.C.
Tel : +886-3-2710188 / Fax : +886-3-2710190



Taiwan Accreditation Foundation accreditation number: 1330

Note: This report shall not be reproduced except in full, without the written approval of A Test Lab Techno Corp. This document may be altered or revised by A Test Lab Techno Corp. personnel only, and shall be noted in the revision section of the document. The client should not use it to claim product endorsement by TAF, or any government agencies. The test results in the report only apply to the tested sample.

Revision History

Rev.	Issue Date	Revisions	Revised By
00	May 08, 2015	Initial Issue	
01	May 14, 2015	Revised report information.	Peggy Chang
02	May 18, 2015	Revised report information.	Snow Wang
03	May 25, 2015	Revised report information.	Peggy Chang
04	May 27, 2015	Revised report information.	Peggy Chang

Verification of Compliance

Issued Date: 05/27/2015

Product Type : Module

Applicant : Sierra Wireless Inc.

Address : 13811 Wireless Way Richmond, British Columbia V6V 3A4

Trade Name : Airprime

Model Number : AR7552

EUT Rated Voltage : DC 3.4V / 3.7V / 4.2V

Test Voltage : DC 3.7V

Applicable Standard : FCC 47 CFR PART 22H: Oct, 2014
FCC 47 CFR PART 24E: Oct, 2014
CANADA RSS-132 ISSUE 3: Jan. 2013
CANADA RSS-133 ISSUE 6: Jan. 2013
Canada RSS-Gen ISSUE 4: Nov., 2014
ANSI/TIA/EIA-603-C

Application Purpose : Original

Test Result : Complied

Performing Lab. : A Test Lab Techno Corp.
No. 140-1, Changan Street, Bade City,
Taoyuan County 334, Taiwan R.O.C.
Tel : +886-3-2710188 / Fax : +886-3-2710190
Taiwan Accreditation Foundation accreditation number: 1330
<http://www.atl-lab.com.tw/e-index.htm>



The above equipment was tested by A Test Lab Techno Corp. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI/TIA/EIA-603-C and the energy emitted by the sample tested as described in this report is in compliance with the requirements of FCC Rules Part 22H, Part 24E.

The test results of this report relate only to the tested sample identified in this report.

Approved By : Fly Lu Reviewed By : Eric Ou Yang
(Manager) (Fly Lu) (Testing Engineer) (Eric Ou Yang)

TABLE OF CONTENTS

1	General Information	6
1.1.	EUT Description	6
1.2.	Mode of Operation.....	7
1.3.	EUT Exercise Software	7
1.4.	Configuration of Test System Details	7
1.5.	Test Site Environment	8
1.6.	Summary of Test Result	8
2	RF Output Power Test	9
2.1.	Limit	9
2.2.	Test Instruments	9
2.3.	Test Setup.....	9
2.4.	Test Procedure	9
2.5.	Uncertainty	9
2.6.	Test Result.....	10
3	Effective Radiated Power / Equivalent Isotropic Radiated Power Test.....	12
3.1.	Limit	12
3.2.	Test Instruments	12
3.3.	Test Setup.....	12
3.4.	Test Procedure	12
3.5.	Uncertainty	12
3.6.	Test Result.....	13
4	Peak to Average Ratio Test.....	14
4.1.	Limit	14
4.2.	Test Instruments	14
4.3.	Setup	14
4.4.	Test Procedure	14
4.5.	Uncertainty	15
4.6.	Test Result.....	15
4.7.	Test Graphs	16
5	Emission Bandwidth & Occupied Bandwidth Test.....	17
5.1.	Limit	17
5.2.	Test Instruments	17
5.3.	Setup	17
5.4.	Test Procedure	18
5.5.	Uncertainty	18
5.6.	Test Result.....	18
5.7.	Test Graphs	19

6	Band Edge Test	21
6.1.	Limit	21
6.2.	Test Instruments	21
6.3.	Setup	21
6.4.	Test Procedure	22
6.5.	Uncertainty	22
6.6.	Test Result.....	22
6.7.	Test Graphs	23
7	Conducted Spurious Emission and Radiation Emission Test	25
7.1.	Limit	25
7.2.	Test Instruments	25
7.3.	Setup	25
7.4.	Test Procedure	26
7.5.	Uncertainty	26
7.6.	Test Result.....	26
8	Field Strength of Spurious Radiation Test	61
8.1.	Limit	61
8.2.	Test Instruments	61
8.3.	Setup	62
8.4.	Test Procedure	63
8.5.	Uncertainty	63
8.6.	Test Result.....	64
9	Frequency Stability (Temperature & Voltage Variation) Test	70
9.1.	Limit	70
9.2.	Test Instruments	70
9.3.	Setup	70
9.4.	Test Procedure	71
9.5.	Uncertainty	71
9.6.	Test Result.....	72

1 General Information

1.1. EUT Description

Applicant		Sierra Wireless Inc.			
Applicant Address		13811 Wireless Way Richmond, British Columbia V6V 3A4			
Manufacturer		Sierra Wireless Inc.			
Manufacturer Address		13811 Wireless Way Richmond, British Columbia V6V 3A4			
Product Type		Module			
Trade Name		Airprime			
Model Number		AR7552			
IMEI No.		IMEI 1:352767050012507, IMEI 2:352767050012515			
FCC ID		N7NAR7552			
IC		2417C-AR7552			
Mode	WCDMA (RMC12.2K)/ HSDPA/ HSUPA/	Band	UL Frequency (MHz)	DL Frequency (MHz)	Modulation
		II	1852.4 ~ 1907.6	1932.4 ~ 1987.6	QPSK
		V	826.4 ~ 846.6	871.4 ~ 891.6	QPSK
Channel Control		Auto			
Antenna Gain (dBi)		WCDMA/ HSDPA/ HSUPA Band II : 5 dBi WCDMA/ HSDPA/ HSUPA Band V : 5 dBi			
Max. RF Output power		WCDMA/ HSDPA/ HSUPA Band II : 26.81 dBm / 0.480 W WCDMA/ HSDPA/ HSUPA Band V : 26.83 dBm / 0.482 W			
Max. ERP/EIRP		WCDMA Band II : 31.81 dBm / 1.52 W WCDMA Band V : 29.68 dBm / 0.93 W			

1.2. Mode of Operation

ATL has verified the construction and function in typical operation. All the test modes were carried out with the EUT in normal operation, which was shown in this test report and defined as:


Test Mode
Mode 1: WCDMA Band II Link Mode
Mode 2: WCDMA Band V Link Mode

Note: Regards to the frequency band operation: the lowest, middle and highest frequency of channel were selected to perform the test, then shown on this report.

1.3. EUT Exercise Software

1	Setup the EUT and Base Station (CMU200) as shown on 1.4.
2	Turn on the power of all equipment.

1.4. Configuration of Test System Details

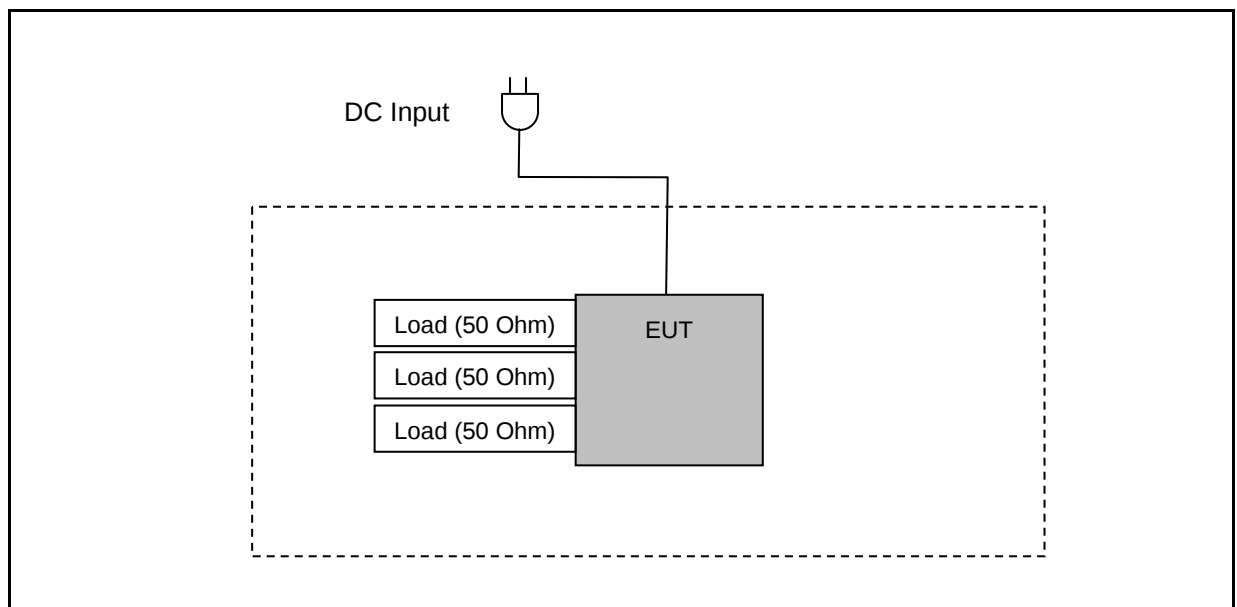

1.5. Test Site Environment

Items	Required (IEC 60068-1)	Actual
Temperature (°C)	15-35	26
Humidity (%RH)	25-75	60
Barometric pressure (mbar)	860-1060	950

1.6. Summary of Test Result

Description	FCC Rule	IC Rule	Limit	Result
Conducted Output Power	§2.1046	N/A	N/A	Pass
Effective Radiated Power	§22.913(a)(2)	N/A	< 7 Watts for FCC	Pass
Equivalent Isotropic Radiated Power	§24.232(c)	RSS-132(5.4) RSS-133 (6.4) SRSP-503(5.1.3) SRSP-510(5.1.3)	≤ 11.5 Watts	Pass
Peak to average ratio	§24.232(d)	RSS-132 (5.4) RSS-133 (6.4)	< 13 dB	Pass
Emission Bandwidth & Occupied Bandwidth	§2.1049 §22.917(a) §24.238(a)	RSS-Gen (6.6)	N/A	Pass
Band Edge Measurement	§2.1051 §22.917(a) §24.238(a)	RSS-132 (5.5) RSS-133 (6.5.1)	< 43+10log ₁₀ (P[Watts])	Pass
Conducted Spurious Emission	§2.1051 §22.917(a) §24.238(a)	RSS-132 (5.5) RSS-133 (6.5.1)	< 43+10log ₁₀ (P[Watts])	Pass
Field Strength of Spurious Radiation	§2.1053 §22.917(a) §24.238(a)	RSS-132 (5.5) RSS-133 (6.5.1) RSS-Gen (6.13)	< 43+10log ₁₀ (P[Watts])	Pass
Frequency Stability for Temperature & Voltage	§2.1055 §22.355 §24.235	RSS-132(5.3) RSS-133(6.3)	< 2.5 ppm	Pass

2 RF Output Power Test

2.1. Limit

N/A


2.2. Test Instruments

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
Universal Radio Communication Tester	R & S	CMU200	109369	08/11/2014	(2)
Single Channel PK Power Sensor	Agilent	N1911A	MY45101619	12/15/2014	(1)
Wideband Power Meter	Agilent	N1921A	MY45241957	12/15/2014	(1)
Test Site	ATL	TE05	TE05	N.C.R.	-----

Remark: ⁽¹⁾ Calibration period 1 year. ⁽²⁾ Calibration period 2 years.

Note: N.C.R. = No Calibration Request.

2.3. Test Setup

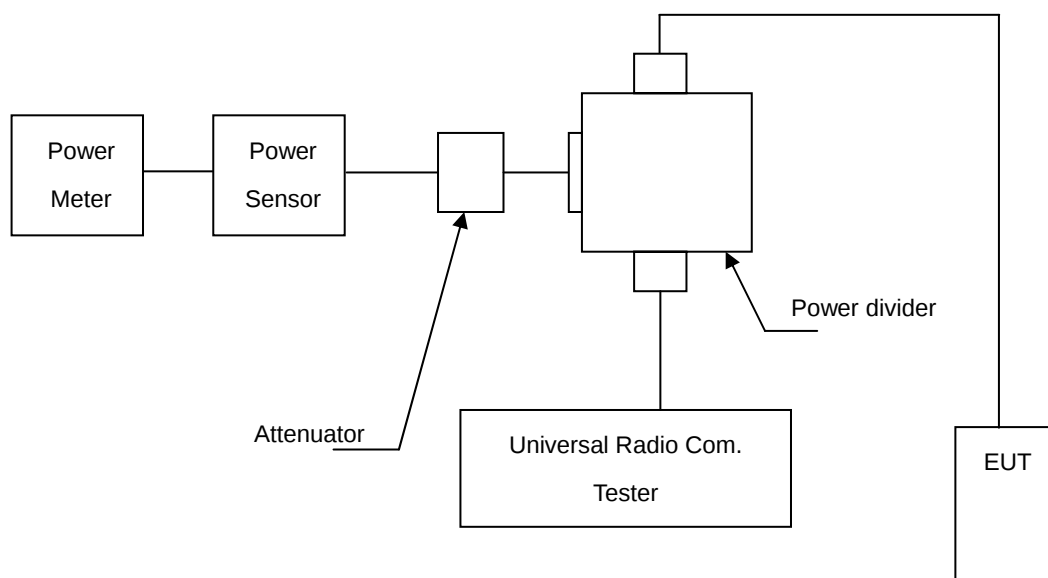

2.4. Test Procedure

The measurement is made according to as follows:

1. The transmitter output was connected to power meter and base station through Power Divider.
2. Set base station for EUT at GSM 850: PCL=5 and PCS 1900: PCL=0.
3. Set base station for EUT at WCDMA Band V and WCDMA Band II, power level was set to maximum.
4. Select lowest, middle, and highest channels for each band.

2.5. Uncertainty

The measurement uncertainty is defined as for RF output power measurement is 1.2 dB.

2.6. Test Result

Model Number	AR7552						
Test Item	RF Output Power						
Date of Test	04/29/2015			Test Site		TE05	
Bands	Modulation Type	Sub-Test	Frequency (MHz)	Burst Average Power		Peak Power	
				(dBm)	(W)	(dBm)	(W)
WCDMA Band II	QPSK	-----	1852.4	23.47	0.222	26.81	0.480
			1880.0	23.24	0.211	26.54	0.451
			1907.6	23.19	0.208	26.47	0.444
HSDPA Band II	QPSK	1	1852.4	22.63	0.183	25.97	0.395
			1880.0	22.37	0.173	25.67	0.369
			1907.6	22.31	0.170	25.59	0.362
		2	1852.4	22.55	0.180	25.89	0.388
			1880.0	22.25	0.168	25.55	0.359
			1907.6	22.17	0.165	25.45	0.351
		3	1852.4	22.12	0.163	25.46	0.352
			1880.0	21.84	0.153	25.14	0.327
			1907.6	21.76	0.150	25.04	0.319
		4	1852.4	22.08	0.161	25.42	0.348
			1880.0	21.79	0.151	25.09	0.323
			1907.6	21.72	0.149	25.00	0.316
HSUPA Band II	QPSK	1	1852.4	22.10	0.162	25.44	0.350
			1880.0	21.81	0.152	25.11	0.324
			1907.6	21.73	0.149	25.01	0.317
		2	1852.4	20.08	0.102	23.42	0.220
			1880.0	19.77	0.095	23.07	0.203
			1907.6	19.67	0.093	22.95	0.197
		3	1852.4	21.06	0.128	24.40	0.275
			1880.0	20.75	0.119	24.05	0.254
			1907.6	20.66	0.116	23.94	0.248
		4	1852.4	20.04	0.101	23.38	0.218
			1880.0	19.72	0.094	23.02	0.200
			1907.6	19.62	0.092	22.90	0.195
		5	1852.4	21.96	0.157	25.30	0.339
			1880.0	21.64	0.146	24.94	0.312
			1907.6	21.54	0.143	24.82	0.303

Note: The peak power testing result was used peak detector.

Model Number	AR7552						
Test Item	RF Output Power						
Date of Test	04/29/2015			Test Site		TE05	
Bands	Modulation Type	Sub-Test	Frequency (MHz)	Burst Average Power		Peak Power	
				(dBm)	(W)	(dBm)	(W)
WCDMA Band V	QPSK	-----	826.4	23.44	0.221	26.83	0.482
			836.6	23.31	0.214	26.58	0.455
			846.6	23.25	0.211	26.49	0.446
HSDPA Band V	QPSK	1	826.4	22.59	0.182	25.98	0.396
			836.6	22.43	0.175	25.70	0.372
			846.6	22.36	0.172	25.60	0.363
		2	826.4	22.47	0.177	25.86	0.385
			836.6	22.29	0.169	25.56	0.360
			846.6	22.21	0.166	25.45	0.351
		3	826.4	22.06	0.161	25.45	0.351
			836.6	21.88	0.154	25.15	0.327
			846.6	21.80	0.151	25.04	0.319
		4	826.4	22.03	0.160	25.42	0.348
			836.6	21.84	0.153	25.11	0.324
			846.6	21.75	0.150	24.99	0.316
HSUPA Band V	QPSK	1	826.4	22.06	0.161	25.45	0.351
			836.6	21.86	0.153	25.13	0.326
			846.6	21.77	0.150	25.01	0.317
		2	826.4	20.03	0.101	23.42	0.220
			836.6	19.81	0.096	23.08	0.203
			846.6	19.70	0.093	22.94	0.197
		3	826.4	21.00	0.126	24.39	0.275
			836.6	20.78	0.120	24.05	0.254
			846.6	20.66	0.116	23.90	0.245
		4	826.4	20.00	0.100	23.39	0.218
			836.6	19.77	0.095	23.04	0.201
			846.6	19.66	0.092	22.90	0.195
		5	826.4	21.99	0.158	25.38	0.345
			836.6	21.77	0.150	25.04	0.319
			846.6	21.65	0.146	24.89	0.308

Note: The peak power testing result was used peak detector.

3 Effective Radiated Power / Equivalent Isotropic Radiated Power Test

3.1. Limit

For FCC Part 22.913(a)(2): The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 Watts.

For FCC Part 24.232(b): The EIRP of mobile transmitters and auxiliary test transmitters must not exceed 2 Watts.


3.2. Test Instruments

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
Universal Radio Communication Tester	R & S	CMU200	109369	08/11/2014	(2)
Single Channel PK Power Sensor	Agilent	N1911A	MY45101619	12/15/2014	(1)
Wideband Power Meter	Agilent	N1921A	MY45241957	12/15/2014	(1)
Test Site	ATL	TE05	TE05	N.C.R.	-----

Remark: ⁽¹⁾ Calibration period 1 year. ⁽²⁾ Calibration period 2 years.

Note: N.C.R. = No Calibration Request.

3.3. Test Setup

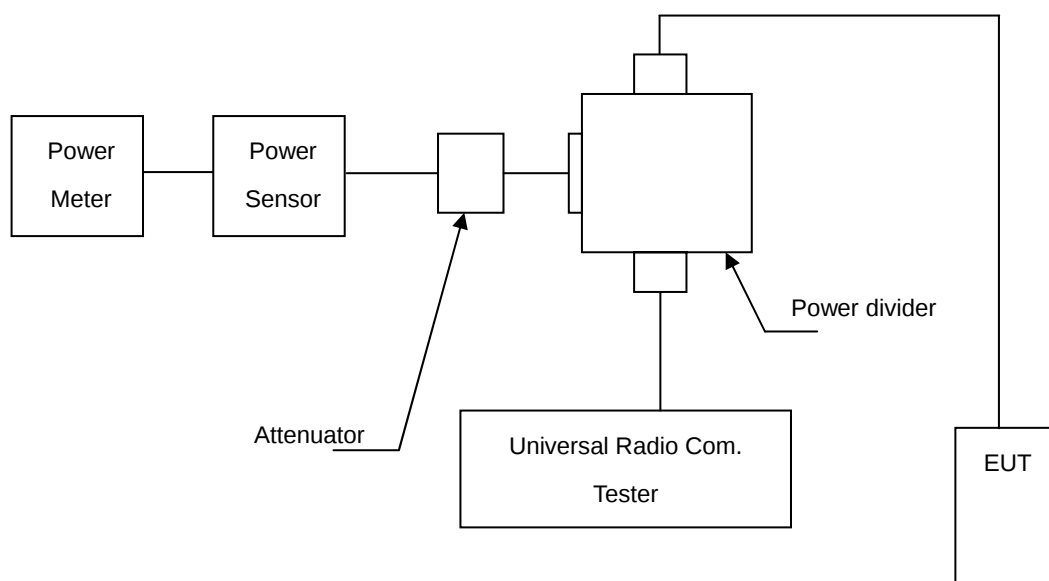

3.4. Test Procedure

The measurement is made according to as follows:

1. The transmitter output was connected to power meter and base station through Power Divider.
2. Set base station for EUT at GSM 850: PCL=5 and PCS 1900: PCL=0.
3. Set base station for EUT at WCDMA Band V and WCDMA Band II, power level was set to maximum.
4. Select lowest, middle, and highest channels for each band.

3.5. Uncertainty

The measurement uncertainty is defined as for RF output power measurement is 1.2 dB.

3.6. Test Result

Model Number	AR7552						
Test Item	ERP/EIRP						
Date of Test	05/05/2015				Test Site	TE01	
Bands	Modulation Type	Frequency (MHz)	Peak Conducted power (dBm)	Antenna Gain (dBi)	EIRP		Limit
					(dBm)	(W)	
WCDMA Band II	QPSK	1852.4	26.81	5	31.81	1.52	< 2W
		1880.0	26.54	5	31.54	1.43	< 2W
		1907.6	26.47	5	31.47	1.40	< 2W

Model Number	AR7552						
Test Item	ERP/EIRP						
Date of Test	05/05/2015				Test Site	TE01	
Bands	Modulation Type	Frequency (MHz)	Peak Conducted power (dBm)	Antenna Gain (dBi)	ERP		Limit
					(dBm)	(W)	
WCDMA Band V	QPSK	826.4	26.83	5	29.68	0.93	< 7W
		836.6	26.58	5	29.43	0.88	< 7W
		846.6	26.49	5	29.34	0.86	< 7W

Note: ERP = Peak Conducted power + Antenna Gain - 2.15, EIRP = Peak Conducted power + Antenna Gain

4 Peak to Average Ratio Test

4.1. Limit

In measuring transmissions in this band using an average power technique, the peak to-average ratio (PAR) of the transmission may not exceed 13 dB.


4.2. Test Instruments

Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Remark
Spectrum Analyzer	Agilent	E4445A	MY46181986	05/10/2014	(1)
Wideband Radio Communication Test	R & S	CMW500	103168	11/05/2014	(1)
Attenuator	RADIALL	R41572000	0603033073	N.C.R.	-----
Power divider	Agilent	87302C	3239A00760	N.C.R.	-----
Test Site	ATL	TE05	TE05	N.C.R.	-----

Remark: ⁽¹⁾ Calibration period 1 year. ⁽²⁾ Calibration period 2 years.

Note: N.C.R. = No Calibration Request.

4.3. Setup

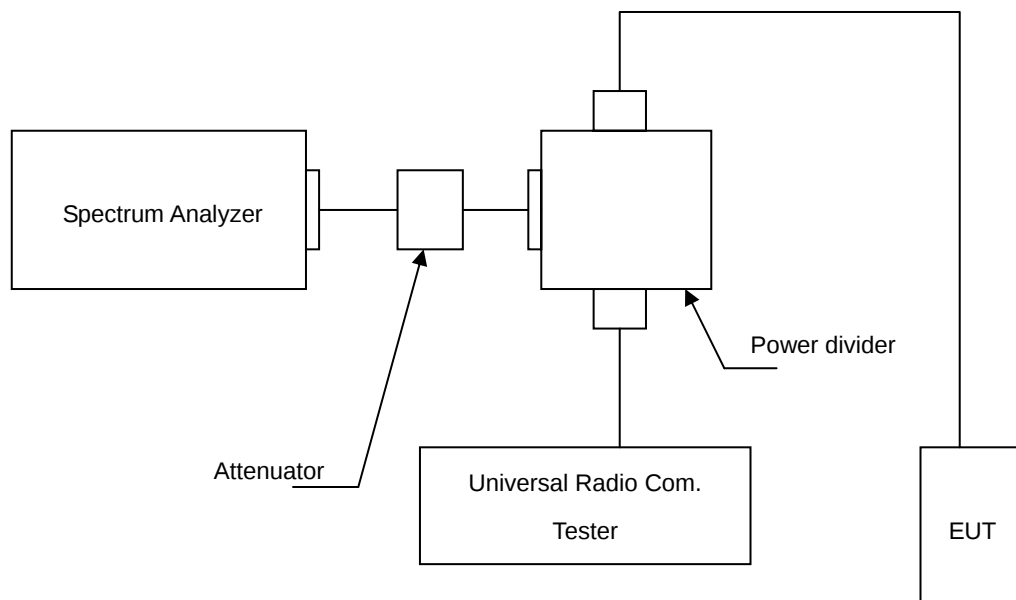

4.4. Test Procedure

The measurement is made according to FCC rules part 24:

- Set resolution/measurement bandwidth signal's occupied bandwidth;
- Set the number of counts to a value that stabilizes the measured CCDF curve;
- Record the maximum PAPR level associated with a probability of 0.1%.

4.5. Uncertainty

The measurement uncertainty is defined as for Conducted Power measurement is 1.2 dB.

4.6. Test Result

Model Number	AR7552			
Test Item	Peak to Average Ratio			
Date of Test	04/30/2015			Test Site
				TE05
Bands	Channel	Frequency (MHz)	Peak to Average Ratio (dB)	Limit (dB)
WCDMA Band II	9262	1852.4	3.07	< 13
	9400	1880.0	3.08	< 13
	9538	1907.6	3.07	< 13

4.7. Test Graphs

Mode 1: WCDMA Band II Link Mode																	
1850.20 MHz	 Average Power 23.46 dBm 53.35 % at 0dB <table border="1"> <tr><td>10.0 %</td><td>1.67 dB</td></tr> <tr><td>1.0 %</td><td>2.55 dB</td></tr> <tr><td>0.1 %</td><td>3.07 dB</td></tr> <tr><td>0.01 %</td><td>3.34 dB</td></tr> <tr><td>0.001 %</td><td>3.48 dB</td></tr> <tr><td>0.0001 %</td><td>3.56 dB</td></tr> <tr><td>Peak</td><td>3.58 dB</td></tr> <tr><td>Peak</td><td>27.04 dBm</td></tr> </table> Center Freq: 1.852400000 GHz Trig: Free Run #Att: 40 dB Counts: 2.37 MS.00 Mpt Radio Std: None Frequency: 1.852400000 GHz CF Step: 5.000000 MHz Auto Man Freq Offset: 0 Hz Info BW 5.0000 MHz	10.0 %	1.67 dB	1.0 %	2.55 dB	0.1 %	3.07 dB	0.01 %	3.34 dB	0.001 %	3.48 dB	0.0001 %	3.56 dB	Peak	3.58 dB	Peak	27.04 dBm
10.0 %	1.67 dB																
1.0 %	2.55 dB																
0.1 %	3.07 dB																
0.01 %	3.34 dB																
0.001 %	3.48 dB																
0.0001 %	3.56 dB																
Peak	3.58 dB																
Peak	27.04 dBm																
1880.00 MHz	 Average Power 23.23 dBm 53.34 % at 0dB <table border="1"> <tr><td>10.0 %</td><td>1.68 dB</td></tr> <tr><td>1.0 %</td><td>2.56 dB</td></tr> <tr><td>0.1 %</td><td>3.08 dB</td></tr> <tr><td>0.01 %</td><td>3.33 dB</td></tr> <tr><td>0.001 %</td><td>3.48 dB</td></tr> <tr><td>0.0001 %</td><td>3.57 dB</td></tr> <tr><td>Peak</td><td>3.60 dB</td></tr> <tr><td>Peak</td><td>26.83 dBm</td></tr> </table> Center Freq: 1.880000000 GHz Trig: Free Run #Att: 40 dB Counts: 2.63 MS.00 Mpt Radio Std: None Frequency: 1.880000000 GHz CF Step: 5.000000 MHz Auto Man Freq Offset: 0 Hz Info BW 5.0000 MHz	10.0 %	1.68 dB	1.0 %	2.56 dB	0.1 %	3.08 dB	0.01 %	3.33 dB	0.001 %	3.48 dB	0.0001 %	3.57 dB	Peak	3.60 dB	Peak	26.83 dBm
10.0 %	1.68 dB																
1.0 %	2.56 dB																
0.1 %	3.08 dB																
0.01 %	3.33 dB																
0.001 %	3.48 dB																
0.0001 %	3.57 dB																
Peak	3.60 dB																
Peak	26.83 dBm																
1909.80 MHz	 Average Power 23.17 dBm 53.33 % at 0dB <table border="1"> <tr><td>10.0 %</td><td>1.67 dB</td></tr> <tr><td>1.0 %</td><td>2.55 dB</td></tr> <tr><td>0.1 %</td><td>3.07 dB</td></tr> <tr><td>0.01 %</td><td>3.33 dB</td></tr> <tr><td>0.001 %</td><td>3.49 dB</td></tr> <tr><td>0.0001 %</td><td>3.61 dB</td></tr> <tr><td>Peak</td><td>3.63 dB</td></tr> <tr><td>Peak</td><td>26.80 dBm</td></tr> </table> Center Freq: 1.907600000 GHz Trig: Free Run #Att: 40 dB Counts: 1.88 MS.00 Mpt Radio Std: None Frequency: 1.907600000 GHz CF Step: 5.000000 MHz Auto Man Freq Offset: 0 Hz Info BW 5.0000 MHz	10.0 %	1.67 dB	1.0 %	2.55 dB	0.1 %	3.07 dB	0.01 %	3.33 dB	0.001 %	3.49 dB	0.0001 %	3.61 dB	Peak	3.63 dB	Peak	26.80 dBm
10.0 %	1.67 dB																
1.0 %	2.55 dB																
0.1 %	3.07 dB																
0.01 %	3.33 dB																
0.001 %	3.49 dB																
0.0001 %	3.61 dB																
Peak	3.63 dB																
Peak	26.80 dBm																

5 Emission Bandwidth & Occupied Bandwidth Test

5.1. Limit

The Occupied Bandwidth Limit:

N/A.


5.2. Test Instruments

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
Universal Radio Communication Tester	R & S	CMU200	109369	08/11/2014	(2)
Spectrum Analyzer	Agilent	E4445A	MY46181986	05/10/2014	(1)
Attenuator	RADIALL	R41572000	0603033073	N.C.R.	-----
Power Divider	Agilent	87302C	3239A00760	N.C.R.	-----
Test Site	ATL	TE05	TE05	N.C.R.	-----

Remark: ⁽¹⁾ Calibration period 1 year. ⁽²⁾ Calibration period 2 years.

Note: N.C.R. = No Calibration Request.

5.3. Setup

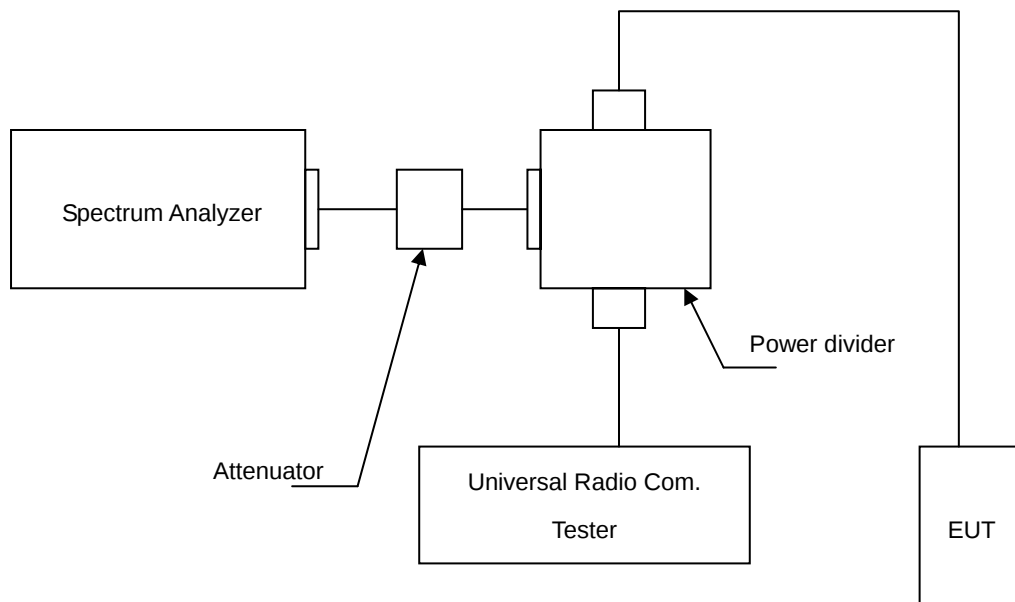

5.4. Test Procedure

The measurement is made according to FCC rules part 22 and 24:

1. The EUT was connected to Spectrum Analyzer and Base Station via Power Divider.
2. The occupied bandwidth of middle channel for the highest and lowest RF powers was measured.




5.5. Uncertainty

The measurement uncertainty is defined as $\pm 10\text{Hz}$

5.6. Test Result


Model Number	AR7552				
Test Item	Emission Bandwidth & Occupied Bandwidth				
Date of Test	04/30/2015				Test Site
					TE05
Bands	Channel	Frequency (MHz)	-26dB Bandwidth (MHz)	99% Bandwidth (MHz)	Note
WCDMA Band II	9262	1852.4	4.707	4.1557	RBW:100KHz , VBW:300KHz
	9400	1880.0	4.682	4.1709	RBW:100KHz , VBW:300KHz
	9538	1907.6	4.709	4.1749	RBW:100KHz , VBW:300KHz
WCDMA Band V	4132	826.4	4.681	4.1693	RBW:100KHz , VBW:300KHz
	4183	836.6	4.680	4.1467	RBW:100KHz , VBW:300KHz
	4233	846.6	4.710	4.2040	RBW:100KHz , VBW:300KHz

5.7. Test Graphs

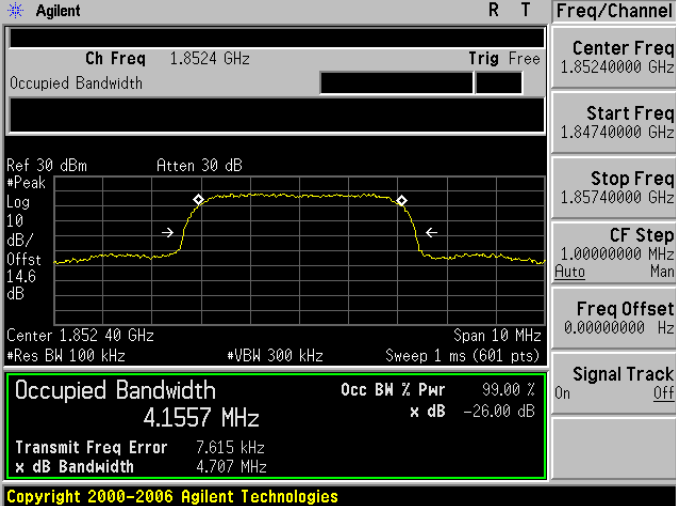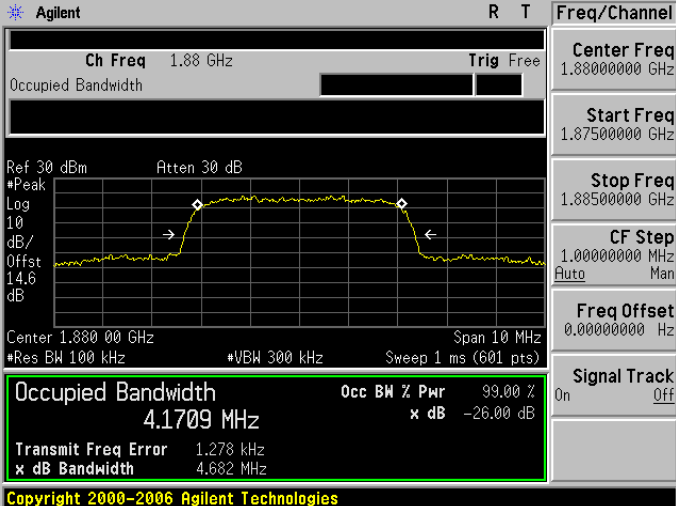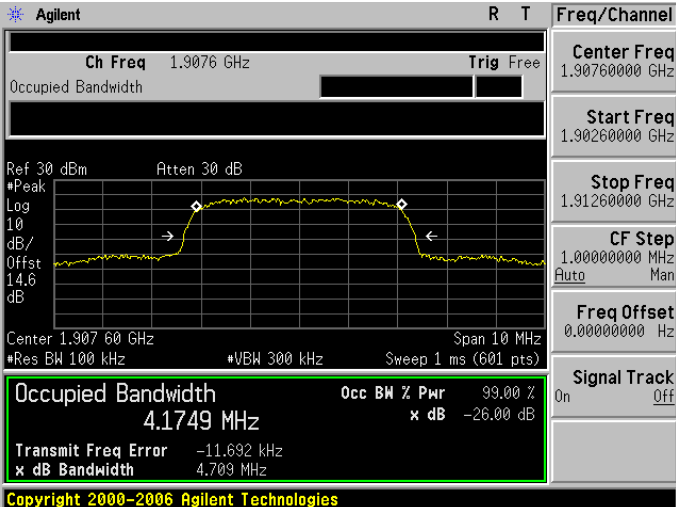
Mode 1: WCDMA Band II Link Mode	
1850.20 MHz	 Agilent R T Freq/Channel Ch Freq 1.8524 GHz Trig Free Center Freq 1.85240000 GHz Start Freq 1.84740000 GHz Stop Freq 1.85740000 GHz CF Step 1.00000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off Ref 30 dBm Atten 30 dB #Peak Log 10 dB/Offst 14.6 dB Center 1.852 40 GHz Span 10 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 1 ms (601 pts) Occupied Bandwidth 4.1557 MHz Occ BW % Pwr 99.00 % x dB -26.00 dB Transmit Freq Error 7.615 kHz x dB Bandwidth 4.707 MHz Copyright 2000-2006 Agilent Technologies
1880.00 MHz	 Agilent R T Freq/Channel Ch Freq 1.88 GHz Trig Free Center Freq 1.88000000 GHz Start Freq 1.87500000 GHz Stop Freq 1.88500000 GHz CF Step 1.00000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off Ref 30 dBm Atten 30 dB #Peak Log 10 dB/Offst 14.6 dB Center 1.880 00 GHz Span 10 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 1 ms (601 pts) Occupied Bandwidth 4.1709 MHz Occ BW % Pwr 99.00 % x dB -26.00 dB Transmit Freq Error 1.278 kHz x dB Bandwidth 4.682 MHz Copyright 2000-2006 Agilent Technologies
1909.80 MHz	 Agilent R T Freq/Channel Ch Freq 1.9076 GHz Trig Free Center Freq 1.90760000 GHz Start Freq 1.90260000 GHz Stop Freq 1.91260000 GHz CF Step 1.00000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off Ref 30 dBm Atten 30 dB #Peak Log 10 dB/Offst 14.6 dB Center 1.907 60 GHz Span 10 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 1 ms (601 pts) Occupied Bandwidth 4.1749 MHz Occ BW % Pwr 99.00 % x dB -26.00 dB Transmit Freq Error -11.692 kHz x dB Bandwidth 4.709 MHz Copyright 2000-2006 Agilent Technologies

Mode 2: WCDMA Band V Link Mode


826.4 MHz

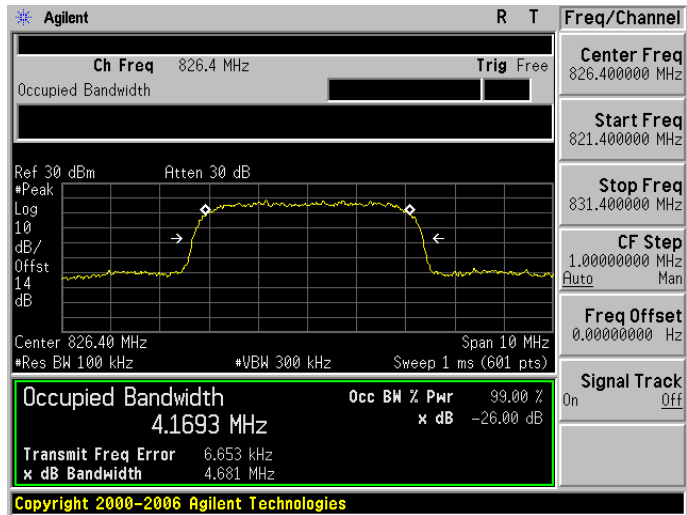

836.6 MHz

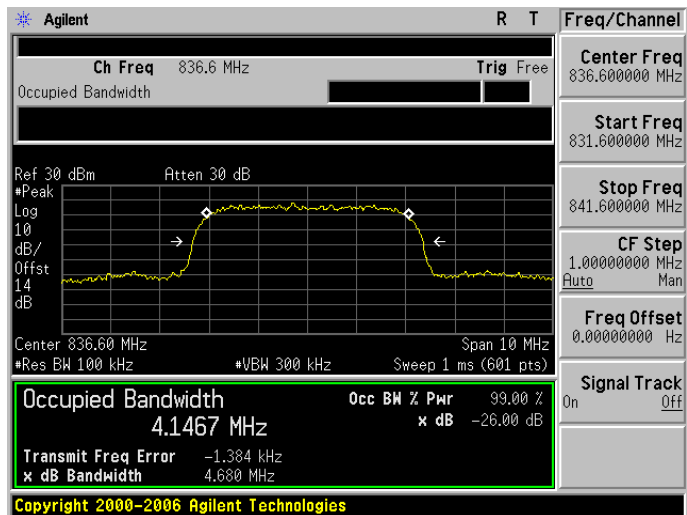

846.6 MHz

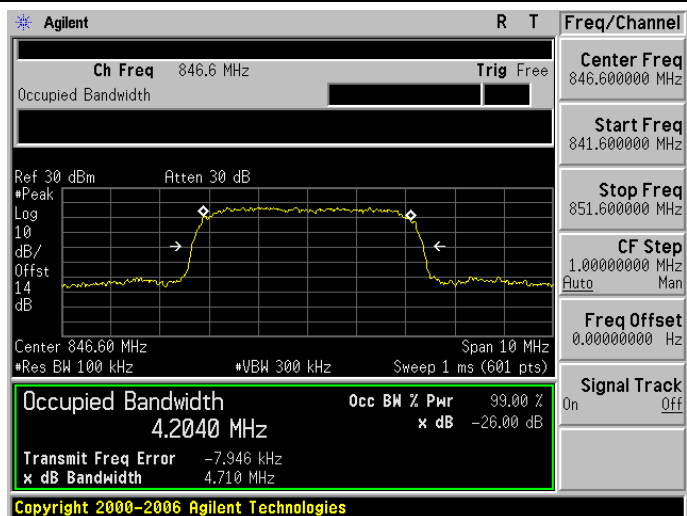

6 Band Edge Test

6.1. Limit

The Band Edge Limit:

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10\log(P)$ dB.


6.2. Test Instruments

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
Universal Radio Communication Tester	R & S	CMU200	109369	08/11/2014	(2)
Spectrum Analyzer	Agilent	E4445A	MY46181986	05/10/2014	(1)
Attenuator	RADIALL	R41572000	0603033073	N.C.R.	-----
Power Divider	Agilent	87302C	3239A00760	N.C.R.	-----
Test Site	ATL	TE05	TE05	N.C.R.	-----

Remark: ⁽¹⁾ Calibration period 1 year. ⁽²⁾ Calibration period 2 years.

Note: N.C.R. = No Calibration Request.

6.3. Setup

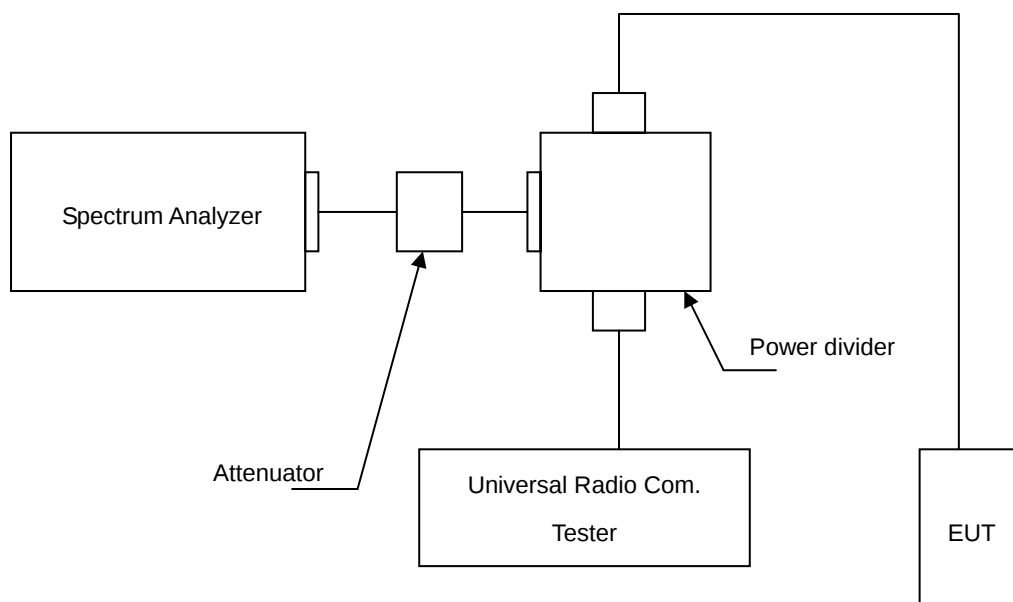

6.4. Test Procedure

The measurement is made according to FCC rules part 22 and 24:

1. The EUT was connected to Spectrum Analyzer and Base Station via Power Divider.
2. The band edge of low and high channels for the highest RF powers within the transmitting frequency band were measured. Setting RBW as roughly BW/100.
3. The band edge setting:
 - a. RB=10 kHz; VB=30 kHz for GSM 850 and PCS 1900.
 - b. RB=51 kHz; VB=160 kHz for WCDMA Band V and WCDMA Band II.


6.5. Uncertainty

The measurement uncertainty is defined as $\pm 10\text{Hz}$

6.6. Test Result


Model Number		AR7552				
Test Item		Band Edge				
Date of Test		04/30/2015			Test Site	TE05
Bands		Channel	Frequency (MHz)	Bandwidth (dBm)	Limit (dBm)	Result
WCDMA Band II	Lower	9262	1850.000	-32.25	-13	Pass
	Higher	9538	1910.000	-29.23	-13	Pass
WCDMA Band V	Lower	4132	824.0000	-26.33	-13	Pass
	Higher	4233	849.0000	-29.10	-13	Pass

6.7. Test Graphs

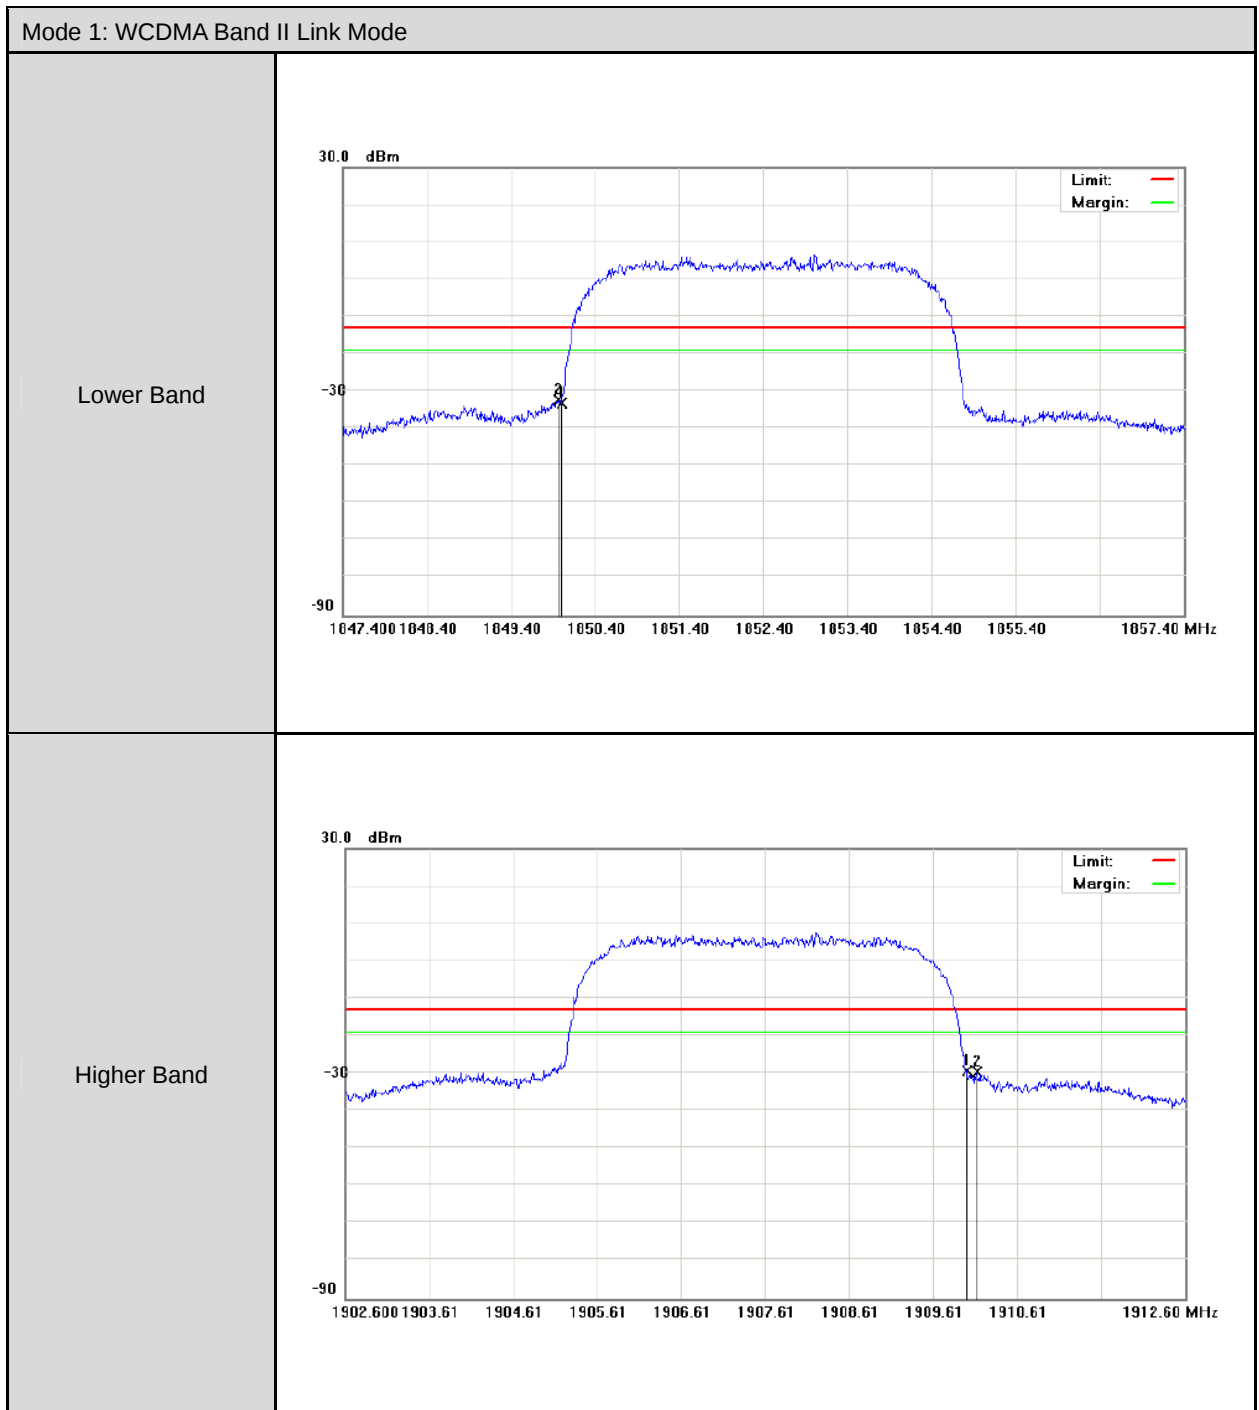


Mode 2: WCDMA Band V Link Mode

Lower Band

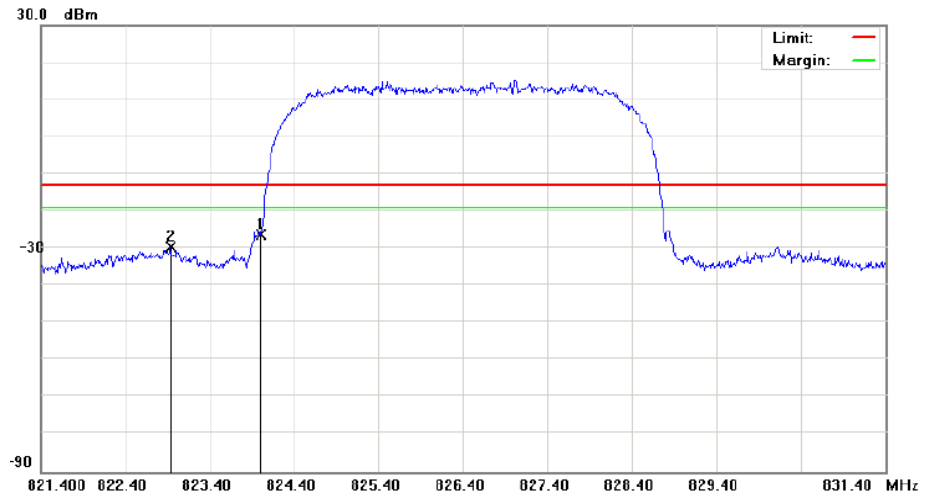

Higher Band

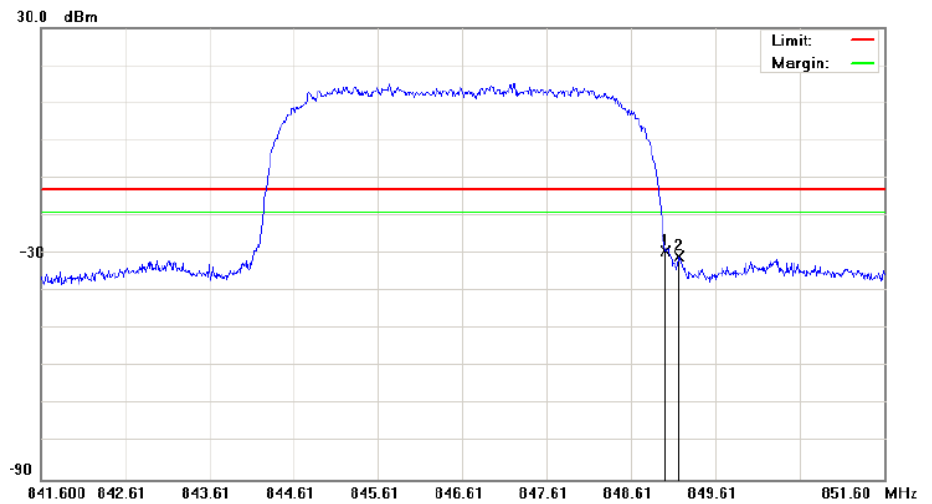

7 Conducted Spurious Emission and Radiation Emission Test

7.1. Limit

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10\log(P)$ dB.


7.2. Test Instruments

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
Universal Radio Communication Tester	R & S	CMU200	109369	08/11/2014	(2)
Spectrum Analyzer	Agilent	E4445A	MY46181986	05/10/2014	(1)
Attenuator	RADIALL	R41572000	0603033073	N.C.R.	-----
Power Divider	Agilent	87302C	3239A00760	N.C.R.	-----
Test Site	ATL	TE05	TE05	N.C.R.	-----


Remark: ⁽¹⁾ Calibration period 1 year. ⁽²⁾ Calibration period 2 years.

Note: N.C.R. = No Calibration Request.

7.3. Setup

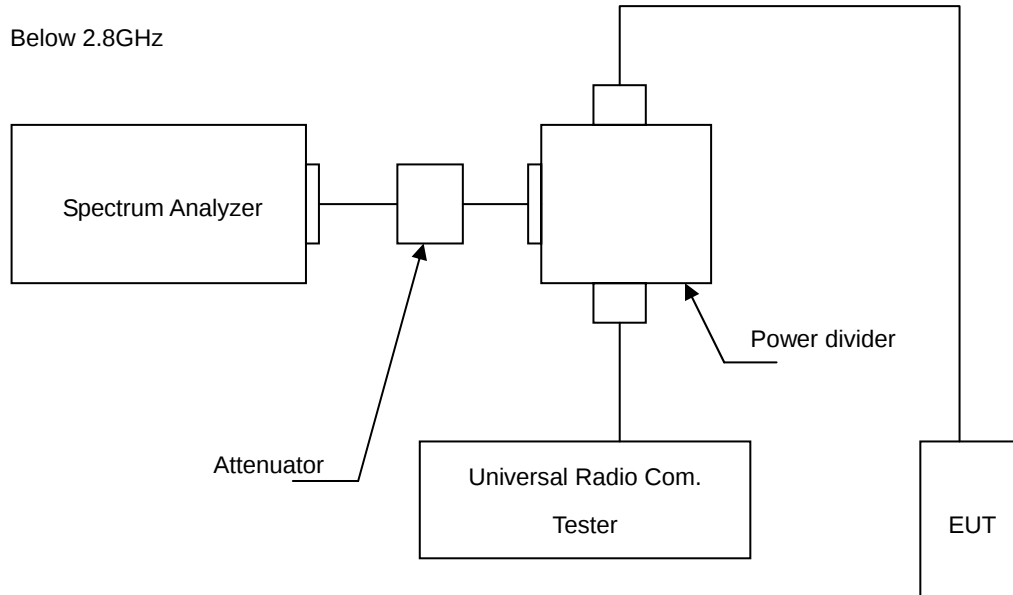

Above 2.8GHz

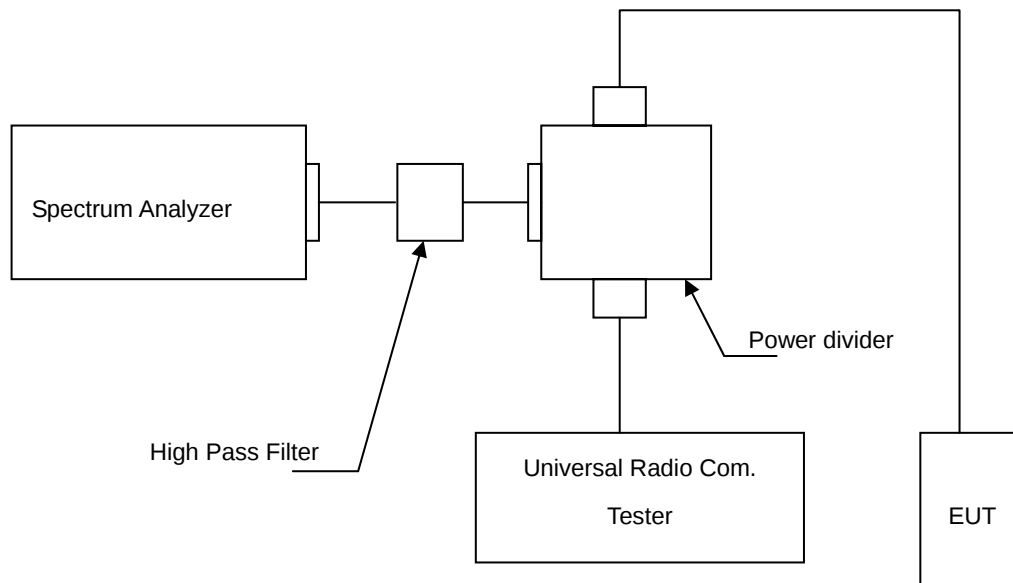

7.4. Test Procedure

1. The EUT was connected to Spectrum Analyzer and Base Station via Power Divider.
2. The middle channel for the highest RF power within the transmitting frequency was measured.
3. The conducted spurious emission for the whole frequency range was taken.
4. Test setting at GSM 850 RB>100 kHz, VB>100 kHz; PCS 1900 RB>1MHz, VB>1MHz.

7.5. Uncertainty

The measurement uncertainty is evaluated as ± 2.24 dB.

7.6. Test Result


Model Number	AR7552		
Test Item	Conducted Emission		
Test Mode	Mode 1 / Mode 2		
Date of Test	04/30/2015	Test Site	TE05

File :AR7552(CH9262)

Data :#1

Date: 2015/4/30

Time: 下午 02:41:21

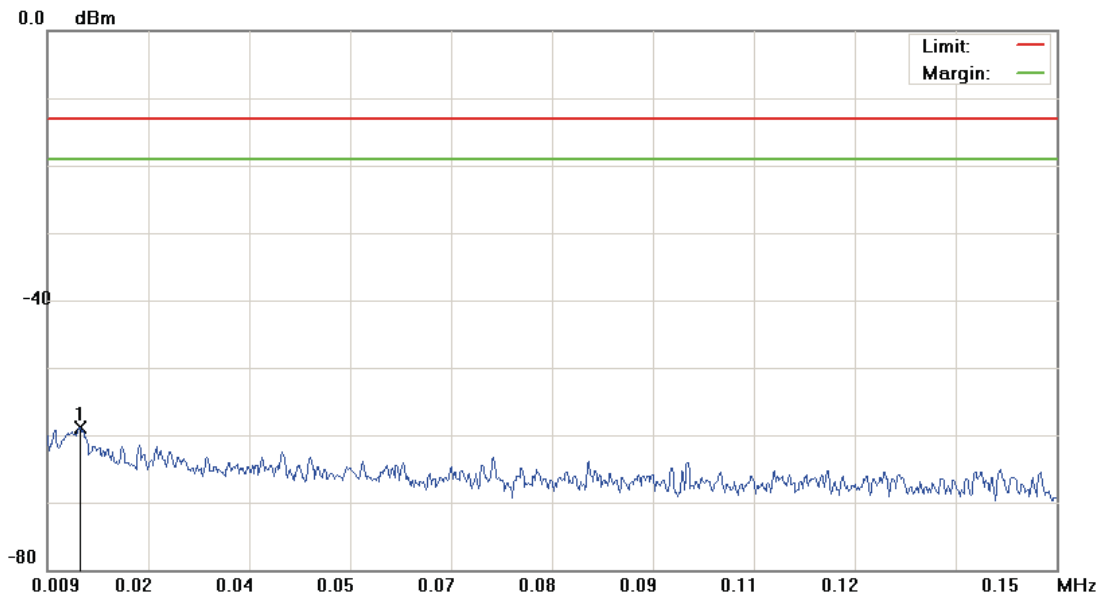

Site: site #1

Limit: FCC Part 24 conducted(9k-26.5G)

EUT: Module

M/N: AR7552

Mode: WCDMA Band II

Note:

Polarization: Conducted Power

Power: DC 3.7V

Distance:

Temperature: 26 °C

Humidity: 55 %

RBW: 1 KHz VBW: 3 KHz

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Antenna Height cm	Table Degree	Comment
1	*	0.0136	-70.23	11.38	-58.85	-13.00	-45.85	peak		


*:Maximum data x:Over limit !:over margin

File :AR7552(CH9262)

Data :#2

Date: 2015/4/30

Time: 下午 02:41:45

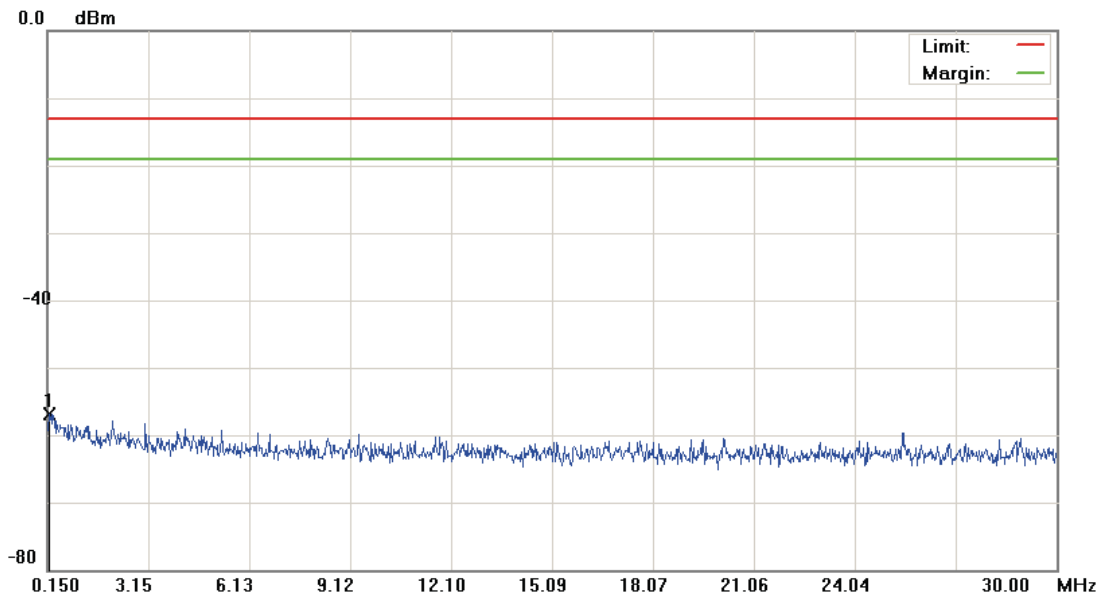

Site: site #1

Limit: FCC Part 24 conducted(9k-26.5G)

EUT: Module

M/N: AR7552

Mode: WCDMA Band II

Note:

Polarization: Conducted Power

Power: DC 3.7V

Distance:

Temperature: 26 °C

Humidity: 55 %

RBW: 10 KHz VBW: 30 KHz

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Antenna Height cm	Table Degree degree	Comment
1	*	0.2097	-69.25	12.44	-56.81	-13.00	-43.81	peak		


*:Maximum data x:Over limit !:over margin

File :AR7552(CH9262)

Data :#3

Date: 2015/4/30

Time: 下午 02:42:09

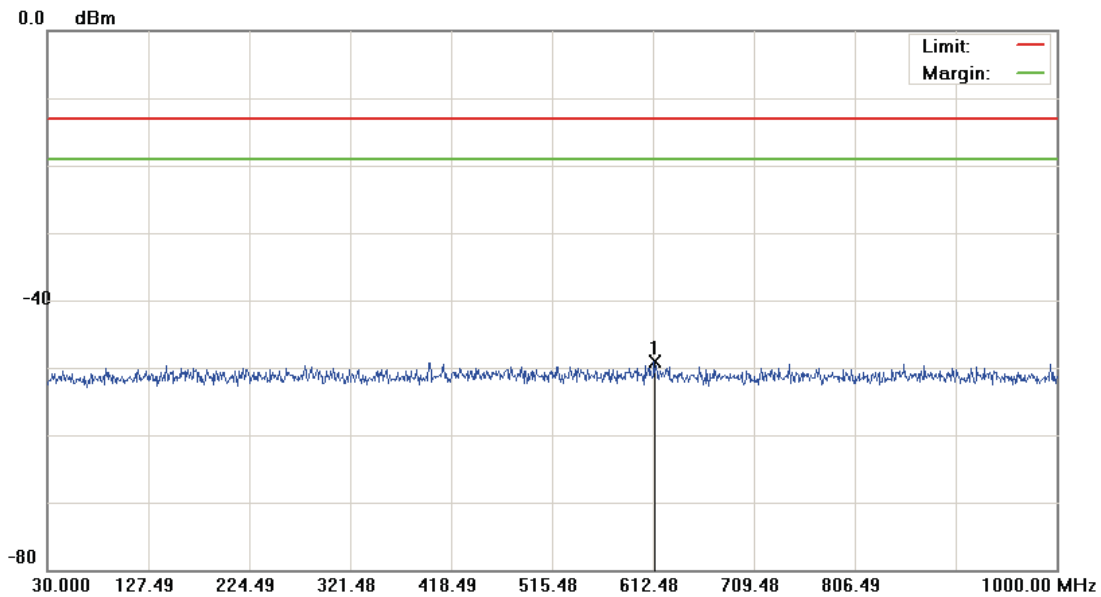

Site: site #1

Limit: FCC Part 24 conducted(9k-26.5G)

EUT: Module

M/N: AR7552

Mode: WCDMA Band II

Note:

Polarization: Conducted Power

Power: DC 3.7V

Distance:

Temperature: 26 °C

Humidity: 55 %

RBW: 100 KHz VBW: 300 KHz

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Antenna Height cm	Table Degree	Comment
1	*	613.4550	-62.15	13.13	-49.02	-13.00	-36.02	peak		


*:Maximum data x:Over limit !:over margin

File :AR7552(CH9262)

Data :#4

Date: 2015/4/30

Time: 下午 02:48:59

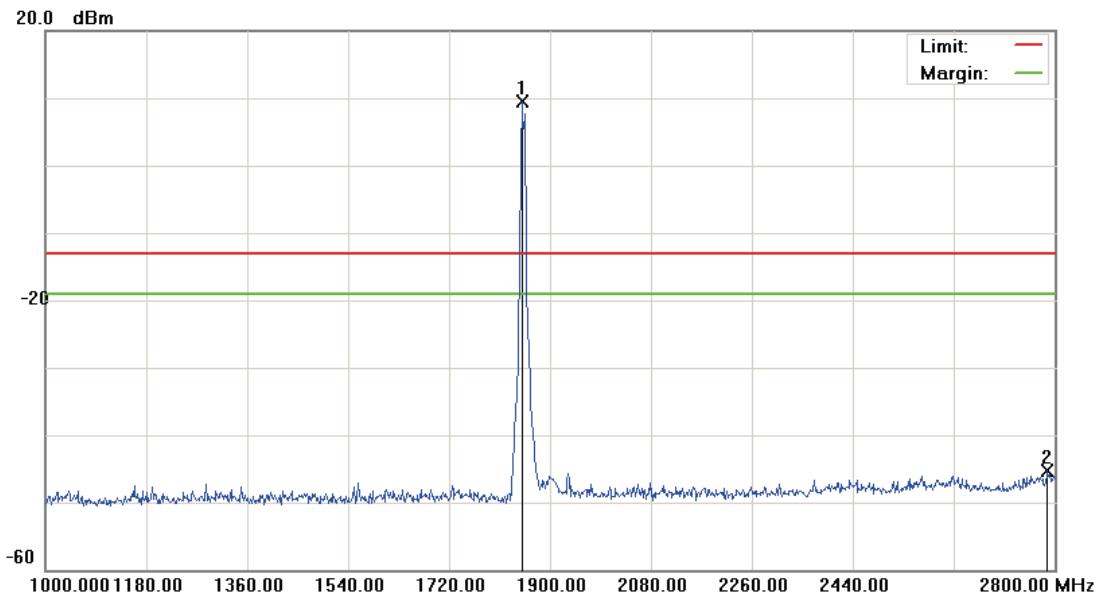

Site: site #1

Limit: FCC Part 24 conducted(9k-26.5G)

EUT: Module

M/N: AR7552

Mode: WCDMA Band II

Note:

Polarization: Conducted Power

Power: DC 3.7V

Distance:

Temperature: 26 °C

Humidity: 55 %

RBW: 1000 KHz VBW: 3000 KHz

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Antenna Height cm	Table Degree degree	Comment
1	*	1850.500	5.32	4.26	9.58	-13.00	22.58	peak		Tx
2		2787.400	-51.09	5.89	-45.20	-13.00	-32.20	peak		


*:Maximum data x:Over limit !:over margin

File :AR7552(CH9262)

Data :#5

Date: 2015/4/30

Time: 下午 03:08:07

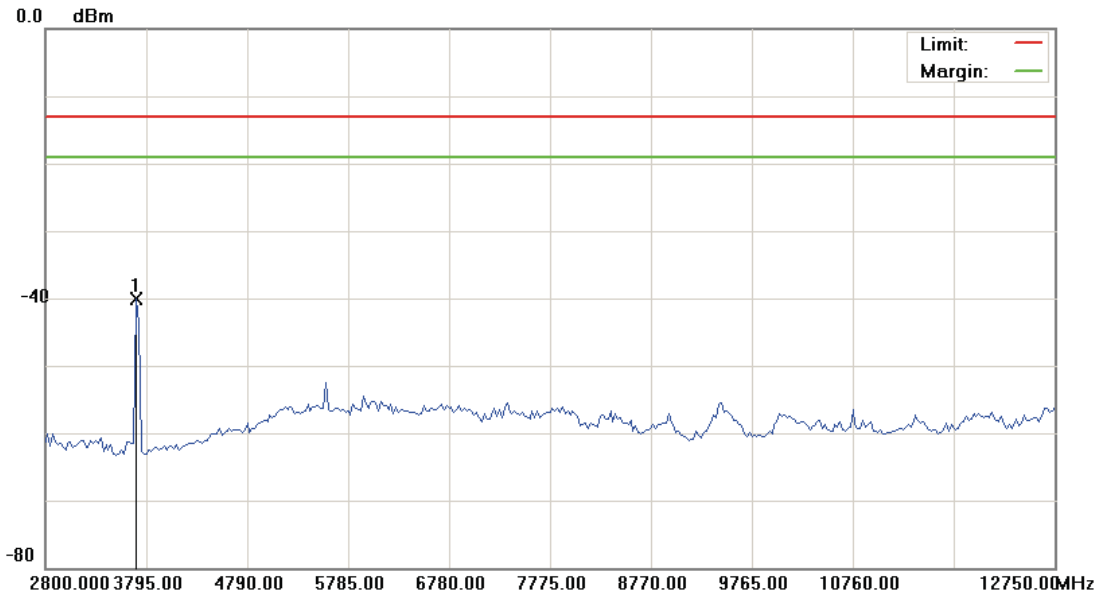

Site: site #1

Limit: FCC Part 24 conducted(9k-26.5G)

EUT: Module

M/N: AR7552

Mode: WCDMA Band II

Note:

Polarization: Conducted Power

Power: DC 3.7V

Distance:

Temperature: 26 °C

Humidity: 55 %

RBW: 1000 KHz VBW: 3000 KHz

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Antenna Height cm	Table Degree	Comment
1	*	3695.500	-44.98	4.87	-40.11	-13.00	-27.11	peak		


*:Maximum data x:Over limit !:over margin

File :AR7552(CH9262)

Data :#6

Date: 2015/4/30

Time: 下午 03:08:26

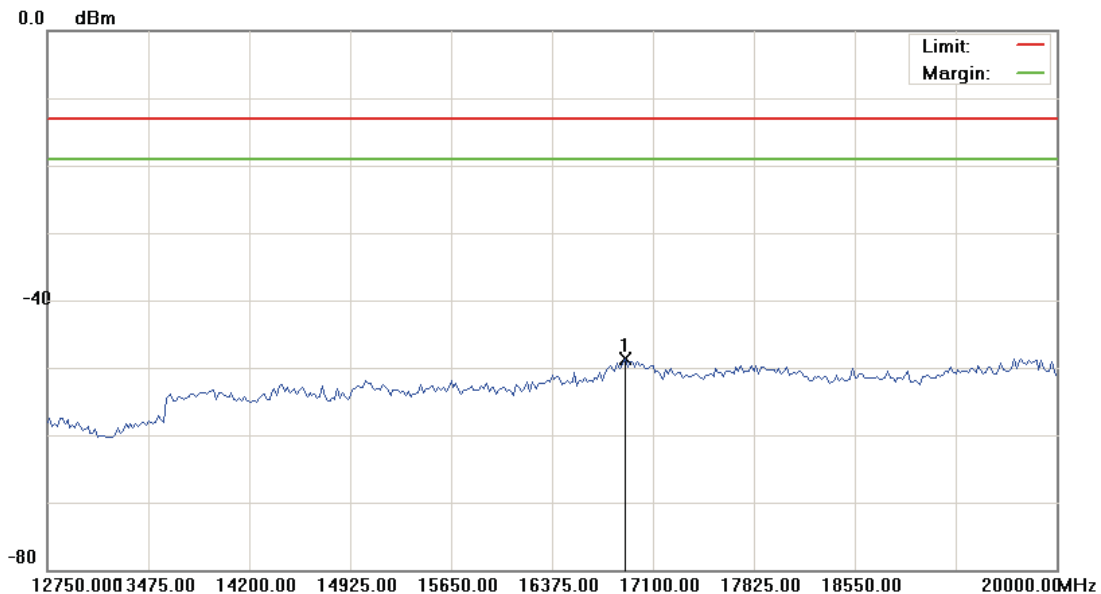

Site: site #1

Limit: FCC Part 24 conducted(9k-26.5G)

EUT: Module

M/N: AR7552

Mode: WCDMA Band II

Note:

Polarization: Conducted Power

Power: DC 3.7V

Distance:

Temperature: 26 °C

Humidity: 55 %

RBW: 1000 KHz VBW: 3000 KHz

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Antenna Height cm	Table Degree degree	Comment
1	*	16900.625	-55.20	6.56	-48.64	-13.00	-35.64	peak		


*:Maximum data x:Over limit !:over margin

File :AR7552(CH9400)

Data :#1

Date: 2015/4/30

Time: 下午 02:42:54

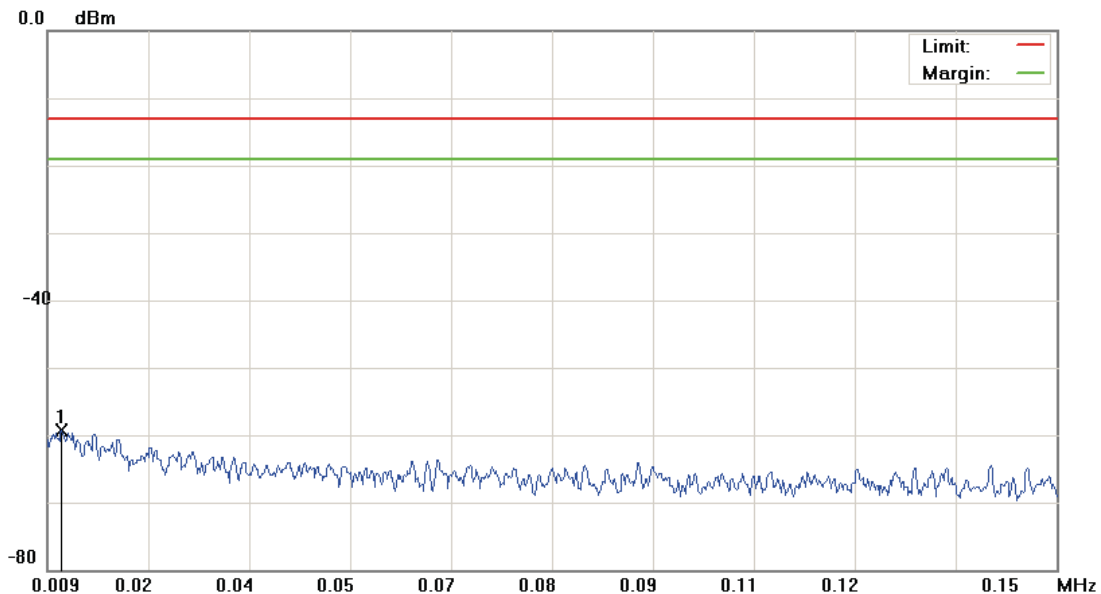

Site: site #1

Limit: FCC Part 24 conducted(9k-26.5G)

EUT: Module

M/N: AR7552

Mode: WCDMA Band II

Note:

Polarization: Conducted Power

Power: DC 3.7V

Distance:

Temperature: 26 °C

Humidity: 55 %

RBW: 1 KHz VBW: 3 KHz

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Antenna Height cm	Table Degree degree	Comment
1	*	0.0110	-70.74	11.35	-59.39	-13.00	-46.39	peak		


*:Maximum data x:Over limit !:over margin

File :AR7552(CH9400)

Data :#2

Date: 2015/4/30

Time: 下午 02:43:18

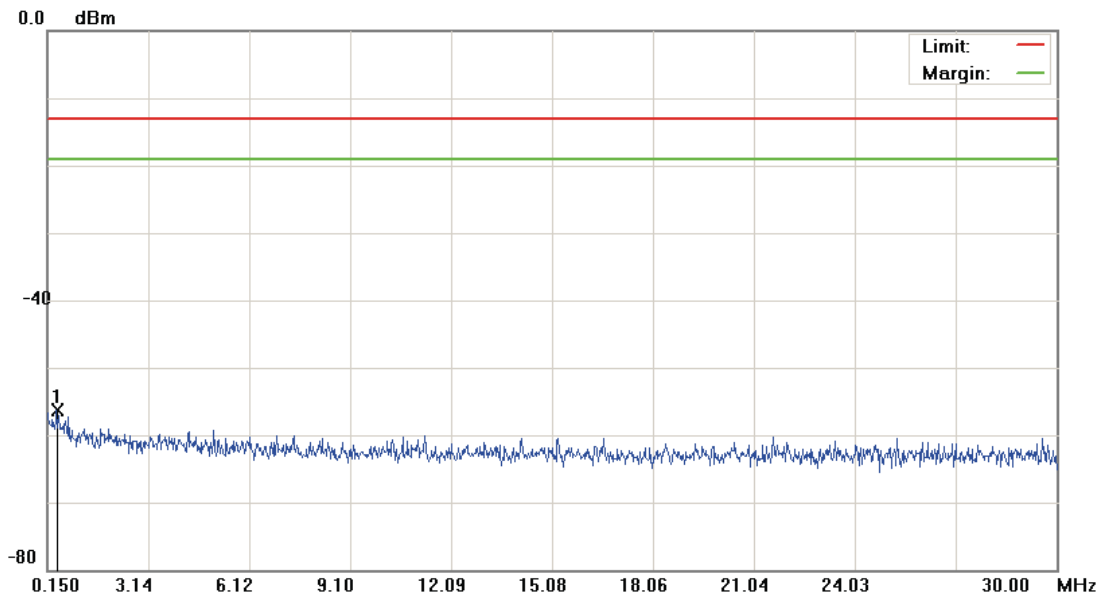

Site: site #1

Limit: FCC Part 24 conducted(9k-26.5G)

EUT: Module

M/N: AR7552

Mode: WCDMA Band II

Note:

Polarization: Conducted Power

Power: DC 3.7V

Distance:

Temperature: 26 °C

Humidity: 55 %

RBW: 10 KHz VBW: 30 KHz

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Antenna Height cm	Table Degree degree	Comment
1	*	0.4336	-69.07	12.82	-56.25	-13.00	-43.25	peak		


*:Maximum data x:Over limit !:over margin

File :AR7552(CH9400)

Data :#3

Date: 2015/4/30

Time: 下午 02:43:42

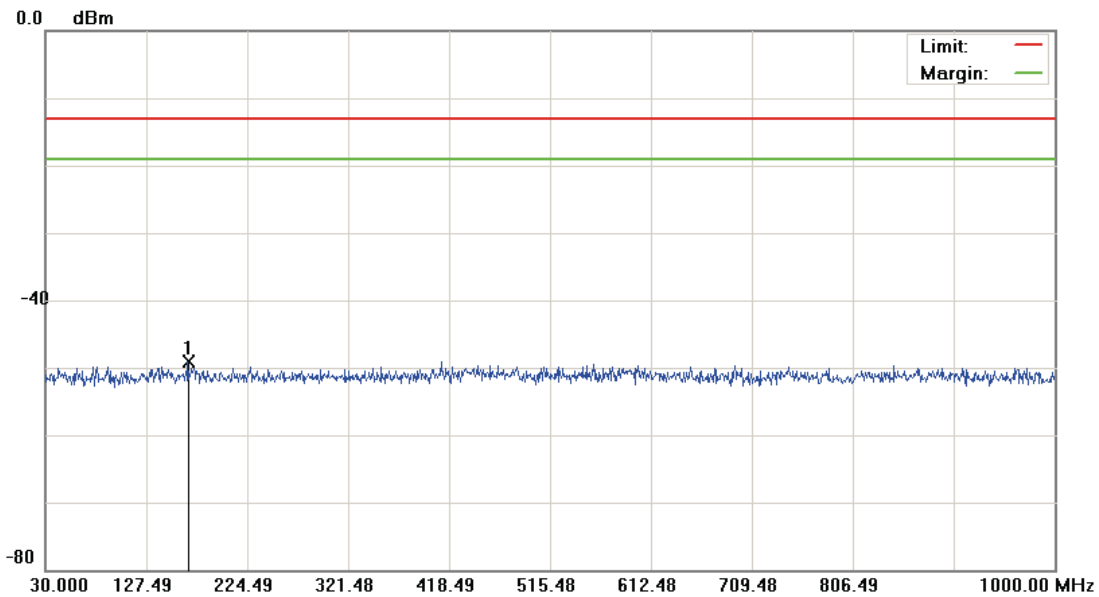

Site: site #1

Limit: FCC Part 24 conducted(9k-26.5G)

EUT: Module

M/N: AR7552

Mode: WCDMA Band II

Note:

Polarization: Conducted Power

Power: DC 3.7V

Distance:

Temperature: 26 °C

Humidity: 55 %

RBW: 100 KHz VBW: 300 KHz

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Antenna Height cm	Table Degree degree	Comment
1	*	167.2550	-62.37	13.33	-49.04	-13.00	-36.04	peak		

*:Maximum data x:Over limit !:over margin


File :AR7552(CH9400)

Data :#4

Date: 2015/4/30

Time: 下午 02:51:05

20.0 dBm

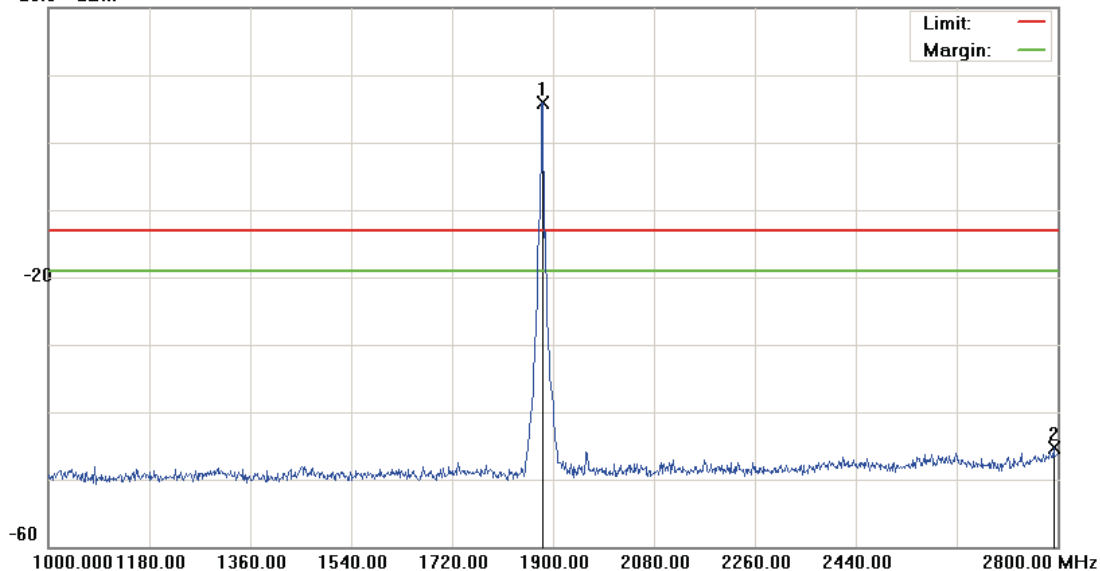

Site: site #1

Limit: FCC Part 24 conducted(9k-26.5G)

EUT: Module

M/N: AR7552

Mode: WCDMA Band II

Note:

Polarization: Conducted Power

Power: DC 3.7V

Distance:

Temperature: 26 °C

Humidity: 55 %

RBW: 1000 KHz VBW: 3000 KHz

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Antenna Height cm	Table Degree degree	Comment
1	*	1882.000	1.03	4.83	5.86	-13.00	18.86	peak		Tx
2		2792.800	-51.16	5.90	-45.26	-13.00	-32.26	peak		


*:Maximum data x:Over limit !:over margin

File :AR7552(CH9400)

Data :#5

Date: 2015/4/30

Time: 下午 03:09:25

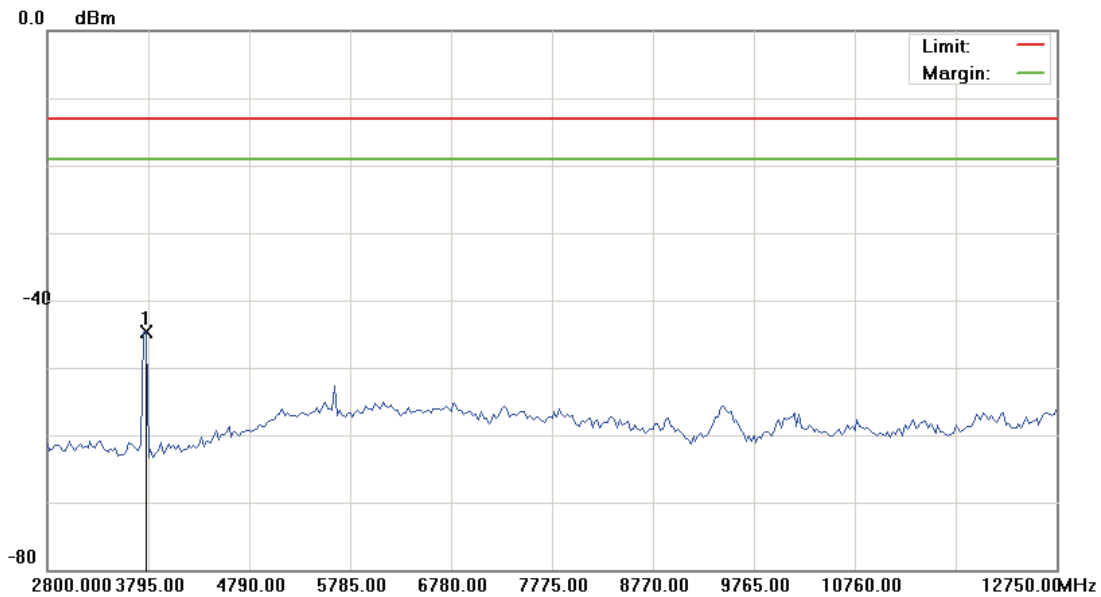

Site: site #1

Limit: FCC Part 24 conducted(9k-26.5G)

EUT: Module

M/N: AR7552

Mode: WCDMA Band II

Note:

Polarization: Conducted Power

Power: DC 3.7V

Distance:

Temperature: 26 °C

Humidity: 55 %

RBW: 1000 KHz VBW: 3000 KHz

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Antenna Height cm	Table Degree	Comment
1	*	3770.125	-49.61	4.93	-44.68	-13.00	-31.68	peak		


*:Maximum data x:Over limit !:over margin

File :AR7552(CH9400)

Data :#6

Date: 2015/4/30

Time: 下午 03:09:44

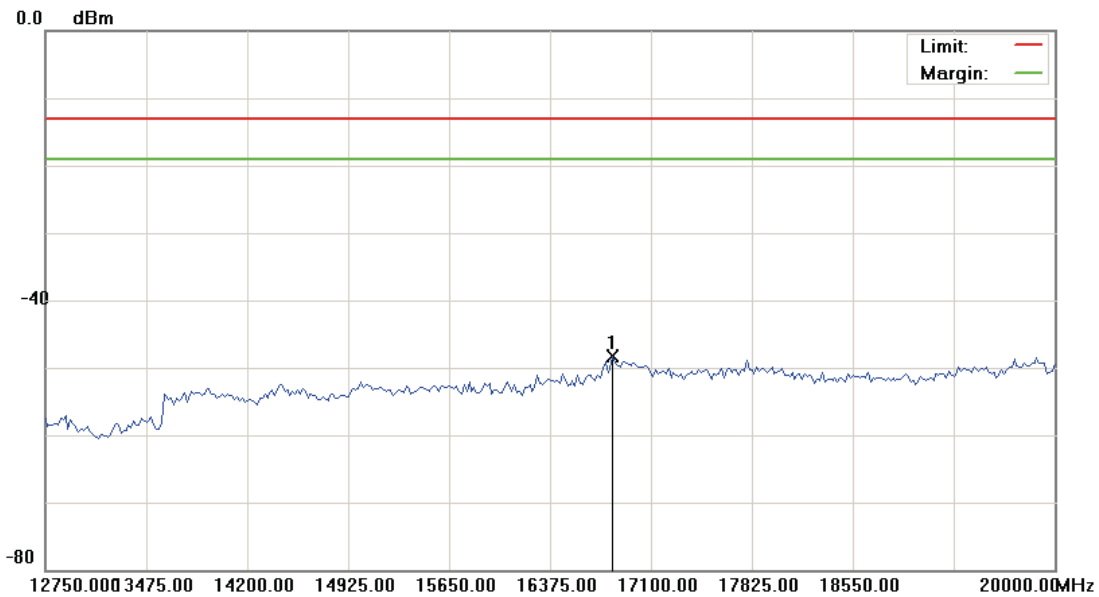

Site: site #1

Limit: FCC Part 24 conducted(9k-26.5G)

EUT: Module

M/N: AR7552

Mode: WCDMA Band II

Note:

Polarization: Conducted Power

Power: DC 3.7V

Distance:

Temperature: 26 °C

Humidity: 55 %

RBW: 1000 KHz VBW: 3000 KHz

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Antenna Height cm	Table Degree	Detector	Comment
1	*	16828.125	-54.75	6.53	-48.22	-13.00	-35.22			peak	


*:Maximum data x:Over limit !:over margin

File :AR7552(CH9538)

Data :#1

Date: 2015/4/30

Time: 下午 02:46:00

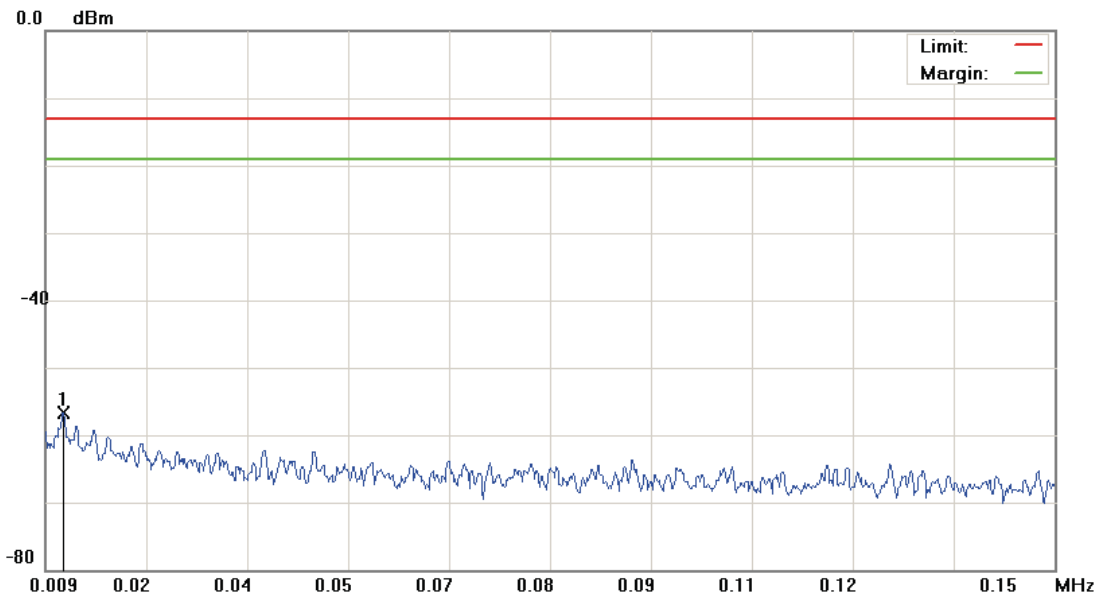

Site: site #1

Limit: FCC Part 24 conducted(9k-26.5G)

EUT: Module

M/N: AR7552

Mode: WCDMA Band II

Note:

Polarization: Conducted Power

Power: DC 3.7V

Distance:

Temperature: 26 °C

Humidity: 55 %

RBW: 1 KHz VBW: 3 KHz

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Antenna Height cm	Table Degree	Comment
1	*	0.0115	-68.00	11.35	-56.65	-13.00	-43.65	peak		


*:Maximum data x:Over limit !:over margin

File :AR7552(CH9538)

Data :#2

Date: 2015/4/30

Time: 下午 02:46:24

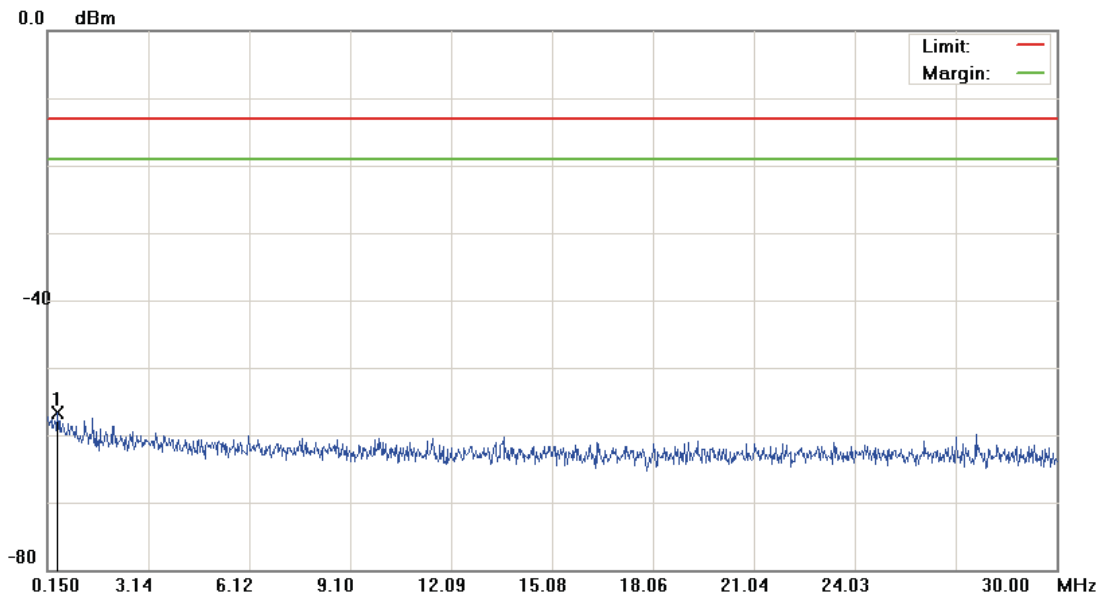

Site: site #1

Limit: FCC Part 24 conducted(9k-26.5G)

EUT: Module

M/N: AR7552

Mode: WCDMA Band II

Note:

Polarization: Conducted Power

Power: DC 3.7V

Distance:

Temperature: 26 °C

Humidity: 55 %

RBW: 10 KHz VBW: 30 KHz

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Antenna Height cm	Table Degree degree	Comment
1	*	0.4485	-69.59	12.82	-56.77	-13.00	-43.77	peak		


*:Maximum data x:Over limit !:over margin

File :AR7552(CH9538)

Data :#3

Date: 2015/4/30

Time: 下午 02:46:48

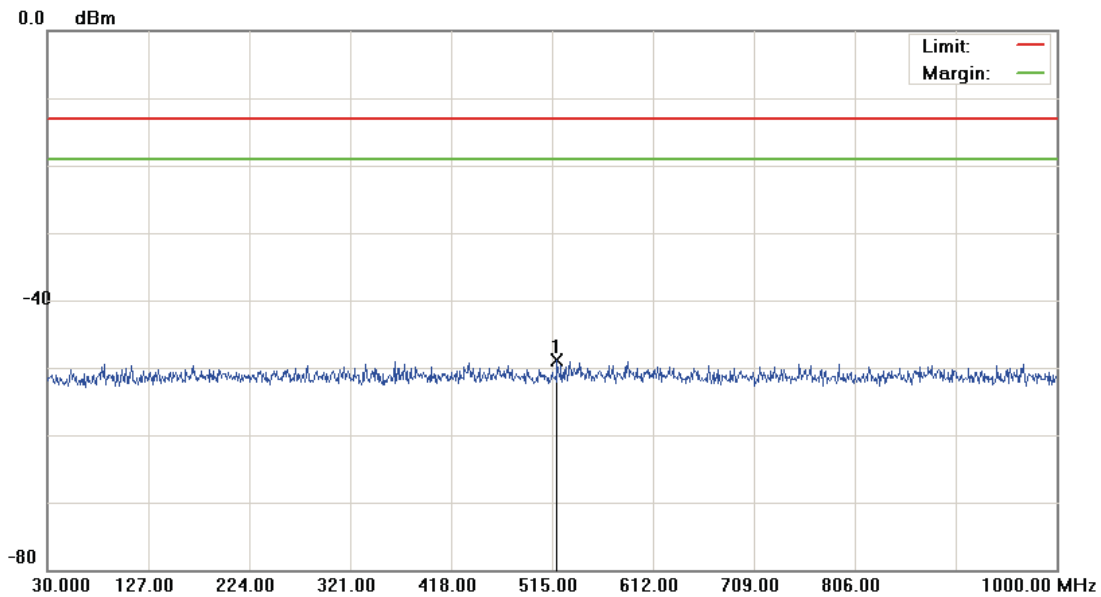

Site: site #1

Limit: FCC Part 24 conducted(9k-26.5G)

EUT: Module

M/N: AR7552

Mode: WCDMA Band II

Note:

Polarization: Conducted Power

Power: DC 3.7V

Distance:

Temperature: 26 °C

Humidity: 55 %

RBW: 100 KHz VBW: 300 KHz

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Antenna Height cm	Table Degree	Comment
1	*	519.8500	-62.00	13.15	-48.85	-13.00	-35.85	peak		

*:Maximum data x:Over limit !:over margin


File :AR7552(CH9538)

Data :#4

Date: 2015/4/30

Time: 下午 02:52:13

20.0 dBm

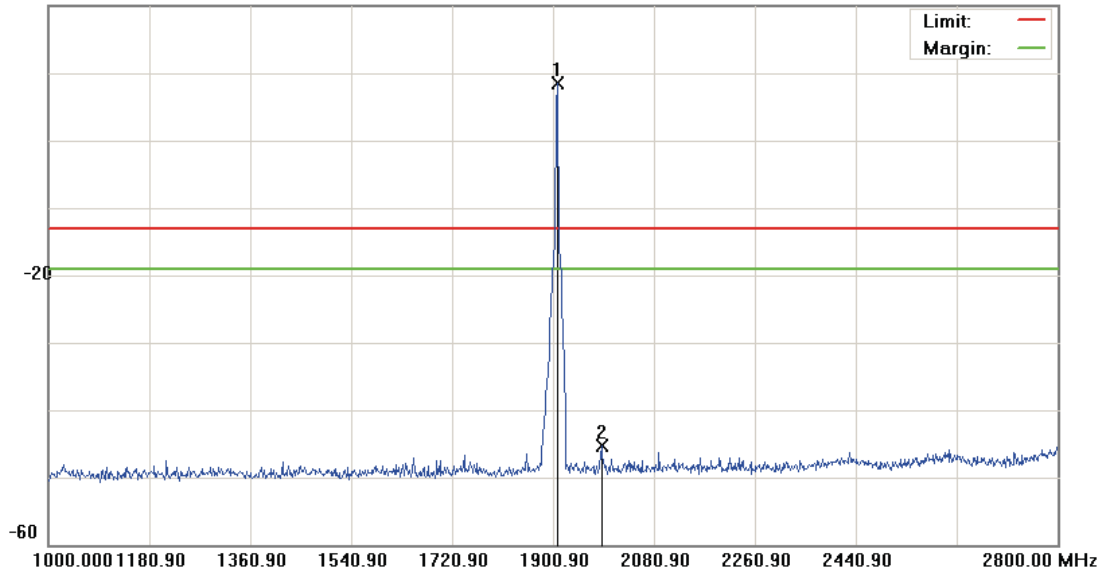

Site: site #1

Limit: FCC Part 24 conducted(9k-26.5G)

EUT: Module

M/N: AR7552

Mode: WCDMA Band II

Note:

Polarization: Conducted Power

Power: DC 3.7V

Distance:

Temperature: 26 °C

Humidity: 55 %

RBW: 1000 KHz VBW: 3000 KHz

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Antenna Height cm	Table Degree degree	Comment
1	*	1909.000	2.68	5.80	8.48	-13.00	21.48	peak		Tx
2		1986.400	-50.05	4.69	-45.36	-13.00	-32.36	peak		


*:Maximum data x:Over limit !:over margin

File :AR7552(CH9538)

Data :#5

Date: 2015/4/30

Time: 下午 03:10:19

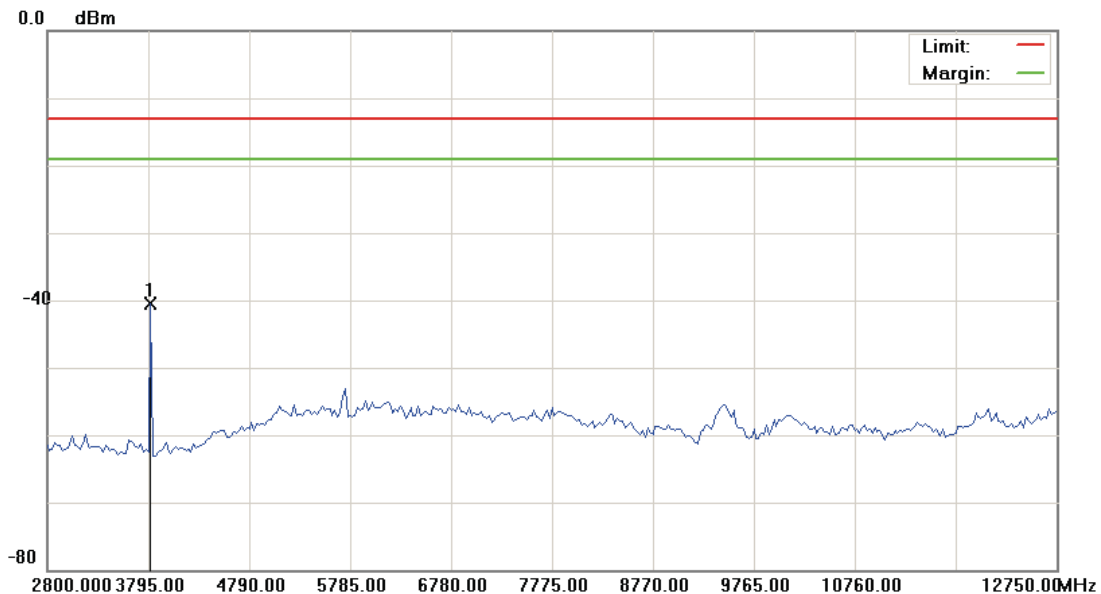

Site: site #1

Limit: FCC Part 24 conducted(9k-26.5G)

EUT: Module

M/N: AR7552

Mode: WCDMA Band II

Note:

Polarization: Conducted Power

Power: DC 3.7V

Distance:

Temperature: 26 °C

Humidity: 55 %

RBW: 1000 KHz VBW: 3000 KHz

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Antenna Height cm	Table Degree	Comment
1	*	3819.875	-45.41	4.91	-40.50	-13.00	-27.50	peak		


*:Maximum data x:Over limit !:over margin

File :AR7552(CH9538)

Data :#6

Date: 2015/4/30

Time: 下午 03:10:38

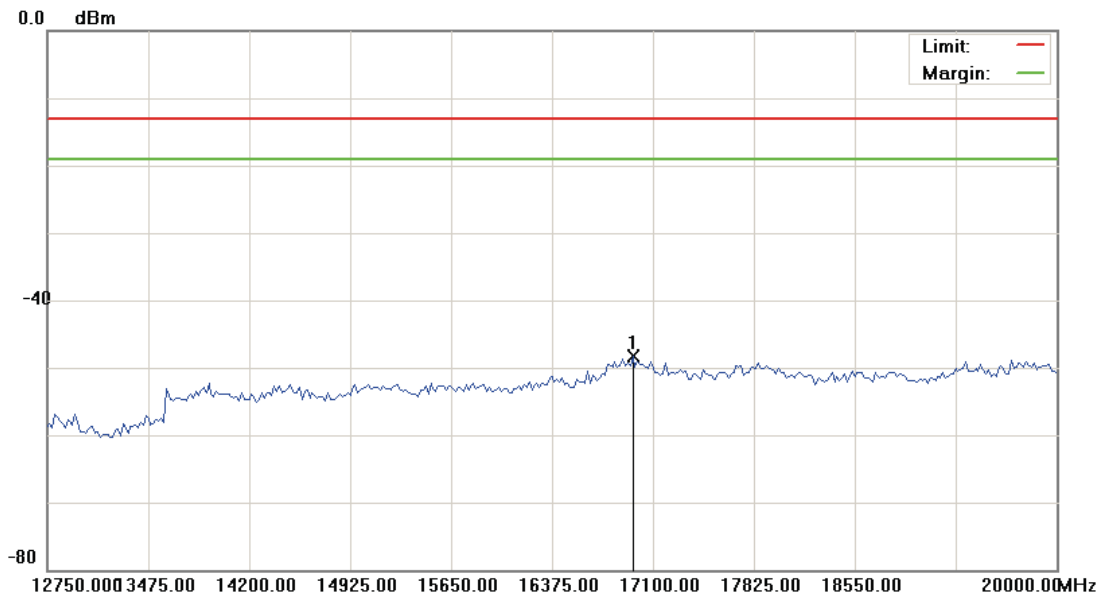

Site: site #1

Limit: FCC Part 24 conducted(9k-26.5G)

EUT: Module

M/N: AR7552

Mode: WCDMA Band II

Note:

Polarization: Conducted Power

Power: DC 3.7V

Distance:

Temperature: 26 °C

Humidity: 55 %

RBW: 1000 KHz VBW: 3000 KHz

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Antenna Height cm	Table Degree degree	Comment
1	*	16955.000	-54.85	6.57	-48.28	-13.00	-35.28	peak		


*:Maximum data x:Over limit !:over margin

File :AR7552(CH4132)

Data :#1

Date: 2015/4/30

Time: 下午 02:54:31

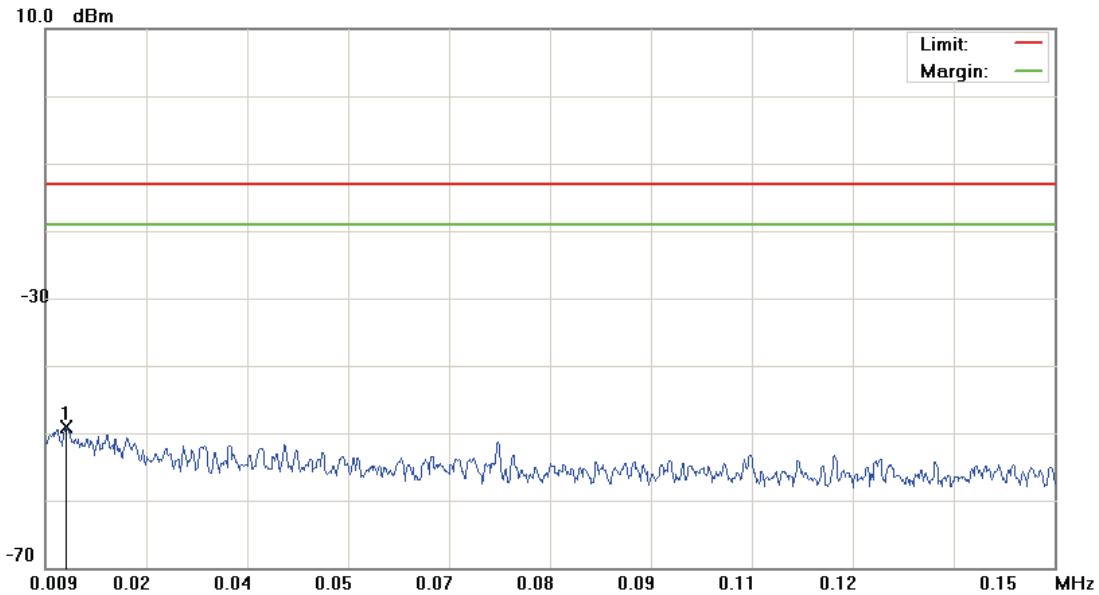

Site: site #1

Limit: FCC Part 22 conducted(9k-12.75G)

EUT: Module

M/N: AR7552

Mode: WCDMA Band V

Note:

Polarization: Conducted Power

Power: DC 3.7V

Distance:

Temperature: 26 °C

Humidity: 55 %

RBW: 1 KHz VBW: 3 KHz

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Antenna Height cm	Table Degree degree	Comment
1	*	0.0120	-79.70	30.57	-49.13	-13.00	-36.13	peak		


*:Maximum data x:Over limit !:over margin

File :AR7552(CH4132)

Data :#2

Date: 2015/4/30

Time: 下午 02:54:55

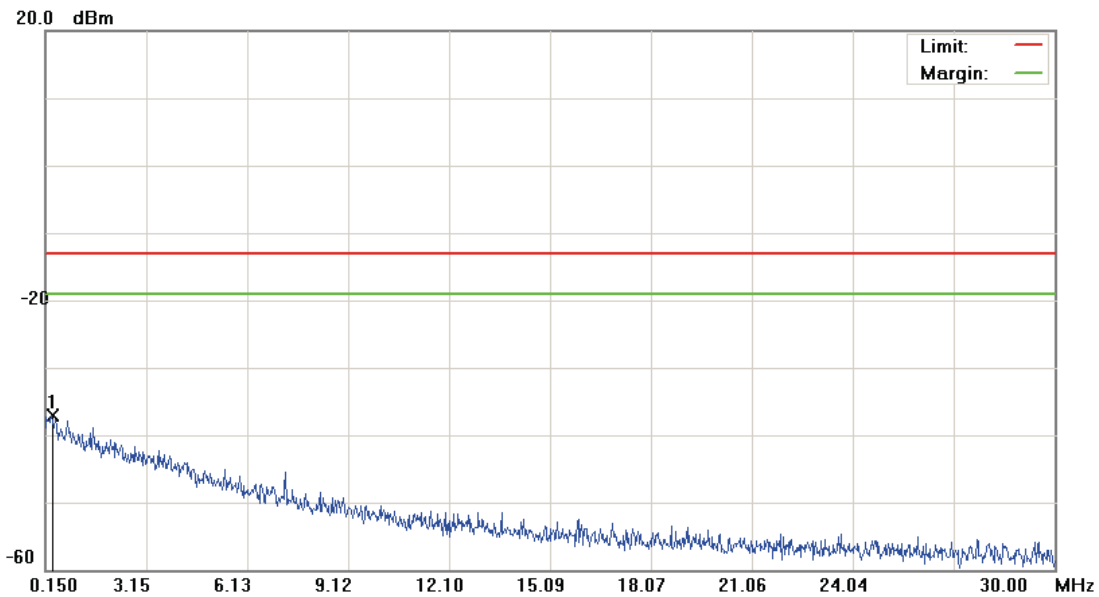

Site: site #1

Limit: FCC Part 22 conducted(9k-12.75G)

EUT: Module

M/N: AR7552

Mode: WCDMA Band V

Note:

Polarization: Conducted Power

Power: DC 3.7V

Distance:

Temperature: 26 °C

Humidity: 55 %

RBW: 10 KHz VBW: 30 KHz

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Antenna Height cm	Table Degree degree	Comment
1	*	0.3440	-68.86	31.85	-37.01	-13.00	-24.01	peak		


*:Maximum data x:Over limit !:over margin

File :AR7552(CH4132)

Data :#3

Date: 2015/4/30

Time: 下午 02:55:20

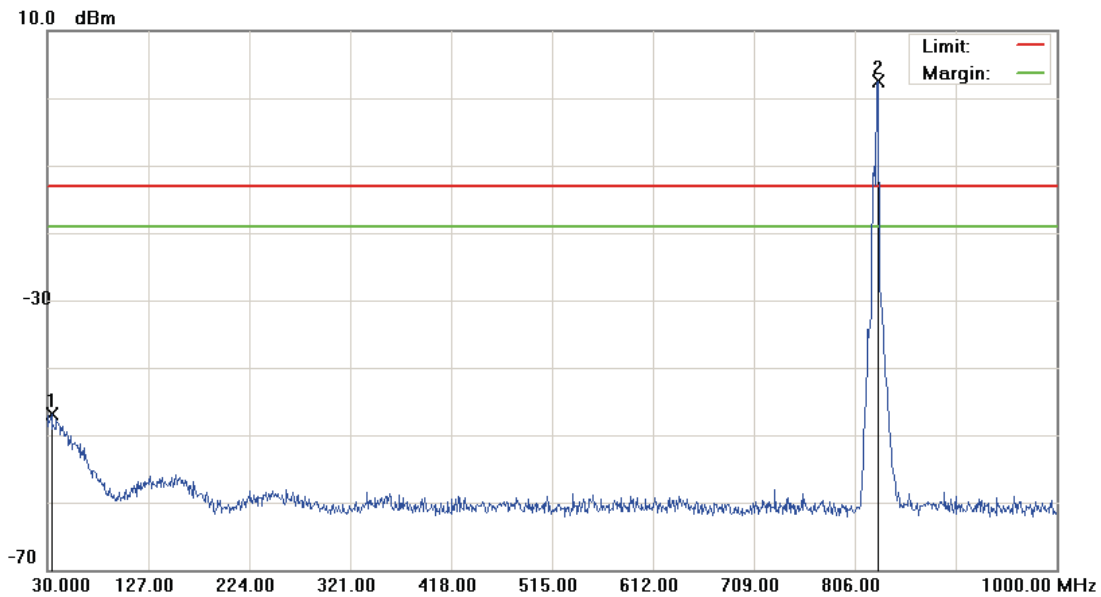

Site: site #1

Limit: FCC Part 22 conducted(9k-12.75G)

EUT: Module

M/N: AR7552

Mode: WCDMA Band V

Note:

Polarization: Conducted Power

Power: DC 3.7V

Distance:

Temperature: 26 °C

Humidity: 55 %

RBW: 100 KHz VBW: 300 KHz

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Antenna Height cm	Table Degree degree	Comment
1		34.3650	-63.66	16.72	-46.94	-13.00	-33.94	peak		
2	*	828.3100	-1.40	3.88	2.48	-13.00	15.48	peak		Tx


*:Maximum data x:Over limit !:over margin

File :AR7552(CH4132)

Data :#4

Date: 2015/4/30

Time: 下午 03:12:01

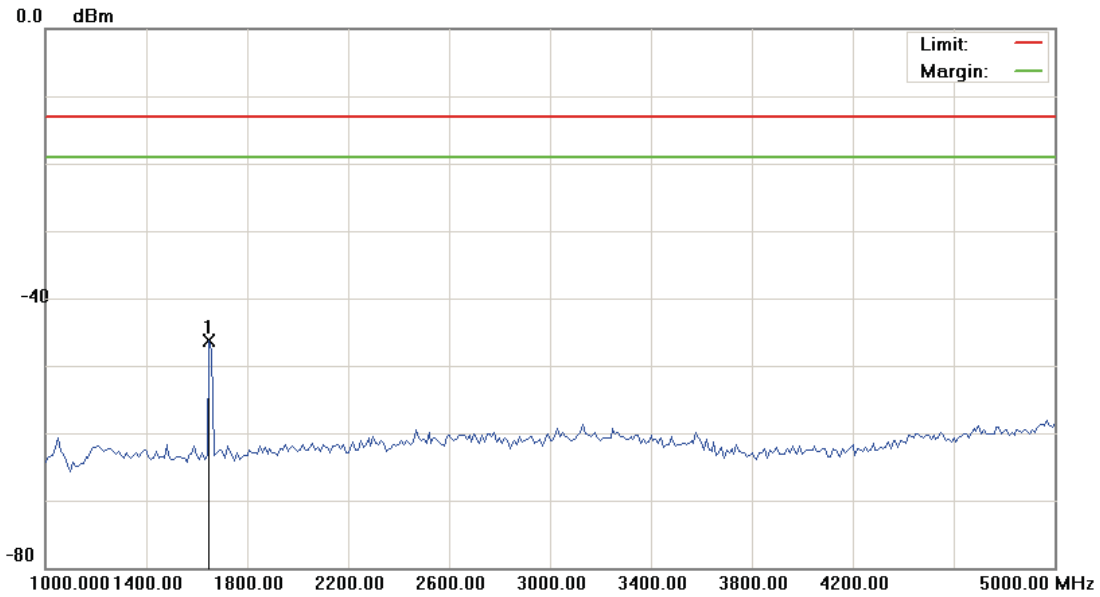

Site: site #1

Limit: FCC Part 22 conducted(9k-12.75G)

EUT: Module

M/N: AR7552

Mode: WCDMA Band V

Note:

Polarization: Conducted Power

Power: DC 3.7V

Distance:

Temperature: 26 °C

Humidity: 55 %

RBW: 1000 KHz VBW: 3000 KHz

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Antenna Height cm	Table Degree	Comment
1	*	1650.000	-50.70	4.45	-46.25	-13.00	-33.25	peak		


*:Maximum data x:Over limit !:over margin

File :AR7552(CH4132)

Data :#5

Date: 2015/4/30

Time: 下午 03:12:20

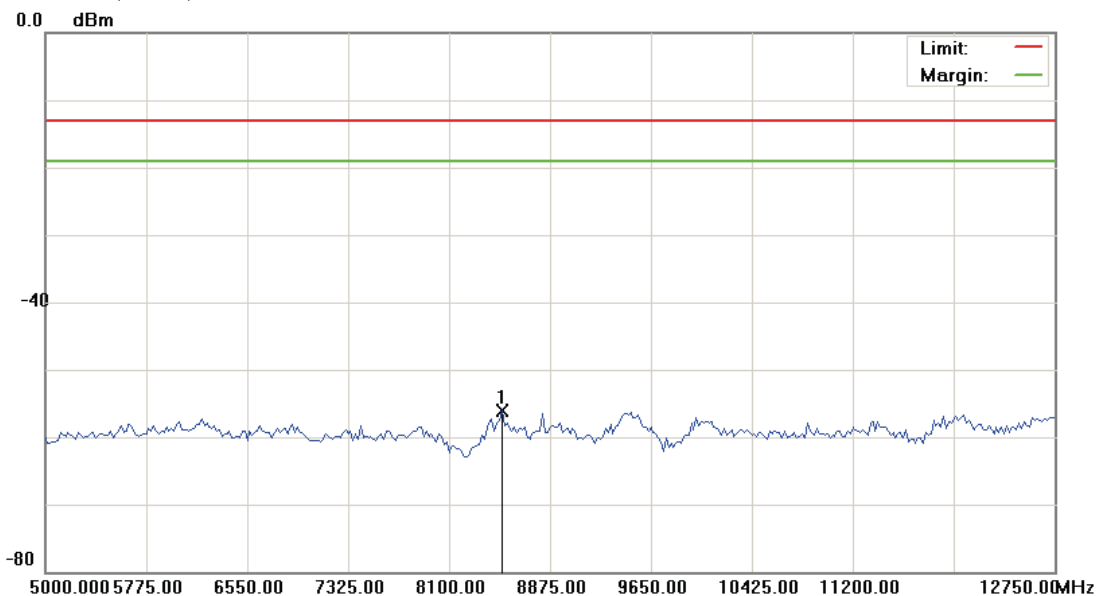

Site: site #1

Limit: FCC Part 22 conducted(9k-12.75G)

EUT: Module

M/N: AR7552

Mode: WCDMA Band V

Note:

Polarization: Conducted Power

Power: DC 3.7V

Distance:

Temperature: 26 °C

Humidity: 55 %

RBW: 1000 KHz VBW: 3000 KHz

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Antenna Height cm	Table Degree	Comment
1	*	8506.875	-61.83	5.68	-56.15	-13.00	-43.15	peak		


*:Maximum data x:Over limit !:over margin

File :AR7552(CH4183)

Data :#1

Date: 2015/4/30

Time: 下午 02:57:27

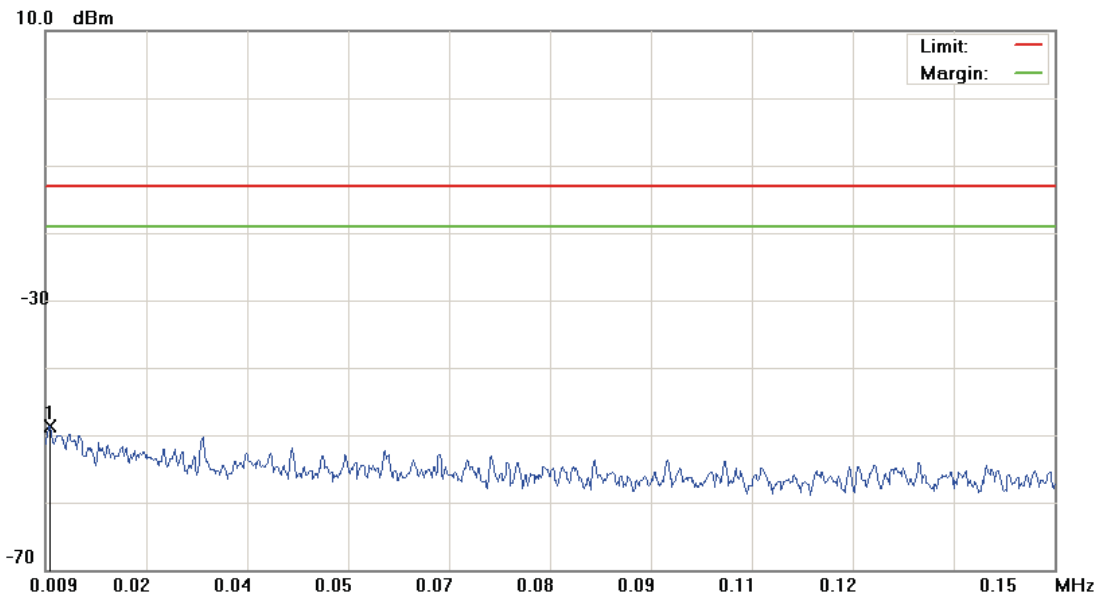

Site: site #1

Limit: FCC Part 22 conducted(9k-12.75G)

EUT: Module

M/N: AR7552

Mode: WCDMA Band V

Note:

Polarization: Conducted Power

Power: DC 3.7V

Distance:

Temperature: 26 °C

Humidity: 55 %

RBW: 1 KHz VBW: 3 KHz

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Antenna Height cm	Table Degree degree	Comment
1	*	0.0096	-79.27	30.58	-48.69	-13.00	-35.69	peak		


*:Maximum data x:Over limit !:over margin

File :AR7552(CH4183)

Data :#2

Date: 2015/4/30

Time: 下午 02:57:51

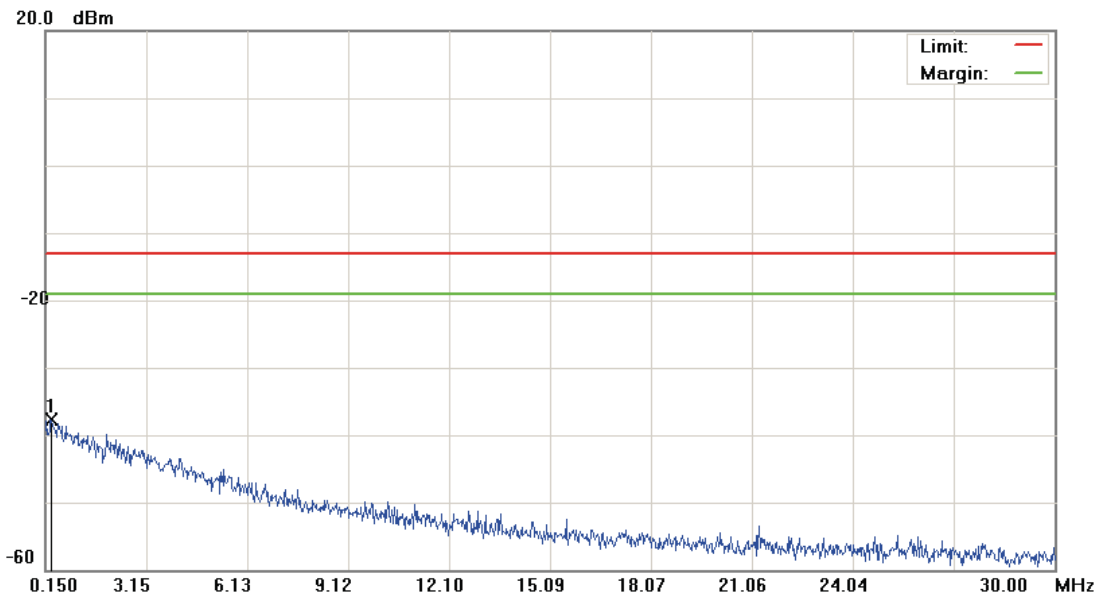

Site: site #1

Limit: FCC Part 22 conducted(9k-12.75G)

EUT: Module

M/N: AR7552

Mode: WCDMA Band V

Note:

Polarization: Conducted Power

Power: DC 3.7V

Distance:

Temperature: 26 °C

Humidity: 55 %

RBW: 10 KHz VBW: 30 KHz

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Antenna Height cm	Table Degree degree	Comment
1	*	0.3141	-69.48	31.82	-37.66	-13.00	-24.66	peak		


*:Maximum data x:Over limit !:over margin

File :AR7552(CH4183)

Data :#3

Date: 2015/4/30

Time: 下午 02:58:15

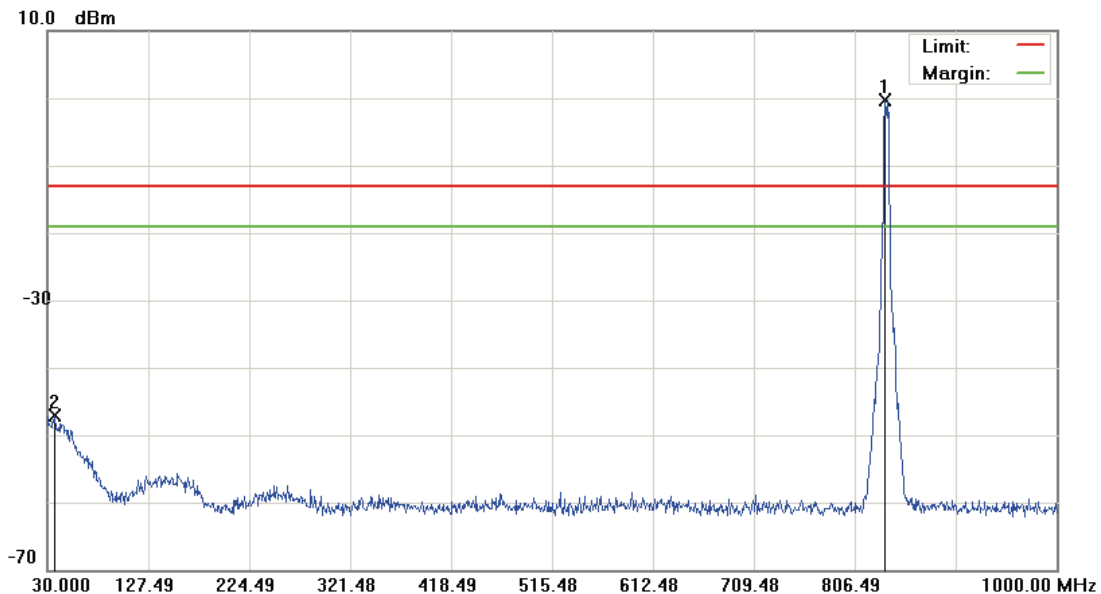

Site: site #1

Limit: FCC Part 22 conducted(9k-12.75G)

EUT: Module

M/N: AR7552

Mode: WCDMA Band V

Note:

Polarization: Conducted Power

Power: DC 3.7V

Distance:

Temperature: 26 °C

Humidity: 55 %

RBW: 100 KHz VBW: 300 KHz

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Antenna Height cm	Table Degree degree	Comment
1	*	835.1000	-4.17	3.95	-0.22	-13.00	12.78	peak		
2		36.7900	-63.47	16.44	-47.03	-13.00	-34.03	peak		


*:Maximum data x:Over limit !:over margin

File :AR7552(CH4183)

Data :#4

Date: 2015/4/30

Time: 下午 03:13:31

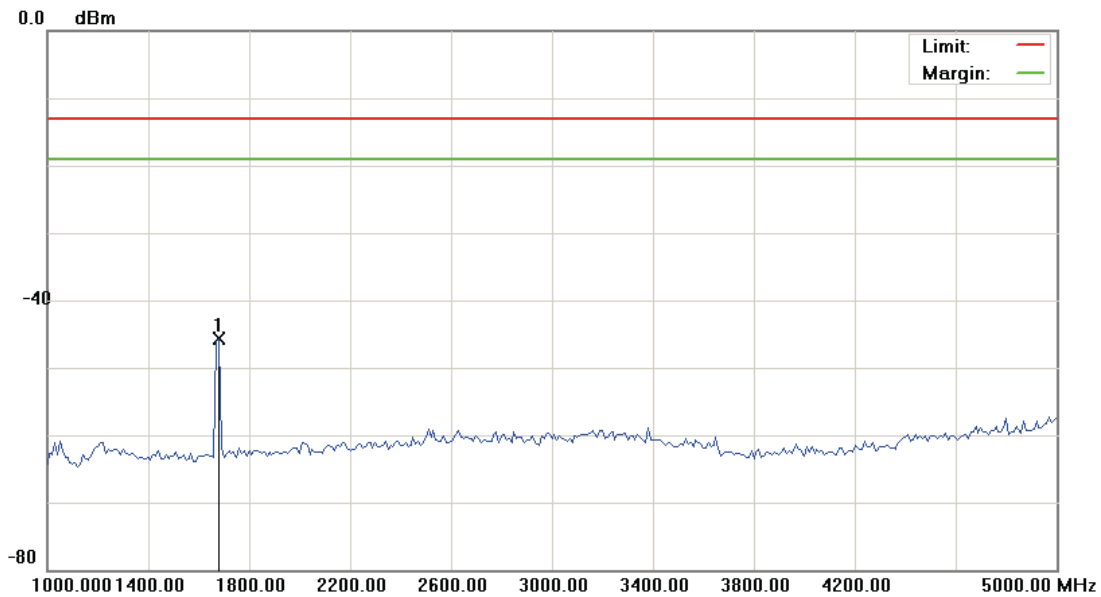

Site: site #1

Limit: FCC Part 22 conducted(9k-12.75G)

EUT: Module

M/N: AR7552

Mode: WCDMA Band V

Note:

Polarization: Conducted Power

Power: DC 3.7V

Distance:

Temperature: 26 °C

Humidity: 55 %

RBW: 1000 KHz VBW: 3000 KHz

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Antenna Height cm	Table Degree	Comment
1	*	1680.000	-50.12	4.47	-45.65	-13.00	-32.65	peak		


*:Maximum data x:Over limit !:over margin

File :AR7552(CH4183)

Data :#5

Date: 2015/4/30

Time: 下午 03:13:50

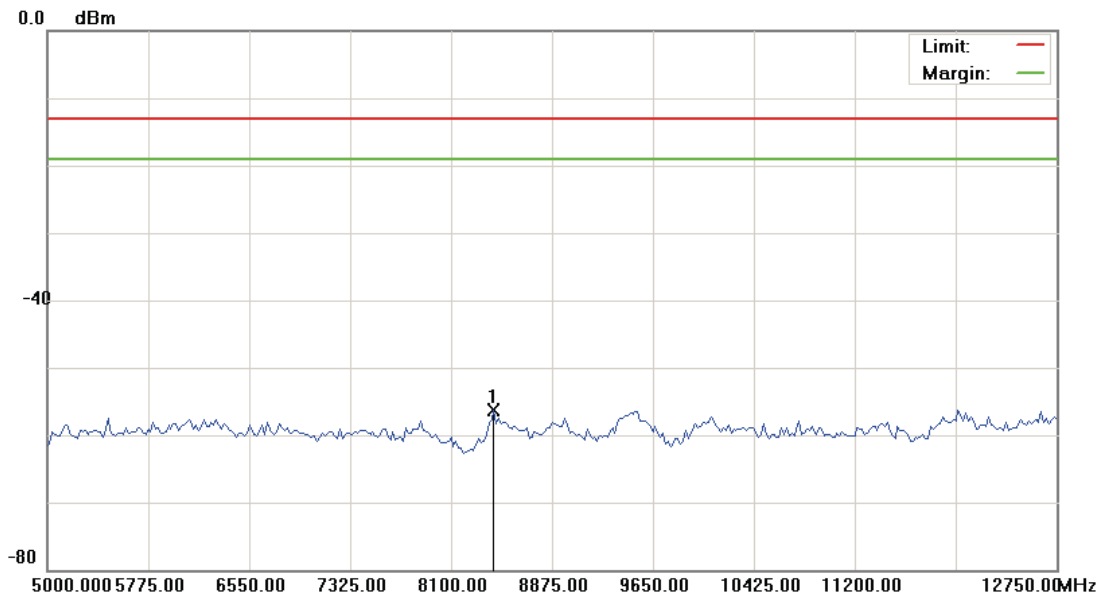

Site: site #1

Limit: FCC Part 22 conducted(9k-12.75G)

EUT: Module

M/N: AR7552

Mode: WCDMA Band V

Note:

Polarization: Conducted Power

Power: DC 3.7V

Distance:

Temperature: 26 °C

Humidity: 55 %

RBW: 1000 KHz VBW: 3000 KHz

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Antenna Height cm	Table Degree	Comment
1	*	8429.375	-61.84	5.55	-56.29	-13.00	-43.29	peak		


*:Maximum data x:Over limit !:over margin

File :AR7552(CH4233)

Data :#1

Date: 2015/4/30

Time: 下午 02:59:48

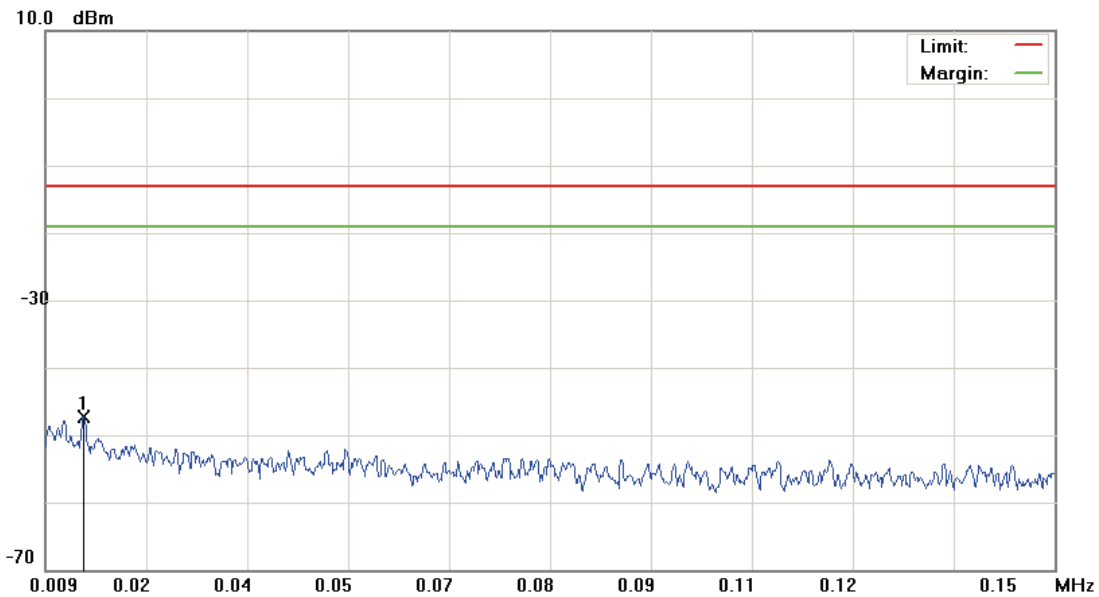

Site: site #1

Limit: FCC Part 22 conducted(9k-12.75G)

EUT: Module

M/N: AR7552

Mode: WCDMA Band V

Note:

Polarization: Conducted Power

Power: DC 3.7V

Distance:

Temperature: 26 °C

Humidity: 55 %

RBW: 1 KHz VBW: 3 KHz

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Antenna Height cm	Table Degree degree	Comment
1	*	0.0143	-77.91	30.56	-47.35	-13.00	-34.35	peak		


*:Maximum data x:Over limit !:over margin

File :AR7552(CH4233)

Data :#2

Date: 2015/4/30

Time: 下午 03:00:12

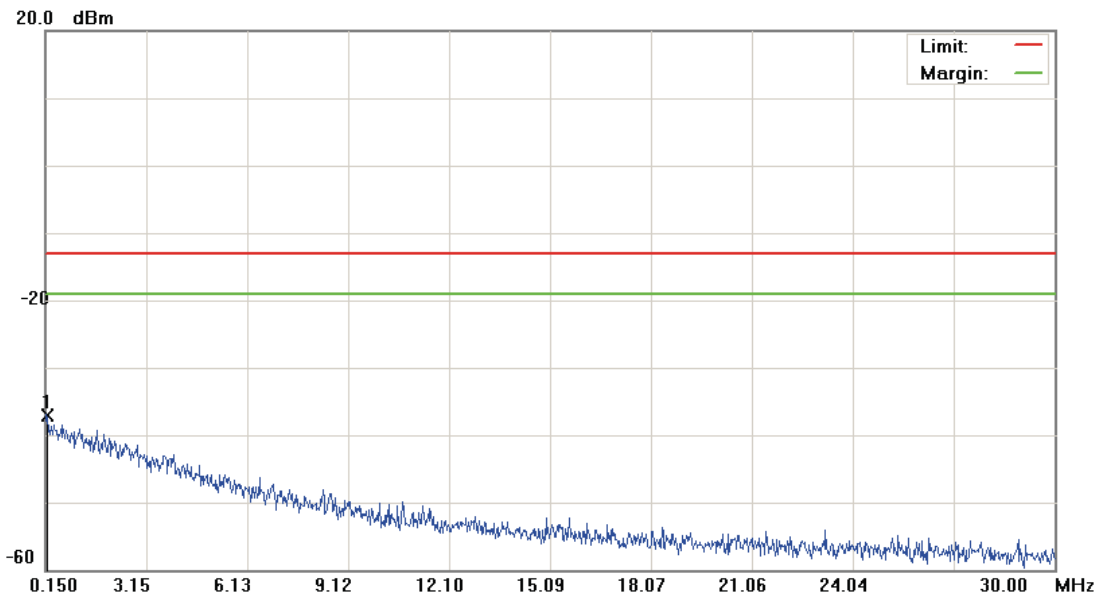

Site: site #1

Limit: FCC Part 22 conducted(9k-12.75G)

EUT: Module

M/N: AR7552

Mode: WCDMA Band V

Note:

Polarization: Conducted Power

Power: DC 3.7V

Distance:

Temperature: 26 °C

Humidity: 55 %

RBW: 10 KHz VBW: 30 KHz

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Antenna Height cm	Table Degree degree	Comment
1	*	0.1948	-67.88	30.88	-37.00	-13.00	-24.00	peak		


*:Maximum data x:Over limit !:over margin

File :AR7552(CH4233)

Data :#3

Date: 2015/4/30

Time: 下午 03:00:36

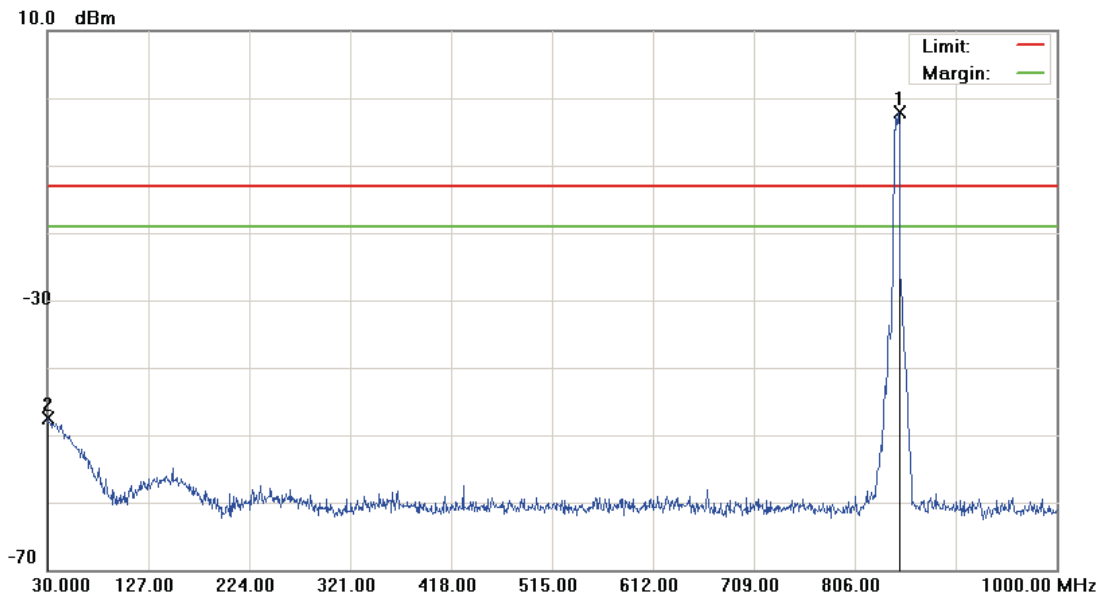

Site: site #1

Limit: FCC Part 22 conducted(9k-12.75G)

EUT: Module

M/N: AR7552

Mode: WCDMA Band V

Note:

Polarization: Conducted Power

Power: DC 3.7V

Distance:

Temperature: 26 °C

Humidity: 55 %

RBW: 100 KHz VBW: 300 KHz

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Antenna Height cm	Table Degree degree	Comment
1	*	848.1950	-6.06	3.98	-2.08	-13.00	10.92	peak		
2		30.0000	-64.73	17.21	-47.52	-13.00	-34.52	peak		


*:Maximum data x:Over limit !:over margin

File :AR7552(CH4233)

Data :#4

Date: 2015/4/30

Time: 下午 03:14:36

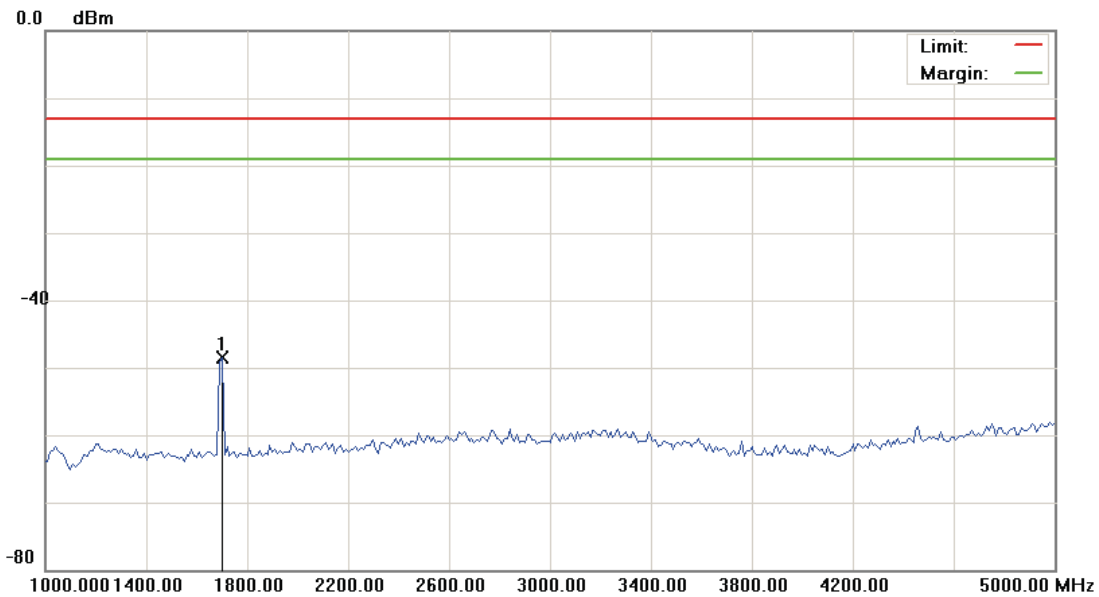

Site: site #1

Limit: FCC Part 22 conducted(9k-12.75G)

EUT: Module

M/N: AR7552

Mode: WCDMA Band V

Note:

Polarization: Conducted Power

Power: DC 3.7V

Distance:

Temperature: 26 °C

Humidity: 55 %

RBW: 1000 KHz VBW: 3000 KHz

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Antenna Height cm	Table Degree	Comment
1	*	1700.000	-52.95	4.48	-48.47	-13.00	-35.47	peak		


*:Maximum data x:Over limit !:over margin

File :AR7552(CH4233)

Data :#5

Date: 2015/4/30

Time: 下午 03:14:54

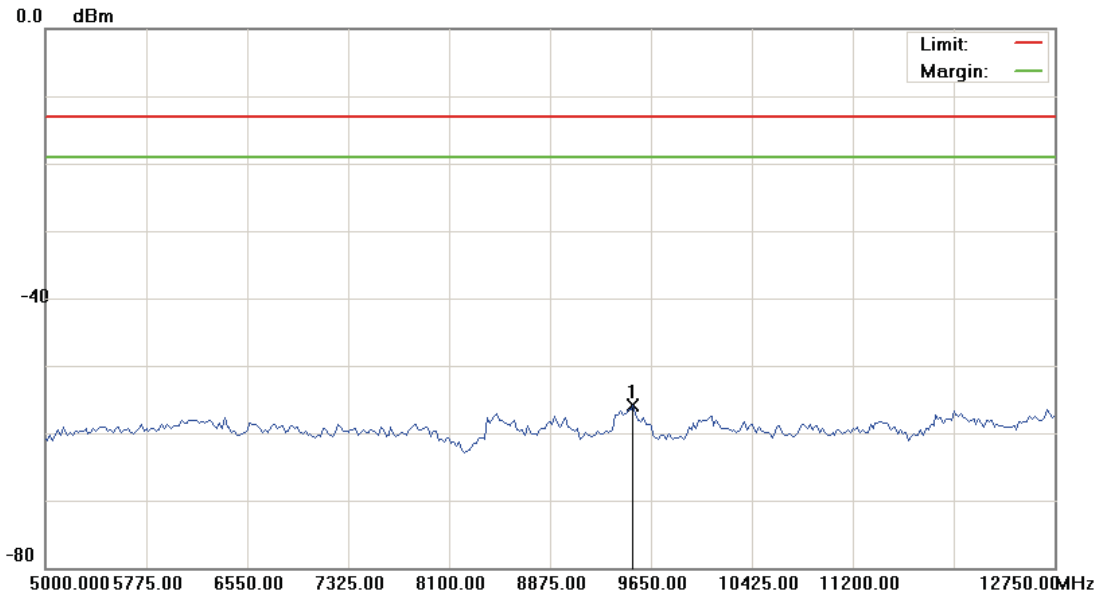

Site: site #1

Limit: FCC Part 22 conducted(9k-12.75G)

EUT: Module

M/N: AR7552

Mode: WCDMA Band V

Note:

Polarization: Conducted Power

Power: DC 3.7V

Distance:

Temperature: 26 °C

Humidity: 55 %

RBW: 1000 KHz VBW: 3000 KHz

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Antenna Height cm	Table Degree	Detector	Comment
1	*	9514.375	-61.18	5.20	-55.98	-13.00	-42.98			peak	

*:Maximum data x:Over limit !:over margin

Model Number	AR7552		
Test Item	Radiation Emission		
Test Mode	Mode 1 / Mode 2		
Date of Test	04/30/2015	Test Site	TE05

Band	CH	Frequency (MHz)	Measurement (dBm)	Antenna Gain (dBi)	EIRP (dBm)	ERP (dBm)	Limit (dBm)	Over (dB)
WCDMA Band II	9262	0.0136	-58.85	5	-53.85	-56.00	-13.00	-43.00
		0.2097	-56.81	5	-51.81	-53.96	-13.00	-40.96
		613.4550	-49.02	5	-44.02	-46.17	-13.00	-33.17
		-58.85	-45.20	5	-40.20		-13.00	-27.20
		3695.5000	-40.11	5	-35.11		-13.00	-22.11
		16900.6250	-48.64	5	-43.64		-13.00	-30.64
	9400	0.0110	-59.39	5	-54.39	-56.54	-13.00	-43.54
		0.4336	-56.25	5	-51.25	-53.40	-13.00	-40.40
		167.2550	-49.04	5	-44.04	-46.19	-13.00	-33.19
		2792.8000	-45.26	5	-40.26		-13.00	-27.26
		3770.1250	-44.68	5	-39.68		-13.00	-26.68
		16828.1250	-48.22	5	-43.22		-13.00	-30.22
	9538	0.0115	-56.65	5	-51.65	-53.80	-13.00	-40.80
		0.4485	-56.77	5	-51.77	-53.92	-13.00	-40.92
		519.8500	-48.85	5	-43.85	-46.00	-13.00	-33.00
		1986.4000	-45.36	5	-40.36		-13.00	-27.36
		3819.8750	-40.50	5	-35.50		-13.00	-22.50
		16955.0000	-48.28	5	-43.28		-13.00	-30.28

Band	CH	Frequency (MHz)	Measurement (dBm)	Antenna Gain (dBi)	EIRP (dBm)	ERP (dBm)	Limit (dBm)	Over (dB)
WCDMA Band V	4132	0.0120	-49.13	5	-44.13	-46.28	-13.00	-33.28
		0.3440	-37.01	5	-32.01	-34.16	-13.00	-21.16
		34.3650	-46.94	5	-41.94	-44.09	-13.00	-31.09
		1650.0000	-46.25	5	-41.25		-13.00	-28.25
		8506.8750	-56.15	5	-51.15		-13.00	-38.15
	4183	0.0096	-48.69	5	-43.69	-45.84	-13.00	-32.84
		0.3141	-37.66	5	-32.66	-34.81	-13.00	-21.81
		36.7900	-47.03	5	-42.03	-44.18	-13.00	-31.18
		1680.0000	-45.65	5	-40.65		-13.00	-27.65
		8429.3750	-56.29	5	-51.29		-13.00	-38.29
	4233	0.0143	-47.35	5	-42.35	-44.50	-13.00	-31.50
		0.1948	-37.00	5	-32.00	-34.15	-13.00	-21.15
		30.0000	-47.52	5	-42.52	-44.67	-13.00	-31.67
		1700.0000	-48.47	5	-43.47		-13.00	-30.47
		9514.3750	-55.98	5	-50.98		-13.00	-37.98

8 Field Strength of Spurious Radiation Test

8.1. Limit

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10\log(P)$ dB.

It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10th harmonic.

8.2. Test Instruments


3 Meter Chamber					
Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
RF Pre-selector	Agilent	N9039A	MY46520256	01/06/2015	(1)
Spectrum Analyzer	Agilent	E4446A	MY46180578	01/06/2015	(1)
Pre Amplifier	Agilent	8449B	3008A02237	02/24/2015	(1)
Pre Amplifier	Agilent	8447D	2944A10961	02/24/2015	(1)
Broadband Antenna (30MHz~1GHz)	SCHWARZBECK MESS-ELEKTRONIK	VULB9163	9163-270	07/22/2014	(1)
Horn Antenna (1~18GHz)	SCHWARZBECK MESS-ELEKTRONIK	BBHA9120D	9120D-550	06/11/2014	(1)
Horn Antenna (18~40GHz)	SCHWARZBECK MESS-ELEKTRONIK	BBHA9170	9170-320	07/02/2014	(1)
Test Site	ATL	TE01	888001	08/28/2014	(1)

Remark: ⁽¹⁾ Calibration period 1 year. ⁽²⁾ Calibration period 2 years.


Note: N.C.R. = No Calibration Request.


8.3. Setup

Below 1GHz

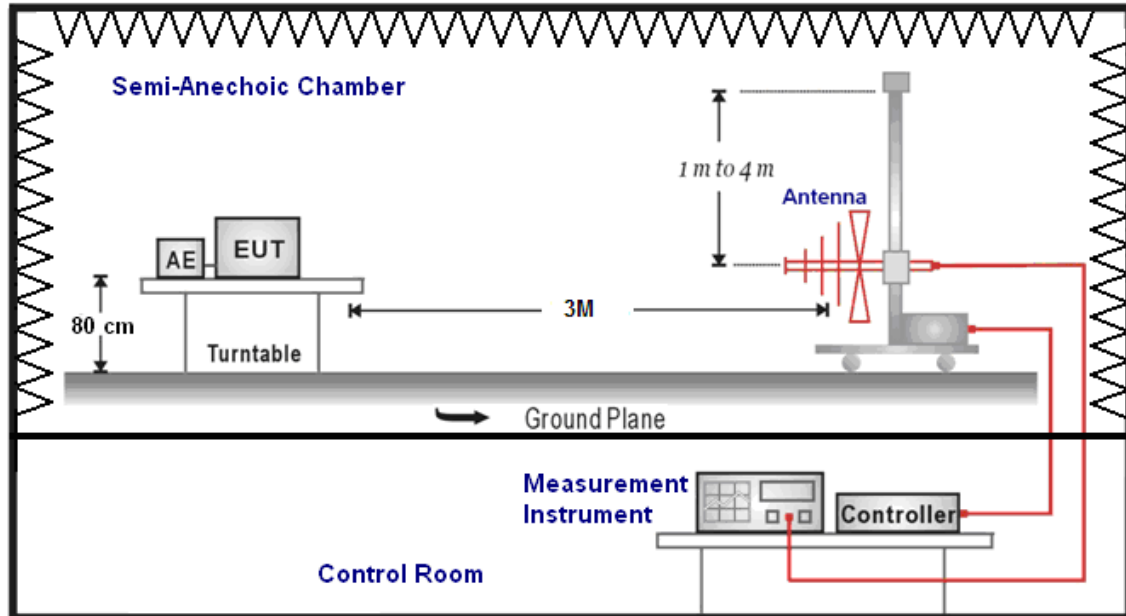

Above 1GHz

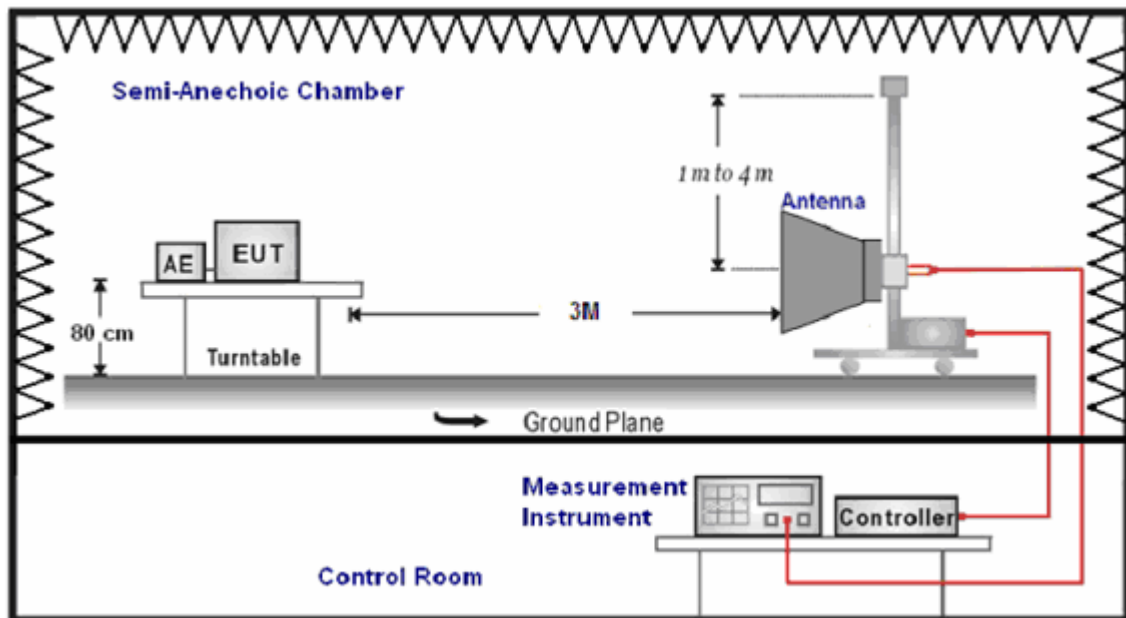

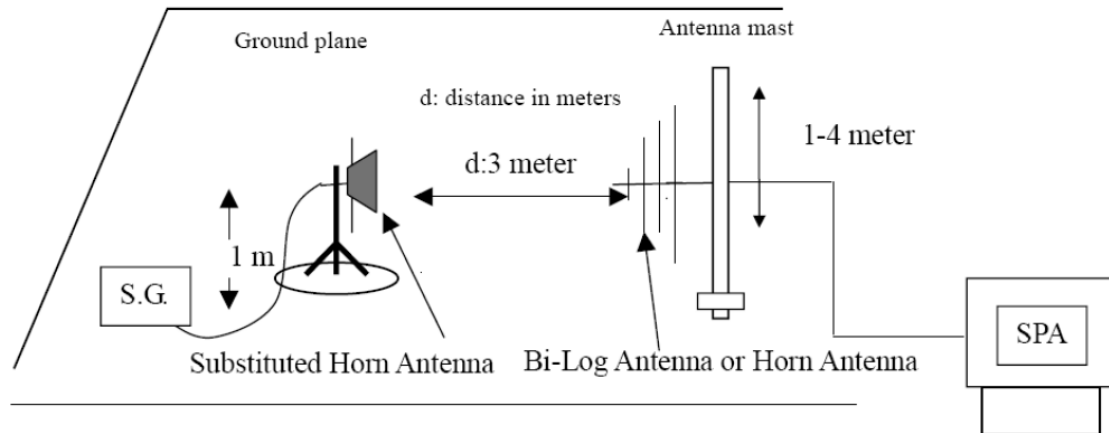

8.4. Test Procedure

- The EUT was set up for the maximum power with LTE link data modulation. The power was measured with Spectrum Analyzer. All measurements were done at 3 channels (low, middle and high operational frequency range). RWB and VBW is 1MHz for LTE and 5MHz for WCDMA mode.
- Radiation Emission power measurement. In the semi-anechoic chamber, EUT placed on the 0.8m height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power. The "Read Value" is the spectrum reading the maximum power value.
- The substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a TX cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to "Read Value" of step a. Record the power level of S.G.
- $E.I.R.P. = \text{Output power level of S.G} - \text{TX cable loss} + \text{Antenna gain of substitution horn}$
- $E.R.P. = E.I.R.P. - 2.15 \text{ dB}$

8.5. Uncertainty

The measurement uncertainty is defined as for Field Strength of Spurious Radiation measurement is $\pm 3.072 \text{ dB}$.

8.6. Test Result

Standard:	FCC Part 24	Test Distance:	3m
Test item:	Radiated Emission	Power:	DC 3.8V
Model Number:	AR7552	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	5	Date:	04/29/2015
Frequency:	1852.4 MHz	Test By:	Eric Ou Yang

Frequency (MHz)	Reading (dBm)	Correct Factor (dB)	Result (dBm)	Limit (dBm)	Margin (dB)	Remark	Ant.Polar. H / V
136.0000	-72.62	1.90	-70.72	-13.00	-57.72	peak	H
199.5000	-83.44	3.05	-80.39	-13.00	-67.39	peak	H
342.0000	-81.17	-0.09	-81.26	-13.00	-68.26	peak	H
538.0000	-79.89	8.46	-71.43	-13.00	-58.43	peak	H
605.5000	-80.16	8.08	-72.08	-13.00	-59.08	peak	H
676.5000	-79.75	7.92	-71.83	-13.00	-58.83	peak	H
3220.000	-70.15	14.56	-55.59	-13.00	-42.59	peak	H
4804.000	-74.25	19.59	-54.66	-13.00	-41.66	peak	H
7252.000	-74.83	25.95	-48.88	-13.00	-35.88	peak	H
129.5000	-82.21	19.56	-62.65	-13.00	-49.65	peak	V
203.5000	-83.28	10.12	-73.16	-13.00	-60.16	peak	V
302.5000	-81.44	3.05	-78.39	-13.00	-65.39	peak	V
358.0000	-80.89	2.61	-78.28	-13.00	-65.28	peak	V
512.0000	-79.22	3.30	-75.92	-13.00	-62.92	peak	V
646.5000	-79.77	9.45	-70.32	-13.00	-57.32	peak	V
3172.000	-70.68	14.30	-56.38	-13.00	-43.38	peak	V
4708.000	-74.26	19.29	-54.97	-13.00	-41.97	peak	V
7132.000	-74.44	25.45	-48.99	-13.00	-35.99	peak	V

Standard:	FCC Part 24	Test Distance:	3m
Test item:	Radiated Emission	Power:	DC 3.8V
Model Number:	AR7552	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	5	Date:	04/29/2015
Frequency:	1880.0 MHz	Test By:	Eric Ou Yang

Frequency (MHz)	Reading (dBm)	Correct Factor (dB)	Result (dBm)	Limit (dBm)	Margin (dB)	Remark	Ant.Polar. H / V
135.0000	-76.03	1.74	-74.29	-13.00	-61.29	peak	H
160.0000	-80.02	8.40	-71.62	-13.00	-58.62	peak	H
414.0000	-81.52	3.52	-78.00	-13.00	-65.00	peak	H
532.5000	-80.89	8.30	-72.59	-13.00	-59.59	peak	H
612.5000	-80.72	8.08	-72.64	-13.00	-59.64	peak	H
709.0000	-80.94	8.24	-72.70	-13.00	-59.70	peak	H
3268.000	-71.12	14.80	-56.32	-13.00	-43.32	peak	H
4780.000	-73.58	19.52	-54.06	-13.00	-41.06	peak	H
7120.000	-75.29	25.40	-49.89	-13.00	-36.89	peak	H
135.0000	-79.26	18.18	-61.08	-13.00	-48.08	peak	V
208.0000	-80.22	9.42	-70.80	-13.00	-57.80	peak	V
360.0000	-80.51	2.73	-77.78	-13.00	-64.78	peak	V
479.0000	-79.85	2.80	-77.05	-13.00	-64.05	peak	V
612.5000	-80.28	8.64	-71.64	-13.00	-58.64	peak	V
716.5000	-77.76	11.79	-65.97	-13.00	-52.97	peak	V
3280.000	-70.73	14.86	-55.87	-13.00	-42.87	peak	V
4804.000	-74.69	19.59	-55.10	-13.00	-42.10	peak	V
7216.000	-74.53	25.79	-48.74	-13.00	-35.74	peak	V

Standard:	FCC Part 24	Test Distance:	3m
Test item:	Radiated Emission	Power:	DC 3.8V
Model Number:	AR7552	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	5	Date:	04/29/2015
Frequency:	1907.6 MHz	Test By:	Eric Ou Yang

Frequency (MHz)	Reading (dBm)	Correct Factor (dB)	Result (dBm)	Limit (dBm)	Margin (dB)	Remark	Ant.Polar. H / V
135.5000	-75.51	1.82	-73.69	-13.00	-60.69	peak	H
203.5000	-81.74	2.53	-79.21	-13.00	-66.21	peak	H
320.5000	-81.88	-0.34	-82.22	-13.00	-69.22	peak	H
496.0000	-81.19	7.12	-74.07	-13.00	-61.07	peak	H
612.5000	-80.94	8.08	-72.86	-13.00	-59.86	peak	H
716.5000	-78.44	8.44	-70.00	-13.00	-57.00	peak	H
3232.000	-69.20	14.62	-54.58	-13.00	-41.58	peak	H
4816.000	-74.19	19.63	-54.56	-13.00	-41.56	peak	H
7168.000	-73.40	25.58	-47.82	-13.00	-34.82	peak	H
132.5000	-78.87	19.17	-59.70	-13.00	-46.70	peak	V
206.5000	-80.97	9.65	-71.32	-13.00	-58.32	peak	V
304.0000	-80.70	2.92	-77.78	-13.00	-64.78	peak	V
393.5000	-81.19	1.66	-79.53	-13.00	-66.53	peak	V
581.0000	-81.04	6.11	-74.93	-13.00	-61.93	peak	V
683.0000	-80.36	10.58	-69.78	-13.00	-56.78	peak	V
3280.000	-71.17	14.86	-56.31	-13.00	-43.31	peak	V
4804.000	-74.43	19.59	-54.84	-13.00	-41.84	peak	V
7168.000	-74.29	25.58	-48.71	-13.00	-35.71	peak	V

Standard:	FCC Part 22	Test Distance:	3m
Test item:	Radiated Emission	Power:	DC 3.8V
Model Number:	AR7552	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	6	Date:	04/29/2015
Frequency:	826.4 MHz	Test By:	Eric Ou Yang

Frequency (MHz)	Reading (dBm)	Correct Factor (dB)	Result (dBm)	Limit (dBm)	Margin (dB)	Remark	Ant.Polar. H / V
160.5000	-80.22	7.94	-72.28	-13.00	-59.28	peak	H
288.5000	-82.14	-2.90	-85.04	-13.00	-72.04	peak	H
397.0000	-81.19	2.51	-78.68	-13.00	-65.68	peak	H
493.5000	-80.78	6.98	-73.80	-13.00	-60.80	peak	H
582.5000	-80.57	7.76	-72.81	-13.00	-59.81	peak	H
716.5000	-73.69	8.44	-65.25	-13.00	-52.25	peak	H
3280.000	-71.16	14.86	-56.30	-13.00	-43.30	peak	H
4732.000	-74.17	19.36	-54.81	-13.00	-41.81	peak	H
7180.000	-74.84	25.64	-49.20	-13.00	-36.20	peak	H
135.0000	-77.77	18.18	-59.59	-13.00	-46.59	peak	V
201.0000	-81.72	10.50	-71.22	-13.00	-58.22	peak	V
309.5000	-80.60	2.48	-78.12	-13.00	-65.12	peak	V
473.5000	-80.40	2.63	-77.77	-13.00	-64.77	peak	V
593.5000	-81.67	7.07	-74.60	-13.00	-61.60	peak	V
716.5000	-78.97	11.79	-67.18	-13.00	-54.18	peak	V
3232.000	-70.03	14.62	-55.41	-13.00	-42.41	peak	V
4816.000	-74.32	19.63	-54.69	-13.00	-41.69	peak	V
7108.000	-72.79	25.35	-47.44	-13.00	-34.44	peak	V

Standard:	FCC Part 22	Test Distance:	3m
Test item:	Radiated Emission	Power:	DC 3.8V
Model Number:	AR7552	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	6	Date:	04/29/2015
Frequency:	836.6 MHz	Test By:	Eric Ou Yang

Frequency (MHz)	Reading (dBm)	Correct Factor (dB)	Result (dBm)	Limit (dBm)	Margin (dB)	Remark	Ant.Polar. H / V
135.0000	-74.77	1.74	-73.03	-13.00	-60.03	peak	H
211.5000	-79.99	0.69	-79.30	-13.00	-66.30	peak	H
324.0000	-81.65	-0.29	-81.94	-13.00	-68.94	peak	H
464.0000	-80.37	5.34	-75.03	-13.00	-62.03	peak	H
560.0000	-80.52	8.02	-72.50	-13.00	-59.50	peak	H
693.5000	-81.02	7.98	-73.04	-13.00	-60.04	peak	H
3292.000	-72.29	14.93	-57.36	-13.00	-44.36	peak	H
4768.000	-74.45	19.48	-54.97	-13.00	-41.97	peak	H
7156.000	-75.75	25.54	-50.21	-13.00	-37.21	peak	H
130.5000	-82.23	19.96	-62.27	-13.00	-49.27	peak	V
209.0000	-82.43	9.27	-73.16	-13.00	-60.16	peak	V
359.5000	-78.70	2.71	-75.99	-13.00	-62.99	peak	V
458.0000	-81.68	2.20	-79.48	-13.00	-66.48	peak	V
579.0000	-80.71	5.96	-74.75	-13.00	-61.75	peak	V
716.5000	-71.84	11.79	-60.05	-13.00	-47.05	peak	V
3292.000	-71.71	14.93	-56.78	-13.00	-43.78	peak	V
4768.000	-72.47	19.48	-52.99	-13.00	-39.99	peak	V
7204.000	-75.30	25.75	-49.55	-13.00	-36.55	peak	V

Standard:	FCC Part 22	Test Distance:	3m
Test item:	Radiated Emission	Power:	DC 3.8V
Model Number:	AR7552	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	6	Date:	04/29/2015
Frequency:	846.6 MHz	Test By:	Eric Ou Yang

Frequency (MHz)	Reading (dBm)	Correct Factor (dB)	Result (dBm)	Limit (dBm)	Margin (dB)	Remark	Ant.Polar. H / V
159.0000	-81.04	8.16	-72.88	-13.00	-59.88	peak	H
202.5000	-81.21	2.79	-78.42	-13.00	-65.42	peak	H
387.5000	-80.49	1.68	-78.81	-13.00	-65.81	peak	H
536.5000	-79.62	8.41	-71.21	-13.00	-58.21	peak	H
597.5000	-80.11	8.03	-72.08	-13.00	-59.08	peak	H
685.0000	-80.11	7.94	-72.17	-13.00	-59.17	peak	H
3316.000	-71.17	15.05	-56.12	-13.00	-43.12	peak	H
4804.000	-73.60	19.59	-54.01	-13.00	-41.01	peak	H
7108.000	-74.99	25.35	-49.64	-13.00	-36.64	peak	H
132.5000	-80.55	19.17	-61.38	-13.00	-48.38	peak	V
211.5000	-81.39	8.62	-72.77	-13.00	-59.77	peak	V
357.5000	-80.13	2.60	-77.53	-13.00	-64.53	peak	V
448.0000	-80.81	2.08	-78.73	-13.00	-65.73	peak	V
543.5000	-80.08	4.52	-75.56	-13.00	-62.56	peak	V
702.5000	-80.90	11.32	-69.58	-13.00	-56.58	peak	V
3220.000	-72.31	14.56	-57.75	-13.00	-44.75	peak	V
4852.000	-72.84	19.74	-53.10	-13.00	-40.10	peak	V
7132.000	-75.07	25.45	-49.62	-13.00	-36.62	peak	V

9 Frequency Stability (Temperature & Voltage Variation) Test

9.1. Limit

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ ($\pm 2.5\text{ppm}$) of the center frequency.


9.2. Test Instruments

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
Universal Radio Communication Tester	R & S	CMU200	109369	08/11/2014	(2)
Temperature & Humidity Chamber	TAICHY	MHU-225LA	980729	08/11/2014	(1)
Test Site	ATL	TE05	TE05	N.C.R.	-----

Remark: ⁽¹⁾ Calibration period 1 year. ⁽²⁾ Calibration period 2 years.

Note: N.C.R. = No Calibration Request.

9.3. Setup

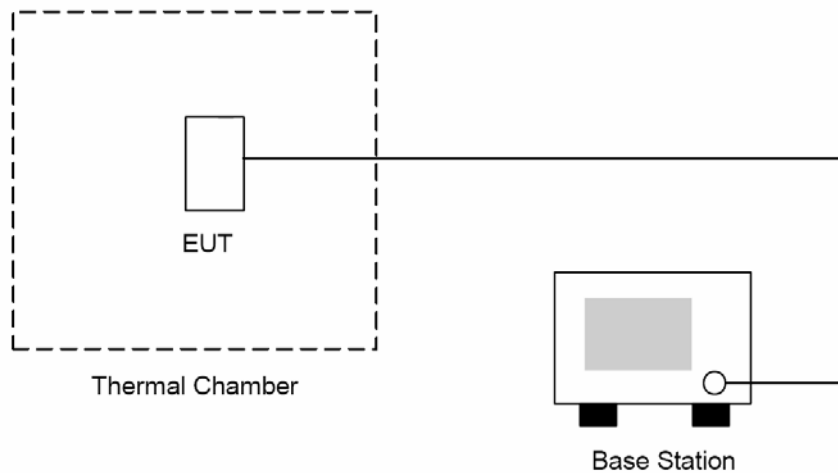

9.4. Test Procedure

The measurement is made according to FCC rules part 22 and 24:

1. The EUT and test equipment were set up as shown on the following section.
2. With all power removed, the temperature was decreased to -30°C and permitted to stabilize for three hours. Power was applied and the maximum change in frequency was note within one minute.
3. With power OFF, the temperature was raised in 10°C steps. The sample was permitted to stabilize at each step for at least one-half hour. Power was applied and the maximum frequency change was noted within one minute.
4. The EUT was placed in a temperature chamber at $25 \pm 5^{\circ}\text{C}$ and connected as the following section.
5. The power supply voltage to the EUT was varied from BEP to 115% of the nominal value measured at the input to the EUT.
6. The temperature tests were performed for the worst case.
7. Test data was recorded.

9.5. Uncertainty

The measurement uncertainty is defined as for Frequency Stability (Temperature Variation) measurement is $\pm 10\text{Hz}$.

9.6. Test Result

Model Number	AR7552					
Test Item	Frequency Stability (Temperature & Voltage Variation)					
Test Mode	Mode 1					
Date of Test	05/05/2015				Test Site	TE05
Level	Voltage [Vdc]	Temperature (°C)	Deviation (Hz)	Deviation (ppm)	Limit (ppm)	Result
Normal	3.70	-30	-16.02	-0.009	±2.5	Pass
Normal	3.70	-20	17.56	0.009	±2.5	Pass
Normal	3.70	-10	-36.68	-0.020	±2.5	Pass
Normal	3.70	0	-23.95	-0.013	±2.5	Pass
Normal	3.70	10	-5.76	-0.003	±2.5	Pass
Battery full point	4.20	20	15.13	0.008	±2.5	Pass
Normal	3.70	20	-34.15	-0.018	±2.5	Pass
Battery cut-off point	3.40	20	-16.92	-0.009	±2.5	Pass
Normal	3.70	30	-3.88	-0.002	±2.5	Pass
Normal	3.70	40	7.94	0.004	±2.5	Pass
Normal	3.70	50	10.84	0.006	±2.5	Pass
Normal	3.70	60	-20.14	-0.011	±2.5	Pass
Normal	3.70	70	8.19	0.004	±2.5	Pass

Model Number	AR7552					
Test Item	Frequency Stability (Temperature & Voltage Variation)					
Test Mode	Mode 2					
Date of Test	05/05/2015				Test Site	TE05
Level	Voltage [Vdc]	Temperature (°C)	Deviation (Hz)	Deviation (ppm)	Limit (ppm)	Result
Normal	3.70	-30	-15.60	0.027	±2.5	Pass
Normal	3.70	-20	22.81	0.027	±2.5	Pass
Normal	3.70	-10	-28.46	-0.034	±2.5	Pass
Normal	3.70	0	-17.25	-0.021	±2.5	Pass
Normal	3.70	10	5.21	0.006	±2.5	Pass
Battery full point	4.20	20	7.52	0.009	±2.5	Pass
Normal	3.70	20	-31.88	-0.038	±2.5	Pass
Battery cut-off point	3.40	20	-20.66	-0.025	±2.5	Pass
Normal	3.70	30	3.89	0.005	±2.5	Pass
Normal	3.70	40	16.15	0.019	±2.5	Pass
Normal	3.70	50	-6.55	-0.008	±2.5	Pass
Normal	3.70	60	-13.35	-0.016	±2.5	Pass
Normal	3.70	70	5.91	0.007	±2.5	Pass