

FCC Test Report

Report No.: AGC10648220705FE05

FCC ID	: 2AXBN-DX7
APPLICATION PURPOSE	: Original Equipment
PRODUCT DESIGNATION	: Wireless Smart Camera
BRAND NAME	: N/A
MODEL NAME	 DX7, HGWBC-351, HGWBC-356, HGWBC-358, DX1, DX2, DX4, DX5, DX6, DX8, DX9, DX10, DG1, DG4, DG5, DG6, Q1, Q2, Q3, Q5, Q6, Q7, Q8, Q9, Q10, CG1, CG2, CG5, CG6, CG7, CQ1, F5, F5K, F5C, Q6K, Q6C, Q8K, Q8C, CG7B, CG7BK
APPLICANT	: SHENZHEN CYTON Intelligence Technology CO., LTD
DATE OF ISSUE	: Feb. 15, 2023
STANDARD(S) TEST PROCEDURE(S)	: FCC Part 15.247
REPORT VERSION	: V1.0 V1.0 Compliance (Snenthen) Co. Vo uoitetse
<u>Attestation of (</u>	<u> Flobal Compliance (Shenzhen) Co., Ltd</u>





REPORT REVISE RECORD

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	Feb. 15, 2023	Valid	Initial Release




TABLE OF CONTENTS

1. VERIFICATION OF CONFORMITY	5
2. GENERAL INFORMATION	6
2.1. PRODUCT DESCRIPTION	6
2.2. TABLE OF CARRIER FREQUENCYS	6
2.3. IEEE 802.11N MODULATION SCHEME	7
2.4. RELATED SUBMITTAL(S) / GRANT (S)	7
2.5. TEST METHODOLOGY	7
2.6. SPECIAL ACCESSORIES	
2.7. EQUIPMENT MODIFICATIONS	
2.8. ANTENNA REQUIREMENT	
3. MEASUREMENT UNCERTAINTY	9
4. DESCRIPTION OF TEST MODES	
5. SYSTEM TEST CONFIGURATION	11
5.1. CONFIGURATION OF EUT SYSTEM	11
5.2. EQUIPMENT USED IN EUT SYSTEM	11
5.3. SUMMARY OF TEST RESULTS	11
6. TEST FACILITY	
7. OUTPUT POWER	
7.1. MEASUREMENT PROCEDURE	
7.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	
7.3. LIMITS AND MEASUREMENT RESULT	
8. BANDWIDTH	15
8.1. MEASUREMENT PROCEDURE	
8.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	
8.3. LIMITS AND MEASUREMENT RESULTS	
9. CONDUCTED SPURIOUS EMISSION	
9.1. MEASUREMENT PROCEDURE	
9.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	
9.3. MEASUREMENT EQUIPMENT USEDJN	
9.4. LIMITS AND MEASUREMENT RESULT	



10. MAXIMUM CONDUCTED OUTPUT POWER SPECTRAL DENSITY	44
10.1 MEASUREMENT PROCEDURE	44
10.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	44
10.3 MEASUREMENT EQUIPMENT USED	44
10.4 LIMITS AND MEASUREMENT RESULT	44
11. RADIATED EMISSION	51
11.1. MEASUREMENT PROCEDURE	51
11.2. TEST SETUP	
11.3. LIMITS AND MEASUREMENT RESULT	
11.4. TEST RESULT	53
12. LINE CONDUCTED EMISSION TEST	75
12.1. LIMITS OF LINE CONDUCTED EMISSION TEST	75
12.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST	75
12.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST	76
12.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST	
12.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST	77
APPENDIX A: PHOTOGRAPHS OF TEST SETUP	79
APPENDIX B: PHOTOGRAPHS OF EUT	79





1. VERIFICATION OF CONFORMITY

Applicant	SHENZHEN CYTON Intelligence Technology CO., LTD	
Address	F/L 601, Building K, Jingchangda, No. 2000089 Shangwei industrial zone, Zhangkengjing community, Guanhu street, Longhua District, Shenzhen, China	
Manufacturer	SHENZHEN CYTON Intelligence Technology CO., LTD	
Address	F/L 601, Building K, Jingchangda, No. 2000089 Shangwei industrial zone, Zhangkengjing community, Guanhu street, Longhua District, Shenzhen, China	
Factory	SHENZHEN CYTON Intelligence Technology CO., LTD	
Address	F/L 601, Building K, Jingchangda, No. 2000089 Shangwei industrial zone, Zhangkengjing community, Guanhu street, Longhua District, Shenzhen, China	
Product Designation	Wireless Smart Camera	
Brand Name	N/A	
Test Model	DX7	
Beries Model HGWBC-351, HGWBC-356, HGWBC-358, DX1, DX2, DX4, DX5, DX6, DX8, DX10, DG1, DG4, DG5, DG6, Q1, Q2, Q3, Q5, Q6, Q7, Q8, Q9, Q10, CG1, CG5, CG6, CG7, CQ1, F5, F5K, F5C, Q6K, Q6C, Q8K, Q8C, CG7B, CG7B		
Declaration of Difference	All the series models are the same as the test model except for the model names.	
Date of receipt of test item	Jan. 06, 2023	
Date of test	Jan. 06, 2023 and Feb. 15, 2023	
Deviation	No any deviation from the test method	
Condition of Test Sample	Normal	
Test Result	Pass	
Report Template	AGCRT-US-BGN/RF	

We hereby certify that:

The above equipment was tested by Attestation of Global Compliance (Shenzhen) Co., Ltd. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10 (2013) and the energy emitted by the sample EUT tested as described in this report is in compliance with radiated emission limits of FCC Rules Part 15.247.

Bibo zhay Prepared By Bibo Zhang Feb. 15, 2023 (Project Engineer) vin Lin **Reviewed By** Calvin Liu Feb. 15, 2023 (Reviewer) Max Zhang Approved By Max Zhang Feb. 15, 2023

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

(Authorized Officer)



2. GENERAL INFORMATION

2.1. PRODUCT DESCRIPTION

The EUT is designed as "Wireless Smart Camera". It is designed by way of utilizing the DSSS and OFDM technology to achieve the system operation.

A major technical description of EUT is described as following

Operation Frequency	2.412 GHz ~ 2.462GHz
Output Power (Average)	IEEE 802.11b:13.25dBm; IEEE 802.11g:11.84dBm;
Output Fower (Average)	IEEE 802.11n(20):11.51dBm; IEEE 802.11n(40):8.09dBm
Output Power (Peak)	IEEE 802.11b:16.03dBm; IEEE 802.11g:19.48dBm;
	IEEE 802.11n(20):19.30dBm; IEEE 802.11n(40):15.80dBm
Modulation	DSSS(DBPSK/DQPSK/CCK); OFDM(BPSK/QPSK/16-QAM/64-QAM)
Number of channels	11
Hardware Version	SPEED B9S_V1.0
Software Version	V5.3.7
Antenna Designation	FPC Antenna (Comply with requirements of the FCC part 15.203)
Antenna Gain	1.94dBi
Power Supply	DC 5V by adapter

2.2. TABLE OF CARRIER FREQUENCYS

Frequency Band	Channel Number	Frequency
	1	2412 MHZ
	2	2417 MHZ
	3	2422 MHZ
	4	2427 MHZ
	5	2432 MHZ
2400~2483.5MHZ	6	2437 MHZ
	7	2442 MHZ
	8	2447 MHZ
	9	2452 MHZ
	10	2457 MHZ
	11	2462 MHZ

Note: For 20MHZ bandwidth system use Channel 1 to Channel 11. For 40MHZ bandwidth system use Channel 3 to Channel 9



2.3. IEEE 802.11N MODULATION SCHEME

MCS	Nss	Modulation	R	NBPSC	NCBPS		NCBPS NDBPS			ata Mbps)
Index					20MHz	40MHz	20MHz	40MHz	20MHz	40MHz
0	4	DDCK	1/0	4		-				
0	1	BPSK	1/2	1	52	108	26	54	6.5	13.5
1	1	QPSK	1/2	2	104	216	52	108	13.0	27.0
2	1	QPSK	3/4	2	104	216	78	162	19.5	40.5
3	1	16-QAM	1/2	4	208	432	104	216	26.0	54.0
4	1	16-QAM	3/4	4	208	432	156	324	39.0	81.0
5	1	64-QAM	2/3	6	312	648	208	432	52.0	108.0
6	1	64-QAM	3/4	6	312	648	234	489	58.5	121.5
7	1	64-QAM	5/6	6	312	648	260	540	65.0	135.0

Symbol	Explanation
NSS	Number of spatial streams
R	Code rate
NBPSC	Number of coded bits per single carrier
NCBPS	Number of coded bits per symbol
NDBPS	Number of data bits per symbol
GI	Guard interval

2.4. RELATED SUBMITTAL(S) / GRANT (S)

This submittal(s) (test report) is intended for **FCC ID: 2AXBN-DX7** filing to comply with the FCC Part 15 requirements.

2.5. TEST METHODOLOGY

KDB 558074 D01 15.247 Meas Guidance v05: Guidance for compliance measurements on Digital transmissio n system, frequency hopping spread spectrum system, and hybrid system devices operating under section 15.247 of the FCC rules ANSI C63.10:2013: American National Standard for Testing Unlicensed Wireless Devices

2.6. SPECIAL ACCESSORIES

Refer to section 5.2.

2.7. EQUIPMENT MODIFICATIONS

Not available for this EUT intended for grant.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

 Attestation of Global Compliance(Shenzhen)Co., Ltd

 Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

 Tel: +86-755 2523 4088
 E-mail: agc@agccert.com

 Web: http://www.agccert.com/



2.8. ANTENNA REQUIREMENT

This intentional radiator is designed with a permanently attached antenna of an antenna to ensure that no antenna other than that furnished by the responsible party shall be used with the device. For more information of the antenna, please refer to the APPENDIX B: PHOTOGRAPHS OF EUT.



3. MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement y ±U, where expended uncertainty U is based on a standard

uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95%.

Item	Measurement Uncertainty
Uncertainty of Conducted Emission for AC Port	$U_c = \pm 3.1 \text{ dB}$
Uncertainty of Radiated Emission below 1GHz	$U_c = \pm 4.0 \text{ dB}$
Uncertainty of Radiated Emission above 1GHz	$U_c = \pm 4.8 \text{ dB}$
Uncertainty of total RF power, conducted	$U_c = \pm 0.8 \text{ dB}$
Uncertainty of RF power density, conducted	$U_c = \pm 2.6 \text{ dB}$
Uncertainty of spurious emissions, conducted	U _c = ±2 %
Uncertainty of Occupied Channel Bandwidth	$U_c = \pm 2 \%$



4. DESCRIPTION OF TEST MODES

NO.	TEST MODE DESCRIPTION			
1	Low channel transmitting (TX)			
2	Middle channel transmitting (TX)			
3	High channel transmitting (TX)			
Note:	ote:			
Transm	Transmit by 802.11b with Date rate (1/2/5.5/11)			
Transmit by 802.11g with Date rate (6/9/12/18/24/36/48/54)				
Transmit by 802.11n (20MHz) with Date rate (6.5/13/19.5/26/39/52/58.5/65)				
Transm	Transmit by 802.11n (40MHz) with Date rate (13.5/27/40.5/54/81/108/121.5/135)			
The test channel for 20MHZ bandwidth system is channel 1, 6 and 11.				
The tes	The test channel for 40MHZ bandwidth system is channel 3, 6 and 9.			

Note:

- 1. The EUT has been set to operate continuously on the lowest, middle and highest operation frequency Individually, and the EUT is operating at its maximum duty cycle>or equal 98%
- 2. All modes under which configure applicable have been tested and the worst mode test data recording in the test report, if no other mode data.

Software Setting

Y TPOP V4.1	🏭 ? — 🗆 🗙
IP绑定 路由 MAC信息 网络统计 端口信息 端口映射 网卡流里 报文捕获 终端工具 用	服务 报文发送
🚽 着 🗶 ங 🐐 🦂 📑 👭 💥 🕘 🖃 🖏 🔍 🚸 🥅 🎢 🚧 🧠 🗶 🛷 🔍	
stop tx (8BE3): Invalid argument	
<pre>stop_tx (obc5): Invalid argument [root@Meari:~]# iwpriv wlan0 common setEfuse_deltagain,17,17,17</pre>	
wlan0 common:	
<pre>[root@Meari:~]# iwpriv wlan0 start_tx 3,6.5,1000,1,0</pre>	-channel 3
[root@Meari:~]# iwpriv wlan0 stop_tx	
<pre>[root@Meari:~]# iwpriv wlan0 fwcmd set_spec_rate_txpower_mode,2,-</pre>	
<pre>[root@Meari:~]# iwpriv wlan0 fwcmd set_spec_rate_txpower_mode,2,-</pre>	
<pre>[root@Meari:~]# iwpriv wlan0 start_tx 1,6.5,1000,0,0</pre>	
[root@Meari:~]# impriv wlan0 start_tx 7,6.5,1000,0,0	-channel /
[root@Meari:~]# iwpriv wlan0 start_tx 13,6.5,1000,0,0 [root@Meari:~]# iwpriv wlan0 stop_tx	
[root@Meari:~]# iwpriv wiand stop_tx	
wlan0 common:	
<pre>[root@Meari:~]# iwpriv wlan0 start_tx 3,6.5,1000,1,0</pre>	-channel 3
[root@Meari:~]# iwpriv wlan0 start_tx 7,6.5,1000,1,0	
[root@Meari:~]# iwpriv wlan0 start_tx 11,6.5,1000,1,0	-channel 11
[root@Meari:~]# iwpriv wlan0 stop_tx	
<pre>[root@Meari:~]# iwpriv wlan0 start_tx 3,6.5,1000,1,0</pre>	-channel 3
[root@Meari:~]# iwpriv wlan0 start_tx 7,6.5,1000,1,0	channel 7
[root@Meari:~]# impriv wlan0 start_tx 11,6.5,1000,1,0	-channel 11
[root@Meari:~]# impriv wlan0 stop_tx [root@Meari:~]# impriv wlan0 common setEfuse_deltagain,17,17,17	
wland common:	
[root@Meari:~]# iwpriv wlan0 start_tx 3,6.5,1000,1,0	-channel 3
[root@Meari:~]#	
COM4已连接	连接时间:01:24:42 系统时间: 10:33:22



5. SYSTEM TEST CONFIGURATION

5.1. CONFIGURATION OF EUT SYSTEM

Radiated Emission Configure:

EUT

Conducted Emission Configure:

EUT		AE
-----	--	----

5.2. EQUIPMENT USED IN EUT SYSTEM

Item	Equipment	Model No.	ID or Specification	Remark
1	Wireless Smart Camera	DX7	2AXBN-DX7	EUT
2	Adapter	HW-050200C01	N/A	AE
3	iphone8 phone	MQ6K2CH/A	N/A	AE

5.3. SUMMARY OF TEST RESULTS

FCC RULES	DESCRIPTION OF TEST	RESULT
§15.247	Output Power	Compliant
§15.247	6 dB Bandwidth	Compliant
§15.247	Conducted Spurious Emission	Compliant
§15.247	Maximum Conducted Output Power Spectral Density	Compliant
§15.209	Radiated Emission	Compliant
§15.247	Band Edges	Compliant
§15.207	Line Conduction Emission	Compliant



6. TEST FACILITY

Test Site	Attestation of Global Compliance (Shenzhen) Co., Ltd
Location	1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China
Designation Number	CN1259
FCC Test Firm Registration Number	975832
A2LA Cert. No.	5054.02
Description	Attestation of Global Compliance(Shenzhen) Co., Ltd is accredited by A2LA

TEST EQUIPMENT OF CONDUCTED EMISSION TEST

Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Due
TEST RECEIVER	R&S	ESPI	101206	Mar.28, 2022	Mar.27, 2023
LISN	R&S	ESH2-Z5	100086	Jun. 09, 2022	Jun. 08, 2023
Test software	R&S	ES-K1	Ver.V1.71	N/A	N/A

TEST EQUIPMENT OF RADIATED EMISSION TEST

Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Due
TEST RECEIVER	R&S	ESCI	10096	Mar. 28, 2022	Mar. 27, 2023
EXA Signal Analyzer	Aglient	N9010A	MY53470504	Aug. 04, 2022	Aug. 03, 2023
2.4GHz Fliter	Micro-tronics	087	N/A	Mar. 23, 2022	Mar. 22, 2024
Attenuator	Weinachel Corp	58-30-33	N/A	Aug. 04, 2022	Aug. 03, 2024
Horn antenna	SCHWARZBECK	BBHA 9170	#768	Oct. 31, 2021	Oct. 30, 2023
Active loop antenna (9K-30MHz)	ZHINAN	ZN30900C	00034609	Mar. 12, 2022	Mar. 11, 2024
Double-Ridged Waveguide Horn	ETS LINDGREN	3117	00034609	Apr. 23, 2021	Apr. 22, 2023
Broadband Preamplifier	ETS LINDGREN	3117PA	00225134	Aug. 04, 2022	Aug. 03, 2024
ANTENNA	SCHWARZBECK	VULB9168	D69250	Apr. 28, 2021	Apr. 27, 2023
Test software	Tonscend	JS32-RE	Ver.2.5	N/A	N/A



7. OUTPUT POWER


7.1. MEASUREMENT PROCEDURE

For average power test:

- 1. Connect EUT RF output port to power sensor through an RF attenuator.
- 2. Connect the power sensor to the PC.
- 3. Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- 4. Record the maximum power from the software.

Note : The EUT was tested according to ANSI C63.10 (2013) for compliance to FCC 47CFR 15.247 requirements.

7.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)





7.3. LIMITS AND MEASUREMENT RESULT

Test Data of Conducted Output Power					
Test Mode	Test Channel (MHz)	Average Power (dBm)	Peak Power (dBm)	Limits (dBm)	Pass or Fail
	2412	13.25	16.03	≤30	Pass
802.11b	2437	12.92	15.66	≤30	Pass
	2462	13.11	15.88	≤30	Pass
	2412	11.84	19.48	≤30	Pass
802.11g	2437	11.29	18.95	≤30	Pass
	2462	11.50	19.12	≤30	Pass
	2412	11.51	19.30	≤30	Pass
802.11n20	2437	11.29	18.95	≤30	Pass
	2462	11.46	19.17	≤30	Pass
802.11n40	2422	8.09	15.78	≤30	Pass
	2437	8.06	15.80	≤30	Pass
	2452	7.95	15.69	≪30	Pass



8. BANDWIDTH

8.1. MEASUREMENT PROCEDURE

6dB bandwidth:


- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2. Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- 3. Set SPA Centre Frequency = Operation Frequency, RBW= 100 kHz, VBW≥3×RBW.
- 4. Set SPA Trace 1 Max hold, then View.

Occupied bandwidth:

- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2, Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- 3. Set Span = approximately 2 to 5 times the 20 dB bandwidth, centered on a hoping channel The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW and video bandwidth (VBW) shall be approximately three times RBW; Sweep = auto; Detector function = peak
- 4. Set SPA Trace 1 Max hold, then View.

Note: The EUT was tested according to ANSI C63.10 for compliance to FCC PART 15.247 requirements.

8.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

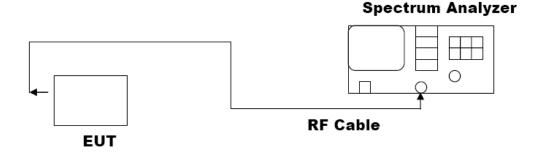




8.3. LIMITS AND MEASUREMENT RESULTS


Test Data of Occupied Bandwidth and DTS Bandwidth					
Test Mode	Test Channel (MHz)	99% Occupied Bandwidth (MHz)	-6dB Bandwidth (MHz)	Limits (MHz)	Pass or Fail
	2412	13.121	10.02	≥0.5	Pass
802.11b	2437	13.093	10.06	≥0.5	Pass
	2462	13.092	10.06	≥0.5	Pass
	2412	16.556	16.39	≥0.5	Pass
802.11g	2437	16.532	16.37	≥0.5	Pass
	2462	16.542	16.37	≥0.5	Pass
	2412	17.533	17.52	≥0.5	Pass
802.11n20	2437	17.515	17.52	≥0.5	Pass
	2462	17.519	17.29	≥0.5	Pass
802.11n40	2422	35.997	35.73	≥0.5	Pass
	2437	35.944	35.48	≥0.5	Pass
	2452	35.926	35.78	≥0.5	Pass



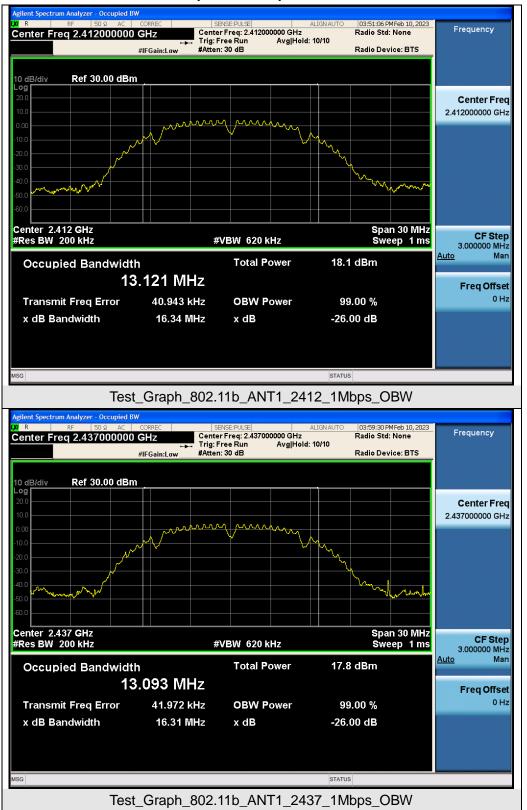

Test Graphs of Occupied Bandwidth



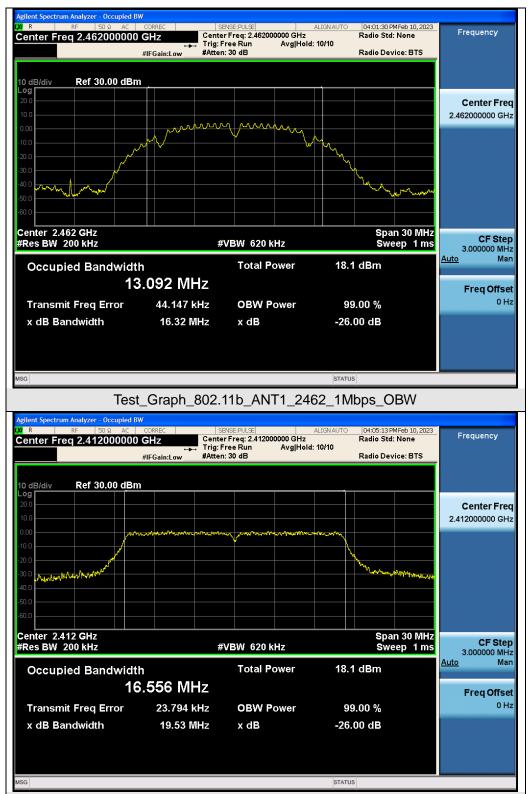

Test_Graph_802.11g_ANT1_2412_6Mbps_OBW

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

 Attestation of Global Compliance(Shenzhen)Co., Ltd


 Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

 Tel: +86-755 2523 4088
 E-mail: agc@agccert.com

 Web: http://www.agccert.com/

0 Hz



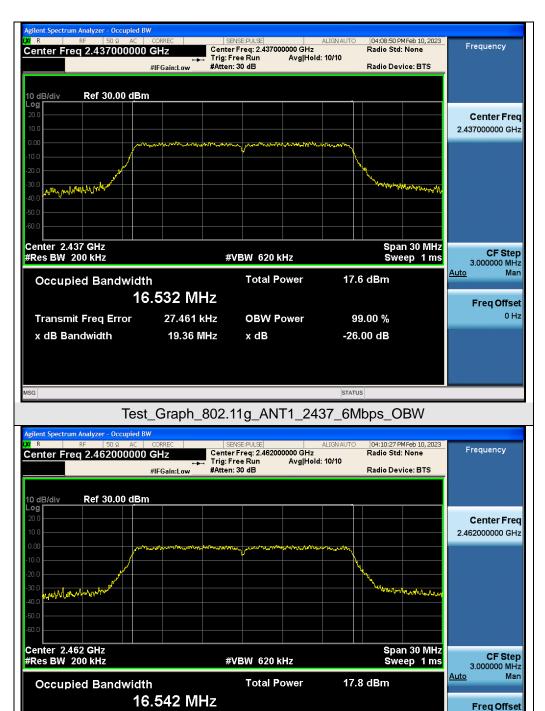

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

OBW Power

Test_Graph_802.11g_ANT1_2462_6Mbps_OBW

x dB


99.00 %

-26.00 dB


Transmit Freq Error x dB Bandwidth 23.556 kHz

19.48 MHz



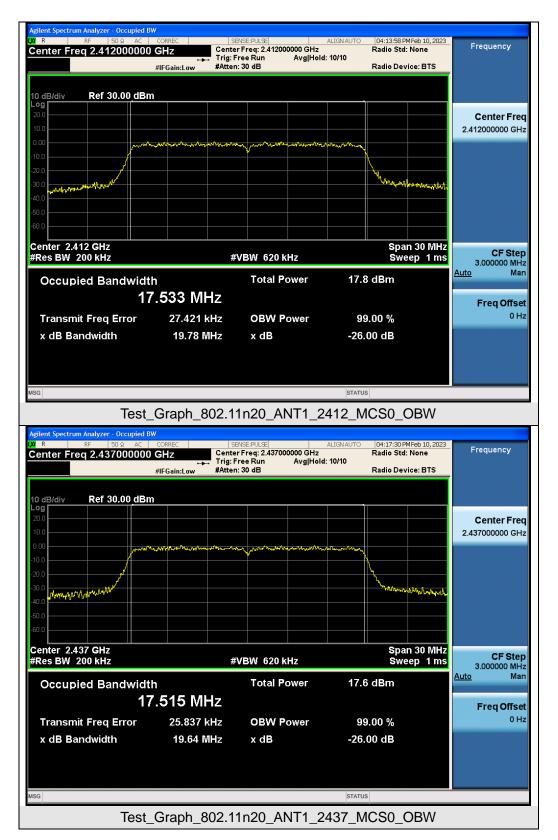




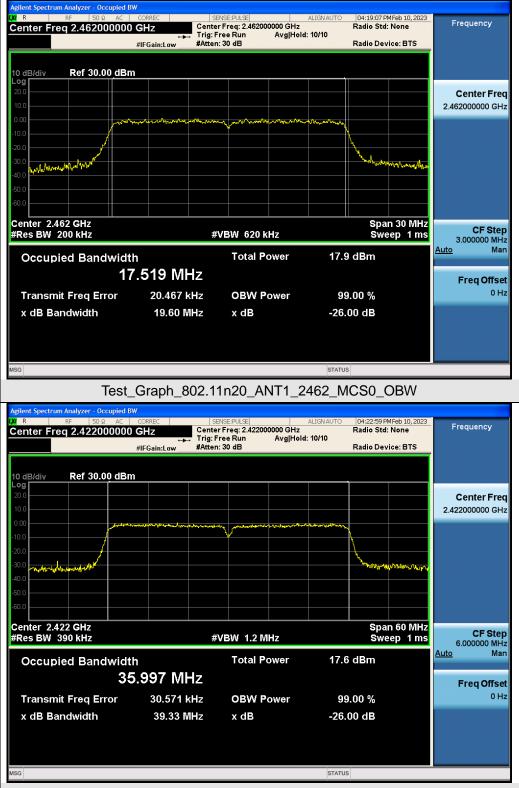


Test_Graph_802.11n40_ANT1_2422_MCS0_OBW



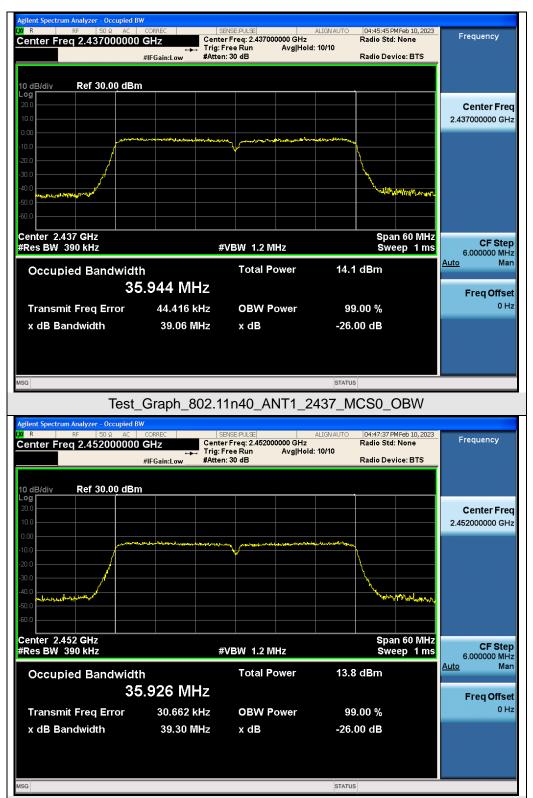

Test_Graph_802.11n40_ANT1_2452_MCS0_OBW



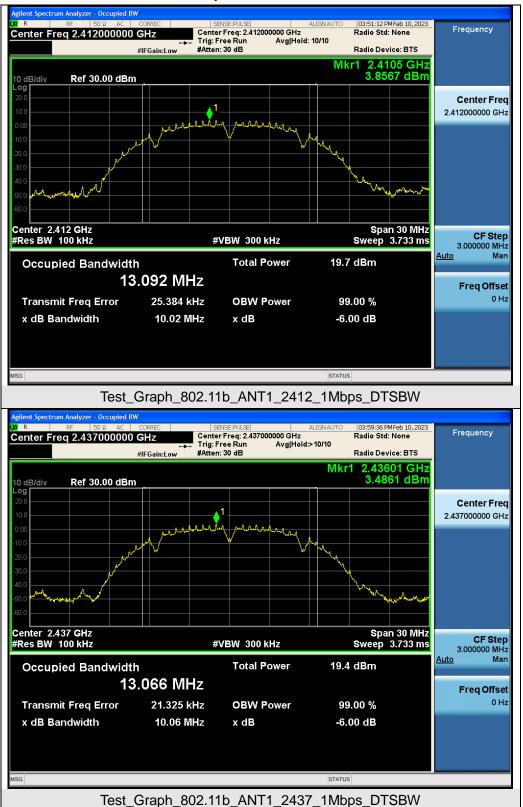

Test Graphs of DTS Bandwidth





Test_Graph_802.11g_ANT1_2412_6Mbps_DTSBW

x dB

-6.00 dB

 Attestation of Global Compliance(Shenzhen)Co., Ltd

 Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd


 Tel: +86-755 2523 4088
 E-mail: agc@agccert.com

 Web: http://www.agccert.com/

16.39 MHz

x dB Bandwidth



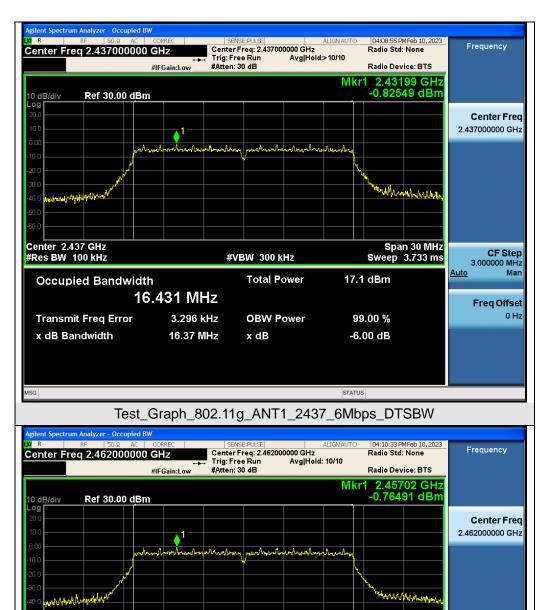

#VBW 300 kHz

x dB

Total Power

OBW Power

Test_Graph_802.11g_ANT1_2462_6Mbps_DTSBW

Span 30 MHz Sweep 3.733 ms

17.3 dBm

99.00 %

-6.00 dB

CF Step

Man

3.000000 MHz

Freq Offset 0 Hz

Auto

Center 2.462 GHz #Res BW 100 kHz

Occupied Bandwidth


Transmit Freq Error x dB Bandwidth

16.427 MHz


4.722 kHz

16.37 MHz




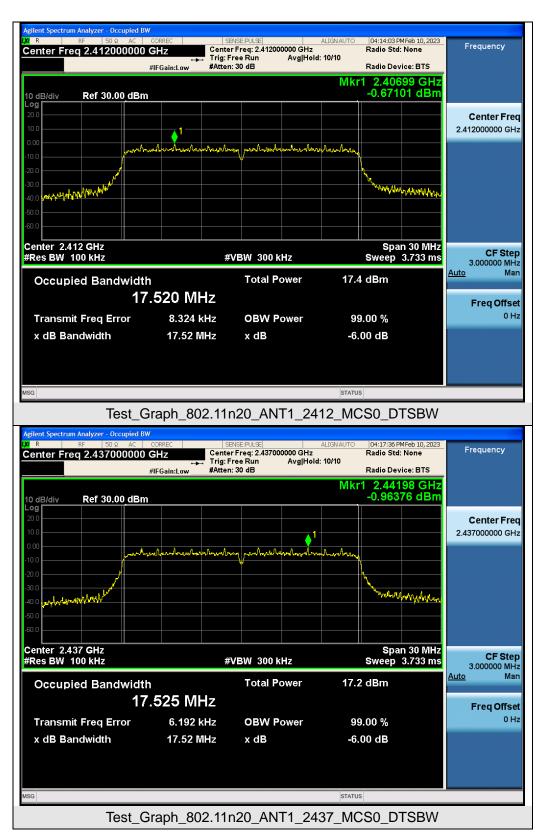



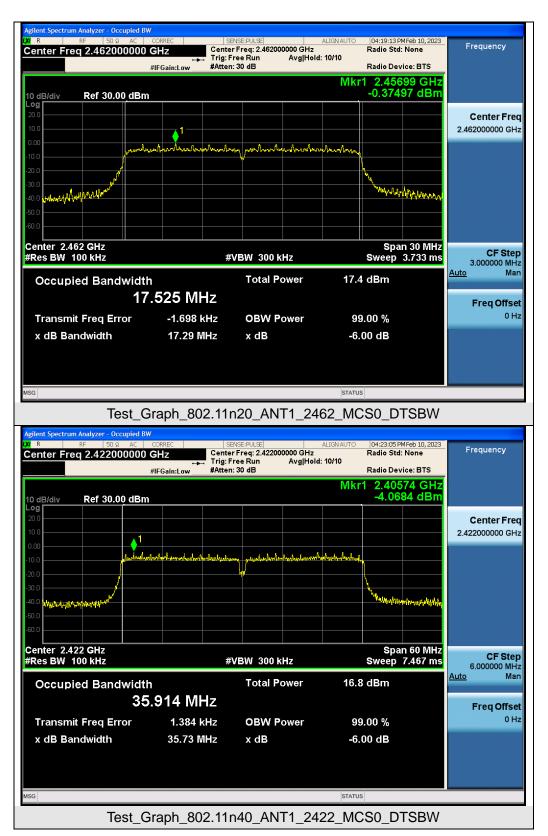



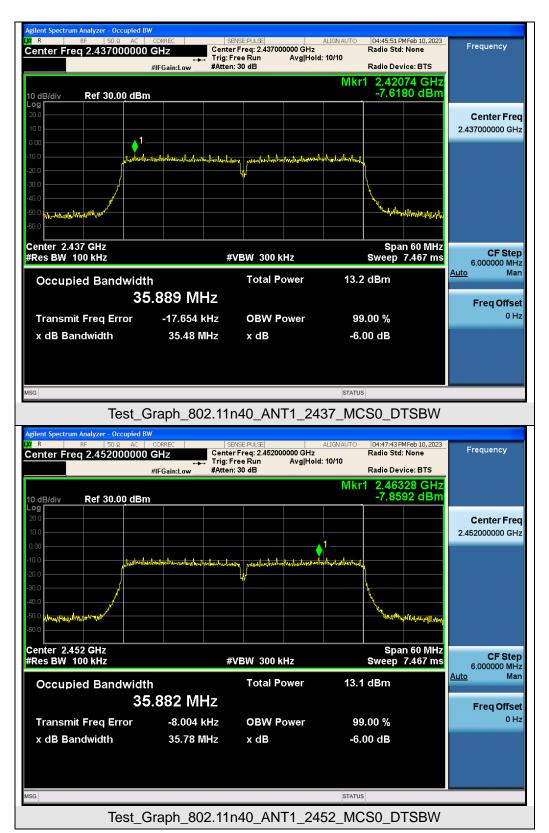



9. CONDUCTED SPURIOUS EMISSION

9.1. MEASUREMENT PROCEDURE

- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2, Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- 3. Set SPA Trace 1 Max hold, then View.
- **Note:** The EUT was tested according to ANSI C63.10 (2013) for compliance to FCC 47CFR 15.247 requirements. Owing to satisfy the requirements of the number of measurement points, we set the RBW=1MHz, VBW > RBW, scan up through 10th harmonic, and consider the tested results as the worst case, if the tested results conform to the requirement, we can deem that the real tested results(set the RBW=100KHz, VBW > RBW) are conform to the requirement.

9.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

The same as described in section 8.2.


9.3. MEASUREMENT EQUIPMENT USEDJN

The same as described in section 6.


9.4. LIMITS AND MEASUREMENT RESULT

LIMITS AND MEASUREMENT RESULT				
Applieghte Limite	Measurement Result			
Applicable Limits	Test Data	Criteria		
In any 100 KHz Bandwidth Outside the	At least -20dBc than the limit			
frequency band in which the spread spectrum	Specified on the BOTTOM	PASS		
intentional radiator is operating, the radio frequency	Channel			
power that is produce by the intentional radiator shall be at least 20 dB below that in 100KHz bandwidth within the band that contains the highest level of the desired power. In addition, radiation emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in§15.209(a))	At least -20dBc than the limit Specified on the TOP Channel	PASS		

Note: The limits reference level is according to the test plot of -6dB bandwidth.






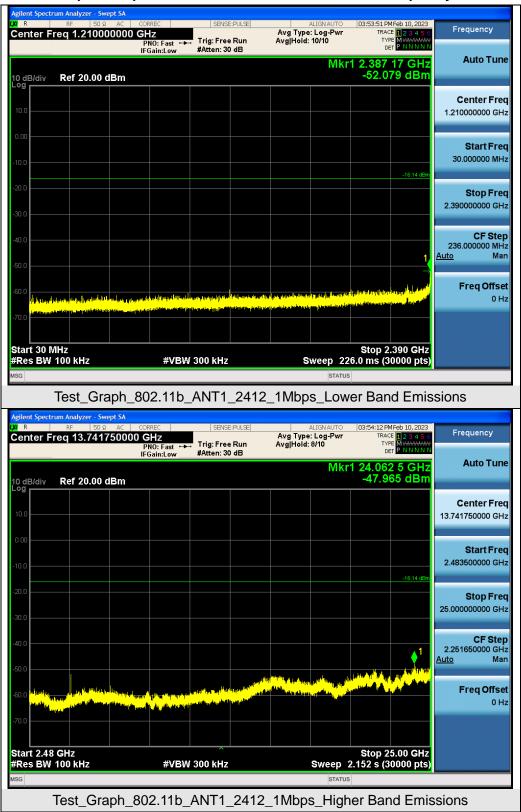


Test Graphs of Spurious Emissions in Non-Restricted Frequency Bands




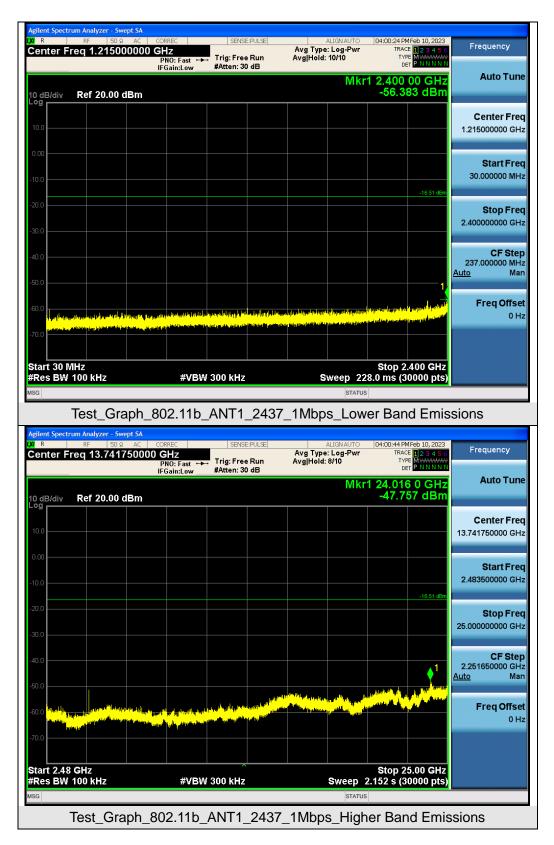




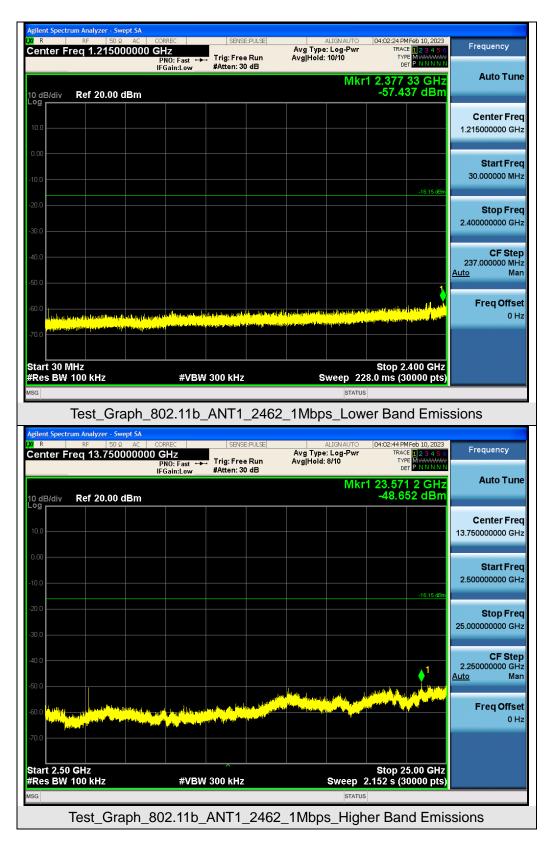




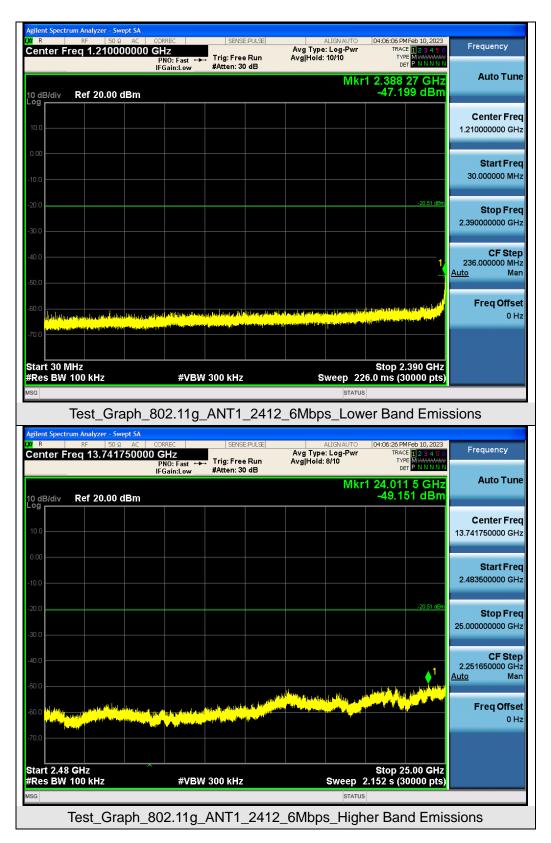




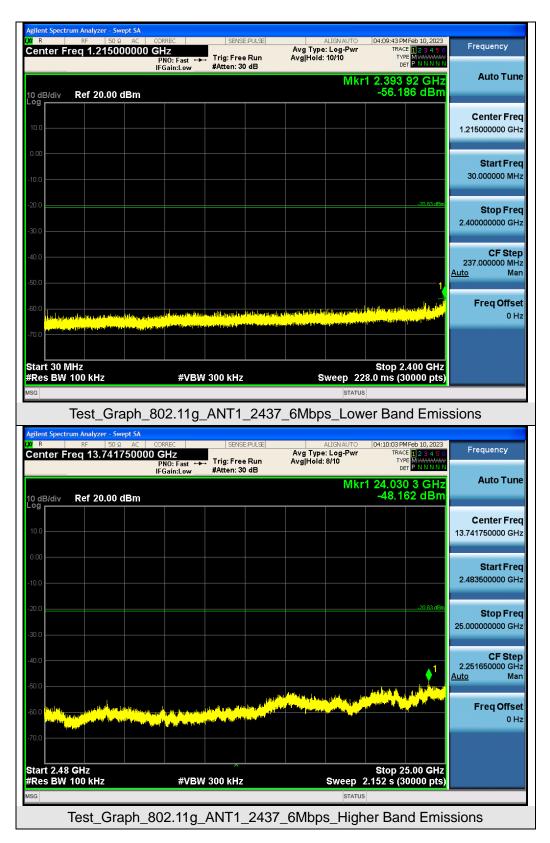




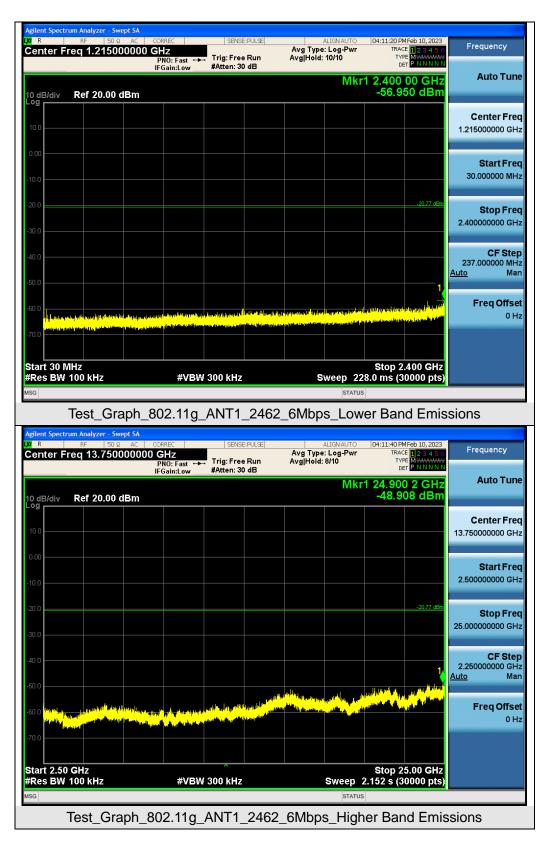




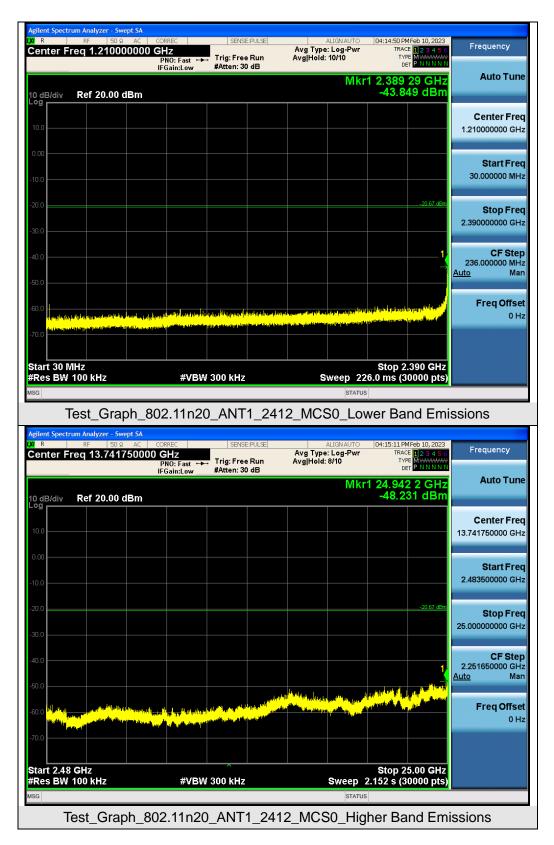




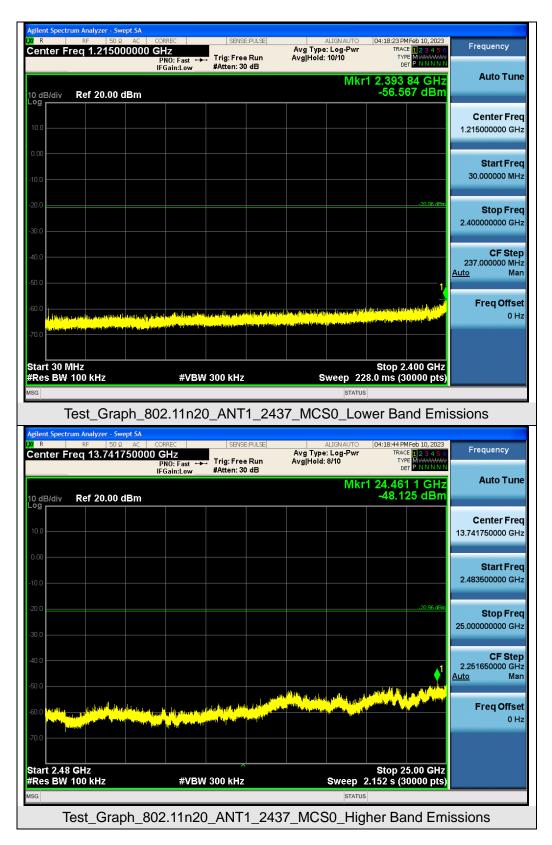




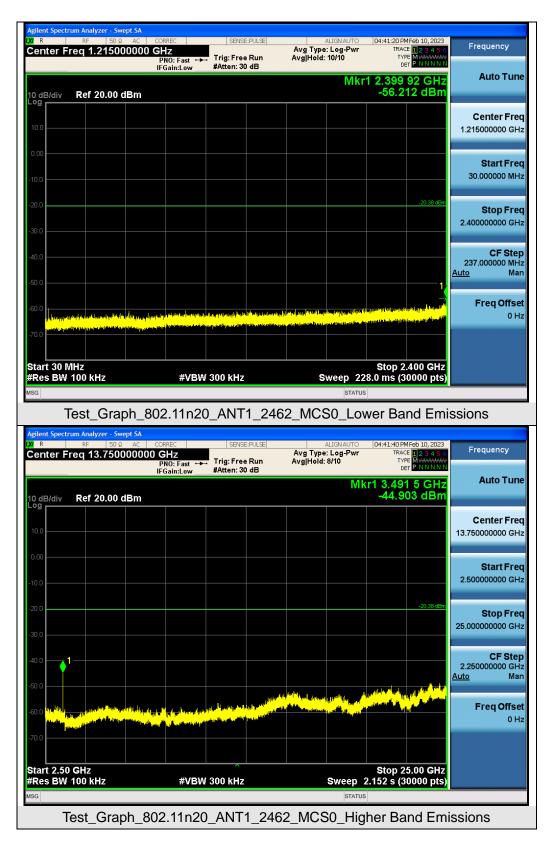




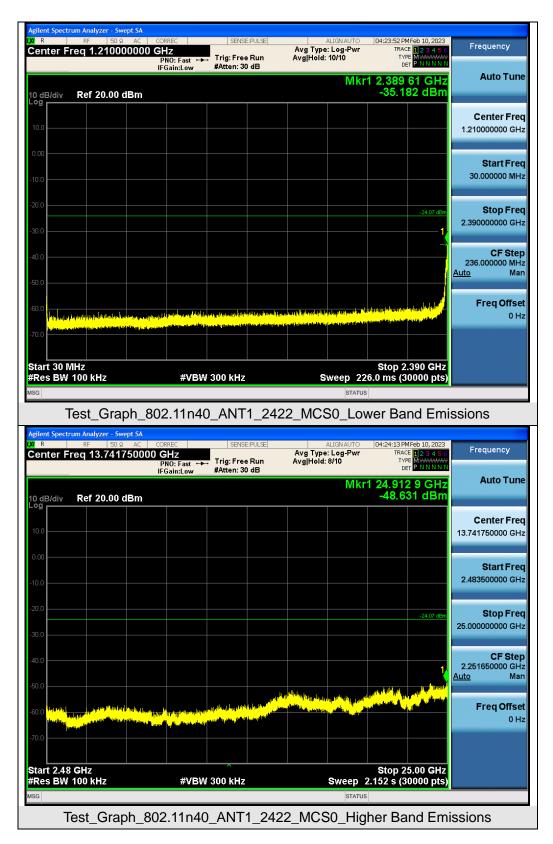



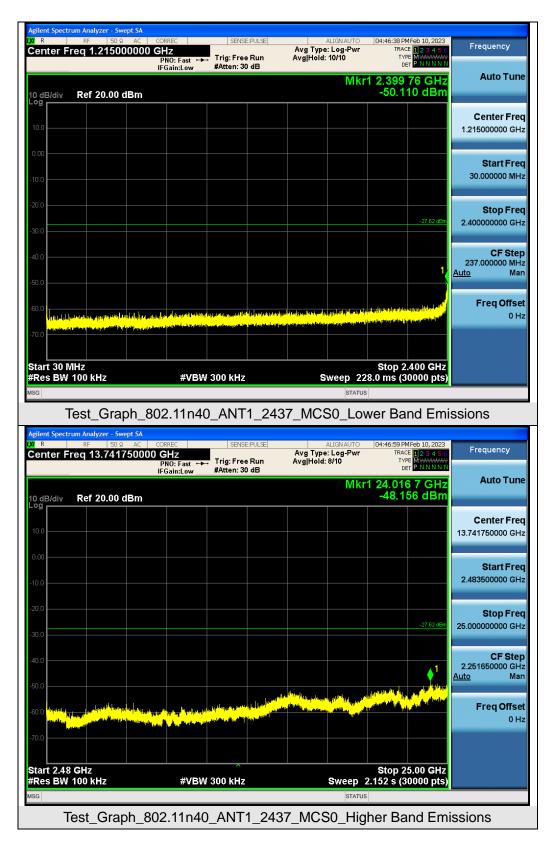



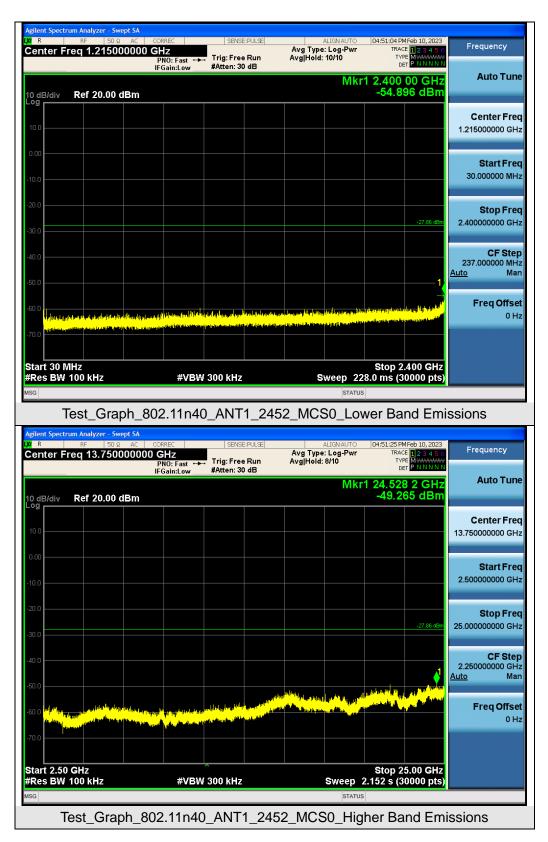






Test Graphs of Band Edge Emissions in Non-Restricted Frequency Bands



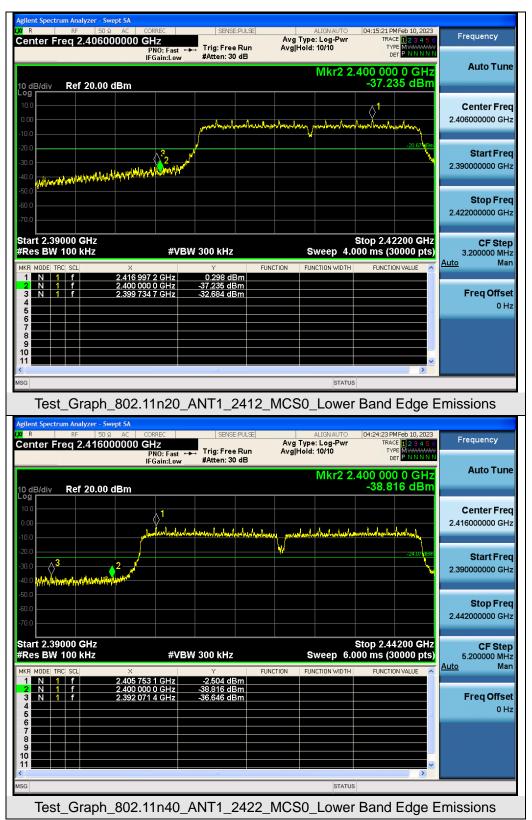

Note: Emissions from 2483.5-2500MHz which fall in the restricted bands had been considered with the radiated emission limits specified.



10. MAXIMUM CONDUCTED OUTPUT POWER SPECTRAL DENSITY

10.1 MEASUREMENT PROCEDURE

- (1). Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- (2). Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- (3). Set SPA Trace 1 Max hold, then View.

Note: The method of PKPSD in the ANSI C63.10 (2013) item 11.10 was used in this testing.

10.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

Refer to Section 8.2.

10.3 MEASUREMENT EQUIPMENT USED


Refer to Section 6.

10.4 LIMITS AND MEASUREMENT RESULT

	Test Data of Conducted Output Power Spectral Density								
Test Mode	Test Channel (MHz)	Power density (dBm/20kHz)			Pass or Fail				
	2412	4.192	-4.047	≪8	Pass				
802.11b	2437	3.728	-4.511	≪8	Pass				
	2462	3.814	-4.425	≪8	Pass				
	2412	-4.414	-12.653	≪8	Pass				
802.11g	2437	-5.382	-13.621	≪8	Pass				
	2462	-4.784	-13.023	≪8	Pass				
	2412	-5.451	-13.69	≪8	Pass				
802.11n20	2437	-5.749	-13.988	≪8	Pass				
	2462	-5.538	-13.777	≪8	Pass				
	2422	-12.073	-20.312	≪8	Pass				
802.11n40	2437	-12.168	-20.407	≪8	Pass				
	2452	-12.153	-20.392	≪8	Pass				


Note: Power density(dBm/3kHz) = Power density(dBm/20kHz) - 10*log(20/3).



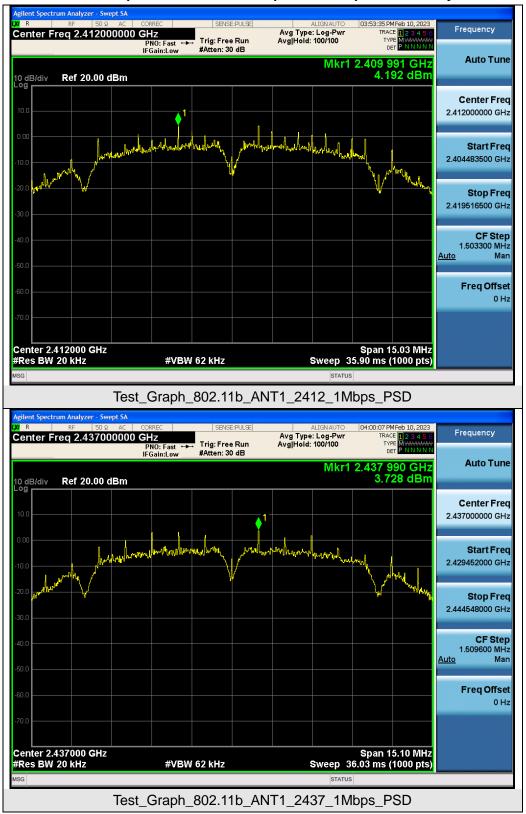

Test Graphs of Conducted Output Power Spectral Density




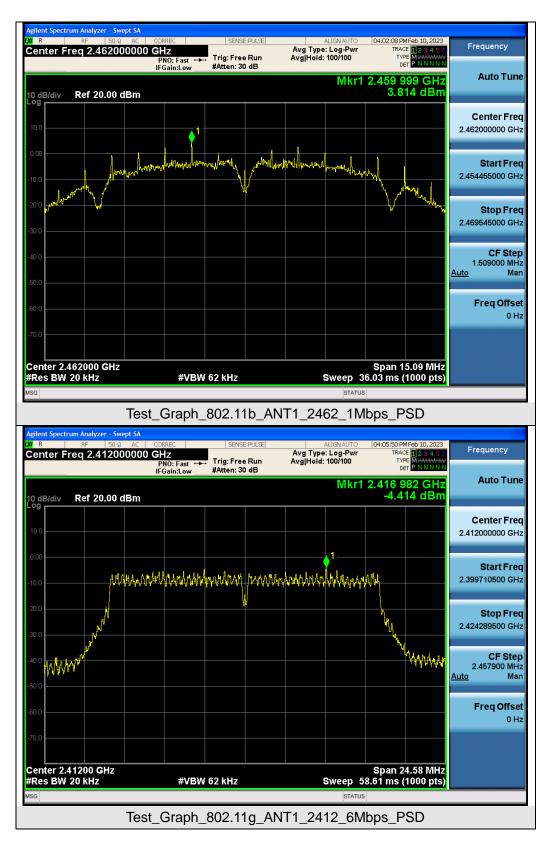









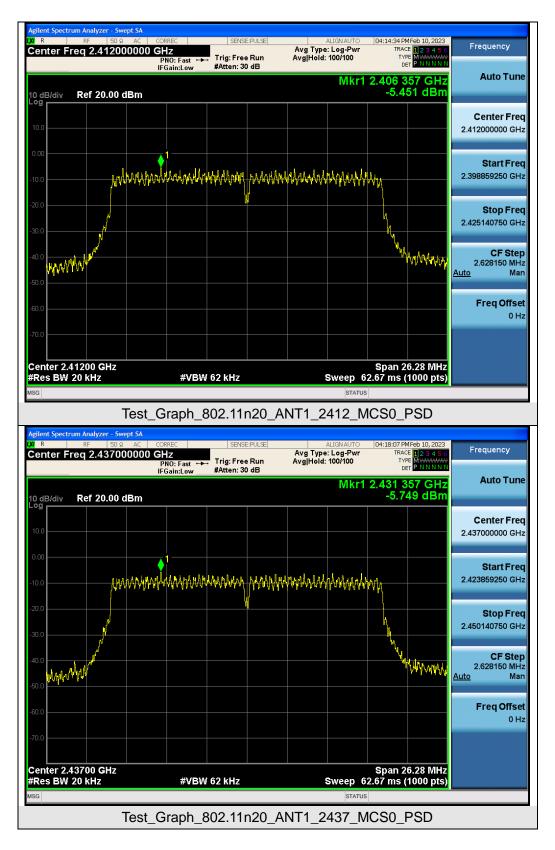



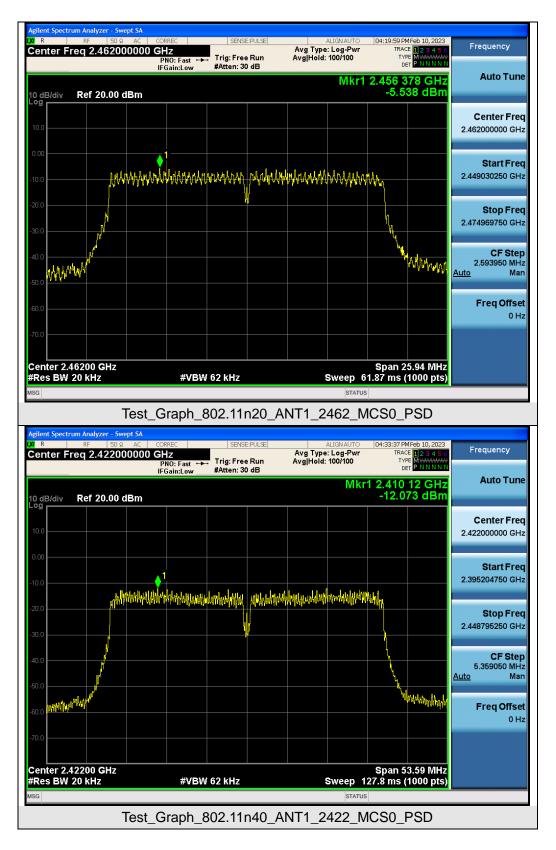



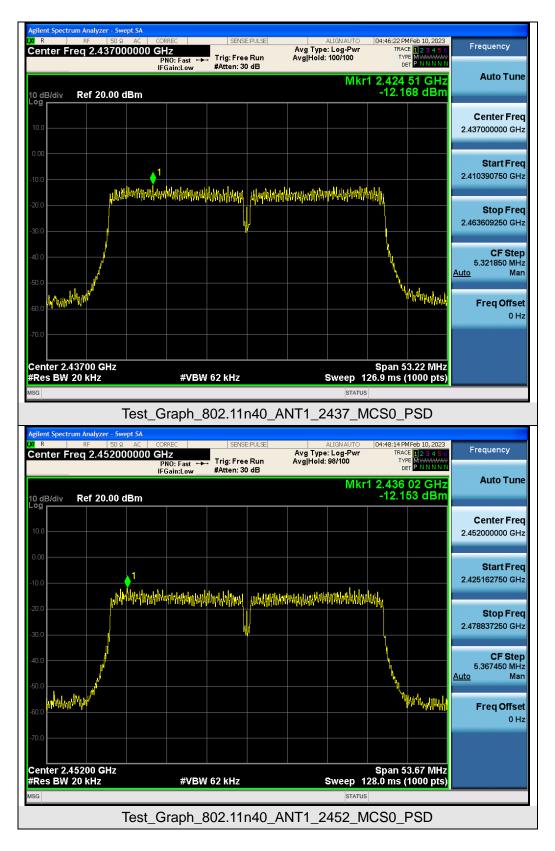



11. RADIATED EMISSION


11.1. MEASUREMENT PROCEDURE

- 1. The EUT was placed on the top of the turntable 0.8 or 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
- 2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- 3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
- 4. For each suspected emission, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
- 5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
- 6. For emissions above 1GHz, use 1MHz RBW and 3MHz VBW for peak reading. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- 7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.
- 8.If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
- 9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- 10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High Low scan is not required in this case.




11.2. TEST SETUP


Radiated Emission Test-Setup Frequency Below 30MHz

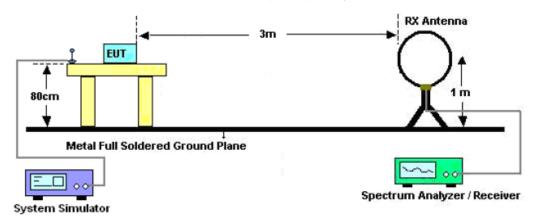

RADIATED EMISSION TEST SETUP 30MHz-1000MHz

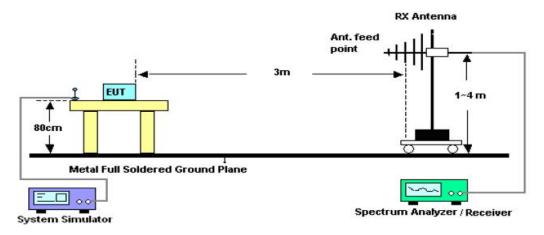

RADIATED EMISSION TEST SETUP ABOVE 1000MHz

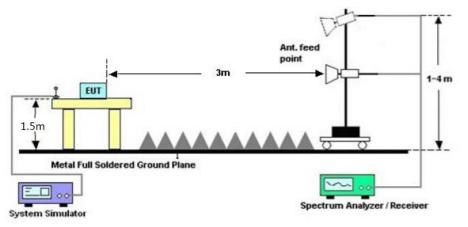



11.3. LIMITS AND MEASUREMENT RESULT

15.209(a) Limit in the below table has to be followed

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

Note: All modes were tested for restricted band radiated emission,

the test records reported below are the worst result compared to other modes.

11.4. TEST RESULT

Radiated emission below 30MHz

The amplitude of spurious emissions from 9kHz to 30MHz which are attenuated more than 20 dB below the permissible value need not be reported.



EUT	Wireless Smart Camera	Model Name	DX7
Temperature	21°C	Relative Humidity	53%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with date rate 1 2412MHz	Antenna	Horizontal

Radiated emission from 30MHz to 1000MHz

												Limit Marg	
32 ////////////////////////////////////	1 	arro de Maleria	she, where				M. M. Marth		*	M	had more that we have a second		pulume then
30.000	40	50	60	70	80		(MHz)	3	300	400	500	600 7	00 1000.0
No.	Mk.	F	req	-	Read Lev		Correct Factor	Measure ment	e-	_imit	0	ver	
No.	Mk.		Freq MHz	·		el			l	_imit dB/m		ver dB	Detector
No.	Mk.		ИНz	-	Lev dBu	el	Factor	ment	l				Detector peak
		Ν	MHz 311	9	Lev dBu	vel ⊐V 62	Factor dB	ment dBuV/m	ا 4	dB/m	-1	dB	
1		۱ 43.8	MHz 3119 772	9 5	Lev dBu 8.0	vel ⊿∨ 62 43	Factor dB 14.96	ment dBuV/m 23.58	4	dB/m 0.00	-1 -1	dB 6.42	peak

RESULT: PASS

5

6 *

620.7096

906.4824

6.07

7.56

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

27.13

29.54

33.20

37.10

-12.80

-8.90

peak

peak

46.00

46.00



EUT	Wireless Smart Car	mera	Model Nan	ne	DX7	
Temperature	21°C		Relative H	umidity	53%	
Pressure	960hPa		Test Voltag	ge	Norm	nal Voltage
Test Mode	802.11b with date ra 2412MHz	ate 1	Antenna		Verti	cal
72.0 dBu¥/m					Limit	_
					Margi	n:
						E
				5		and the second second
32 ×	winner 3 million	4		June Versu	A martine Concerned	and a contract of the
a MV a Ma	Winner Wy	manturana	and property bund the	M ^m		
	. Menuder .	×	W			
-8						
30.000 40	50 60 70 80	(MHz)	300	400	500 600 70	0 1000.000
	Reading	Correct	Measure-			
No. Mk.	Freq. Level	Factor	ment	Limit	Over	
	MHz dBuV	dB	dBuV/m	dB/m	dB	Detector
1 ;	31.1798 16.42	15.75	32.17	40.00	-7.83	peak
2 * 4	42.0065 18.16	16.92	35.08	40.00	-4.92	peak
3	71.0803 11.82	16.44	28.26	40.00	-11.74	peak
4 14	45.8611 8.44	16.91	25.35	43.50	-18.15	peak
5 30	60.4476 11.13	21.20	32.33	46.00	-13.67	peak
6 42	22.0577 14.11	23.23	37.34	46.00	-8.66	peak

RESULT: PASS

Note: 1. Factor=Antenna Factor + Cable loss, Over=Measurement-Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.

3. All test modes had been pre-tested. The 802.11b at low channel is the worst case and recorded in the report.



Radiated emission above 1GHz

EUT	Wireless Smart Camera	Model Name	DX7
Temperature	21°C	Relative Humidity	53%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with date rate 1 2412MHz	Antenna	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type			
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type			
4824.000	54.63	0.08	54.71	74	-19.29	peak			
4824.000	45.17	0.08	45.25	54	-8.75	AVG			
7236.000	49.32	2.21	51.53	74	-22.47	peak			
7236.000	40.26	2.21	42.47	54	-11.53	AVG			
Remark:	Remark:								
Factor = Anter	Factor = Antenna Factor + Cable Loss – Pre-amplifier.								

EUT	Wireless Smart Camera	Model Name	DX7
Temperature	21°C	Relative Humidity	53%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with date rate 1 2412MHz	Antenna	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4824.000	55.26	0.08	55.34	74	-18.66	peak
4824.000	45.38	0.08	45.46	54	-8.54	AVG
7236.000	51.11	2.21	53.32	74	-20.68	peak
7236.000	40.84	2.21	43.05	54	-10.95	AVG
Remark:						
actor = Anter	nna Factor + Cabl	e Loss – Pre-	amplifier.			



EUT	Wireless Smart Camera	Model Name	DX7
Temperature	21°C	Relative Humidity	53%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with date rate 1 2437MHz	Antenna	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4874.000	56.39	0.14	56.53	74	-17.47	peak
4874.000	45.94	0.14	46.08	54	-7.92	AVG
7311.000	51.05	2.36	53.41	74	-20.59	peak
7311.000	40.27	2.36	42.63	54	-11.37	AVG
Remark:			•		•	•
actor = Anter	nna Factor + Cable	e Loss – Pre-	amplifier.			

EUT	Wireless Smart Camera	Model Name	DX7
Temperature	21°C	Relative Humidity	53%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with date rate 1 2437MHz	Antenna	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4874.000	55.32	0.14	55.46	74	-18.54	peak
4874.000	46.15	0.14	46.29	54	-7.71	AVG
7311.000	50.26	2.36	52.62	74	-21.38	peak
7311.000	40.32	2.36	42.68	54	-11.32	AVG
Remark:						
actor = Anter	nna Factor + Cabl	e Loss – Pre-	amplifier.			



EUT	Wireless Smart Camera	Model Name	DX7
Temperature	21°C	Relative Humidity	53%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with date rate 1 2462MHz	Antenna	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4924.000	54.37	0.22	54.59	74	-19.41	peak
4924.000	43.22	0.22	43.44	54	-10.56	AVG
7386.000	49.27	2.64	51.91	74	-22.09	peak
7386.000	40.08	2.64	42.72	54	-11.28	AVG
Remark:						
actor = Anter	nna Factor + Cabl	e Loss – Pre-	amplifier.			

EUT	Wireless Smart Camera	Model Name	DX7
Temperature	21°C	Relative Humidity	53%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with date rate 1 2462MHz	Antenna	Vertical

Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
56.15	0.22	56.37	74	-17.63	peak
45.13	0.22	45.35	54	-8.65	AVG
51.09	2.64	53.73	74	-20.27	peak
42.38	2.64	45.02	54	-8.98	AVG
	56.15 45.13 51.09 42.38	56.15 0.22 45.13 0.22 51.09 2.64 42.38 2.64	56.15 0.22 56.37 45.13 0.22 45.35 51.09 2.64 53.73	56.15 0.22 56.37 74 45.13 0.22 45.35 54 51.09 2.64 53.73 74 42.38 2.64 45.02 54	56.15 0.22 56.37 74 -17.63 45.13 0.22 45.35 54 -8.65 51.09 2.64 53.73 74 -20.27 42.38 2.64 45.02 54 -8.98

RESULT: PASS

Note:

The amplitude of other spurious emissions from 1G to 25 GHz which are attenuated more than 20 dB below the permissible value need not be reported.

Factor = Antenna Factor + Cable loss - Amplifier gain, Margin=Level-Limit.

The "Factor" value can be calculated automatically by software of measurement system.

All test modes had been pre-tested. The 802.11b mode is the worst case and recorded in the report.



EUT	UT Wireless Smart Camera Mo		DX7		
Temperature	21°C	Relative Humidity	53%		
Pressure	960hPa	Test Voltage	Normal Voltage		
Test Mode	802.11b with data rate 1 2412MHz	Antenna	Horizontal		

Test result for band edge emission at restricted bands

Test Graph for Peak Measurement



Test Graph for Average Measurement




RESULT: PASS



EUT Wireless Smart Camera		Model Name	DX7
Temperature	21°C	Relative Humidity	53%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with data rate 1 2412MHz	Antenna	Vertical

Test Graph for Peak Measurement

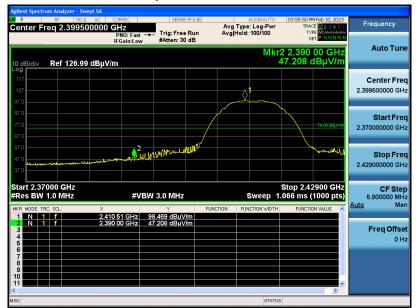

Test Graph for Average Measurement




RESULT: PASS



EUT Wireless Smart Camera		Model Name	DX7
Temperature	21°C	Relative Humidity	53%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with data rate 1 2462MHz	Antenna	Horizontal

Test Graph for Peak Measurement

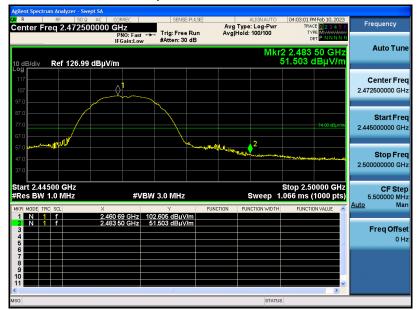

Test Graph for Average Measurement



RESULT: PASS