

Acknowledgement SPECIFICATION FOR APPROVAL

Customer Name

CUSTOME	ER NAME:	Shenzhen Gangshan Guanglian Elect	ronic Technology Co., Ltd.			
Customer Part Nun	nber					
CUSTOME	ER P/N:					
Product Num	ber					
PRODUCT P/N: H1C56F3D362A						
Product Na	me					
PRODUCT	NAME:	2.4Gbuilt-inFPCantenna	1			
Specifications: H1C56F3D362A/2.4Gbuilt-inFPCantenna0.81Black Line						
Descriptio	Description: L=56mm+DomesticIPEX(Second generation)					
Version						
REV:	Aversion					
Factory stamp						
S I G N	Approval Audit Product APPROVED BY CHECKED BY DRA					
Customer signature						
S I G N	quality QE	Development R&D	project PE			



Table of contents

Contents

one, Version History (Revision History)

two, Specifications (Specification Table)

three, Finished product picture (Product Drawing)

Four, Packaging Specifications (Packaging Specifications)

five, Test Report (Test Report)

six, Schematic diagram of the whole machine (Schematic diagram of the entire machine)



1. Version HistoryRevision History):

Version Number Reversio n	Revision Page noodle Revisio	Change Date Change date	Revised by Revised by	Reasons and contents of revision Reason and content for revision	Remark Remarks
А	-	2024.12.11	Victor	First edition released	

illustrate

In principle, this specification is valid for 1 year;

If either party needs to make changes, both parties must reach an agreement and the changes can be implemented; after the validity period of this specification expires, if neither party makes any request for modification, the validity period of this specification will be extended by 1 year.




2. Specifications (Specification Table):


Main technical parameters of the product

Main	technical indicators	Main technical specifications			
Frequency range (MHZ)	2400-2500	Frequency Range (MHZ)	2400-2500		
$Characteristic\ impedance (\Omega)$	50	Impedance(Ω)	50		
Gain(dBi)	2.98	Gain(dBi)	2.98		
Output voltage VSWR	≤2.0	VSWR	≤2.0		
Polarization	Linear polarization	Polarization	Linear		
Directionality	Omnidirectional	Radiation	Omni-directional		
Connection	Cable+IPEX	Connector Type	Cable+IPEX		
P	hysical properties	Physical Properties			
Antenna Materials	FPC	Antenna cover	FPC		
Operating temperature	- 20°C~+70°C	Operating Temp	- 20°C~+70°C		
Storage temperature	- 20°C~+60°C	Storage Temp	- 20°C~+60°C		

3. Finished product picture (Product drawing):

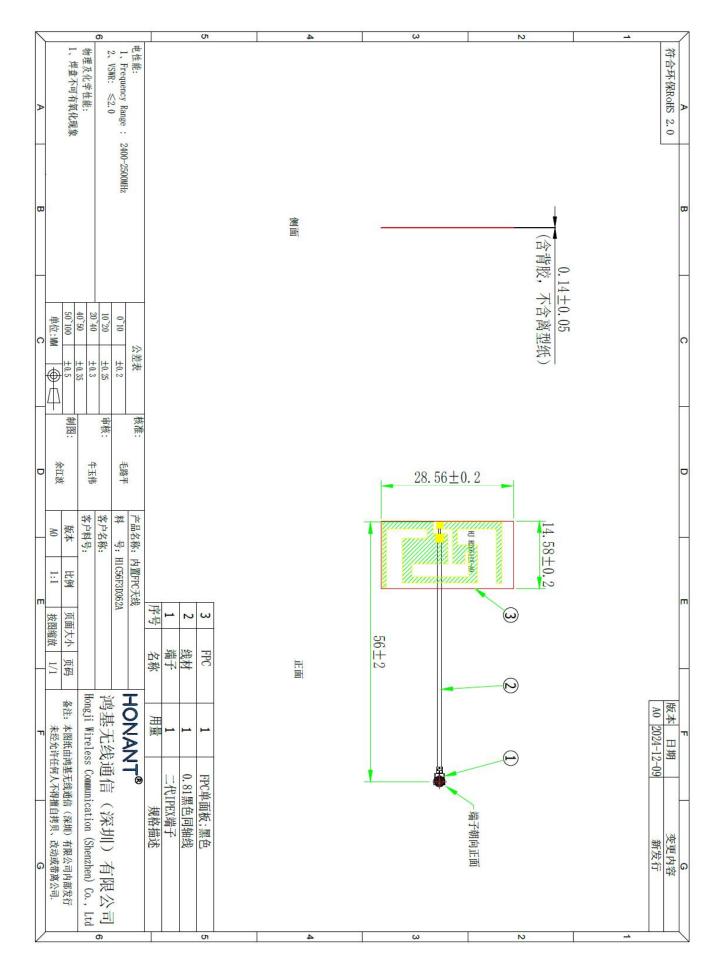


4. Packaging Specifications (Packaging specifications):

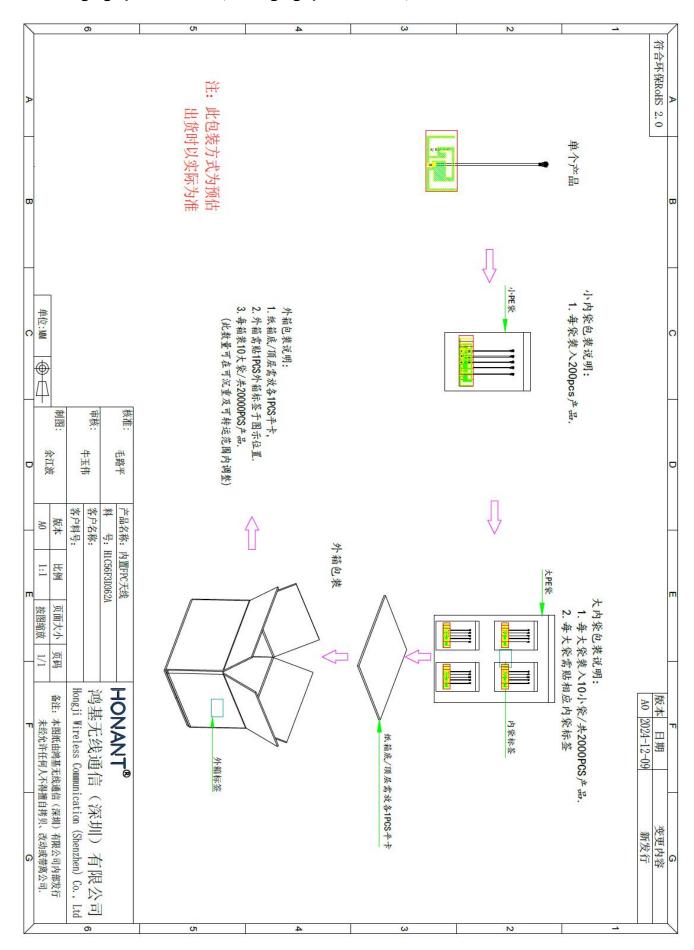




5. Test report:

5.1: Network Analyzer Test Report

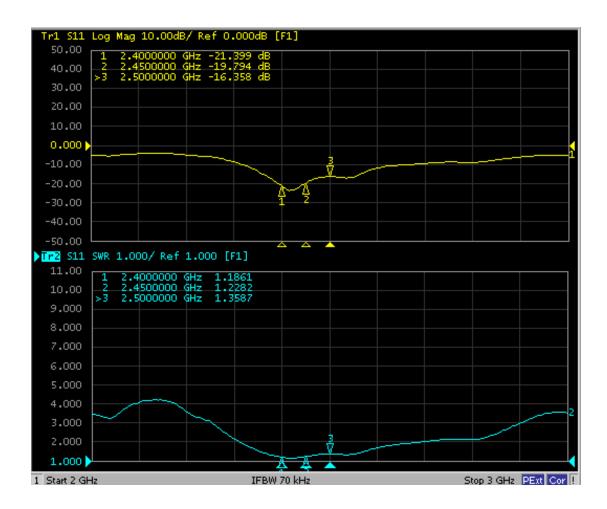

5.2:darkroom2D,3D Raditation Pattern

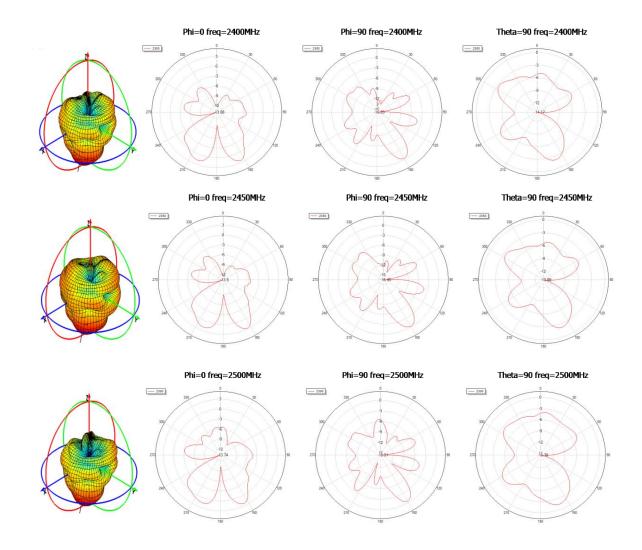

5.3: Antenna gain and efficiency

Frequancy(MHz)	Gain(dBi)	Effciency(%)
2400	2.81	45.31
2410	2.89	46.35
2420	2.94	47.57
2430	2.85	48.66
2440	2.26	49.89
2450	2.98	51.65
2460	2.85	50.09
2470	2.96	49.33
2480	2.87	48.37
2490	2.81	46.04
2500	2.76	44.72

5.4: Active test report

Active Measurement Report											
Manufacturer				Model							
Item	Tester	Measurement	Azimuths	Elevations	Standard	Band	Channel	Frequency	MaxValue	TIS	TRP
1	Cmw500	Tis_with_Eirp	Every30	Every30	WIFI_B	B_11M	1	2412	-80.57	-76.21	13.93
2	Cmw500	Tis_with_Eirp	Every30	Every30	WIFI_B	B_11M	6	2437	-83.21	-78.82	14.26
3	Cmw500	Tis_with_Eirp	Every30	Every30	WIFI_B	B_11M	13	2472	-81.25	-77.34	14.12

6. Schematic diagram of the whole machine (Schematic diagram of the entire machine):





