

FCC Test Report

(PART 22)

Report No.: RF190806C06

FCC ID: 2AQYEFMP172

Test Model: F-01M

Received Date: Aug. 06, 2019

Test Date: Aug. 16 ~ Aug. 29, 2019

Issued Date: Sep. 10, 2019

Applicant: FUJITSU CONNECTED TECHNOLOGIES Ltd.

Address: Chuorinkan 7-10-1 Yamato, Kanagawa 242-0007, Japan

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch
Lin Kou Laboratories

Lab Address: No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan

Test Location: No. 19, Hwa Ya 2nd Rd, Wen Hwa Vil, Kwei Shan Dist., Taoyuan City
33383, Taiwan

**FCC Registration /
Designation Number:** 788550 / TW0003



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification. The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies

Table of Contents

Release Control Record	4
1 Certificate of Conformity	5
2 Summary of Test Results	6
2.1 Measurement Uncertainty	6
2.2 Test Site and Instruments	7
3 General Information	8
3.1 General Description of EUT	8
3.2 Configuration of System under Test	9
3.2.1 Description of Support Units	9
3.3 Test Mode Applicability and Tested Channel Detail	10
3.4 EUT Operating Conditions	12
3.5 General Description of Applied Standards	12
4 Test Types and Results	13
4.1 Output Power Measurement	13
4.1.1 Limits of Output Power Measurement	13
4.1.2 Test Procedures	13
4.1.3 Test Setup	14
4.1.4 Test Results	15
4.2 Modulation Characteristics Measurement	19
4.2.1 Limits of Modulation Characteristics	19
4.2.2 Test Setup	19
4.2.3 Test Procedure	19
4.2.4 Test Results	20
4.3 Frequency Stability Measurement	21
4.3.1 Limits of Frequency Stability Measurement	21
4.3.2 Test Procedure	21
4.3.3 Test Setup	21
4.3.4 Test Results	22
4.4 Occupied Bandwidth Measurement	27
4.4.1 Test Procedure	27
4.4.2 Test Setup	27
4.4.3 Test Result	28
4.5 Band Edge Measurement	31
4.5.1 Limits of Band Edge Measurement	31
4.5.2 Test Setup	31
4.5.3 Test Procedures	31
4.5.4 Test Results	32
4.6 Peak to Average Ratio	36
4.6.1 Limits of Peak to Average Ratio Measurement	36
4.6.2 Test Setup	36
4.6.3 Test Procedures	36
4.6.4 Test Results	36
4.7 Conducted Spurious Emissions	39
4.7.1 Limits of Conducted Spurious Emissions Measurement	39
4.7.2 Test Setup	39
4.7.3 Test Procedure	39
4.7.4 Test Results	40
4.8 Radiated Emission Measurement	45
4.8.1 Limits of Radiated Emission Measurement	45
4.8.2 Test Procedure	45
4.8.3 Deviation from Test Standard	45
4.8.4 Test Setup	46
4.8.5 Test Results	47

5 Pictures of Test Arrangements.....	71
Appendix – Information of the Testing Laboratories	72

Release Control Record

Issue No.	Description	Date Issued
RF190806C06	Original Release	Sep. 10, 2019

1 Certificate of Conformity

Product: Feature Phone

Brand: FUJITSU

Test Model: F-01M

Sample Status: Engineering Sample

Applicant: FUJITSU CONNECTED TECHNOLOGIES Ltd.

Test Date: Aug. 16 ~ Aug. 29, 2019

Standards: FCC Part 22, Subpart H

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's RF characteristics under the conditions specified in this report.

Prepared by : Gina Liu, **Date:** Sep. 10, 2019
Gina Liu / Specialist

Approved by : Dylan Chiou, **Date:** Sep. 10, 2019
Dylan Chiou / Project Engineer

2 Summary of Test Results

Applied Standard: FCC Part 22 & Part 2			
FCC Clause	Test Item	Result	Remarks
2.1046 22.913 (a)	Effective Radiated Power	Pass	Meet the requirement of limit.
2.1047	Modulation Characteristics	Pass	Meet the requirement.
2.1046 22.913 (d)	Peak to Average Ratio	Pass	Meet the requirement of limit.
2.1055 22.355	Frequency Stability	Pass	Meet the requirement of limit.
2.1049	Occupied Bandwidth	Pass	Meet the requirement of limit.
22.917	Band Edge Measurements	Pass	Meet the requirement of limit.
2.1051 22.917	Conducted Spurious Emissions	Pass	Meet the requirement of limit.
2.1053 22.917	Radiated Spurious Emissions	Pass	Meet the requirement of limit. Minimum passing margin is -25.43 dB at 4182.50 MHz.

Note: Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) (±)
Radiated Emissions up to 1 GHz	9 kHz ~ 30 MHz	3.04 dB
	30 MHz ~ 200 MHz	2.93 dB
	200 MHz ~ 1000 MHz	2.95 dB
Radiated Emissions above 1 GHz	1 GHz ~ 18 GHz	2.26 dB
	18 GHz ~ 40 GHz	1.94 dB

2.2 Test Site and Instruments

Description & Manufacturer	Model No.	Serial No.	Date of Calibration	Due Date of Calibration
Test Receiver Agilent	N9038A	MY51210203	Mar. 18, 2019	Mar. 17, 2020
Spectrum Analyzer Agilent	N9010A	MY52220314	Dec. 13, 2018	Dec. 12, 2019
Spectrum Analyzer ROHDE & SCHWARZ	FSU43	101261	Apr. 15, 2019	Apr. 14, 2020
HORN Antenna SCHWARZBECK	BBHA 9120 D	9120D-969	Nov. 25, 2018	Nov. 24, 2019
HORN Antenna SCHWARZBECK	BBHA 9170	148	Nov. 25, 2018	Nov. 24, 2019
BILOG Antenna SCHWARZBECK	VULB9168	9168-472	Nov. 23, 2018	Nov. 22, 2019
Fixed Attenuator Mini-Circuits	MDCS18N-10	MDCS18N-10-01	Apr. 15, 2019	Apr. 14, 2020
MXG Vector signal generator Agilent	N5182B	MY53050430	Nov. 19, 2018	Nov. 18, 2019
Preamplifier EMCI	EMC 184045	980116	Oct. 12, 2018	Oct. 11, 2019
Preamplifier EMCI	EMC 012645	980115	Oct. 12, 2018	Oct. 11, 2019
Preamplifier EMCI	EMC 330H	980112	Oct. 12, 2018	Oct. 11, 2019
RF Coaxial Cable HUBER+SUHNNER	EMC104-SM-SM-800 0&3000	140811+170717	Oct. 12, 2018	Oct. 11, 2019
RF Coaxial Cable HUBER+SUHNNER	SUCOFLEX 104	EMC104-SM-SM-1 000(140807)	Oct. 12, 2018	Oct. 11, 2019
RF Coaxial Cable Worken	8D-FB	Cable-Ch10-01	Oct. 12, 2018	Oct. 11, 2019
Boresight Antenna Fixture	FBA-01	FBA-SIP01	NA	NA
Software BV ADT	E3 6.120103	NA	NA	NA
Antenna Tower MF	MFA-440H	NA	NA	NA
Turn Table MF	MFT-201SS	NA	NA	NA
Antenna Tower & Turn Table Controller MF	MF-7802	NA	NA	NA
Radio Communication Analyzer Anritsu	MT8821C	6201502978	Jun. 13, 2019	Jun. 12, 2020
Temperature & Humidity Chamber	GTH-120-40-CP-AR	MAA1306-019	Sep. 05, 2018	Sep. 04, 2019
DC Power Supply Topward	33010D	807748	N/A	N/A

- Note:
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The test was performed in HwaYa Chamber 10.
 3. The horn antenna and preamplifier (model: EMC 184045) are used only for the measurement of emission frequency above 1 GHz if tested.

3 General Information

3.1 General Description of EUT

Product	Feature Phone	
Brand	FUJITSU	
Test Model	F-01M	
Status of EUT	Engineering Sample	
Power Supply Rating	5.0 Vdc (adapter or host equipment) 3.8 Vdc (Li-ion battery)	
Modulation Type	WCDMA	QPSK
	LTE	QPSK, 16QAM
Frequency Range	WCDMA	826.4 ~ 846.6 MHz
	LTE 5 (Channel Bandwidth: 1.4 MHz)	824.7 ~ 848.3 MHz
	LTE 5 (Channel Bandwidth: 3 MHz)	825.5 ~ 847.5 MHz
	LTE 5 (Channel Bandwidth: 5 MHz)	826.5 ~ 846.5 MHz
	LTE 5 (Channel Bandwidth: 10 MHz)	829 ~ 844 MHz
Max. ERP Power	WCDMA	87.90 mW
	LTE 5 (Channel Bandwidth: 1.4 MHz)	76.21 mW
	LTE 5 (Channel Bandwidth: 3 MHz)	82.04 mW
	LTE 5 (Channel Bandwidth: 5 MHz)	86.70 mW
	LTE 5 (Channel Bandwidth: 10 MHz)	92.90 mW
Emission Designator	WCDMA	4M15F9W
	LTE 5 (Channel Bandwidth: 1.4 MHz)	1M09D7W
	LTE 5 (Channel Bandwidth: 3 MHz)	2M70G7D
	LTE 5 (Channel Bandwidth: 5 MHz)	4M49D7W
	LTE 5 (Channel Bandwidth: 10 MHz)	8M96D7W
Antenna Type	Monopole Antenna with -0.7 dBi gain	
Accessory Device	Refer to Note as below	
Data Cable Supplied	N/A	

Note:


1. The EUT contains following accessory devices.

Product	Brand	Model	Description
Adapter (Optional)	FUJITSU LIMITED	FMV-AC346	I/P: 100-240 Vac, 50/60 Hz, 0.3 A O/P: 5 Vdc, 2 A
Battery	FUJITSU LIMITED	CA54310-0078	3.8 Vdc, 1500 mAh
Cradle	FUJITSU LIMITED	F49	O/P: 5 Vdc, 1.5 A


2. The above EUT information is declared by manufacturer and for more detailed features description, please refers to the manufacturer's specifications or user's manual.

3.2 Configuration of System under Test

<Radiated Emission Test>

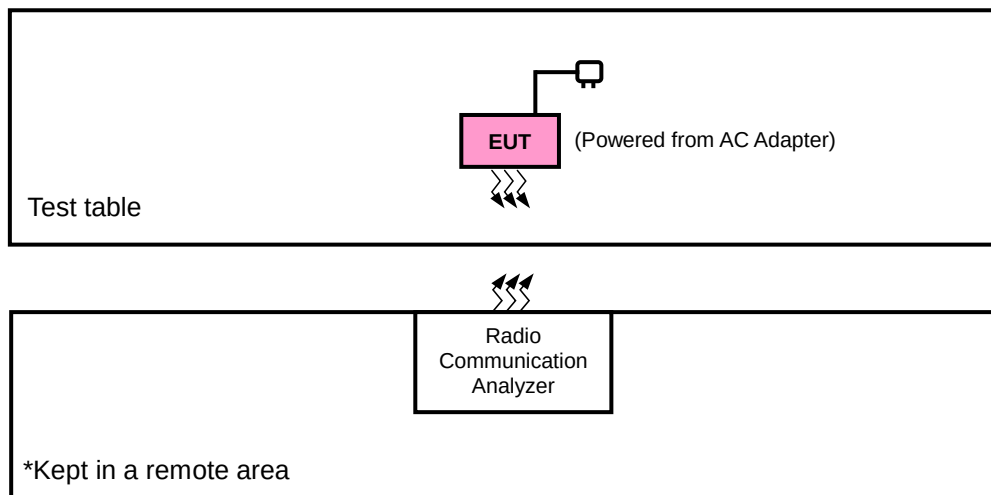

<E.R.P. Test>

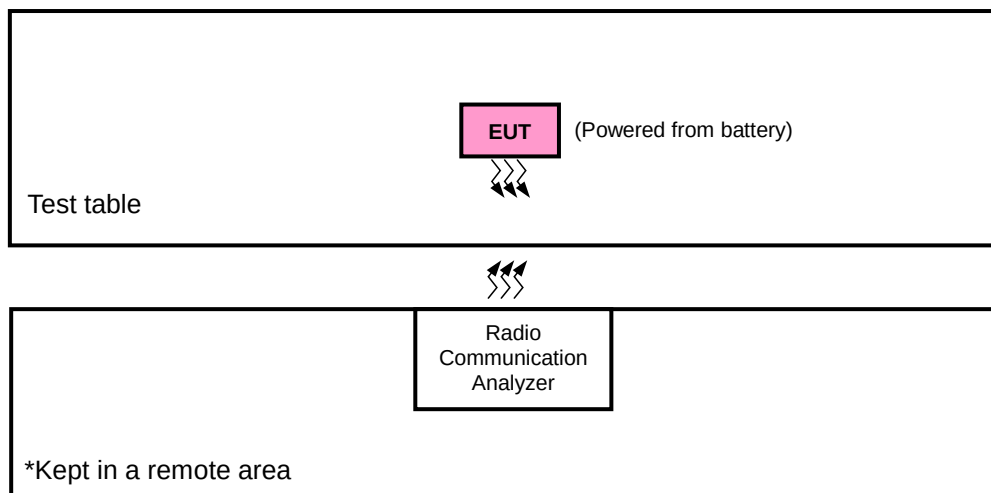

3.2.1 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units.

3.3 Test Mode Applicability and Tested Channel Detail

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis, and antenna ports.

The worst case was found when positioned as the table below. Following channel(s) was (were) selected for the final test as listed below:

Band	ERP	Radiated Emission
WCDMA	Y-plane	X-axis
LTE Band 5	Y-plane	Z-axis

WCDMA

EUT Configure Mode	Test Item	Available Channel	Tested Channel	Mode
-	ERP	4132 to 4233	4132, 4182, 4233	WCDMA
-	Modulation Characteristics	4132 to 4233	4182	WCDMA
-	Frequency Stability	4132 to 4233	4132, 4233	WCDMA
-	Occupied Bandwidth	4132 to 4233	4132, 4182, 4233	WCDMA
-	Band Edge	4132 to 4233	4132, 4233	WCDMA
-	Peak to Average Ratio	4132 to 4233	4132, 4182, 4233	WCDMA
-	Conducted Emission	4132 to 4233	4132, 4182, 4233	WCDMA
-	Radiated Emission	4132 to 4233	4132, 4182, 4233	WCDMA

LTE Band 5

EUT Configure Mode	Test Item	Available Channel	Tested Channel	Channel Bandwidth	Modulation	Mode
-	ERP	20407 to 20643	20407, 20525, 20643	1.4 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		20415 to 20635	20415, 20525, 20635	3 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		20425 to 20625	20425, 20525, 20625	5 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		20450 to 20600	20450, 20525, 20600	10 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
-	Modulation Characteristics	20450 to 20600	20525	10 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
-	Frequency Stability	20407 to 20643	20407, 20643	1.4 MHz	QPSK	1 RB / 0 RB Offset
		20415 to 20635	20415, 20635	3 MHz	QPSK	1 RB / 0 RB Offset
		20425 to 20625	20425, 20625	5 MHz	QPSK	1 RB / 0 RB Offset
		20450 to 20600	20450, 20600	10 MHz	QPSK	1 RB / 0 RB Offset
-	Occupied Bandwidth	20407 to 20643	20407, 20525, 20643	1.4 MHz	QPSK, 16QAM	6 RB / 0 RB Offset
		20415 to 20635	20415, 20525, 20635	3 MHz	QPSK, 16QAM	15 RB / 0 RB Offset
		20425 to 20625	20425, 20525, 20625	5 MHz	QPSK, 16QAM	25 RB / 0 RB Offset
		20450 to 20600	20450, 20525, 20600	10 MHz	QPSK, 16QAM	50 RB / 0 RB Offset
-	Band Edge	20407 to 20643	20407	1.4MHz	QPSK	1 RB / 0 RB Offset
			20643	1.4MHz	QPSK	6 RB / 0 RB Offset
		20415 to 20635	20415	3 MHz	QPSK	1 RB / 5 RB Offset
			20635	3 MHz	QPSK	6 RB / 0 RB Offset
		20425 to 20625	20425	5 MHz	QPSK	1 RB / 0 RB Offset
			20625	5 MHz	QPSK	15 RB / 0 RB Offset
		20450 to 20600	20450	10 MHz	QPSK	1 RB / 24 RB Offset
			20600	10 MHz	QPSK	25 RB / 0 RB Offset
		20407 to 20643	20407, 20525, 20643	1.4 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
			20415, 20525, 20635	3 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		20425 to 20625	20425, 20525, 20625	5 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
			20450, 20525, 20600	10 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
-	Conducted Emission	20407 to 20643	20407, 20525, 20643	1.4 MHz	QPSK	1 RB / 0 RB Offset
		20415 to 20635	20415, 20525, 20635	3 MHz	QPSK	1 RB / 0 RB Offset
		20425 to 20625	20425, 20525, 20625	5 MHz	QPSK	1 RB / 0 RB Offset
		20450 to 20600	20450, 20525, 20600	10 MHz	QPSK	1 RB / 0 RB Offset
-	Radiated Emission	20407 to 20643	20407, 20525, 20643	1.4 MHz	QPSK	1 RB / 0 RB Offset
		20425 to 20625	20425, 20525, 20625	5 MHz	QPSK	1 RB / 0 RB Offset
		20450 to 20600	20450, 20525, 20600	10 MHz	QPSK	1 RB / 0 RB Offset

Note:

1. This device was tested under all bandwidths, RB configurations and modulations. The worst case was found in QPSK modulation.
2. For radiated emission above 1 GHz, according to 3GPP 36.521 Section 6.6.3.1.4, choose the lowest, 5 MHz & highest channel bandwidth for final test.

Test Condition:

Test Item	Environmental Conditions	Input Power	Tested By
ERP	25 deg. C, 65 % RH	3.8 Vdc	Gavin Wu
Modulation Characteristics	25 deg. C, 65 % RH	3.8 Vdc	Gavin Wu
Frequency Stability	25 deg. C, 65 % RH	3.8 Vdc	Gavin Wu
Occupied Bandwidth	25 deg. C, 65 % RH	3.8 Vdc	Gavin Wu
Band Edge	25 deg. C, 65 % RH	3.8 Vdc	Gavin Wu
Peak to Average Ratio	25 deg. C, 65 % RH	3.8 Vdc	Gavin Wu
Conducted Emission	25 deg. C, 65 % RH	3.8 Vdc	Gavin Wu
Radiated Emission	25 deg. C, 65 % RH	120 Vac, 60 Hz	Anson Lin

3.4 EUT Operating Conditions

The EUT makes a call to the communication simulator. The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency.

3.5 General Description of Applied Standards

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC 47 CFR Part 2

FCC 47 CFR Part 22

KDB 971168 D01 Power Meas License Digital Systems v03r01

ANSI/TIA/EIA-603-E 2016

ANSI 63.26-2015

Note: All test items have been performed and recorded as per the above standards.

4 Test Types and Results

4.1 Output Power Measurement

4.1.1 Limits of Output Power Measurement

Mobile / Portable station are limited to 7 watts e.r.p.

4.1.2 Test Procedures

EIRP / ERP Measurement:

- a. All measurements were done at low, middle and high operational frequency range. RBW and VBW is 1 MHz for GSM, GPRS & EDGE, and 5 MHz for WCDMA and CDMA, and 10 MHz for LTE mode.
- b. Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8 m (below or equal 1 GHz) and/or 1.5 m (above 1 GHz) height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1 m to 4 m to find the maximum polar radiated power. The "Read Value" is the spectrum reading the maximum power value.
- c. The substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a tx cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to "Read Value" of step b. Record the power level of S.G.
- d. $EIRP = \text{Output power level of S.G} - \text{TX cable loss} + \text{Antenna gain of substitution horn}$. E.R.P power can be calculated from E.I.R.P power by subtracting the gain of dipole, $E.R.P \text{ power} = E.I.R.P \text{ power} - 2.15 \text{ dB}$.


Conducted Power Measurement:

The EUT was set up for the maximum power with GSM, GPRS, EDGE, WCDMA, CDMA, and LTE link data modulation and link up with simulator. Set the EUT to transmit under low, middle and high channel and record the power level shown on simulator.


4.1.3 Test Setup

EIRP / ERP Measurement:

<Radiated Emission below or equal 1 GHz>

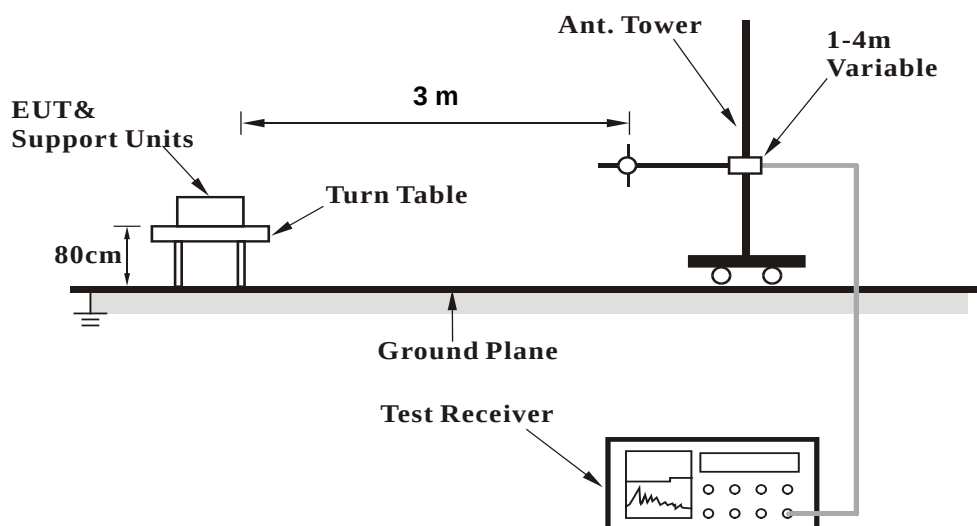


<Radiated Emission above 1 GHz>

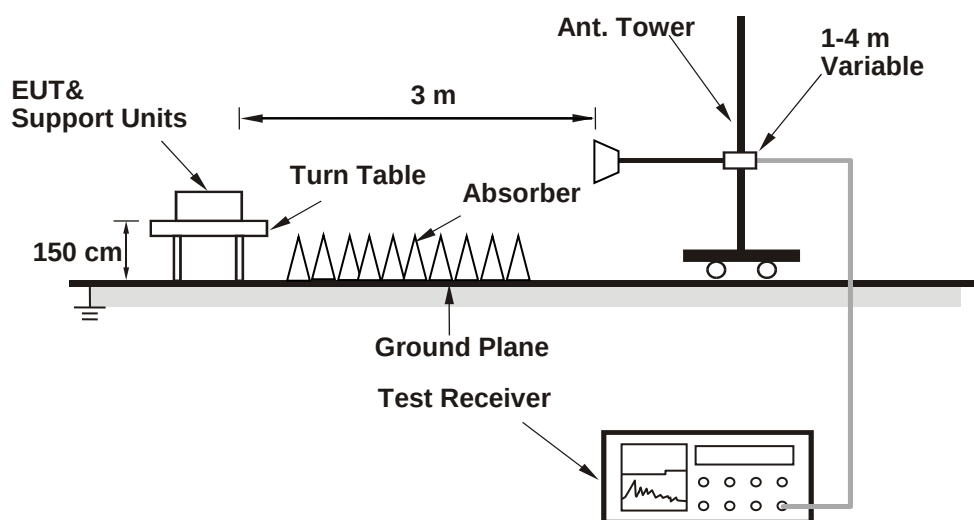

For the actual test configuration, please refer to the attached file (Test Setup Photo).

Conducted Power Measurement:



4.1.4 Test Results

Conducted Output Power (dBm)

Band	WCDMA Band V			3GPP MPR (dB)
Channel	4132	4182	4233	
Frequency (MHz)	826.4	836.4	846.6	
RMC 12.2K	22.86	22.95	22.99	-
HSDPA Subtest-1	22.08	22.09	22.22	0
HSDPA Subtest-2	22.06	22.15	22.17	0
HSDPA Subtest-3	21.65	21.66	21.69	0.5
HSDPA Subtest-4	21.64	21.65	21.68	0.5
HSUPA Subtest-1	21.91	22.17	21.90	0
HSUPA Subtest-2	20.59	20.85	20.60	2
HSUPA Subtest-3	20.77	20.77	20.73	1
HSUPA Subtest-4	20.97	20.99	20.98	2
HSUPA Subtest-5	22.00	22.20	22.10	0

LTE Band 5																
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)	BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)	
		Channel		20450	20525	20600				Channel		20425	20525	20625		
		Frequency (MHz)		829.0	836.5	844.0				Frequency (MHz)		826.5	836.5	846.5		
10M	QPSK	1	0	22.73	22.52	22.68	0	5M	QPSK	1	0	22.71	22.45	22.66	0	
		1	24	22.86	22.65	22.81	0			1	12	22.79	22.57	22.80	0	
		1	49	22.66	22.45	22.61	0			1	24	22.63	22.36	22.59	0	
		25	0	21.81	21.60	21.76	1			12	0	21.71	21.58	21.66	1	
		25	12	21.84	21.63	21.79	1			12	6	21.76	21.61	21.69	1	
		25	25	21.64	21.43	21.59	1			12	13	21.55	21.41	21.49	1	
		50	0	21.74	21.53	21.69	1			25	0	21.66	21.52	21.64	1	
	16QAM	1	0	21.30	21.09	21.25	1		16QAM	1	0	21.25	21.09	21.23	1	
		1	24	21.50	21.29	21.45	1			1	12	21.49	21.25	21.35	1	
		1	49	21.48	21.27	21.43	1			1	24	21.44	21.26	21.42	1	
		25	0	20.81	20.60	20.76	2			12	0	20.73	20.51	20.71	2	
		25	12	20.92	20.71	20.87	2			12	6	20.85	20.67	20.84	2	
		25	25	20.73	20.52	20.68	2			12	13	20.67	20.52	20.60	2	
		50	0	20.95	20.74	20.90	2			25	0	20.85	20.71	20.83	2	
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)	BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)	
		Channel		20415	20525	20635				Channel		20407	20525	20643		
		Frequency (MHz)		825.5	836.5	847.5				Frequency (MHz)		824.7	836.5	848.3		
3M	QPSK	1	0	22.58	22.38	22.49	0	1.4M	QPSK	1	0	22.61	22.34	22.58	0	
		1	7	22.68	22.41	22.69	0			1	2	22.67	22.42	22.71	0	
		1	14	22.47	22.27	22.37	0			1	5	22.60	22.30	22.53	0	
		8	0	21.69	21.46	21.71	1			3	0	22.65	22.55	22.58	0	
		8	3	21.61	21.46	21.63	1			3	1	22.80	22.41	22.69	0	
		8	7	21.53	21.29	21.44	1			3	3	22.58	22.35	22.37	0	
		15	0	21.66	21.31	21.54	1			6	0	21.61	21.32	21.60	1	
	16QAM	1	0	21.17	20.98	21.19	1		16QAM	1	0	21.11	20.96	21.15	1	
		1	7	21.30	21.12	21.30	1			1	2	21.47	21.16	21.41	1	
		1	14	21.46	21.16	21.43	1			1	5	21.32	21.20	21.30	1	
		8	0	20.67	20.37	20.71	2			3	0	21.69	21.49	21.66	1	
		8	3	20.81	20.55	20.75	2			3	1	21.74	21.60	21.73	1	
		8	7	20.68	20.41	20.47	2			3	3	21.72	21.39	21.64	1	
		15	0	20.92	20.57	20.79	2			6	0	20.88	20.51	20.70	2	

ERP Power (dBm)

WCDMA							
Plane	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (mW)	Polarization (H/V)
Y	4132	826.4	-17.63	32.62	12.84	19.23	H
	4182	836.4	-17.38	32.52	12.99	19.91	
	4233	846.6	-17.59	32.65	12.91	19.54	
	4132	826.4	-11.29	32.76	19.32	85.51	V
	4182	836.4	-10.80	32.39	19.44	87.90	
	4233	846.6	-11.01	32.54	19.38	86.70	

Note: ERP (dBm) = Reading (dBm) + Correction Factor (dB) – 2.15

LTE Band 5							
Channel Bandwidth: 1.4 MHz / QPSK							
Plane	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (mW)	Polarization (H/V)
Y	20407	824.7	-18.26	32.62	12.21	16.63	H
	20525	836.5	-17.99	32.52	12.38	17.30	
	20643	848.3	-18.47	32.65	12.03	15.96	
	20407	824.7	-11.83	32.76	18.78	75.51	V
	20525	836.5	-11.42	32.39	18.82	76.21	
	20643	848.3	-11.75	32.54	18.64	73.11	
Channel Bandwidth: 1.4 MHz / 16QAM							
Y	20407	824.7	-19.25	32.62	11.22	13.24	H
	20525	836.5	-19.10	32.52	11.27	13.40	
	20643	848.3	-19.48	32.65	11.02	12.65	
	20407	824.7	-13.02	32.76	17.59	57.41	V
	20525	836.5	-12.36	32.39	17.88	61.38	
	20643	848.3	-12.90	32.54	17.49	56.10	

Note: ERP (dBm) = Reading (dBm) + Correction Factor (dB) – 2.15

LTE Band 5							
Channel Bandwidth: 3 MHz / QPSK							
Plane	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (mW)	Polarization (H/V)
Y	20415	825.5	-18.06	32.62	12.41	17.42	H
	20525	836.5	-17.76	32.52	12.61	18.24	
	20635	847.5	-18.20	32.65	12.30	16.98	
	20415	825.5	-11.58	32.76	19.03	79.98	V
	20525	836.5	-11.10	32.39	19.14	82.04	
	20635	847.5	-11.43	32.54	18.96	78.70	
Channel Bandwidth: 3 MHz / 16QAM							
Y	20415	825.5	-19.01	32.62	11.46	14.00	H
	20525	836.5	-18.90	32.52	11.47	14.03	
	20635	847.5	-19.19	32.65	11.31	13.52	
	20415	825.5	-12.74	32.76	17.87	61.24	V
	20525	836.5	-12.07	32.39	18.17	65.61	
	20635	847.5	-12.60	32.54	17.79	60.12	

Note: ERP (dBm) = Reading (dBm) + Correction Factor (dB) – 2.15

LTE Band 5							
Channel Bandwidth: 5 MHz / QPSK							
Plane	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (mW)	Polarization (H/V)
Y	20425	826.5	-17.83	32.62	12.64	18.37	H
	20525	836.5	-17.51	32.52	12.86	19.32	
	20625	846.5	-17.87	32.65	12.63	18.32	
	20425	826.5	-11.36	32.76	19.25	84.14	V
	20525	836.5	-10.86	32.39	19.38	86.70	
	20625	846.5	-11.16	32.54	19.23	83.75	
Channel Bandwidth: 5 MHz / 16QAM							
Y	20425	826.5	-18.80	32.62	11.67	14.69	H
	20525	836.5	-18.67	32.52	11.70	14.79	
	20625	846.5	-18.97	32.65	11.53	14.22	
	20425	826.5	-12.43	32.76	18.18	65.77	V
	20525	836.5	-11.81	32.39	18.43	69.66	
	20625	846.5	-12.33	32.54	18.06	63.97	

Note: ERP (dBm) = Reading (dBm) + Correction Factor (dB) – 2.15

LTE Band 5							
Channel Bandwidth: 10 MHz / QPSK							
Plane	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (mW)	Polarization (H/V)
Y	20450	829.0	-17.52	32.62	12.95	19.72	H
	20525	836.5	-17.31	32.52	13.06	20.23	
	20600	844.0	-17.63	32.65	12.87	19.36	
	20450	829.0	-11.02	32.76	19.59	90.99	V
	20525	836.5	-10.56	32.39	19.68	92.90	
	20600	844.0	-10.87	32.54	19.52	89.54	
Channel Bandwidth: 10 MHz / 16QAM							
Y	20425	826.5	-18.60	32.62	11.87	15.38	H
	20525	836.5	-18.39	32.52	11.98	15.78	
	20625	846.5	-18.70	32.65	11.80	15.14	
	20425	826.5	-12.12	32.76	18.49	70.63	V
	20525	836.5	-11.51	32.39	18.73	74.64	
	20625	846.5	-12.10	32.54	18.29	67.45	

Note: ERP (dBm) = Reading (dBm) + Correction Factor (dB) – 2.15

4.2 Modulation Characteristics Measurement

4.2.1 Limits of Modulation Characteristics

N/A



4.2.2 Test Setup



4.2.3 Test Procedure

Connect the EUT to Communication Simulator via the antenna connector. The frequency band is set as EUT supported Modulation and Channels, the EUT output is matched with 50 ohm load, the waveform quality and constellation of the EUT was tested.

4.2.4 Test Results

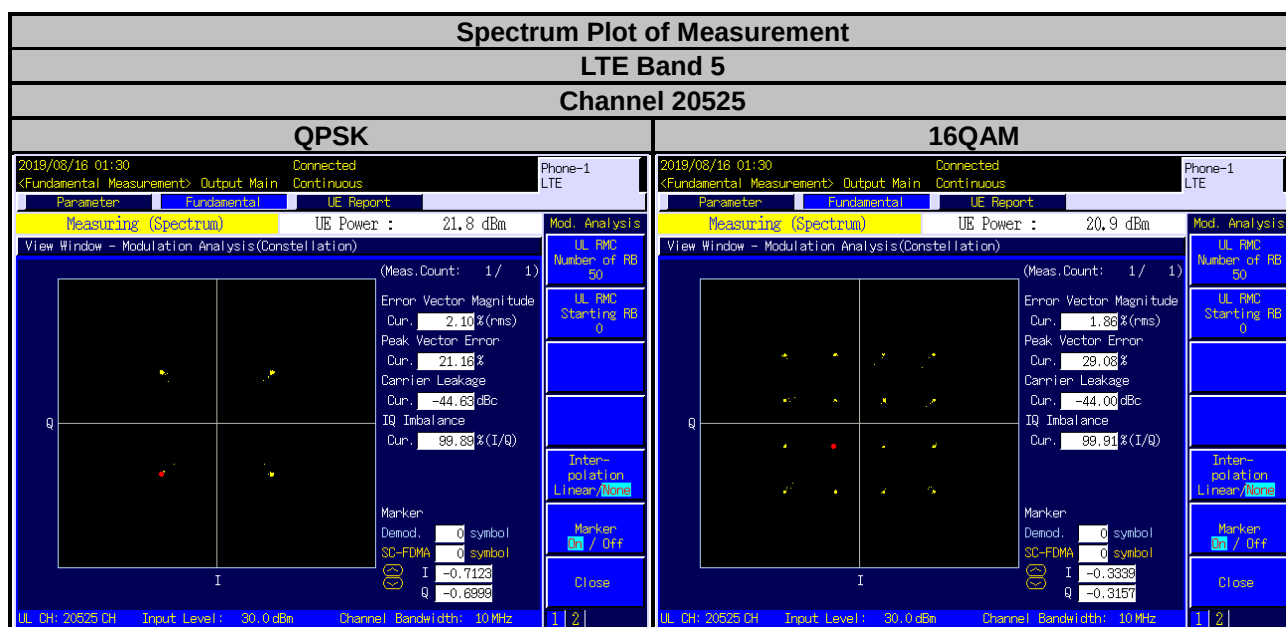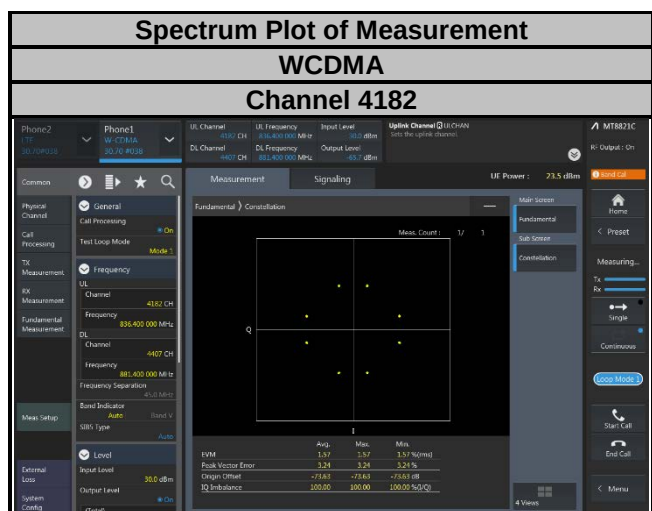

4.3 Frequency Stability Measurement

4.3.1 Limits of Frequency Stability Measurement


1.5 ppm is for base and fixed station. 2.5 ppm is for mobile station.

4.3.2 Test Procedure

- Device is placed at the oven room. The oven room could control the temperatures and humidity. Power warm up is at least 15 min and power applied should perform before recording frequency error.
- EUT is connected the external power supply to control the DC input power. The test voltage range is from minimum to maximum working voltage. Each step shall be record the frequency error rate.
- The temperature range step is 10 degrees in this test items. All temperature levels shall be hold the ± 0.5 °C during the measurement testing. The each temperature step shall be at least 0.5 hours, consider the EUT could be test under the stability condition.

NOTE: The frequency error was recorded frequency error from the communication simulator.

4.3.3 Test Setup

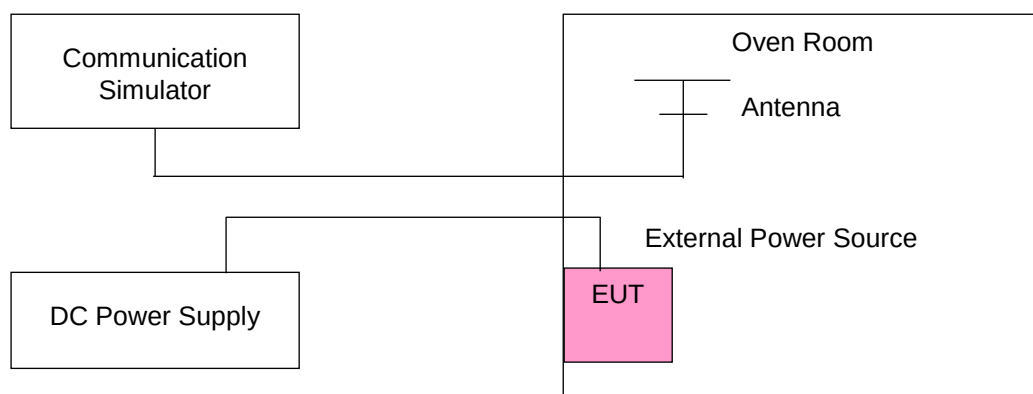

4.3.4 Test Results

Frequency Error vs. Voltage

Voltage (Volts)	WCDMA				Limit (ppm)
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
3.8	826.400003	0.004	846.600003	0.003	2.5
3.23	826.400003	0.004	846.600001	0.001	2.5
4.37	826.400003	0.004	846.600001	0.002	2.5

Note: The applicant defined the normal working voltage of the battery is from 3.23 Vdc to 4.37 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	WCDMA				Limit (ppm)
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
-10	826.400001	0.001	846.600004	0.004	2.5
0	826.400003	0.004	846.600001	0.001	2.5
10	826.399996	-0.005	846.599997	-0.004	2.5
20	826.399996	-0.004	846.599997	-0.004	2.5
30	826.399998	-0.002	846.599998	-0.002	2.5
40	826.399997	-0.003	846.599997	-0.004	2.5
50	826.399998	-0.003	846.599997	-0.004	2.5

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 5				Limit (ppm)
	Channel Bandwidth: 1.4 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
3.8	824.700003	0.004	848.300003	0.003	2.5
3.23	824.700001	0.001	848.300002	0.002	2.5
4.37	824.700004	0.004	848.300002	0.002	2.5

Note: The applicant defined the normal working voltage of the battery is from 3.23 Vdc to 4.37 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 5				Limit (ppm)
	Channel Bandwidth: 1.4 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
-10	824.700004	0.004	848.300002	0.002	2.5
0	824.700002	0.003	848.300002	0.003	2.5
10	824.699998	-0.003	848.299996	-0.005	2.5
20	824.699997	-0.003	848.299997	-0.004	2.5
30	824.699996	-0.004	848.299996	-0.004	2.5
40	824.699997	-0.004	848.299999	-0.002	2.5
50	824.699998	-0.002	848.299999	-0.002	2.5

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 5				Limit (ppm)
	Channel Bandwidth: 3 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
3.8	825.500003	0.004	847.500004	0.004	2.5
3.23	825.500003	0.004	847.500004	0.004	2.5
4.37	825.500003	0.003	847.500004	0.004	2.5

Note: The applicant defined the normal working voltage of the battery is from 3.23 Vdc to 4.37 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 5				Limit (ppm)
	Channel Bandwidth: 3 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
-10	825.500002	0.002	847.500002	0.002	2.5
0	825.500001	0.001	847.500004	0.004	2.5
10	825.499996	-0.004	847.499997	-0.003	2.5
20	825.499996	-0.005	847.499996	-0.005	2.5
30	825.499998	-0.003	847.499999	-0.001	2.5
40	825.499998	-0.003	847.499997	-0.004	2.5
50	825.499997	-0.004	847.499996	-0.005	2.5

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 5				Limit (ppm)
	Channel Bandwidth: 5 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
3.8	826.500001	0.002	846.500003	0.003	2.5
3.23	826.500003	0.004	846.500002	0.003	2.5
4.37	826.500003	0.003	846.500003	0.003	2.5

Note: The applicant defined the normal working voltage of the battery is from 3.23 Vdc to 4.37 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 5				Limit (ppm)
	Channel Bandwidth: 5 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
-10	826.500002	0.002	846.500002	0.002	2.5
0	826.500001	0.001	846.500001	0.001	2.5
10	826.499997	-0.003	846.499996	-0.004	2.5
20	826.499998	-0.003	846.499998	-0.002	2.5
30	826.499997	-0.003	846.499997	-0.003	2.5
40	826.499997	-0.003	846.499997	-0.004	2.5
50	826.499998	-0.003	846.499996	-0.005	2.5

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 5				Limit (ppm)
	Channel Bandwidth: 10 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
3.8	829.000003	0.003	844.000003	0.004	2.5
3.23	829.000004	0.005	844.000004	0.005	2.5
4.37	829.000003	0.003	844.000003	0.003	2.5

Note: The applicant defined the normal working voltage of the battery is from 3.23 Vdc to 4.37 Vdc.

Frequency Error vs. Temperature


Temp. (°C)	LTE Band 5				Limit (ppm)
	Channel Bandwidth: 10 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
-10	829.000001	0.001	844.000002	0.002	2.5
0	829.000003	0.004	844.000002	0.003	2.5
10	828.999997	-0.004	843.999997	-0.004	2.5
20	828.999997	-0.003	843.999997	-0.004	2.5
30	828.999999	-0.001	843.999999	-0.002	2.5
40	828.999996	-0.004	843.999998	-0.002	2.5
50	828.999999	-0.002	843.999998	-0.002	2.5

4.4 Occupied Bandwidth Measurement

4.4.1 Test Procedure


The EUT makes a call to the communication simulator. All measurements were done at low, middle and high operational frequency range. The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency. Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth.

4.4.2 Test Setup

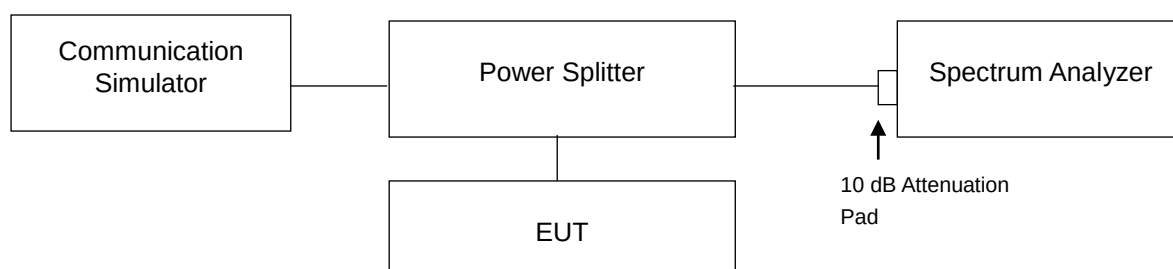


4.4.3 Test Result


WCDMA			
Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)	26 dB Bandwidth (MHz)
4132	826.4	4.1423	4.7510
4182	836.4	4.1487	4.7430
4233	846.6	4.1532	4.7480

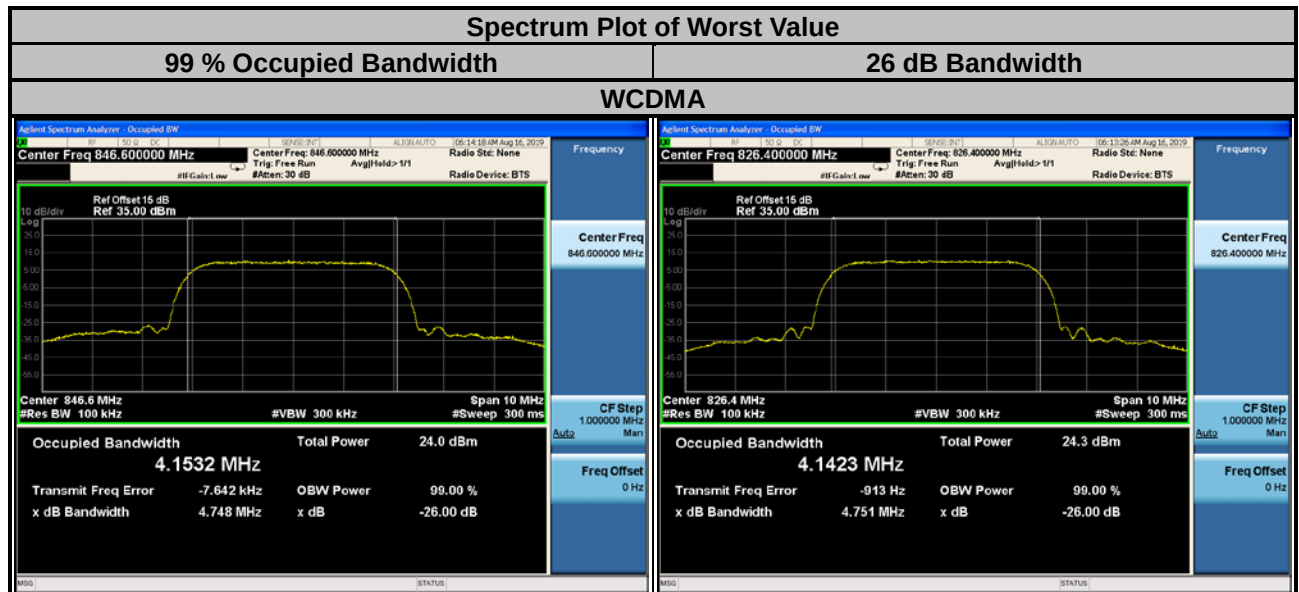

LTE Band 5					
Channel Bandwidth: 1.4 MHz					
Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)		26 dB Bandwidth (MHz)	
		QPSK	16QAM	QPSK	16QAM
20407	824.7	1.0863	1.0890	1.2560	1.2540
20525	836.5	1.0861	1.0891	1.2500	1.2500
20643	848.3	1.0869	1.0894	1.2580	1.2540
Channel Bandwidth: 3 MHz					
Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)		26 dB Bandwidth (MHz)	
		QPSK	16QAM	QPSK	16QAM
20415	825.5	2.6976	2.6953	2.9050	2.9200
20525	836.5	2.7005	2.6949	2.9240	2.9280
20635	847.5	2.7016	2.6961	2.9220	2.9250

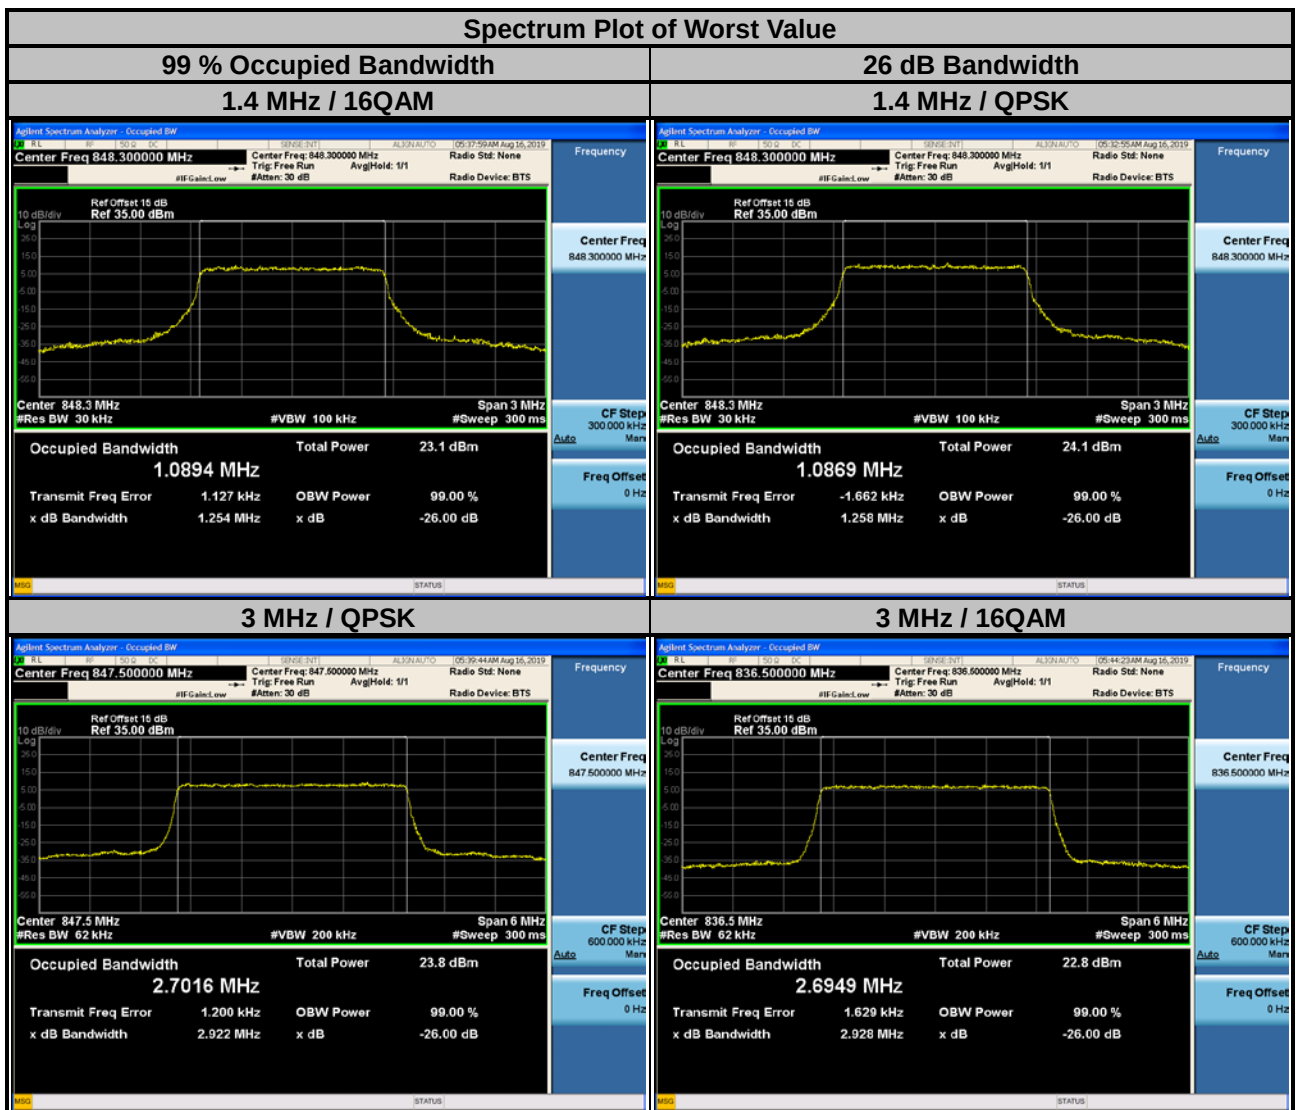

LTE Band 5					
Channel Bandwidth: 5 MHz					
Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)		26 dB Bandwidth (MHz)	
		QPSK	16QAM	QPSK	16QAM
20425	826.5	4.4871	4.4883	4.8170	4.8120
20525	836.5	4.4871	4.4897	4.7890	4.8180
20625	846.5	4.4885	4.4895	4.8260	4.8040
Channel Bandwidth: 10 MHz					
Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)		26 dB Bandwidth (MHz)	
		QPSK	16QAM	QPSK	16QAM
20450	829.0	8.9458	8.9482	9.5050	9.5060
20525	836.5	8.9539	8.9641	9.5040	9.5180
20600	844.0	8.9412	8.9416	9.4790	9.4990

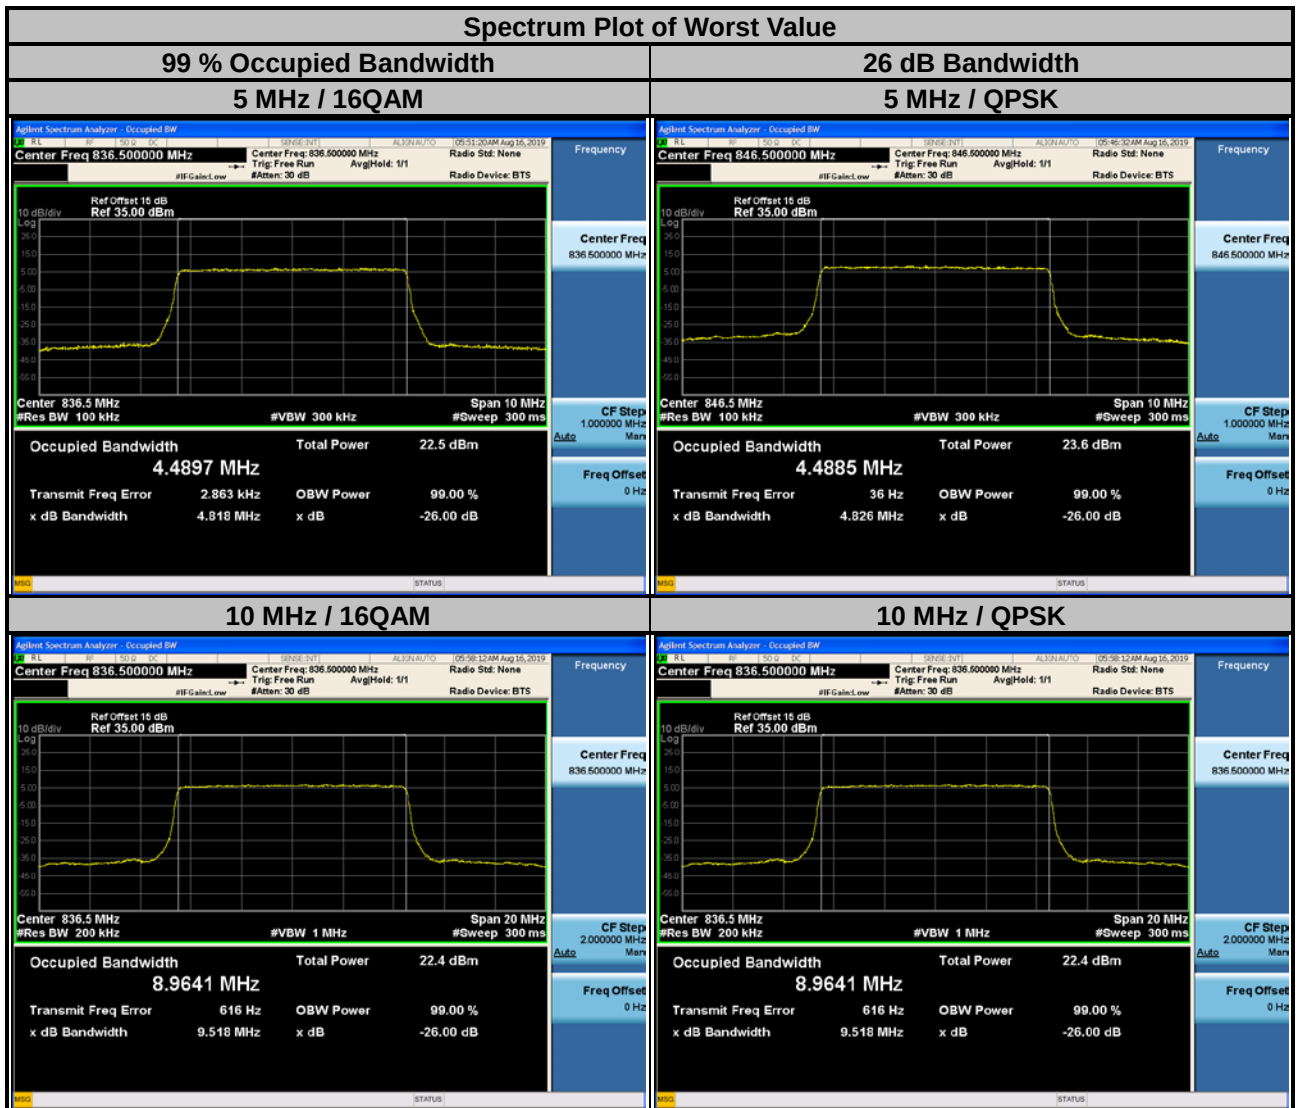


4.5 Band Edge Measurement

4.5.1 Limits of Band Edge Measurement

Power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.



4.5.2 Test Setup

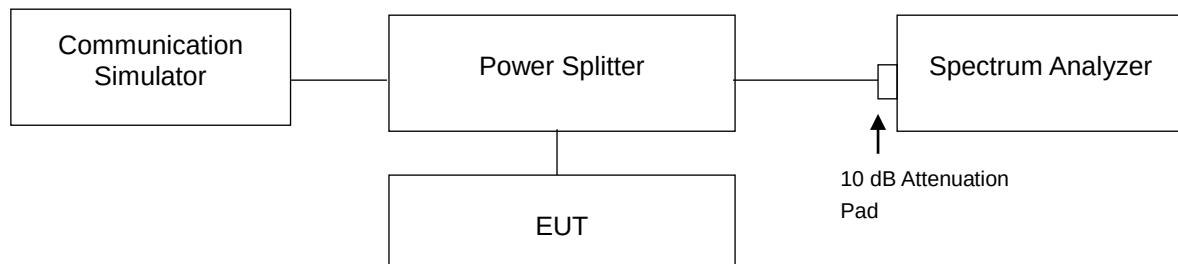

4.5.3 Test Procedures


- All measurements were done at low and high operational frequency range.
- The center frequency of spectrum is the band edge frequency and span is 5 MHz. RB of the spectrum is 48 kHz and VB of the spectrum is 150 kHz (WCDMA).
- The center frequency of spectrum is the band edge frequency and span is 1 MHz. RB of the spectrum is 15 kHz and VB of the spectrum is 51 kHz (LTE Bandwidth 1.4 MHz).
- The center frequency of spectrum is the band edge frequency and span is 1 MHz. RB of the spectrum is 30 kHz and VB of the spectrum is 100 kHz (LTE Bandwidth 3 MHz).
- The center frequency of spectrum is the band edge frequency and span is 1 MHz. RB of the spectrum is 62 kHz and VB of the spectrum is 200 kHz (LTE Bandwidth 5 MHz).
- The center frequency of spectrum is the band edge frequency and span is 1 MHz. RB of the spectrum is 100 kHz and VB of the spectrum is 300 kHz (LTE Bandwidth 10 MHz).
- Record the max trace plot into the test report.

4.5.4 Test Results

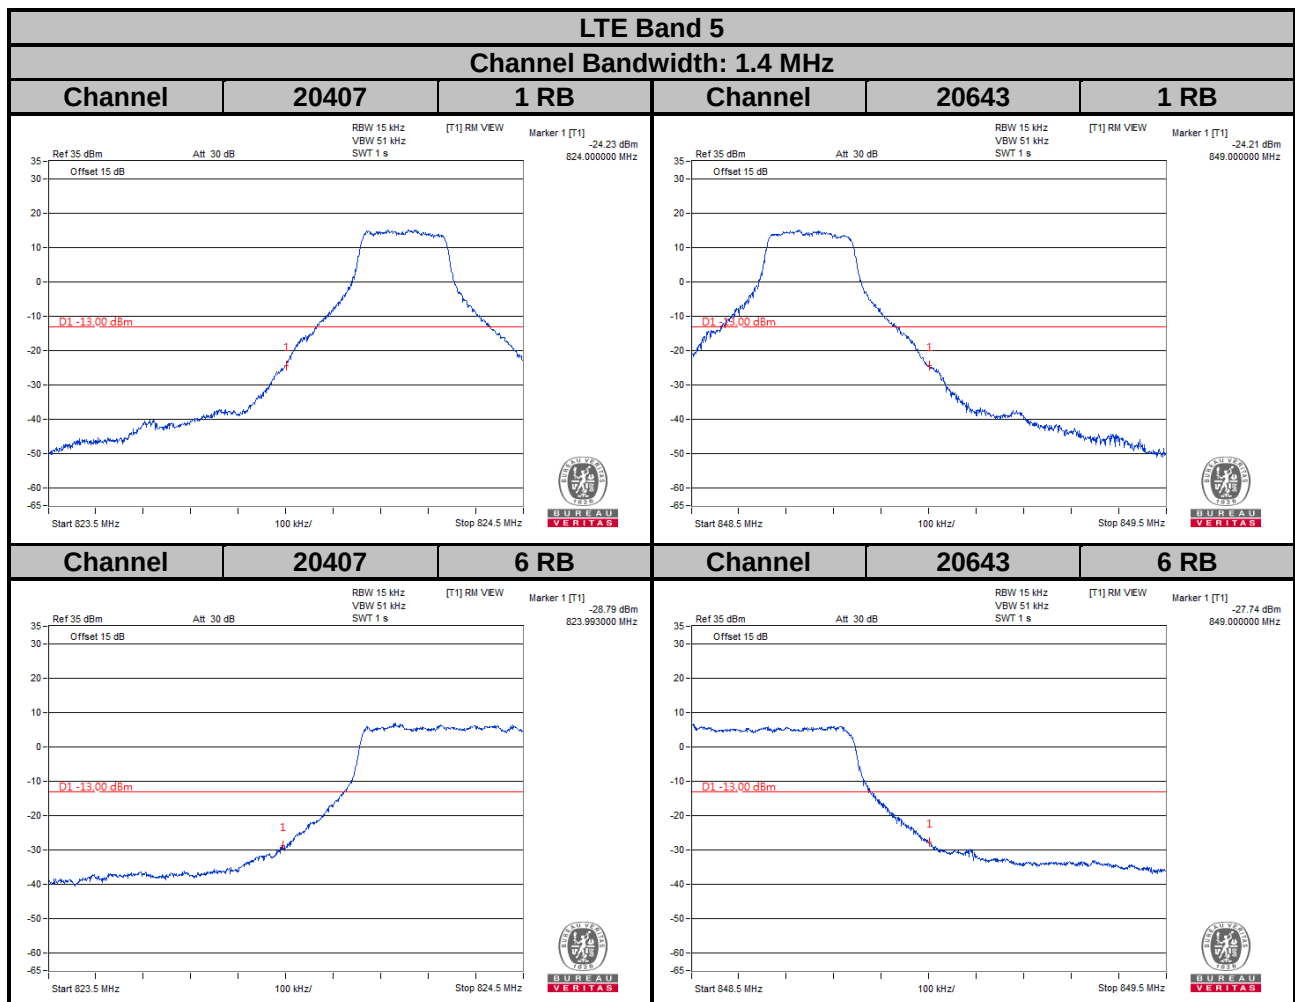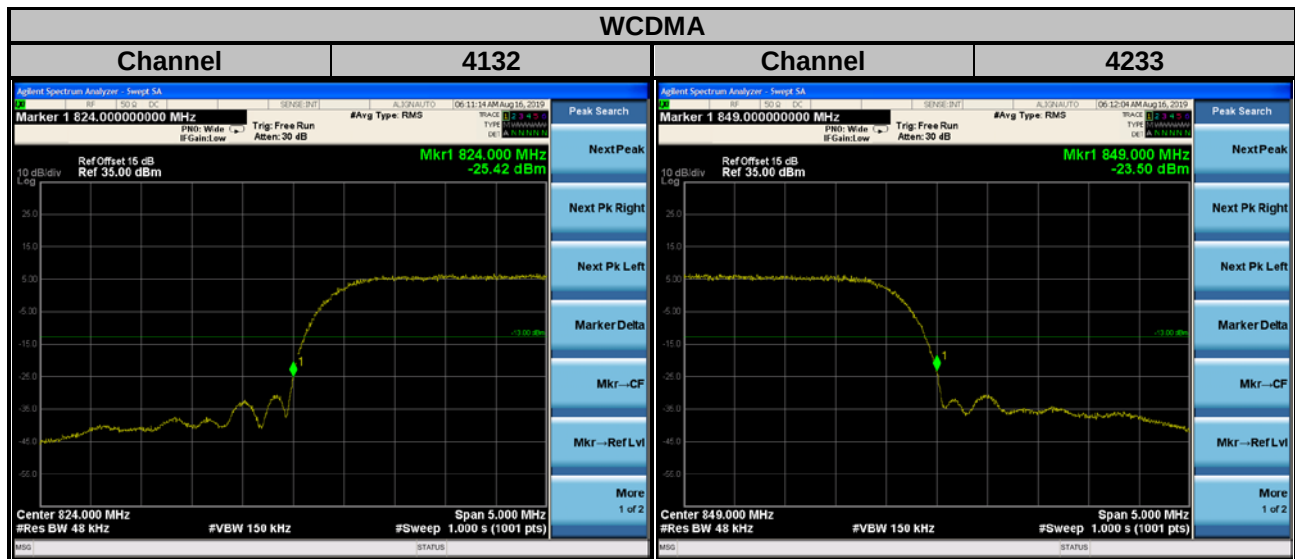


LTE Band 5

Channel Bandwidth: 3 MHz

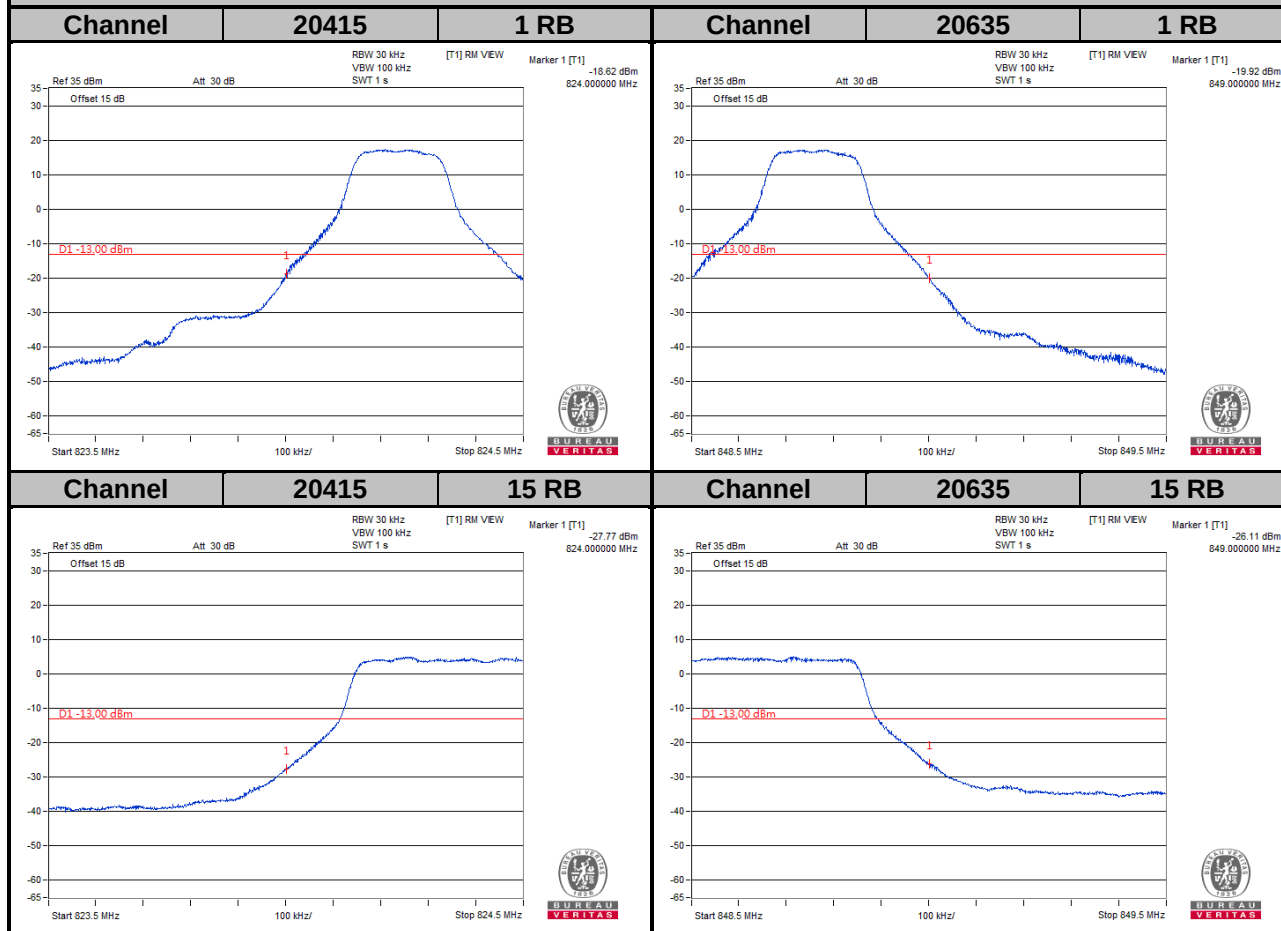


LTE Band 5

Channel Bandwidth: 5 MHz

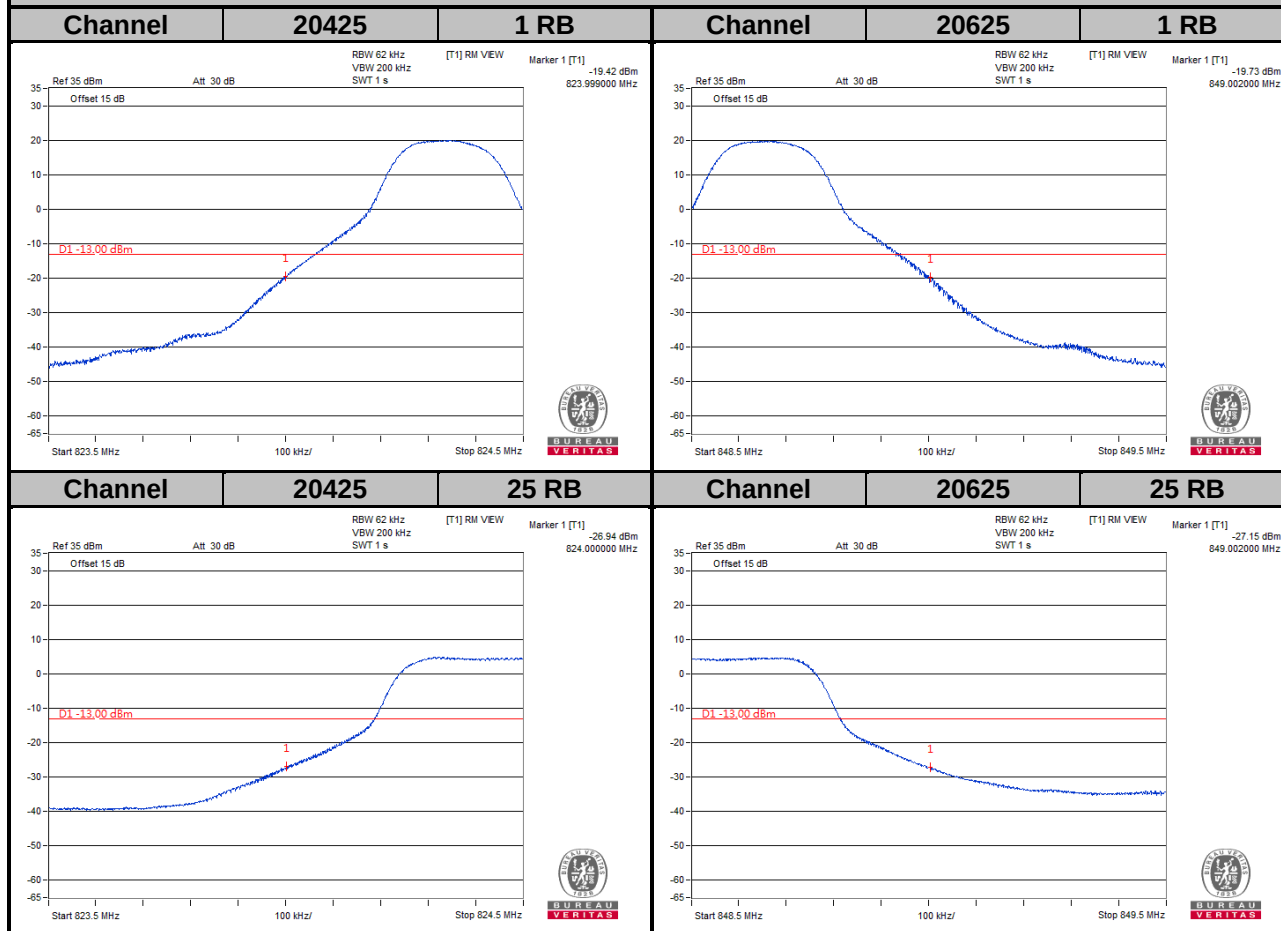

LTE Band 5

Channel Bandwidth: 10 MHz

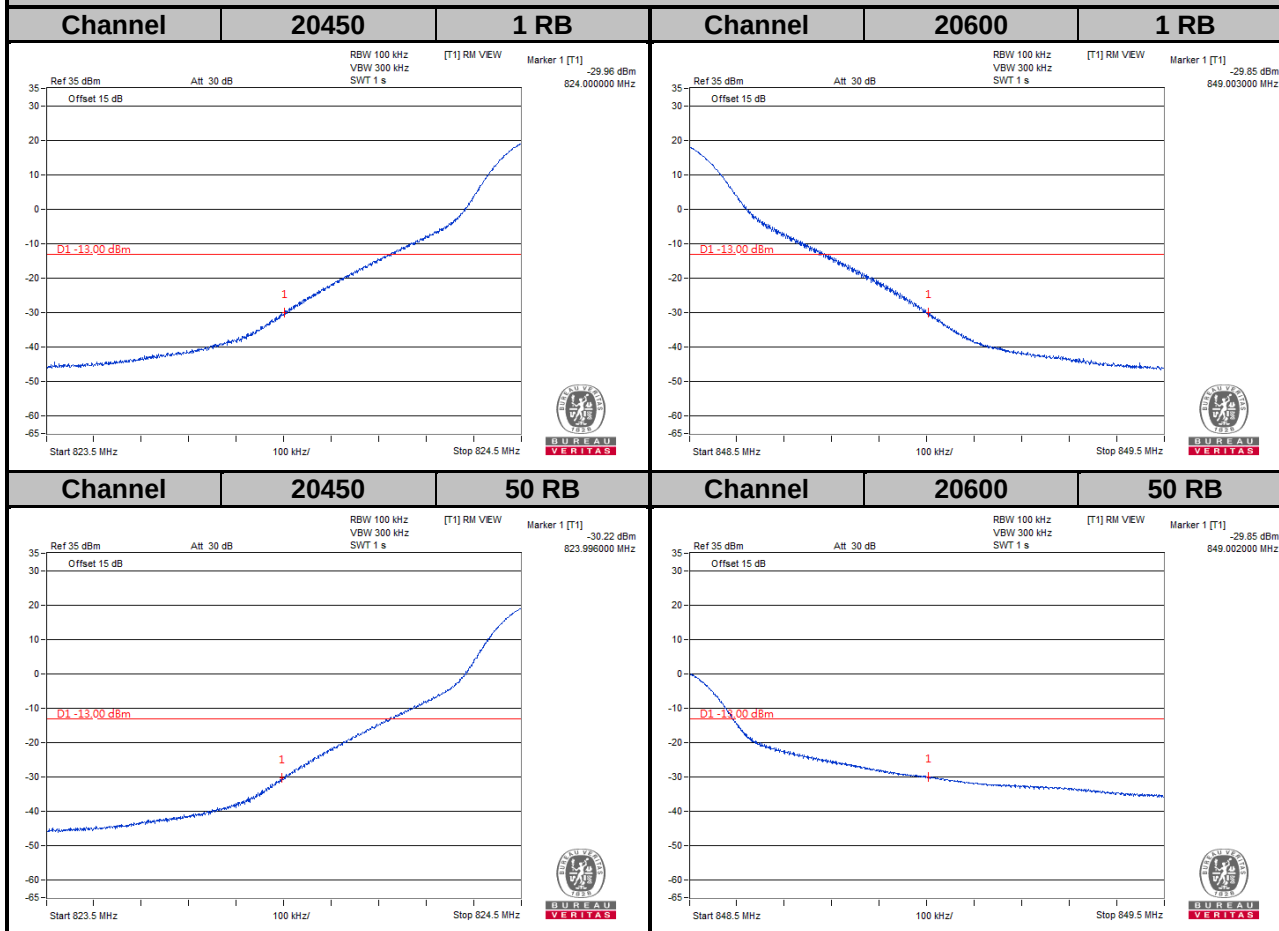


4.6 Peak to Average Ratio

4.6.1 Limits of Peak to Average Ratio Measurement

In measuring transmissions in this band using an average power technique, the peak to-average ratio (PAR) of the transmission may not exceed 13 dB.

4.6.2 Test Setup

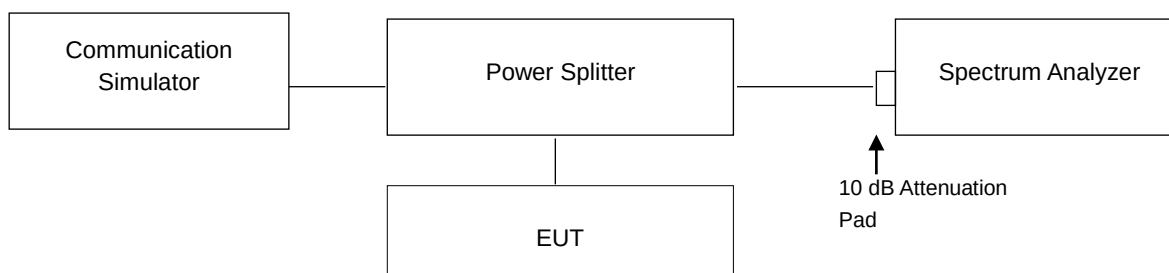


4.6.3 Test Procedures


1. Set resolution/measurement bandwidth $\geq$ signal's occupied bandwidth;
2. Set the number of counts to a value that stabilizes the measured CCDF curve;
3. Record the maximum PAPR level associated with a probability of 0.1 %.

4.6.4 Test Results


Channel	Frequency (MHz)	Peak to Average Ratio (dB)
		WCDMA
4132	826.4	2.81
4182	836.4	2.82
4233	846.6	2.66

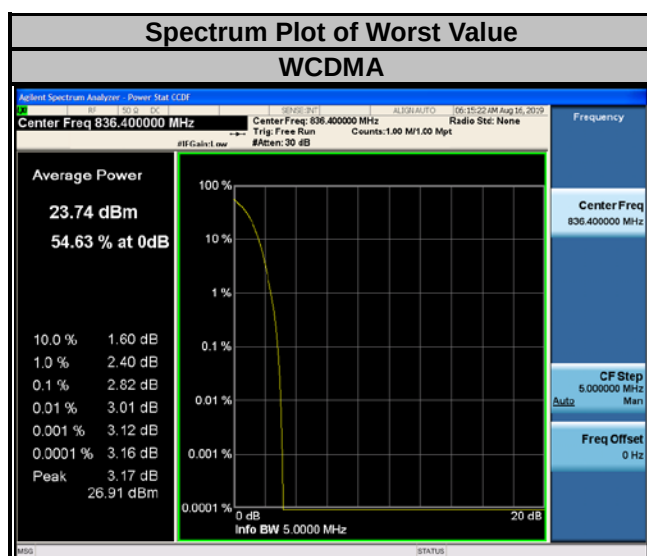

LTE Band 5							
Channel Bandwidth: 1.4 MHz				Channel Bandwidth: 3 MHz			
Channel	Frequency (MHz)	Peak to Average Ratio (dB)		Channel	Frequency (MHz)	Peak to Average Ratio (dB)	
		QPSK	16QAM			QPSK	16QAM
20407	824.7	3.95	4.91	20415	825.5	3.93	4.95
20525	836.5	4.12	4.77	20525	836.5	4.08	5.08
20643	848.3	3.82	4.76	20635	847.5	3.68	4.78

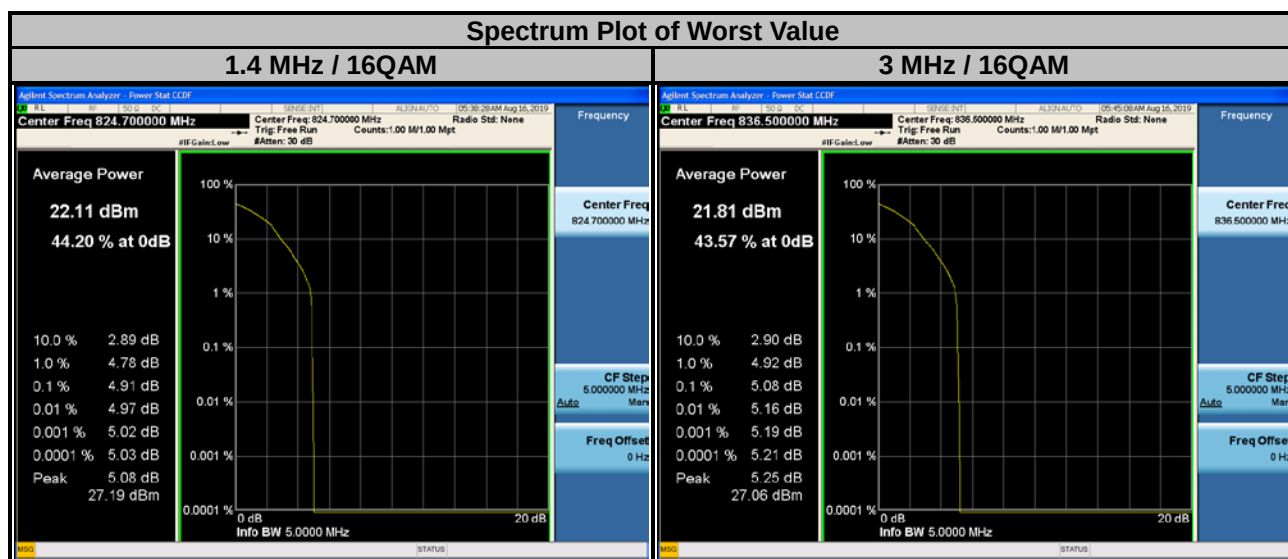

LTE Band 5							
Channel Bandwidth: 5 MHz				Channel Bandwidth: 10 MHz			
Channel	Frequency (MHz)	Peak to Average Ratio (dB)		Channel	Frequency (MHz)	Peak to Average Ratio (dB)	
		QPSK	16QAM			QPSK	16QAM
20425	826.5	3.91	4.93	20450	829.0	3.89	4.88
20525	836.5	4.11	5.03	20525	836.5	4.21	4.98
20625	846.5	3.83	4.89	20600	844.0	3.98	4.86

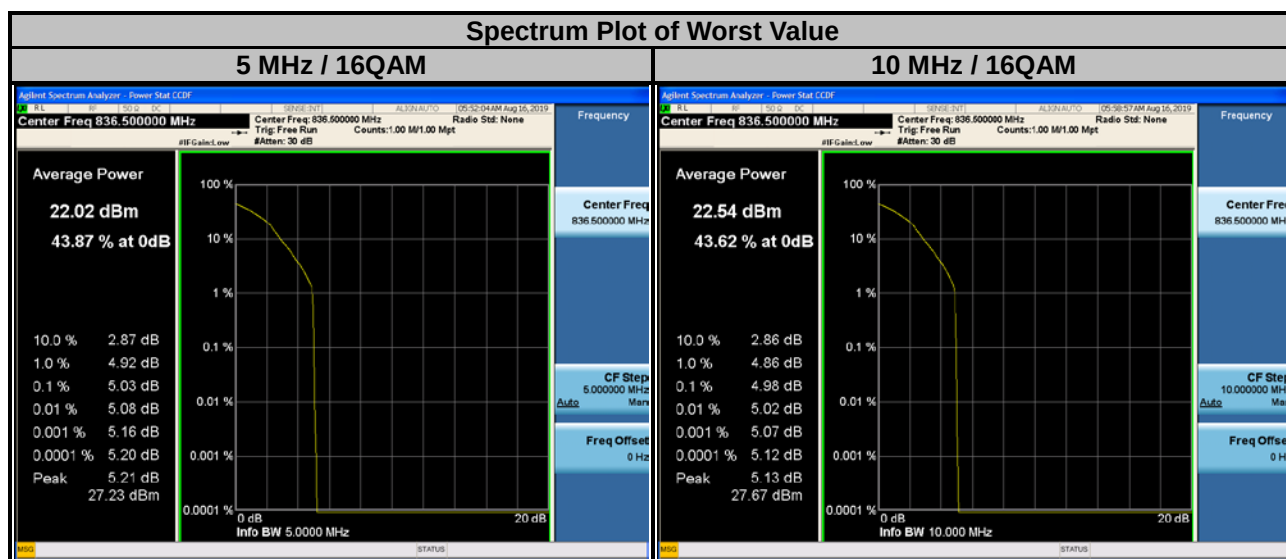


4.7 Conducted Spurious Emissions

4.7.1 Limits of Conducted Spurious Emissions Measurement

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. The emission limit equal to -13 dBm.


4.7.2 Test Setup

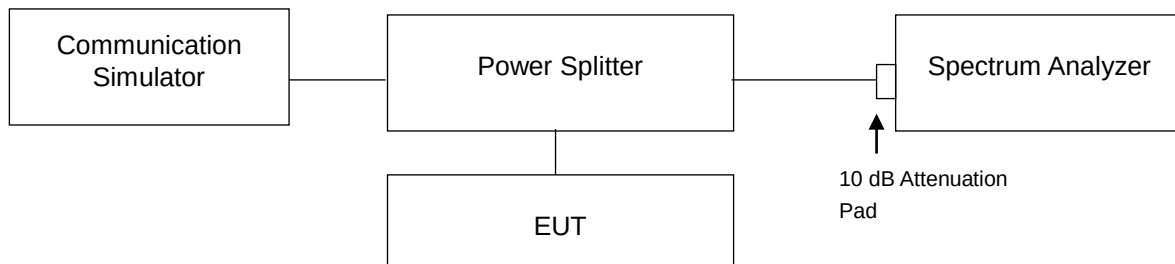

4.7.3 Test Procedure

- The EUT makes a phone call to the communication simulator. All measurements were done at low, middle and high operational frequency range.
- Measuring frequency range is from 9 kHz to 1 GHz. 10 dB attenuation pad is connected with spectrum. RBW = 100 kHz and VBW = 300 kHz is used for conducted emission measurement.
- Measuring frequency range is from 1 GHz to 9 GHz. 10 dB attenuation pad is connected with spectrum. RBW = 1 MHz and VBW = 3 MHz is used for conducted emission measurement.

4.7.4 Test Results

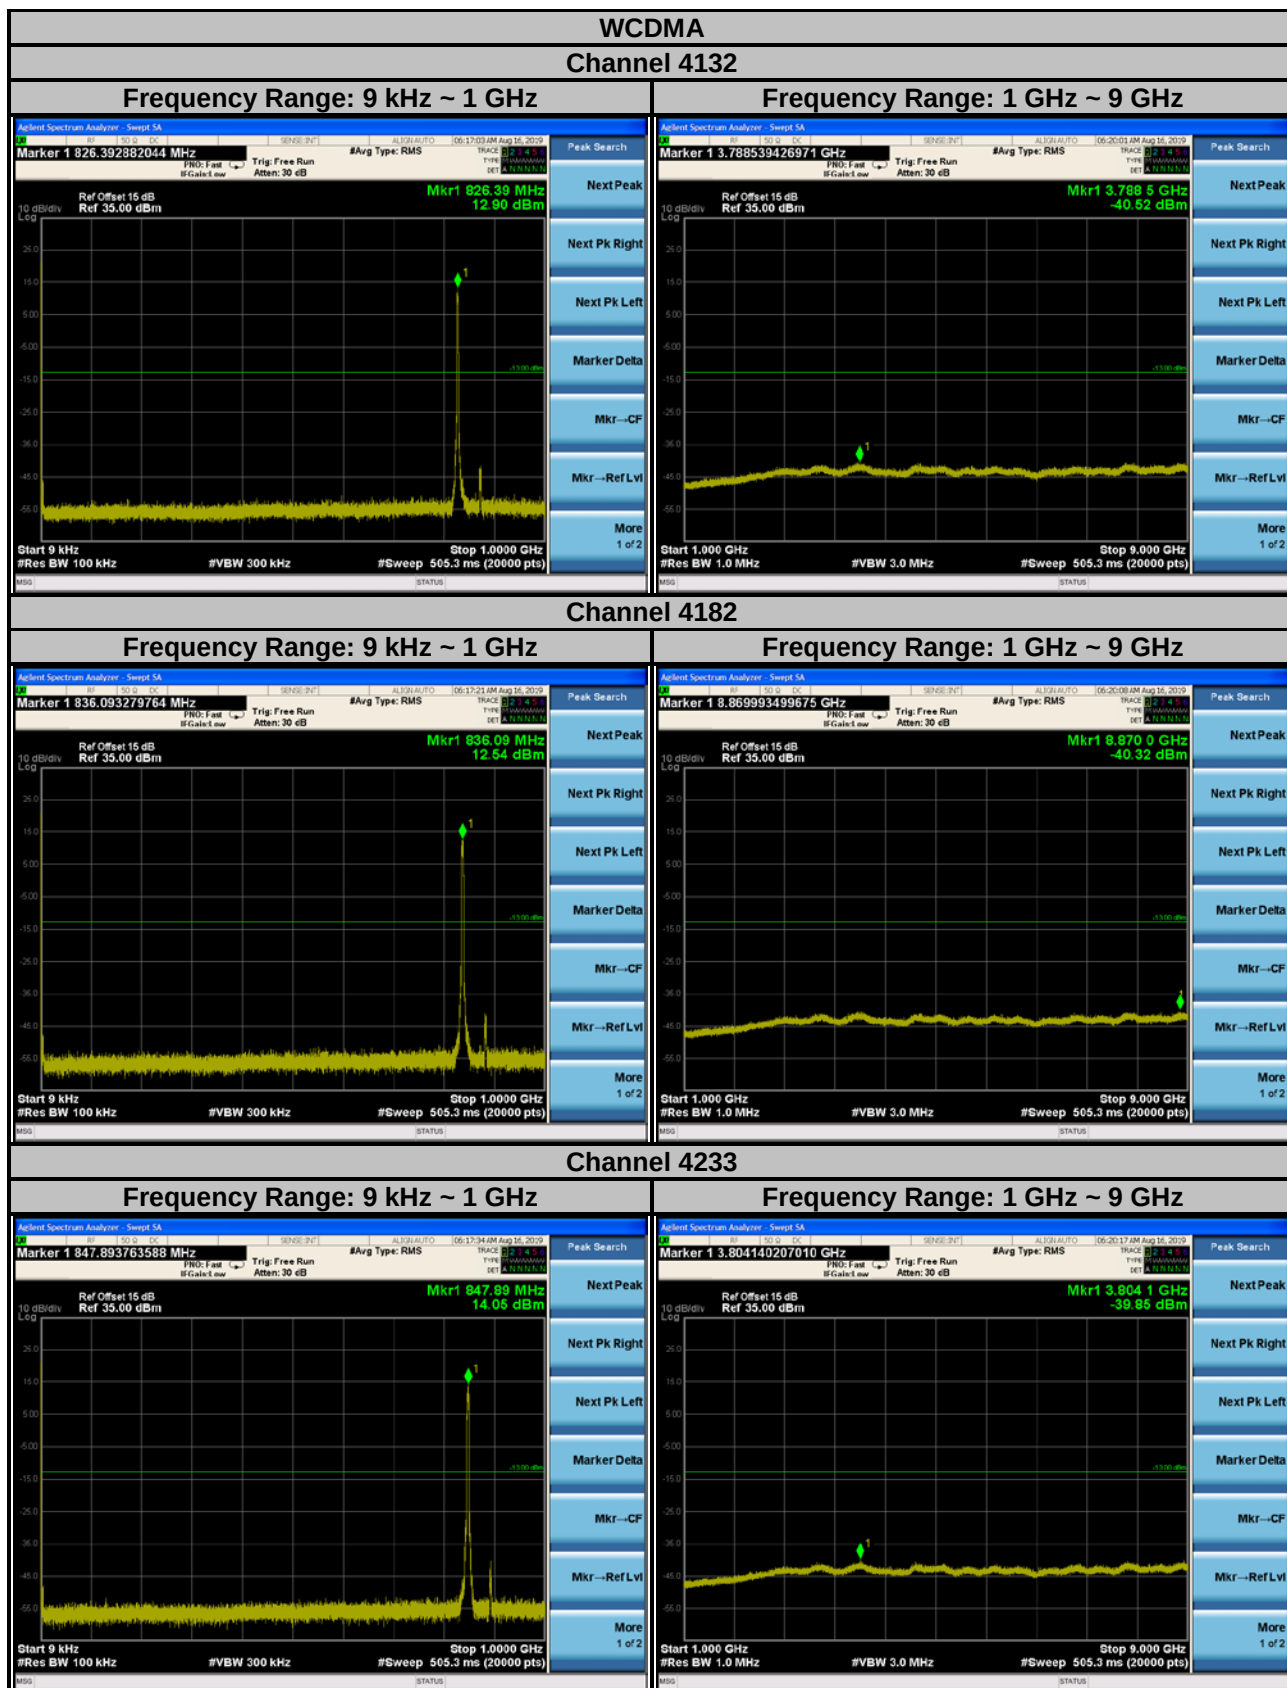


Note: The signal over the limit in 9 kHz is from spectrum analyzer.

LTE Band 5


Channel Bandwidth: 1.4 MHz

Channel 20407

Frequency Range: 9 kHz ~ 1 GHz

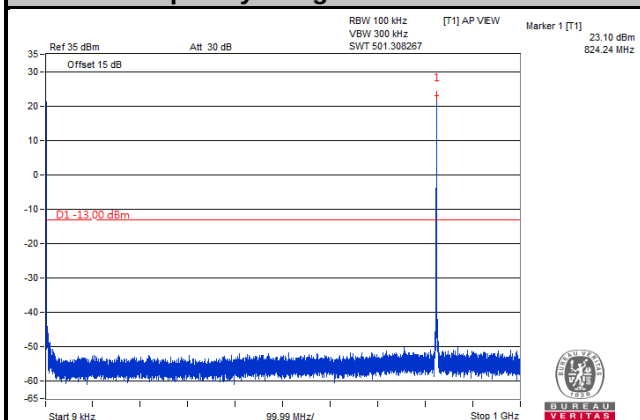


Frequency Range: 1 GHz ~ 9 GHz

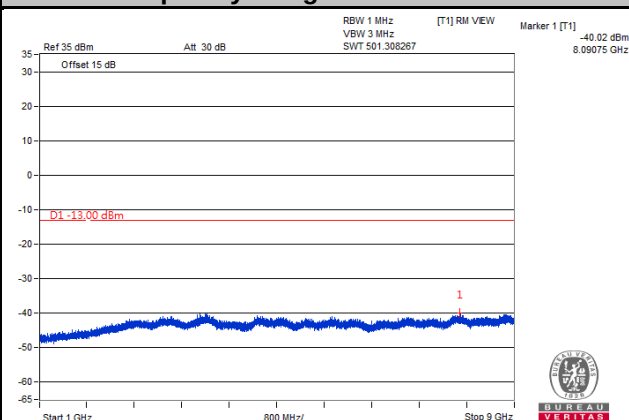


Channel 20525

Frequency Range: 9 kHz ~ 1 GHz

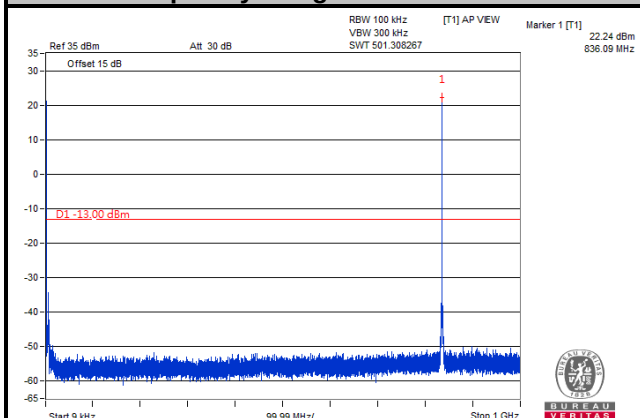


Frequency Range: 1 GHz ~ 9 GHz

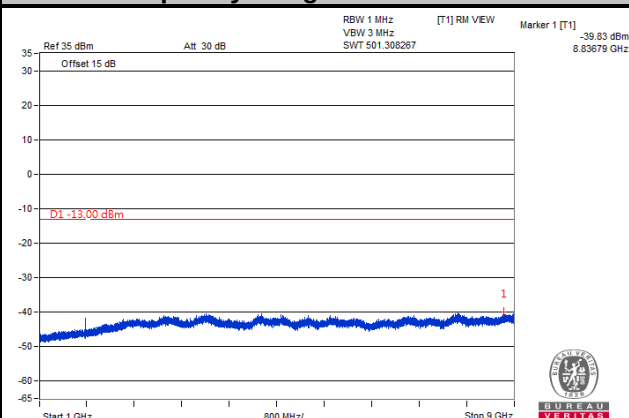


Channel 20643

Frequency Range: 9 kHz ~ 1 GHz

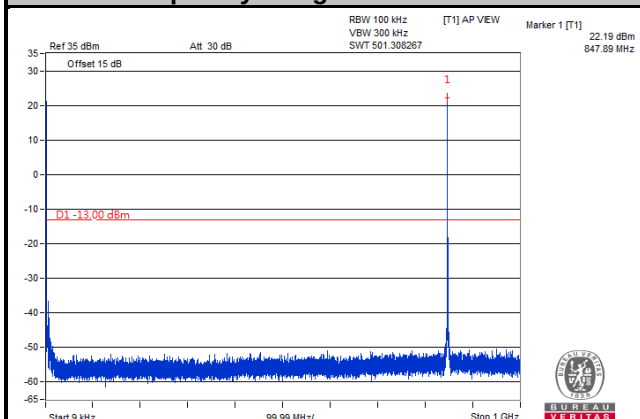

Frequency Range: 1 GHz ~ 9 GHz

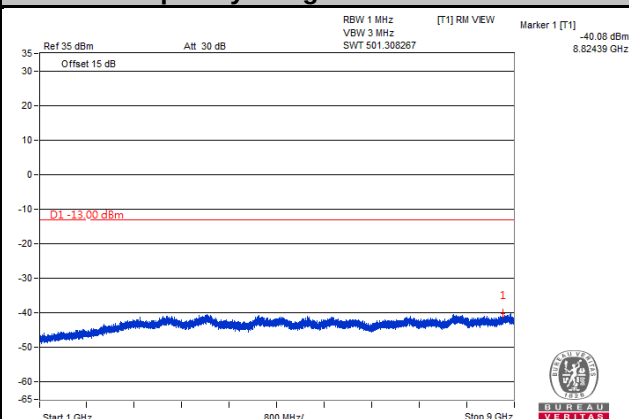


Note: The signal over the limit in 9 kHz is from spectrum analyzer.

LTE Band 5


Channel Bandwidth: 3 MHz

Channel 20415

Frequency Range: 9 kHz ~ 1 GHz

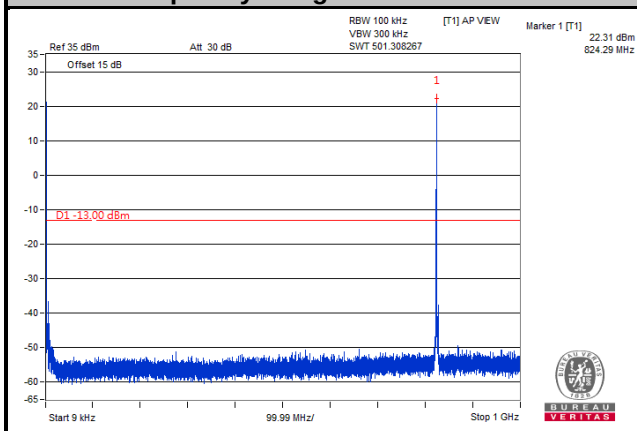


Frequency Range: 1 GHz ~ 9 GHz

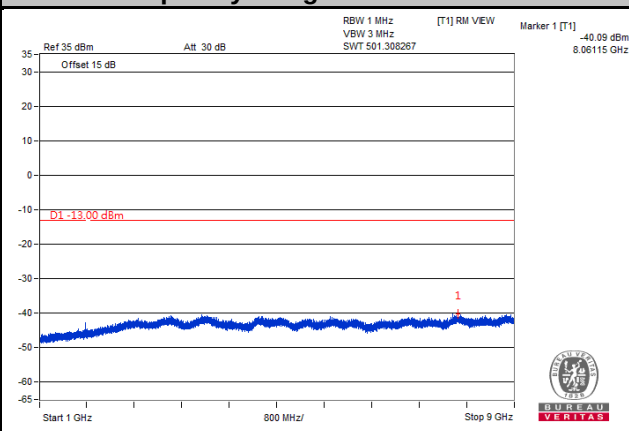


Channel 20525

Frequency Range: 9 kHz ~ 1 GHz

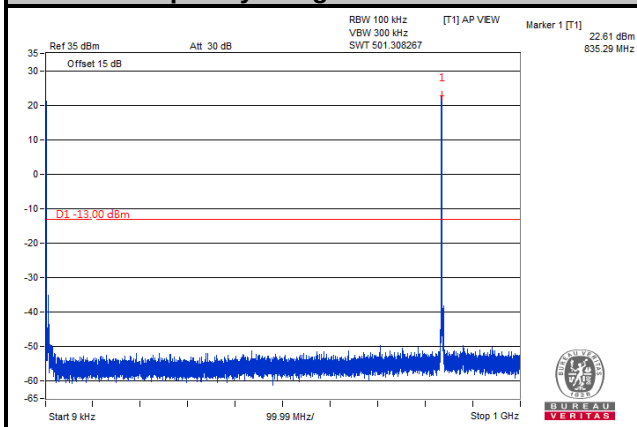


Frequency Range: 1 GHz ~ 9 GHz

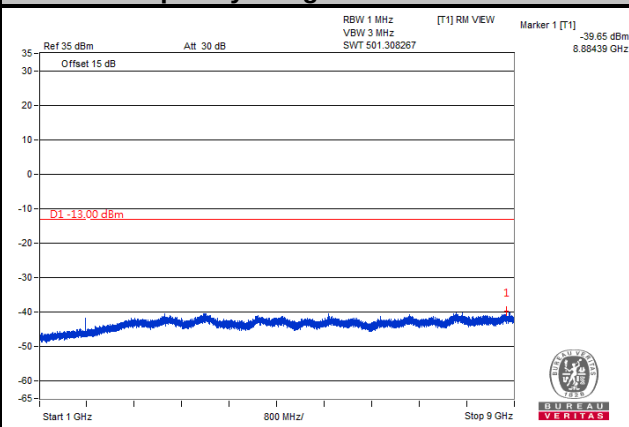


Channel 20635

Frequency Range: 9 kHz ~ 1 GHz

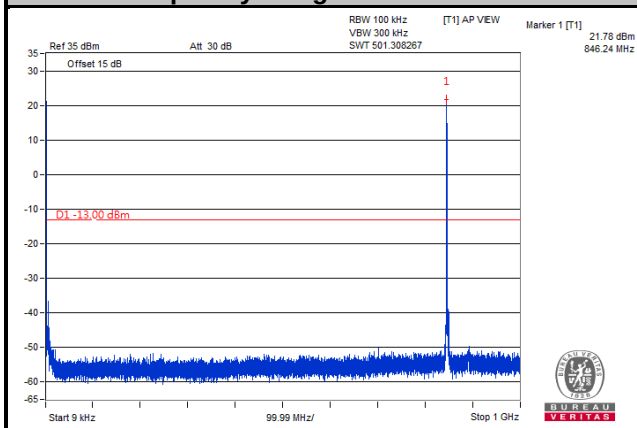

Frequency Range: 1 GHz ~ 9 GHz

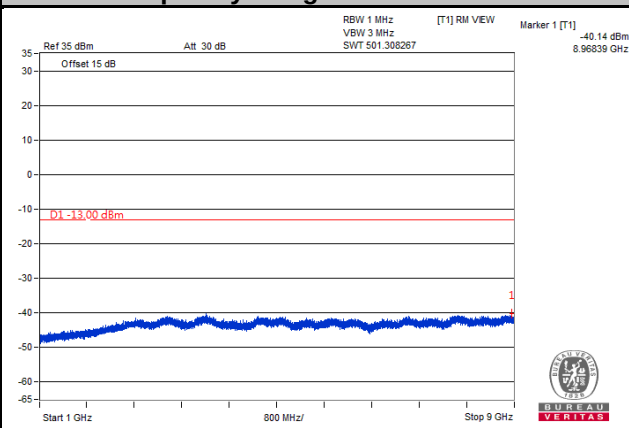


Note: The signal over the limit in 9 kHz is from spectrum analyzer.

LTE Band 5


Channel Bandwidth: 5 MHz

Channel 20425

Frequency Range: 9 kHz ~ 1 GHz

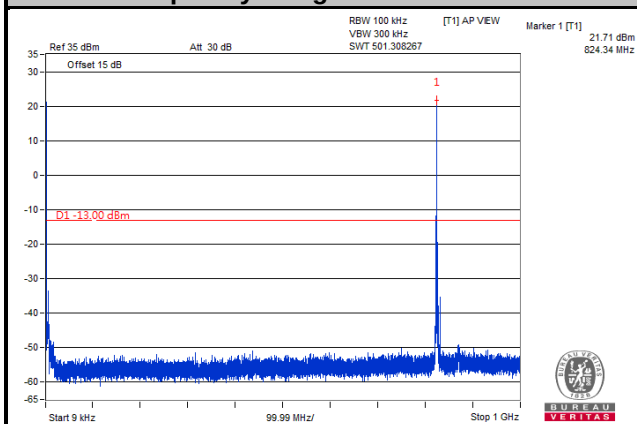


Frequency Range: 1 GHz ~ 9 GHz

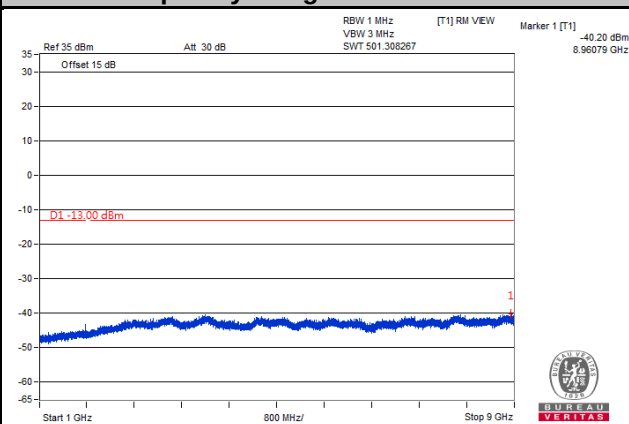


Channel 20525

Frequency Range: 9 kHz ~ 1 GHz

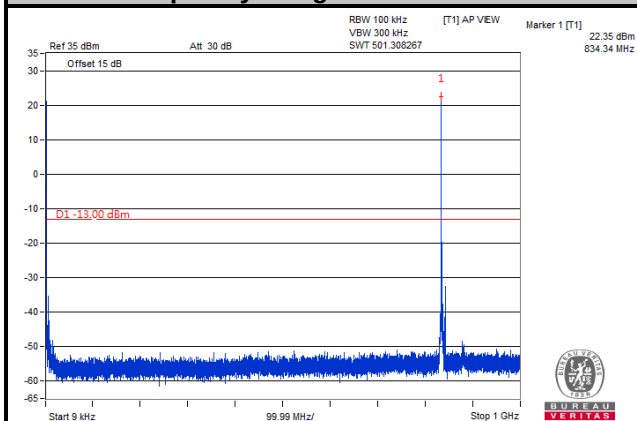


Frequency Range: 1 GHz ~ 9 GHz

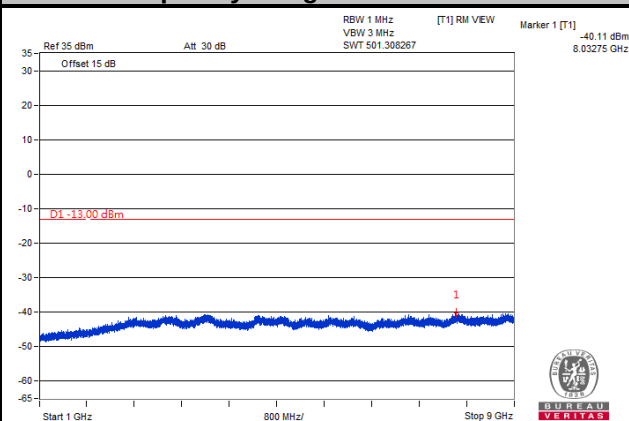


Channel 20625

Frequency Range: 9 kHz ~ 1 GHz

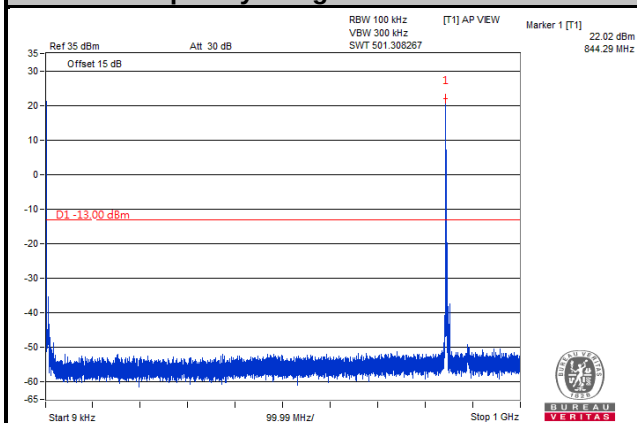

Frequency Range: 1 GHz ~ 9 GHz

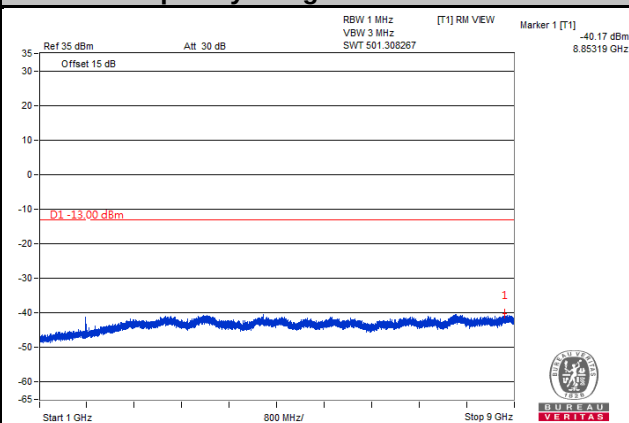


Note: The signal over the limit in 9 kHz is from spectrum analyzer.

LTE Band 5


Channel Bandwidth: 10 MHz

Channel 20450

Frequency Range: 9 kHz ~ 1 GHz

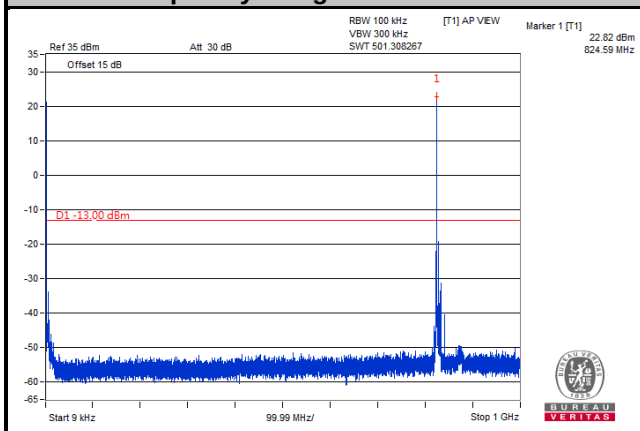


Frequency Range: 1 GHz ~ 9 GHz

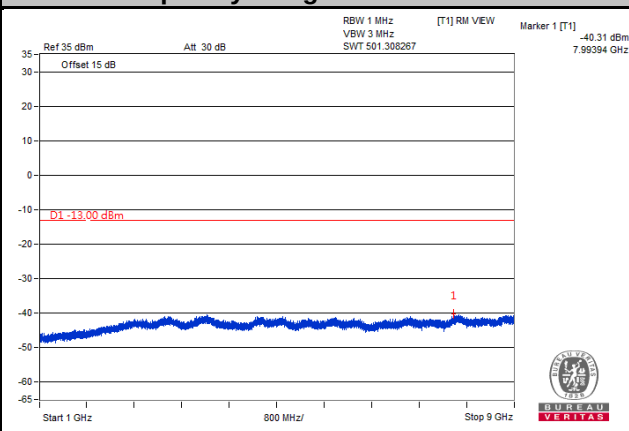


Channel 20525

Frequency Range: 9 kHz ~ 1 GHz

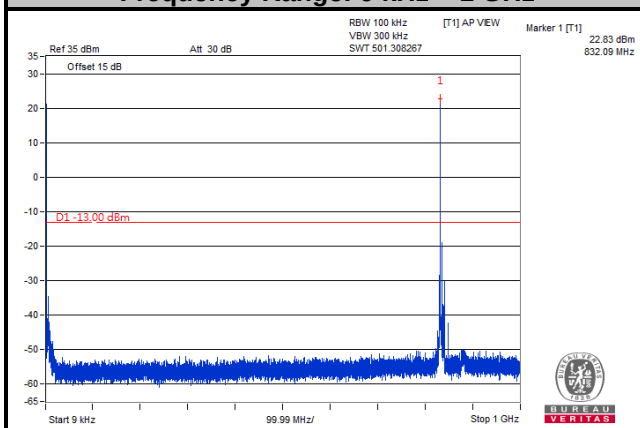


Frequency Range: 1 GHz ~ 9 GHz

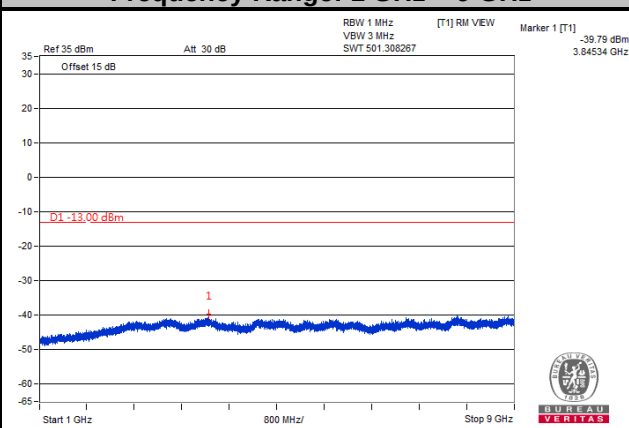


Channel 20600

Frequency Range: 9 kHz ~ 1 GHz

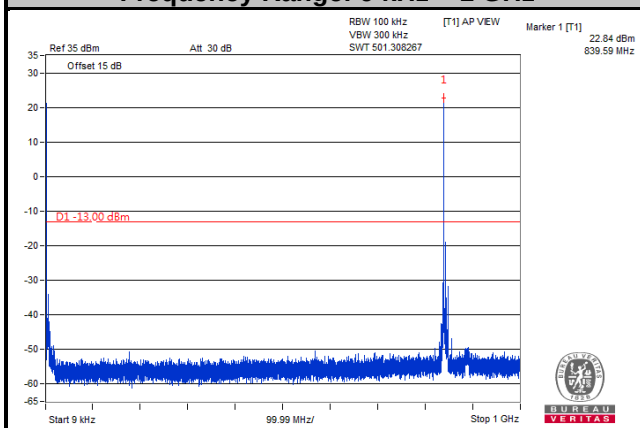

Frequency Range: 1 GHz ~ 9 GHz

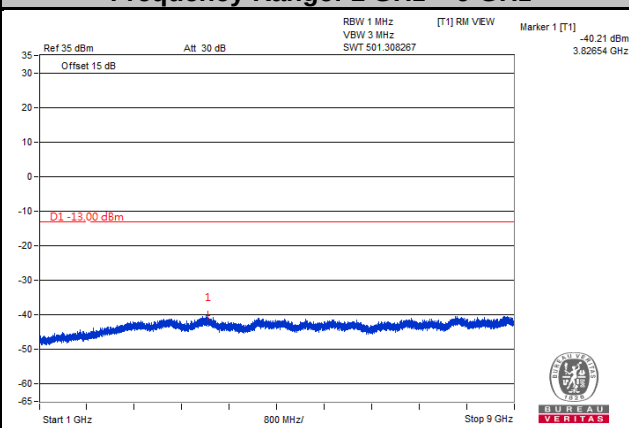

Note: The signal over the limit in 9 kHz is from spectrum analyzer.

4.8 Radiated Emission Measurement

4.8.1 Limits of Radiated Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. The emission limit is equal to -13 dBm.

4.8.2 Test Procedure

- Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8 m (below or equal 1 GHz) and/or 1.5 m (above 1 GHz) height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1 m to 4 m to find the maximum polar radiated power. The "Read Value" is the spectrum reading the maximum power value.
- The substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a TX cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to "Read Value" of step a. Record the power level of S.G
- $EIRP = \text{Output power level of S.G} - \text{TX cable loss} + \text{Antenna gain of substitution horn}.$
- E.R.P power can be calculated form E.I.R.P power by subtracting the gain of dipole, $E.R.P \text{ power} = E.I.R.P \text{ power} - 2.15 \text{ dB}.$


NOTE: The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz/3 MHz.

4.8.3 Deviation from Test Standard


No deviation.

4.8.4 Test Setup

<Radiated Emission below or equal 1 GHz>

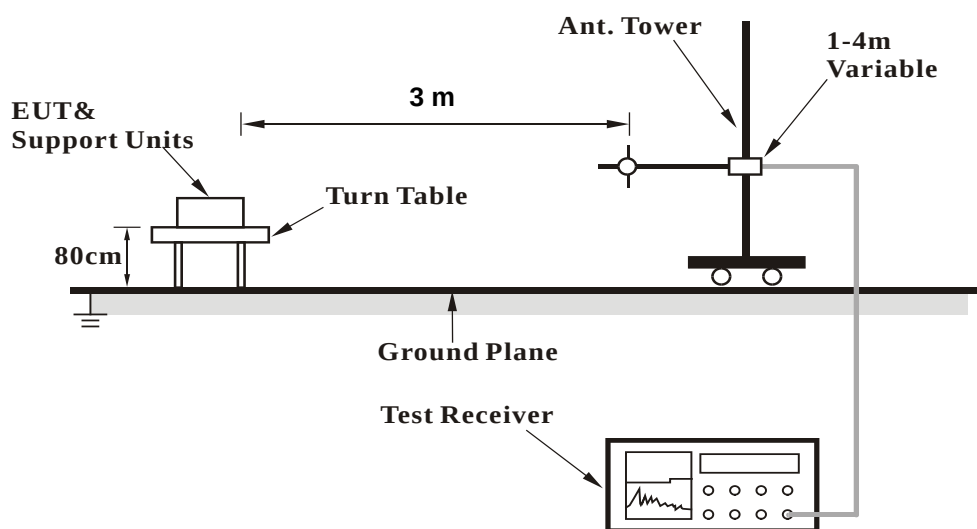

<Radiated Emission above 1 GHz>

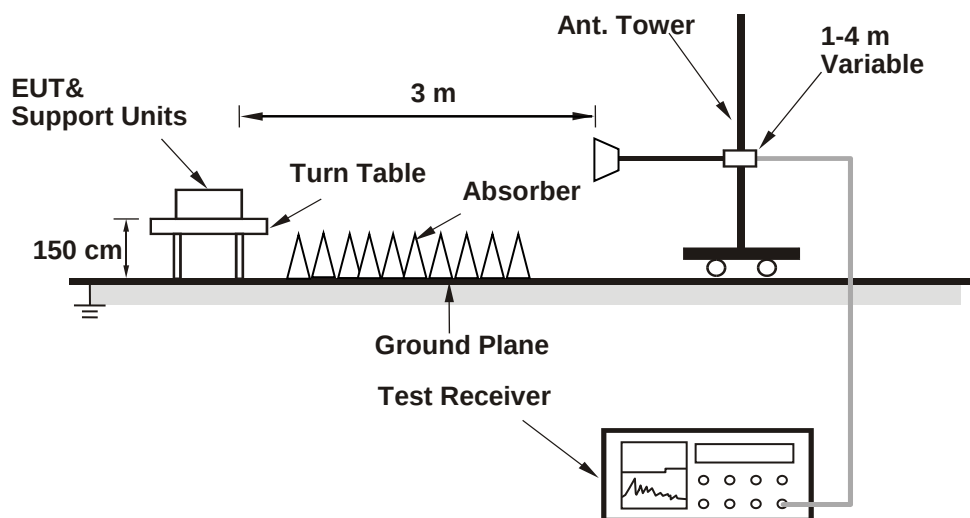

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.8.5 Test Results

WCDMA:

Low Channel




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 5

Date: 08-29-2019

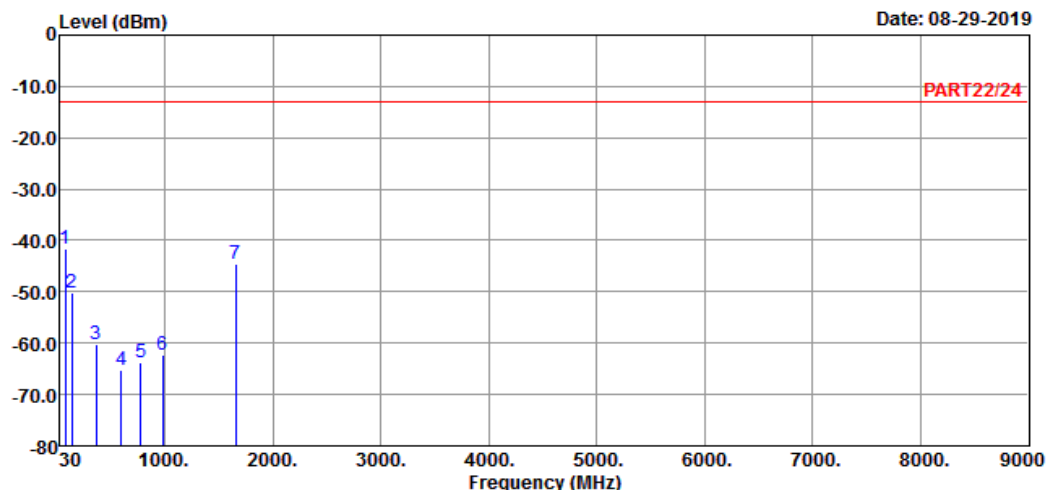

Site : 966 Chamber 5

Condition: PART22/24 HORIZONTAL

Remak : WCDMA Band 5 Link_L-CH

Tested by: Thomas Wei

	Freq	Level	Read Level	Limit Line	Factor	Over Limit	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1 pp	77.53	-41.52	-31.32	-13.00	-10.20	-28.52	Peak
2	135.73	-50.09	-41.42	-13.00	-8.67	-37.09	Peak
3	360.77	-60.09	-53.91	-13.00	-6.18	-47.09	Peak
4	595.51	-65.12	-64.17	-13.00	-0.95	-52.12	Peak
5	778.84	-63.73	-64.53	-13.00	0.80	-50.73	Peak
6	975.75	-62.24	-64.96	-13.00	2.72	-49.24	Peak
7	1652.80	-44.65	-30.88	-13.00	-13.77	-31.65	Peak




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 6

Date: 08-29-2019

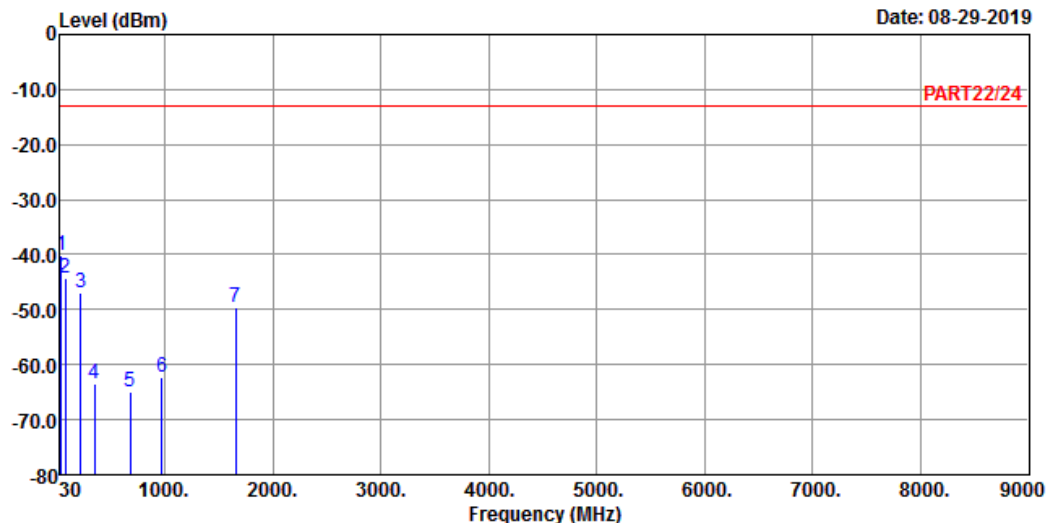

Site : 966 Chamber 5

Condition: PART22/24 VERTICAL

Remak : WCDMA Band 5 Link_L-CH

Tested by: Thomas Wei

	Freq	Level	Read Level	Limit Line	Factor	Over Limit	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1 pp	42.61	-40.08	-39.14	-13.00	-0.94	-27.08	Peak
2	78.50	-44.18	-33.75	-13.00	-10.43	-31.18	Peak
3	223.03	-47.06	-39.98	-13.00	-7.08	-34.06	Peak
4	346.22	-63.32	-57.02	-13.00	-6.30	-50.32	Peak
5	681.84	-64.88	-64.49	-13.00	-0.39	-51.88	Peak
6	967.99	-62.30	-64.75	-13.00	2.45	-49.30	Peak
7	1652.80	-49.56	-35.79	-13.00	-13.77	-36.56	Peak

Middle Channel




Bureau Veritas Consumer Products Services Ltd.,Taoyuan Branch

A D T

Data: 3

Date: 08-29-2019

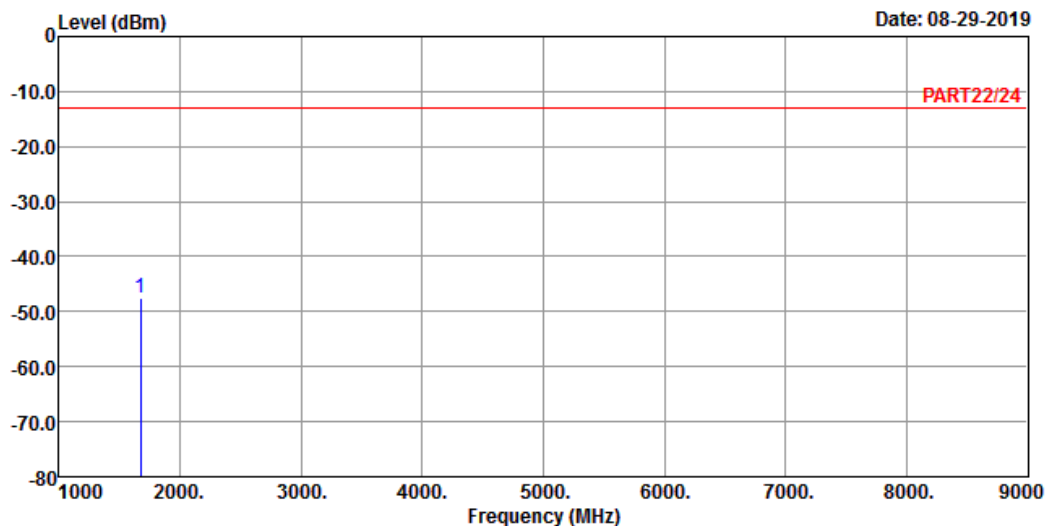

Site : 966 Chamber 5
Condition: PART22/24 HORIZONTAL
Remak : WCDMA Band 5 Link_M-CH
Tested by: Thomas Wei

Freq	Level	Read Level	Limit Line	Factor	Over Limit	Remark
MHz	dBm	dBm	dBm	dB	dB	

1 pp 1672.80 -47.65 -33.75 -13.00 -13.90 -34.65 Peak




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 4

Date: 08-29-2019

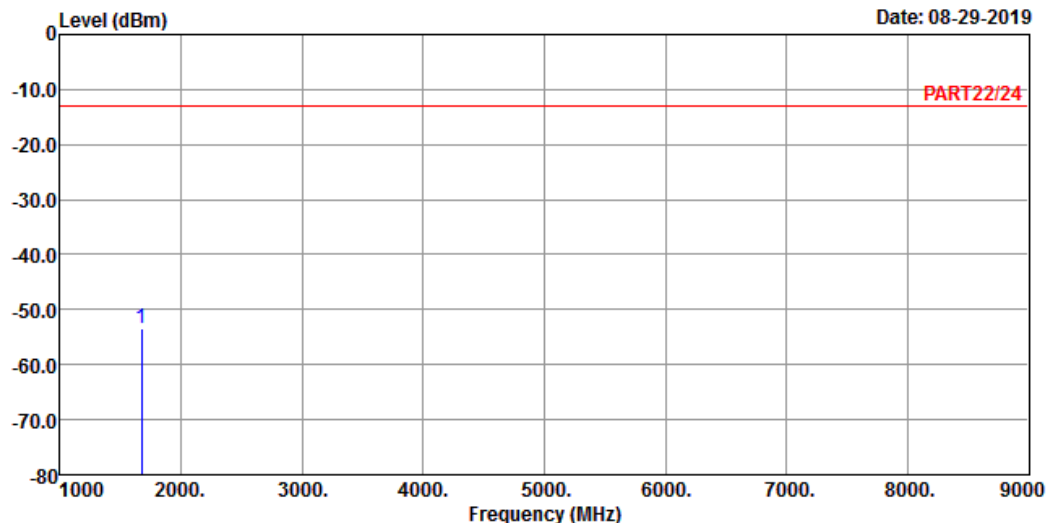

Site : 966 Chamber 5

Condition: PART22/24 VERTICAL

Remak : WCDMA Band 5 Link_M-CH

Tested by: Thomas Wei

		Read	Limit		Over	
Freq	Level	Level	Line	Factor	Limit	Remark
MHz	dBm	dBm	dBm	dB	dB	

1 pp 1672.80 -53.42 -39.52 -13.00 -13.90 -40.42 Peak

High Channel




Bureau Veritas Consumer Products Services Ltd.,Taoyuan Branch

A D T

Data: 3

Date: 08-29-2019

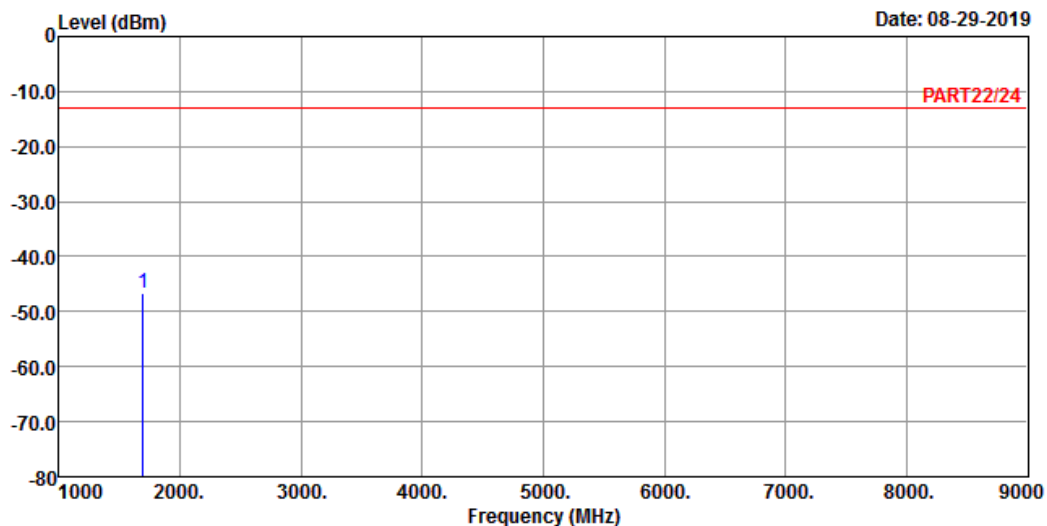

Site : 966 Chamber 5

Condition: PART22/24 HORIZONTAL

Remak : WCDMA Band 5 Link_H-CH

Tested by: Thomas Wei

Freq	Level	Read Level	Limit	Over	Factor	Limit	Remark
MHz	dBm	dBm	dBm	dB	dB	dB	

1 pp 1693.20 -46.75 -32.73 -13.00 -14.02 -33.75 Peak




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 4

Date: 08-29-2019

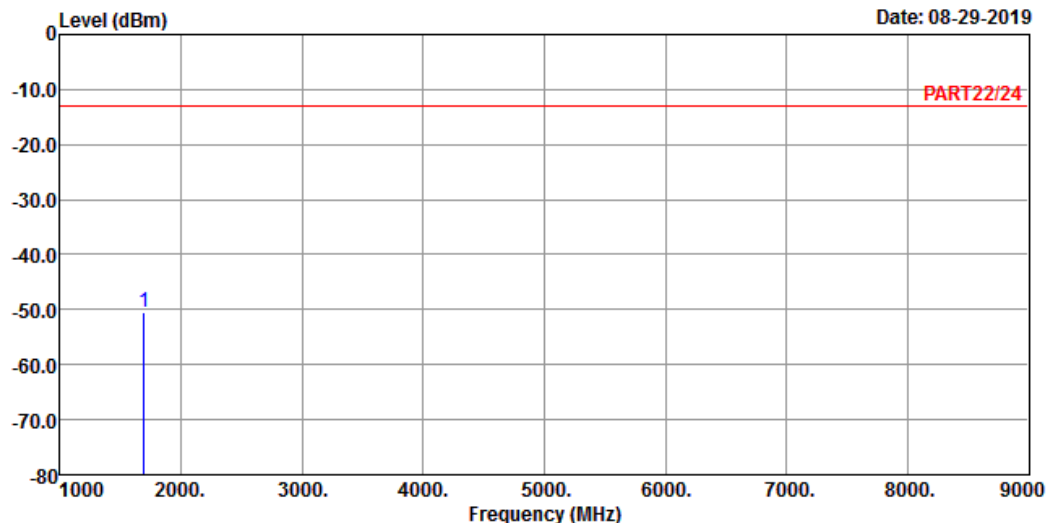

Site : 966 Chamber 5

Condition: PART22/24 VERTICAL

Remak : WCDMA Band 5 Link_H-CH

Tested by: Thomas Wei

		Read	Limit		Over	
Freq	Level	Level	Line	Factor	Limit	Remark
MHz	dBm	dBm	dBm	dB	dB	

1 pp 1693.20 -50.59 -36.57 -13.00 -14.02 -37.59 Peak

LTE Band 5
Channel Bandwidth: 1.4 MHz / QPSK
Low Channel




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 3

Date: 08-29-2019

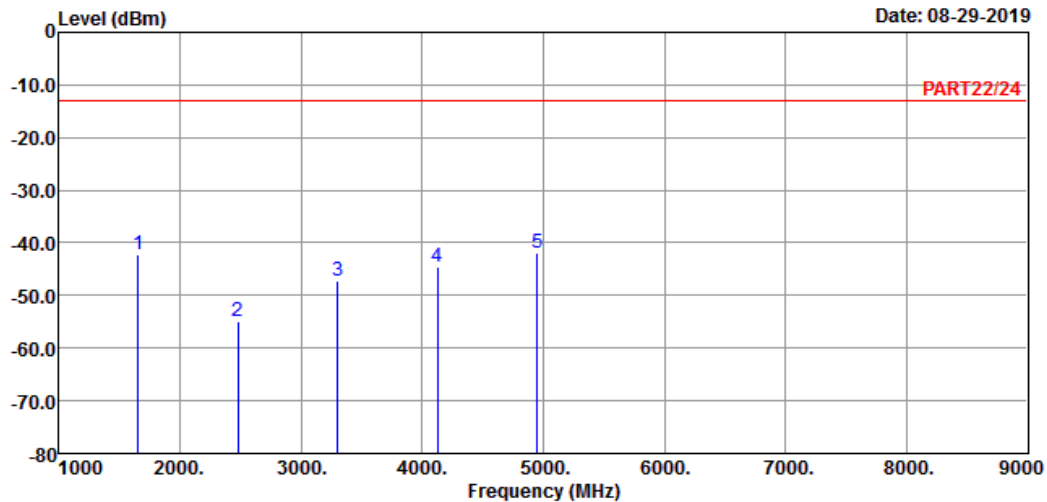

Site : 966 Chamber 5
Condition: PART22/24 HORIZONTAL
Remak : LTE Band 5 QPSK_1.4M Link_L-CH
Tested by: Thomas Wei

	Freq	Level	Read Level	Limit Line	Factor	Over Limit	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	1649.40	-42.33	-28.59	-13.00	-13.74	-29.33	Peak
2	2474.10	-54.91	-44.89	-13.00	-10.02	-41.91	Peak
3	3298.80	-47.17	-38.31	-13.00	-8.86	-34.17	Peak
4	4123.50	-44.49	-38.38	-13.00	-6.11	-31.49	Peak
5 pp	4948.20	-41.98	-39.03	-13.00	-2.95	-28.98	Peak




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 4

Date: 08-29-2019

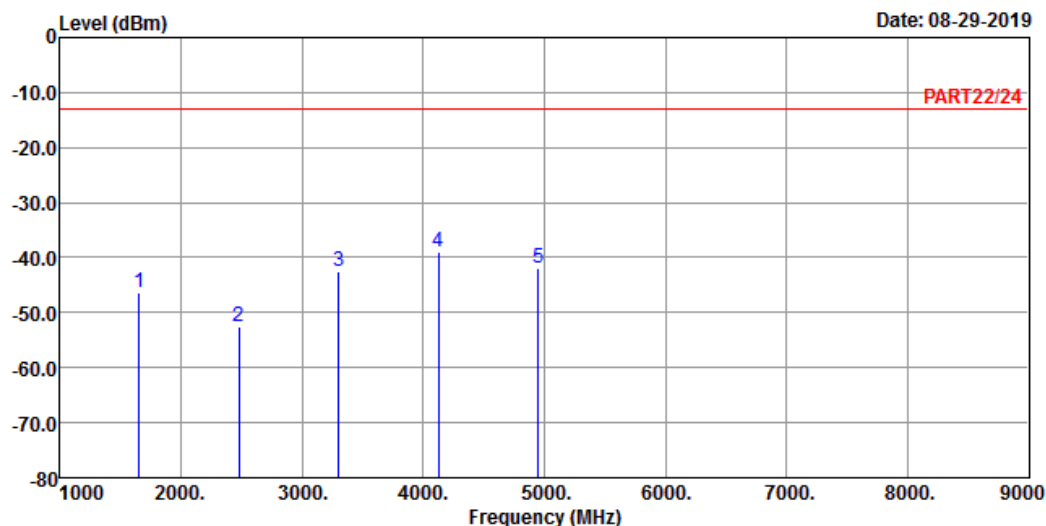

Site : 966 Chamber 5

Condition: PART22/24 VERTICAL

Remak : LTE Band 5 QPSK_1.4M Link_L-CH

Tested by: Thomas Wei

	Freq	Level	Read Level	Limit Line	Over Factor	Limit	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	1649.40	-46.27	-32.53	-13.00	-13.74	-33.27	Peak
2	2474.10	-52.49	-42.47	-13.00	-10.02	-39.49	Peak
3	3298.80	-42.62	-33.76	-13.00	-8.86	-29.62	Peak
4 pp	4123.50	-39.05	-32.94	-13.00	-6.11	-26.05	Peak
5	4948.20	-41.98	-39.03	-13.00	-2.95	-28.98	Peak

Middle Channel




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 3

Date: 08-29-2019

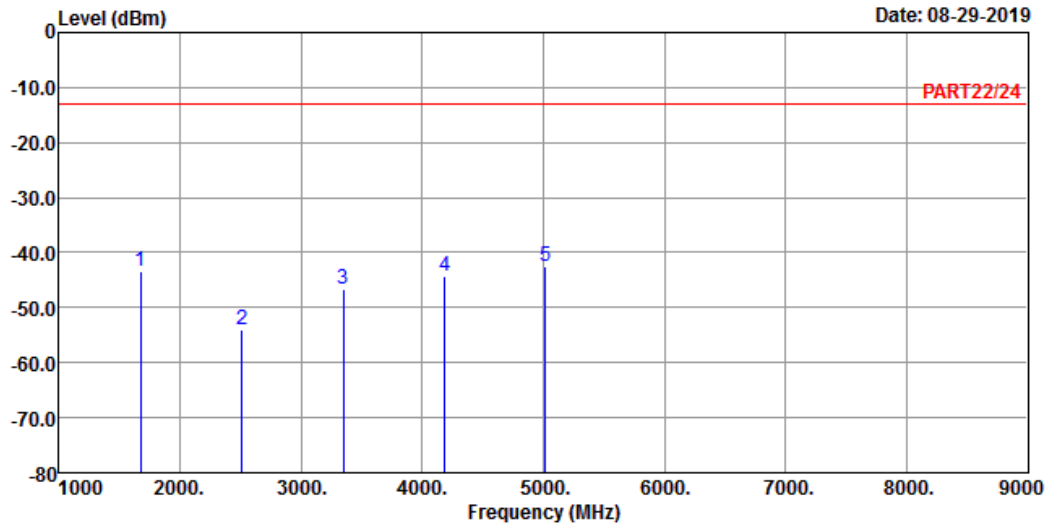

Site : 966 Chamber 5

Condition: PART22/24 HORIZONTAL

Remak : LTE Band 5 QPSK_1.4M Link_M-CH

Tested by: Thomas Wei

	Freq	Level	Read Level	Limit Line	Factor	Over Limit	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	1673.00	-43.38	-29.48	-13.00	-13.90	-30.38	Peak
2	2509.50	-53.95	-43.87	-13.00	-10.08	-40.95	Peak
3	3346.00	-46.55	-37.79	-13.00	-8.76	-33.55	Peak
4	4182.50	-44.14	-38.46	-13.00	-5.68	-31.14	Peak
5 pp	5019.00	-42.45	-40.13	-13.00	-2.32	-29.45	Peak




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 4

Date: 08-29-2019

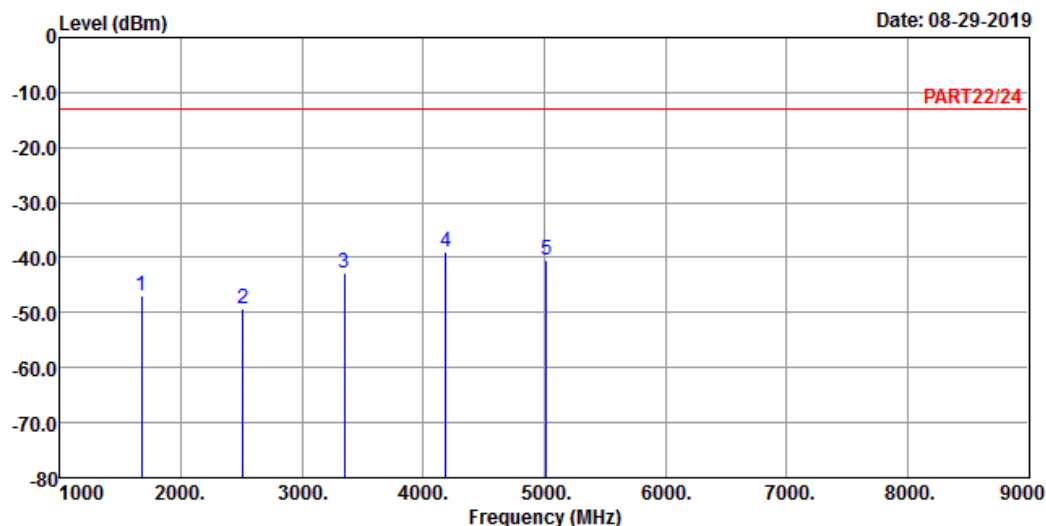

Site : 966 Chamber 5

Condition: PART22/24 VERTICAL

Remak : LTE Band 5 QPSK_1.4M Link_M-CH

Tested by: Thomas Wei

	Freq	Level	Read Level	Limit Line	Over Factor	Limit	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	1673.00	-46.92	-33.02	-13.00	-13.90	-33.92	Peak
2	2509.50	-49.29	-39.21	-13.00	-10.08	-36.29	Peak
3	3346.00	-42.87	-34.11	-13.00	-8.76	-29.87	Peak
4 pp	4182.50	-38.93	-33.25	-13.00	-5.68	-25.93	Peak
5	5019.00	-40.46	-38.14	-13.00	-2.32	-27.46	Peak

High Channel




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 3

Date: 08-29-2019

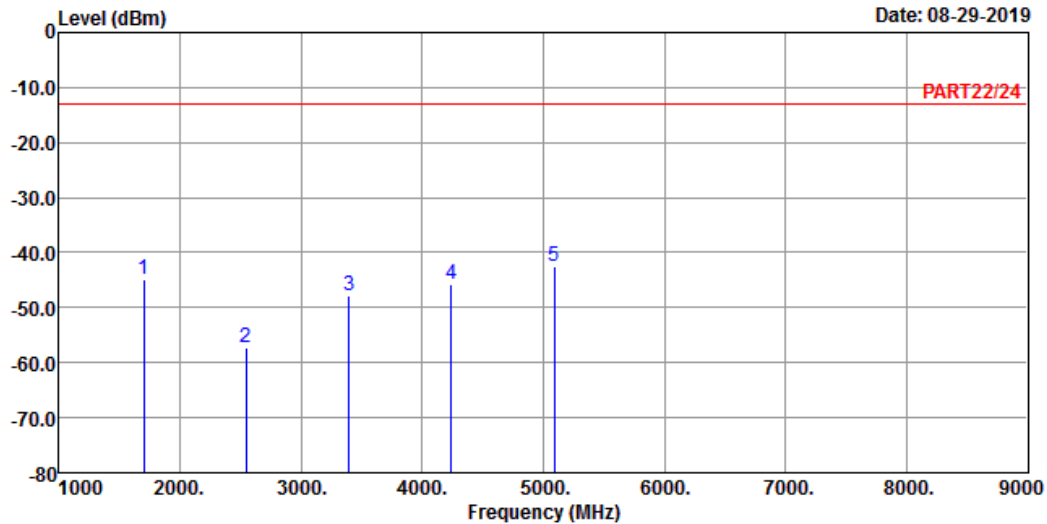

Site : 966 Chamber 5

Condition: PART22/24 HORIZONTAL

Remak : LTE Band 5 QPSK_1.4M Link_H-CH

Tested by: Thomas Wei

	Freq	Level	Read Level	Limit Line	Factor	Over Limit	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	1696.60	-44.83	-30.81	-13.00	-14.02	-31.83	Peak
2	2544.90	-57.38	-47.32	-13.00	-10.06	-44.38	Peak
3	3393.20	-47.79	-39.19	-13.00	-8.60	-34.79	Peak
4	4241.50	-45.78	-40.23	-13.00	-5.55	-32.78	Peak
5 pp	5089.80	-42.63	-40.90	-13.00	-1.73	-29.63	Peak




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 4

Date: 08-29-2019

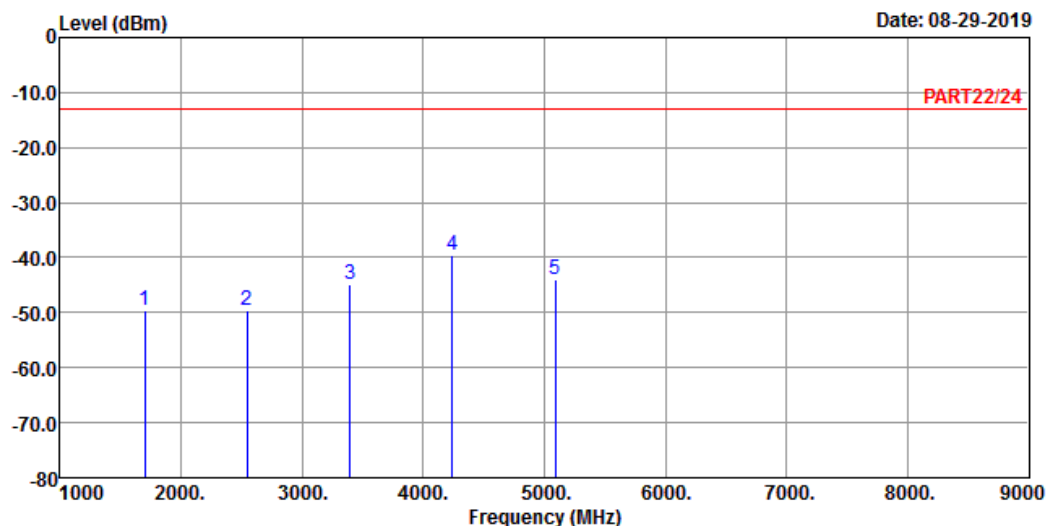

Site : 966 Chamber 5

Condition: PART22/24 VERTICAL

Remak : LTE Band 5 QPSK_1.4M Link_H-CH

Tested by: Thomas Wei

	Freq	Level	Read Level	Limit Line	Over Factor	Limit	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	1696.60	-49.55	-35.53	-13.00	-14.02	-36.55	Peak
2	2544.90	-49.61	-39.55	-13.00	-10.06	-36.61	Peak
3	3393.20	-44.82	-36.22	-13.00	-8.60	-31.82	Peak
4 pp	4241.50	-39.56	-34.01	-13.00	-5.55	-26.56	Peak
5	5089.80	-44.07	-42.34	-13.00	-1.73	-31.07	Peak

Channel Bandwidth: 5 MHz / QPSK
Low Channel




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 3

Date: 08-28-2019

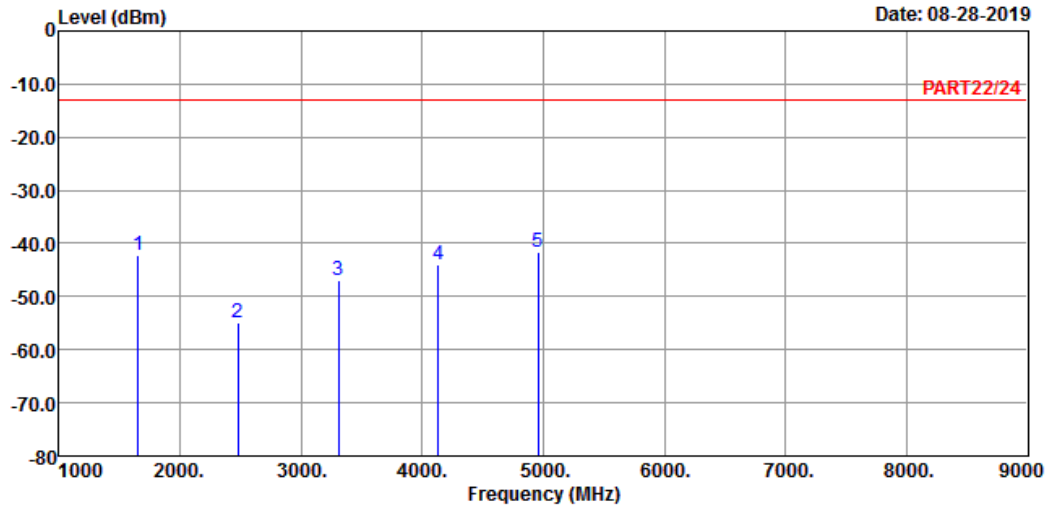

Site : 966 Chamber 5

Condition: PART22/24 HORIZONTAL

Remak : LTE Band 5 QPSK_5M Link_L-CH

Tested by: Thomas Wei

	Freq	Level	Read Level	Limit Line	Factor	Over Limit	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	1653.00	-42.07	-28.30	-13.00	-13.77	-29.07	Peak
2	2479.50	-54.77	-44.74	-13.00	-10.03	-41.77	Peak
3	3306.00	-46.84	-37.95	-13.00	-8.89	-33.84	Peak
4	4132.50	-44.11	-38.08	-13.00	-6.03	-31.11	Peak
5 pp	4959.00	-41.62	-38.67	-13.00	-2.95	-28.62	Peak




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 4

Date: 08-28-2019

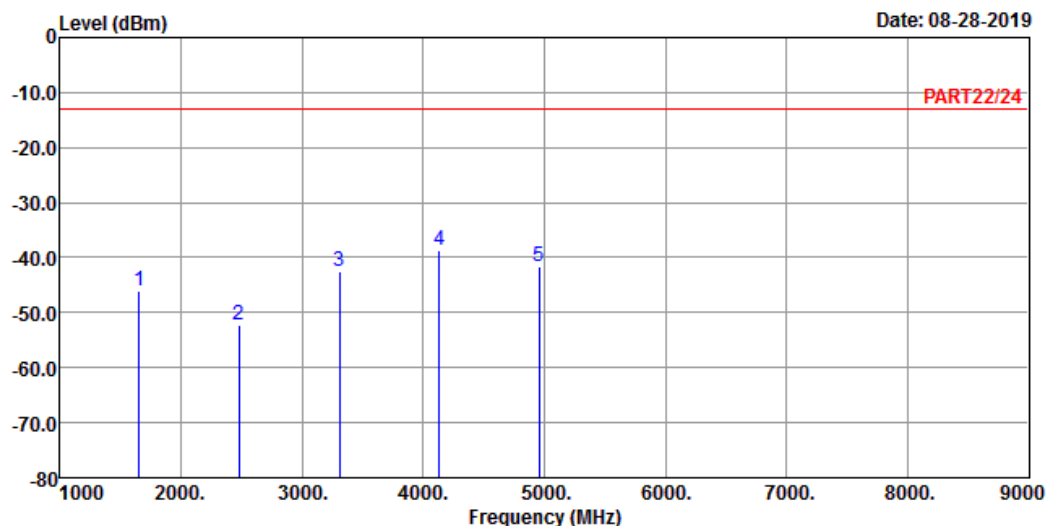

Site : 966 Chamber 5

Condition: PART22/24 VERTICAL

Remak : LTE Band 5 QPSK_5M Link_L-CH

Tested by: Thomas Wei

	Freq	Level	Read Level	Limit Line	Over Factor	Limit	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	1653.00	-45.98	-32.21	-13.00	-13.77	-32.98	Peak
2	2479.50	-52.23	-42.20	-13.00	-10.03	-39.23	Peak
3	3306.00	-42.41	-33.52	-13.00	-8.89	-29.41	Peak
4 pp	4132.50	-38.78	-32.75	-13.00	-6.03	-25.78	Peak
5	4959.00	-41.61	-38.66	-13.00	-2.95	-28.61	Peak

Middle Channel




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 3

Date: 08-29-2019

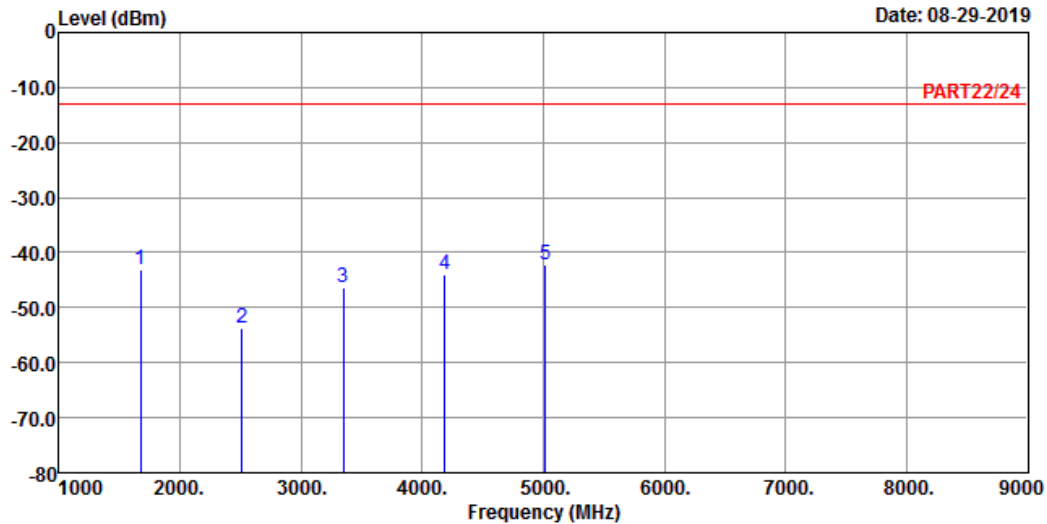

Site : 966 Chamber 5

Condition: PART22/24 HORIZONTAL

Remak : LTE Band 5 QPSK_5M Link_M-CH

Tested by: Thomas Wei

	Freq	Level	Read Level	Limit Line	Factor	Over Limit	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	1673.00	-43.03	-29.13	-13.00	-13.90	-30.03	Peak
2	2509.50	-53.79	-43.71	-13.00	-10.08	-40.79	Peak
3	3346.00	-46.28	-37.52	-13.00	-8.76	-33.28	Peak
4	4182.50	-43.92	-38.24	-13.00	-5.68	-30.92	Peak
5 pp	5019.00	-42.33	-40.01	-13.00	-2.32	-29.33	Peak




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 4

Date: 08-29-2019

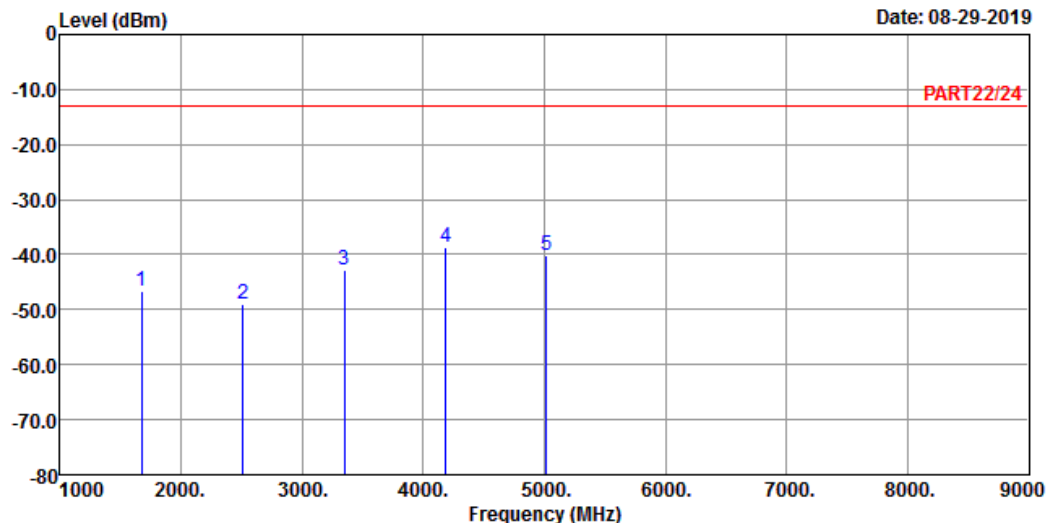

Site : 966 Chamber 5

Condition: PART22/24 VERTICAL

Remak : LTE Band 5 QPSK_5M Link_M-CH

Tested by: Thomas Wei

	Freq	Level	Read Level	Limit Line	Over Factor	Limit	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	1673.00	-46.67	-32.77	-13.00	-13.90	-33.67	Peak
2	2509.50	-49.12	-39.04	-13.00	-10.08	-36.12	Peak
3	3346.00	-42.73	-33.97	-13.00	-8.76	-29.73	Peak
4 pp	4182.50	-38.66	-32.98	-13.00	-5.68	-25.66	Peak
5	5019.00	-40.21	-37.89	-13.00	-2.32	-27.21	Peak

High Channel




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 3

Date: 08-28-2019

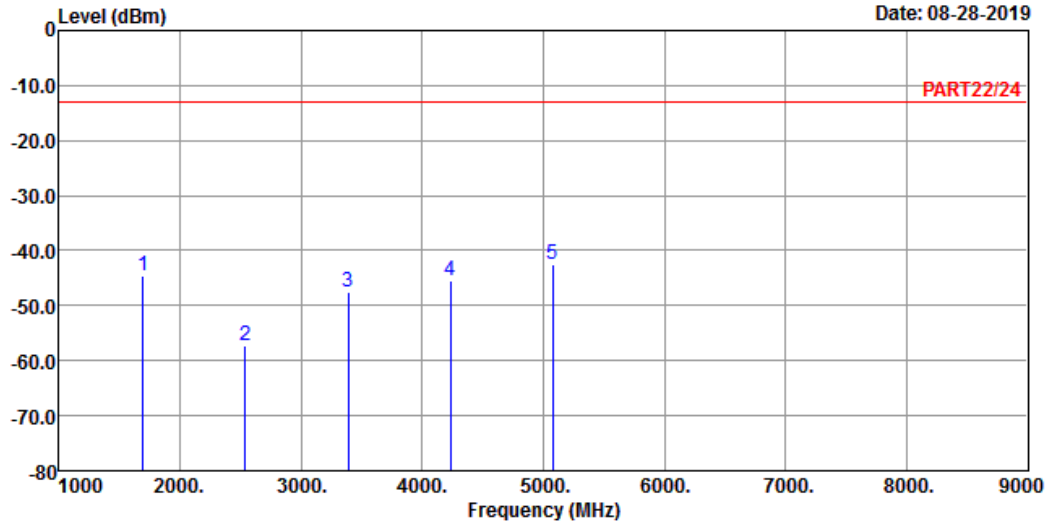

Site : 966 Chamber 5

Condition: PART22/24 HORIZONTAL

Remak : LTE Band 5 QPSK_5M Link_H-CH

Tested by: Thomas Wei

	Freq	Level	Read Level	Limit Line	Factor	Over Limit	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	1693.00	-44.67	-30.65	-13.00	-14.02	-31.67	Peak
2	2539.50	-57.31	-47.25	-13.00	-10.06	-44.31	Peak
3	3386.00	-47.59	-38.96	-13.00	-8.63	-34.59	Peak
4	4232.50	-45.51	-39.96	-13.00	-5.55	-32.51	Peak
5 pp	5079.00	-42.47	-40.60	-13.00	-1.87	-29.47	Peak




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 4

Date: 08-28-2019

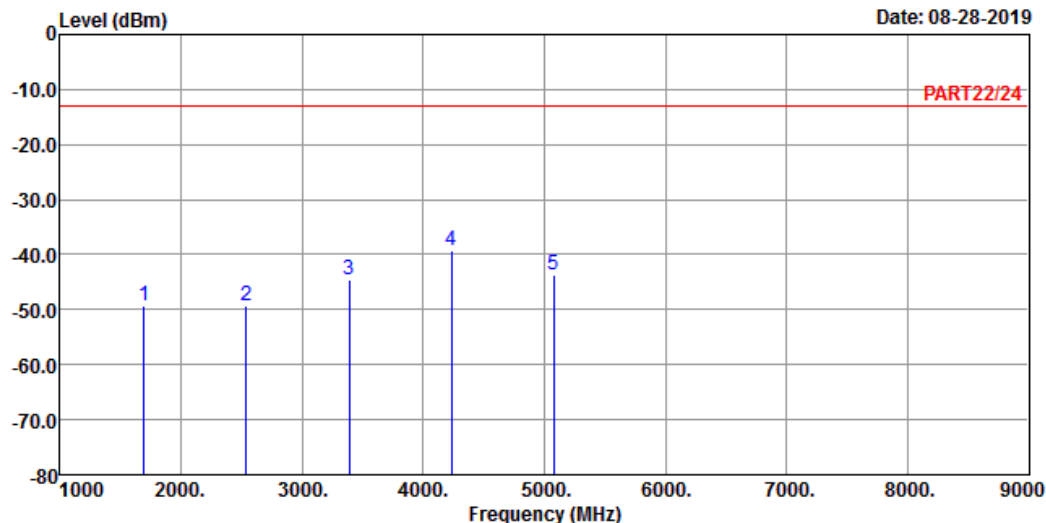

Site : 966 Chamber 5

Condition: PART22/24 VERTICAL

Remak : LTE Band 5 QPSK_5M Link_H-CH

Tested by: Thomas Wei

	Freq	Level	Read Level	Limit Line	Over Factor	Limit	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	1693.00	-49.28	-35.26	-13.00	-14.02	-36.28	Peak
2	2539.50	-49.35	-39.29	-13.00	-10.06	-36.35	Peak
3	3386.00	-44.55	-35.92	-13.00	-8.63	-31.55	Peak
4 pp	4232.50	-39.27	-33.72	-13.00	-5.55	-26.27	Peak
5	5079.00	-43.74	-41.87	-13.00	-1.87	-30.74	Peak

Channel Bandwidth: 10 MHz / QPSK
Low Channel




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 3

Date: 08-28-2019

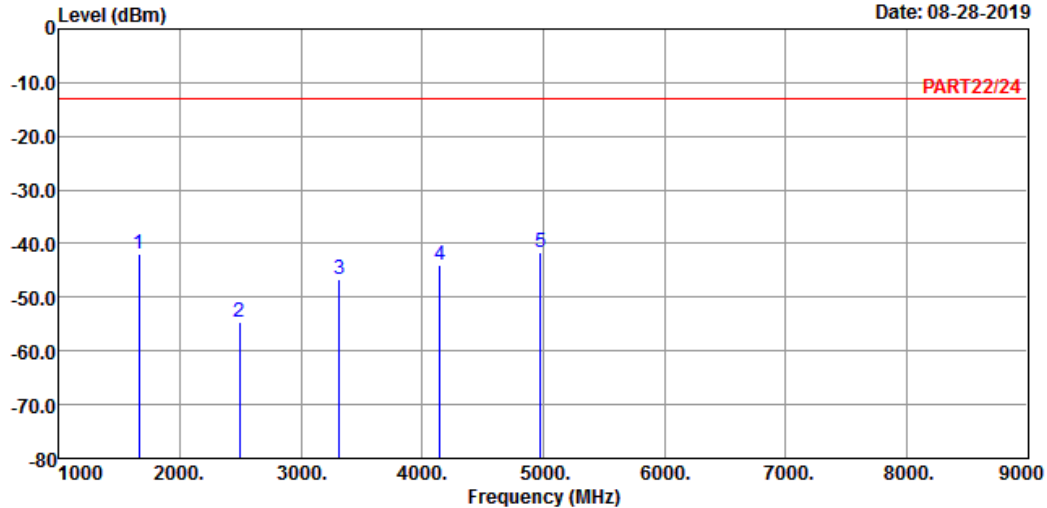

Site : 966 Chamber 5
Condition: PART22/24 HORIZONTAL
Remak : LTE Band 5 QPSK_10M Link_L-CH
Tested by: Thomas Wei

	Freq	Level	Read Level	Limit Line	Over Factor	Limit	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	1658.00	-41.84	-28.04	-13.00	-13.80	-28.84	Peak
2	2487.00	-54.49	-44.44	-13.00	-10.05	-41.49	Peak
3	3316.00	-46.63	-37.77	-13.00	-8.86	-33.63	Peak
4	4145.00	-43.85	-37.91	-13.00	-5.94	-30.85	Peak
5 pp	4974.00	-41.50	-38.78	-13.00	-2.72	-28.50	Peak




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 4

Date: 08-28-2019

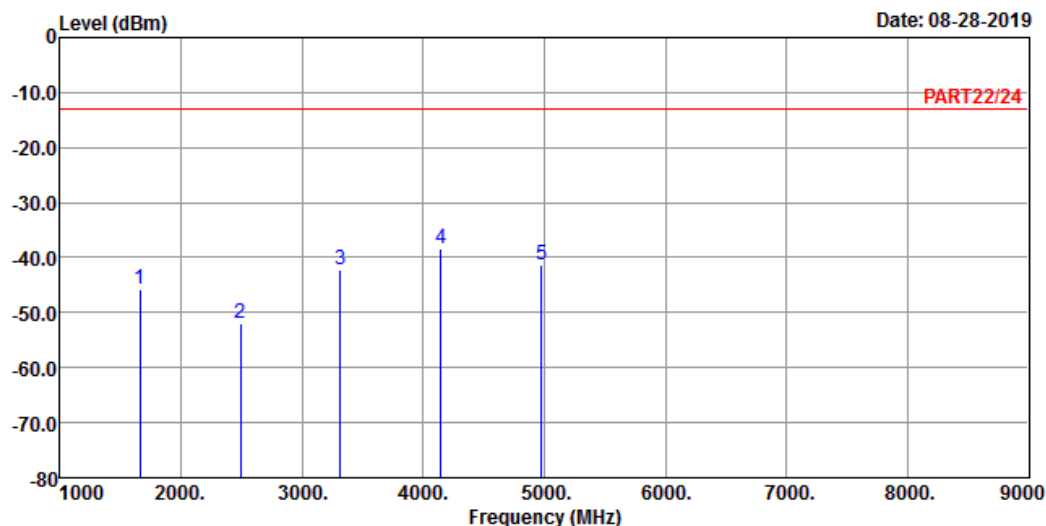

Site : 966 Chamber 5

Condition: PART22/24 VERTICAL

Remak : LTE Band 5 QPSK_10M Link_L-CH

Tested by: Thomas Wei

	Freq	Level	Read Level	Limit Line	Over Factor	Limit	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	1658.00	-45.73	-31.93	-13.00	-13.80	-32.73	Peak
2	2487.00	-51.96	-41.91	-13.00	-10.05	-38.96	Peak
3	3316.00	-42.28	-33.42	-13.00	-8.86	-29.28	Peak
4 pp	4145.00	-38.44	-32.50	-13.00	-5.94	-25.44	Peak
5	4974.00	-41.33	-38.61	-13.00	-2.72	-28.33	Peak

Middle Channel




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 5

Date: 08-28-2019

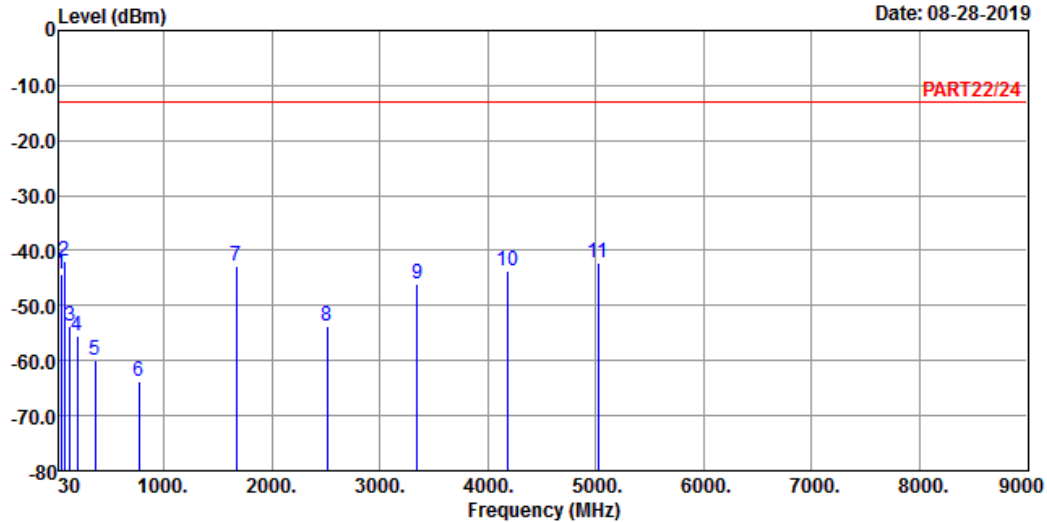

Site : 966 Chamber 5

Condition: PART22/24 HORIZONTAL

Remak : LTE Band 5 QPSK_10M Link_M-CH

Tested by: Thomas Wei

	Freq	Level	Read Level	Limit	Over	
	MHz	dBm	dBm	dBm	Factor	Limit Remark
	MHz	dBm	dBm	dBm	dB	dB
1	43.58	-44.27	-42.80	-13.00	-1.47	-31.27 Peak
2 pp	79.47	-41.84	-31.18	-13.00	-10.66	-28.84 Peak
3	130.88	-53.82	-45.13	-13.00	-8.69	-40.82 Peak
4	196.84	-55.55	-47.81	-13.00	-7.74	-42.55 Peak
5	360.77	-59.90	-53.72	-13.00	-6.18	-46.90 Peak
6	769.14	-63.72	-64.54	-13.00	0.82	-50.72 Peak
7	1673.00	-42.84	-28.94	-13.00	-13.90	-29.84 Peak
8	2509.50	-53.61	-43.53	-13.00	-10.08	-40.61 Peak
9	3346.00	-46.15	-37.39	-13.00	-8.76	-33.15 Peak
10	4182.50	-43.73	-38.05	-13.00	-5.68	-30.73 Peak
11	5019.00	-42.26	-39.94	-13.00	-2.32	-29.26 Peak




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 6

Date: 08-28-2019

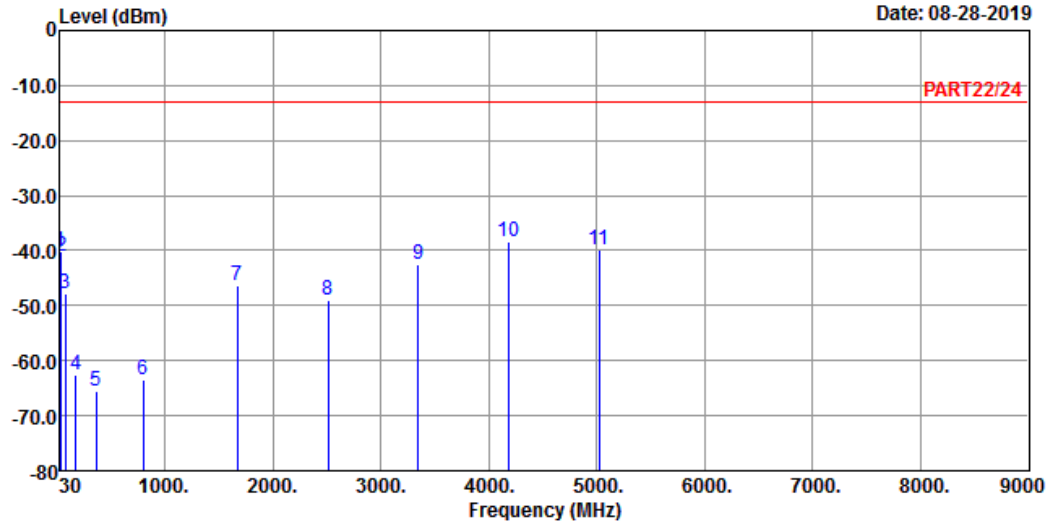

Site : 966 Chamber 5

Condition: PART22/24 VERTICAL

Remak : LTE Band 5 QPSK_10M Link_M-CH

Tested by: Thomas Wei

	Freq	Level	Read Level	Limit Line	Factor	Over Limit	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	30.00	-40.14	-40.52	-13.00	0.38	-27.14	Peak
2	41.64	-40.94	-40.53	-13.00	-0.41	-27.94	Peak
3	77.53	-47.85	-37.65	-13.00	-10.20	-34.85	Peak
4	178.41	-62.48	-55.42	-13.00	-7.06	-49.48	Peak
5	360.77	-65.63	-59.45	-13.00	-6.18	-52.63	Peak
6	796.30	-63.37	-64.12	-13.00	0.75	-50.37	Peak
7	1673.00	-46.41	-32.51	-13.00	-13.90	-33.41	Peak
8	2509.50	-48.88	-38.80	-13.00	-10.08	-35.88	Peak
9	3346.00	-42.44	-33.68	-13.00	-8.76	-29.44	Peak
10 pp	4182.50	-38.43	-32.75	-13.00	-5.68	-25.43	Peak
11	5019.00	-39.90	-37.58	-13.00	-2.32	-26.90	Peak

High Channel




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 3

Date: 08-28-2019

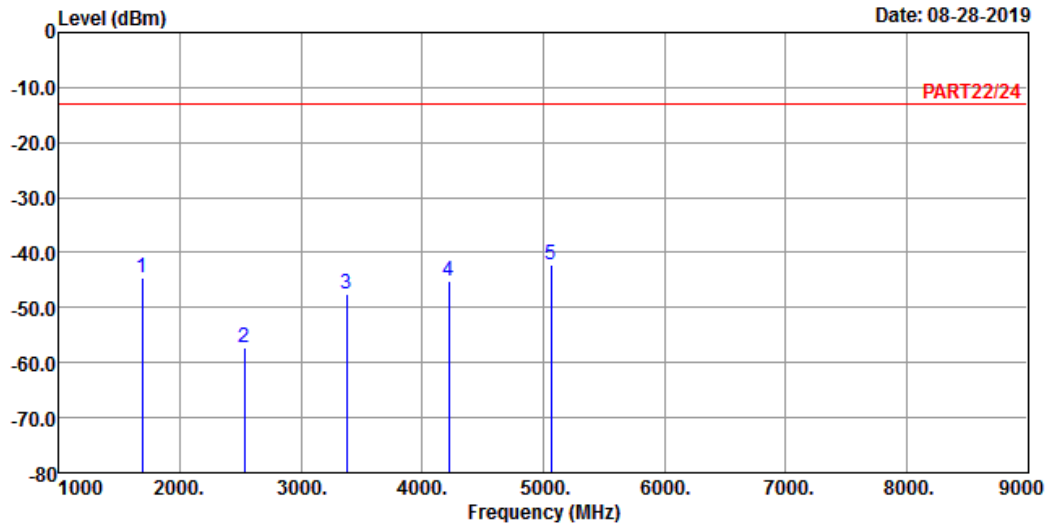

Site : 966 Chamber 5

Condition: PART22/24 HORIZONTAL

Remak : LTE Band 5 QPSK_10M Link_H-CH

Tested by: Thomas Wei

	Freq	Level	Read Level	Limit Line	Factor	Over Limit	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	1688.00	-44.44	-30.45	-13.00	-13.99	-31.44	Peak
2	2532.00	-57.24	-47.17	-13.00	-10.07	-44.24	Peak
3	3376.00	-47.44	-38.77	-13.00	-8.67	-34.44	Peak
4	4220.00	-45.20	-39.63	-13.00	-5.57	-32.20	Peak
5 pp	5064.00	-42.29	-40.27	-13.00	-2.02	-29.29	Peak




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 4

Date: 08-28-2019

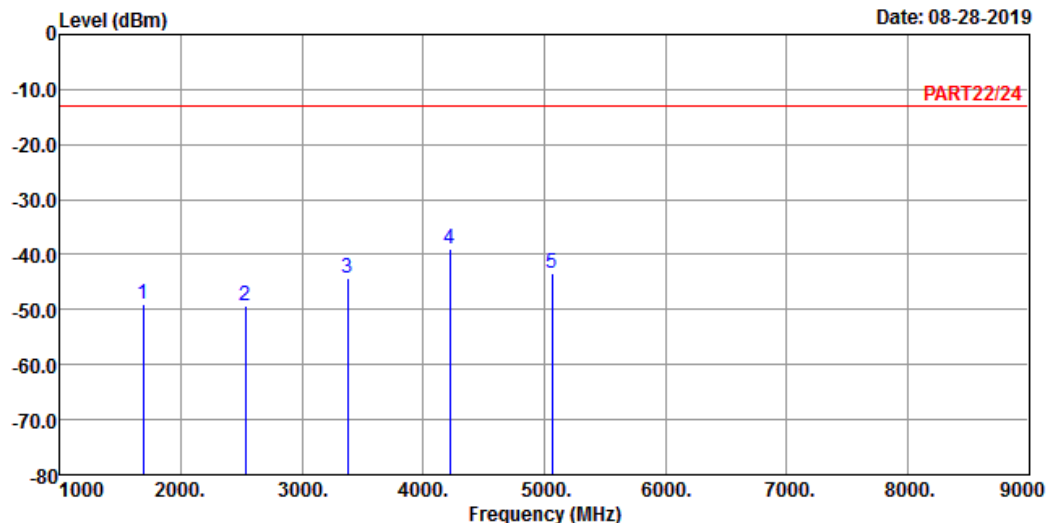

Site : 966 Chamber 5

Condition: PART22/24 VERTICAL

Remak : LTE Band 5 QPSK_10M Link_H-CH

Tested by: Thomas Wei

	Freq	Level	Read Level	Limit Line	Over Factor	Limit	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	1688.00	-49.08	-35.09	-13.00	-13.99	-36.08	Peak
2	2532.00	-49.18	-39.11	-13.00	-10.07	-36.18	Peak
3	3376.00	-44.30	-35.63	-13.00	-8.67	-31.30	Peak
4 pp	4220.00	-39.00	-33.43	-13.00	-5.57	-26.00	Peak
5	5064.00	-43.50	-41.48	-13.00	-2.02	-30.50	Peak

5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

Appendix – Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.

--- END ---