

ISED CABid: ES1909

Test Report No:  
NIE: 67776RRF.015

## Partial Test Report

USA FCC Part 15.225, 15.209

CANADA RSS-210, RSS-Gen

(*) Identification of item tested	Destination Operation Panel
(*) Trademark	KONE
(*) Model and /or type reference	KSP 1028 -L
Other identification of the product	HW version: Ver A SW version: OS 1.2.00_20210219 FCC ID: FCC ID UXS-SMR-3X3 / Radar, FCC ID: 2ALQBOFACCL IC: IC ID: 6902A-SMR3X3, IC ID: 4228A-OFACCL Kone part number (KM51566502V000-KM51566509V000) Kone Reference Number: 51836023D15
(*) Features	Radar, RFID High Frequency, BT/BLE
Applicant	KONE CORPORATION Keilasatama 3 - 02150 ESPOO - FINLAND
Test method requested, standard	USA FCC Part 15.225 (10–1–20 Edition): Operation within the band 13.110 -14.010. USA FCC Part 15.209 (10–1–20 Edition): Radiated emission limits, general requirements. CANADA RSS-210 Issue 10 (December 2019). CANADA RSS-Gen Issue 5 (March 2019). ANSI C63.10-2013: American National Standard for Testing Unlicensed Wireless Devices. - FCC 15.225 (a) / RSS-210 B.6 (a)(i) Field strength of emissions within the band 13.553 MHz -13.567 MHz - FCC 15.225 (b) / RSS-210 B.6 (a)(ii) Field strength of emissions within the band 13.410 - 13.553 MHz and 13.567 – 13.710 MHz - FCC 15.225 (c) / RSS-210 B.6 (a)(iii) Field strength of emissions within the band 13.110 - 13.410 MHz and 13.710 – 14.010 MHz - FCC 15.225 (d) / RSS-210 B.6 (a)(iv) Field strength of emissions outside of the band 13.110 MHz -14.010 MHz
Approved by (name / position & signature)	Rafael López EMC Consumer & RF Lab. Manager
Date of issue	2021-10-06
Report template No	FDT08_23 (*) "Data provided by the client"

# Index

Competences and guarantees .....3

General conditions .....3

Uncertainty.....3

Data provided by the client .....3

Usage of samples .....4

Test sample description.....4

Identification of the client .....5

Testing period and place .....5

Document history.....6

Environmental conditions .....6

Remarks and comments.....6

Testing verdicts.....7

Summary .....7

Appendix A: Test results.....8

## Competences and guarantees

---

DEKRA Testing and Certification is a testing laboratory accredited by the National Accreditation Body (ENAC - Entidad Nacional de Acreditación), to perform the tests indicated in the Certificate No. 51/LE 147.

DEKRA Testing and Certification S.A.U. is an FCC-recognized accredited testing laboratory with the appropriate scope of accreditation that covers the performed tests in this report.

DEKRA Testing and Certification S.A.U. is an ISED-recognized accredited testing laboratory, CABid: ES1909, with the appropriate scope of accreditation that covers the performed tests in this report.

In order to assure the traceability to other national and international laboratories, DEKRA Testing and Certification has a calibration and maintenance program for its measurement equipment.

DEKRA Testing and Certification guarantees the reliability of the data presented in this report, which is the result of the measurements and the tests performed to the item under test on the date and under the conditions stated on the report and, it is based on the knowledge and technical facilities available at DEKRA Testing and Certification at the time of performance of the test.

DEKRA Testing and Certification is liable to the client for the maintenance of the confidentiality of all information related to the item under test and the results of the test.

The results presented in this Test Report apply only to the particular item under test established in this document.

**IMPORTANT:** No parts of this report may be reproduced or quoted out of context, in any form or by any means, except in full, without the previous written permission of DEKRA Testing and Certification.

## General conditions

---

1. This report is only referred to the item that has undergone the test.
2. This report does not constitute or imply on its own an approval of the product by the Certification Bodies or competent Authorities.
3. This document is only valid if complete; no partial reproduction can be made without previous written permission of DEKRA Testing and Certification.
4. This test report cannot be used partially or in full for publicity and/or promotional purposes without previous written permission of DEKRA Testing and Certification and the Accreditation Bodies.

## Uncertainty

---

Uncertainty (factor  $k=2$ ) was calculated according to the DEKRA Testing and Certification internal document PODT000.

## Data provided by the client

---

The following data has been provided by the client:

1. Information relating to the description of the sample ("Identification of the item tested", "Trademark", "Model and/or type reference tested").
2. The sample of the model KSP 1028 -L is a Destination Operation Panel for lift applications located at landing.

DEKRA Testing and Certification S.A.U. declines any responsibility with respect to the information provided by the client and that may affect the validity of results.

## Usage of samples

Samples undergoing test have been selected by: The client.

- Sample S/01 is composed of the following elements:

Control Nº	Description	Model	Serial Nº	Date of reception
67776/007	Destination Operation Panel	KSP 1028-L	A00AZ2110600001	2021/03/08

Auxiliary elements used with the Sample S/01:

Control Nº	Description	Model	Serial Nº	Date of reception
67776/001	Samples Table	--	--	2021/03/08
67776/002	Switch	WS-C3560CX-12PC-S	FOC2206Y43S	2021/03/08
67776/003	Feeding Cable	--	--	2021/03/08
67776/018	DVT Card	--	--	2021/03/08

Sample S/01 has undergone the test(s): The tests indicated in the Appendix A. The element under test contained a chipset LEGIC RFID ANTENNA (KSP 10XX-L).

Access module information:

- Legic RFID antenna: KM51566509V000
- Access board: KM51598313G01
- Legic BT / RFID component: Legic SM-63x0

Access module (-L) FCC ID: 2ALQBOFACCL

Access module (-L) IC: 4228A-OFACCL

## Test sample description

Ports..... :	Port name and description	Cable			
		Specified max length [m]	Attached during test	Shielded	Coupled to patient <sup>(3)</sup>
	RJ-45/PoE, Ethernet port	30m	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
	PE		<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
	X2, AUX: RS485		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
	X3, AUX: Relay input		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
	XU1, AUX, USB 1		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
	XU2, AUX, USB 2		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Supplementary information to the ports..... :	PE connected				
Rated power supply .....	Voltage and Frequency				
	<input checked="" type="checkbox"/> DC: 48V; PoE+(802.3at)				
Rated Power .....	14W				
Clock frequencies .....	See attachment. KSP 10xx DOP internal Frequencies				

Other parameters.....:	-		
Software version .....	OS 1.2.00_20210219		
Hardware version.....:	Ver A		
Dimensions in cm (W x H x D).....:	-		
Mounting position.....:	<input type="checkbox"/>	Table top equipment	
	<input checked="" type="checkbox"/>	Wall/Ceiling mounted equipment	
	<input type="checkbox"/>	Floor standing equipment	
	<input type="checkbox"/>	Hand-held equipment	
	<input type="checkbox"/>	Other:	
Modules/parts .....	Module/parts of test item	Type	Manufacturer
	Radar FCC ID UXS-SMR-3X3 / Radar, IC: 6902A-SMR3X3 / Radar,	SMR-333	InnoSenT
	FCC ID: 2ALQBOFACCL / IC: 4228A- OFACCL / KSP Access module		KONE Corporation
	-		
Accessories (not part of the test item) .....	Description	Type	Manufacturer
	DOP WALL MOUNT KM51566508V000		Kone
	POE+ power switch CISCO 3560CX-8		Cisco
	Ethernet cables		Harting
	-		
Documents as provided by the applicant.....:	Description	File name	Issue date
	KSP 1028 KSP 1068 DOP Technical description V11	--	2020-11-30
	Setup configuration for OMNIKEY 5127CK MINI_setu	--	2020-08-07
	KSP 1068 DOP internal Frequencies	--	2021-01-04
	-		

<sup>(3)</sup> Only for Medical Equipment

## Identification of the client

KONE CORPORATION

Myllykatu 3 - 05800, HYVINKÄÄ - FINLAND

## Testing period and place

Test Location	DEKRA Testing and Certification S.A.U.
Date (start)	2021-03-26
Date (finish)	2021-03-27

## Document history

Report number	Date	Description
67776RRF.015	2021-10-06	First release.

## Environmental conditions

In the control chamber, the following limits were not exceeded during the test:

Temperature	Min. = 15 °C Max. = 35 °C
Relative humidity	Min. = 20 % Max. = 75 %

In the semianechoic chamber, the following limits were not exceeded during the test.

Temperature	Min. = 15 °C Max. = 35 °C
Relative humidity	Min. = 20 % Max. = 75 %

## Remarks and comments

The tests have been performed by the technical personnel: Alfonso Gutiérrez and Cristina Calle.

Used instrumentation:

### Radiated Measurements:

	Last Calibration	Due Calibration
1. Semianechoic Absorber Lined Chamber ETS LINDGREN FACT 3 200 STP	N/A	N/A
2. Shielded Room ETS LINDGREN S101	N/A	N/A
3. Active Loop Antenna HEWLETT PACKARD 11966A	2020/07	2022/07
4. EMI Test Receiver 7 GHz ROHDE AND SCHWARZ ESR7	2020/12	2022/12
5. Digital Multimeter FLUKE 175	2020/11	2021/11
6. Biconical/Log Antenna 30 MHz - 6 GHz ETS LINDGREN 3142E	2020/04	2023/04
7. Preamplifier G>40dB 10MHz-6GHz, BONN ELEKTRONIK, BLNA 0160-01N	2021/03	2022/03

## Testing verdicts

Not applicable:	N/A
Pass:	P
Fail:	F
Not measured:	N/M

## Summary

FCC PART 15 PARAGRAPH / RSS-210			
Requirement – Test case		Verdict	Remark
FCC 15.225 (a) / RSS-210 B.6 (a)(i)	Field strength of emissions within the band 13.553 MHz -13.567 MHz	P	
FCC 15.225 (b) / RSS-210 B.6 (a)(ii)	Field strength of emissions within the band 13.410 - 13.553 MHz and 13.567 – 13.710 MHz	P	
FCC 15.225 (c) / RSS-210 B.6 (a)(iii)	Field strength of emissions within the band 13.110 - 13.410 MHz and 13.710 – 14.010 MHz	P	
FCC 15.225 (d) / RSS-210 B.6 (a)(iv)	Field strength of emissions outside of the band 13.110 MHz -14.010 MHz	P	
FCC 15.225 (e) / RSS-210 B.6 (b)	Frequency tolerance of the carrier signal	N/M	(1)
<u>Supplementary information and remarks:</u>			
(1) Test not performed.			

## Appendix A: Test results



INDEX

TEST CONDITIONS .....10

15.225 (a) / RSS-210 B.6 (a)(i) Field strength of emissions within the band 13.553 MHz - 13.567 MHz .....12

15.225 (b) / RSS-210 B.6 (a)(ii) Field strength of emissions within the band 13.410 MHz -13.553 MHz and  
13.567 MHz -13.710 MHz .....13

15.225 (c) / RSS-210 B.6 (a)(iii) Field strength of emissions within the band 13.110 MHz -13.410 MHz and  
13.710 MHz - 14.010 MHz .....15

15.225 (d) / RSS-210 B.6 (a)(iv) Field strength of emissions outside of the band 13.110 MHz - 14.010 MHz .....17

## TEST CONDITIONS

(\*) Data provided by the Applicant.

### POWER SUPPLY (\*):

Vnominal: 48 Vdc  
Type of Power Supply: PoE+(802.3af)

### ANTENNA (\*):

Type of Antenna: Dedicated fixed antenna.  
Maximum Declared Antenna Gain: +2 dBi

### TEMPERATURE (\*):

Tnormal: +23 °C

### TEST FREQUENCY:

Nominal Operating Frequency: 13.56 MHz

### RADIATED MEASUREMENTS:

All radiated tests were performed in a semi-anechoic chamber. The measurement antenna (Loop antenna for the range between 9 kHz to 30 MHz and Bilog antenna for the range between 30 MHz to 200 MHz) is situated at a distance of 3 m.


For radiated emissions in the range 9 kHz to 30 MHz that is performed at a distance closer than the specified distance, an inverse proportionality factor of 40 dB per decade is used to normalize the measured data for determining compliance.

The equipment under test was set up on a non-conductive platform above the ground plane and the situation and orientation was varied to find the maximum radiated emission. It was also rotated 360° and in the range between 30 MHz and 200 MHz the antenna height was varied from 1 to 4 meters to find the maximum radiated emission.


In the range between 9 kHz and 30 MHz the measurements were made in the three different orientation planes of the loop antenna to determine the maximum received field.

In the range between 30 MHz and 200 MHz the measurements were made in both horizontal and vertical planes of polarization.

Radiated measurements setup 9 kHz to 30 MHz:

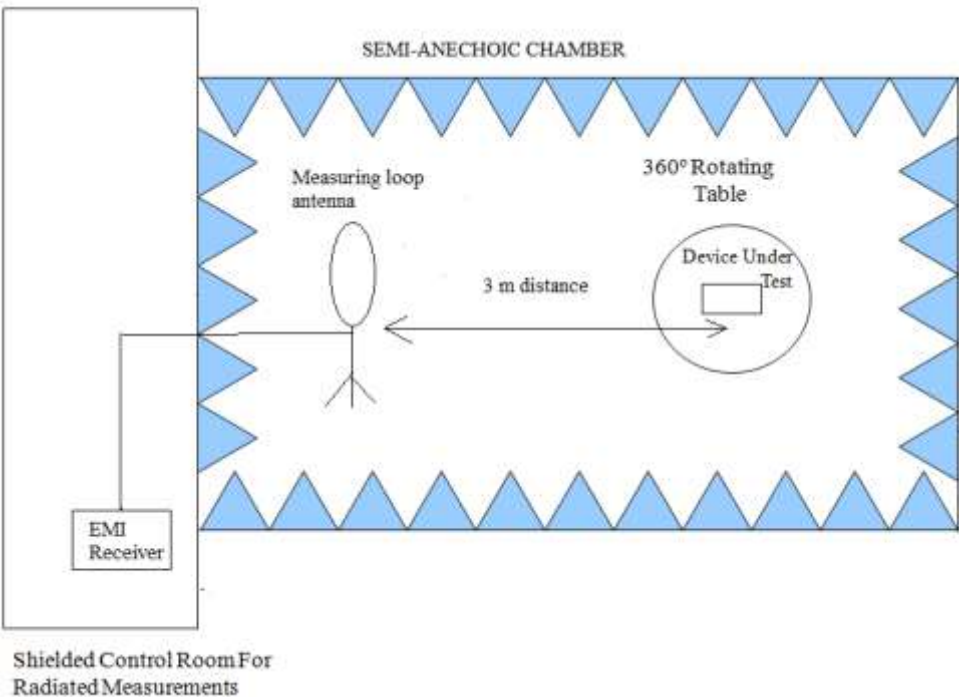

Radiated measurements setup 30 MHz to 200 MHz:

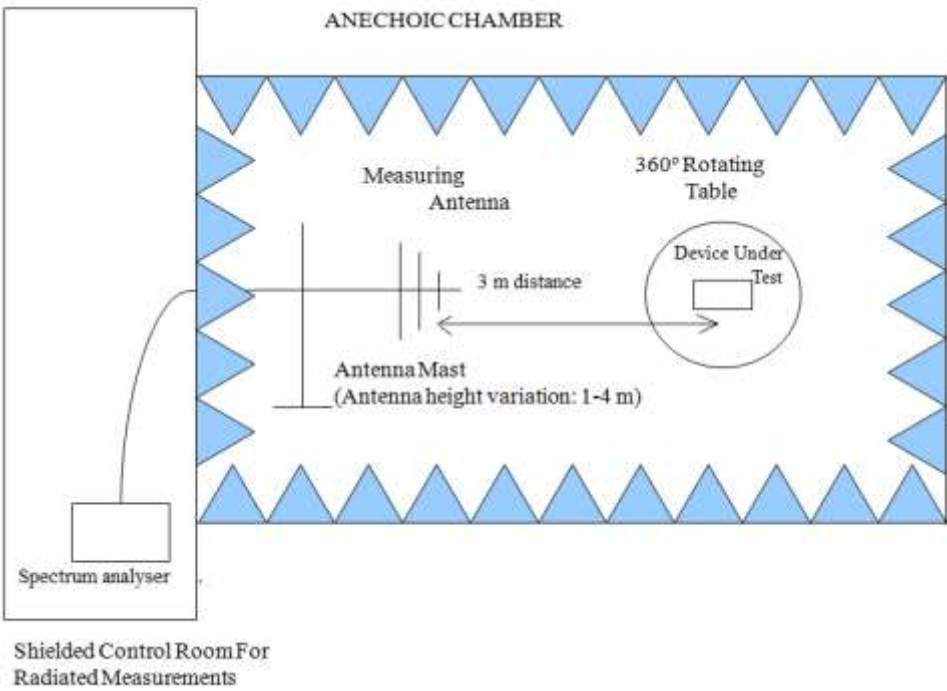


15.225 (a) / RSS-210 B.6 (a)(i) Field Strength of Emissions  
within the band 13.553 MHz - 13.567 MHz

SPECIFICATION:

The field strength of any emissions within the band 13.553 – 13.567 MHz shall not exceed 15,848 microvolts/meter (84 dBµV/m) at 30 meters.

RESULTS:

Measurement distance: 3 meters.

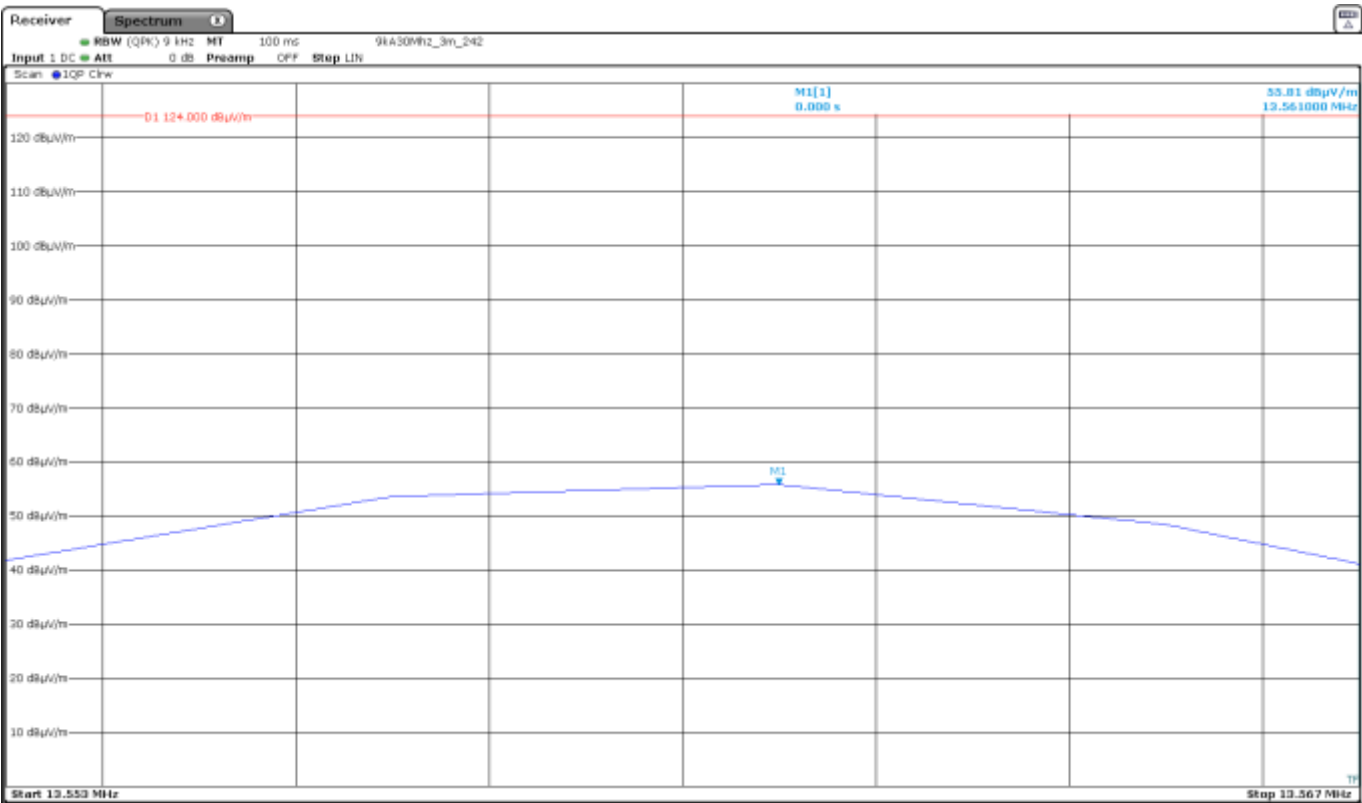

The limit shown in the above plot is extrapolated to 3 meters.

Frequency (MHz)	Maximum field strength (dBµV/m) measured at 3 m (quasi-peak detector)	Maximum field strength (dBµV/m) extrapolated to 30 m (40 dB/decade)
13.561	55.81	15.81
Measurement uncertainty (dB)	<±3.04	

Verdict: PASS

15.225 (b) / RSS-210 B.6 (a)(ii) Field Strength of Emissions within  
the band 13.410 MHz -13.553 MHz and 13.567 MHz -13.710 MHz


SPECIFICATION:

Within the bands 13.410-13.553 MHz and 13.567-13.710 MHz, the field strength of any emissions shall not exceed 334 microvolts/meter (50.47 dBµV/m) at 30 meters.

RESULTS:

Measurement distance: 3 meters.

• Band 13.410 - 13.553 MHz:

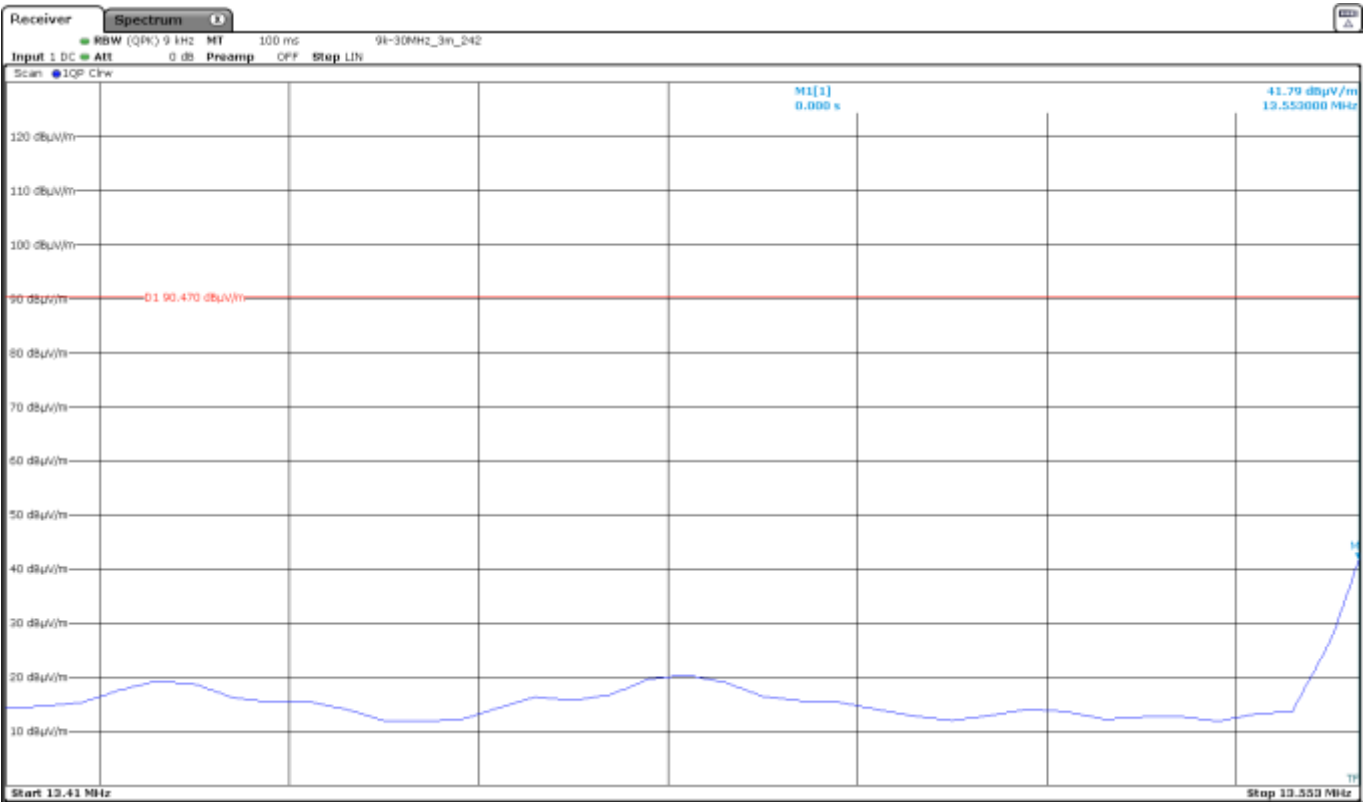


The limit shown in the above plot is extrapolated to 3 meters.

Frequency (MHz)	Maximum field strength (dBµV/m) measured at 3 m (quasi-peak detector)	Maximum field strength (dBµV/m) extrapolated to 30 m (40 dB/decade)
13.553	41.79	1.79
Measurement uncertainty (dB)	<±3.04	

Verdict: PASS

• Band 13.567 - 13.710 MHz:

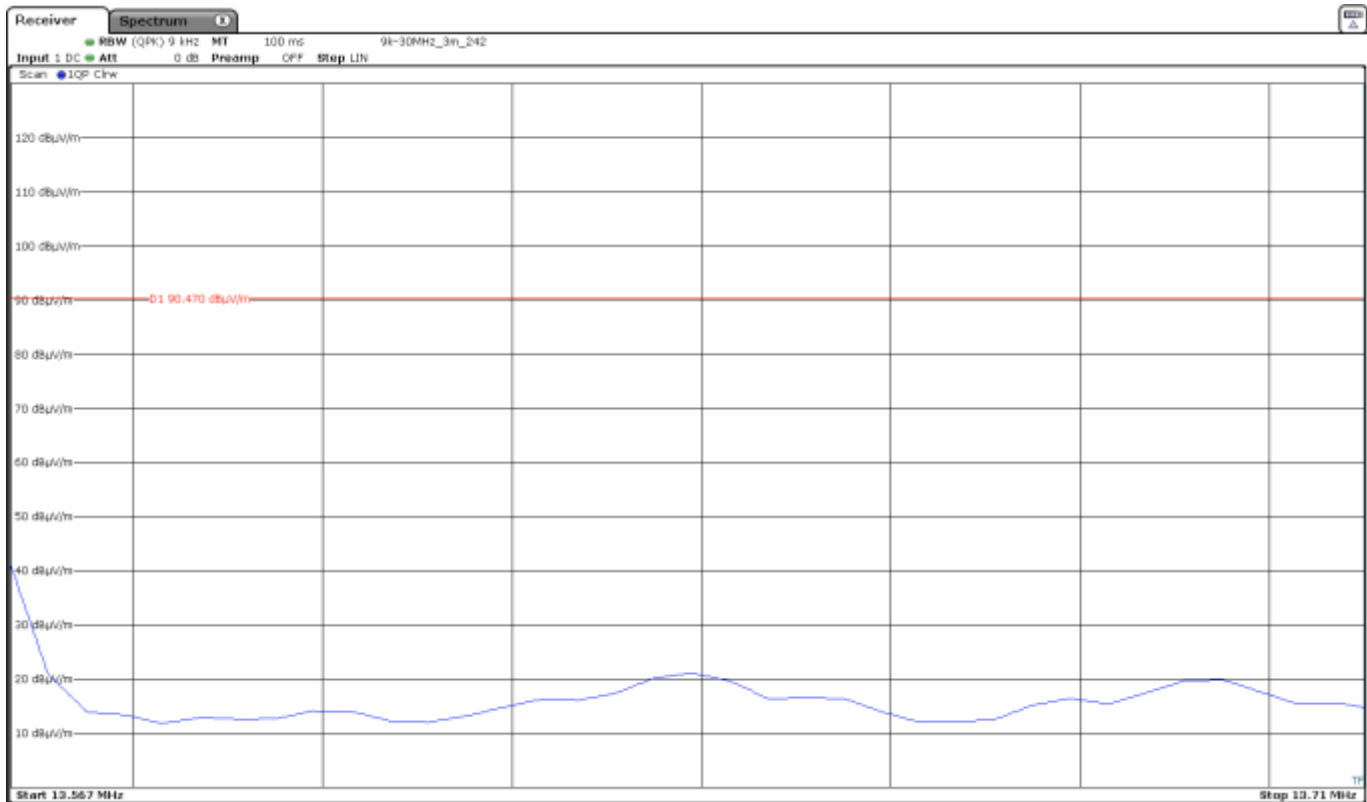

The limit shown in the above plot is extrapolated to 3 meters.

Frequency (MHz)	Maximum field strength (dBµV/m) measured at 3 m (quasi-peak detector)	Maximum field strength (dBµV/m) extrapolated to 30 m (40 dB/decade)
13.567	41.16	1.16
Measurement uncertainty (dB)	<±3.04	

Verdict: PASS

15.225 (c) / RSS-210 B.6 (a)(iii) Field Strength of Emissions within  
the band 13.110 MHz -13.410 MHz and 13.710 MHz - 14.010 MHz


SPECIFICATION:

Within the bands 13.110-13.410 MHz and 13.710-14.010 MHz, the field strength of any emissions shall not exceed 106 microvolts/meter (40.51 dBµV/m) at 30 meters.

RESULTS:

Measurement distance: 3 meters.

• Band 13.110 - 13.410 MHz:

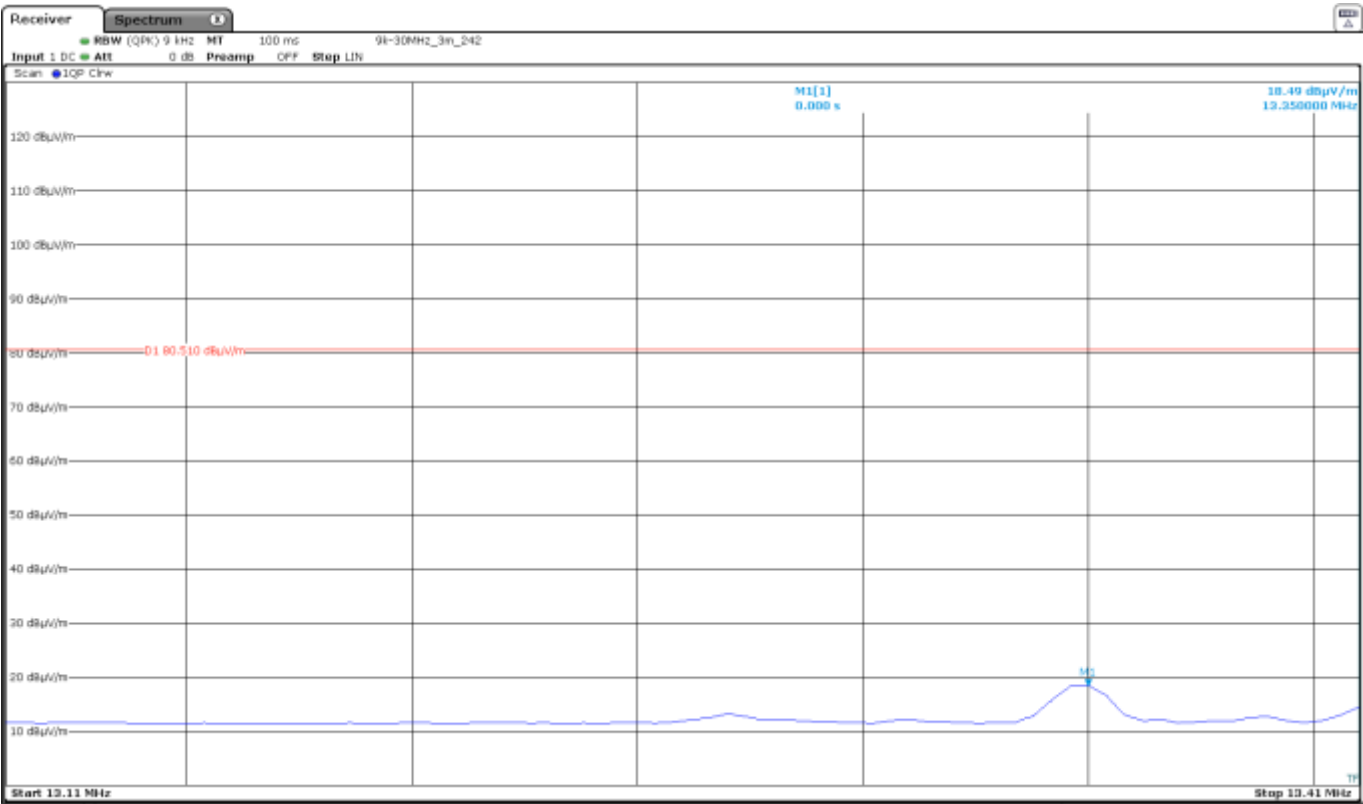


The limit shown in the above plot is extrapolated to 3 meters.

Frequency (MHz)	Maximum field strength (dBµV/m) measured at 3 m (quasi-peak detector)	Maximum field strength (dBµV/m) extrapolated to 30 m (40 dB/decade)
13.350	18.49	-21.51
Measurement uncertainty (dB)	<±3.04	

Verdict: PASS

• Band 13.710 - 14.010 MHz:

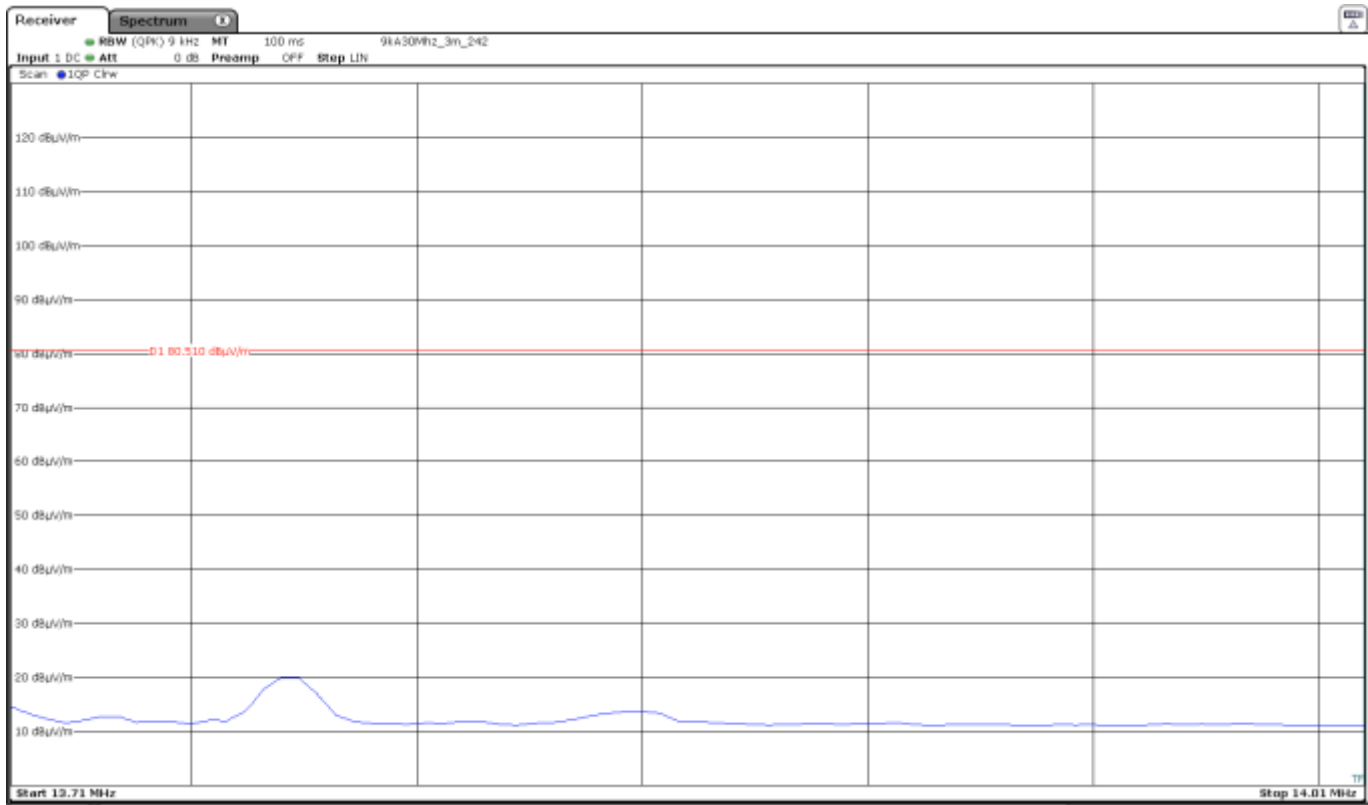

The limit shown in the above plot is extrapolated to 3 meters.

Frequency (MHz)	Maximum field strength (dBµV/m) measured at 3 m (quasi-peak detector)	Maximum field strength (dBµV/m) extrapolated to 30 m (40 dB/decade)
13.770	19.94	-20.06
Measurement uncertainty (dB)	±3.04	

Verdict: PASS



## 15.225 (d) / RSS-210 B.6 (a)(iv) Field Strength of Emissions outside of the band 13.110 MHz - 14.010 MHz

### SPECIFICATION:

Field strength of any emissions appearing outside of the band 13.110 MHz - 14.010 MHz band shall not exceed the general radiated emission limits in 15.209/RSS-Gen:

Frequency Range (MHz)	Field strength ( $\mu\text{V/m}$ )	Field strength ( $\text{dB}\mu\text{V/m}$ )	Measurement distance (m)
0.009-0.490	2400/F(kHz)	-	300
0.490-1.705	24000/F(kHz)	-	30
1.705 - 30.0	30	29.54	30
30 - 88	100	40	3
88 - 216	150	43.5	3
216 - 960	200	46	3
Above 960	500	54	3

### RESULTS:


All tests were performed in a semi-anechoic chamber at a distance of 3 m.

The spectrum was inspected from 9 kHz to 200 MHz searching for spurious signals.

The field strength is calculated by adding correction factor to the measured level from the spectrum analyzer. This correction factor includes antenna factor, cable loss and pre-amplifier gain.

### Frequency range 9 kHz - 30 MHz:

No spurious frequencies detected at less than 20 dB below the limit.

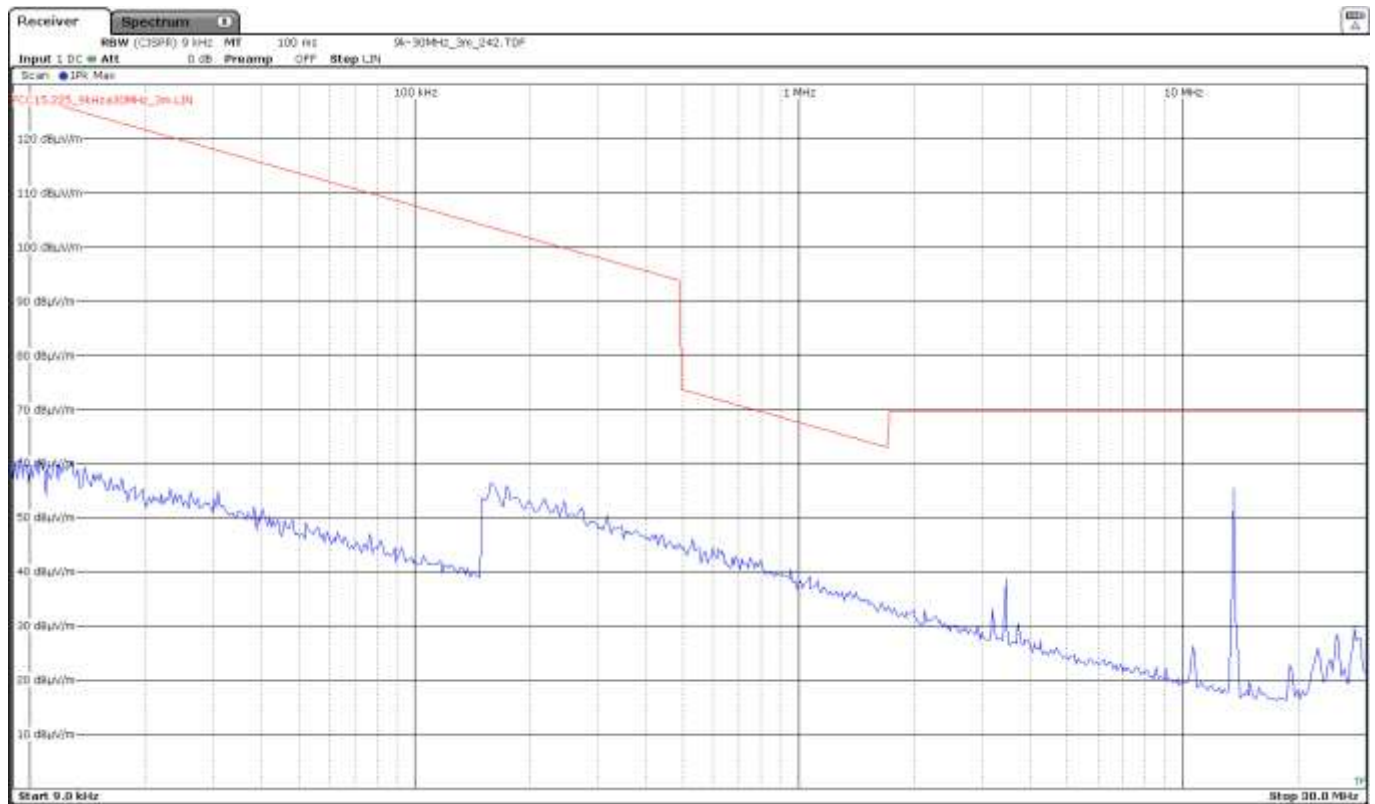

The limits shown in this plot are extrapolated to 3 m. The highest peak is the carrier frequency.

Resolution bandwidth:

200 Hz for  $9 \text{ kHz} \leq f \leq 150 \text{ kHz}$


9 kHz for  $150 \text{ kHz} \leq f \leq 30 \text{ MHz}$

Measurement Uncertainty (dB)  $< \pm 2.99$

Frequency range 30 - 200 MHz:

Spurious frequencies detected at less than 20 dB below the limit:

Spurious frequency (MHz)	Emission Level (dBµV/m)	Polarization	Detector	Measurement Uncertainty (dB)
32.0202	24.6	V	Quasi Peak	<± 4.99
39.4378	28.7	V	Quasi Peak	<± 4.99
49.3092	31.4	V	Quasi Peak	<± 4.99
83.2072	22.7	V	Quasi Peak	<± 4.99
125.0102	26.8	V	Quasi Peak	<± 4.99

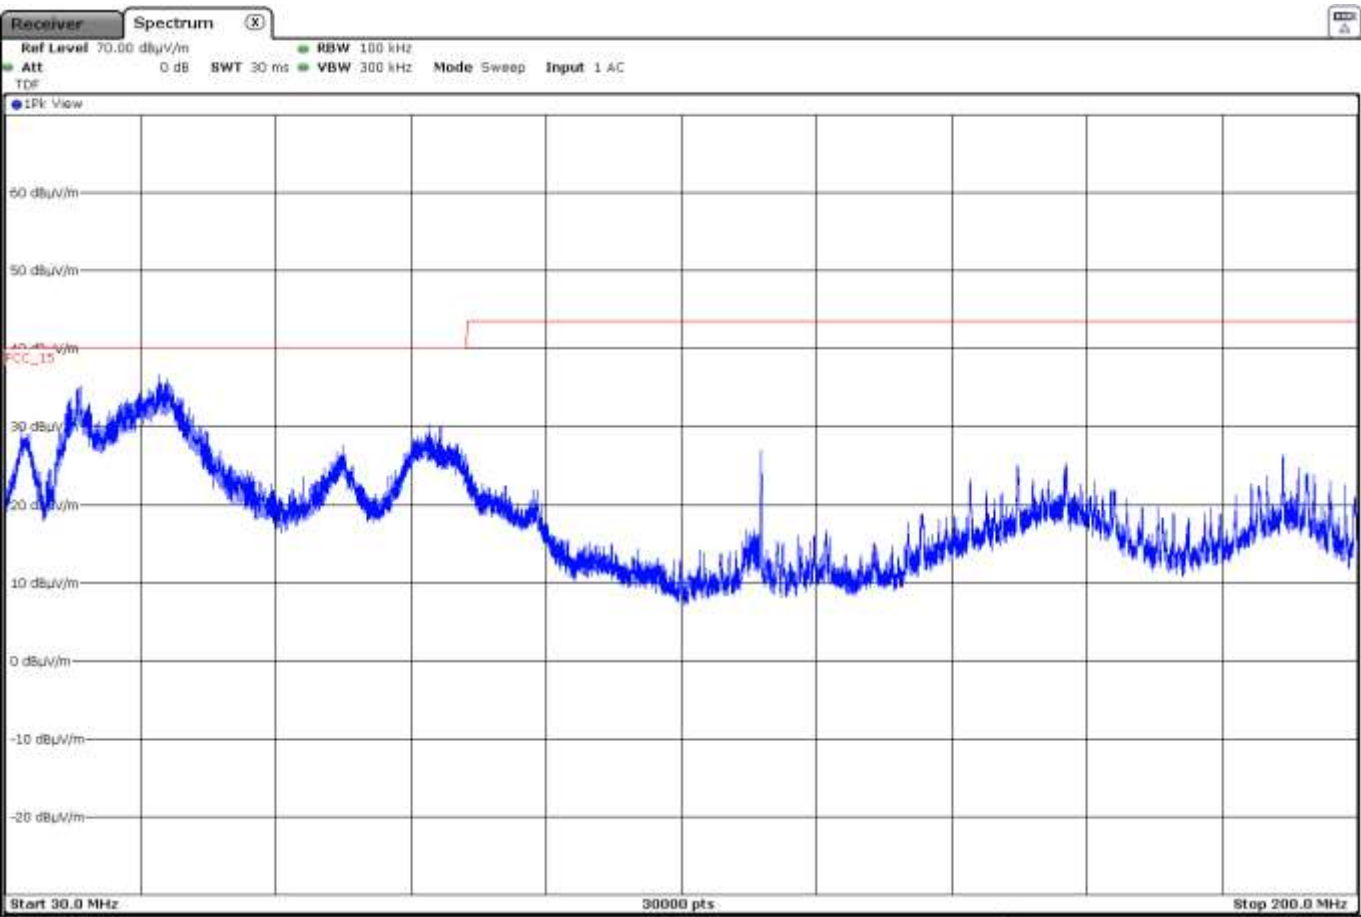

This plot shows the results of the scan using peak detector.

Verdict: PASS