

External Photos

The following figures (see Fig. 1, Fig. 2, Fig. 3, Fig. 4, Fig. 5, and Fig. 6) depict the assembled electro-mechanical components required to operate an HT34 RFID BTLE lock (HT RFID).



Figure 1. Front view of the HT RFID



Figure 2. Back view of the HT RFID.

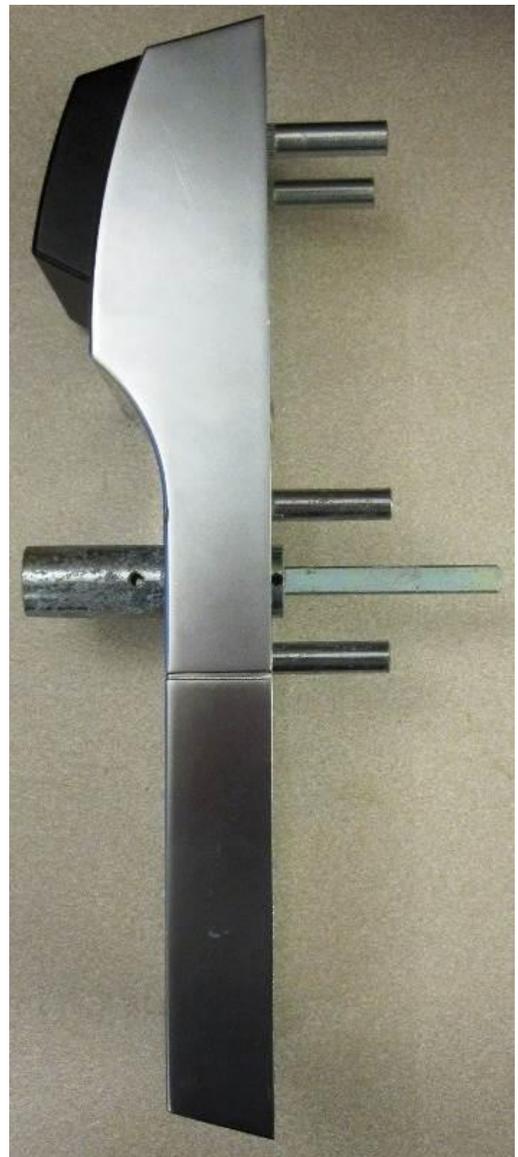


Figure 3. Right-hand view of the HT RFID.

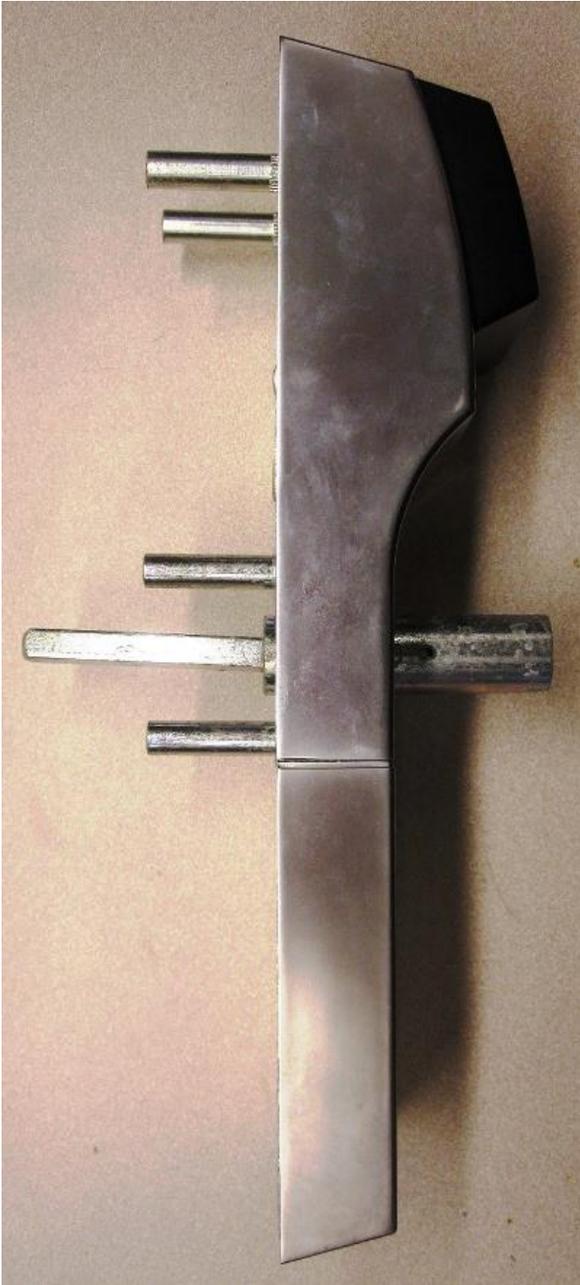


Figure 4. Left-hand view of the HT RFID.



Figure 5. The top of the HT RFID.

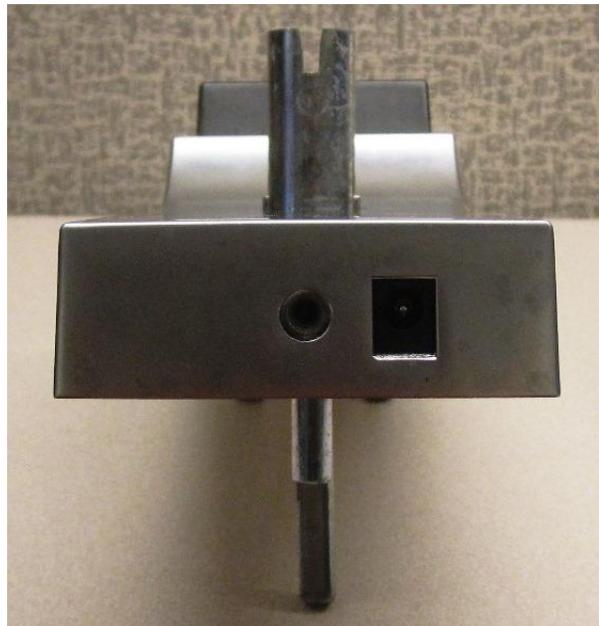


Figure 7. Front view of the HT RFID.