



**FCC PART 15C
TEST REPORT
No. I19Z61434-IOT03**

for

Samsung Electronics Co., Ltd.

Multi-band GSM/WCDMA/LTE phone with Bluetooth, WLAN

Model Name: SM-A207M/DS

FCC ID: ZCASMA207M

with

Hardware Version: MP1.0

Software Version: A207MUBU0ASG2

Issued Date: 2019-8-30



Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government.

Test Laboratory:

CTTL, Telecommunication Technology Labs, CAICT

No.52, Huayuan North Road, Haidian District, Beijing, P. R. China 100191.

Tel: +86(0)10-62304633-2512, Fax: +86(0)10-62304633-2504

Email: cttl_terminals@caict.ac.cn, website: www.caict.ac.cn

©Copyright. All rights reserved by CTTL.



REPORT HISTORY

Report Number	Revision	Description	Issue Date
I19Z61434-IOT03	Rev.0	1st edition	2019-8-30

CONTENTS

1. TEST LABORATORY.....	5
1.1. INTRODUCTION & ACCREDITATION.....	5
1.2. TESTING LOCATION.....	5
1.3. TESTING ENVIRONMENT.....	6
1.4. PROJECT DATA.....	6
1.5. SIGNATURE.....	6
2. CLIENT INFORMATION.....	7
2.1. APPLICANT INFORMATION.....	7
2.2. MANUFACTURER INFORMATION.....	7
3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE).....	8
3.1. ABOUT EUT.....	8
3.2. INTERNAL IDENTIFICATION OF EUT.....	8
3.3. INTERNAL IDENTIFICATION OF AE.....	8
3.4. NORMAL ACCESSORY SETTING.....	9
3.5. GENERAL DESCRIPTION.....	9
4. REFERENCE DOCUMENTS.....	10
4.1. DOCUMENTS SUPPLIED BY APPLICANT.....	10
4.2. REFERENCE DOCUMENTS FOR TESTING.....	10
5. TEST RESULTS.....	11
5.1. SUMMARY OF TEST RESULTS.....	11
5.2. STATEMENTS.....	11
5.3. EXPLANATION OF RE-USE OF TEST DATA.....	11
6. TEST FACILITIES UTILIZED.....	12
7. MEASUREMENT UNCERTAINTY.....	13
7.1. PEAK OUTPUT POWER - CONDUCTED.....	13
7.2. FREQUENCY BAND EDGES.....	13
7.3. TRANSMITTER SPURIOUS EMISSION - CONDUCTED.....	13
7.4. TRANSMITTER SPURIOUS EMISSION - RADIATED.....	13
7.5. TIME OF OCCUPANCY (DWELL TIME).....	13
7.6. 20dB BANDWIDTH.....	13
7.7. CARRIER FREQUENCY SEPARATION.....	14
7.8. AC POWERLINE CONDUCTED EMISSION.....	14
ANNEX A: DETAILED TEST RESULTS.....	15
A.1. MEASUREMENT METHOD.....	15
A.2. PEAK OUTPUT POWER – CONDUCTED.....	16
A.3. FREQUENCY BAND EDGES – CONDUCTED.....	18
A.4. TRANSMITTER SPURIOUS EMISSION - CONDUCTED.....	25



A.5. TRANSMITTER SPURIOUS EMISSION - RADIATED.....	50
A.6. TIME OF OCCUPANCY (DWEIL TIME).....	60
A.7. 20dB BANDWIDTH.....	70
A.8. CARRIER FREQUENCY SEPARATION.....	76
A.9. NUMBER OF HOPPING CHANNELS.....	79
A.10. AC POWERLINE CONDUCTED EMISSION.....	83
ANNEX E: ACCREDITATION CERTIFICATE.....	89

1. Test Laboratory

1.1. Introduction &Accreditation

Telecommunication Technology Labs, CAICT is an ISO/IEC 17025:2005 accredited test laboratory under NATIONAL VOLUNTARY LABORATORY ACCREDITATION PROGRAM (NVLAP) with lab code 600118-0, and is also an FCC accredited test laboratory (CN5017), and ISED accredited test laboratory (CN0066). The detail accreditation scope can be found on NVLAP website.

1.2. Testing Location

Conducted testing Location: CTTL(huayuan North Road)

Address: No. 52, Huayuan North Road, Haidian District, Beijing,
P. R. China 100191

Radiated testing Location: CTTL(BDA)

Address: No.18A, Kangding Street, Beijing Economic-Technology
Development Area, Beijing, P. R. China 100176


1.3. Testing Environment

Normal Temperature: 15-35℃
Relative Humidity: 20-75%

1.4. Project data

Testing Start Date: 2019-7-1
Testing End Date: 2019-8-30

1.5. Signature



Wu Le
(Prepared this test report)



Sun Zhenyu
(Reviewed this test report)



Li Zhuofang
(Approved this test report)



2. Client Information

2.1. Applicant Information

Company Name: Samsung Electronics Co., Ltd.
Address /Post: 19 Chapin Rd.,Building D Pine Brook, NJ 07058
City: /
Postal Code: /
Country: /
Telephone: /
Fax: /

2.2. Manufacturer Information

Company Name: Jiaxing Yongrui Electron Technology Co., Ltd.
Address /Post: NO.777 Yazhong Road, Daqiao Town, Nanhu District, Jiaxing
City ,Zhejiang
City: Zhejiang
Postal Code: /
Country: China
Telephone: /
Fax: /

3. Equipment Under Test (EUT) and Ancillary Equipment (AE)

3.1. About EUT

Description	Multi-band GSM/WCDMA/LTE phone with Bluetooth, WLAN
Model Name	SM-A207M/DS
FCC ID	ZCASMA207M
Frequency Band	ISM 2400MHz~2483.5MHz
Type of Modulation	GFSK/π/4 DQPSK/8DPSK
Number of Channels	79
Power Supply	3.8V DC by Battery

3.2. Internal Identification of EUT

EUT ID*	SN or IMEI	HW Version	SW Version
EUT4	358242100010269/ 358242100010267	MP1.0	A207MUBU0ASG2
EUT5	358242100010905/ 358243100010903	MP1.0	A207MUBU0ASG2

*EUT ID: is used to identify the test sample in the lab internally.

3.3. Internal Identification of AE

AE1	Battery	/	/
AE3	Charger	/	/
AE4	Charger	/	/
AE6	USB Cable	/	/
AE7	Headset	/	/
AE8	Charger	/	/
AE9	Charger	/	/
AE10	Charger	/	/
AE1			
Model	SWD-WT-N6		
Manufacturer	Sunwoda		
Capacitance	/		
Nominal voltage	/		
AE3			
Model	EP-TA200(JWE)		
Manufacturer	Samsung Electronics Co.,Ltd		
Length of cable	/		

Model	EP-TA200(JWE)
Manufacturer	Samsung Electronics Co.,Ltd
Length of cable	/
AE6	
Model	GH39-01999A
Manufacturer	RFTECH
Length of cable	/
AE7	
Model	GH59-15054A
Manufacturer	WATA
Length of cable	/
AE8	
Model	EP-TA200(JWS)
Manufacturer	Samsung Electronics Co.,Ltd
Length of cable	/
AE9	
Model	EP-TA200(JWS)
Manufacturer	Samsung Electronics Co.,Ltd
Length of cable	/
AE10	
Model	EP-TA200(RWS)
Manufacturer	Samsung Electronics Co.,Ltd
Length of cable	/

*AE ID: is used to identify the test sample in the lab internally.

3.4. Normal Accessory setting

Fully charged battery should be used during the test.

3.5. General Description

The Equipment Under Test (EUT) is a model of Multi-band GSM/WCDMA/LTE phone with Bluetooth, WLAN with integrated antenna. It consists of normal options: lithium battery, charger. Manual and specifications of the EUT were provided to fulfill the test. Samples undergoing test were selected by the Client.

4. Reference Documents

4.1. Documents supplied by applicant

EUT feature information is supplied by the client or manufacturer, which is the basis of testing.

4.2. Reference Documents for testing

The following documents listed in this section are referred for testing.

Reference	Title	Version
FCC Part15	FCC CFR 47, Part 15, Subpart C:	2018
	15.205 Restricted bands of operation;	
	15.209 Radiated emission limits, general requirements;	
ANSI C63.10	15.247 Operation within the bands 902–928MHz, 2400–2483.5 MHz, and 5725–5850 MHz.	June,2013
	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices	

5. Test Results

5.1. Summary of Test Results

Abbreviations used in this clause:

- P** Pass, The EUT complies with the essential requirements in the standard.
- F** Fail, The EUT does not comply with the essential requirements in the standard
- NA** Not Applicable, The test was not applicable
- NP** Not Performed, The test was not performed by CTTL
- R** Re-use test data from basic model report.

SUMMARY OF MEASUREMENT RESULTS	Sub-clause	Verdict
Peak Output Power - Conducted	15.247 (b)(1)	P
Frequency Band Edges	15.247 (d)	R
Transmitter Spurious Emission - Conducted	15.247 (d)	R
Transmitter Spurious Emission - Radiated	15.247, 15.205, 15.209	R
Time of Occupancy (Dwell Time)	15.247 (a) (1)(iii)	R
20dB Bandwidth	15.247 (a)(1)	R
Carrier Frequency Separation	15.247 (a)(1)	R
Number of hopping channels	15.247 (a)(b)(iii)	R
AC Powerline Conducted Emission	15.107, 15.207	P

Please refer to **ANNEX A** for detail.

The measurement is made according to ANSI C63.10.

5.2. Statements

CTTL has evaluated the test cases requested by the applicant /manufacturer as listed in section 5.1 of this report for the EUT specified in section 3 according to the standards or reference documents listed in section 4.2

5.3. Explanation of re-use of test data

The Equipment Under Test (EUT) model SM-A207M/DS(FCC ID: ZCASMA207M) is a variant product of SM-A207F/DS(FCC ID: ZCASMA207F), according to the declaration of changes provided by the applicant and FCC KDB publication 484596 D01, spot check measurements(Peak Output Power-Conducted and AC Powerline Conducted Emission) were performed on this device, other test results are derived from test report No. I19Z61198-IOT03. Please refer Annex A for detail spot check verification data and reference data. the spot check test results are consistent with basic model.

For detail differences between two models please refer the Declaration of Changes document.

Test Facilities Utilized

Conducted test system

No.	Equipment	Model	Serial Number	Manufacturer	Calibration Period	Calibration Due date
1	Vector Signal Analyzer	FSQ26	200136	Rohde & Schwarz	1 year	2019-11-21
2	Bluetooth Tester	CBT32	100649	Rohde & Schwarz	1 year	2019-10-28
3	LISN	ESH3-Z5	825562/028	Rohde & Schwarz	1 year	2020-08-26
4	Test Receiver	ESCI	100766	Rohde & Schwarz	1 year	2020-03-20
5	Base Station Simulator	CMW500	159408	R&S	1 year	2020-03-03
6	Shielding Room	S81	/	ETS-Lindgren	/	/

Radiated emission test system

No.	Equipment	Model	Serial Number	Manufacturer	Calibration Period	Calibration Due date
1	Test Receiver	ESU26	100376	Rohde & Schwarz	1 year	2019-11-27
2	BiLog Antenna	VULB9163	9163-482	Schwarzbeck	1 year	2019-09-21
3	Dual-Ridge Waveguide Horn Antenna	3117	00139065	ETS-Lindgren	1 year	2019-10-15
4	Dual-Ridge Waveguide Horn Antenna	3116	2663	ETS-Lindgren	1 year	2020-06-18
5	Vector Signal Analyzer	FSV40	101047	Rohde & Schwarz	1 year	2020-05-16
6	Base Station Simulator	CMW500	159408	R&S	1 year	2020-03-03

6. Measurement Uncertainty

6.1. Peak Output Power - Conducted

Measurement Uncertainty:

Measurement Uncertainty (k=2)	0.66dB
-------------------------------	--------

6.2. Frequency Band Edges

Measurement Uncertainty:

Measurement Uncertainty (k=2)	0.66dB
-------------------------------	--------

6.3. Transmitter Spurious Emission - Conducted

Measurement Uncertainty:

Frequency Range	Uncertainty (k=2)
30 MHz ~ 8 GHz	1.22dB
8 GHz ~ 12.75 GHz	1.51dB
12.7GHz ~ 26 GHz	1.51dB

6.4. Transmitter Spurious Emission - Radiated

Measurement Uncertainty:

Frequency Range	Uncertainty (k=2)
< 1 GHz	5.40dB
> 1 GHz	4.32dB

6.5. Time of Occupancy (Dwell Time)

Measurement Uncertainty:

Measurement Uncertainty (k=2)	0.88ms
-------------------------------	--------

6.6. 20dB Bandwidth

Measurement Uncertainty:

Measurement Uncertainty (k=2)	61.936Hz
-------------------------------	----------

6.7. Carrier Frequency Separation

Measurement Uncertainty:

Measurement Uncertainty (k=2)	61.936Hz
-------------------------------	----------

6.8. AC Powerline Conducted Emission

Measurement Uncertainty:

Measurement Uncertainty (k=2)	3.10dB
-------------------------------	--------


ANNEX A: Detailed Test Results

A.1. Measurement Method

A.1.1. Conducted Measurements

The measurement is made according to ANSI C63.10.

- 1). Connect the EUT to the test system correctly.
- 2). Set the EUT to the required work mode (Transmitter, receiver or transmitter & receiver).
- 3). Set the EUT to the required channel.
- 4). Set the EUT hopping mode (hopping or hopping off).
- 5). Set the spectrum analyzer to start measurement.
- 6). Record the values. Vector Signal Analyzer

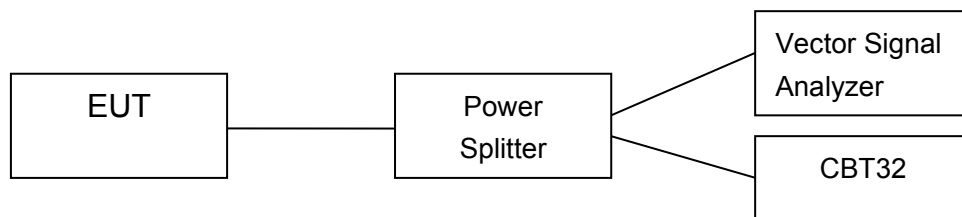

A.1.2. Radiated Emission Measurements


The measurement is made according to ANSI C63.10

The radiated emission test is performed in semi-anechoic chamber. The distance from the EUT to the reference point of measurement antenna is 3m. The test is carried out on both vertical and horizontal polarization and only maximization result of both polarizations is kept. During the test, the turntable is rotated 360° and the measurement antenna is moved from 1m to 4m to get the maximization result.

In the case of radiated emission, the used settings are as follows,

Sweep frequency from 30 MHz to 1GHz, RBW = 100 kHz, VBW = 300 kHz;

Sweep frequency from 1 GHz to 26GHz, RBW = 1MHz, VBW = 1MHz;

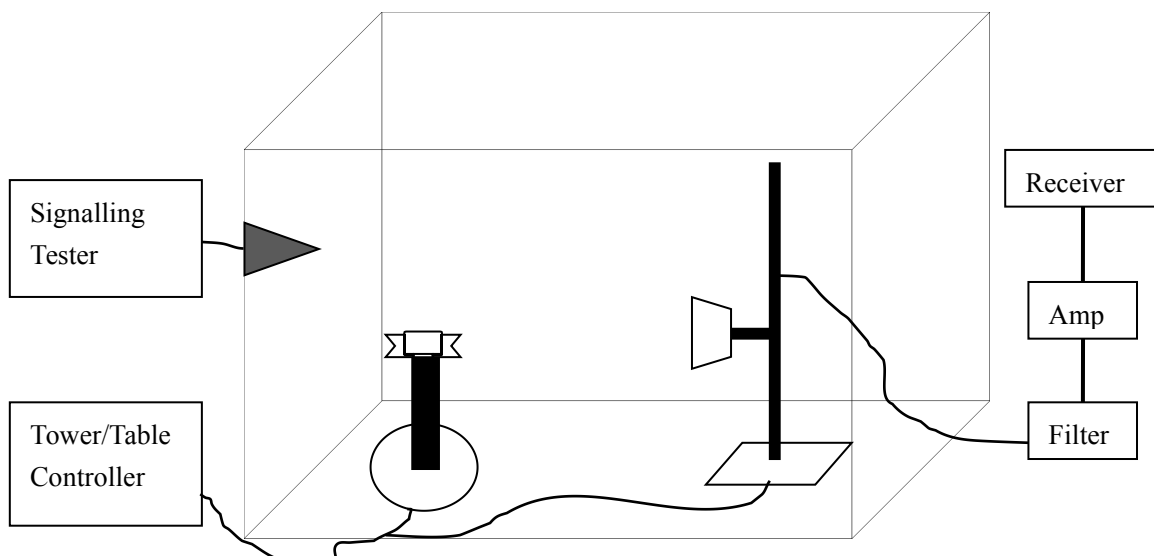

A.2. Peak Output Power – Conducted

Method of Measurement: See ANSI C63.10-clause 7.8.5

a) Use the following spectrum analyzer settings:

- Span: 6MHz
- RBW: 3MHz
- VBW: 3MHz
- Sweep time: 2.5ms
- Detector function: peak
- Trace: max hold

b) Allow trace to stabilize.

c) Use the marker-to-peak function to set the marker to the peak of the emission.

d) The indicated level is the peak output power.

Measurement Limit:

Standard	Limit (dBm)
FCC Part 15.247(b)(1)	< 30

Spot check Measurement Results:

For GFSK

Channel	Ch 0 2402 MHz	Ch 39 2441 MHz	Ch 78 2480 MHz	Conclusion
Peak Conducted Output Power (dBm)	7.36	8.65	7.57	P

For $\pi/4$ DQPSK

Channel	Ch 0 2402 MHz	Ch 39 2441 MHz	Ch 78 2480 MHz	Conclusion
Peak Conducted Output Power (dBm)	8.01	9.43	8.33	P

For 8DPSK

Channel	Ch 0 2402 MHz	Ch 39 2441 MHz	Ch 78 2480 MHz	Conclusion
Peak Conducted Output Power (dBm)	8.51	9.82	8.68	P

Conclusion: PASS

Reference Measurement Results from basic model:**For GFSK**

Channel	Ch 0 2402 MHz	Ch 39 2441 MHz	Ch 78 2480 MHz	Conclusion
Peak Conducted Output Power (dBm)	7.09	8.39	7.15	P

For $\pi/4$ DQPSK

Channel	Ch 0 2402 MHz	Ch 39 2441 MHz	Ch 78 2480 MHz	Conclusion
Peak Conducted Output Power (dBm)	7.99	9.17	7.99	P

For 8DPSK

Channel	Ch 0 2402 MHz	Ch 39 2441 MHz	Ch 78 2480 MHz	Conclusion
Peak Conducted Output Power (dBm)	8.32	9.60	8.29	P

Conclusion: PASS

A.3. Frequency Band Edges – Conducted

Method of Measurement: See ANSI C63.10-clause 7.8.6

Connect the spectrum analyzer to the EUT using an appropriate RF cable connected to the EUT output. Configure the spectrum analyzer settings as described below (be sure to enter all losses between the unlicensed wireless device output and the spectrum analyzer).

- Span: 10 MHz
- Resolution Bandwidth: 100 kHz
- Video Bandwidth: 300 kHz
- Sweep Time:Auto
- Detector: Peak
- Trace: max hold

Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest channel.

Observe the stored trace and measure the amplitude delta between the peak of the fundamental and the peak of the band-edge emission. This is not an absolute field strength measurement; it is only a relative measurement to determine the amount by which the emission drops at the band edge relative to the highest fundamental emission level.

Measurement Limit:

Standard	Limit (dBc)
FCC 47 CFR Part 15.247 (d)	< -20

Measurement Result:

For GFSK

Channel	Hopping	Band Edge Power (dBc)		Conclusion
0	Hopping OFF	Fig.1	-55.67	P
	Hopping ON	Fig.2	-65.69	P
78	Hopping OFF	Fig.3	-65.39	P
	Hopping ON	Fig.4	-65.36	P

For $\pi/4$ DQPSK

Channel	Hopping	Band Edge Power (dBc)		Conclusion
0	Hopping OFF	Fig.5	-59.63	P
	Hopping ON	Fig.6	-64.71	P
78	Hopping OFF	Fig.7	-64.86	P
	Hopping ON	Fig.8	-64.06	P

For 8DPSK

Channel	Hopping	Band Edge Power (dBc)		Conclusion
0	Hopping OFF	Fig.9	-59.32	P

	Hopping ON	Fig.10	-65.57	P
78	Hopping OFF	Fig.11	-64.66	P
	Hopping ON	Fig.12	-64.94	P

Conclusion: PASS

Test graphs as below

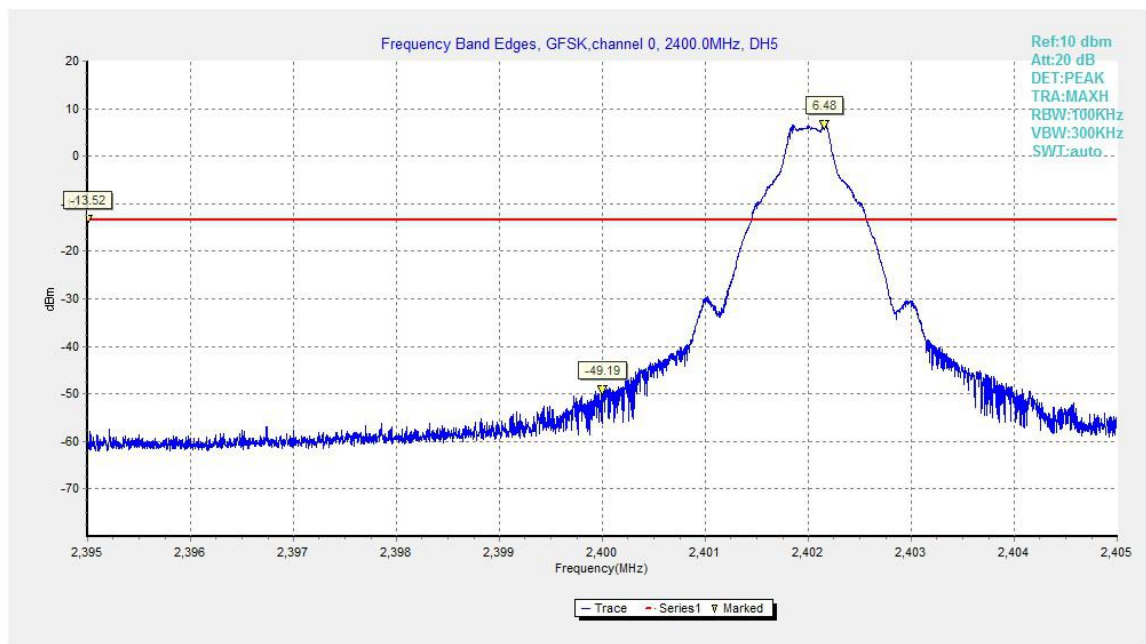


Fig.1. Frequency Band Edges: GFSK, Channel 0, Hopping Off

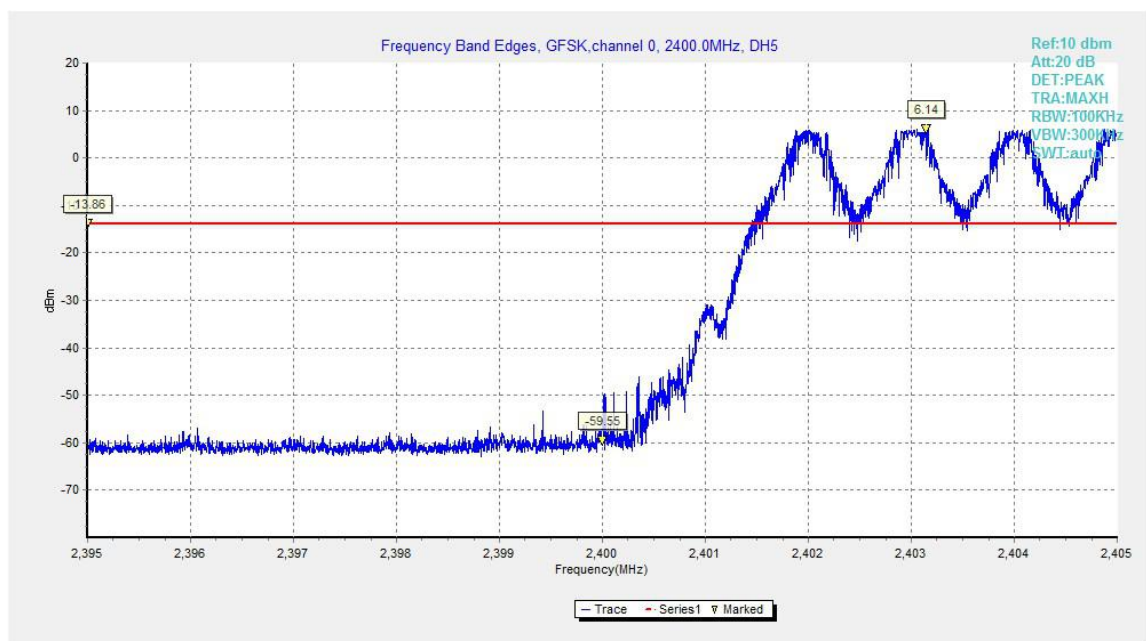


Fig.2. Frequency Band Edges: GFSK, Channel 0, Hopping On

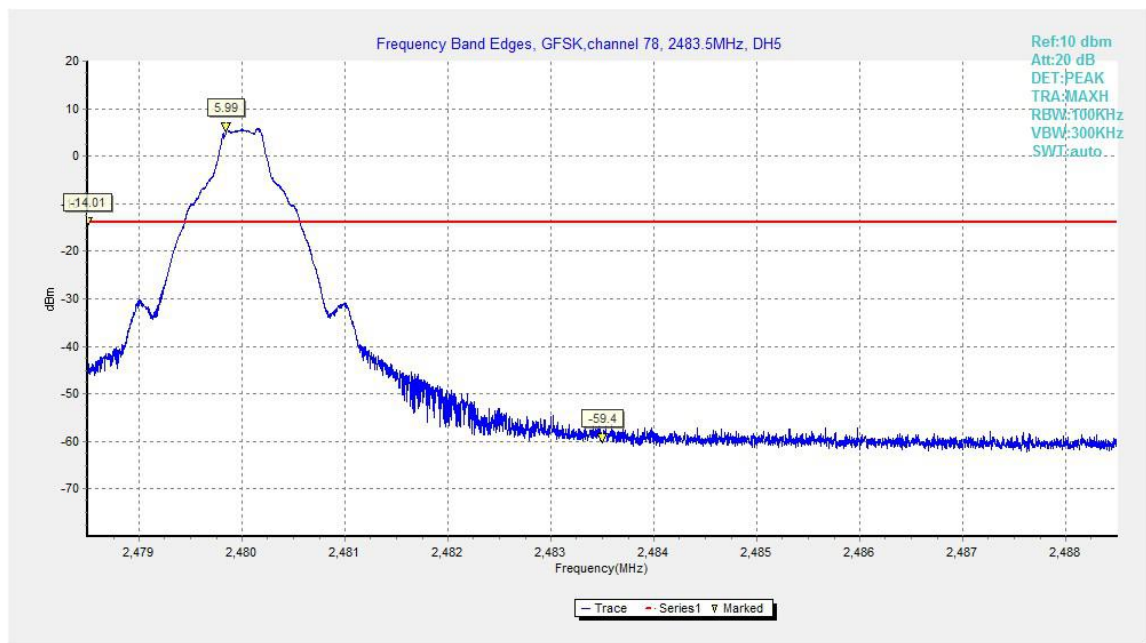


Fig.3. Frequency Band Edges: GFSK, Channel 78, Hopping Off

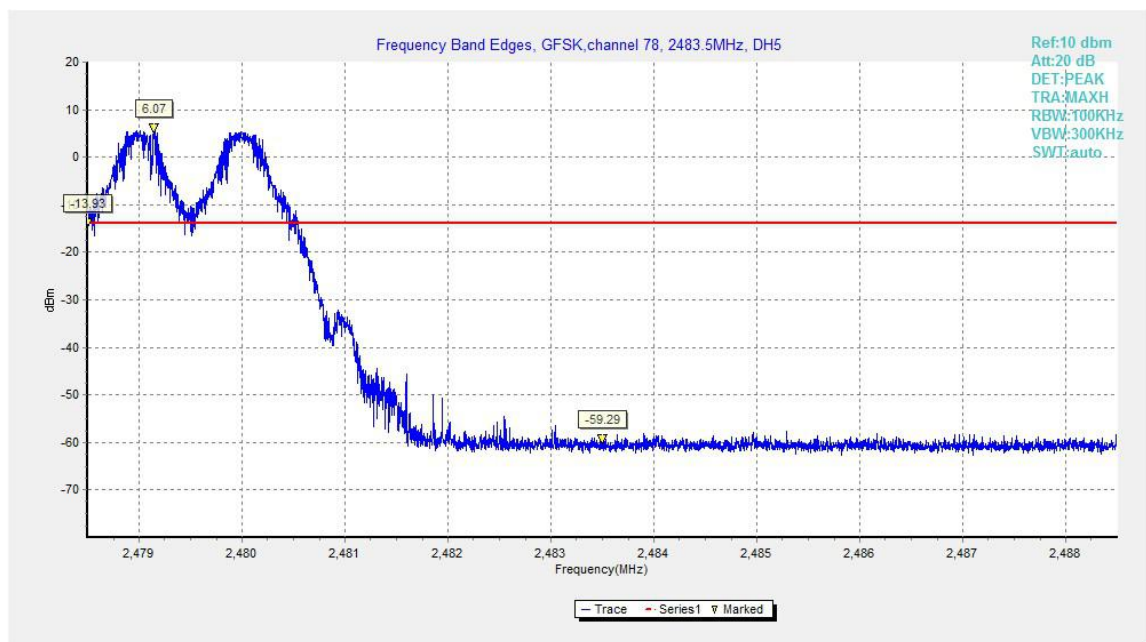


Fig.4. Frequency Band Edges: GFSK, Channel 78, Hopping On

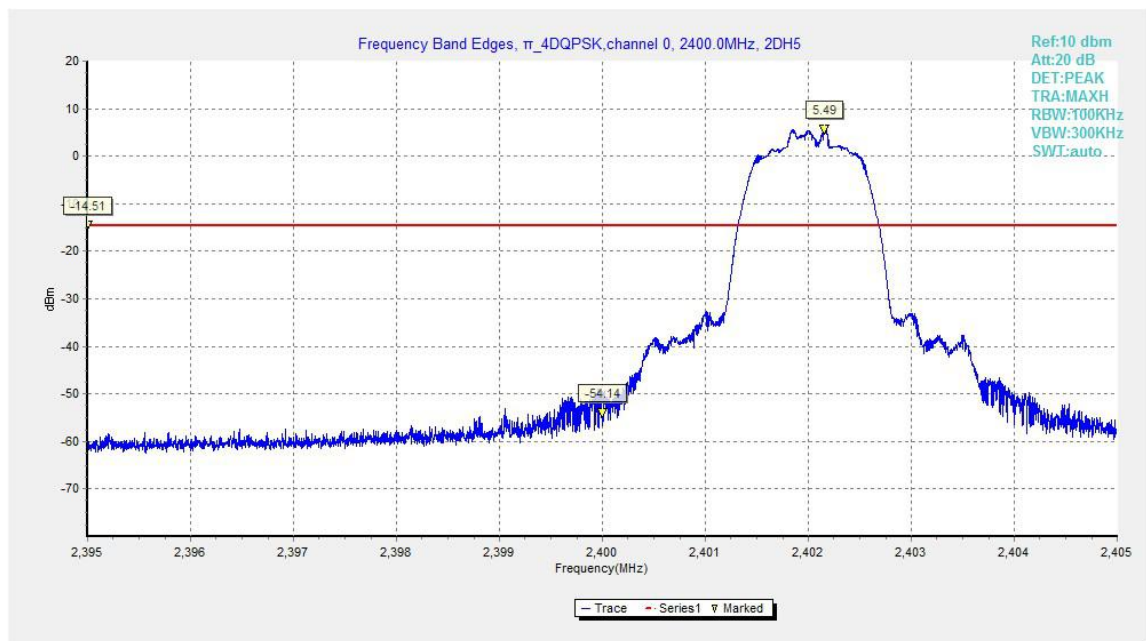


Fig.5. Frequency Band Edges: $\pi/4$ DQPSK, Channel 0, Hopping Off

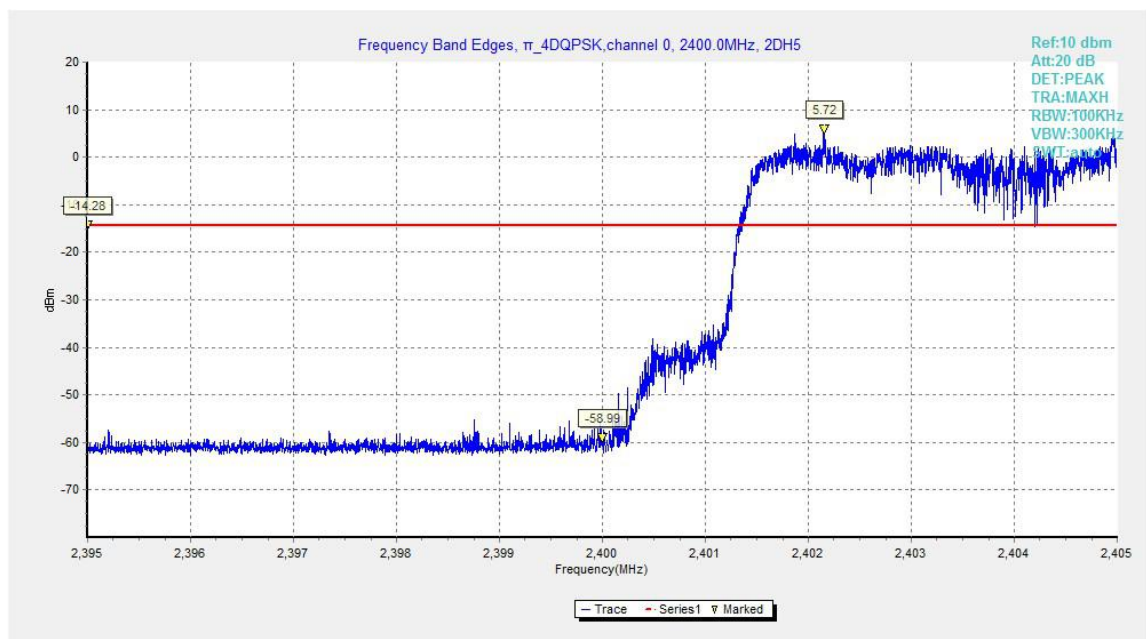


Fig.6. Frequency Band Edges: $\pi/4$ DQPSK, Channel 0, Hopping On

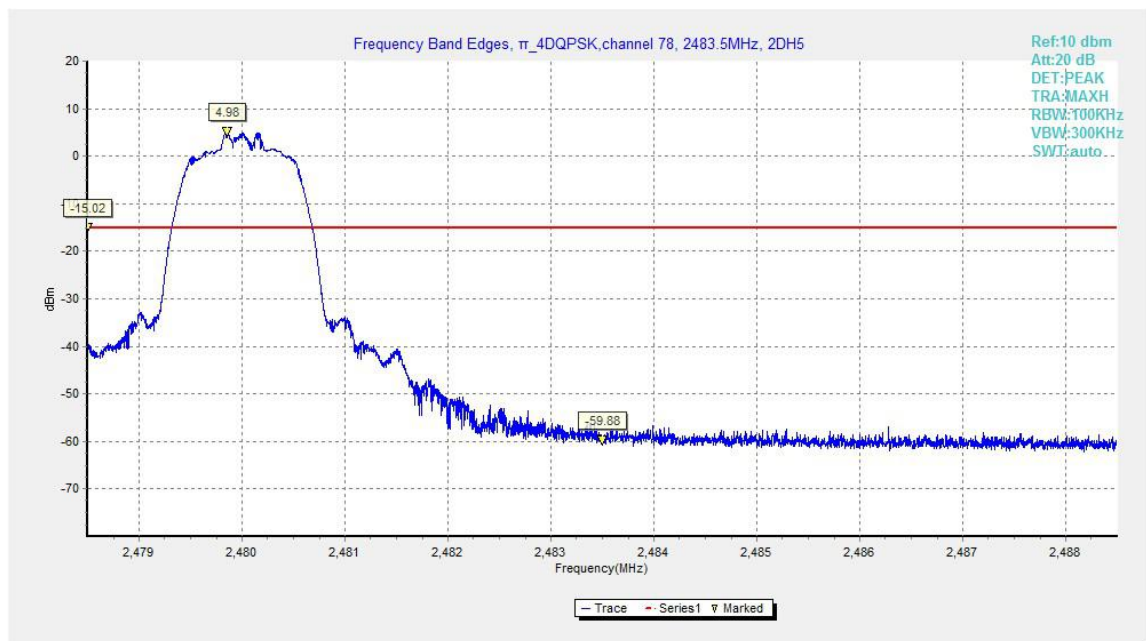


Fig.7. Frequency Band Edges: $\pi/4$ DQPSK, Channel 78, Hopping Off

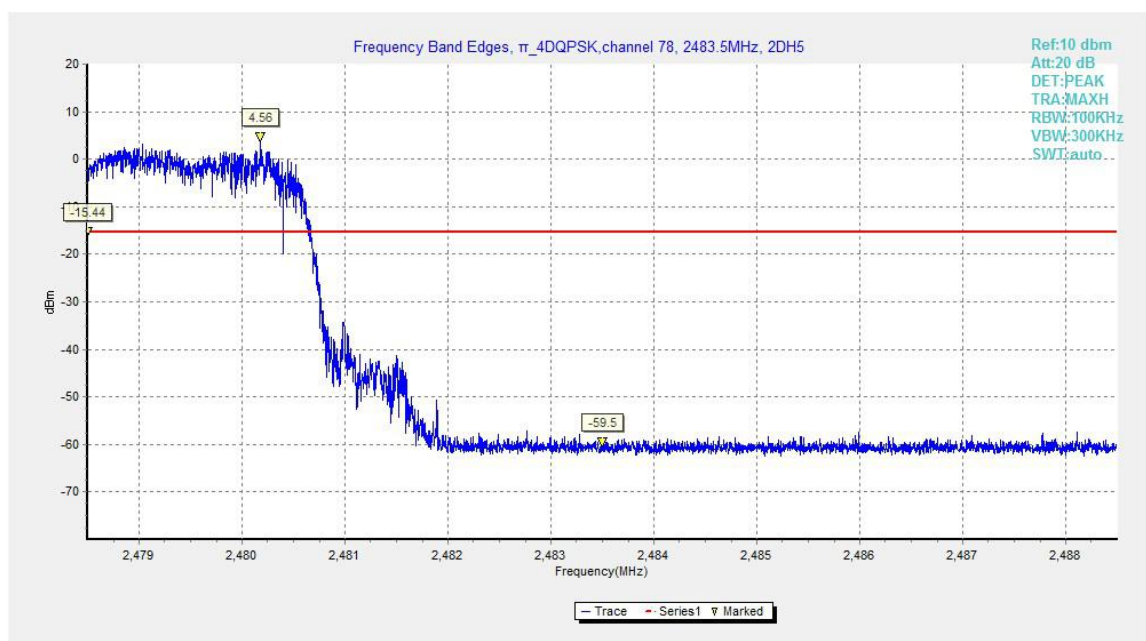


Fig.8. Frequency Band Edges: $\pi/4$ DQPSK, Channel 78, Hopping On

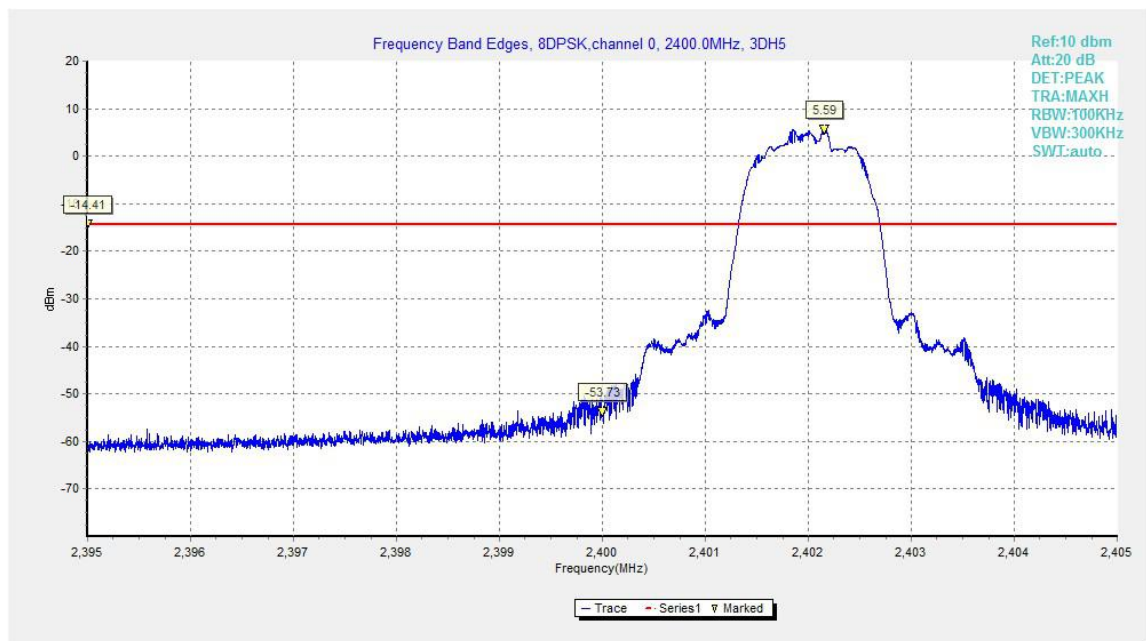


Fig.9. Frequency Band Edges: 8DPSK, Channel 0, Hopping Off

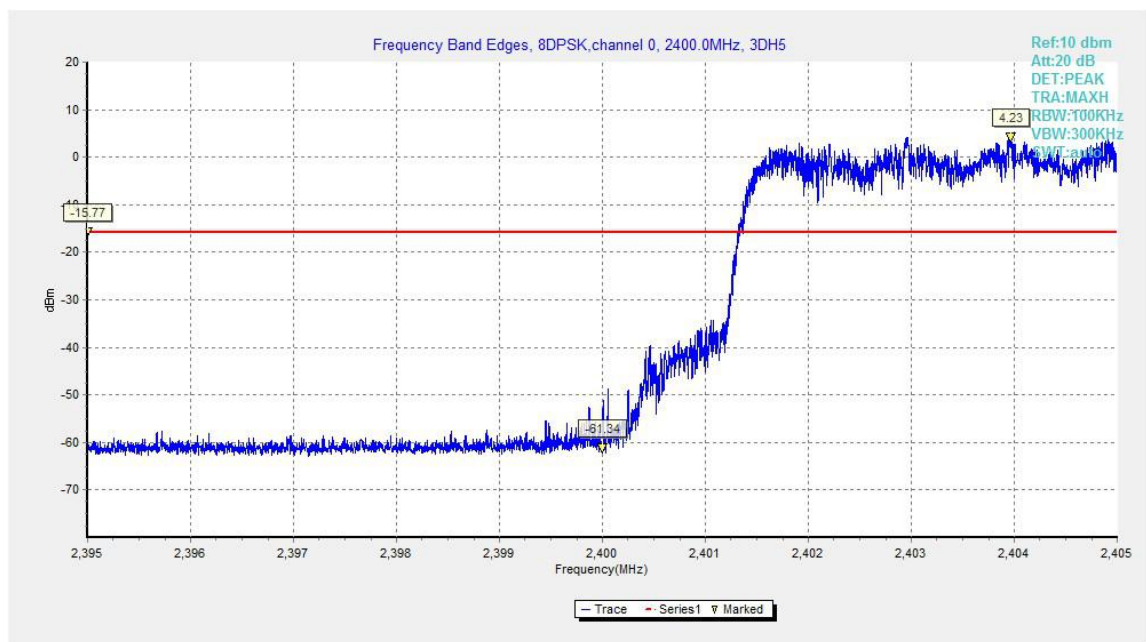


Fig.10. Frequency Band Edges: 8DPSK, Channel 0, Hopping On

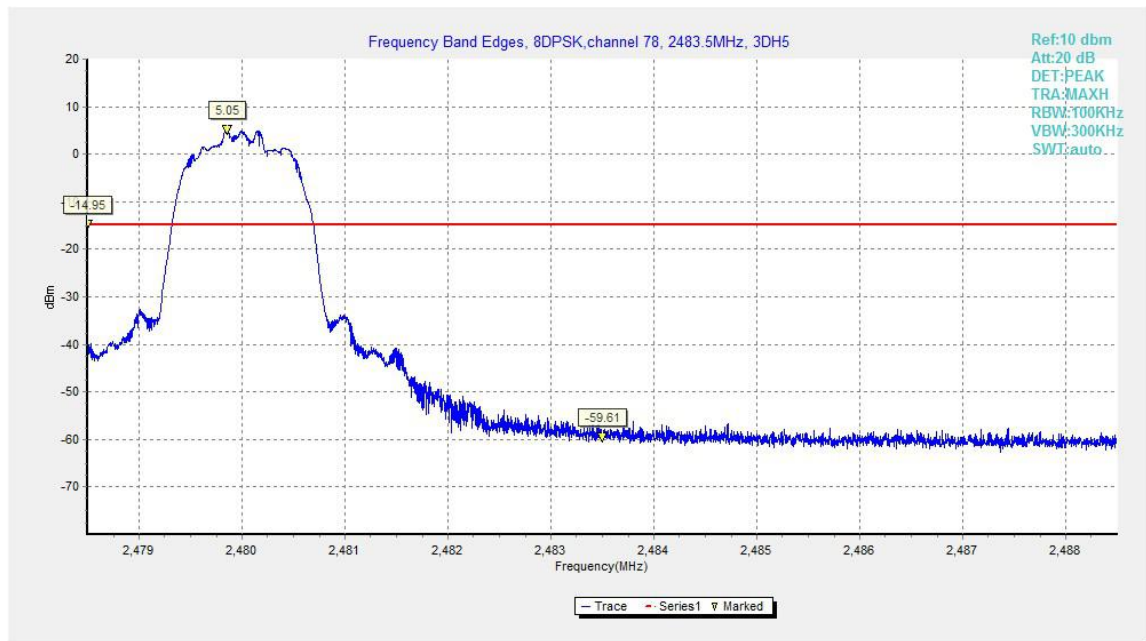


Fig.11. Frequency Band Edges: 8DPSK, Channel 78, Hopping Off

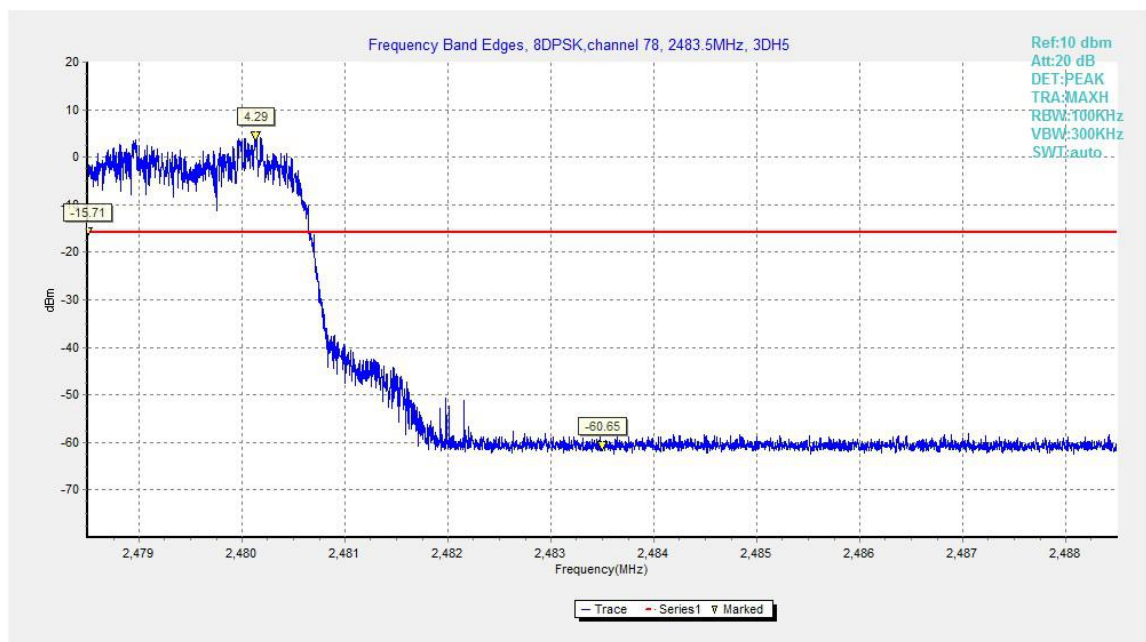


Fig.12. Frequency Band Edges: 8DPSK, Channel 78, Hopping On

A.4. Transmitter Spurious Emission - Conducted

Method of Measurement: See ANSI C63.10-clause 7.8.8

Measurement Procedure – Reference Level

1. Set the RBW = 100 kHz.
2. Set the VBW = 300 kHz.
3. Set the span to 5-30 % greater than the EBW.
4. Detector = peak.
5. Sweep time = auto couple.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.
8. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW. Next, determine the power in 100 kHz band segments outside of the authorized frequency band using the following measurement:

Measurement Procedure - Unwanted Emissions

1. Set RBW = 100 kHz.
2. Set VBW = 300 kHz.
3. Set span to encompass the spectrum to be examined.
4. Detector = peak.
5. Trace Mode = max hold.
6. Sweep = auto couple.
7. Allow the trace to stabilize (this may take some time, depending on the extent of the span).

Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) is attenuated by at least the minimum requirements specified above.

Measurement Limit:

Standard	Limit
FCC 47 CFR Part 15.247 (d)	20dB below peak output power in 100 kHz bandwidth

Measurement Results:

For GFSK

Channel	Frequency Range	Test Results	Conclusion
---------	-----------------	--------------	------------

Ch 0 2402 MHz	Center Frequency	Fig.13	P
	30 MHz ~ 1 GHz	Fig.14	P
	1 GHz ~ 3 GHz	Fig.15	P
	3 GHz ~ 10 GHz	Fig.16	P
	10 GHz ~ 26 GHz	Fig.17	P
Ch 39 2441 MHz	Center Frequency	Fig.18	P
	30 MHz ~ 1 GHz	Fig.19	P
	1 GHz ~ 3 GHz	Fig.20	P
	3 GHz ~ 10 GHz	Fig.21	P
	10 GHz ~ 26 GHz	Fig.22	P
Ch 78 2480 MHz	Center Frequency	Fig.23	P
	30 MHz ~ 1 GHz	Fig.24	P
	1 GHz ~ 3 GHz	Fig.25	P
	3 GHz ~ 10 GHz	Fig.26	P
	10 GHz ~ 26 GHz	Fig.27	P

For $\pi/4$ DQPSK

Channel	Frequency Range	Test Results	Conclusion
Ch 0 2402 MHz	Center Frequency	Fig.28	P
	30 MHz ~ 1 GHz	Fig.29	P
	1 GHz ~ 3 GHz	Fig.30	P
	3 GHz ~ 10 GHz	Fig.31	P
	10 GHz ~ 26 GHz	Fig.32	P
Ch 39 2441 MHz	Center Frequency	Fig.33	P
	30 MHz ~ 1 GHz	Fig.34	P
	1 GHz ~ 3 GHz	Fig.35	P
	3 GHz ~ 10 GHz	Fig.36	P
	10 GHz ~ 26 GHz	Fig.37	P
Ch 78 2480 MHz	Center Frequency	Fig.38	P
	30 MHz ~ 1 GHz	Fig.39	P
	1 GHz ~ 3 GHz	Fig.40	P
	3 GHz ~ 10 GHz	Fig.41	P
	10 GHz ~ 26 GHz	Fig.42	P

For 8DPSK

Channel	Frequency Range	Test Results	Conclusion
Ch 0 2402 MHz	Center Frequency	Fig.43	P
	30 MHz ~ 1 GHz	Fig.44	P
	1 GHz ~ 3 GHz	Fig.45	P
	3 GHz ~ 10 GHz	Fig.46	P

	10 GHz ~ 26 GHz	Fig.47	P
Ch 39 2441 MHz	Center Frequency	Fig.48	P
	30 MHz ~ 1 GHz	Fig.49	P
	1 GHz ~ 3 GHz	Fig.50	P
	3 GHz ~ 10 GHz	Fig.51	P
	10 GHz ~ 26 GHz	Fig.52	P
Ch 78 2480 MHz	Center Frequency	Fig.53	P
	30 MHz ~ 1 GHz	Fig.54	P
	1 GHz ~ 3 GHz	Fig.55	P
	3 GHz ~ 10 GHz	Fig.56	P
	10 GHz ~ 26 GHz	Fig.57	P

Conclusion: PASS

Test graphs as below

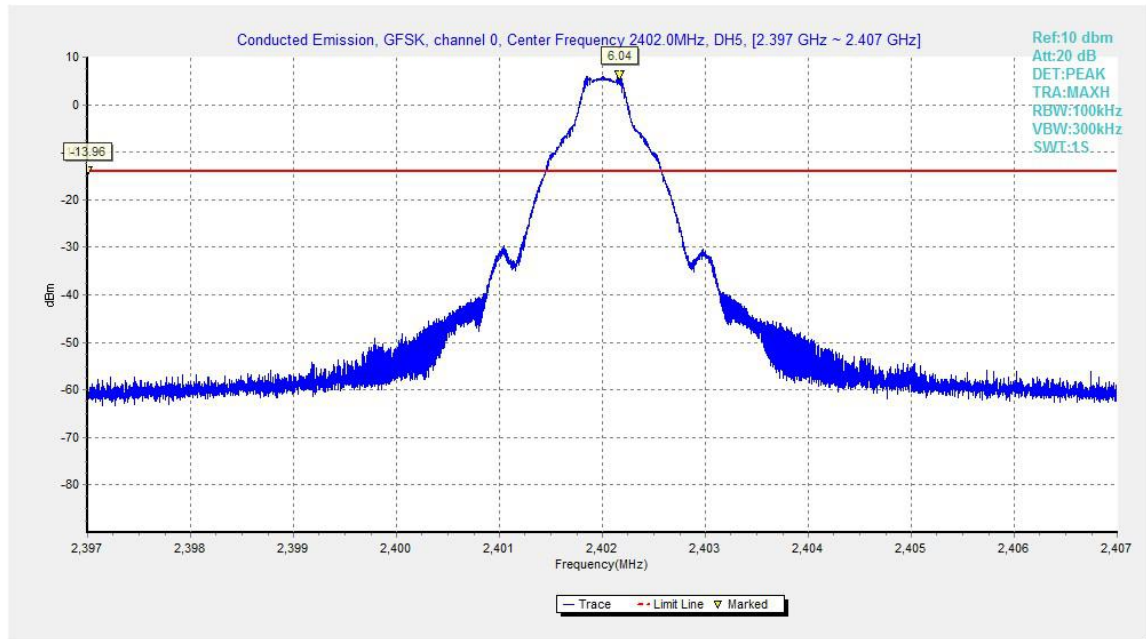


Fig.13. Conducted spurious emission: GFSK, Channel 0,2402MHz

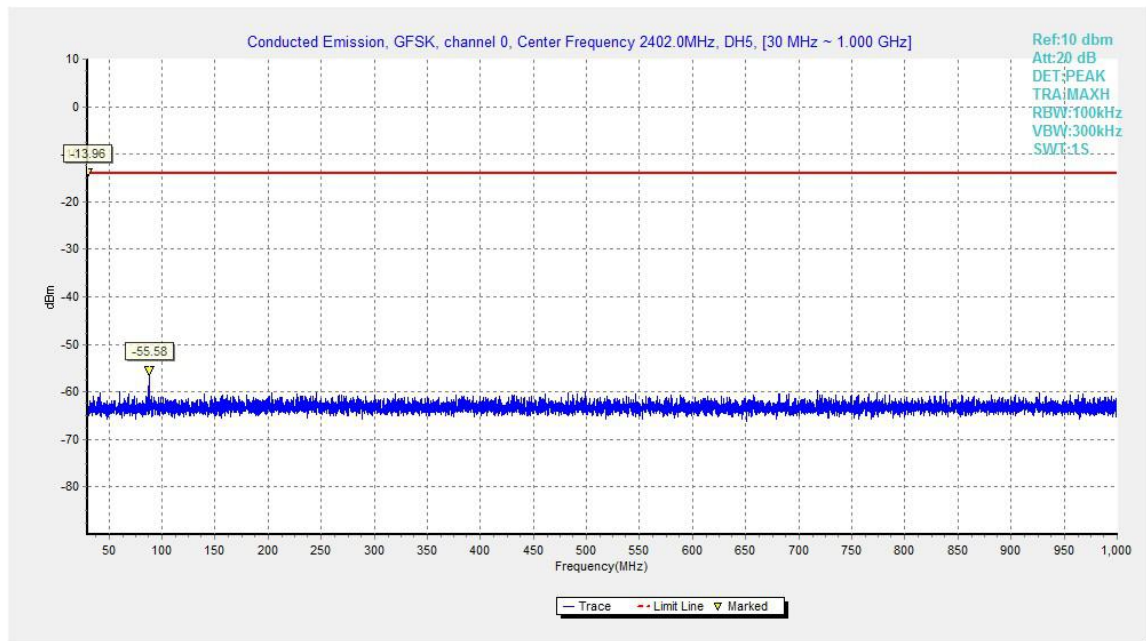


Fig.14. Conducted spurious emission: GFSK, Channel 0, 30MHz - 1GHz

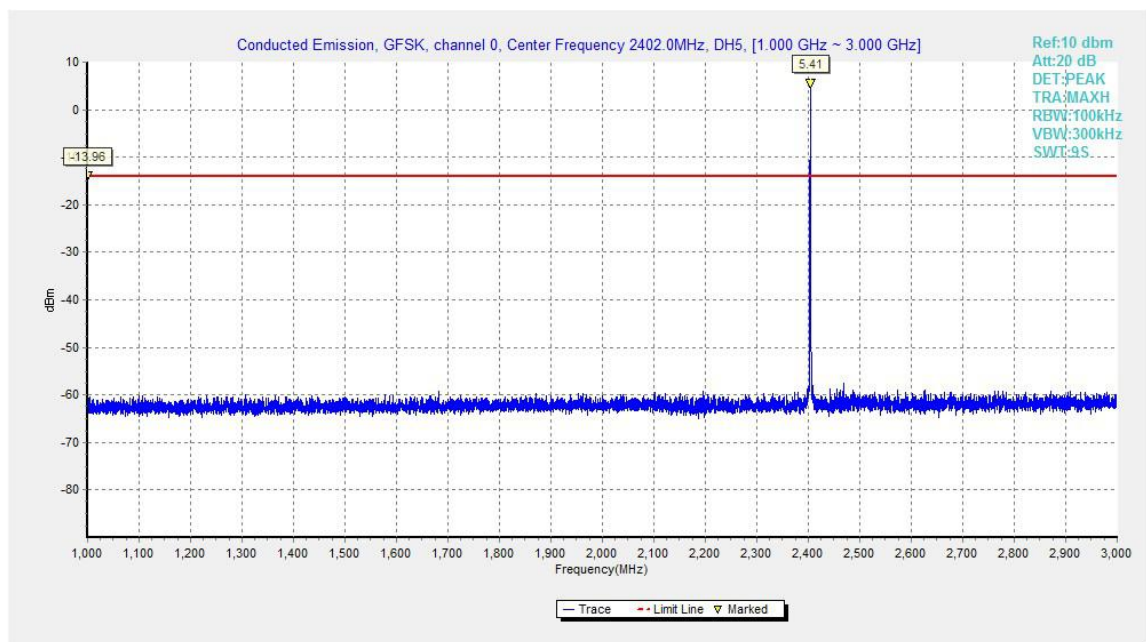


Fig.15. Conducted spurious emission: GFSK, Channel 0, 1GHz - 3GHz

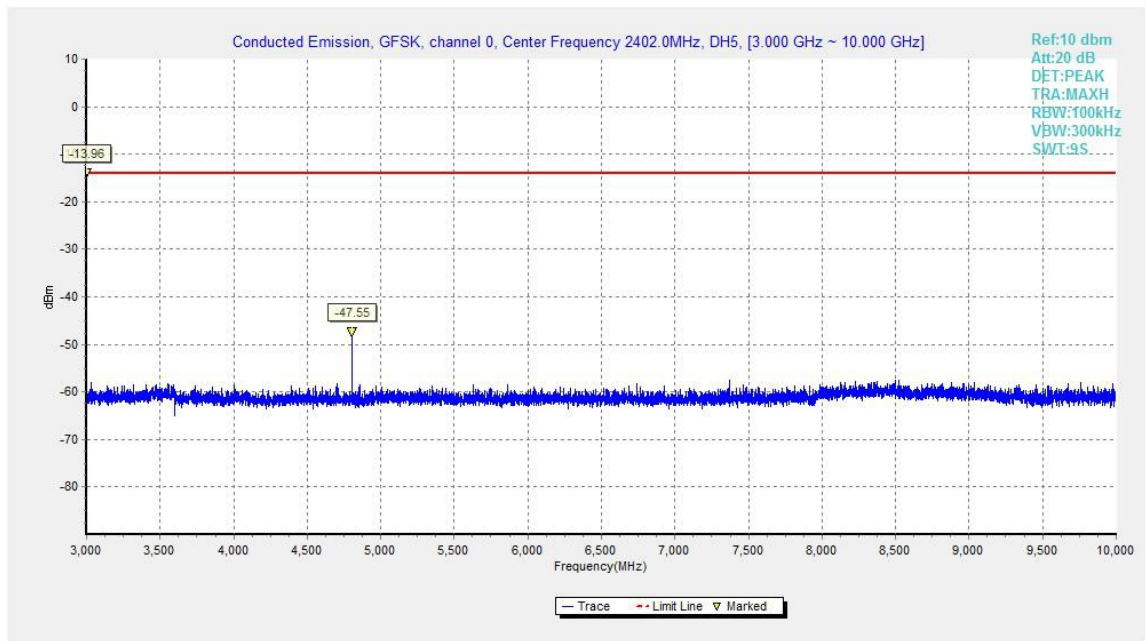


Fig.16. Conducted spurious emission: GFSK, Channel 0, 3GHz - 10GHz

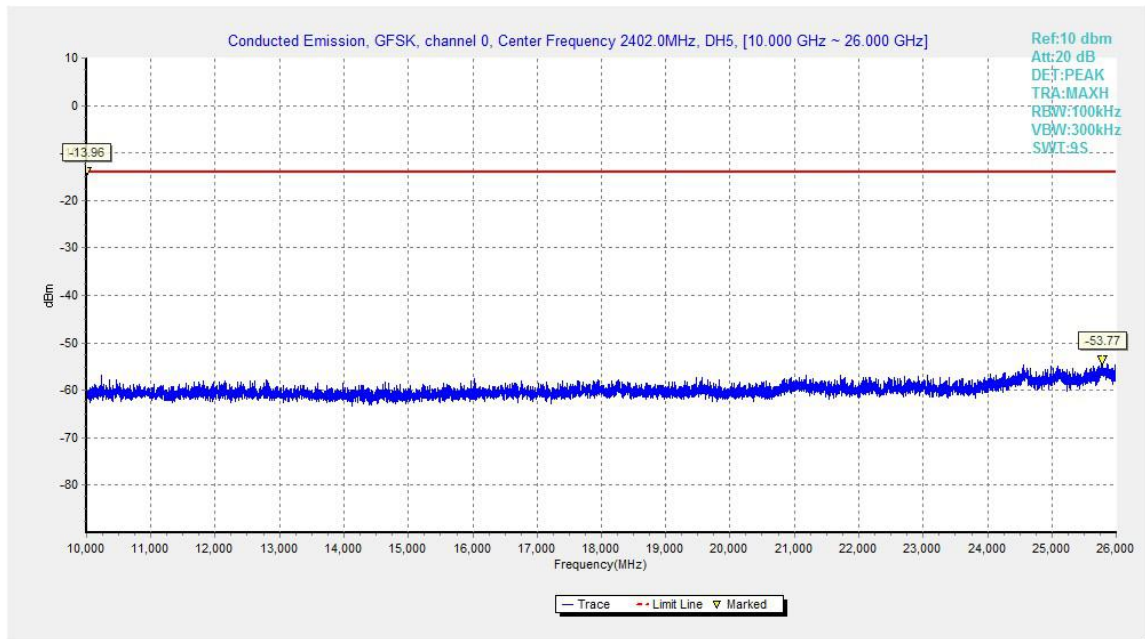


Fig.17. Conducted spurious emission: GFSK, Channel 0,10GHz - 26GHz

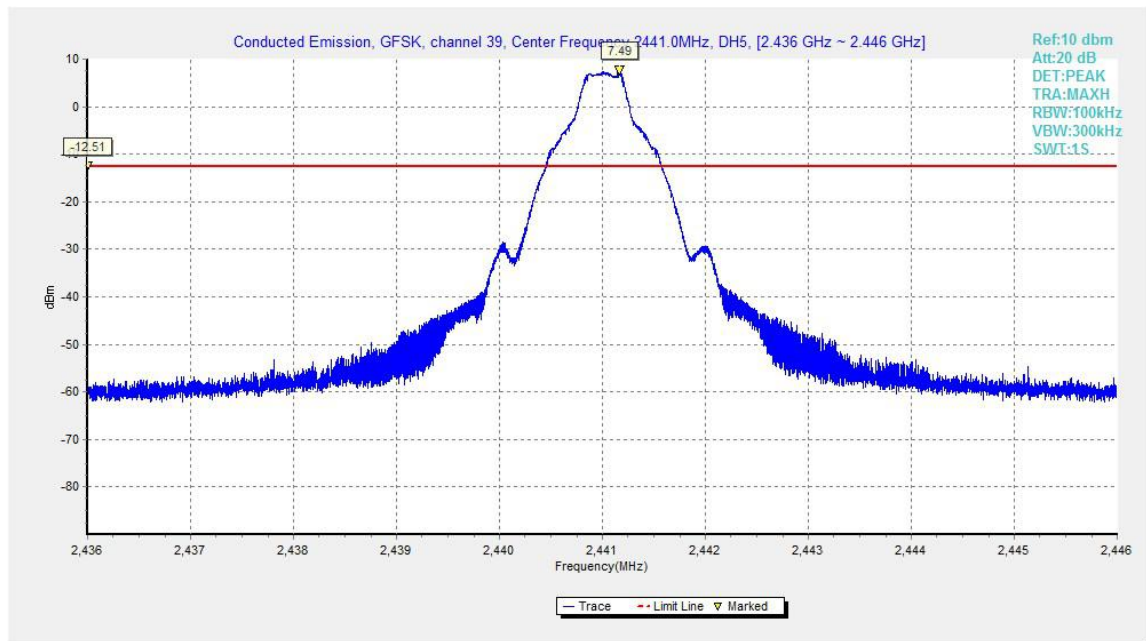


Fig.18. Conducted spurious emission: GFSK, Channel 39, 2441MHz

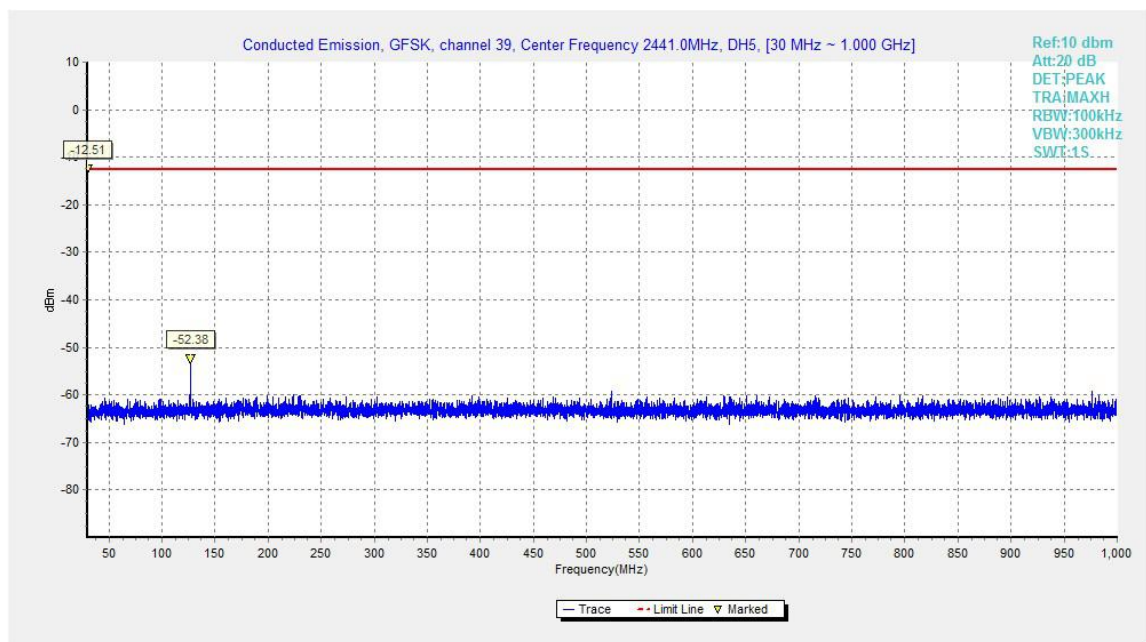


Fig.19. Conducted spurious emission: GFSK, Channel 39, 30MHz - 1GHz

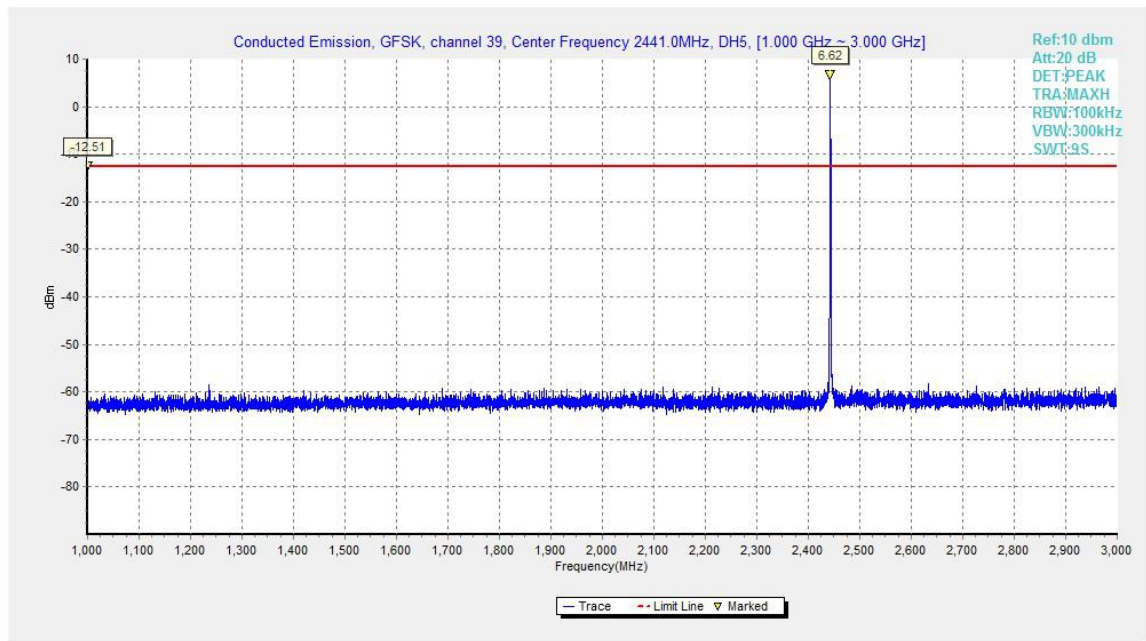


Fig.20. Conducted spurious emission: GFSK, Channel 39, 1GHz – 3GHz

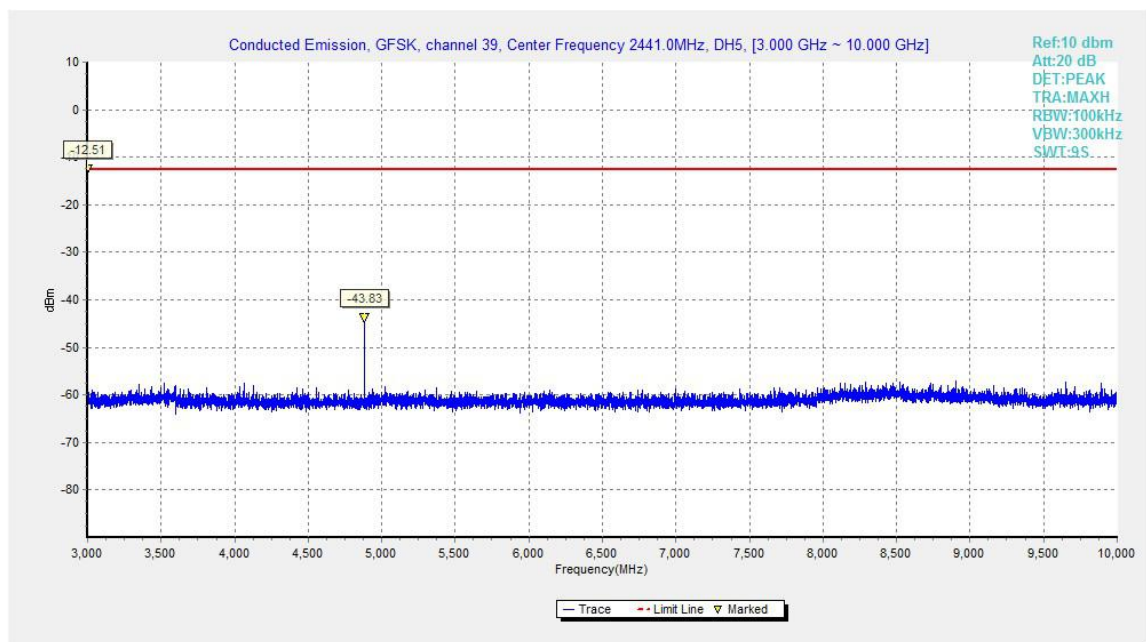


Fig.21. Conducted spurious emission: GFSK, Channel 39, 3GHz – 10GHz

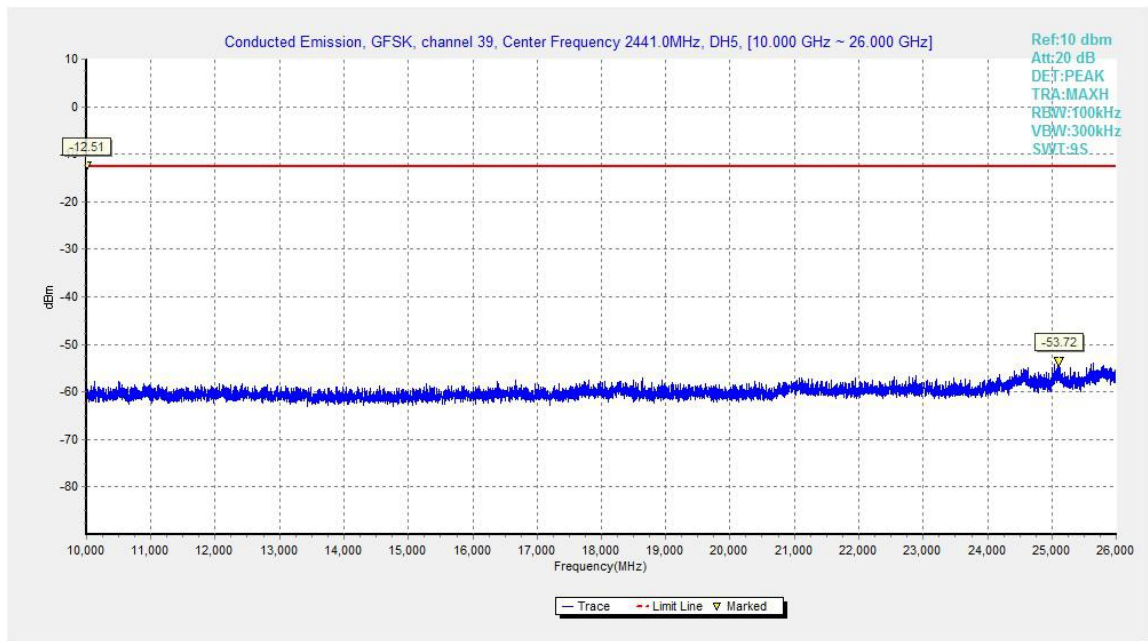


Fig.22. Conducted spurious emission: GFSK, Channel 39, 10GHz – 26GHz

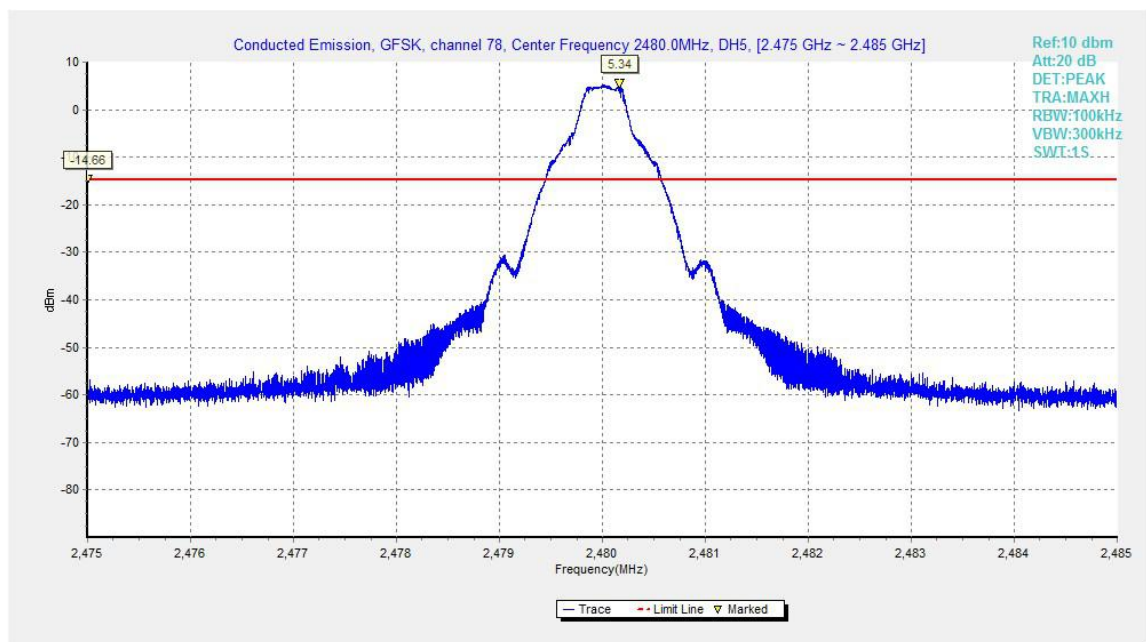


Fig.23. Conducted spurious emission: GFSK, Channel 78, 2480MHz

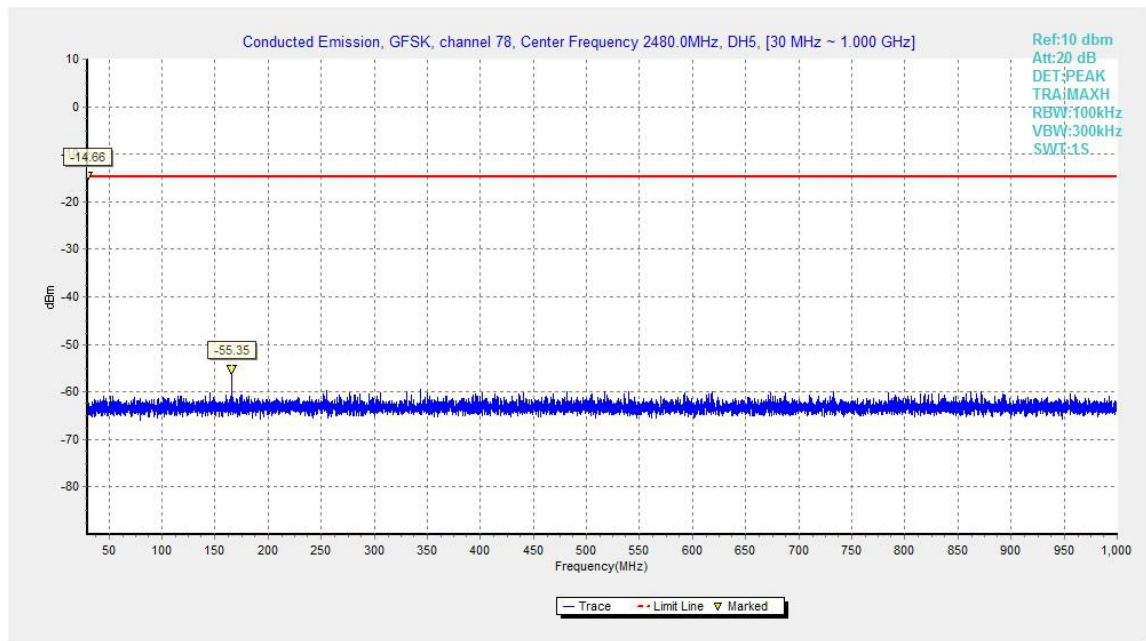


Fig.24. Conducted spurious emission: GFSK, Channel 78, 30MHz - 1GHz

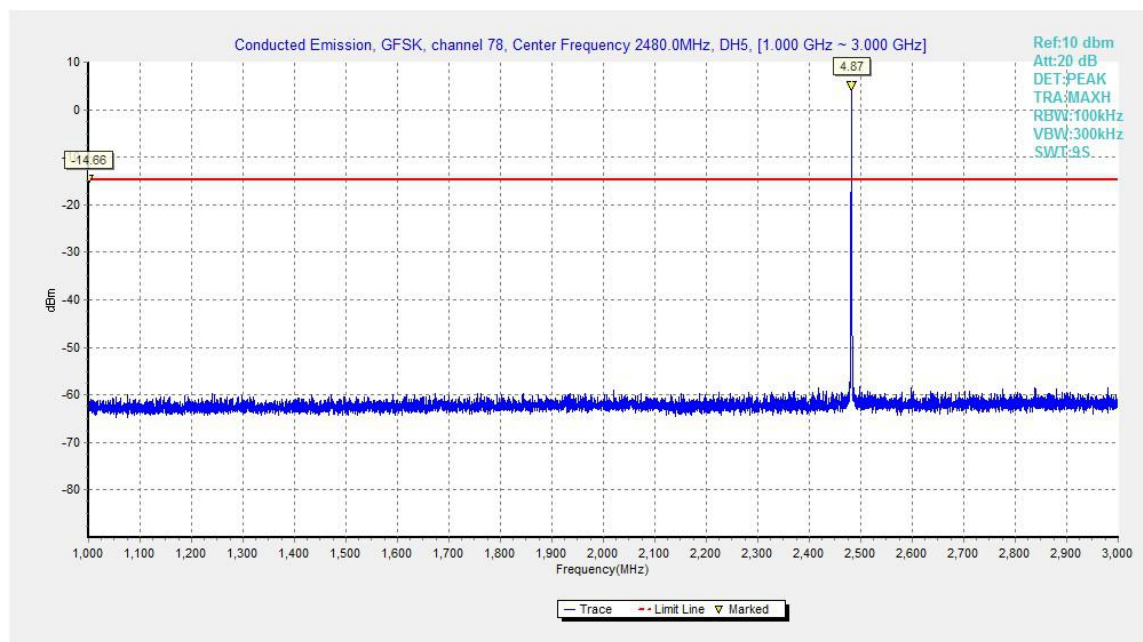


Fig.25. Conducted spurious emission: GFSK, Channel 78, 1GHz - 3GHz

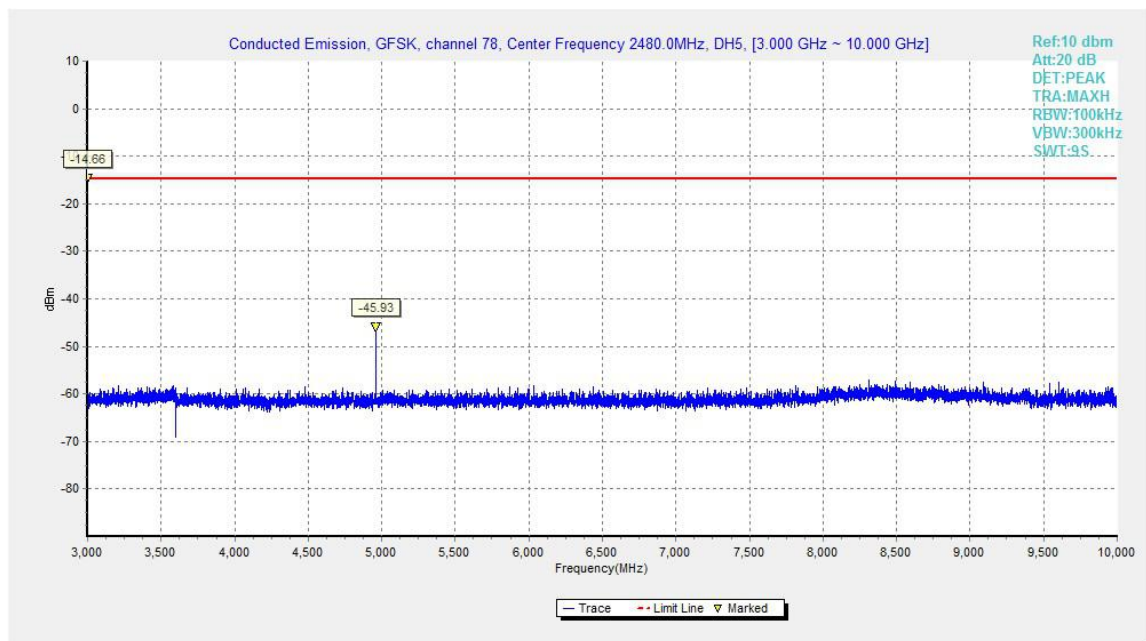


Fig.26. Conducted spurious emission: GFSK, Channel 78, 3GHz - 10GHz

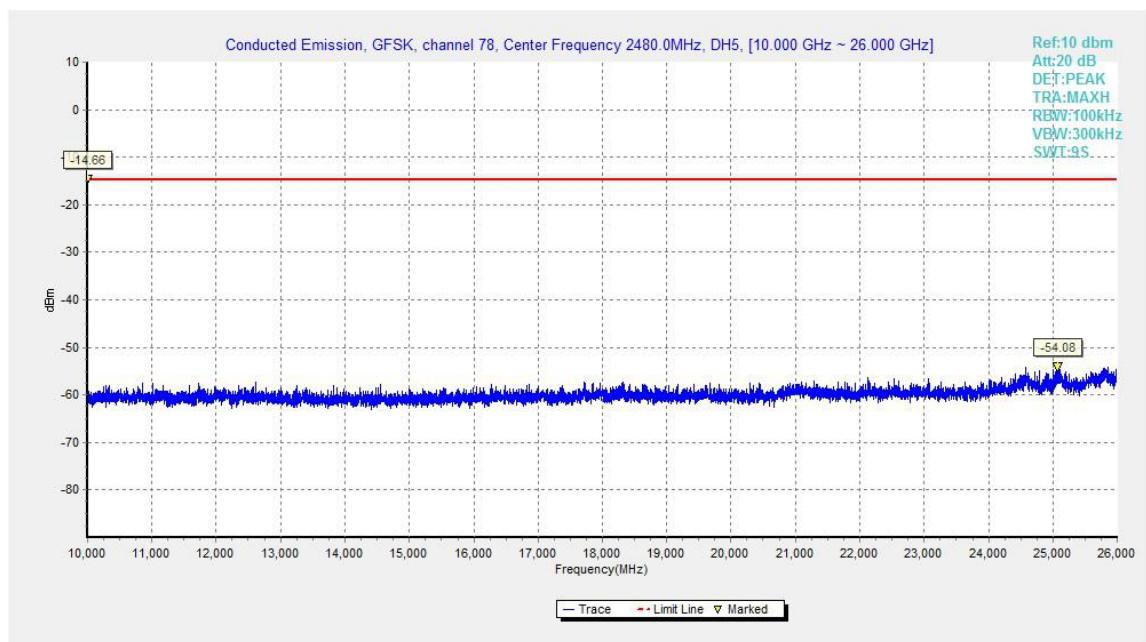


Fig.27. Conducted spurious emission: GFSK, Channel 78, 10GHz - 26GHz

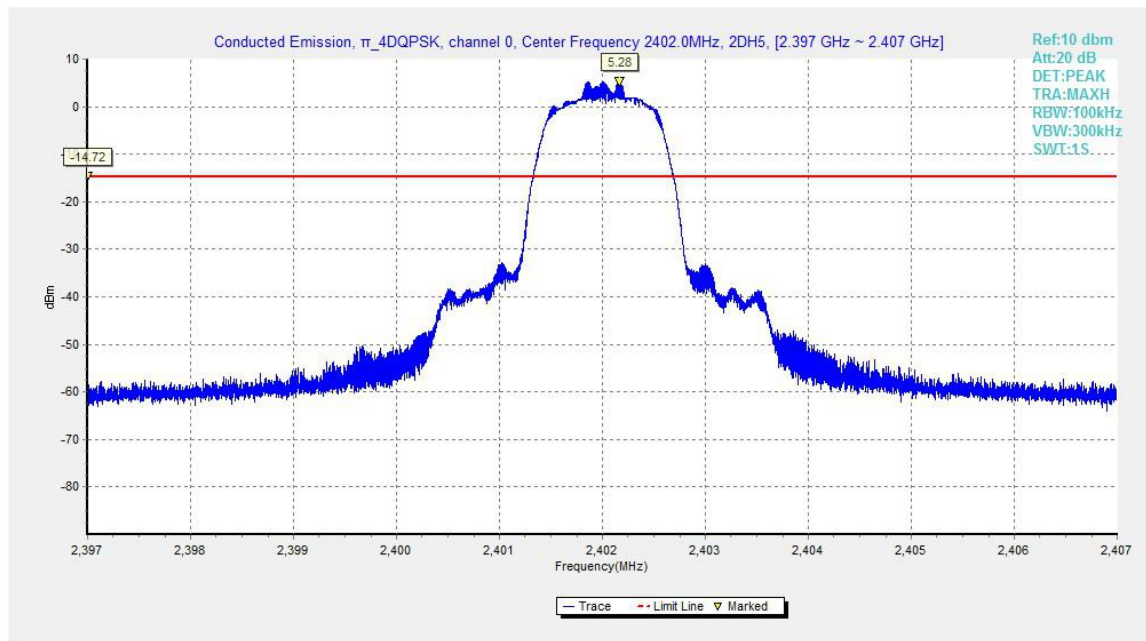


Fig.28. Conducted spurious emission: $\pi/4$ DQPSK, Channel 0,2402MHz

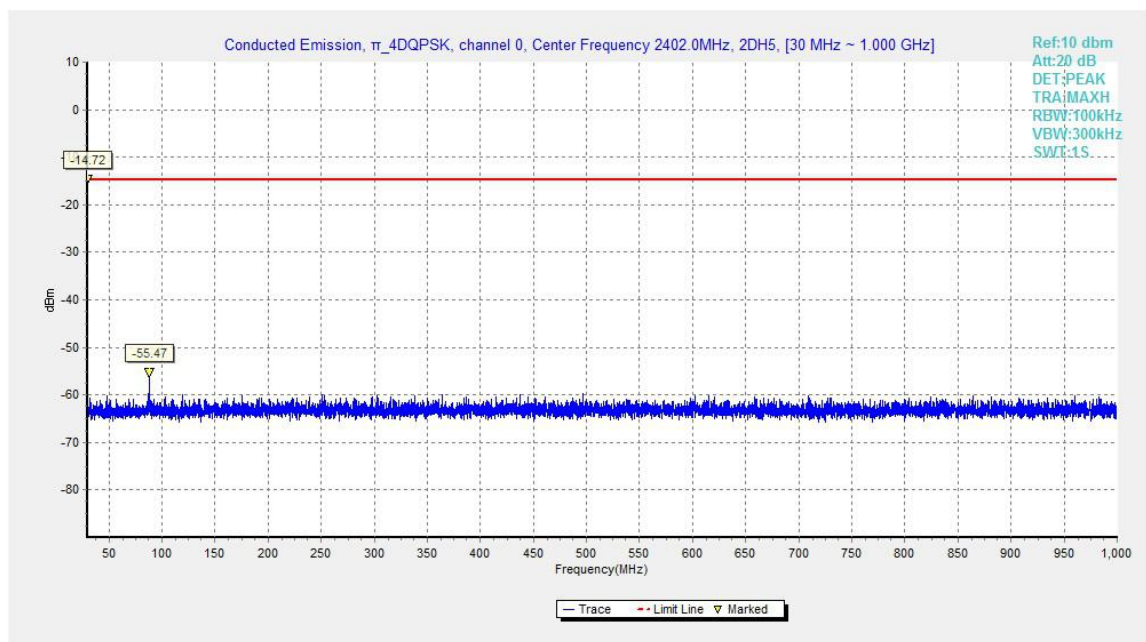


Fig.29. Conducted spurious emission: $\pi/4$ DQPSK, Channel 0, 30MHz - 1GHz

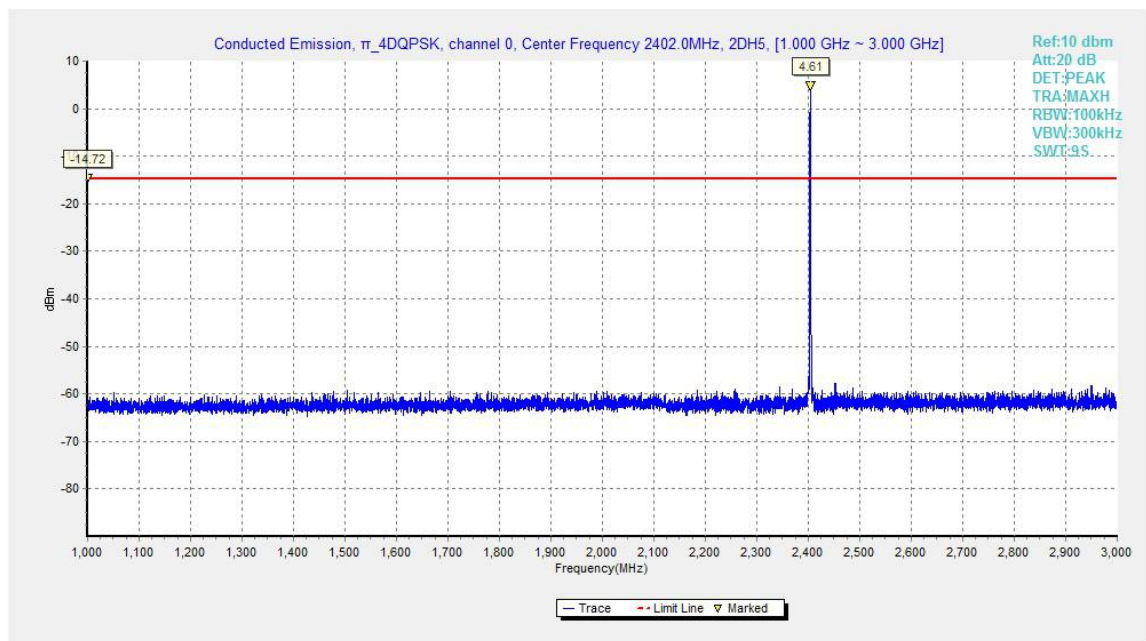


Fig.30. Conducted spurious emission: $\pi/4$ DQPSK, Channel 0, 1GHz - 3GHz

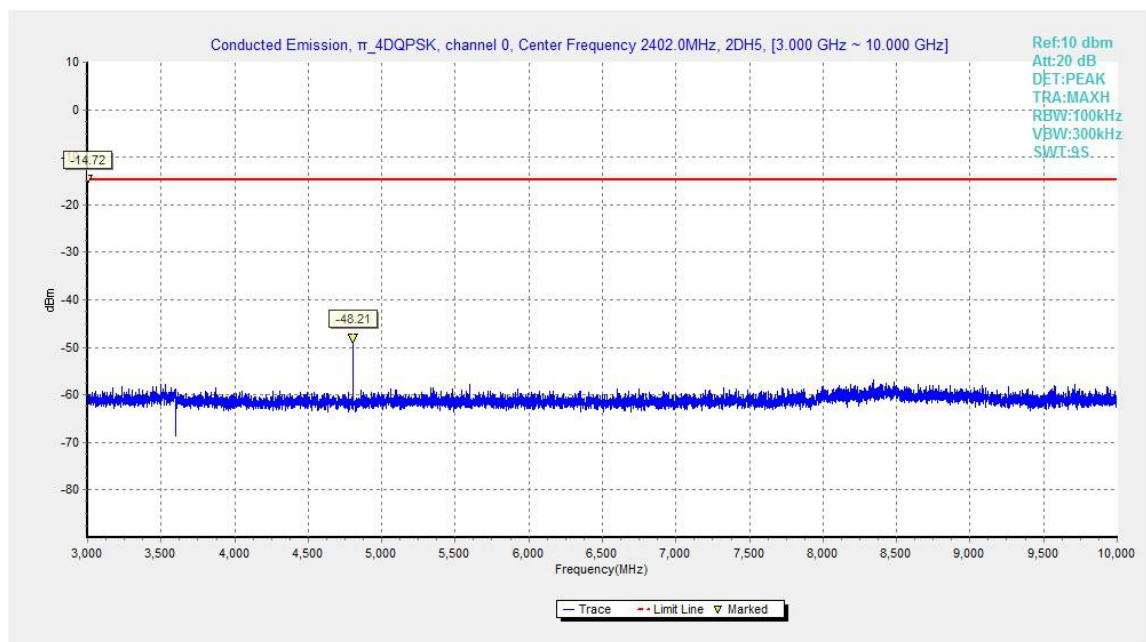


Fig.31. Conducted spurious emission: $\pi/4$ DQPSK, Channel 0, 3GHz - 10GHz

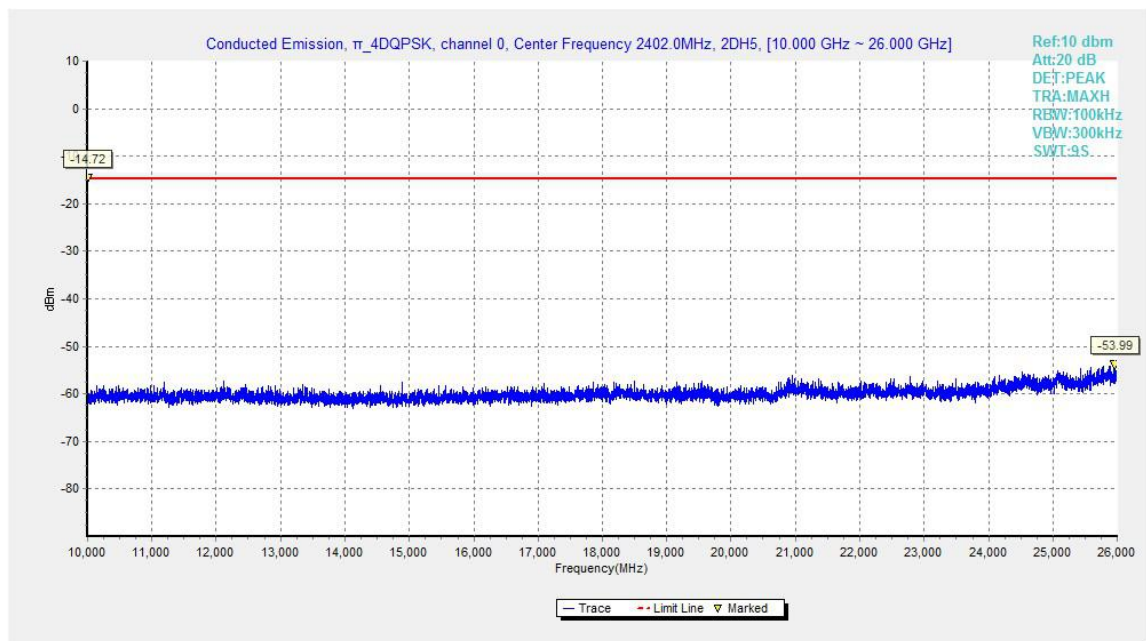


Fig.32. Conducted spurious emission: $\pi/4$ DQPSK, Channel 0,10GHz - 26GHz

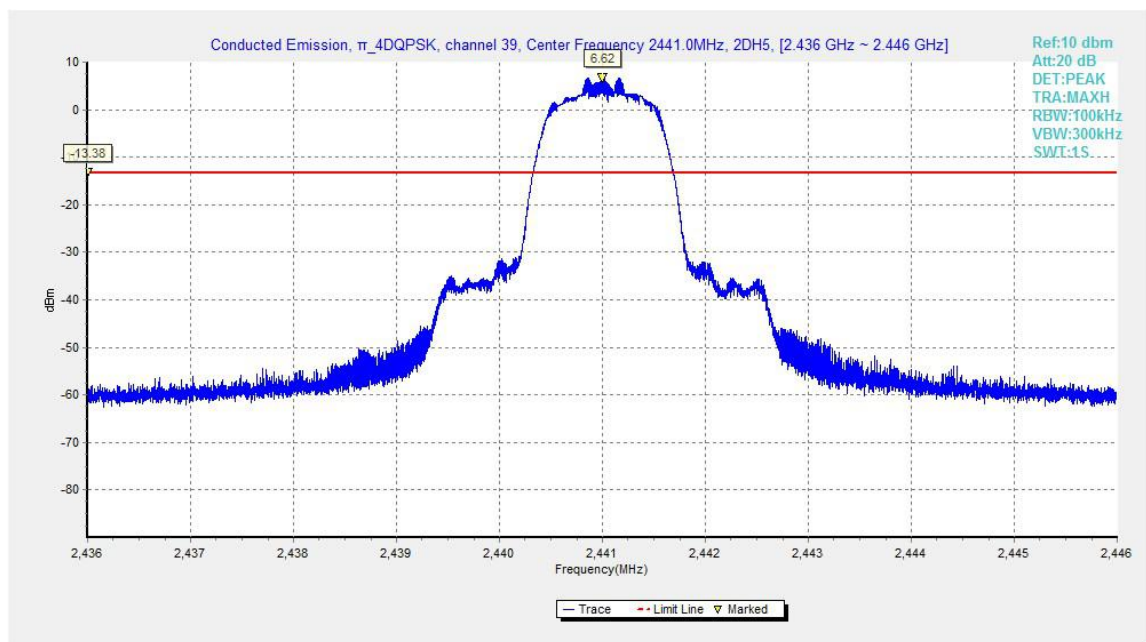


Fig.33. Conducted spurious emission: $\pi/4$ DQPSK, Channel 39, 2441MHz

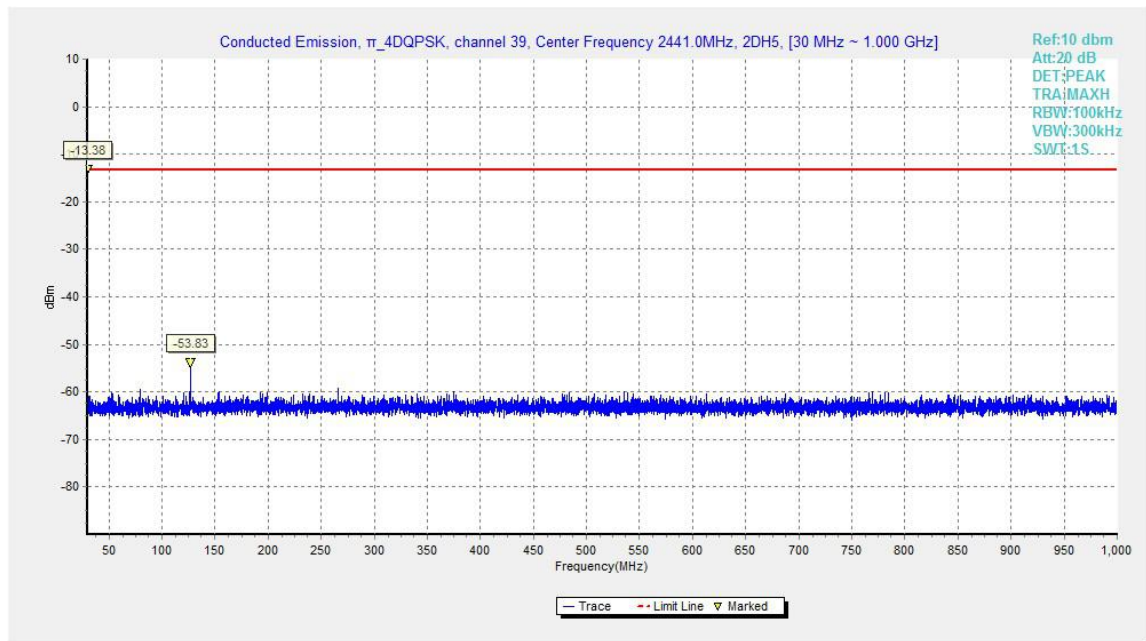


Fig.34. Conducted spurious emission: $\pi/4$ DQPSK, Channel 39, 30MHz - 1GHz

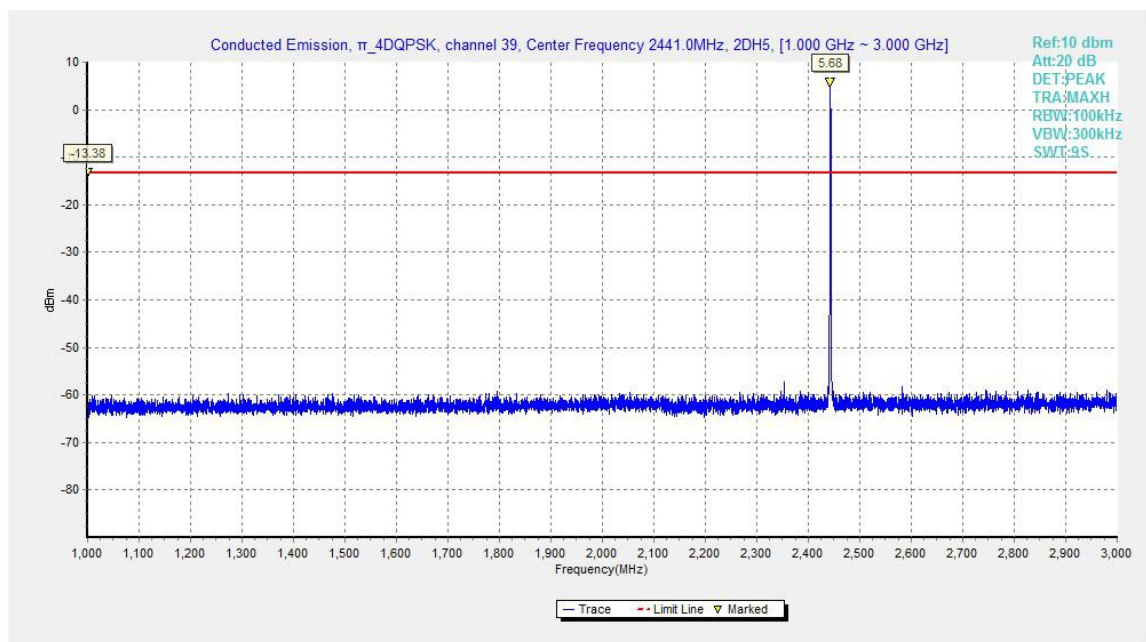


Fig.35. Conducted spurious emission: $\pi/4$ DQPSK, Channel 39, 1GHz - 3GHz

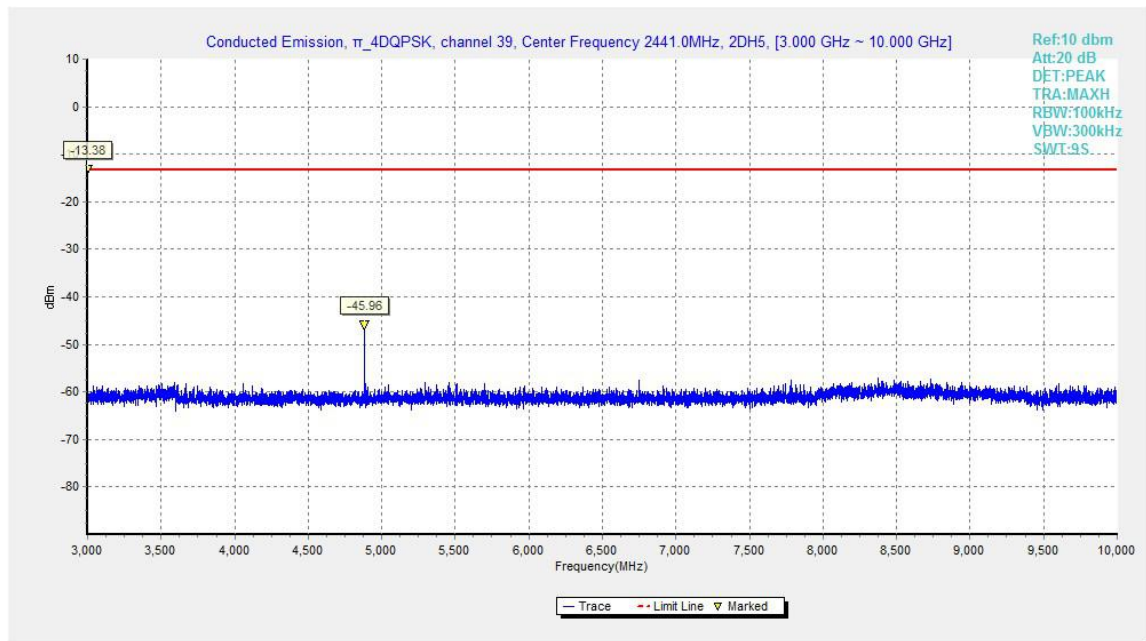


Fig.36. Conducted spurious emission: $\pi/4$ DQPSK, Channel 39, 3GHz - 10GHz

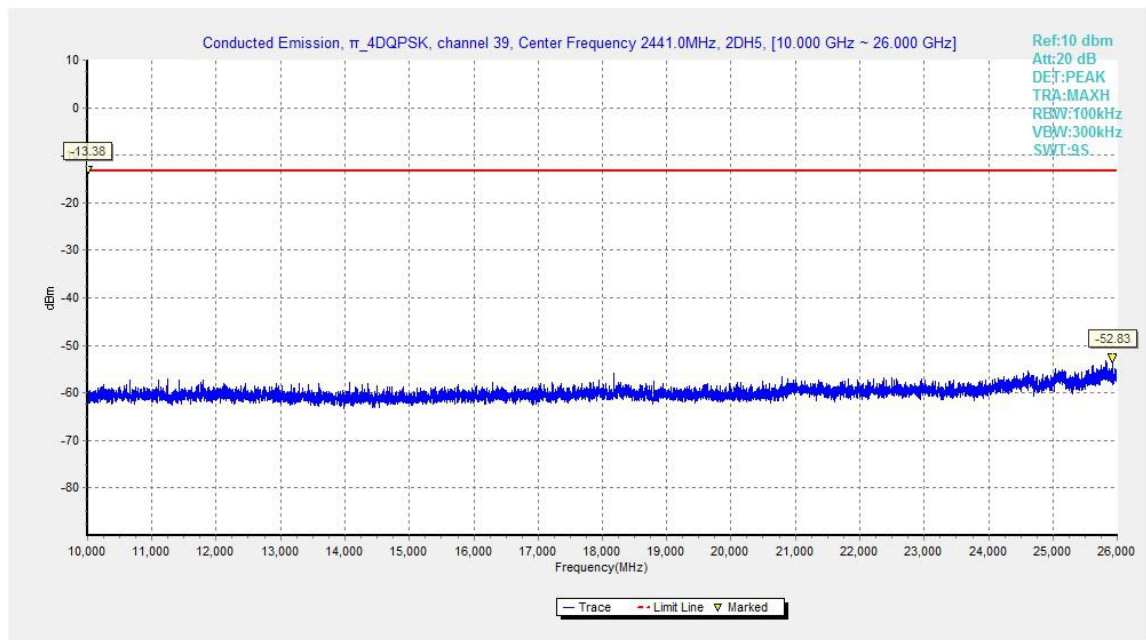


Fig.37. Conducted spurious emission: $\pi/4$ DQPSK, Channel 39, 10GHz – 26GHz

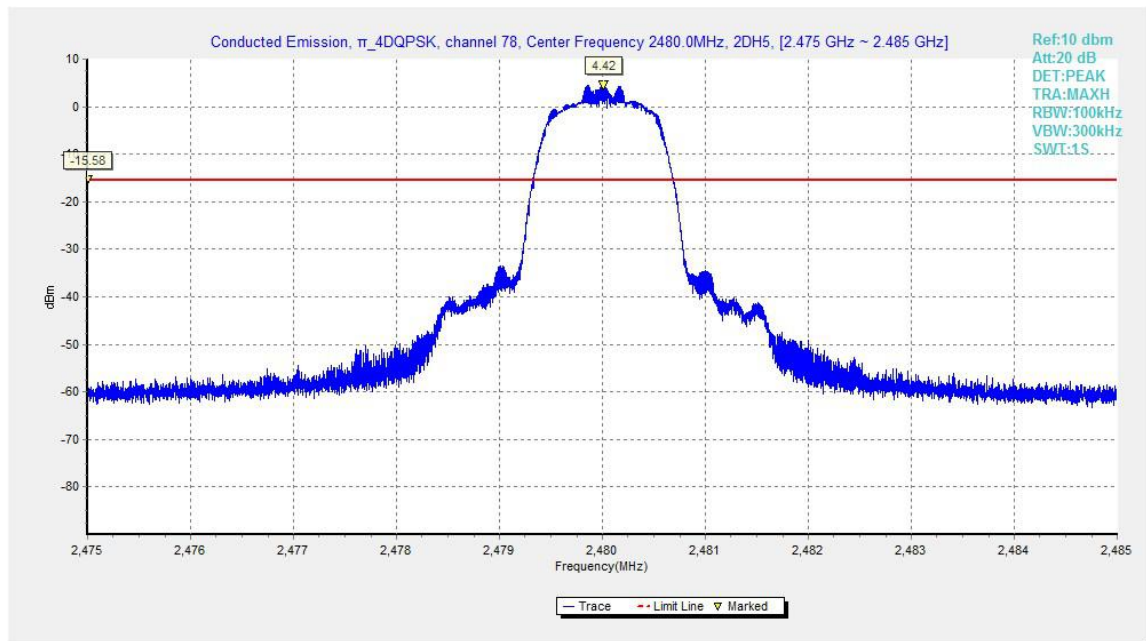


Fig.38. Conducted spurious emission: $\pi/4$ DQPSK, Channel 78, 2480MHz

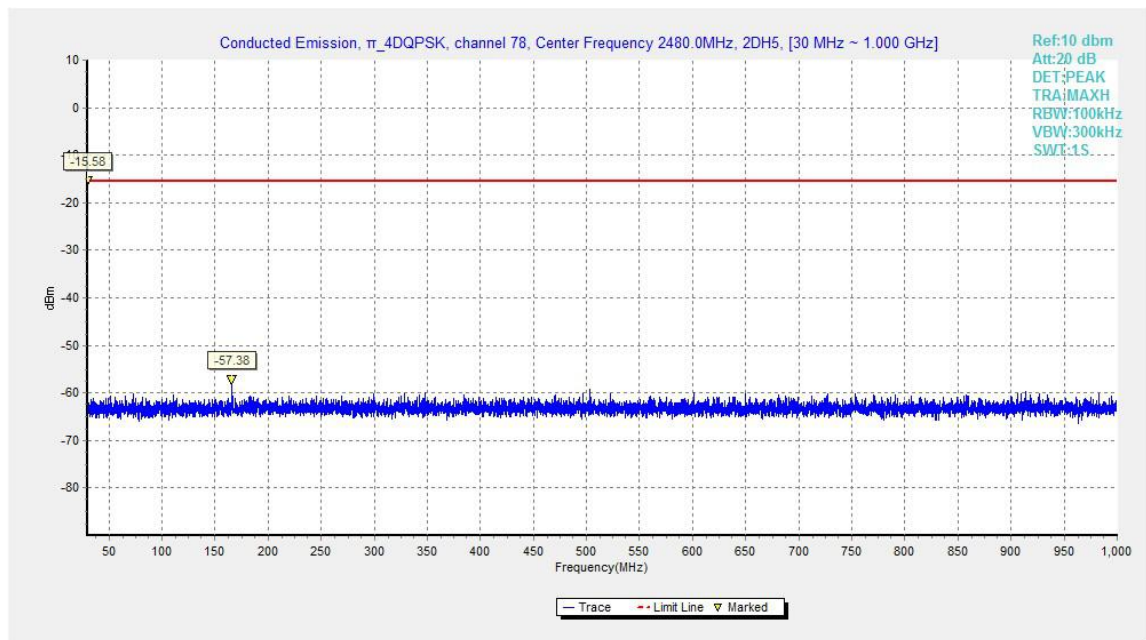


Fig.39. Conducted spurious emission: $\pi/4$ DQPSK, Channel 78, 30MHz - 1GHz

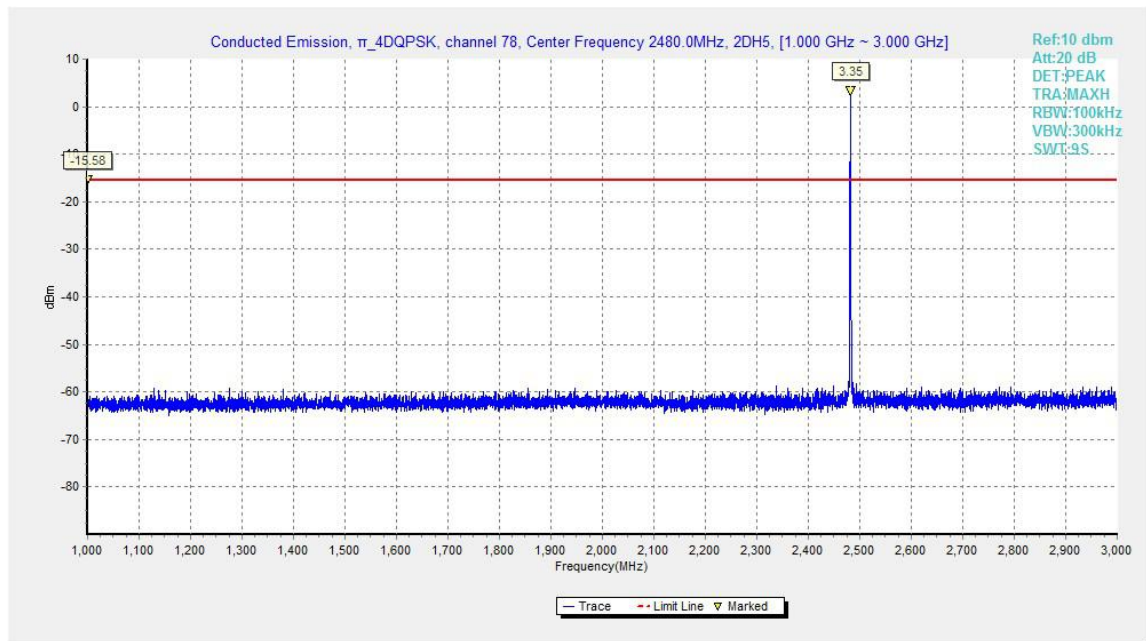


Fig.40. Conducted spurious emission: $\pi/4$ DQPSK, Channel 78, 1GHz - 3GHz

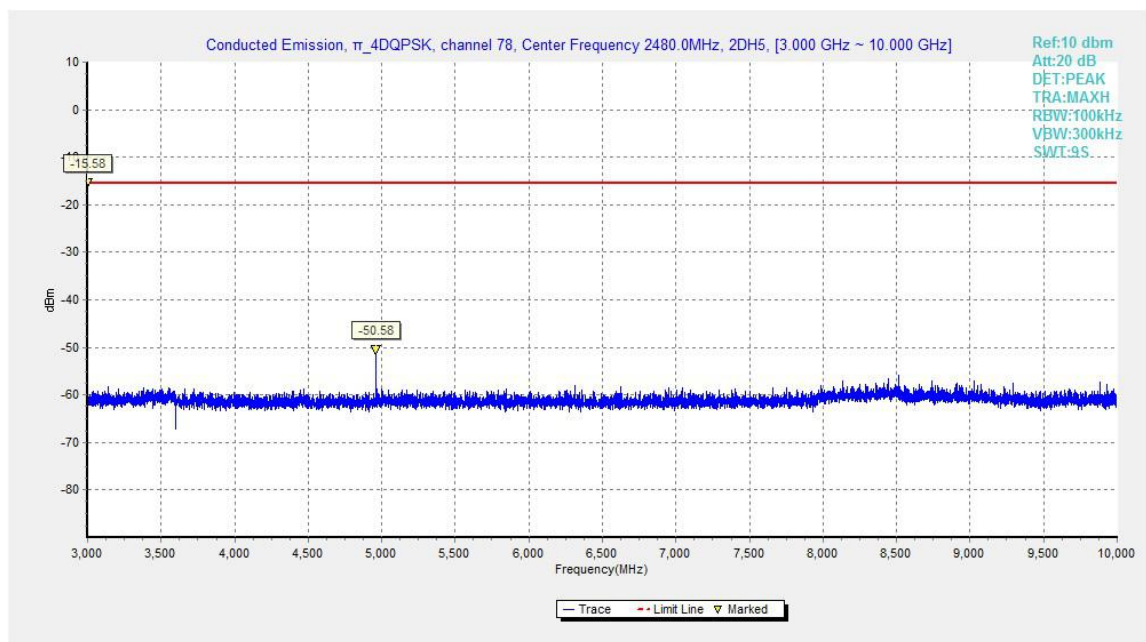


Fig.41. Conducted spurious emission: $\pi/4$ DQPSK, Channel 78, 3GHz - 10GHz

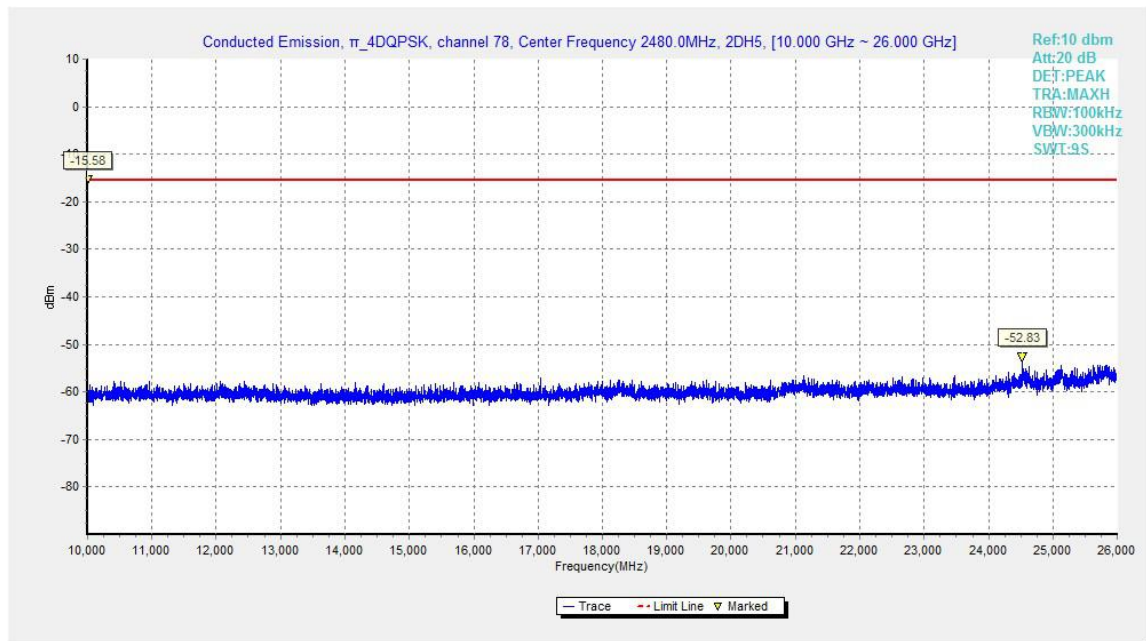


Fig.42. Conducted spurious emission: $\pi/4$ DQPSK, Channel 78, 10GHz - 26GHz

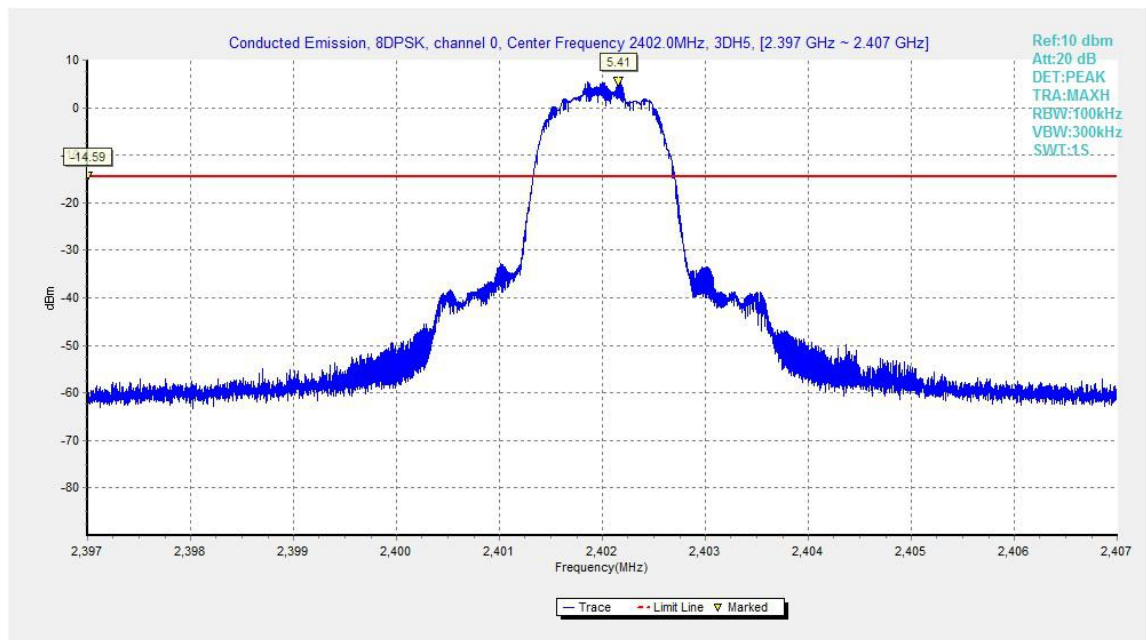


Fig.43. Conducted spurious emission: 8DPSK, Channel 0,2402MHz

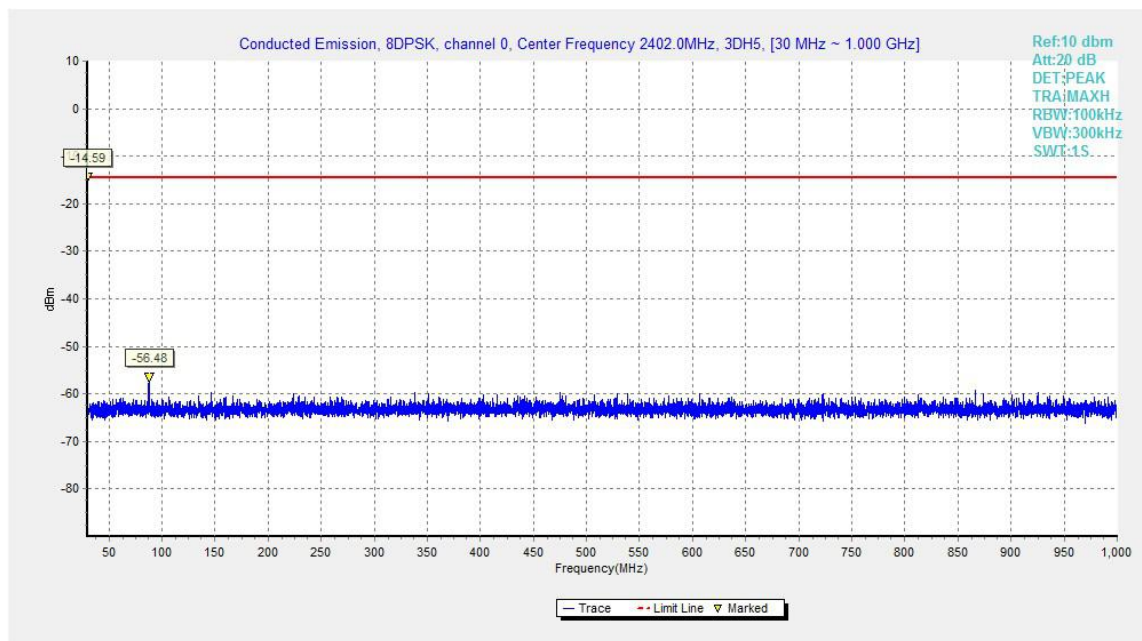


Fig.44. Conducted spurious emission: 8DPSK, Channel 0, 30MHz - 1GHz

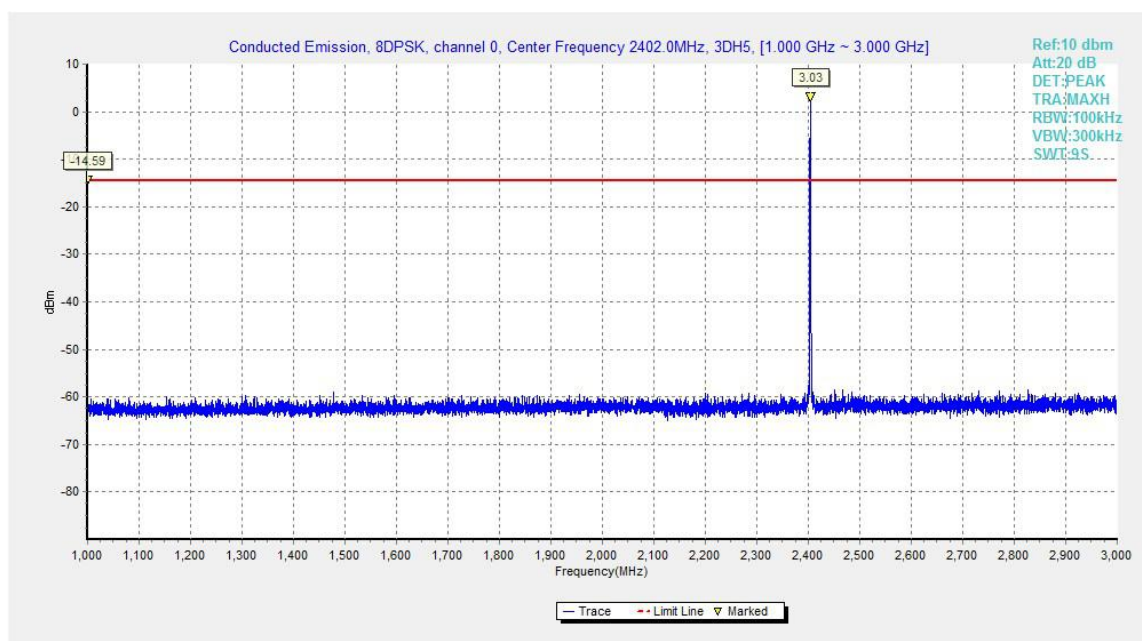


Fig.45. Conducted spurious emission: 8DPSK, Channel 0, 1GHz - 3GHz

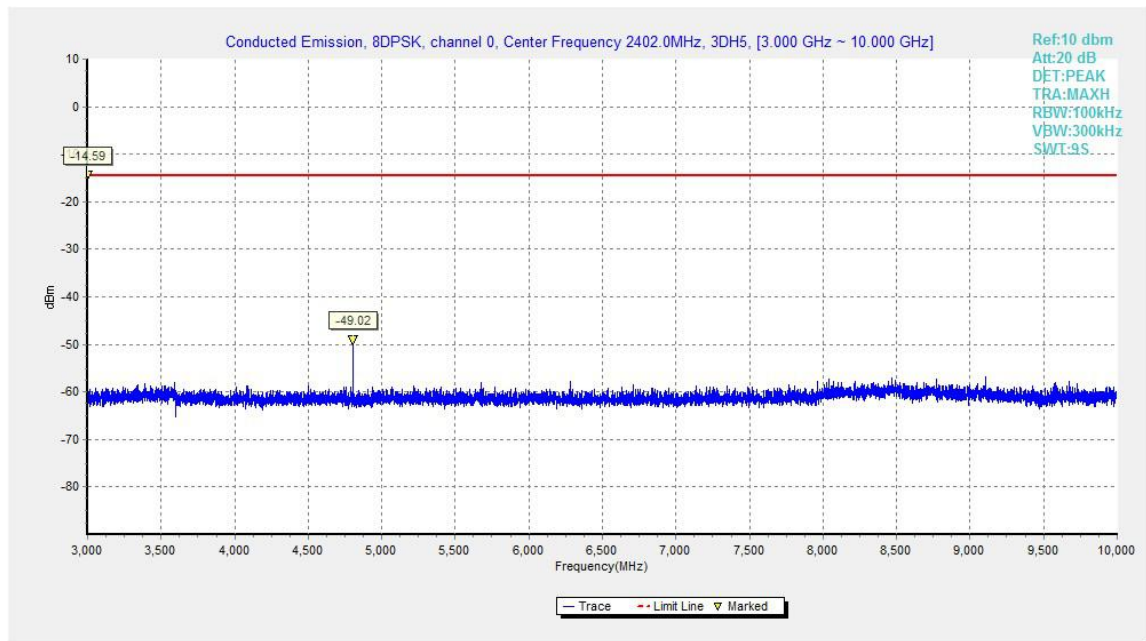


Fig.46. Conducted spurious emission: 8DPSK, Channel 0, 3GHz - 10GHz

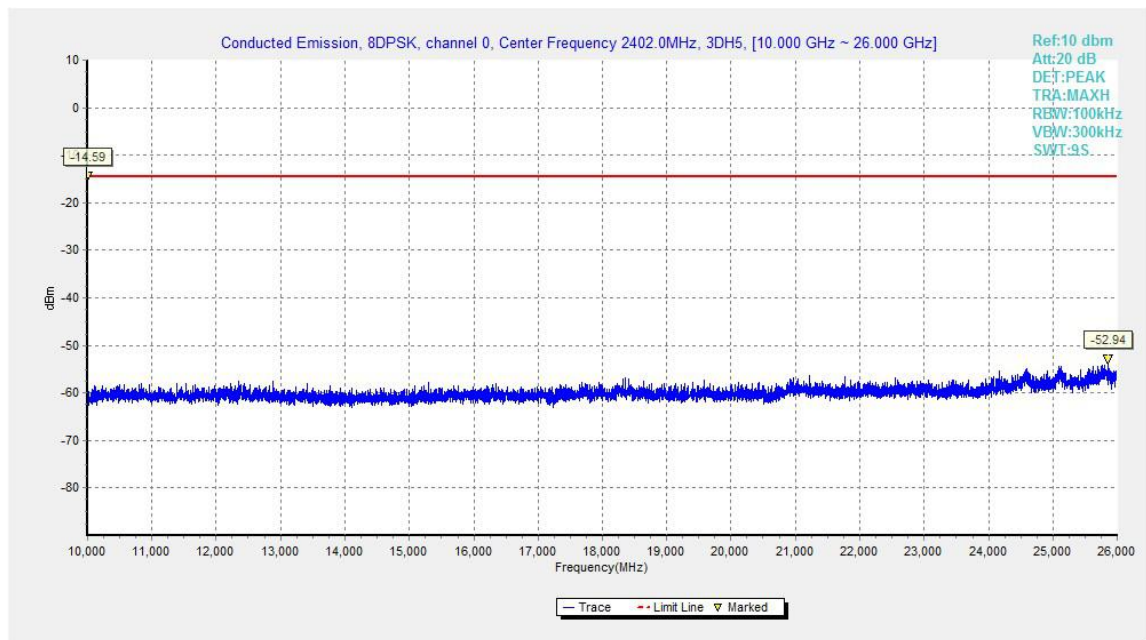


Fig.47. Conducted spurious emission: 8DPSK, Channel 0,10GHz - 26GHz

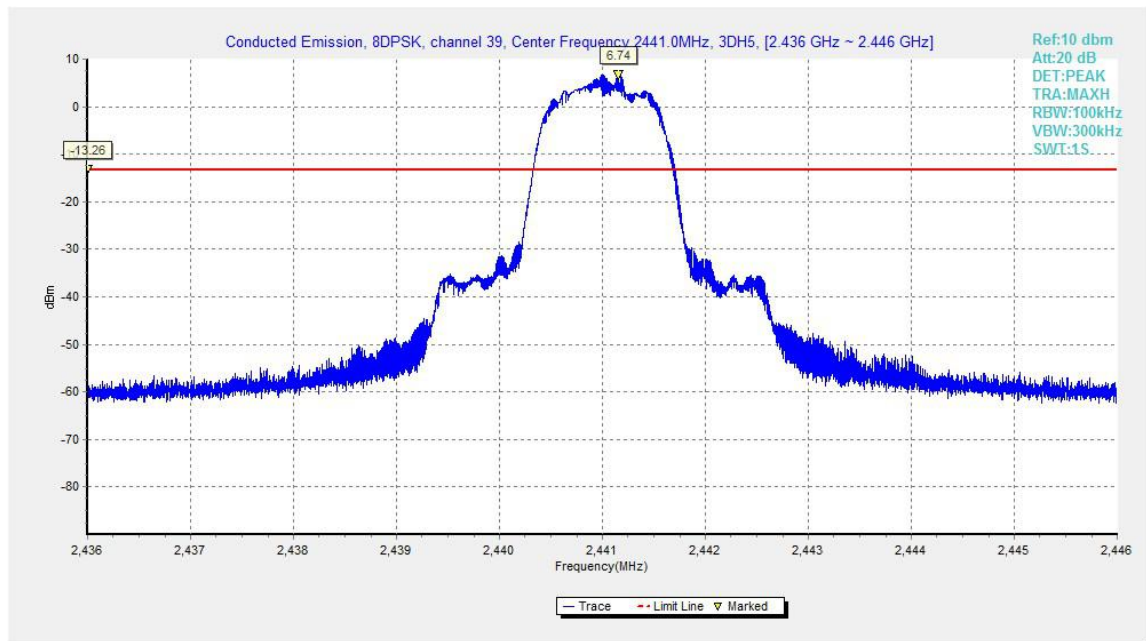


Fig.48. Conducted spurious emission: 8DPSK, Channel 39, 2441MHz

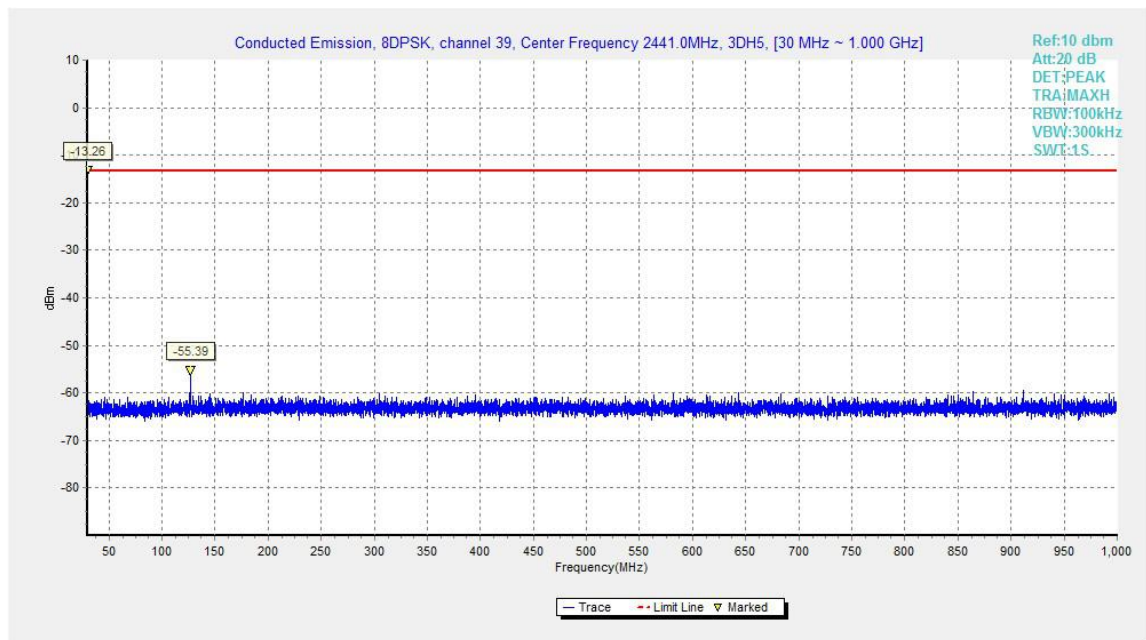


Fig.49. Conducted spurious emission: 8DPSK, Channel 39, 30MHz - 1GHz

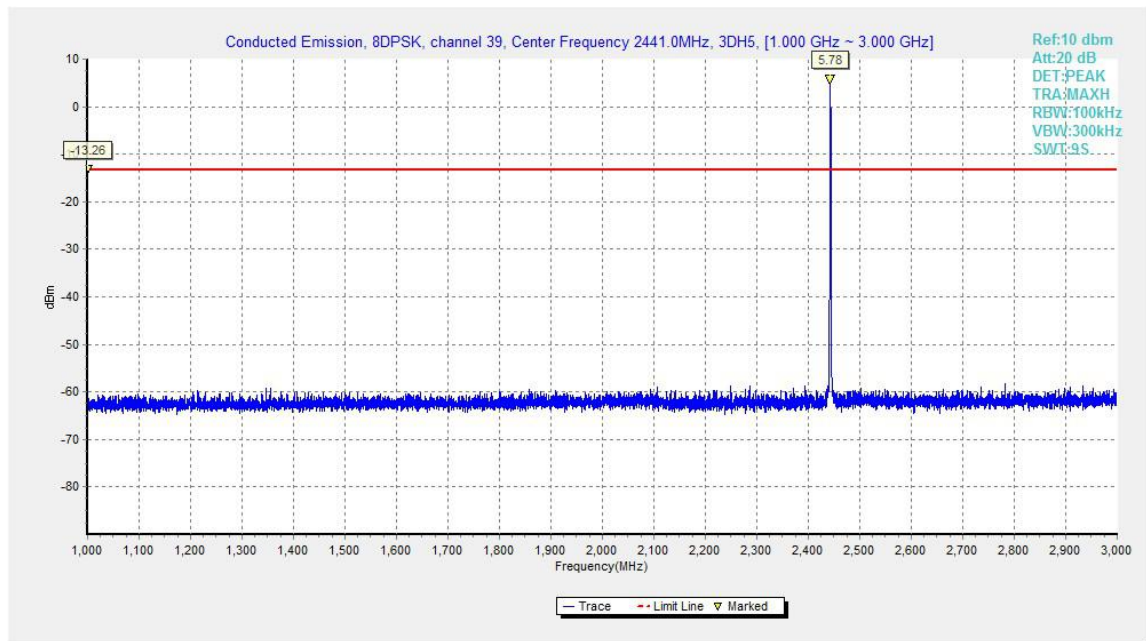


Fig.50. Conducted spurious emission: 8DPSK, Channel 39, 1GHz - 3GHz

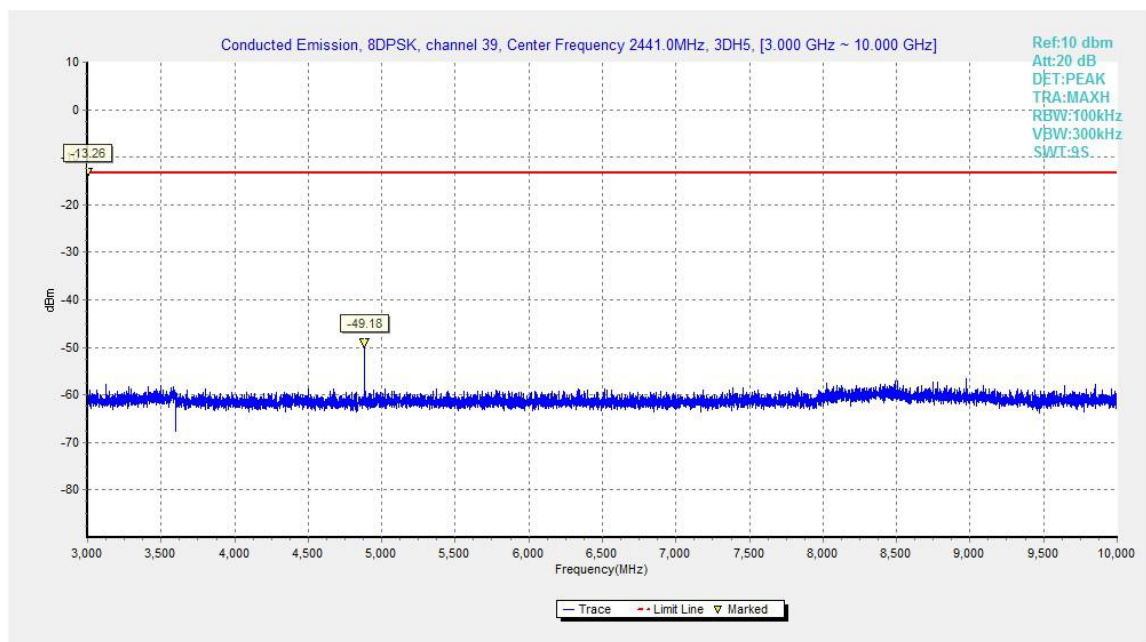


Fig.51. Conducted spurious emission: 8DPSK, Channel 39, 3GHz - 10GHz

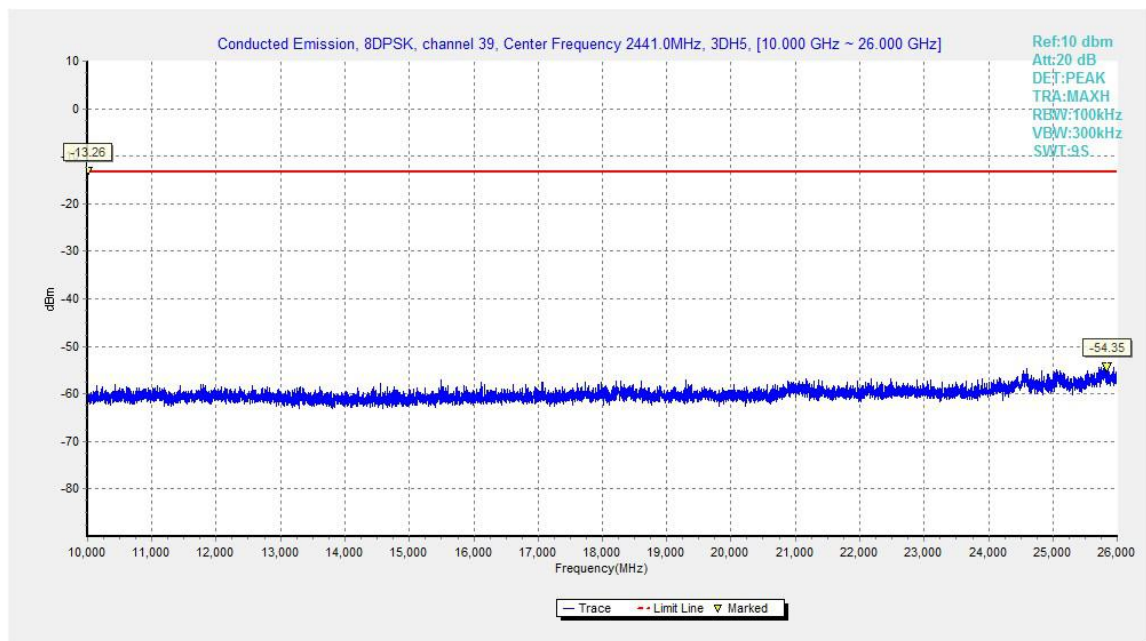


Fig.52. Conducted spurious emission: 8DPSK, Channel 39, 10GHz – 26GHz

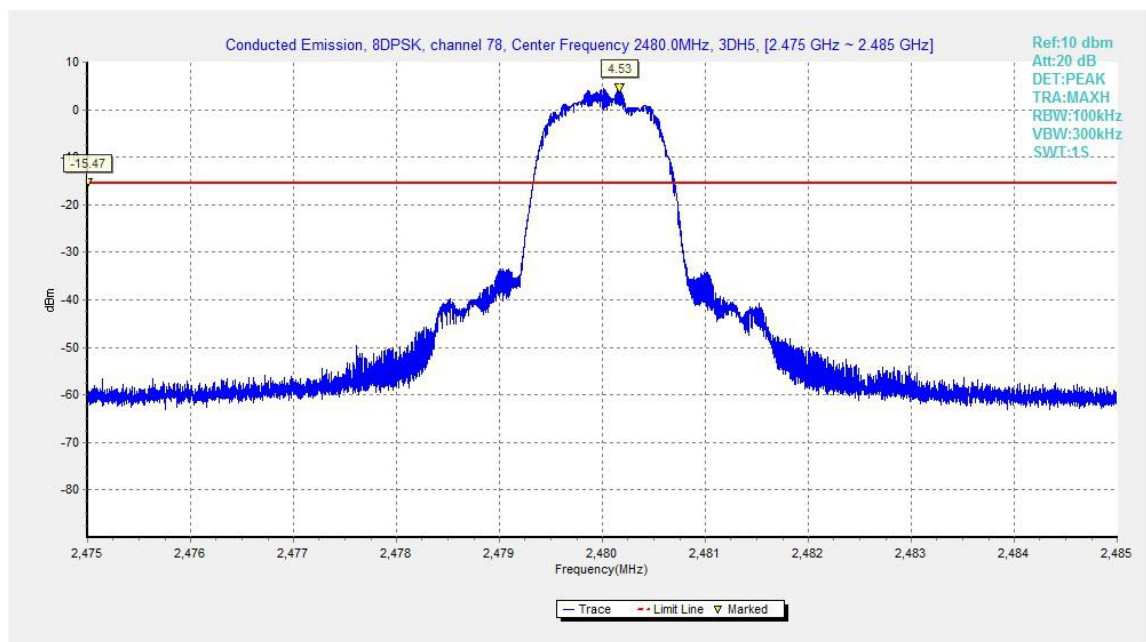


Fig.53. Conducted spurious emission: 8DPSK, Channel 78, 2480MHz

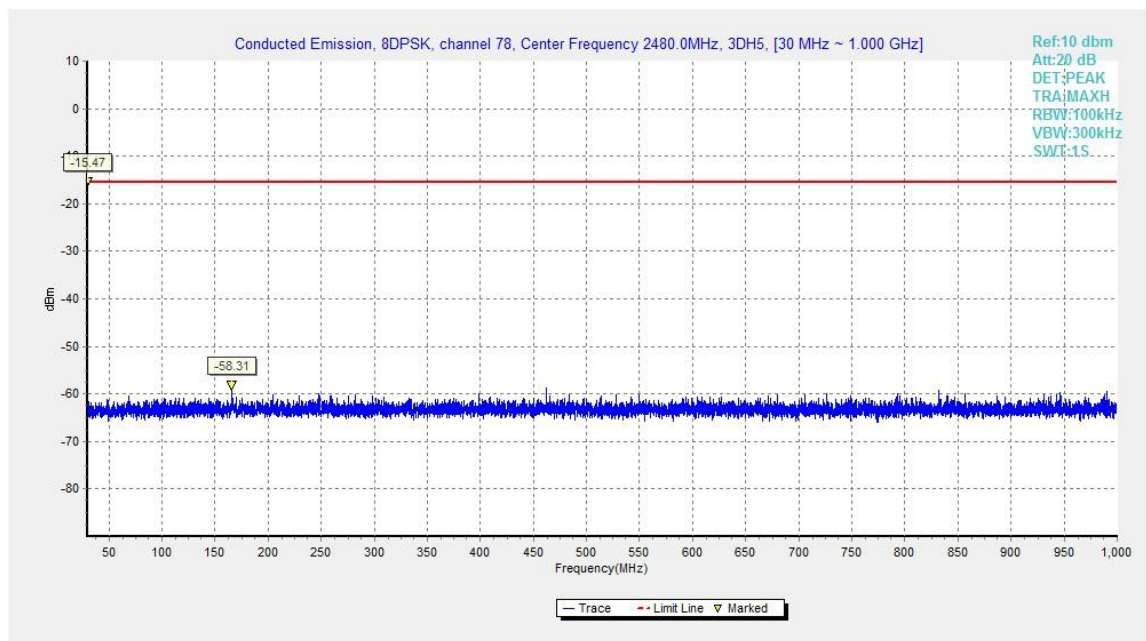


Fig.54. Conducted spurious emission: 8DPSK, Channel 78, 30MHz - 1GHz

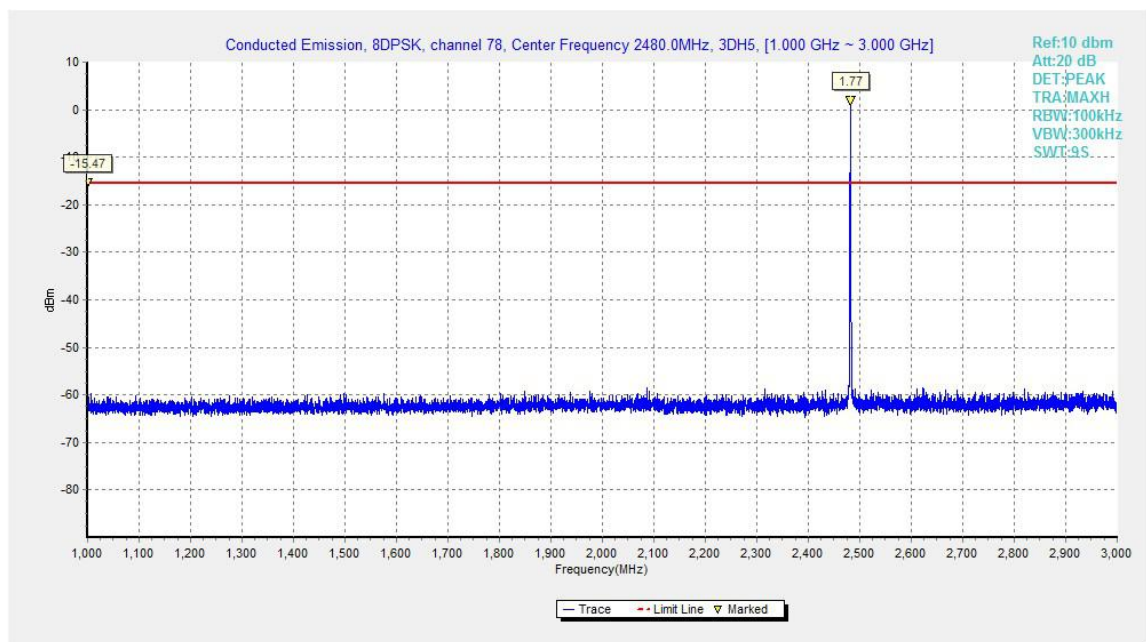


Fig.55. Conducted spurious emission: 8DPSK, Channel 78, 1GHz - 3GHz

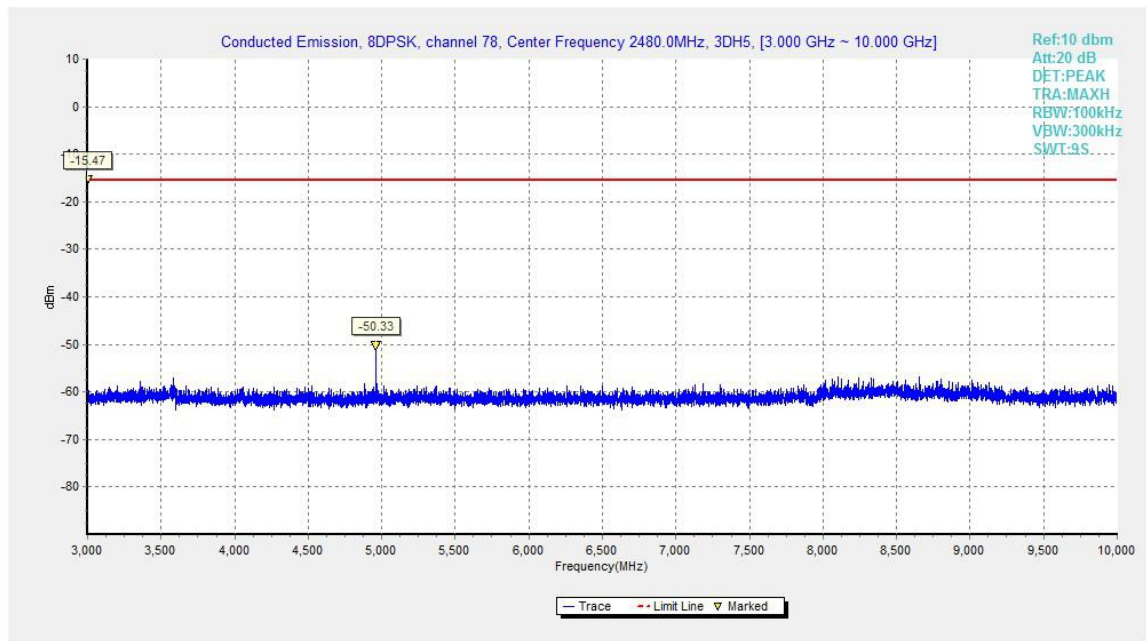


Fig.56. Conducted spurious emission: 8DPSK, Channel 78, 3GHz - 10GHz

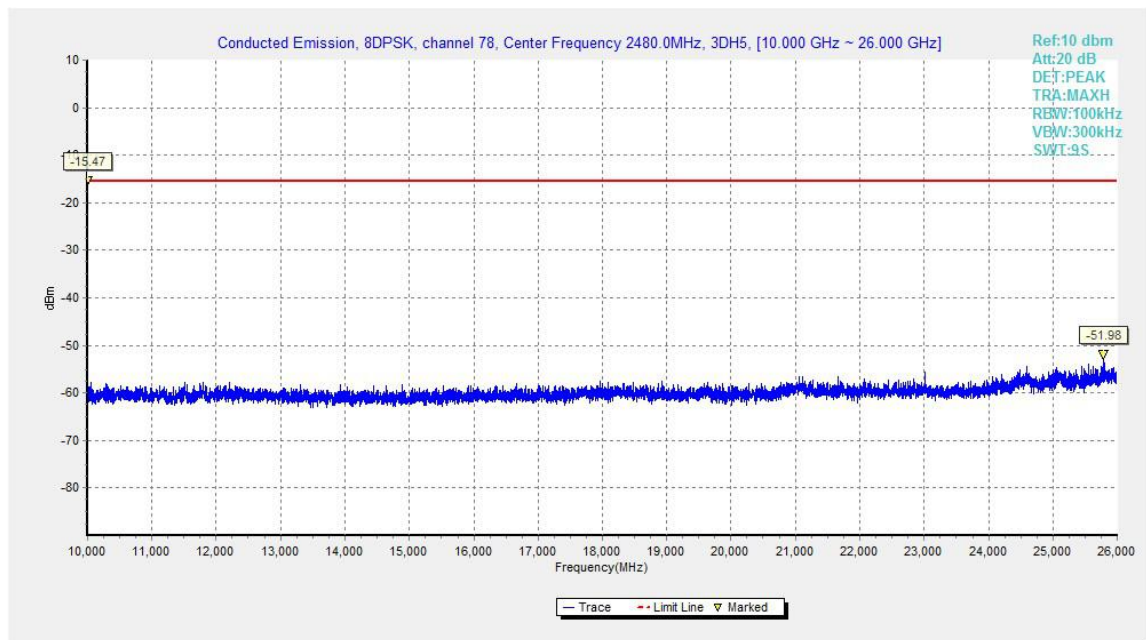


Fig.57. Conducted spurious emission: 8DPSK, Channel 78, 10GHz - 26GHz

A.5. Transmitter Spurious Emission - Radiated

Measurement Limit:

Standard	Limit
FCC 47 CFR Part 15.247, 15.205, 15.209	20dB below peak output power

In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

The measurement is made according to ANSI C63.10

Limit in restricted band:

Frequency of emission (MHz)	Field strength(uV/m)	Field strength(dBuV/m)
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54

Test Condition

The EUT was placed on a non-conductive table. The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and the EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. This maximization process was repeated with the EUT positioned in each of its three orthogonal orientations.

Frequency of emission (MHz)	RBW/VBW	Sweep Time(s)
30-1000	100KHz/300KHz	5
1000-4000	1MHz/3MHz	15
4000-18000	1MHz/3MHz	40
18000-26500	1MHz/3MHz	20

Measurement Results:

Result= $P_{Mea} + ARPL$

For GFSK

Channel	Frequency Range	Test Results	Conclusion
Power	2.38GHz~2.4GHz---L	Fig.58	P
Power	2.45GHz~2.5GHz---H	Fig.59	P

For $\pi/4$ DQPSK

Channel	Frequency Range	Test Results	Conclusion
Power	2.38GHz~2.4GHz---L	Fig.60	P
Power	2.45GHz~2.5GHz---H	Fig.61	P

For 8DPSK

Channel	Frequency Range	Test Results	Conclusion
Power	2.38GHz~2.4GHz---L	Fig.62	P
Power	2.45GHz~2.5GHz---H	Fig.63	P

GFSK Ch 0 - Average

Frequency (MHz)	Measurement Result (dBμV/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBμV)	Limit (dBμV/m)	Margin (dB)	Antenna Pol. (H/V)	Antenna Height (cm)	Turntable angle (deg)
2389.200	46.29	2.9	32.0	11.47	54.0	7.7	H	155	28
2390.000	46.32	2.9	32.0	11.49	54.0	7.7	H	155	74
4804.000	33.30	-35.0	34.1	34.24	54.0	20.7	H	155	140
7206.000	37.90	-32.4	35.8	34.49	54.0	16.1	H	155	8
9608.000	40.87	-29.7	36.7	33.80	54.0	13.1	H	155	80
12010.000	42.16	-30.5	38.9	33.75	54.0	11.8	H	155	243

GFSK Ch 39 - Average

Frequency (MHz)	Measurement Result (dBμV/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBμV)	Limit (dBμV/m)	Margin (dB)	Antenna Pol. (H/V)	Antenna Height (cm)	Turntable angle (deg)
2436.200	46.43	2.9	32.0	11.55	54.0	7.6	H	155	92
2446.500	46.45	2.9	32.0	11.56	54.0	7.6	H	155	115
4882.000	32.77	-35.5	34.1	34.21	54.0	21.2	H	155	135
7323.000	38.23	-31.3	35.8	33.74	54.0	15.8	H	155	156
9764.000	39.92	-31.4	36.9	34.41	54.0	14.1	H	155	180
12205.000	42.84	-28.8	39.0	32.70	54.0	11.2	H	155	204

GFSK Ch 78 - Average

Frequency (MHz)	Measurement Result (dBμV/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBμV)	Limit (dBμV/m)	Margin (dB)	Antenna Pol. (H/V)	Antenna Height (cm)	Turntable angle (deg)
2483.500	50.87	2.9	32.0	15.94	54.0	3.1	H	155	92
2483.600	50.07	2.9	32.0	15.14	54.0	3.9	H	155	267
4960.000	33.37	-34.9	34.1	34.16	54.0	20.6	H	155	296
7440.000	37.42	-32.2	35.8	33.79	54.0	16.6	H	155	314
9920.000	41.06	-29.7	37.1	33.61	54.0	12.9	H	155	90
12400.000	43.40	-30.0	39.1	34.38	54.0	10.6	H	155	112

$\pi/4$ DQPSK Ch 0 - Average

Frequency (MHz)	Measurement Result (dB μ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB μ V)	Limit (dB μ V/m)	Margin (dB)	Antenna Pol. (H/V)	Antenna Height (cm)	Turntable angle (deg)
2389.100	46.26	2.9	32.0	11.43	54.0	7.7	H	155	84
2390.000	46.23	2.9	32.0	11.40	54.0	7.8	H	155	136
4804.000	33.42	-35.0	34.1	34.36	54.0	20.6	H	155	72
7206.000	37.91	-32.4	35.8	34.50	54.0	16.1	H	155	92
9608.000	40.79	-29.7	36.7	33.72	54.0	13.2	H	155	40
12010.000	42.26	-30.5	38.9	33.85	54.0	11.7	H	155	6

$\pi/4$ DQPSK Ch 39 - Average

Frequency (MHz)	Measurement Result (dB μ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB μ V)	Limit (dB μ V/m)	Margin (dB)	Antenna Pol. (H/V)	Antenna Height (cm)	Turntable angle (deg)
2436.400	46.44	2.9	32.0	11.56	54.0	7.6	H	155	46
2446.400	46.41	2.9	32.0	11.52	54.0	7.6	H	155	70
4882.000	32.85	-35.5	34.1	34.29	54.0	21.2	H	155	92
7323.000	38.33	-31.3	35.8	33.85	54.0	15.7	H	155	268
9764.000	39.94	-31.4	36.9	34.43	54.0	14.1	H	155	292
12205.000	42.97	-28.8	39.0	32.83	54.0	11.0	H	155	316

$\pi/4$ DQPSK Ch 78 - Average

Frequency (MHz)	Measurement Result (dB μ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB μ V)	Limit (dB μ V/m)	Margin (dB)	Antenna Pol. (H/V)	Antenna Height (cm)	Turntable angle (deg)
2483.500	49.53	2.9	32.0	14.60	54.0	4.5	H	155	28
2483.600	49.44	2.9	32.0	14.52	54.0	4.6	H	155	74
4960.000	33.45	-34.9	34.1	34.24	54.0	20.5	H	155	140
7440.000	37.54	-32.2	35.8	33.92	54.0	16.5	H	155	8
9920.000	41.13	-29.7	37.1	33.69	54.0	12.9	H	155	80
12400.000	43.52	-30.0	39.1	34.50	54.0	10.5	H	155	243

8DPSK Ch 0 - Average

Frequency (MHz)	Measurement Result (dBμV/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBμV)	Limit (dBμV/m)	Margin (dB)	Antenna Pol. (H/V)	Antenna Height (cm)	Turntable angle (deg)
2388.500	46.32	2.9	32.0	11.49	54.0	7.7	H	155	170
2390.000	46.26	2.9	32.0	11.44	54.0	7.7	H	155	150
4804.000	33.42	-35.0	34.1	34.35	54.0	20.6	H	155	20
7206.000	37.94	-32.4	35.8	34.53	54.0	16.1	H	155	180
9608.000	40.93	-29.7	36.7	33.86	54.0	13.1	H	155	202
12010.000	42.26	-30.5	38.9	33.85	54.0	11.7	H	155	8

8DPSK Ch 39 - Average

Frequency (MHz)	Measurement Result (dBμV/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBμV)	Limit (dBμV/m)	Margin (dB)	Antenna Pol. (H/V)	Antenna Height (cm)	Turntable angle (deg)
2436.400	46.47	2.9	32.0	11.60	54.0	7.5	H	155	25
2446.400	46.46	2.9	32.0	11.57	54.0	7.5	H	155	49
4882.000	32.86	-35.5	34.1	34.30	54.0	21.1	H	155	4
7323.000	38.38	-31.3	35.8	33.89	54.0	15.6	H	155	6
9764.000	39.90	-31.4	36.9	34.38	54.0	14.1	H	155	25
12205.000	42.99	-28.8	39.0	32.86	54.0	11.0	H	155	186

8DPSK Ch 78 - Average

Frequency (MHz)	Measurement Result (dBμV/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBμV)	Limit (dBμV/m)	Margin (dB)	Antenna Pol. (H/V)	Antenna Height (cm)	Turntable angle (deg)
2483.500	49.22	2.9	32.0	14.29	54.0	4.8	H	155	4
2483.600	48.68	2.9	32.0	13.76	54.0	5.3	H	155	2
4960.000	33.85	-34.9	34.1	34.63	54.0	20.2	H	155	25
7440.000	37.56	-32.2	35.8	33.94	54.0	16.4	H	155	350
9920.000	41.14	-29.7	37.1	33.69	54.0	12.9	H	155	92
12400.000	43.36	-30.0	39.1	34.33	54.0	10.6	H	155	85

GFSK Ch 0 – Peak

Frequency (MHz)	Measurement Result (dBμV/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBμV)	Limit (dBμV/m)	Margin (dB)	Antenna Pol. (H/V)	Antenna Height (cm)	Turntable angle (deg)
2382.478	60.03	2.9	32.0	25.22	74.0	14.0	H	155	22
2386.160	59.81	2.9	32.0	24.99	74.0	14.2	H	155	66
4804.000	41.02	-35.0	34.1	41.96	74.0	33.0	V	155	132
7206.000	45.00	-32.4	35.8	41.59	74.0	29.0	H	155	0
9608.000	46.53	-29.7	36.7	39.46	74.0	27.5	V	155	88
12010.000	48.74	-30.5	38.9	40.33	74.0	25.3	V	155	242

GFSK Ch 39 - Peak

Frequency (MHz)	Measurement Result (dBμV/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBμV)	Limit (dBμV/m)	Margin (dB)	Antenna Pol. (H/V)	Antenna Height (cm)	Turntable angle (deg)
2377.400	48.17	-26.5	32.0	42.70	74.0	25.8	H	155	88
2510.600	47.51	-26.5	32.0	42.00	74.0	26.5	H	155	110
4882.000	41.05	-35.5	34.1	42.50	74.0	32.9	H	155	132
7323.000	45.07	-31.3	35.8	40.58	74.0	28.9	V	155	154
9764.000	46.34	-31.4	36.9	40.82	74.0	27.7	V	155	176
12205.000	48.94	-28.8	39.0	38.81	74.0	25.1	H	155	198

GFSK Ch 78 - Peak

Frequency (MHz)	Measurement Result (dBμV/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBμV)	Limit (dBμV/m)	Margin (dB)	Antenna Pol. (H/V)	Antenna Height (cm)	Turntable angle (deg)
2494.560	60.70	2.9	32.0	25.77	74.0	13.3	H	155	88
2498.230	60.26	2.9	32.0	25.33	74.0	13.7	H	155	264
4960.000	41.43	-34.9	34.1	42.22	74.0	32.6	V	155	286
7440.000	45.11	-32.2	35.8	41.48	74.0	28.9	H	155	308
9920.000	47.76	-29.7	37.1	40.31	74.0	26.2	V	155	88
12400.000	48.41	-30.0	39.1	39.39	74.0	25.6	V	155	110

$\pi/4$ DQPSK Ch 0 - Peak

Frequency (MHz)	Measurement Result (dB μ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB μ V)	Limit (dB μ V/m)	Margin (dB)	Antenna Pol. (H/V)	Antenna Height (cm)	Turntable angle (deg)
2385.124	60.13	2.9	32.0	25.31	74.0	13.9	H	155	88
2389.280	60.21	2.9	32.0	25.39	74.0	13.8	H	155	132
4804.000	41.09	-35.0	34.1	42.02	74.0	32.9	V	155	66
7206.000	45.33	-32.4	35.8	41.92	74.0	28.7	H	155	88
9608.000	46.59	-29.7	36.7	39.52	74.0	27.4	V	155	44
12010.000	48.86	-30.5	38.9	40.45	74.0	25.1	V	155	0

$\pi/4$ DQPSK Ch 39 - Peak

Frequency (MHz)	Measurement Result (dB μ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB μ V)	Limit (dB μ V/m)	Margin (dB)	Antenna Pol. (H/V)	Antenna Height (cm)	Turntable angle (deg)
2370.200	47.47	-27.0	32.0	42.50	74.0	26.5	H	155	44
2516.800	47.83	-26.6	32.0	42.45	74.0	26.2	H	155	66
4882.000	41.12	-35.5	34.1	42.57	74.0	32.9	H	155	88
7323.000	45.11	-31.3	35.8	40.62	74.0	28.9	H	155	264
9764.000	46.44	-31.4	36.9	40.92	74.0	27.6	H	155	286
12205.000	48.96	-28.8	39.0	38.82	74.0	25.0	H	155	308

$\pi/4$ DQPSK Ch 78 - Peak

Frequency (MHz)	Measurement Result (dB μ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB μ V)	Limit (dB μ V/m)	Margin (dB)	Antenna Pol. (H/V)	Antenna Height (cm)	Turntable angle (deg)
2483.540	61.88	2.9	32.0	26.94	74.0	12.1	H	155	22
2483.770	61.04	2.9	32.0	26.10	74.0	13.0	H	155	66
4960.000	41.54	-34.9	34.1	42.33	74.0	32.5	V	155	132
7440.000	45.32	-32.2	35.8	41.70	74.0	28.7	H	155	0
9920.000	47.77	-29.7	37.1	40.32	74.0	26.2	V	155	88
12400.000	48.41	-30.0	39.1	39.38	74.0	25.6	V	155	242

8DPSK Ch 0 - Peak

Frequency (MHz)	Measurement Result (dBμV/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBμV)	Limit (dBμV/m)	Margin (dB)	Antenna Pol. (H/V)	Antenna Height (cm)	Turntable angle (deg)
2383.836	60.06	2.9	32.0	25.24	74.0	13.9	H	155	176
2385.880	60.23	2.9	32.0	25.41	74.0	13.8	H	155	154
4804.000	41.28	-35.0	34.1	42.22	74.0	32.7	V	155	22
7206.000	45.37	-32.4	35.8	41.96	74.0	28.6	V	155	176
9608.000	46.87	-29.7	36.7	39.80	74.0	27.1	H	155	198
12010.000	48.93	-30.5	38.9	40.52	74.0	25.1	H	155	0

8DPSK Ch 39 - Peak

Frequency (MHz)	Measurement Result (dBμV/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBμV)	Limit (dBμV/m)	Margin (dB)	Antenna Pol. (H/V)	Antenna Height (cm)	Turntable angle (deg)
2377.600	47.35	-26.5	32.0	41.86	74.0	26.7	H	155	22
2502.800	47.51	-26.3	32.0	41.83	74.0	26.5	V	155	44
4882.000	41.37	-35.5	34.1	42.81	74.0	32.6	H	155	0
7323.000	45.14	-31.3	35.8	40.65	74.0	28.9	H	155	0
9764.000	46.44	-31.4	36.9	40.93	74.0	27.6	H	155	22
12205.000	48.97	-28.8	39.0	38.83	74.0	25.0	H	155	176

8DPSK Ch 78 - Peak

Frequency (MHz)	Measurement Result (dBμV/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBμV)	Limit (dBμV/m)	Margin (dB)	Antenna Pol. (H/V)	Antenna Height (cm)	Turntable angle (deg)
2484.580	60.36	2.9	32.0	25.43	74.0	13.6	H	155	0
2499.470	60.70	2.9	32.0	25.76	74.0	13.3	H	155	0
4960.000	41.28	-34.9	34.1	42.07	74.0	32.7	V	155	22
7440.000	45.20	-32.2	35.8	41.57	74.0	28.8	V	155	352
9920.000	47.66	-29.7	37.1	40.21	74.0	26.3	V	155	88
12400.000	48.53	-30.0	39.1	39.51	74.0	25.5	V	155	88

Conclusion: PASS

Test graphs as below:

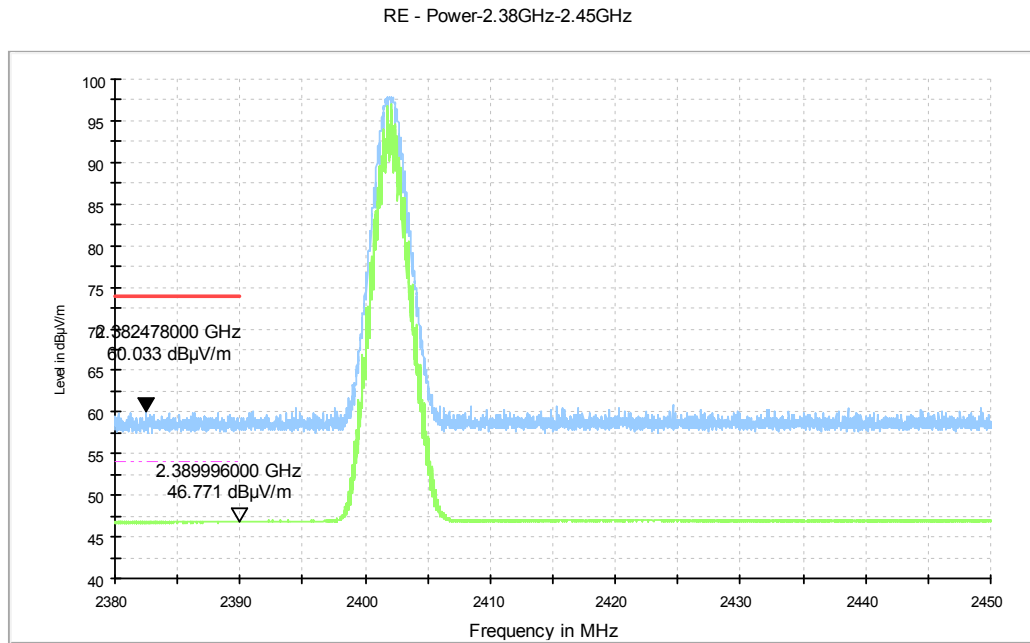


Fig.58. Radiated emission (Power): GFSK, low channel

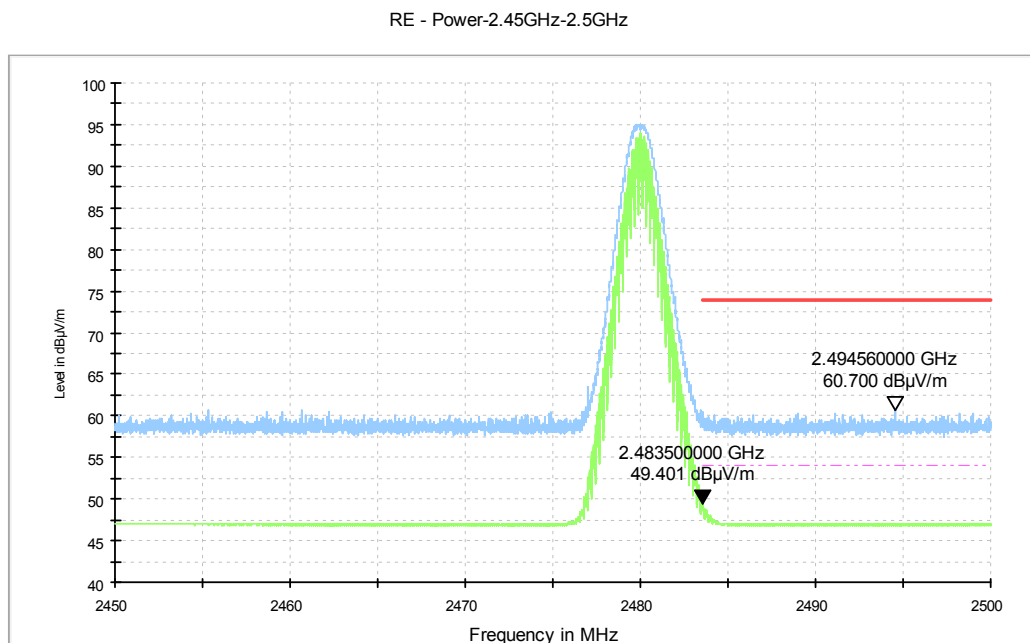


Fig.59. Radiated emission (Power) GFSK, high channel

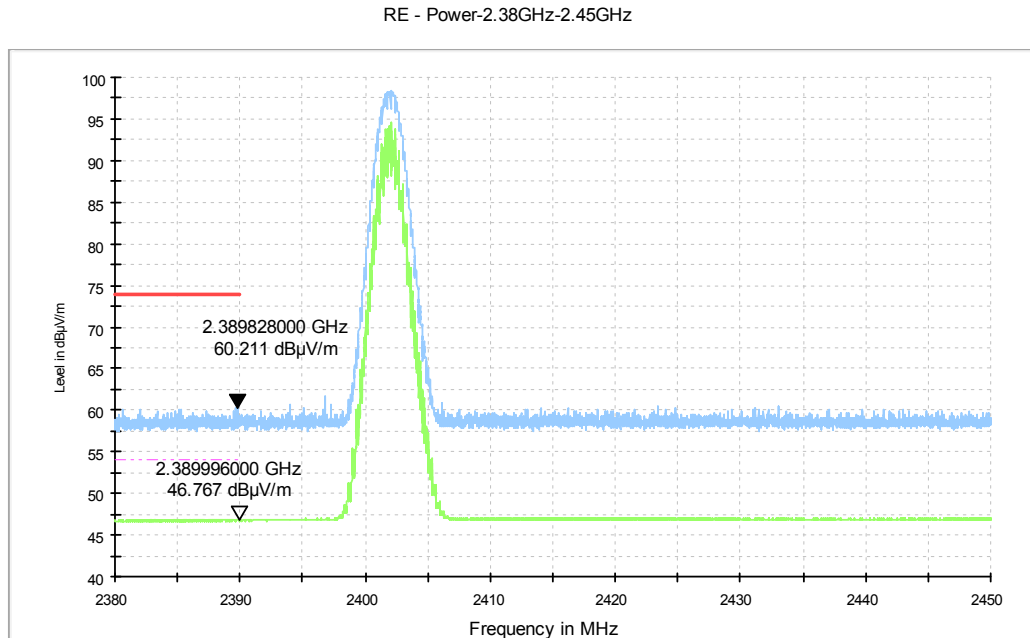


Fig.60. Radiated emission (Power): $\pi/4$ DQPSK, low channel

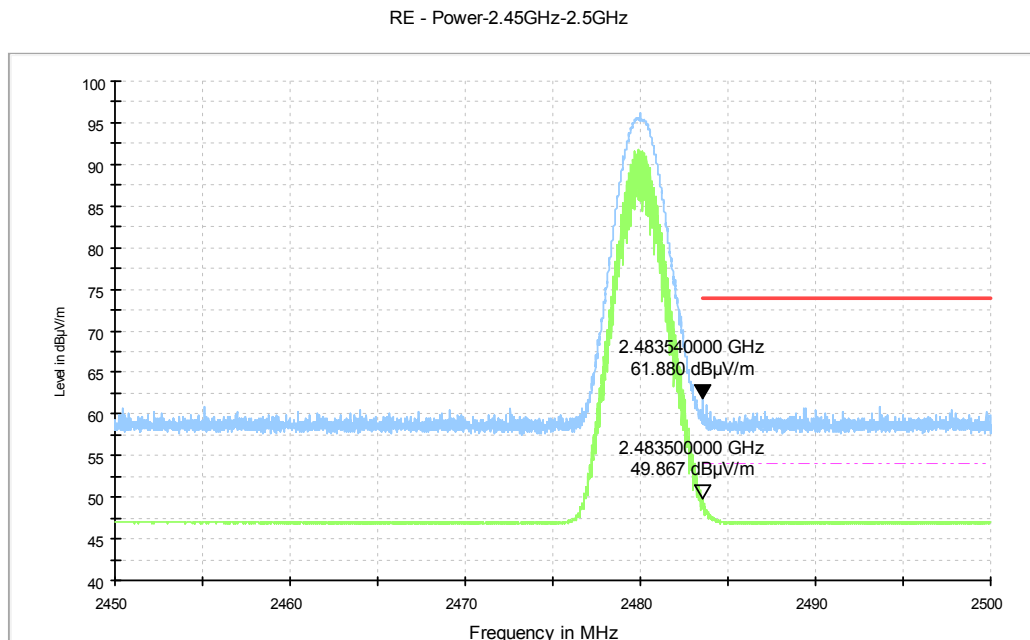


Fig.61. Radiated emission (Power): $\pi/4$ DQPSK, high channel

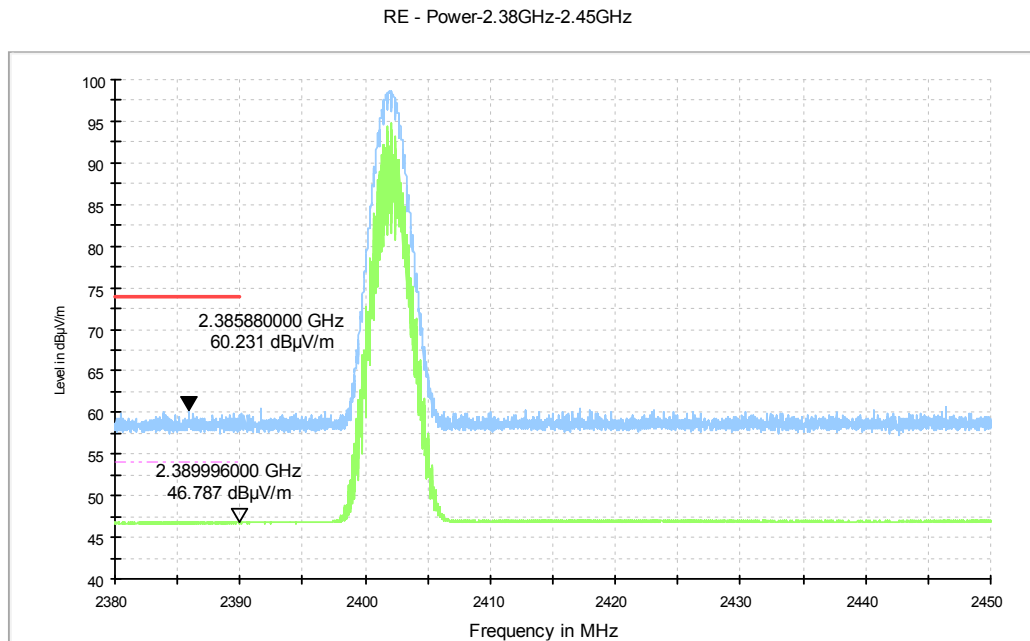


Fig.62. Radiated emission (Power): 8DPSK, low channel

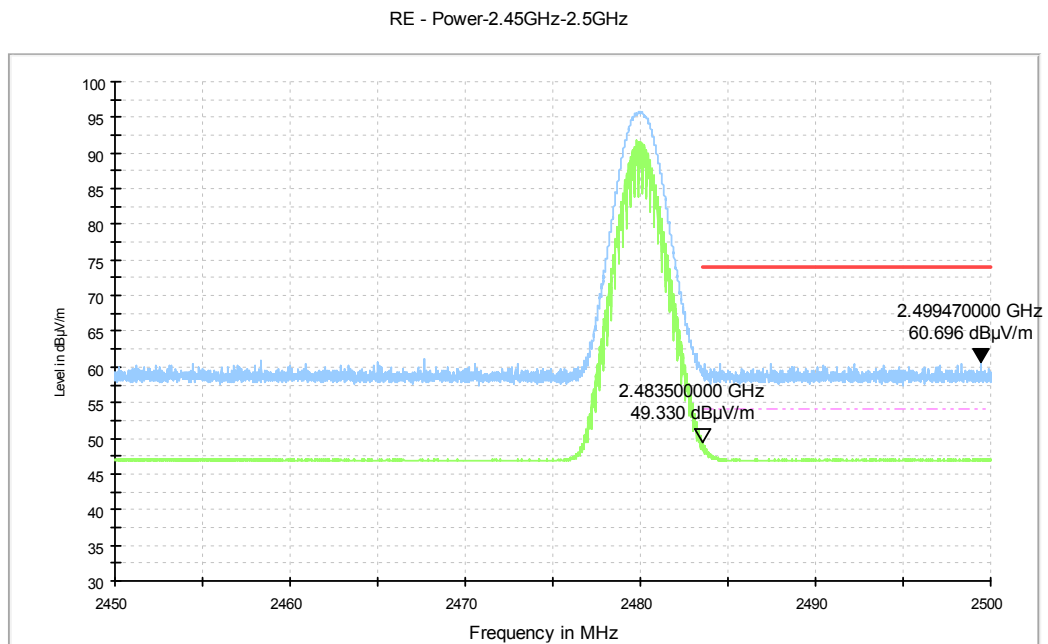


Fig.63. Radiated emission (Power): 8DPSK, high channel

A.6. Time of Occupancy (Dwell Time)

Method of Measurement: See ANSI C63.10-clause 7.8.4

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

- Span = zero span, centered on a hopping channel
- RBW = 1 MHz
- VBW $\geq$ RBW
- Sweep = as necessary to capture the entire dwell time per hopping channel
- Detector function = peak
- Trace = max hold

Measure a pulse time in time domain at middle frequency and then count the hopping number in 31.6s(which equals with 0.4 multiply 79) of middle frequency ,then multiply the pulse time and hopping number and record them.

Measurement Limit:

Standard	Limit (ms)
FCC 47 CFR Part 15.247(a) (1)(iii)	< 400

Measurement Result:

For GFSK

Channel	Packet	Dwell Time (ms)		Conclusion
39	DH1	Fig.64	121.59	P
		Fig.65		
	DH3	Fig.66	173.54	P
		Fig.67		
	DH5	Fig.68	190.42	P
		Fig.69		

For $\pi/4$ DQPSK

Channel	Packet	Dwell Time (ms)		Conclusion
39	DH1	Fig.70	123.43	P
		Fig.71		
	DH3	Fig.72	177.01	P
		Fig.73		
	DH5	Fig.74	176.11	P
		Fig.75		

For 8DPSK

Channel	Packet	Dwell Time (ms)		Conclusion
39	DH1	Fig.76	123.48	P
		Fig.77		

	DH3	Fig.78	157.24	P
		Fig.79		
	DH5	Fig.80	184.91	P
		Fig.81		

Conclusion: PASS

Test graphs as below:

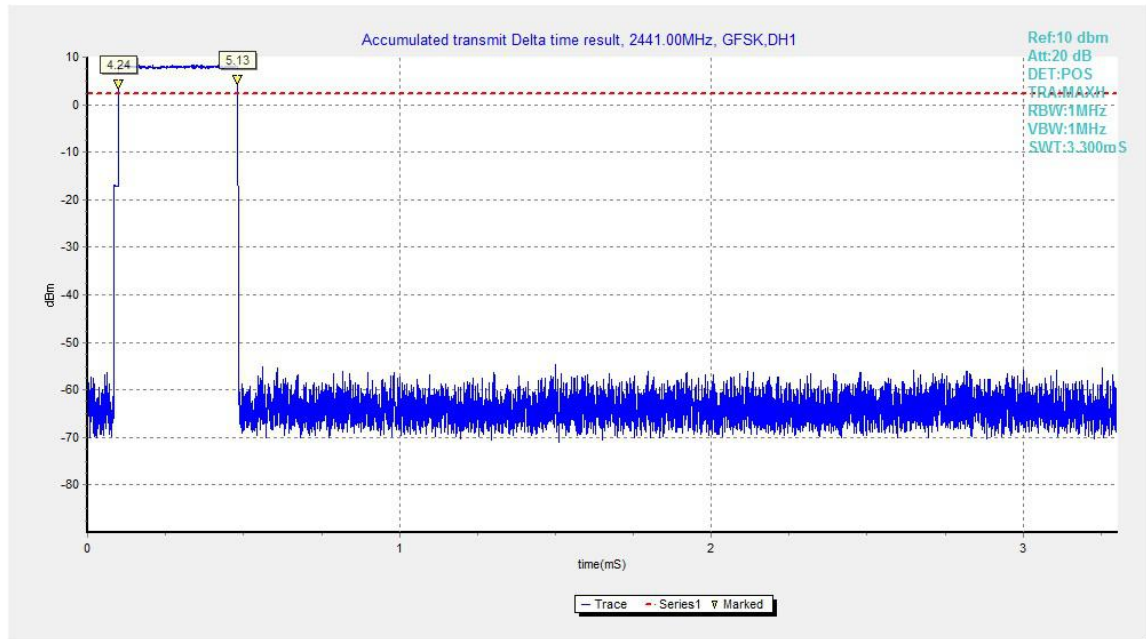


Fig.64. Time of occupancy (Dwell Time): Channel 39, Packet DH1

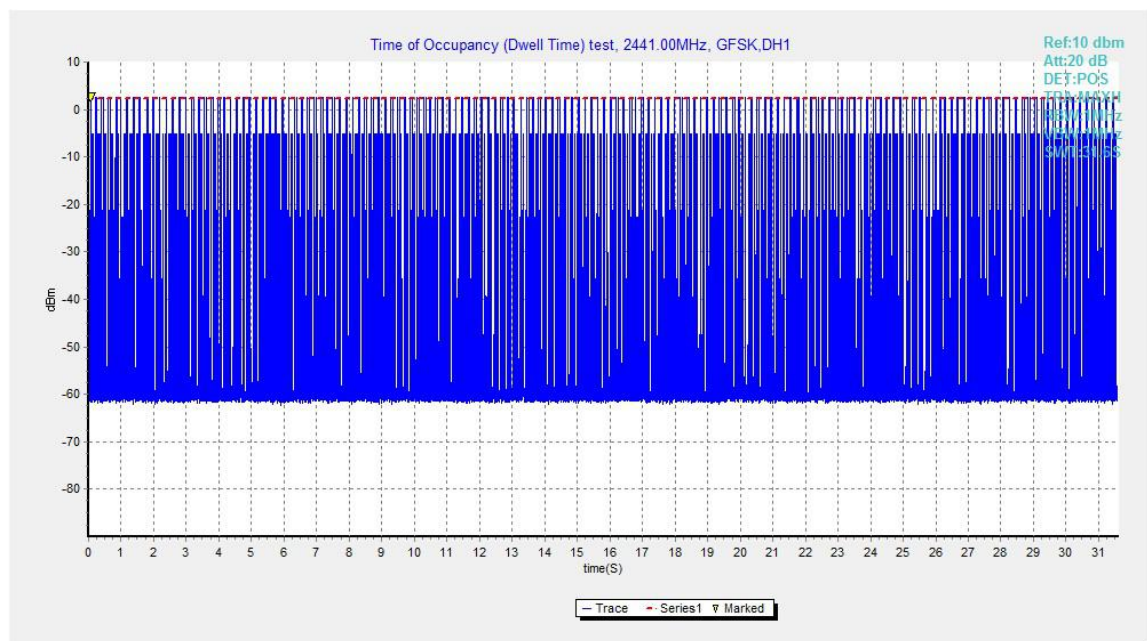


Fig.65. Number of Transmissions Measurement: Channel 39,Packet DH1

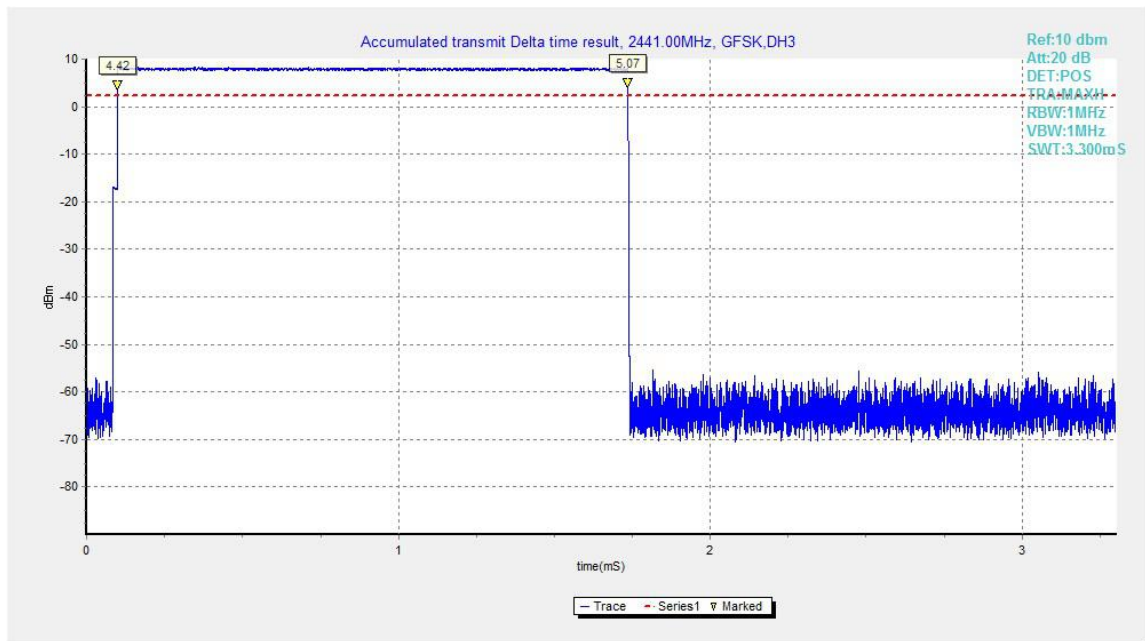


Fig.66. Time of occupancy (Dwell Time): Channel 39, Packet DH3

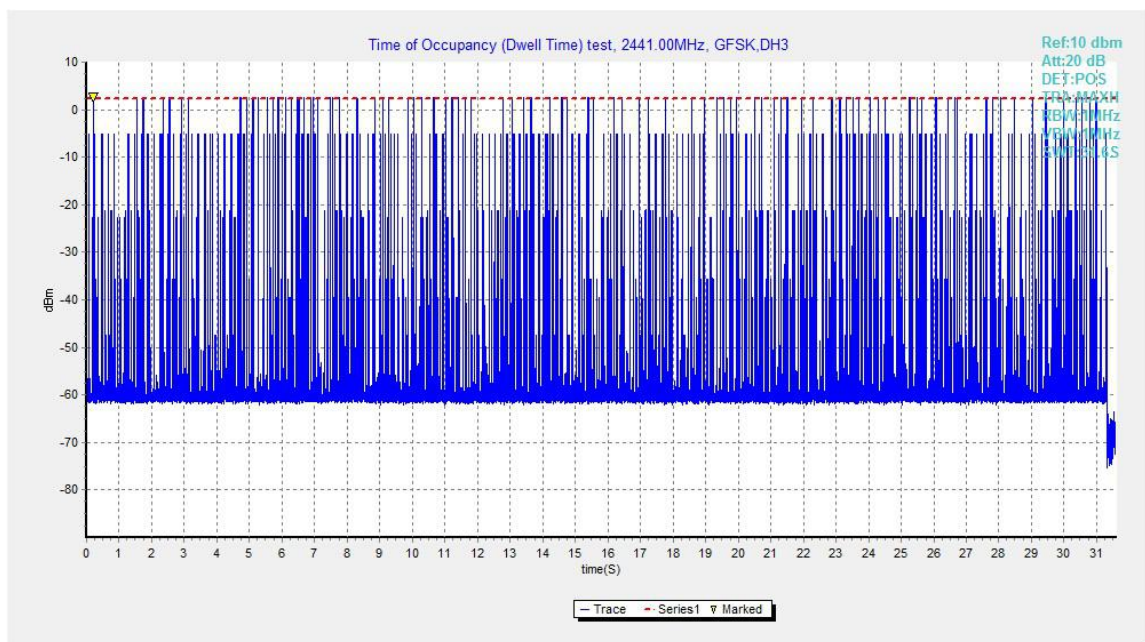


Fig.67. Number of Transmissions Measurement: Channel 39,Packet DH3