

RF MEASUREMENT REPORT

FCC ID: XMR2023RG525FNA
Application: Quectel Wireless Solutions Co., Ltd
Product: 5G Sub-6 GHz LGA Module
Model No.: RG525F-NA
Brand Name: Quectel
FCC Rule Part(s): Part90 Subpart R
Test Procedure(s): ANSI C63.26: 2015
Result: Complies
Received Date: 2022-11-14
Test Date: 2022-11-24 ~ 2023-02-07

Reviewed By:

Sunny Sun

Approved By:

Robin Wu



The test results relate only to the samples tested.

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.26-2015. Test results reported herein relate only to the item(s) tested.

The test report shall not be reproduced except in full without the written approval of MRT Technology (Suzhou) Co., Ltd.

Revision History

Report No.	Version	Description	Issue Date	Note
2211RSU034-U7	Rev. 01	Initial Report	2023-02-23	Valid

CONTENTS

Description	Page
1. General Information.....	5
1.1. Applicant.....	5
1.2. Manufacturer.....	5
1.3. Testing Facility.....	5
1.4. Product Information.....	6
1.5. Radio Specification under Test.....	6
1.6. Description of Available Antennas.....	7
1.7. Test Methodology.....	7
1.8. Device Capabilities.....	8
2. Test Configuration.....	9
2.1. Test System Connection Diagram.....	9
2.2. Test Environment Condition.....	9
3. Measuring Instrument.....	10
4. Decision Rules and Measurement Uncertainty.....	12
4.1. Decision Rules.....	12
4.2. Measurement Uncertainty.....	12
5. Test Result.....	13
5.1. Summary.....	13
5.2. Occupied Bandwidth Measurement.....	14
5.2.1. Test Limit.....	14
5.2.2. Test Procedure.....	14
5.2.3. Test Setting.....	14
5.2.4. Test Setup.....	14
5.2.5. Test Result.....	14
5.3. Frequency Stability Measurement.....	15
5.3.1. Test Limit.....	15
5.3.2. Test Procedure.....	15
5.3.3. Test Setting.....	15
5.3.4. Test Setup.....	16
5.3.5. Test Result.....	16
5.4. Equivalent Isotropically Radiated Power Measurement.....	17
5.4.1. Test Limit.....	17
5.4.2. Test Procedure.....	17
5.4.3. Test Setting.....	17

5.4.4.	Test Setup.....	17
5.4.5.	Test Result.....	18
5.5.	Band Edge Measurement.....	19
5.5.1.	Test Limit.....	19
5.5.2.	Test Procedure.....	19
5.5.3.	Test Setting.....	19
5.5.4.	Test Setup.....	20
5.5.5.	Test Result.....	20
5.6.	Emission Mask Measurement.....	21
5.6.1.	Test Limit.....	21
5.6.2.	Test Procedure.....	21
5.6.3.	Test Setting.....	21
5.6.4.	Test Setup.....	22
5.6.5.	Test Result.....	22
5.7.	Conducted Spurious Emissions Measurement.....	23
5.7.1.	Test Limit.....	23
5.7.2.	Test Procedure.....	23
5.7.3.	Test Setting.....	23
5.7.4.	Test Setup.....	24
5.7.5.	Test Result.....	24
5.8.	Radiated Spurious Emissions Measurement.....	25
5.8.1.	Test Limit.....	25
5.8.2.	Test Procedure.....	25
5.8.3.	Test Setting.....	25
5.8.4.	Test Setup.....	26
5.8.5.	Test Result.....	26
Appendix A - Test Result.....		27
A.1	Occupied Bandwidth Test Result.....	27
A.2	Frequency Stability Test Result.....	30
A.3	Equivalent Isotropically Radiated Power Test Result.....	31
A.4	Band Edge Test Result.....	36
A.5	Emission Mask Test Result.....	38
A.6	Conducted Spurious Emissions Test Result.....	41
A.7	Radiated Spurious Emissions Test Result.....	43
Appendix B - Test Setup Photograph.....		45
Appendix C - EUT Photograph.....		46

1. General Information

1.1. Applicant

Quectel Wireless Solutions Co., Ltd

Building 5, Shanghai Business Park Phase III (Area B), No.1016 Tianlin Road, Minhang District, Shanghai, China 200233

1.2. Manufacturer

Quectel Wireless Solutions Co., Ltd

Building 5, Shanghai Business Park Phase III (Area B), No.1016 Tianlin Road, Minhang District, Shanghai, China 200233

1.3. Testing Facility

<input checked="" type="checkbox"/>	Test Site – MRT Suzhou Laboratory
Laboratory Location (Suzhou - Wuzhong) D8 Building, No.2 Tian’edang Rd., Wuzhong Economic Development Zone, Suzhou, China	
Laboratory Location (Suzhou - SIP) 4b Building, Liando U Valley, No.200 Xingpu Rd., Shengpu Town, Suzhou Industrial Park, China	
Laboratory Accreditations	
A2LA: 3628.01 CNAS: L10551 FCC: CN1166 ISED: CN0001 VCCI: <input type="checkbox"/> R-20025 <input type="checkbox"/> G-20034 <input type="checkbox"/> C-20020 <input type="checkbox"/> T-20020 <input type="checkbox"/> R-20141 <input type="checkbox"/> G-20134 <input type="checkbox"/> C-20103 <input type="checkbox"/> T-20104	
<input type="checkbox"/>	Test Site – MRT Shenzhen Laboratory
Laboratory Location (Shenzhen) 1G, Building A, Junxiangda Building, Zhongshanyuan Road West, Nanshan District, Shenzhen, China	
Laboratory Accreditations	
A2LA: 3628.02 CNAS: L10551 FCC: CN1284 ISED: CN0105	
<input type="checkbox"/>	Test Site – MRT Taiwan Laboratory
Laboratory Location (Taiwan) No. 38, Fuxing 2nd Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.)	
Laboratory Accreditations	
TAF: L3261-190725 FCC: 291082, TW3261 ISED: TW3261	

1.4. Product Information

Product Name	5G Sub-6 GHz LGA Module
Model No.	RG525F-NA
Brand Name	Quectel
IMEI	Conducted Measurement 1: 860465060013152 Conducted Measurement 2: 860465060012444 Radiated Measurement: 860465060011842
E-UTRA Band	Band 2, 4, 5, 7, 12, 13, 14, 17, 25, 26, 30, 38, 41, 42, 43, 48, 66, 71
5G NR Band	n2, n5, n7, n12, n13, n14, n25, n26, n30, n38, n41, n48, n66, n71, n77, n78
Operating Temperature	-30 ~ 75 °C
Power Type	3.3 ~ 4.4Vdc, typical 3.8Vdc
Remark: The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.	

1.5. Radio Specification under Test

Single Band	n14
EN-DC Band	n14
FDD Tx Frequency Range	788 ~ 798 MHz
FDD Rx Frequency Range	758 ~ 768 MHz
Support Bandwidth	5, 10MHz
SCS for NR cell	FDD Band: 15kHz
Modulation	UL & DL up to 256QAM

1.6. Description of Available Antennas

Technology	Frequency Range (MHz)	Antenna Type	Max Peak Gain (dBi)
n2	1850 ~ 1910	Dipole	1.37
n5	824 ~ 849		1.20
n7	2500 ~ 2570		1.75
n12	699 ~ 716		-2.60
n13	777 ~ 787		-0.50
n14	788 ~ 798		0.00
n25	1850 ~ 1915		1.37
n26	814 ~ 849		1.20
n30	2305 ~ 2315		1.10
n38	2570 ~ 2620		1.60
n41	2496 ~ 2690		1.80
n48	3550 ~ 3700		0.60
n66	1710 ~ 1780		1.37
n71	663 ~ 698		-2.60
n77	3450 ~ 3550		0.60
	3700 ~ 3980		
n78	3450 ~ 3550		0.60
	3700 ~ 3800		

Note: All antenna information (Antenna type and Peak Gain) is provided by the manufacturer.

1.7. Test Methodology

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ANSI C63.26:2015
- FCC CFR 47 Part 90
- FCC KDB 971168 D01 v03r01: Power Meas License Digital Systems
- FCC KDB 971168 D02 v02r01: Misc Rev Approv License Devices
- FCC KDB 412172 D01 v01r01: Determining ERP and EIRP

1.8. Device Capabilities


PI/2 BPSK modulation applied for 5G NR band frequencies and has the same tune up power as QPSK modulations.

The worst-case scenario for all measurements is based on an engineering evaluation and QPSK was observed as the worst one and set for all conducted and radiated. Output power measurements were measured on PI/2 BPSK, QPSK, 16QAM, 64QAM, 256QAM modulations.

The SA mode and EN-DC mode power were investigated, and SA mode was found to be the worst case. This report only provides coexistence spurious emission for EN-DC mode.

2. Test Configuration

2.1. Test System Connection Diagram

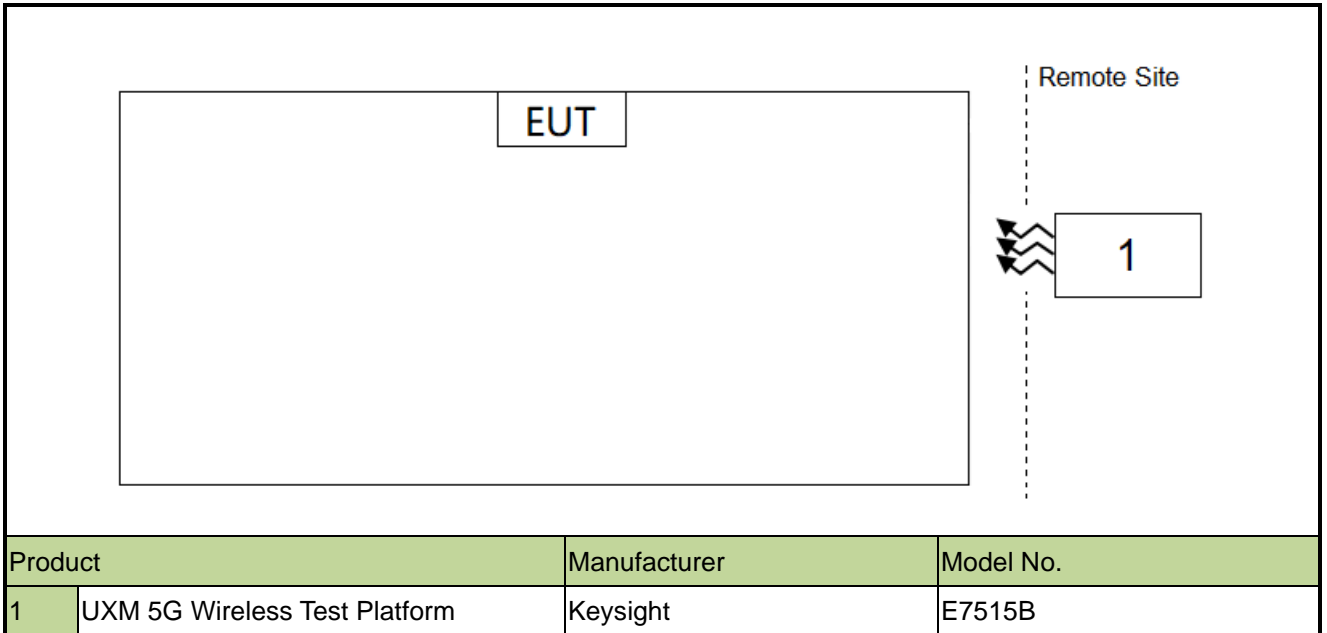

2.2. Test Environment Condition

Ambient Temperature	15 ~ 35°C
Relative Humidity	20% ~ 75%RH

3. Measuring Instrument

Instrument	Manufacturer	Model No.	Asset No.	Cali. Interval	Cali. Due Date	Test Site
Communication Tester	R&S	CMU 200	MRTSUE06009	1 year	2023-08-23	SIP-SR1
Communication Tester	R&S	CMW500	MRTSUE06243	1 year	2023-10-08	SIP-SR1
Signal Generator	Keysight	E8257D	MRTSUE06453	1 year	2023-06-01	SIP-SR1
Thermohygrometer	testo	622	MRTSUE06629	1 year	2023-01-03	SIP-SR1
Thermohygrometer	testo	622	MRTSUE06629	1 year	2024-01-03	SIP-SR1
5G Wireless Test Platform	Keysight	E7515B	MRTSUE06903	1 year	2023-10-25	SIP-SR1
Signal Generator	Keysight	E8257D	MRTSUE06904	1 year	2023-10-25	SIP-SR1
DC POWER MODULE	Keysight	N6743B	MRTSUE06905	N/A	N/A	SIP-SR1
DC POWER MODULE	Keysight	N6743B	MRTSUE06906	N/A	N/A	SIP-SR1
Low-Profile Modular Power System Mainframe	Keysight	N6700C	MRTSUE06907	N/A	N/A	SIP-SR1
FR1 Switching Unit	Keysight	C8880A	MRTSUE06908	N/A	N/A	SIP-SR1
Signal Analyzer	Keysight	N9021B	MRTSUE06915	1 year	2022-12-28	SIP-SR1
Signal Analyzer	Keysight	N9021B	MRTSUE06915	1 year	2023-12-28	SIP-SR1
Temperature Chamber	BAOYT	BYG-80CL	MRTSUE06932	1 year	2023-02-27	SIP-SR1
Shielding Room	MIX-BEP	SIP-SR1	MRTSUE06948	N/A	N/A	SIP-SR1
TRILOG Antenna	Schwarzbeck	VULB 9162	MRTSUE06022	1 year	2023-05-20	WZ-AC2
Loop Antenna	Schwarzbeck	FMZB 1519	MRTSUE06025	1 year	2023-09-29	WZ-AC2
EMI Test Receiver	Agilent	N9038A	MRTSUE06125	1 year	2023-06-04	WZ-AC2
Thermohygrometer	Mingle	ETH529	MRTSUE06170	1 year	2022-11-27	WZ-AC2
Thermohygrometer	Mingle	ETH529	MRTSUE06170	1 year	2023-11-27	WZ-AC2
Horn Antenna	Schwarzbeck	BBHA 9120D	MRTSUE06171	1 year	2023-10-13	WZ-AC2
Preamplifier	Schwarzbeck	BBV 9718	MRTSUE06176	1 year	2023-05-08	WZ-AC2
Anechoic Chamber	RIKEN	WZ-AC2	MRTSUE06213	1 year	2023-04-21	WZ-AC2
Horn Antenna	ETS	3117	MRTSUE06257	1 year	2023-09-18	WZ-AC2
Horn Antenna	Schwarzbeck	BBHA 9170	MRTSUE06597	1 year	2023-11-05	WZ-AC2
Preamplifier	EMCI	EMC184045SE	MRTSUE06640	1 year	2023-01-12	WZ-AC2
Preamplifier	EMCI	EMC184045SE	MRTSUE06640	1 year	2024-01-12	WZ-AC2
Preamplifier	EMCI	EMC051845SE	MRTSUE06987	1 year	2023-09-08	WZ-AC2
Thermohygrometer	testo	608-H1	MRTSUE11038	1 year	2023-11-01	WZ-AC2
Directional Coupler	ar	DC7200A	MRTSUE06147	N/A	N/A	SIP
Directional Coupler	ar	DC6080A	MRTSUE06148	N/A	N/A	SIP
Directional Coupler	narda	4226-10	MRTSUE06564	1 year	2023-10-10	SIP
Directional Coupler	PULSAR	CS10-23-436/20	MRTSUE06846	1 year	2023-06-02	SIP
Directional Coupler	PULSAR	CS10-23-436/20	MRTSUE06848	1 year	2023-06-02	SIP

Directional Coupler	MVE	MVE4912-10	MRTSUE07052	1 year	2023-08-25	SIP
Power Divider	MVE	MVE8610	MRTSUE07038	1 year	2023-08-24	SIP
Power Divider	MVE	MVE8577	MRTSUE06745	1 year	2023-06-13	SIP
Attenuator	MVE	MVE2213	MRTSUE11055	1 year	2023-06-09	SIP
Attenuator	MVE	MVE2213	MRTSUE11056	1 year	2023-06-09	SIP
Attenuator	MVE	MVE2213	MRTSUE11057	1 year	2023-06-09	SIP
Attenuator	MVE	MVE2213	MRTSUE11058	1 year	2023-06-09	SIP
Attenuator	MVE	MVE2213	MRTSUE11059	1 year	2023-06-09	SIP
Attenuator	MVE	MVE2213	MRTSUE11060	1 year	2023-06-09	SIP

Software	Version	Function
EMI Software	V3.0.0	EMI Test Software
Controller_MF 7802BS	1.02	RE Antenna & Turntable
UXM 5G Automation Toolset	V 7.3	License 4G & 5G
Keysight S8705A RF/RRM DVT and Conformance Toolset	V 21.12.0.0	License 5G

4. Decision Rules and Measurement Uncertainty

4.1. Decision Rules

The Decision Rule is based on Simple Acceptance in accordance with ISO Guide 98-4: 2012 Clause 8.2. (Measurement uncertainty is not taken into account when stating conformity with a specified requirement.)

4.2. Measurement Uncertainty

Where relevant, the following test uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k = 2$.

Radiated Spurious Emissions
Measurement Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): Horizontal: 9kHz ~ 300MHz: 5.04dB 300MHz ~ 1GHz: 4.95dB 1GHz ~ 40GHz: 6.40dB Vertical: 9kHz ~ 300MHz: 5.24dB 300MHz ~ 1GHz: 6.03dB 1GHz ~ 40GHz: 6.40dB
Conducted Spurious Emissions
Measuring Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): 0.78dB
Output Power
Measuring Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): 1.13dB
Occupied Bandwidth
Measuring Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): 0.28%
Frequency Stability
Measuring Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): 76.2Hz

5. Test Result

5.1. Summary

FCC Part Section(s)	Test Description	Test Condition	Verdict
2.1049	Occupied Bandwidth	Conducted	Pass
2.1055,90.539(e)	Frequency Stability		Pass
90.542(a)(7)	Equivalent Radiated Power		Pass
2.1051, 90.543(e)(2)(3)	Band Edge		Pass
2.1051, 90.210(n)	Emission Mask		
2.1051, 90.543(e)(3), (f)	Transmitter Spurious Emission		
2.1053, 90.543(e)(3), (f)	Transmitter Spurious Emission	Radiated	Pass

Notes:

- 1) The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
- 2) All supported modulation types were evaluated. The worst-case emission of modulation was selected. Therefore, the Frequency Stability, Channel Band Edge, Radiated & Conducted Spurious Emission were presented worst-case in the test report.

5.2. Occupied Bandwidth Measurement

5.2.1. Test Limit

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured.


5.2.2. Test Procedure

ANSI C63.26-2015 - Section 5.4

5.2.3. Test Setting

1. Set center frequency to the nominal EUT channel center frequency
2. RBW = The nominal RBW shall be in the range of 1% to 5% of the anticipated OBW
3. VBW $\geq 3 \times$ RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. Allow the trace to stabilize
8. Use the 99% power bandwidth function of the instrument and report the measured bandwidth.

5.2.4. Test Setup

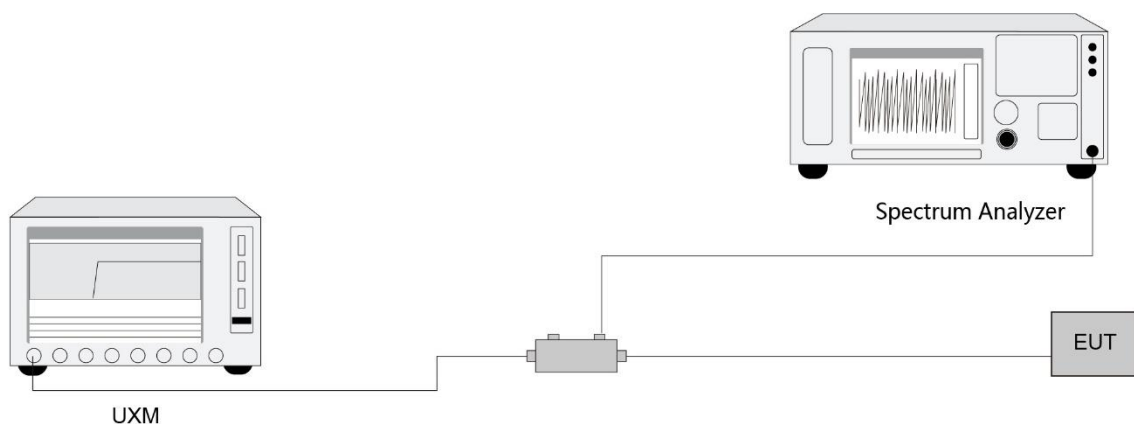

5.2.5. Test Result

Refer to Appendix A.1.

5.3. Frequency Stability Measurement

5.3.1. Test Limit

The frequency stability of mobile, portable and control transmitters operating in the wideband segment must be 1.25 parts per million or better when AFC is locked to a base station, and 5 parts per million or better when AFC is not locked.

5.3.2. Test Procedure

ANSI C63.26-2015 - Section 5.6

5.3.3. Test Setting

Frequency Stability Under Temperature Variations:


The equipment under test was connected to an external AC or DC power supply and input rated voltage. RF output was connected to a frequency counter or spectrum analyzer via feed through attenuators. The EUT was placed inside the temperature chamber. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and measure EUT 20°C operating frequency as reference frequency. Turn EUT off and set the chamber temperature to highest. After the temperature stabilized for approximately 30 minutes recorded the frequency. Repeat step measure with 10°C decreased per stage until the lowest temperature reached.

Frequency Stability Under Voltage Variations:

Set chamber temperature to 20°C. Use a variable AC power supply / DC power source to power the EUT and set the voltage to rated voltage. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and recorded the frequency.

Reduce the input voltage to specify extreme voltage variation ($\pm 15\%$) and end point, record the maximum frequency change.

5.3.4. Test Setup

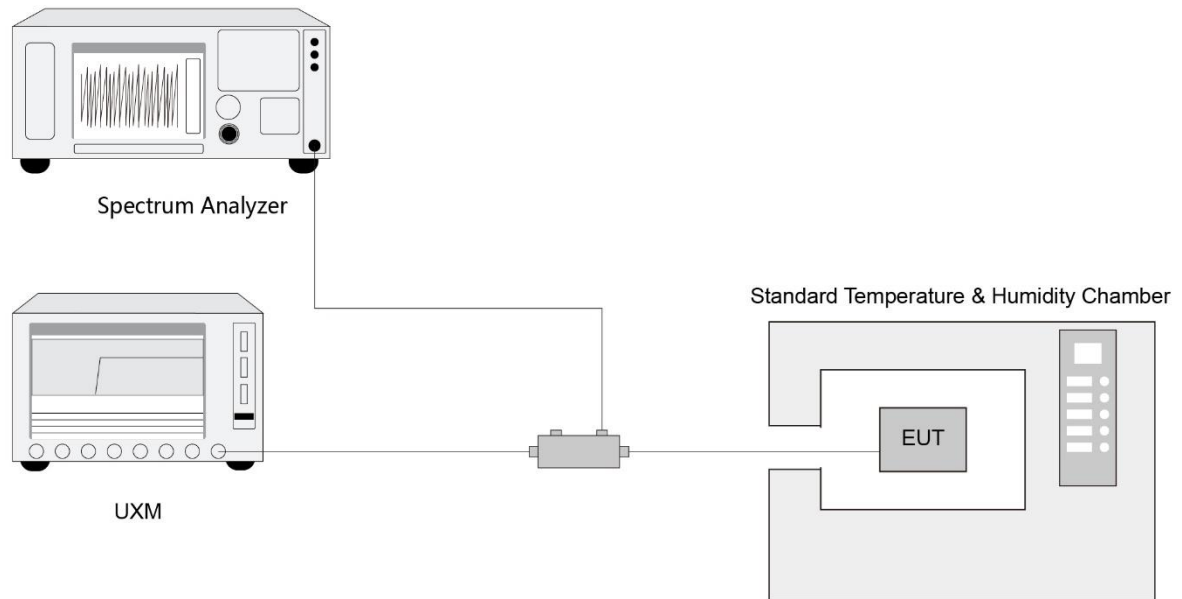

5.3.5. Test Result

Refer to Appendix A.2.

5.4. Equivalent Isotropically Radiated Power Measurement

5.4.1. Test Limit

Control stations and mobile stations transmitting in the 758-768 MHz band and the 788-798 MHz band are limited to 30 watts ERP.

5.4.2. Test Procedure

ANSI C63.26-2015 - Section 5.2

5.4.3. Test Setting

Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter.

The relevant equation for determining the maximum ERP or EIRP from the measured RF output power is given in Equation (1) as follows:

$$\text{ERP or EIRP} = P_{\text{Meas}} + G_T$$

where


ERP or EIRP effective radiated power or equivalent isotropically radiated power, respectively (expressed in the same units as P_{Meas} , e.g., dBm or dBW)

P_{Meas} measured transmitter output power or PSD, in dBm or dBW

G_T gain of the transmitting antenna, in dBd (ERP) or dBi (EIRP)

$$\text{ERP} = \text{EIRP} - 2.15$$

5.4.4. Test Setup

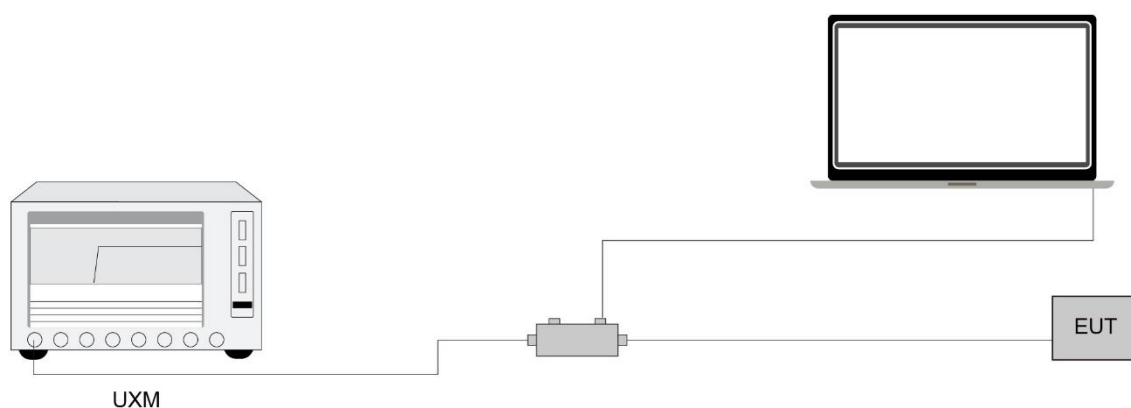

5.4.5. Test Result

Refer to Appendix A.3.

5.5. Band Edge Measurement

5.5.1. Test Limit

For operations in the 758-768 MHz and the 788-798 MHz bands, the power of any emission outside the licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, in accordance with the following:

- (1) On all frequencies between 769-775 MHz and 799-805 MHz, by a factor not less than $65 + 10 \log (P)$ dB in a 6.25 kHz band segment, for mobile and portable stations;
- (2) On any frequency between 775-788 MHz, above 805 MHz, and below 758 MHz, by at least $43 + 10 \log (P)$ dB.


5.5.2. Test Procedure

ANSI C63.26-2015 - Section 5.7

5.5.3. Test Setting

1. Set the analyzer frequency to low or high channel
2. $RBW \geq$ The nominal RBW shall be in the range of 1% of the anticipated OBW (in the 1MHz band immediately outside and adjacent to the band edge). For improvement of the accuracy in the measurement of the average power of a noise-like emission, a RBW narrower than the specified reference bandwidth can be used (generally limited to no less than 1% of the OBW), provided that a subsequent integration is performed over the full required measurement bandwidth. This integration should be performed using the spectrum analyzer's band power functions.
3. $VBW \geq 3 * RBW$
4. Sweep time = auto
5. Detector = power averaging (rms)
6. Set sweep trigger to "free run."
7. User gate triggered such that the analyzer only sweeps when the device is transmitting at full power
8. Trace average at least 100 traces in power averaging (rms) mode if sweep is set to auto-couple. To accurately determine the average power over the on and off time of the transmitter, it can be necessary to increase the number of traces to be averaged above 100, or if using a manually configured sweep time, increase the sweep time.

5.5.4. Test Setup

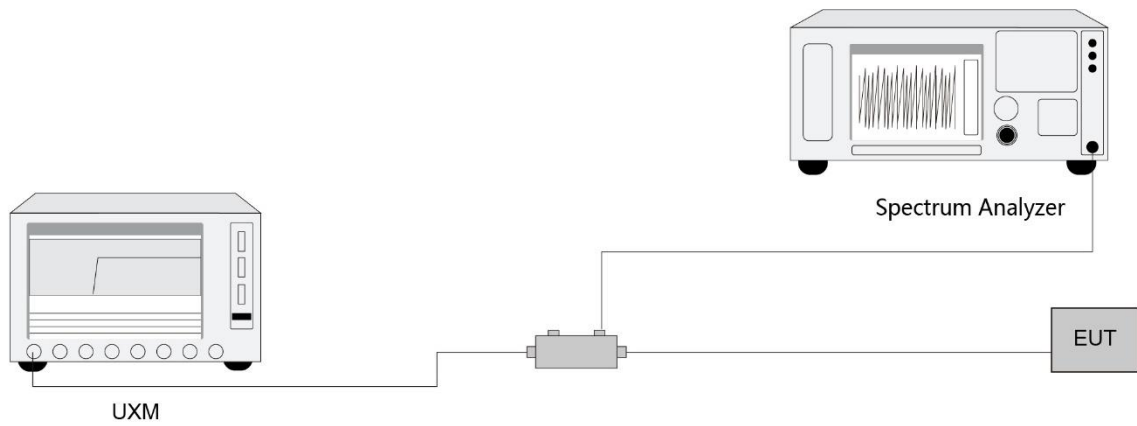

5.5.5. Test Result

Refer to Appendix A.4.

5.6. Emission Mask Measurement

5.6.1. Test Limit

Emission Mask B. For transmitters that are equipped with an audio low-pass filter, the power of any emission must be attenuated below the unmodulated carrier power (P) as follows:

- (1) On any frequency removed from the assigned frequency by more than 50 percent, but not more than 100 percent of the authorized bandwidth: At least 25 dB.
- (2) On any frequency removed from the assigned frequency by more than 100 percent, but not more than 250 percent of the authorized bandwidth: At least 35 dB.
- (3) On any frequency removed from the assigned frequency by more than 250 percent of the authorized bandwidth: At least $43 + 10 \log (P)$ dB.


5.6.2. Test Procedure

ANSI C63.26-2015 - Section 5.7

5.6.3. Test Setting

1. Set the analyzer frequency to low or high channel
2. $RBW \geq$ The nominal RBW shall be in the range of 1% of the anticipated OBW (in the 1MHz band immediately outside and adjacent to the band edge). For improvement of the accuracy in the measurement of the average power of a noise-like emission, a RBW narrower than the specified reference bandwidth can be used (generally limited to no less than 1% of the OBW), provided that a subsequent integration is performed over the full required measurement bandwidth. This integration should be performed using the spectrum analyzer's band power functions.
3. $VBW \geq 3 * RBW$
4. Sweep time = auto
5. Detector = power averaging (rms)
6. Set sweep trigger to "free run."
7. User gate triggered such that the analyzer only sweeps when the device is transmitting at full power
8. Trace average at least 100 traces in power averaging (rms) mode if sweep is set to auto-couple. To accurately determine the average power over the on and off time of the transmitter, it can be necessary to increase the number of traces to be averaged above 100, or if using a manually configured sweep time, increase the sweep time.

5.6.4. Test Setup

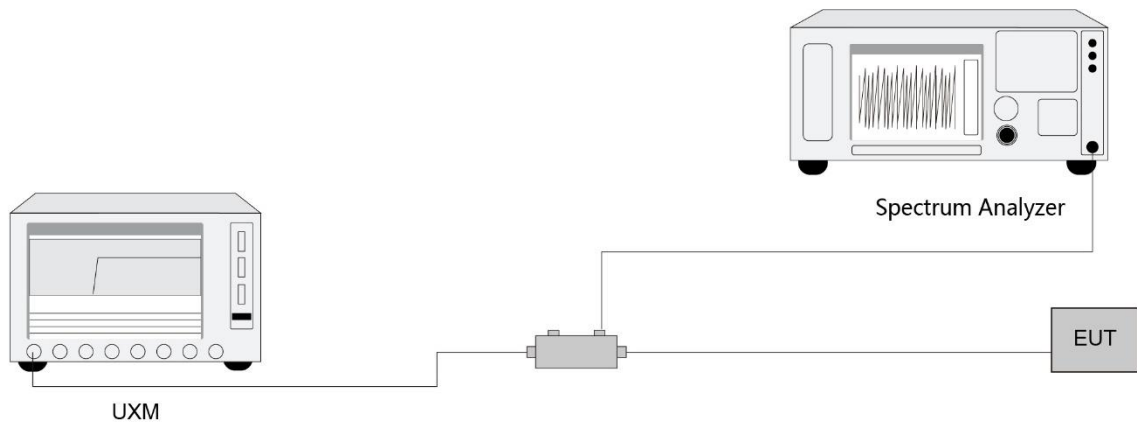

5.6.5. Test Result

Refer to Appendix A.5.

5.7. Conducted Spurious Emissions Measurement

5.7.1. Test Limit

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst-case configuration. All modes of operation were investigated and the worst-case configuration results are reported in this section.

On any frequency between 775-788 MHz, above 805 MHz, and below 758 MHz, by at least $43 + 10 \log (P)$ dB.

On any frequency between 775-788 MHz, above 805 MHz, and below 758 MHz, by at least $43 + 10 \log (P)$ dB.

For operations in the 758-775 MHz and 788-805 MHz bands, all emissions including harmonics in the band 1559-1610 MHz shall be limited to -70 dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals, and -80 dBW EIRP for discrete emissions of less than 700 Hz bandwidth.


5.7.2. Test Procedure

ANSI C63.26-2015 - Section 5.7

5.7.3. Test Setting

1. Set the analyzer frequency to low, mid, high channel.
2. RBW = 1MHz
3. VBW ≥ 3 *RBW
4. Sweep time = auto
5. Detector = power averaging (rms)
6. Set sweep trigger to "free run."
7. User gate triggered such that the analyzer only sweeps when the device is transmitting at full power.
8. Trace average at least 100 traces in power averaging (rms) mode if sweep is set to auto-couple. To accurately determine the average power over the on and off time of the transmitter, it can be necessary to increase the number of traces to be averaged above 100, or if using a manually configured sweep time, increase the sweep time.

5.7.4. Test Setup

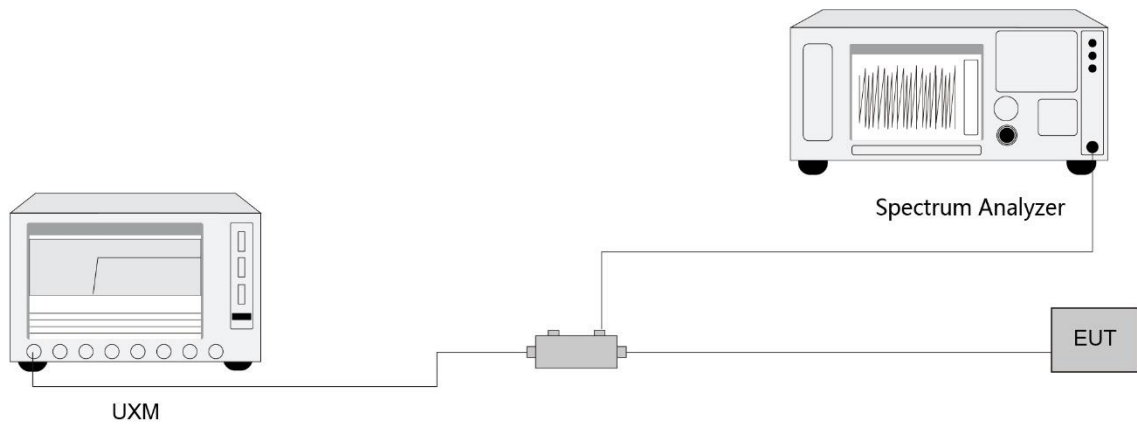

5.7.5. Test Result

Refer to Appendix A.6.

5.8. Radiated Spurious Emissions Measurement

5.8.1. Test Limit

Out of band emissions: The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. The emission limit equal to -13dBm.

For operations in the 758-775 MHz and 788-805 MHz bands, all emissions including harmonics in the band 1559-1610 MHz shall be limited to -70 dBW/MHz (-40 dBm/MHz) equivalent isotropically radiated power (EIRP) for wideband signals, and -80 dBW (-50 dBm) EIRP for discrete emissions of less than 700 Hz bandwidth. For the purpose of equipment authorization, a transmitter shall be tested with an antenna that is representative of the type that will be used with the equipment in normal operation.

E (dB μ V/m) = EIRP (dBm) - $20 \log D$ + 104.8; where D is the measurement distance in meters. The emission limit equal to 82.3dB μ V/m or 55.3dB μ V/m.

5.8.2. Test Procedure


ANSI C63.26-2015 - Section 5.2.7 & 5.5

5.8.3. Test Setting


1. RBW = 1MHz
2. VBW ≥ 3 *RBW
3. Sweep time $\geq 10 \times$ (number of points in sweep) \times (transmission symbol period)
4. Detector = Peak
5. Trace mode = max hold
6. The trace was allowed to stabilize

5.8.4. Test Setup

Below 1GHz Test Setup:

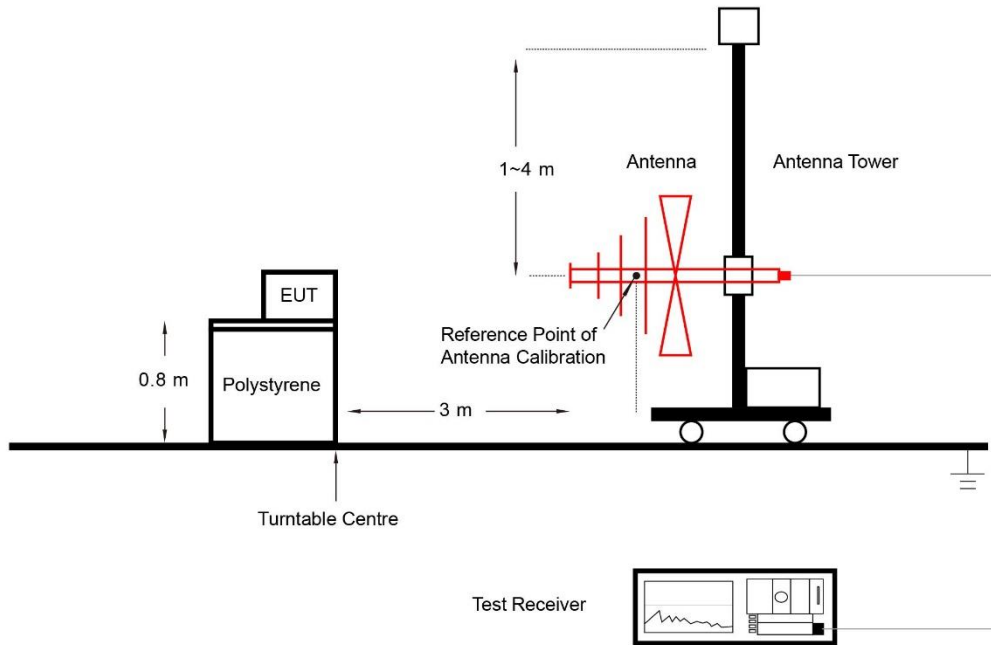

Above 1GHz Test Setup:

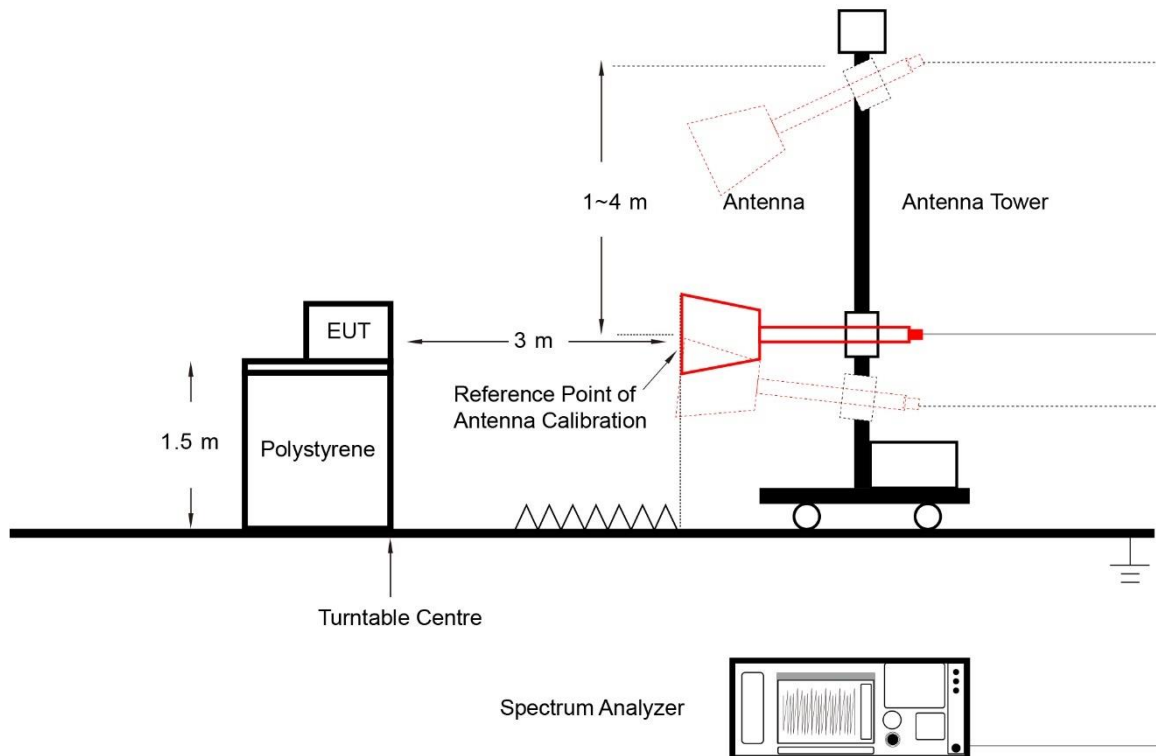

5.8.5. Test Result

Refer to Appendix A.7.

Appendix A - Test Result


A.1 Occupied Bandwidth Test Result

Test Site	SIP-SR1	Test Engineer	Candy Luo
Test Date	2022/12/09	Test Band	NR n14


Frequency (MHz)	Bandwidth (MHz)	99% Bandwidth (MHz)
QPSK		
793.0	5	4.46
793.0	10	9.24
16QAM		
793.0	5	4.46
793.0	10	9.24
64QAM		
793.0	5	4.45
793.0	10	9.20
256QAM		
793.0	5	4.46
793.0	10	9.24

99% Bandwidth - QPSK

5MHz Channel Bandwidth

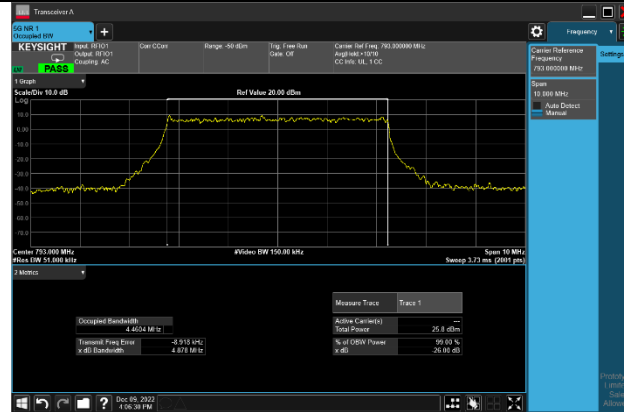


10MHz Channel Bandwidth

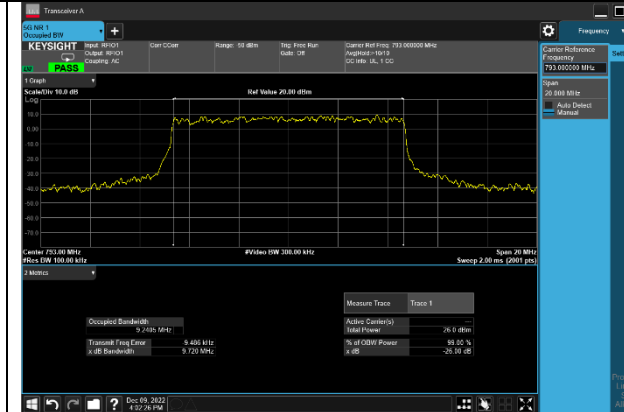


99% Bandwidth - 16QAM

5MHz Channel Bandwidth

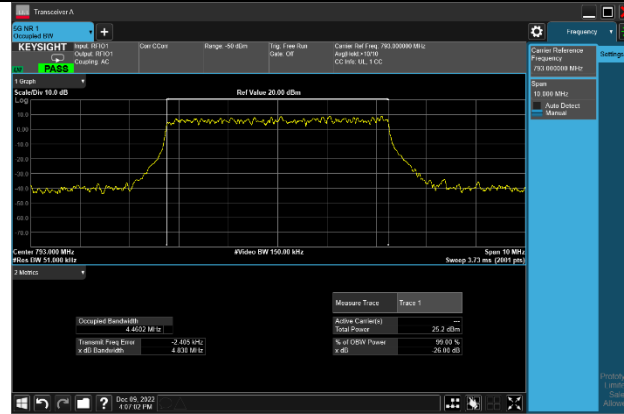


10MHz Channel Bandwidth

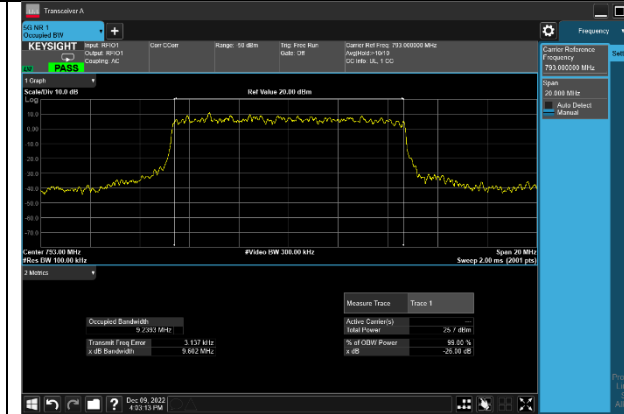

99% Bandwidth - 64QAM

5MHz Channel Bandwidth

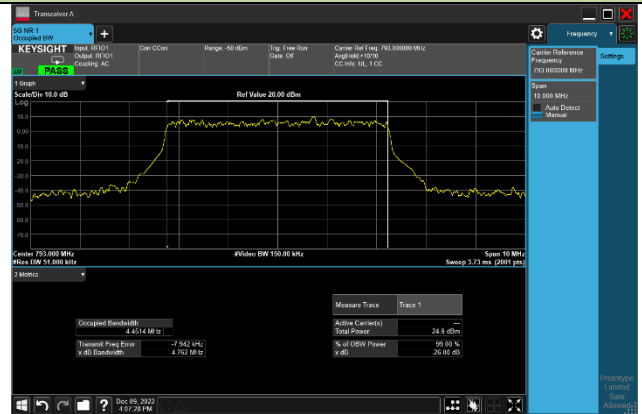

10MHz Channel Bandwidth



99% Bandwidth - 256QAM

5MHz Channel Bandwidth



10MHz Channel Bandwidth



A.2 Frequency Stability Test Result

Test Site	SIP-TR1	Test Engineer	Candy Luo
Test Date	2023/01/09 ~ 2023/01/12	Test Band	NR n14

Power (Vdc)	Temp. (°C)	Frequency Tolerance (ppm)
3.8	- 30	-0.0244
	- 20	-0.0142
	- 10	-0.0146
	0	-0.0046
	+ 10	-0.0214
	+ 20 (Ref)	0.0000
	+ 30	0.0124
	+ 40	-0.0013
	+ 50	-0.0127
4.4	+ 20	-0.0123
3.3	+ 20	0.0213

A.3 Equivalent Isotropically Radiated Power Test Result

Test Site	SIP-SR1	Test Engineer	Candy Luo
Test Date	2022/11/16	Test Band	NR n14

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)	ERP (dBm)	Limit (dBm)
DFT-s-OFDM PI/2 BPSK						
5	790.5	12	6	23.32	21.17	<44.77
		1	1	23.33	21.18	<44.77
		1	23	23.31	21.16	<44.77
		25	0	22.75	20.60	<44.77
		1	24	22.76	20.61	<44.77
		1	6	22.79	20.64	<44.77
	793.0	12	6	23.39	21.24	<44.77
		1	1	23.30	21.15	<44.77
		1	23	23.21	21.06	<44.77
		25	0	22.76	20.61	<44.77
		1	24	22.76	20.61	<44.77
		1	6	22.88	20.73	<44.77
	795.5	12	6	23.41	21.26	<44.77
		1	1	23.32	21.17	<44.77
		1	23	23.22	21.07	<44.77
		25	0	22.90	20.75	<44.77
		1	24	22.72	20.57	<44.77
		1	6	22.78	20.63	<44.77
10	793	25	12	23.32	21.17	<44.77
		1	1	23.26	21.11	<44.77
		1	50	23.22	21.07	<44.77
		50	0	22.75	20.60	<44.77
		1	51	22.59	20.44	<44.77
		1	0	22.89	20.74	<44.77

Note: The ERP (dBm) = Output Power (dBm) + Antenna Gain (dBi) - 2.15

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)	ERP (dBm)	Limit (dBm)
DFT-s-OFDM QPSK						
5	790.5	12	6	23.35	21.17	<44.77
		1	1	23.59	21.18	<44.77
		1	23	23.40	21.16	<44.77
		25	0	22.30	20.60	<44.77
		1	24	22.28	20.61	<44.77
		1	6	22.48	20.64	<44.77
	793.0	12	6	23.43	21.24	<44.77
		1	1	23.57	21.15	<44.77
		1	23	23.51	21.06	<44.77
		25	0	22.24	20.61	<44.77
		1	24	22.35	20.61	<44.77
		1	6	22.39	20.73	<44.77
	795.5	12	6	23.39	21.26	<44.77
		1	1	23.48	21.17	<44.77
		1	23	23.31	21.07	<44.77
		25	0	22.34	20.75	<44.77
		1	24	22.31	20.57	<44.77
		1	6	22.47	20.63	<44.77
10	793	25	12	23.28	21.17	<44.77
		1	1	23.40	21.11	<44.77
		1	50	23.35	21.07	<44.77
		50	0	22.28	20.60	<44.77
		1	51	22.25	20.44	<44.77
		1	0	22.56	20.74	<44.77
Note: The ERP (dBm) = Output Power (dBm) + Antenna Gain (dBi) - 2.15						



Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)	ERP (dBm)	Limit (dBm)
DFT-s-OFDM 16QAM						
5	790.5	12	6	22.25	20.10	<44.77
		1	1	22.55	20.40	<44.77
		1	23	22.57	20.42	<44.77
		25	0	21.27	19.12	<44.77
		1	24	21.40	19.25	<44.77
		1	6	21.54	19.39	<44.77
	793.0	12	6	22.19	20.04	<44.77
		1	1	22.55	20.40	<44.77
		1	23	22.60	20.45	<44.77
		25	0	21.21	19.06	<44.77
		1	24	21.12	18.97	<44.77
		1	6	21.22	19.07	<44.77
	795.5	12	6	22.31	20.16	<44.77
		1	1	22.44	20.29	<44.77
		1	23	22.47	20.32	<44.77
		25	0	21.34	19.19	<44.77
		1	24	21.10	18.95	<44.77
		1	6	21.17	19.02	<44.77
10	793	25	12	22.34	20.19	<44.77
		1	1	22.53	20.38	<44.77
		1	50	22.39	20.24	<44.77
		50	0	21.29	19.14	<44.77
		1	51	21.05	18.90	<44.77
		1	0	21.23	19.08	<44.77
Note: The ERP (dBm) = Output Power (dBm) + Antenna Gain (dBi) - 2.15						

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)	ERP (dBm)	Limit (dBm)
DFT-s-OFDM 64QAM						
5	790.5	12	6	20.86	18.71	<44.77
		1	1	21.05	18.90	<44.77
		1	23	20.58	18.43	<44.77
		25	0	20.88	18.73	<44.77
		1	24	20.64	18.49	<44.77
		1	6	21.06	18.91	<44.77
	793.0	12	6	20.84	18.69	<44.77
		1	1	21.02	18.87	<44.77
		1	23	20.98	18.83	<44.77
		25	0	20.87	18.72	<44.77
		1	24	20.93	18.78	<44.77
		1	6	21.05	18.90	<44.77
	795.5	12	6	20.88	18.73	<44.77
		1	1	20.78	18.63	<44.77
		1	23	20.61	18.46	<44.77
		25	0	20.98	18.83	<44.77
		1	24	20.72	18.57	<44.77
		1	6	20.77	18.62	<44.77
10	793	25	12	20.86	18.71	<44.77
		1	1	21.10	18.95	<44.77
		1	50	20.93	18.78	<44.77
		50	0	20.78	18.63	<44.77
		1	51	20.85	18.70	<44.77
		1	0	21.13	18.98	<44.77
Note: The ERP (dBm) = Output Power (dBm) + Antenna Gain (dBi) - 2.15						

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)	ERP (dBm)	Limit (dBm)
DFT-s-OFDM 256QAM						
5	790.5	12	6	18.69	16.54	<44.77
		1	1	18.58	16.43	<44.77
		1	23	18.44	16.29	<44.77
		25	0	18.76	16.61	<44.77
		1	24	18.49	16.34	<44.77
		1	6	18.48	16.33	<44.77
	793.0	12	6	18.86	16.71	<44.77
		1	1	18.46	16.31	<44.77
		1	23	18.48	16.33	<44.77
		25	0	18.87	16.72	<44.77
		1	24	18.48	16.33	<44.77
		1	6	18.47	16.32	<44.77
	795.5	12	6	18.73	16.58	<44.77
		1	1	18.41	16.26	<44.77
		1	23	18.36	16.21	<44.77
		25	0	18.72	16.57	<44.77
		1	24	18.36	16.21	<44.77
		1	6	18.41	16.26	<44.77
10	793	25	12	18.75	16.60	<44.77
		1	1	18.41	16.26	<44.77
		1	50	18.37	16.22	<44.77
		50	0	18.72	16.57	<44.77
		1	51	18.44	16.29	<44.77
		1	0	18.39	16.24	<44.77
Note: The ERP (dBm) = Output Power (dBm) + Antenna Gain (dBi) - 2.15						


A.4 Band Edge Test Result

Test Site	SIP-SR1	Test Engineer	Candy Luo
Test Date	2022/11/23	Test Band	NR n14, 1RB, QPSK

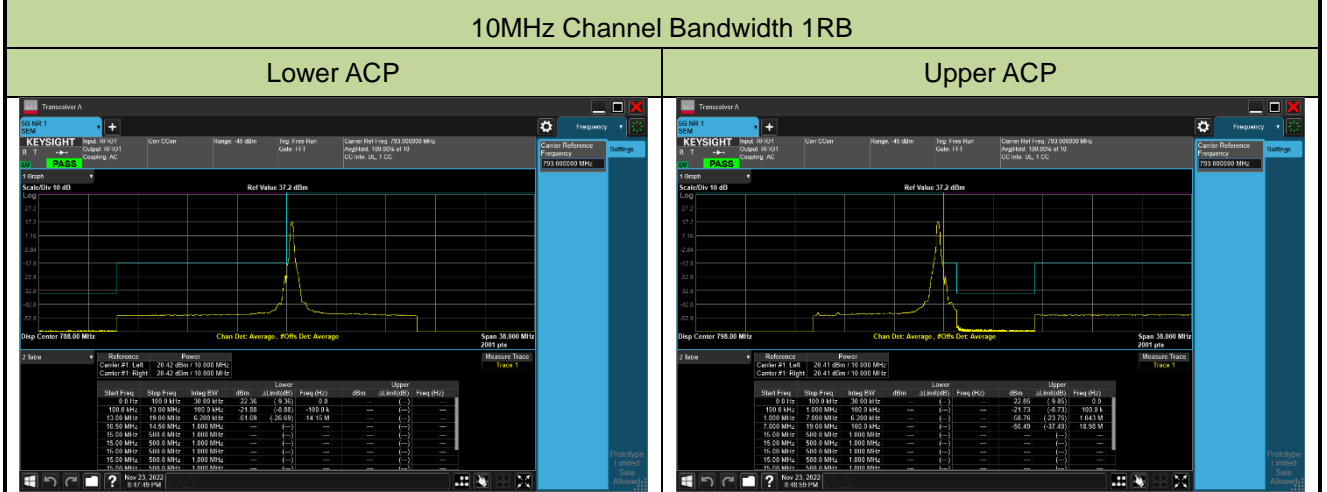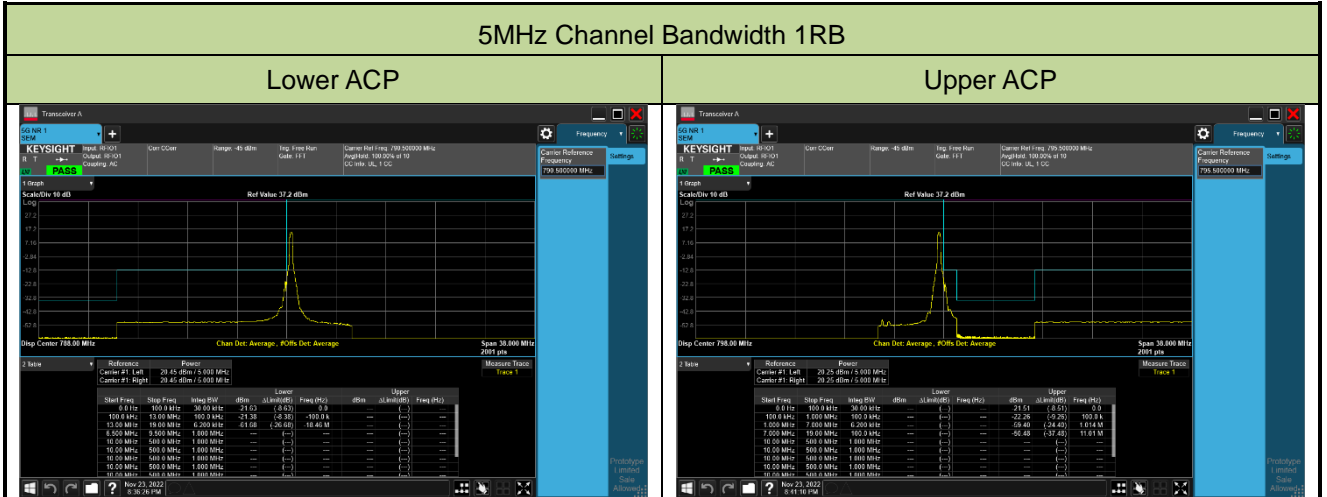


5MHz Channel Bandwidth Full RB

Lower ACP

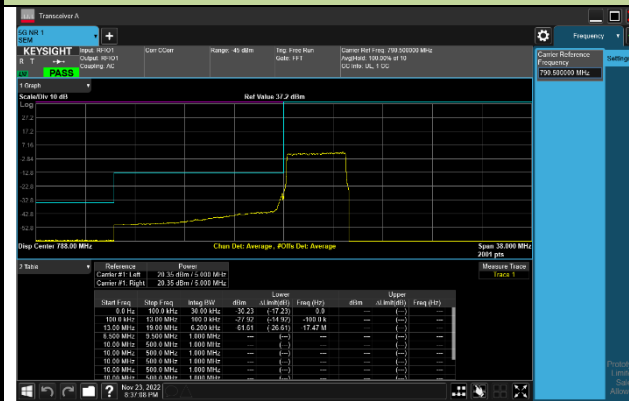

Upper ACP

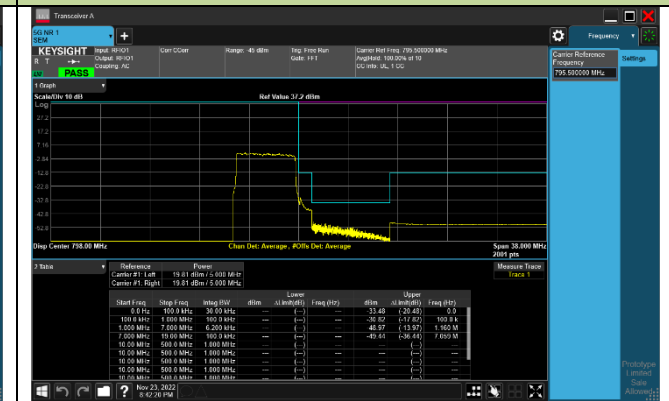

10MHz Channel Bandwidth Full RB

Lower ACP




Upper ACP




A.5 Emission Mask Test Result

Test Site	SIP-SR1	Test Engineer	Candy Luo
Test Date	2023/01/06	Test Band	NR n14, 1RB, QPSK

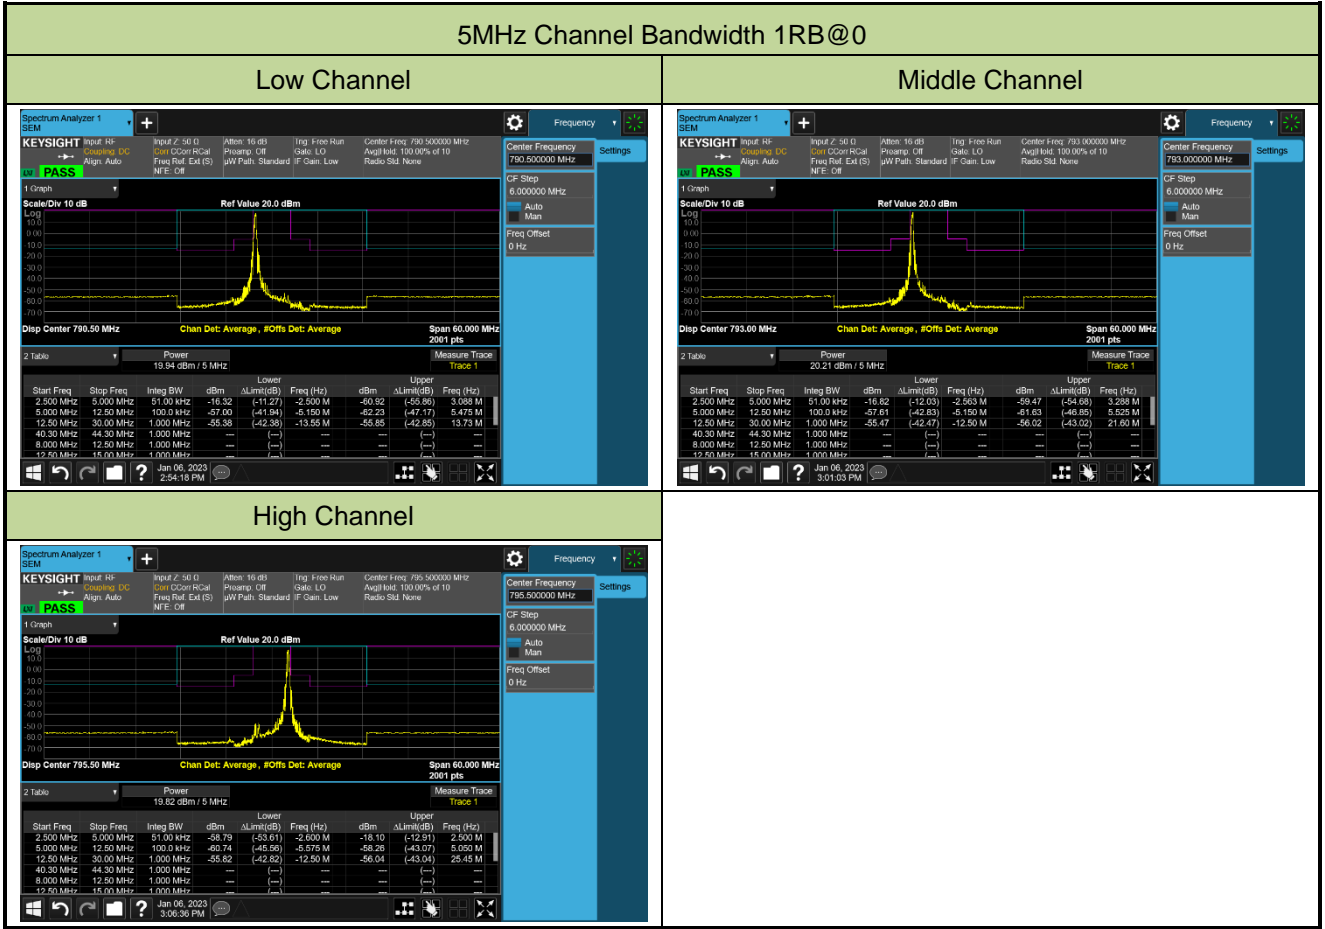


5MHz Channel Bandwidth 1RB@24


Low Channel

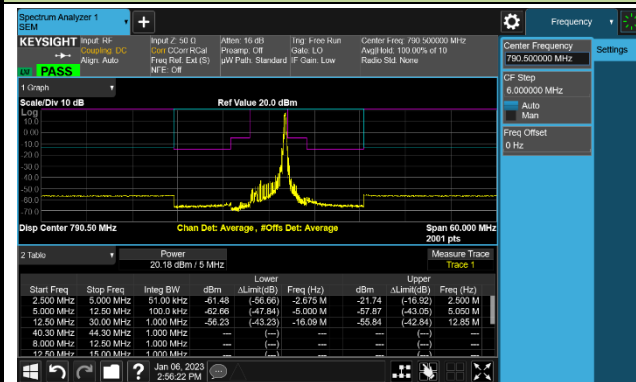

Middle Channel

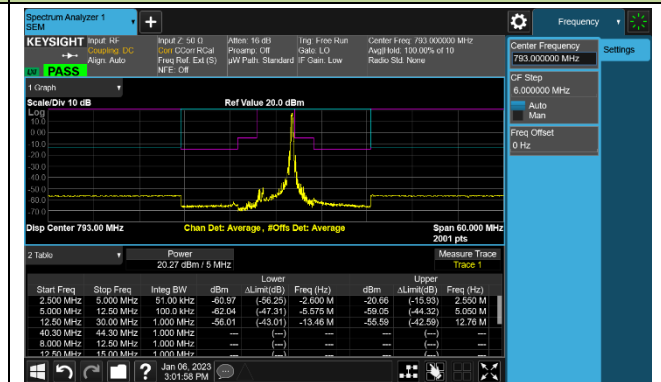


High Channel

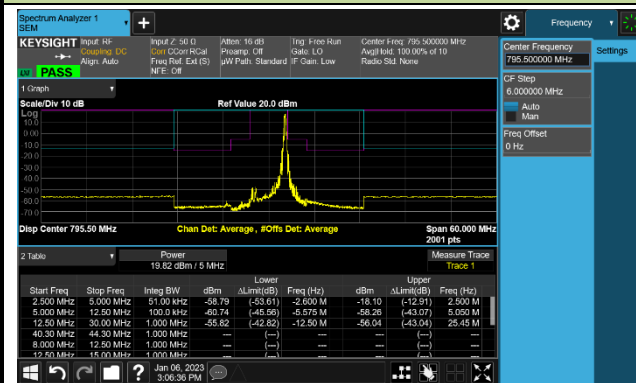


5MHz Channel Bandwidth Full RB


Low Channel

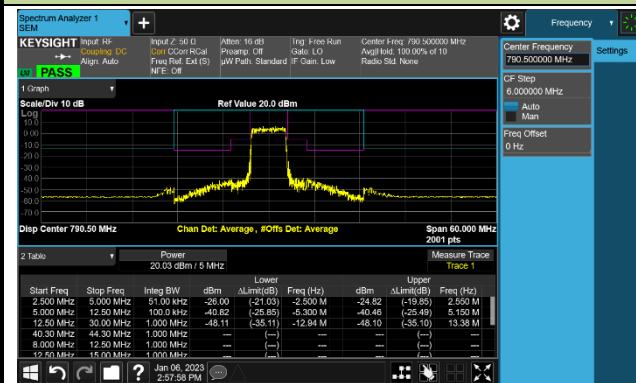


Middle Channel

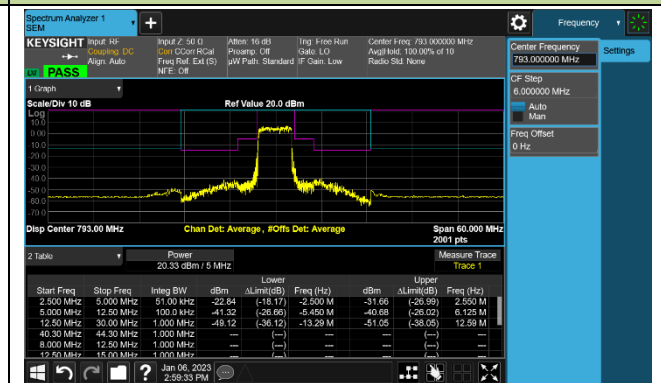

High Channel

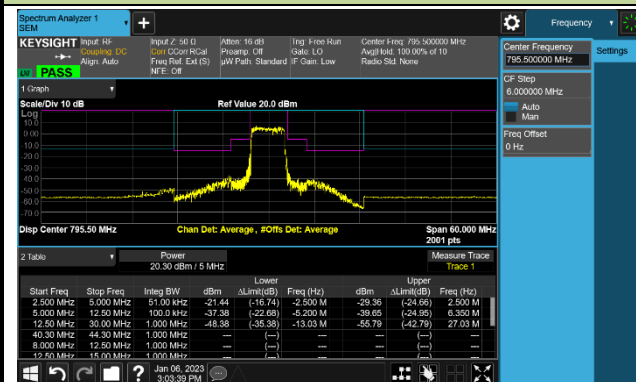


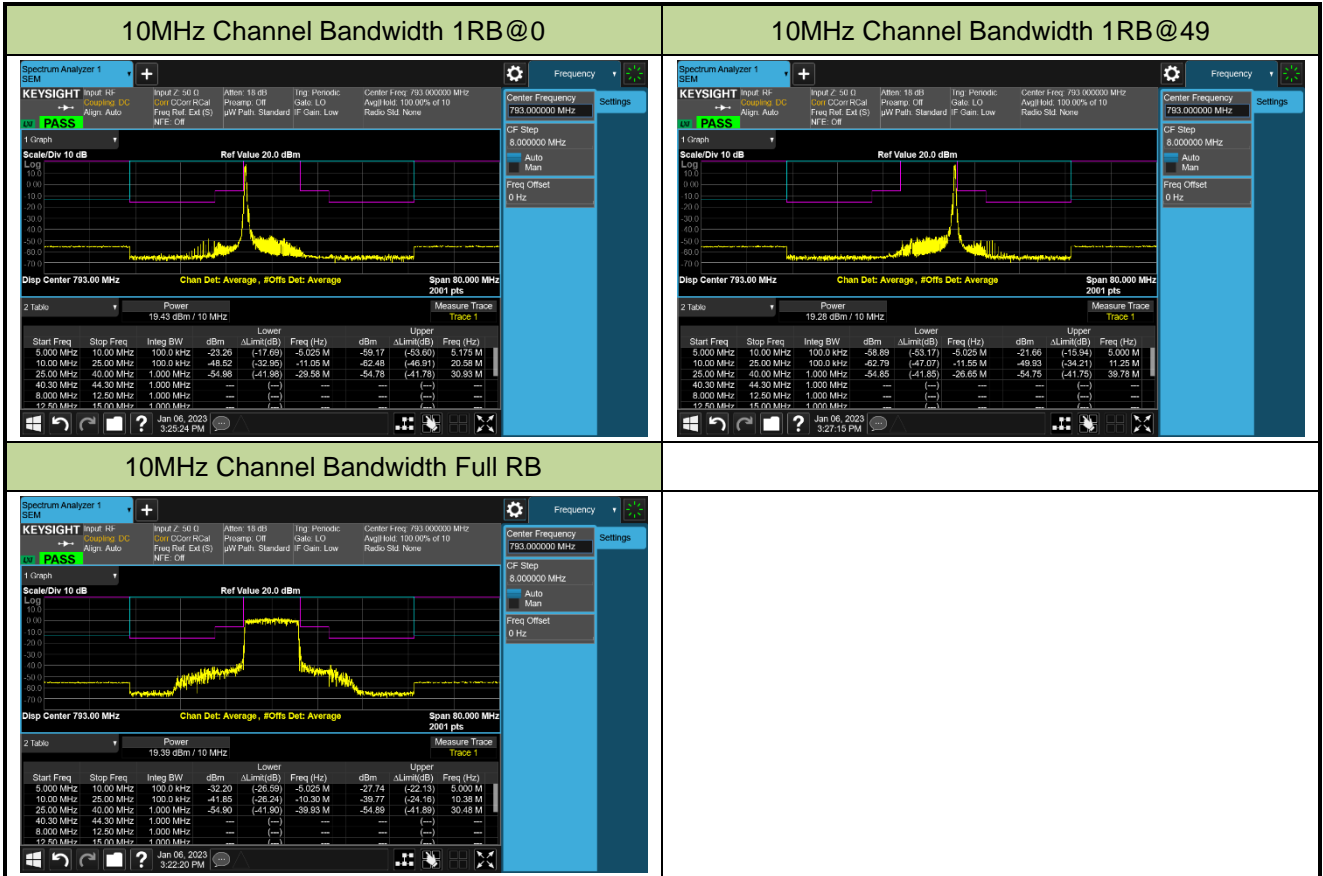


A.6 Conducted Supurious Emissions Test Result

Test Site	SIP-SR1	Test Engineer	Candy Luo
Test Date	2022/12/22 ~ 2022/12/23	Test Band	NR n14, 1RB, QPSK

Frequency (MHz)	Channel Bandwidth (MHz)	Frequency Range (MHz)	Max Spurious Emissions (dBm)	Limit (dBm)	Result
790.5	5	30 ~ 8000	-40.46	≤ -13.00	Pass
793.0	5	30 ~ 8000	-40.38	≤ -13.00	Pass
795.5	5	30 ~ 8000	-40.65	≤ -13.00	Pass
793.0	10	30 ~ 8000	-40.41	≤ -13.00	Pass
790.5	5	1559 ~ 1610	-46.13	≤ -40.00	Pass
793.0	5	1559 ~ 1610	-45.53	≤ -40.00	Pass
795.5	5	1559 ~ 1610	-45.89	≤ -40.00	Pass
793.0	10	1559 ~ 1610	-46.69	≤ -40.00	Pass

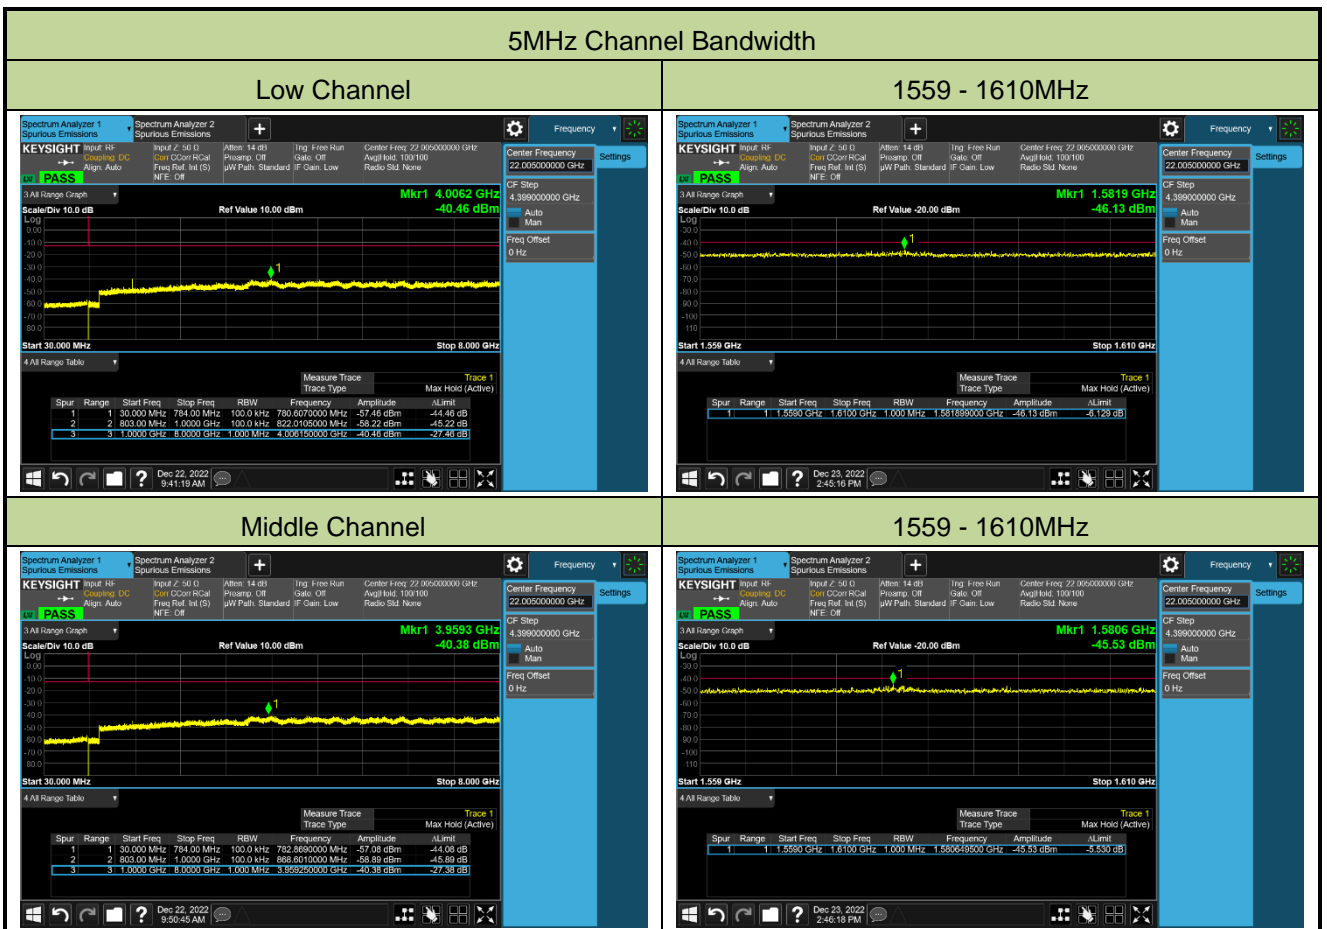

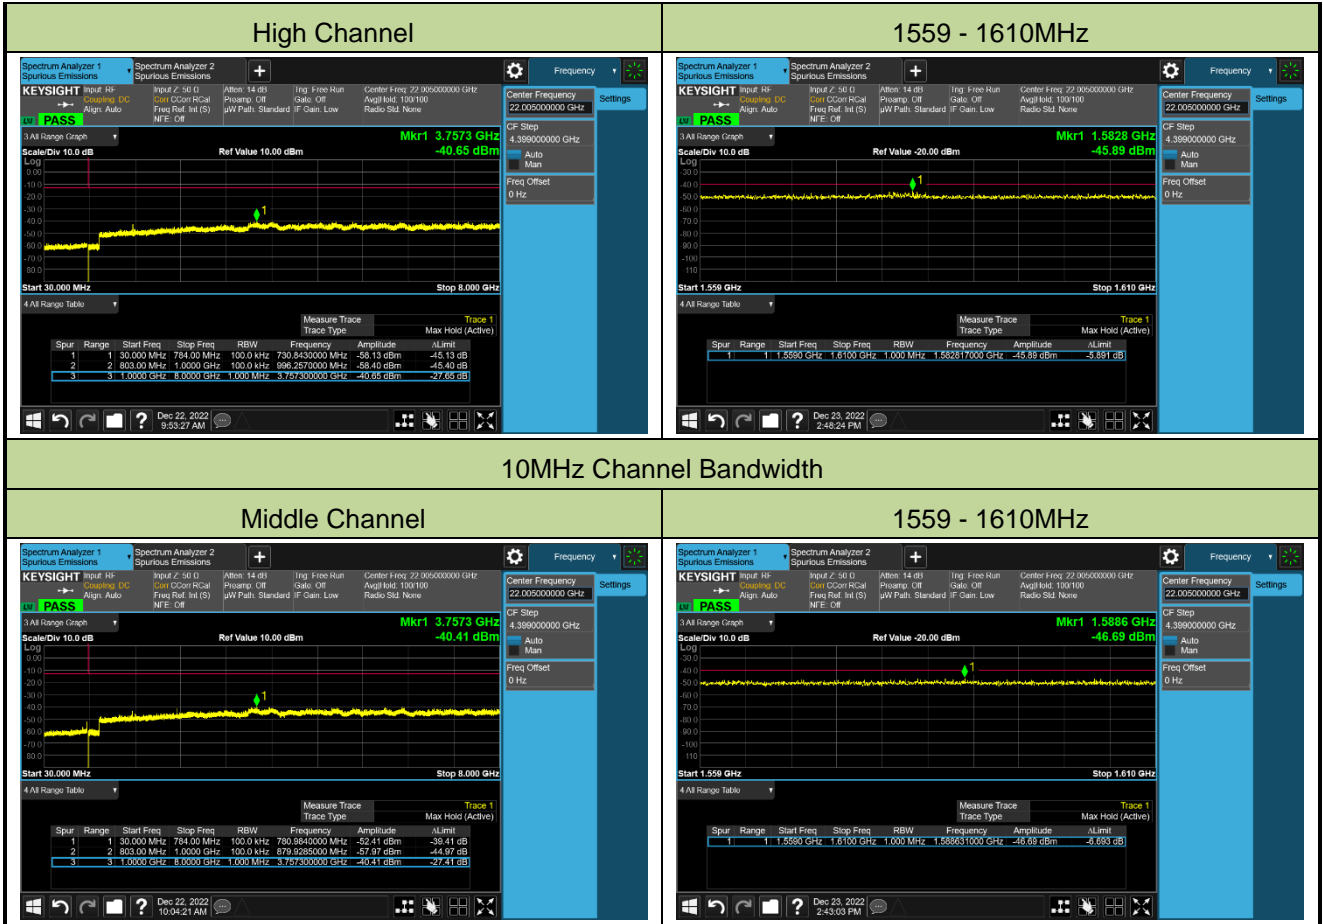

A.7 Radiated Spurious Emissions Test Result

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2023/01/08	Test Band	NR n14, 5MHz, 1RB, QPSK

Frequency (MHz)	Reading Level (dB μ V)	Factor (dB/m)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector	Polarization
Low Channel							
54.250	14.3	20.3	34.6	82.3	-47.7	Peak	Horizontal
955.380	16.1	31.6	47.7	82.3	-34.6	Peak	Horizontal
54.735	15.2	20.3	35.5	82.3	-46.8	Peak	Vertical
919.490	14.0	31.2	45.2	82.3	-37.1	Peak	Vertical
1578.000	37.2	-5.4	31.8	55.3	-23.5	Peak	Horizontal
10877.000	32.8	16.9	49.7	82.3	-32.6	Peak	Horizontal
1595.000	37.9	-5.4	32.5	55.3	-22.8	Peak	Vertical
4833.500	37.1	3.8	40.9	82.3	-41.4	Peak	Vertical
Middle Channel							
47.945	15.4	20.3	35.7	82.3	-46.6	Peak	Horizontal
910.275	16.3	31.3	47.6	82.3	-34.7	Peak	Horizontal
52.310	15.0	20.4	35.4	82.3	-46.9	Peak	Vertical
951.500	16.7	31.5	48.2	82.3	-34.1	Peak	Vertical
1578.000	38.3	-5.4	32.9	55.3	-22.4	Peak	Horizontal
11072.500	32.3	17.2	49.5	82.3	-32.8	Peak	Horizontal
1595.000	37.3	-5.4	31.9	55.3	-23.4	Peak	Vertical
11021.500	32.8	17.0	49.8	82.3	-32.5	Peak	Vertical
High Channel							
52.310	15.4	20.4	35.8	82.3	-46.5	Peak	Horizontal
951.500	16.7	31.5	48.2	82.3	-34.1	Peak	Horizontal
59.585	16.8	19.7	36.5	82.3	-45.8	Peak	Vertical
886.025	16.1	30.9	47.0	82.3	-35.3	Peak	Vertical
1586.500	38.7	-5.4	33.3	55.3	-22.0	Peak	Horizontal
10766.500	32.7	16.8	49.5	82.3	-32.8	Peak	Horizontal
1586.500	37.4	-5.4	32.0	55.3	-23.3	Peak	Vertical
4825.000	35.9	3.8	39.7	82.3	-42.6	Peak	Vertical

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2023/01/08	Test Band	NR n14_ENDC, 5MHz, 1RB

Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
Low Channel							
53.765	14.9	20.4	35.3	82.3	-47.0	Peak	Horizontal
676.505	17.4	28.1	45.5	82.3	-36.8	Peak	Horizontal
54.735	17.6	20.3	37.9	82.3	-44.4	Peak	Vertical
880.690	17.0	30.8	47.8	82.3	-34.5	Peak	Vertical
6593.000	34.2	8.5	42.7	82.3	-39.6	Peak	Horizontal
10460.500	33.3	16.0	49.3	82.3	-33.0	Peak	Horizontal
6533.500	34.3	8.4	42.7	82.3	-39.6	Peak	Vertical
10979.000	32.8	17.4	50.2	82.3	-32.1	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Appendix B - Test Setup Photograph

Refer to "2211RSU034-UT" file.

Appendix C - EUT Photograph

Refer to "2211RSU034-UE" file.