

**FCC CFR47 PART 15 SUBPART C
CERTIFICATION**



DTS SUPPLEMENTAL TEST REPORT

FOR

PROXIM CORPORATION

**802.11a/b/g CARDBUS WITH 2.7dBi ANTENNA @ 2.4GHz AND
2.6dBi ANTENNA @ 5GHz BAND**

MODEL NUMBER: 8460

BRAND NAME: HARMONY / SKYLINE 802.11 a/b/g

FCC ID: HZB-8460

REPORT NUMBER: 02U1403

ISSUE DATE: AUGUST 7, 2002

Prepared for
**PROXIM CORPORATION
510 DEGUINE DR
SUNNYVALE, CA 94085
USA**

Prepared by
**COMPLIANCE CERTIFICATION SERVICES
561F MONTEREY ROAD,
MORGAN HILL, CA 95037, USA
TEL: (408) 463-0885
FAX: (408) 463-0888**

TABLE OF CONTENTS

| | |
|---|-----------|
| 1. TEST RESULT CERTIFICATION | 3 |
| 2. EUT DESCRIPTION | 4 |
| 3. DESCRIPTION OF ALTERNATE ANTENNAS | 4 |
| 4. TEST METHODOLOGY | 4 |
| 5. FACILITIES AND ACCREDITATION | 5 |
| 5.1. <i>FACILITIES AND EQUIPMENT</i> | 5 |
| 5.2. <i>LABORATORY ACCREDITATIONS AND LISTINGS</i> | 5 |
| 5.3. <i>TABLE OF ACCREDITATIONS AND LISTINGS</i> | 6 |
| 6. CALIBRATION AND UNCERTAINTY | 7 |
| 6.1. <i>MEASURING INSTRUMENT CALIBRATION</i> | 7 |
| 6.2. <i>MEASUREMENT UNCERTAINTY</i> | 7 |
| 6.3. <i>TEST AND MEASUREMENT EQUIPMENT</i> | 8 |
| 7. SETUP OF EQUIPMENT UNDER TEST | 9 |
| 8. APPLICABLE RULES | 12 |
| 9. TEST SETUP, PROCEDURE AND RESULT | 15 |
| 9.1. <i>TEST CHANNEL SELECTION</i> | 15 |
| 9.2. <i>UNDESIRABLE EMISSIONS – RADIATED MEASUREMENTS</i> | 16 |
| 9.3. <i>SETUP PHOTOS</i> | 30 |

1. TEST RESULT CERTIFICATION

COMPANY NAME: PROXIM CORPORATION
510 DEGUINE DR
SUNNYVALE, CA 94085 USA

CONTACT PERSON: QUINN KUNZ

TELEPHONE NO: (801) 492-4750 EXT 20

EUT DESCRIPTION: 802.11a/b/g CARDBUS WITH 2.7dBi ANTENNA @ 2.4GHz AND
2.6dBi ANTENNA @ 5GHz BAND

MODEL NUMBER: 8460

BRAND NAME: HARMONY / SKYLINE 802.11 a/b/g

DATE TESTED: AUGUST 3, 2002


| | |
|-----------------------|---|
| TYPE OF EQUIPMENT | INTENTIONAL RADIATOR |
| EQUIPMENT TYPE | 2.4 - 2.4835 AND 5.725 - 5.85 GHz TRANSCEIVER * |
| MEASUREMENT PROCEDURE | ANSI 63.4 / 1992, TIA/EIA 603 |
| PROCEDURE | CERTIFICATION |
| FCC RULE | CFR 47 PART 15.C |

* The 2.4 and 5.8 GHz bands are applicable to this report; another band of operation (5.2 GHz) is documented in a separate report

Compliance Certification Services, Inc. tested the above equipment for compliance with the requirements set forth in CFR 47, PART 15, Subpart C. The equipment in the configuration described in this report, shows the measured emission levels emanating from the equipment do not exceed the specified limit.

Note: This document reports conditions under which testing was conducted and results of tests performed. This document may not be altered or revised in any way unless done so by Compliance Certification Services and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by Compliance Certification Services will constitute fraud and shall nullify the document.

Approved & Released For CCS By:



STEVE CHENG
EMC ENGINEERING MANAGER
COMPLIANCE CERTIFICATION SERVICES

Tested By:



THU CHAN
SENIOR EMC ENGINEER
COMPLIANCE CERTIFICATION SERVICES

2. EUT DESCRIPTION

The Proxim 8460 is a high performance 802.11a/b/g WLAN client product intended for laptop applications. It operates in the 2.4 – 2.4835 GHz, 5.15 - 5.35 GHz and 5.725 - 5.850 GHz bands with a maximum average Tx output power of 100 mW. The product uses two symmetric integral antennas for diversity operation. Each has approximately 2.6 dBi peak gain.

The Proxim 8460 design is based on an Atheros AR5001X three chip solution. The three chips include:

AR5211: Multiprotocol MAC/baseband processor, and CardBus/PCI bus interface.

AR5111 Radio-on-a-Chip (RoC): An all-CMOS single-chip radio transceiver that includes a power amplifier, and integrated dual conversion filters to convert signals from 5 GHz to the baseband range for use by the AR5211. The AR5111 offers fully integrated transmitter, receiver, and frequency synthesizer functions; eliminating the need for external voltage controlled oscillators (VCOs) and surface acoustic wave (SAW) filters.

AR2111 Radio-on-a-Chip (RoC): An all-CMOS single-chip radio transceiver that, when combined with the AR5111, implements a 2.4 GHz 802.11 b/g solution. The AR2111 offers fully integrated transmitter, receiver, and frequency synthesizer functions. Like the AR5111, the AR2111 does not require external VCOs or SAW filters.

3. DESCRIPTION OF ALTERNATE ANTENNAS

The original antennas gain were 1.0dBi for both bands as documented in Test Report #02U1380.

The new antenna gain is 2.7dBi for 2.4GHz band, and 2.6dBi for 5GHz band as documented in Test Report #02U1403.

Due to the change of the antenna, an Engineering justification has been made to redo all the radiated portion of the test.

4. TEST METHODOLOGY

Conducted and radiated testing were performed according to the procedures documented on chapter 13 of ANSI C63.4 and FCC CFR 47 2.1046, 2.1047, 2.1049, 2.1051, 2.1053, 2.1055, 2.1057, and 15.407.

5. FACILITIES AND ACCREDITATION

5.1. FACILITIES AND EQUIPMENT




The open area test sites and conducted measurement facilities used to collect the radiated data are located at 561F Monterey Road, Morgan Hill, California, USA. The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 and CISPR Publication 22.

Receiving equipment (i.e., receiver, analyzer, quasi-peak adapter, pre-selector) and LISNs conform to CISPR specifications for "Radio Interference Measuring Apparatus and Measurement Methods," Publication 16.

5.2. LABORATORY ACCREDITATIONS AND LISTINGS

The test facilities used to perform radiated and conducted emissions tests are accredited by National Voluntary Laboratory Accreditation Program for the specific scope of accreditation under Lab Code: 200065-0 to perform Electromagnetic Interference tests according to FCC PART 15 AND CISPR 22 requirements. No part of this report may be used to claim or imply product endorsement by NVLAP or any agency of the US Government. In addition, the test facilities are listed with Federal Communications Commission (reference no: 31040/SIT (1300B3) and 31040/SIT (1300F2)).

5.3. TABLE OF ACCREDITATIONS AND LISTINGS

| Country | Agency | Scope of Accreditation | Logo |
|---------|-----------------|---|--|
| USA | NVLAP* | FCC Part 15, CISPR 22, AS/NZS 3548, IEC 61000-4-2, IEC 61000-4-3, IEC 61000-4-4, IEC 61000-4-5, IEC 61000-4-6, IEC 61000-4-8, IEC 61000-4-11, CNS 13438 |  200065-0 |
| USA | FCC | 3/10 meter Open Area Test Sites to perform FCC Part 15/18 measurements |  1300 |
| Japan | VCCI | CISPR 22 Two OATS and one conducted Site |  R-1014, R-619, C-640 |
| Norway | NEMKO | EN50081-1, EN50081-2, EN50082-1, EN50082-2, IEC61000-6-1, IEC61000-6-2, EN50083-2, EN50091-2, EN50130-4, EN55011, EN55013, EN55014-1, EN55104, EN55015, EN61547, EN55022, EN55024, EN61000-3-2, EN61000-3-3, EN60945, EN61326-1 |  ELA 117 |
| Norway | NEMKO | EN60601-1-2 and IEC 60601-1-2, the Collateral Standards for Electro-Medical Products. MDD, 93/42/EEC, AIMD 90/385/EEC |  ELA-171 |
| Taiwan | BSMI | CNS 13438 |  SL2-IN-E-1012 |
| Canada | Industry Canada | RSS210 Low Power Transmitter and Receiver |  IC2324 A,B,C, and F |

* No part of this report may be used to claim or imply product endorsement by NVLAP or any agency of the US Government.

6. CALIBRATION AND UNCERTAINTY

6.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

6.2. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

| Radiated Emission | |
|-------------------------------|-------------|
| 30MHz – 200 MHz | +/- 3.3dB |
| 200MHz – 1000MHz | +4.5/-2.9dB |
| 1000MHz – 2000MHz | +4.6/-2.2dB |
| Power Line Conducted Emission | |
| 150kHz – 30MHz | +/-2.9 |

Any results falling within the above values are deemed to be marginal.

6.3. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

| TEST AND MEASUREMENT EQUIPMENT LIST | | | | |
|-------------------------------------|-----------------|------------------|---------------|----------------------|
| Name of Equipment | Manufacturer | Model | Serial Number | Calibration Due Date |
| Spectrum Analyzer | HP | 8566B | 3014A06685 | 6/1/03 |
| Spectrum Display | HP | 85662A | 2152A03066 | 6/1/03 |
| Quasi-Peak Detector | HP | 85650A | 3145A01654 | 6/1/03 |
| Preamplifier | HP | 8447D | 2944A06833 | 8/10/02 |
| Log Periodic Antenna | EMCO | 3146 | 9107-3163 | 3/30/03 |
| Biconical Antenna | Eaton | 94455-1 | 1197 | 3/30/03 |
| LISN | F.C.C. | LISN-50/250-25-2 | 114 | 4/23/03 |
| EMI Test Receiver | Rohde & Schwarz | ESHS 20 | 827129/006 | 4/17/03 |
| Spectrum Analyzer | HP | 8593EM | 3710A00205 | 6/11/03 |
| Preamplifier (1 - 26.5GHz) | MITEQ | NSP2600-44 | 646456 | 4/26/03 |
| Horn Antenna (1 - 18GHz) | EMCO | 3115 | 6717 | 1/31/03 |
| Horn Antenna (18 - 26.5GHz) | ARA | 3115 | 6717 | 1/31/03 |
| Signal Generator | HP | 83732B | US34490599 | 3/29/03 |
| High Pass Filter (4.57GHz) | FSY Microwave | FM-4570-9SS | 003 | N.C.R. |
| High Pass Filter (7.6GHz) | FSY Microwave | FM-7600-9SS | 002 | N.C.R. |
| Spectrum Analyzer | HP | 8563E | 3720A07066 | 3/18/04 |
| Spectrum Analyzer | Agilent | E4404B | US40240772 | 3/25/03 |
| External Mixer (26.5 - 40 GHz) | HP | 11970A | 3008A04190 | 9/22/02 |
| Horn Antenna (26.5 - 40 GHz) | Dico | 1149 | 2 | N.C.R. |

7. SETUP OF EQUIPMENT UNDER TEST

SUPPORT EQUIPMENT

| Device Type | Manufacturer | Model | Serial Number | FCC ID |
|------------------|--------------|-----------|---------------|------------|
| Laptop | IBM | 2652-4CU | 78-DPL47 | DoC |
| AC Power Adapter | IBM | AA21131 | 02K6753 | DoC |
| Printer | HP | 2225C | 2541S41679 | DoC |
| MODEM | ACEEX | 1414 | 9013537 | IFAXDM1414 |
| MOUSE | LOGITECH | M-UA34 | LTC70500299 | DZL211087 |
| MOUSE | MICROSOFT | X03-46340 | 0070536-00000 | DoC |


I/O CABLES

| Cable No. | Port | # of Identical Ports | Connector Type | Cable Type | Cable Length | Remarks |
|-----------|----------|----------------------|----------------|------------|--------------|----------------------------|
| 1 | AC | 1 | US115 | Unshielded | 2 m | Integrated with AC Adapter |
| 2 | AC | 2 | US115 | Unshielded | 2 m | |
| 3 | Parallel | 1 | DB25 | Shielded | 2 m | |
| 4 | Serial | 1 | DB9 | Shielded | 1 m | |
| 5 | USB | 1 | USB | Unshielded | 1 m | Integral with Mouse |
| 6 | USB | 1 | USB | Unshielded | 1 m | Integral with Mouse |


TEST SETUP

The EUT is installed into a laptop computer during the test.

SETUP DIAGRAM FOR DIGITAL DEVICE TESTS

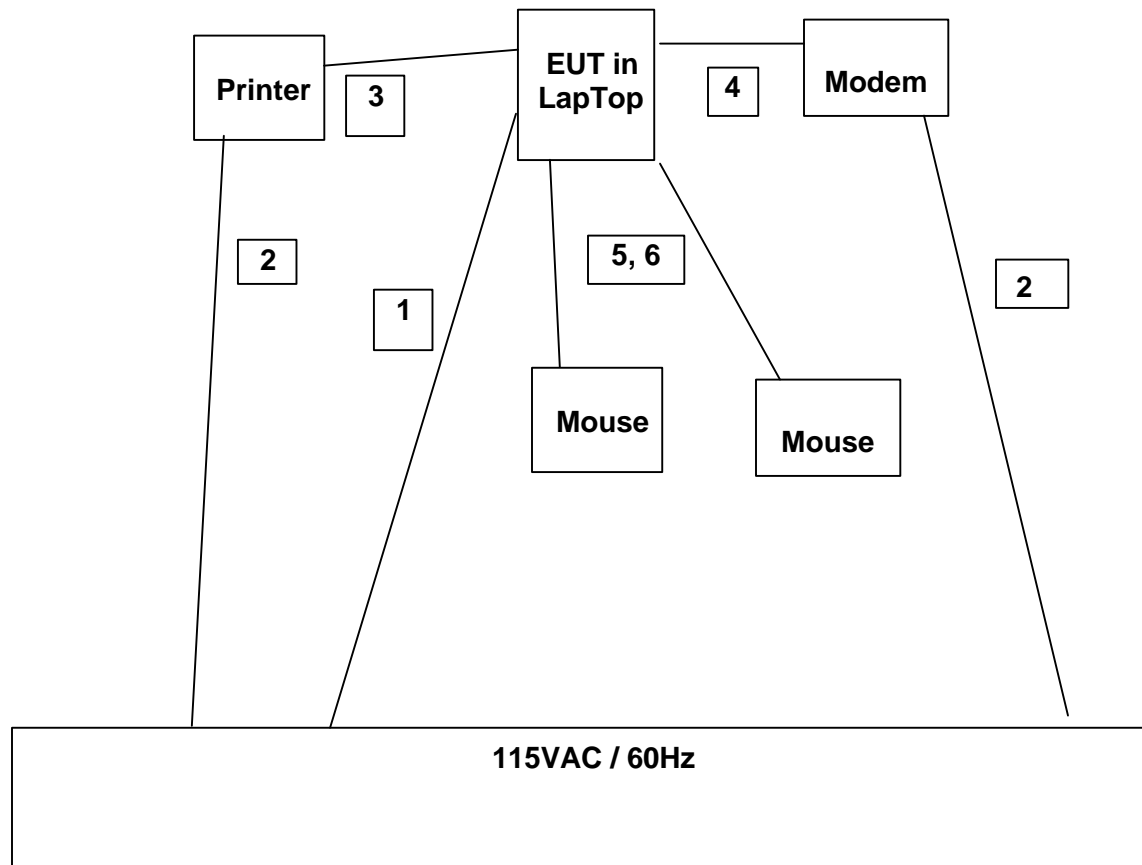

SETUP DIAGRAM FOR TRANSMITTER TESTS

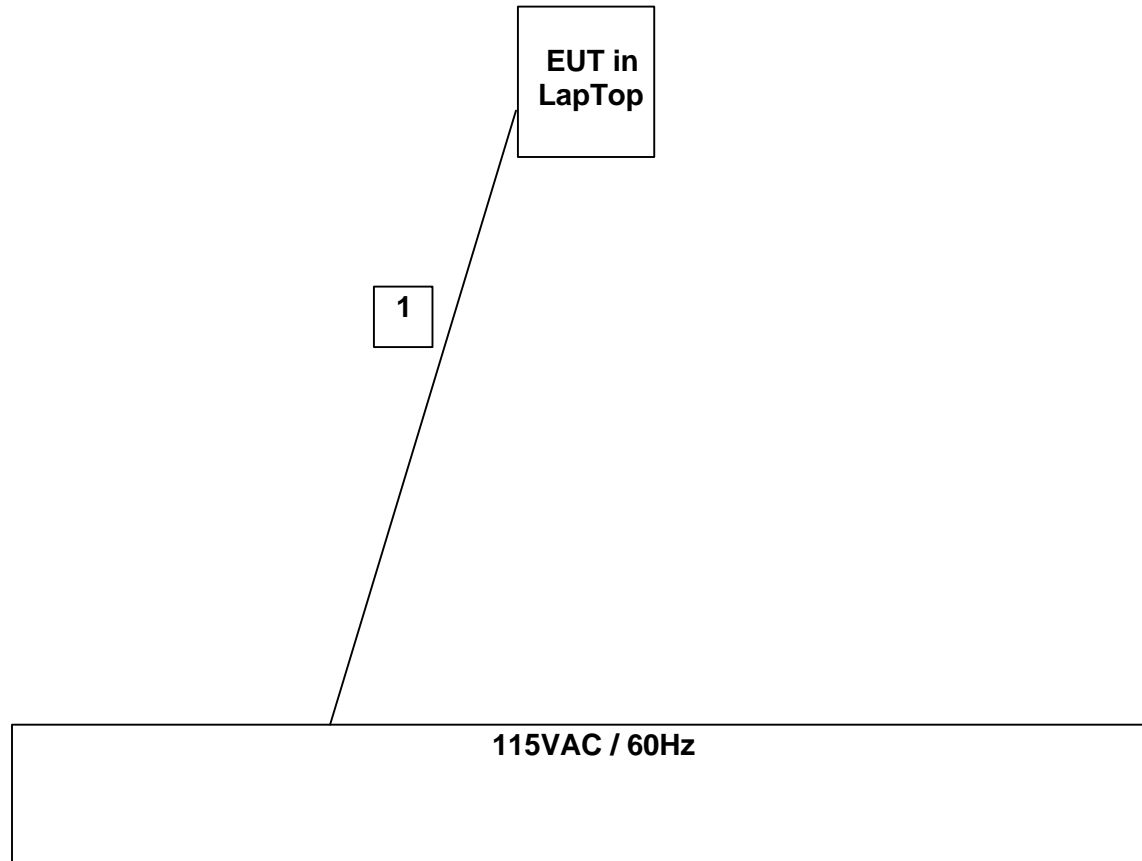

8. APPLICABLE RULES

§15.247 (b)- RADIO FREQUENCY EXPOSURE

(5) Systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess of the Commission's guidelines. See §1.1307(b)(1) of this chapter.

§15.247 (c)- SPURIOUS EMISSIONS

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

§15.205- RESTRICTED BANDS OF OPERATIONS

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

| MHz | MHz | MHz | GHz |
|----------------------------|-----------------------|-----------------|------------------|
| 0.090 - 0.110 | 16.42 - 16.423 | 399.9 - 410 | 4.5 - 5.15 |
| ¹ 0.495 - 0.505 | 16.69475 - 16.69525 | 608 - 614 | 5.35 - 5.46 |
| 2.1735 - 2.1905 | 16.80425 - 16.80475 | 960 - 1240 | 7.25 - 7.75 |
| 4.125 - 4.128 | 25.5 - 25.67 | 1300 - 1427 | 8.025 - 8.5 |
| 4.17725 - 4.17775 | 37.5 - 38.25 | 1435 - 1626.5 | 9.0 - 9.2 |
| 4.20725 - 4.20775 | 73 - 74.6 | 1645.5 - 1646.5 | 9.3 - 9.5 |
| 6.215 - 6.218 | 74.8 - 75.2 | 1660 - 1710 | 10.6 - 12.7 |
| 6.26775 - 6.26825 | 108 - 121.94 | 1718.8 - 1722.2 | 13.25 - 13.4 |
| 6.31175 - 6.31225 | 123 - 138 | 2200 - 2300 | 14.47 - 14.5 |
| 8.291 - 8.294 | 149.9 - 150.05 | 2310 - 2390 | 15.35 - 16.2 |
| 8.362 - 8.366 | 156.52475 - 156.52525 | 2483.5 - 2500 | 17.7 - 21.4 |
| 8.37625 - 8.38675 | 156.7 - 156.9 | 2655 - 2900 | 22.01 - 23.12 |
| 8.41425 - 8.41475 | 162.0125 - 167.17 | 3260 - 3267 | 23.6 - 24.0 |
| 12.29 - 12.293 | 167.72 - 173.2 | 3332 - 3339 | 31.2 - 31.8 |
| 12.51975 - 12.52025 | 240 - 285 | 3345.8 - 3358 | 36.43 - 36.5 |
| 12.57675 - 12.57725 | 322 - 335.4 | 3600 - 4400 | (²) |
| 13.36 - 13.41 | | | |

¹ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

² Above 38.6

(b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

§15.209- RADIATED EMISSION LIMITS; GENERAL REQUIREMENTS

(a) Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

| Frequency (MHz) | Field Strength (microvolts/meter) | Measurement Distance (meters) |
|--------------------|--------------------------------------|----------------------------------|
| 30 - 88 | 100 ** | 3 |
| 88 - 216 | 150 ** | 3 |
| 216 - 960 | 200 ** | 3 |
| Above 960 | 500 | 3 |

** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

(b) In the emission table above, the tighter limit applies at the band edges.

FCC PART 15.209

| MEASURING DISTANCE OF 3 METER | | |
|-------------------------------|----------------------------------|----------------------------|
| FREQUENCY RANGE (MHz) | FIELD STRENGTH (Microvolts/m) | FIELD STRENGTH (dBuV/m) |
| 30-88 | 100 | 40 |
| 88-216 | 150 | 43.5 |
| 216-960 | 200 | 46 |
| Above 960 | 500 | 54 |

9. TEST SETUP, PROCEDURE AND RESULT

9.1. TEST CHANNEL SELECTION

For the 5.8 GHz band, Turbo Mode, there are only two frequencies of operation. Thus only Low and High channels are tested in this band and mode, rather than the usual Low, Middle and High that would apply for a frequency range greater than or equal to 10 MHz.

9.2. UNDESIRABLE EMISSIONS – RADIATED MEASUREMENTS

TEST SETUP

For measurements of the EUT as a digital device, the EUT and all other support equipment were placed on a wooden table 80 cm above the ground plane. For measurements of the EUT as a transmitter, the EUT and the laptop were placed on the wooden table. The antenna to EUT distance is 3 meters for measurements below 1 GHz and 1 meter for measurements above 1 GHz. The EUT is configured in accordance with Section 8 of ANSI C63.4/1992.

The EUT is set to transmit in a continuous mode.

TEST PROCEDURE

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1 GHz outside restricted bands, the resolution bandwidth is set to 100 kHz. Peak detection is used.

For measurements above 1 GHz within restricted bands, the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 1 MHz for peak measurements and 10 Hz for average measurements.

For operation in the 2.4 GHz band, the spectrum from 30 MHz to 26 GHz is investigated. For operation in the 5.8 GHz band, the spectrum from 30 MHz to 40 GHz is investigated.

The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The frequency span is set small enough to easily differentiate between broadcast stations, intermittent ambient signals and EUT emissions. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the suspected signal. Measurements were made with the antenna polarized in both the vertical and the horizontal positions.

SYSTEM NOISE FLOOR FOR HARMONIC AND SPURIOUS MEASUREMENTS

Compliance Certification Services

Worst Case Radiated Emissions System Noise Floor

Each band below corresponds to each horn antenna band

Uses the lowest gain preamplifier; actual preamp used may have higher gain

Uses the longest typical cable configuration; actual cables used may have less loss

Noise floor field strength results are compared to the FCC 15.205 Restricted Band limit

Specification Distance: 3 meters

| Freq GHz | SA dBuV | AF dB/m | Distance m | Distance dB | Preamp dB | Cable dB | Field dBuV/m | Limit dBuV/m | Margin dB |
|---|------------|------------|---------------|----------------|--------------|-------------|-----------------|-----------------|--------------|
| 1 to 18 GHz band | | | | | | | | | |
| RBW = 1 MHz, peak detection | | | | | | | | | |
| 18 | 41.9 | 47.8 | 1 | -9.5 | 32.6 | 13.5 | 61.06 | 74 | -12.94 |
| RBW = 1 MHz, average detection | | | | | | | | | |
| 18 | 28.7 | 47.8 | 1 | -9.5 | 32.6 | 13.5 | 47.86 | 54 | -6.14 |
| 18 to 26 GHz band | | | | | | | | | |
| RBW = 1 MHz, peak detection | | | | | | | | | |
| 26 | 44.6 | 33.4 | 1 | -9.5 | 35.0 | 19.5 | 52.96 | 74 | -21.04 |
| RBW = 1 MHz, average detection | | | | | | | | | |
| 26 | 32.4 | 33.4 | 1 | -9.5 | 35.0 | 19.5 | 40.76 | 54 | -13.24 |
| 26 to 40 GHz band | | | | | | | | | |
| External mixer is used for this band | | | | | | | | | |
| Preamplifier is internal to Spectrum Analyzer, with gain factor built into firmware | | | | | | | | | |
| Antenna is mounted directly on external mixer, therefore cable = 0 dB | | | | | | | | | |
| RBW = 1 MHz, peak detection | | | | | | | | | |
| 40 | 39.2 | 44.5 | 0.3 | -20.0 | 0.0 | 0 | 63.70 | 74 | -10.30 |
| RBW = 1 MHz, average detection | | | | | | | | | |
| 40 | 27.2 | 44.5 | 0.3 | -20.0 | 0.0 | 0 | 51.70 | 54 | -2.30 |

TEST RESULTS

No non-compliance noted:

08/03/02 **FCC Measurement**

Compliance Certification Services, Morgan Hill Open Field Site

Test Engr: Thu Chan
Project #: 02U1403
Company: Proxim Corporation QK
EUT Descrip.: 802.11a Cardbus
EUT M/N: Harmony/Skyline 802.11a/b/g #109
Test Target: FCC 15.247
Mode Oper: Low Channel, 2.412GHz, Output Power = 18dBm, 11Mb Rate, b mode

Equipment for 1-22 GHz:

HP8566B Analyzer
Miteq NSP2600-44 Preamp
EMCO 3115 Antenna
Cable: 15.0 feet

Equipment for 22 - 58 GHz:

HP8566B Analyzer
HP 11975A Amplifier (LO)
HP 11970K External mixer/antenna
Cable: IF Only (321 MHz)

Peak Measurements:

1 MHz Resolution Bandwidth
1MHz Video Bandwidth

Average Measurements:

1MHz Resolution Bandwidth
10Hz Video Bandwidth

| f GHz | Dist feet | Read Pk dBuV | Read Avg. dBuV | AF dB/m | CL dB | Amp dB | D Corr dB | HPF | Peak dBuV/m | Avg dBuV/m | Pk Lim dBuV/m | Avg Lim dBuV/m | Pk Mar dB | Avg Mar dB | Notes |
|--|--------------|-----------------|-------------------|------------|----------|-----------|--------------|-----|----------------|---------------|------------------|-------------------|--------------|---------------|-------|
| Fundamental: | | | | | | | | | | | | | | | |
| 2.412 | 3.3 | 86.1 | | 28.9 | 3.1 | 0.0 | -9.5 | 0.0 | 108.6 | | | | | | V |
| 2.412 | 3.3 | 80.7 | | 28.9 | 3.1 | 0.0 | -9.5 | 0.0 | 103.2 | | | | | | H |
| Spurious & Harmonics within restricted bands: | | | | | | | | | | | | | | | |
| 2.390 | 3.3 | 41.3 | 30.3 | 28.9 | 3.1 | 0.0 | -9.5 | 0.0 | 63.7 | 52.7 | 74.0 | 54.0 | -10.3 | -1.3 | V |
| 2.386 | 3.3 | 42.5 | 30.8 | 28.8 | 3.1 | 0.0 | -9.5 | 0.0 | 64.9 | 53.2 | 74.0 | 54.0 | -9.1 | -0.8 | V |
| 2.390 | 3.3 | 35.9 | 25.6 | 28.9 | 3.1 | 0.0 | -9.5 | 0.0 | 58.4 | 48.0 | 74.0 | 54.0 | -15.6 | -6.0 | H |
| 2.386 | 3.3 | 37.9 | 25.8 | 28.8 | 3.1 | 0.0 | -9.5 | 0.0 | 60.3 | 48.3 | 74.0 | 54.0 | -13.7 | -5.7 | H |
| 2.251 | 3.3 | 35.0 | 26.0 | 28.6 | 3.1 | 0.0 | -9.5 | 0.0 | 57.1 | 48.1 | 74.0 | 54.0 | -16.9 | -5.9 | H |
| 2.270 | 3.3 | 34.0 | 23.5 | 28.6 | 3.1 | 0.0 | -9.5 | 0.0 | 56.2 | 45.7 | 74.0 | 54.0 | -17.8 | -8.3 | H |
| 2.316 | 3.3 | 32.5 | 20.0 | 28.7 | 3.1 | 0.0 | -9.5 | 0.0 | 54.8 | 42.3 | 74.0 | 54.0 | -19.2 | -11.7 | H |
| 4.824 | 3.3 | 63.4 | 48.0 | 33.8 | 5.7 | -36.1 | -9.5 | 1.0 | 58.4 | 43.0 | 74.0 | 54.0 | -15.6 | -11.0 | H |
| 12.062 | 3.3 | 52.4 | 42.0 | 39.4 | 9.5 | -36.3 | -9.5 | 1.0 | 56.5 | 46.1 | 74.0 | 54.0 | -17.5 | -7.9 | H |
| 2.251 | 3.3 | 35.6 | 26.2 | 28.6 | 3.1 | 0.0 | -9.5 | 0.0 | 57.8 | 48.3 | 74.0 | 54.0 | -16.2 | -5.7 | V |
| 2.270 | 3.3 | 34.3 | 23.8 | 28.6 | 3.1 | 0.0 | -9.5 | 0.0 | 56.4 | 46.0 | 74.0 | 54.0 | -17.6 | -8.0 | V |
| 2.316 | 3.3 | 32.5 | 20.5 | 28.7 | 3.1 | 0.0 | -9.5 | 0.0 | 54.8 | 42.8 | 74.0 | 54.0 | -19.2 | -11.2 | V |
| 4.824 | 3.3 | 55.5 | 39.2 | 33.8 | 5.7 | -36.1 | -9.5 | 1.0 | 50.5 | 34.2 | 74.0 | 54.0 | -23.5 | -19.8 | V |
| 12.062 | 3.3 | 49.9 | 39.0 | 39.4 | 9.5 | -36.3 | -9.5 | 1.0 | 54.1 | 43.1 | 74.0 | 54.0 | -19.9 | -10.9 | V |
| Spurious & Harmonics outside restricted bands: | | | | | | | | | | | | | | | |
| 1.997 | 3.3 | 33.0 | | 28.0 | 3.1 | 0.0 | -9.5 | 0.0 | 54.6 | | 88.6 | | -34.1 | | V |
| 2.059 | 3.3 | 35.0 | | 28.1 | 3.1 | 0.0 | -9.5 | 0.0 | 56.7 | | 88.6 | | -31.9 | | V |
| 2.125 | 3.3 | 32.0 | | 28.3 | 3.1 | 0.0 | -9.5 | 0.0 | 53.9 | | 88.6 | | -34.8 | | V |
| 2.188 | 3.3 | 33.5 | | 28.4 | 3.1 | 0.0 | -9.5 | 0.0 | 55.5 | | 88.6 | | -33.1 | | V |
| 7.237 | 3.3 | 64.8 | | 37.0 | 7.2 | -36.3 | -9.5 | 1.0 | 64.3 | | 88.6 | | -24.4 | | V |
| 9.647 | 3.3 | 63.0 | | 39.7 | 8.5 | -35.4 | -9.5 | 1.0 | 67.3 | | 88.6 | | -21.4 | | V |
| 9.636 | 3.3 | 56.2 | | 39.7 | 8.5 | -35.4 | -9.5 | 1.0 | 60.5 | | 88.6 | | -28.2 | | V |
| 9.658 | 3.3 | 56.1 | | 39.7 | 8.5 | -35.4 | -9.5 | 1.0 | 60.5 | | 88.6 | | -28.2 | | V |
| 5.579 | 3.3 | 61.1 | | 35.1 | 6.3 | -36.2 | -9.5 | 1.0 | 57.8 | | 88.6 | | -30.8 | | V |
| 6.336 | 3.3 | 64.4 | | 35.4 | 6.8 | -36.3 | -9.5 | 1.0 | 61.8 | | 88.6 | | -26.9 | | V |
| 1.997 | 3.3 | 33.0 | | 28.0 | 3.1 | 0.0 | -9.5 | 0.0 | 54.6 | | 88.6 | | -34.1 | | H |
| 2.059 | 3.3 | 35.0 | | 28.1 | 3.1 | 0.0 | -9.5 | 0.0 | 56.7 | | 88.6 | | -31.9 | | H |
| 2.125 | 3.3 | 32.0 | | 28.3 | 3.1 | 0.0 | -9.5 | 0.0 | 53.9 | | 88.6 | | -34.8 | | H |
| 2.188 | 3.3 | 33.5 | | 28.4 | 3.1 | 0.0 | -9.5 | 0.0 | 55.5 | | 88.6 | | -33.1 | | H |
| 7.237 | 3.3 | 59.0 | | 37.0 | 7.2 | -36.3 | -9.5 | 1.0 | 58.5 | | 88.6 | | -30.2 | | H |
| 9.647 | 3.3 | 56.5 | | 39.7 | 8.5 | -35.4 | -9.5 | 1.0 | 60.8 | | 88.6 | | -27.8 | | H |
| 9.636 | 3.3 | 51.5 | | 39.7 | 8.5 | -35.4 | -9.5 | 1.0 | 55.8 | | 88.6 | | -32.9 | | H |
| 9.658 | 3.3 | 51.5 | | 39.7 | 8.5 | -35.4 | -9.5 | 1.0 | 55.8 | | 88.6 | | -32.8 | | H |
| 5.579 | 3.3 | 55.9 | | 35.1 | 6.3 | -36.2 | -9.5 | 1.0 | 52.7 | | 88.6 | | -36.0 | | H |
| 6.336 | 3.3 | 60.4 | | 35.4 | 6.8 | -36.3 | -9.5 | 1.0 | 57.8 | | 88.6 | | -30.9 | | H |

* No other emissions were found within 20dB under the limits up to 25GHz.

08/03/02 FCC Measurement

Compliance Certification Services, Morgan Hill Open Field Site

Test Engr: Thu Chan
Project #: 02U1403
Company: Proxim Corporation QK
EUT Descr.: 802.11a Cardbus
EUT M/N: Harmony/Skyline 802.11a/b/g #109
Test Target: FCC 15.247
Mode Oper: Mid Channel, 2.437GHz, Output Power = 18.0dBm, 11Mb Rate, b mode

Equipment for 1-22 GHz:

HP8566B Analyzer
Miteq NSP2600-44 Preamp
EMCO 3115 Antenna
Cable: 15.0 feet

Equipment for 22 - 58 GHz:

HP8566B Analyzer
HP 11975A Amplifier (LO)
HP 11970K External mixer/antenna
Cable: IF Only (321 MHz)

Peak Measurements:

1 MHz Resolution Bandwidth
1MHz Video Bandwidth

Average Measurements:

1MHz Resolution Bandwidth
10Hz Video Bandwidth

| f GHz | Dist feet | Read Pk dBuV | Read Avg. dBuV | AF dB/m | CL dB | Amp dB | D Corr dB | HPF | Peak dBuV/m | Avg dBuV/m | Pk Lim dBuV/m | Avg Lim dBuV/m | Pk Mar dB | Avg Mar dB | Notes |
|--|--------------|-----------------|-------------------|------------|----------|-----------|--------------|-----|----------------|---------------|------------------|-------------------|--------------|---------------|-------|
| Fundamental: | | | | | | | | | | | | | | | |
| 2.437 | 3.3 | 86.9 | | 29.0 | 3.1 | 0.0 | -9.5 | 0.0 | 109.5 | | | | | | V |
| 2.437 | 3.3 | 81.3 | | 29.0 | 3.1 | 0.0 | -9.5 | 0.0 | 103.9 | | | | | | H |
| Spurious & Harmonics within restricted bands: | | | | | | | | | | | | | | | |
| 2.214 | 3.3 | 37.2 | 27.0 | 28.5 | 4.0 | 0.0 | -9.5 | 0.0 | 60.1 | 50.0 | 74.0 | 54.0 | -13.9 | -4.0 | V |
| 2.228 | 3.3 | 35.8 | 28.0 | 28.5 | 4.1 | 0.0 | -9.5 | 0.0 | 58.9 | 51.1 | 74.0 | 54.0 | -15.1 | -2.9 | V |
| 2.277 | 3.3 | 38.8 | 28.0 | 28.6 | 4.1 | 0.0 | -9.5 | 0.0 | 62.0 | 51.2 | 74.0 | 54.0 | -12.0 | -2.8 | V |
| 4.874 | 3.3 | 71.1 | 56.0 | 33.9 | 5.8 | -36.1 | -9.5 | 1.0 | 66.2 | 51.1 | 74.0 | 54.0 | -7.8 | -2.9 | V |
| 7.311 | 3.3 | 63.7 | 53.6 | 37.2 | 7.3 | -36.3 | -9.5 | 1.0 | 63.4 | 53.3 | 74.0 | 54.0 | -10.6 | -0.7 | V |
| 12.185 | 3.3 | 53.7 | 43.5 | 39.3 | 9.5 | -36.4 | -9.5 | 1.0 | 57.7 | 47.5 | 74.0 | 54.0 | -16.3 | -6.5 | V |
| 2.214 | 3.3 | 36.5 | 27.0 | 28.5 | 4.0 | 0.0 | -9.5 | 0.0 | 59.5 | 50.0 | 74.0 | 54.0 | -14.5 | -4.0 | H |
| 2.228 | 3.3 | 35.0 | 24.0 | 28.5 | 4.1 | 0.0 | -9.5 | 0.0 | 58.1 | 47.1 | 74.0 | 54.0 | -15.9 | -6.9 | H |
| 2.277 | 3.3 | 35.0 | 24.0 | 28.6 | 4.1 | 0.0 | -9.5 | 0.0 | 58.2 | 47.2 | 74.0 | 54.0 | -15.8 | -6.8 | H |
| 4.874 | 3.3 | 63.6 | 49.0 | 33.9 | 5.8 | -36.1 | -9.5 | 1.0 | 58.7 | 44.1 | 74.0 | 54.0 | -15.3 | -9.9 | H |
| 7.311 | 3.3 | 60.9 | 50.9 | 37.2 | 7.3 | -36.3 | -9.5 | 1.0 | 60.6 | 50.6 | 74.0 | 54.0 | -13.4 | -3.4 | H |
| 12.185 | 3.3 | 51.1 | 39.0 | 39.3 | 9.5 | -36.4 | -9.5 | 1.0 | 55.1 | 43.0 | 74.0 | 54.0 | -18.9 | -11.0 | H |
| Spurious & Harmonics outside restricted bands: | | | | | | | | | | | | | | | |
| 2.022 | 3.3 | 39.0 | | 28.0 | 3.9 | 0.0 | -9.5 | 0.0 | 61.5 | | 89.5 | | -28.0 | | V |
| 2.086 | 3.3 | 37.7 | | 28.2 | 4.0 | 0.0 | -9.5 | 0.0 | 60.3 | | 89.5 | | -29.1 | | V |
| 2.150 | 3.3 | 34.7 | | 28.3 | 4.0 | 0.0 | -9.5 | 0.0 | 57.5 | | 89.5 | | -32.0 | | V |
| 9.748 | 3.3 | 62.4 | | 39.8 | 8.6 | -35.5 | -9.5 | 1.0 | 66.8 | | 89.5 | | -22.6 | | V |
| 14.622 | 3.3 | 53.5 | | 41.3 | 10.9 | -38.2 | -9.5 | 1.0 | 59.0 | | 89.5 | | -30.4 | | V |
| 5.605 | 3.3 | 63.7 | | 35.2 | 6.3 | -36.2 | -9.5 | 1.0 | 60.5 | | 89.5 | | -29.0 | | V |
| 6.336 | 3.3 | 65.7 | | 35.4 | 6.8 | -36.3 | -9.5 | 1.0 | 63.0 | | 89.5 | | -26.5 | | V |
| 9.737 | 3.3 | 60.5 | | 39.8 | 8.6 | -35.5 | -9.5 | 1.0 | 64.9 | | 89.5 | | -24.5 | | V |
| 9.759 | 3.3 | 60.0 | | 39.9 | 8.6 | -35.5 | -9.5 | 1.0 | 64.5 | | 89.5 | | -25.0 | | V |
| 2.022 | 3.3 | 37.0 | | 28.0 | 3.9 | 0.0 | -9.5 | 0.0 | 59.5 | | 89.5 | | -30.0 | | H |
| 2.086 | 3.3 | 37.5 | | 28.2 | 4.0 | 0.0 | -9.5 | 0.0 | 60.2 | | 89.5 | | -29.3 | | H |
| 9.748 | 3.3 | 59.5 | | 39.8 | 8.6 | -35.5 | -9.5 | 1.0 | 63.9 | | 89.5 | | -25.5 | | H |
| 14.622 | 3.3 | 50.5 | | 41.3 | 10.9 | -38.2 | -9.5 | 1.0 | 56.0 | | 89.5 | | -33.4 | | H |
| 5.605 | 3.3 | 54.0 | | 35.2 | 6.3 | -36.2 | -9.5 | 1.0 | 50.8 | | 89.5 | | -38.7 | | H |
| 6.336 | 3.3 | 62.8 | | 35.4 | 6.8 | -36.3 | -9.5 | 1.0 | 60.2 | | 89.5 | | -29.3 | | H |
| 9.737 | 3.3 | 52.5 | | 39.8 | 8.6 | -35.5 | -9.5 | 1.0 | 57.0 | | 89.5 | | -32.5 | | H |
| 9.759 | 3.3 | 52.5 | | 39.9 | 8.6 | -35.5 | -9.5 | 1.0 | 57.0 | | 89.5 | | -32.5 | | H |

* No other emissions were found within 20dB under the limits up to 25GHz.

| | | | | | |
|------|-----------------------|--------|--------------------------------|---------|------------------------------|
| f | Measurement Frequency | Amp | Preamp Gain | Avg Lim | Average Field Strength Limit |
| Dist | Distance to Antenna | D Corr | Distance Correct to 3 meters | Pk Lim | Peak Field Strength Limit |
| Read | Analyzer Reading | Avg | Average Field Strength @ 3 m | Avg Mar | Margin vs. Average Limit |
| AF | Antenna Factor | Peak | Calculated Peak Field Strength | Pk Mar | Margin vs. Peak Limit |
| CL | Cable Loss | HPF | High Pass Filter | | |

08/03/02 **FCC Measurement**

Compliance Certification Services, Morgan Hill Open Field Site

Test Engr: Thu Chan
Project #: 02U1403
Company: Proxim Corporation QK
EUT Descrip.: 802.11a Cardbus
EUT M/N: Harmony/Skyline 802.11a/b/g #109
Test Target: FCC 15.247
Mode Oper: High Channel, 2.462GHz, Output Power = 18dBm, 11Mb Rate, b mode

Equipment for 1-22 GHz:

HP8566B Analyzer
Miteq NSP2600-44 Preamp
EMCO 3115 Antenna
Cable: 15.0 feet

Equipment for 22 - 58 GHz:

HP8566B Analyzer
HP 11975A Amplifier (LO)
HP 11970K External mixer/antenna
Cable: IF Only (321 MHz)

Peak Measurements:

1 MHz Resolution Bandwidth
1MHz Video Bandwidth

Average Measurements:

1MHz Resolution Bandwidth
10Hz Video Bandwidth

| f GHz | Dist feet | Read Pk dBuV | Read Avg. dBuV | AF dB/m | CL dB | Amp dB | D Corr dB | HPF | Peak dBuV/m | Avg dBuV/m | Pk Lim dBuV/m | Avg Lim dBuV/m | Pk Mar dB | Avg Mar dB | Notes |
|--|-----------|--------------|----------------|---------|-------|--------|-----------|-----|-------------|------------|---------------|----------------|-----------|------------|-------|
| Fundamental: | | | | | | | | | | | | | | | |
| 2.462 | 3.3 | 84.4 | | 29.0 | 3.1 | 0.0 | -9.5 | 0.0 | 107.1 | | | | | | V |
| 2.462 | 3.3 | 78.9 | | 29.0 | 3.1 | 0.0 | -9.5 | 0.0 | 101.5 | | | | | | H |
| Spurious & Harmonics within restricted bands: | | | | | | | | | | | | | | | |
| 2.484 | 3.3 | 41.8 | 30.7 | 29.1 | 3.1 | 0.0 | -9.5 | 0.0 | 64.5 | 53.4 | 74.0 | 54.0 | -9.5 | -0.6 | V |
| 2.494 | 3.3 | 40.6 | 28.6 | 29.1 | 3.1 | 0.0 | -9.5 | 0.0 | 63.3 | 51.3 | 74.0 | 54.0 | -10.7 | -2.7 | V |
| 2.484 | 3.3 | 33.9 | 23.8 | 29.1 | 3.1 | 0.0 | -9.5 | 0.0 | 56.6 | 46.5 | 74.0 | 54.0 | -17.4 | -7.5 | H |
| 2.487 | 3.3 | 32.7 | 22.0 | 29.1 | 3.1 | 0.0 | -9.5 | 0.0 | 55.3 | 44.7 | 74.0 | 54.0 | -18.7 | -9.3 | H |
| 2.237 | 3.3 | 36.5 | 28.5 | 28.5 | 3.1 | 0.0 | -9.5 | 0.0 | 58.6 | 50.6 | 74.0 | 54.0 | -15.4 | -3.4 | V |
| 2.336 | 3.3 | 36.0 | 26.5 | 28.7 | 3.1 | 0.0 | -9.5 | 0.0 | 58.4 | 48.9 | 74.0 | 54.0 | -15.6 | -5.1 | V |
| 2.366 | 3.3 | 35.0 | 24.0 | 28.8 | 3.1 | 0.0 | -9.5 | 0.0 | 57.4 | 46.4 | 74.0 | 54.0 | -16.6 | -7.6 | V |
| 4.924 | 3.3 | 57.4 | 43.0 | 34.1 | 5.8 | -36.1 | -9.5 | 1.0 | 52.8 | 38.3 | 74.0 | 54.0 | -21.2 | -15.7 | V |
| 7.386 | 3.3 | 63.8 | 53.7 | 37.3 | 7.3 | -36.2 | -9.5 | 1.0 | 63.8 | 53.7 | 74.0 | 54.0 | -10.2 | -0.3 | V |
| 12.310 | 3.3 | 49.8 | 40.0 | 39.2 | 9.6 | -36.4 | -9.5 | 1.0 | 53.6 | 43.9 | 74.0 | 54.0 | -20.4 | -10.1 | V |
| 2.237 | 3.3 | 33.5 | 25.0 | 28.5 | 3.1 | 0.0 | -9.5 | 0.0 | 55.6 | 47.1 | 74.0 | 54.0 | -18.4 | -6.9 | H |
| 2.336 | 3.3 | 32.0 | 24.0 | 28.7 | 3.1 | 0.0 | -9.5 | 0.0 | 54.4 | 46.4 | 74.0 | 54.0 | -19.6 | -7.6 | H |
| 2.366 | 3.3 | 30.0 | 21.0 | 28.8 | 3.1 | 0.0 | -9.5 | 0.0 | 52.4 | 43.4 | 74.0 | 54.0 | -21.6 | -10.6 | H |
| 4.924 | 3.3 | 55.0 | 39.5 | 34.1 | 5.8 | -36.1 | -9.5 | 1.0 | 50.3 | 34.8 | 74.0 | 54.0 | -23.7 | -19.2 | H |
| 7.386 | 3.3 | 62.8 | 52.8 | 37.3 | 7.3 | -36.2 | -9.5 | 1.0 | 62.8 | 52.8 | 74.0 | 54.0 | -11.2 | -1.2 | H |
| 12.310 | 3.3 | 50.0 | 39.5 | 39.2 | 9.6 | -36.4 | -9.5 | 1.0 | 53.9 | 43.4 | 74.0 | 54.0 | -20.1 | -10.6 | H |
| Spurious & Harmonics outside restricted bands: | | | | | | | | | | | | | | | |
| 1.988 | 3.3 | 33.0 | | 27.9 | 3.1 | 0.0 | -9.5 | 0.0 | 54.6 | | 87.1 | | -32.5 | | V |
| 2.047 | 3.3 | 35.5 | | 28.1 | 3.1 | 0.0 | -9.5 | 0.0 | 57.2 | | 87.1 | | -29.8 | | V |
| 2.109 | 3.3 | 35.0 | | 28.2 | 3.1 | 0.0 | -9.5 | 0.0 | 56.9 | | 87.1 | | -30.2 | | V |
| 2.174 | 3.3 | 31.0 | | 28.4 | 3.1 | 0.0 | -9.5 | 0.0 | 53.0 | | 87.1 | | -34.1 | | V |
| 2.303 | 3.3 | 35.0 | | 28.7 | 3.1 | 0.0 | -9.5 | 0.0 | 57.3 | | 87.1 | | -29.8 | | V |
| 2.399 | 3.3 | 40.0 | | 28.9 | 3.1 | 0.0 | -9.5 | 0.0 | 62.5 | | 87.1 | | -24.6 | | V |
| 9.848 | 3.3 | 62.2 | | 40.0 | 8.6 | -35.5 | -9.5 | 1.0 | 66.8 | | 87.1 | | -20.2 | | V |
| 14.772 | 3.3 | 49.0 | | 40.9 | 11.0 | -38.3 | -9.5 | 1.0 | 54.0 | | 87.1 | | -33.0 | | V |
| 5.630 | 3.3 | 57.2 | | 35.2 | 6.3 | -36.2 | -9.5 | 1.0 | 54.0 | | 87.1 | | -33.1 | | V |
| 6.336 | 3.3 | 64.5 | | 35.4 | 6.8 | -36.3 | -9.5 | 1.0 | 61.9 | | 87.1 | | -25.2 | | V |
| 9.837 | 3.3 | 57.3 | | 40.0 | 8.6 | -35.5 | -9.5 | 1.0 | 61.9 | | 87.1 | | -25.1 | | V |
| 2.047 | 3.3 | 34.0 | | 28.1 | 3.1 | 0.0 | -9.5 | 0.0 | 55.7 | | 87.1 | | -31.3 | | H |
| 2.109 | 3.3 | 34.0 | | 28.2 | 3.1 | 0.0 | -9.5 | 0.0 | 55.9 | | 87.1 | | -31.2 | | H |
| 2.174 | 3.3 | 32.0 | | 28.4 | 3.1 | 0.0 | -9.5 | 0.0 | 54.0 | | 87.1 | | -33.1 | | H |
| 2.303 | 3.3 | 35.0 | | 28.7 | 3.1 | 0.0 | -9.5 | 0.0 | 57.3 | | 87.1 | | -29.8 | | H |
| 2.399 | 3.3 | 35.0 | | 28.9 | 3.1 | 0.0 | -9.5 | 0.0 | 57.5 | | 87.1 | | -29.6 | | H |
| 9.848 | 3.3 | 56.0 | | 40.0 | 8.6 | -35.5 | -9.5 | 1.0 | 60.6 | | 87.1 | | -26.4 | | H |
| 5.630 | 3.3 | 55.5 | | 35.2 | 6.3 | -36.2 | -9.5 | 1.0 | 52.3 | | 87.1 | | -34.7 | | H |
| 6.336 | 3.3 | 59.1 | | 35.4 | 6.8 | -36.3 | -9.5 | 1.0 | 56.5 | | 87.1 | | -30.6 | | H |
| 9.837 | 3.3 | 51.0 | | 40.0 | 8.6 | -35.5 | -9.5 | 1.0 | 55.6 | | 87.1 | | -31.4 | | H |

* No other emissions were found within 20dB under the limits up to 25GHz.

08/03/02 FCC Measurement

Compliance Certification Services, Morgan Hill Open Field Site

Test Engr: Thu Chan
Project #: 02U1403
Company: Proxim Corporation QK
EUT Descrip.: 802.11a Cardbus
EUT M/N: Harmony/Skyline 802.11a/b/g #109
Test Target: FCC 15.247
Mode Oper: Low Channel, 2.412GHz, Output Power = 13dBm, 54Mb Rate, g mode

Equipment for 1-22 GHz:

HP8566B Analyzer
Miteq NSP2600-44 Preamp
EMCO 3115 Antenna
Cable: 15.0 feet

Equipment for 22 - 58 GHz:

HP8566B Analyzer
HP 11975A Amplifier (LO)
HP 11970K External mixer/antenna
Cable: IF Only (321 MHz)

Peak Measurements:

1 MHz Resolution Bandwidth
1MHz Video Bandwidth

Average Measurements:

1MHz Resolution Bandwidth
10Hz Video Bandwidth

| f GHz | Dist feet | Read Pk dBuV | Read Avg. dBuV | AF dB/m | CL dB | Amp dB | D Corr dB | HPF | Peak dBuV/m | Avg dBuV/m | Pk Lim dBuV/m | Avg Lim dBuV/m | Pk Mar dB | Avg Mar dB | Notes |
|--|--------------|-----------------|-------------------|------------|----------|-----------|--------------|-----|----------------|---------------|------------------|-------------------|--------------|---------------|-------|
| Fundamental: | | | | | | | | | | | | | | | |
| 2.412 | 3.3 | 83.4 | | 28.9 | 3.1 | 0.0 | -9.5 | 0.0 | 105.9 | | | | | | V |
| 2.412 | 3.3 | 75.8 | | 28.9 | 3.1 | 0.0 | -9.5 | 0.0 | 98.3 | | | | | | H |
| Spurious & harmonics within restricted bands: | | | | | | | | | | | | | | | |
| 2.390 | 3.3 | 47.5 | 30.7 | 28.9 | 3.1 | 0.0 | -9.5 | 0.0 | 69.9 | 53.2 | 74.0 | 54.0 | -4.1 | -0.8 | V |
| 2.380 | 3.3 | 42.0 | 29.2 | 28.8 | 3.1 | 0.0 | -9.5 | 0.0 | 64.4 | 51.6 | 74.0 | 54.0 | -9.6 | -2.4 | V |
| 2.249 | 3.3 | 32.0 | 22.0 | 28.5 | 3.1 | 0.0 | -9.5 | 0.0 | 54.1 | 44.1 | 74.0 | 54.0 | -19.9 | -9.9 | V |
| 4.824 | 3.3 | 59.5 | 45.5 | 33.8 | 5.7 | -36.1 | -9.5 | 1.0 | 54.5 | 40.5 | 74.0 | 54.0 | -19.5 | -13.5 | V |
| 12.062 | 3.3 | 48.0 | 34.5 | 39.4 | 9.5 | -36.3 | -9.5 | 1.0 | 52.1 | 38.6 | 74.0 | 54.0 | -21.9 | -15.4 | V |
| 2.390 | 3.3 | 40.5 | 24.3 | 28.9 | 3.1 | 0.0 | -9.5 | 0.0 | 62.9 | 46.7 | 74.0 | 54.0 | -11.1 | -7.3 | H |
| 2.380 | 3.3 | 33.3 | 22.3 | 28.8 | 3.1 | 0.0 | -9.5 | 0.0 | 55.7 | 44.7 | 74.0 | 54.0 | -18.3 | -9.3 | H |
| 4.824 | 3.3 | 56.4 | 43.5 | 33.8 | 5.7 | -36.1 | -9.5 | 1.0 | 51.4 | 38.5 | 74.0 | 54.0 | -22.6 | -15.5 | H |
| 12.062 | 3.3 | 47.0 | 34.0 | 39.4 | 9.5 | -36.3 | -9.5 | 1.0 | 51.1 | 38.1 | 74.0 | 54.0 | -22.9 | -15.9 | H |
| Spurious & harmonics outside restricted bands: | | | | | | | | | | | | | | | |
| 2.058 | 3.3 | 33.0 | | 28.1 | 3.1 | 0.0 | -9.5 | 0.0 | 54.7 | | 85.9 | | -31.2 | | V |
| 2.122 | 3.3 | 29.0 | | 28.3 | 3.1 | 0.0 | -9.5 | 0.0 | 50.8 | | 85.9 | | -35.1 | | V |
| 2.188 | 3.3 | 30.0 | | 28.4 | 3.1 | 0.0 | -9.5 | 0.0 | 52.0 | | 85.9 | | -33.9 | | V |
| 7.237 | 3.3 | 73.5 | | 37.0 | 7.2 | -36.3 | -9.5 | 1.0 | 73.0 | | 85.9 | | -12.9 | | V |
| 9.647 | 3.3 | 54.3 | | 39.7 | 8.5 | -35.4 | -9.5 | 1.0 | 58.6 | | 85.9 | | -27.3 | | V |
| 5.579 | 3.3 | 63.0 | | 35.1 | 6.3 | -36.2 | -9.5 | 1.0 | 59.8 | | 85.9 | | -26.1 | | V |
| 6.336 | 3.3 | 60.0 | | 35.4 | 6.8 | -36.3 | -9.5 | 1.0 | 57.4 | | 85.9 | | -28.5 | | V |
| 7.237 | 3.3 | 62.5 | | 37.0 | 7.2 | -36.3 | -9.5 | 1.0 | 62.0 | | 85.9 | | -23.9 | | H |
| 9.647 | 3.3 | 50.5 | | 39.7 | 8.5 | -35.4 | -9.5 | 1.0 | 54.8 | | 85.9 | | -31.1 | | H |
| 5.579 | 3.3 | 55.7 | | 35.1 | 6.3 | -36.2 | -9.5 | 1.0 | 52.5 | | 85.9 | | -33.4 | | H |
| 6.336 | 3.3 | 55.2 | | 35.4 | 6.8 | -36.3 | -9.5 | 1.0 | 52.6 | | 85.9 | | -33.3 | | H |

* No other emissions were found within 20dB under the limits up to 25GHz.

| | | | | | |
|------|-----------------------|--------|--------------------------------|---------|------------------------------|
| f | Measurement Frequency | Amp | Preamp Gain | Avg Lim | Average Field Strength Limit |
| Dist | Distance to Antenna | D Corr | Distance Correct to 3 meters | Pk Lim | Peak Field Strength Limit |
| Read | Analyzer Reading | Avg | Average Field Strength @ 3 m | Avg Mar | Margin vs. Average Limit |
| AF | Antenna Factor | Peak | Calculated Peak Field Strength | Pk Mar | Margin vs. Peak Limit |
| CL | Cable Loss | HPF | High Pass Filter | | |

08/03/02 **FCC Measurement**

Compliance Certification Services, Morgan Hill Open Field Site

Test Engr: Thu Chan
Project #: 02U1403
Company: Proxim Corporation QK
EUT Descrip.: 802.11a Cardbus
EUT M/N: Harmony/Skyline 802.11a/b/g #109
Test Target: FCC 15.247
Mode Oper: Mid Channel, 2.437GHz, Output Power = 18.0dBm, 54Mb Rate, g mode

Equipment for 1-22 GHz:

HP8566B Analyzer
Miteq NSP2600-44 Preamp
EMCO 3115 Antenna
Cable: 15.0 feet

Equipment for 22 - 58 GHz:

HP8566B Analyzer
HP 11975A Amplifier (LO)
HP 11970K External mixer/antenna
Cable: IF Only (321 MHz)

Peak Measurements:

1 MHz Resolution Bandwidth
1MHz Video Bandwidth

Average Measurements:

1MHz Resolution Bandwidth
10Hz Video Bandwidth

| f GHz | Dist feet | Read Pk dBuV | Read Avg. dBuV | AF dB/m | CL dB | Amp dB | D Corr dB | HPF | Peak dBuV/m | Avg dBuV/m | Pk Lim dBuV/m | Avg Lim dBuV/m | Pk Mar dB | Avg Mar dB | Notes |
|---|--------------|-----------------|-------------------|------------|----------|-----------|--------------|-----|----------------|---------------|------------------|-------------------|--------------|---------------|-------|
| Fundamental: | | | | | | | | | | | | | | | |
| 2.437 | 3.3 | 88.0 | | 29.0 | 3.1 | 0.0 | -9.5 | 0.0 | 110.6 | | | | | | V |
| 2.437 | 3.3 | 81.0 | | 29.0 | 3.1 | 0.0 | -9.5 | 0.0 | 103.6 | | | | | | H |
| Spurious & Harmonics within restricted bands: | | | | | | | | | | | | | | | |
| 2.216 | 3.3 | 32.0 | 22.0 | 28.5 | 3.1 | 0.0 | -9.5 | 0.0 | 54.1 | 44.1 | 74.0 | 54.0 | -19.9 | -9.9 | V |
| 2.282 | 3.3 | 34.0 | 22.0 | 28.6 | 3.1 | 0.0 | -9.5 | 0.0 | 56.2 | 44.2 | 74.0 | 54.0 | -17.8 | -9.8 | V |
| 4.874 | 3.3 | 48.3 | 36.5 | 33.9 | 5.8 | -36.1 | -9.5 | 1.0 | 43.4 | 31.6 | 74.0 | 54.0 | -30.6 | -22.4 | V |
| 7.311 | 3.3 | 59.5 | 45.5 | 37.2 | 7.3 | -36.3 | -9.5 | 1.0 | 59.2 | 45.2 | 74.0 | 54.0 | -14.8 | -8.8 | V |
| 12.185 | 3.3 | 54.7 | 42.5 | 39.3 | 9.5 | -36.4 | -9.5 | 1.0 | 58.7 | 46.5 | 74.0 | 54.0 | -15.3 | -7.5 | V |
| 2.216 | 3.3 | 33.0 | 21.5 | 28.5 | 3.1 | 0.0 | -9.5 | 0.0 | 55.1 | 43.6 | 74.0 | 54.0 | -18.9 | -10.4 | H |
| 2.282 | 3.3 | 33.0 | 21.5 | 28.6 | 3.1 | 0.0 | -9.5 | 0.0 | 55.2 | 43.7 | 74.0 | 54.0 | -18.8 | -10.3 | H |
| 4.874 | 3.3 | 47.0 | 35.0 | 33.9 | 5.8 | -36.1 | -9.5 | 1.0 | 42.1 | 30.1 | 74.0 | 54.0 | -31.9 | -23.9 | H |
| 7.311 | 3.3 | 57.8 | 44.0 | 37.2 | 7.3 | -36.3 | -9.5 | 1.0 | 57.5 | 43.7 | 74.0 | 54.0 | -16.5 | -10.3 | H |
| 12.185 | 3.3 | 53.9 | 42.0 | 39.3 | 9.5 | -36.4 | -9.5 | 1.0 | 57.9 | 46.0 | 74.0 | 54.0 | -16.1 | -8.0 | H |
| Spurious & Harmonics outside restricted bands: | | | | | | | | | | | | | | | |
| 2.024 | 3.3 | 33.0 | | 28.1 | 3.1 | 0.0 | -9.5 | 0.0 | 54.7 | | 90.6 | | -35.9 | | V |
| 2.082 | 3.3 | 32.0 | | 28.2 | 3.1 | 0.0 | -9.5 | 0.0 | 53.8 | | 90.6 | | -36.8 | | V |
| 9.748 | 3.3 | 58.2 | | 39.8 | 8.6 | -35.5 | -9.5 | 1.0 | 62.7 | | 90.6 | | -27.9 | | V |
| 14.622 | 3.3 | 54.8 | | 41.3 | 10.9 | -38.2 | -9.5 | 1.0 | 60.3 | | 90.6 | | -30.3 | | V |
| 5.605 | 3.3 | 65.1 | | 35.2 | 6.3 | -36.2 | -9.5 | 1.0 | 61.9 | | 90.6 | | -28.7 | | V |
| 6.336 | 3.3 | 61.3 | | 35.4 | 6.8 | -36.3 | -9.5 | 1.0 | 58.7 | | 90.6 | | -31.9 | | V |
| 2.024 | 3.3 | 31.0 | | 28.1 | 3.1 | 0.0 | -9.5 | 0.0 | 52.7 | | 90.6 | | -37.9 | | H |
| 2.082 | 3.3 | 32.0 | | 28.2 | 3.1 | 0.0 | -9.5 | 0.0 | 53.8 | | 90.6 | | -36.8 | | H |
| 9.748 | 3.3 | 52.5 | | 39.8 | 8.6 | -35.5 | -9.5 | 1.0 | 57.0 | | 90.6 | | -33.6 | | H |
| 14.622 | 3.3 | 51.7 | | 41.3 | 10.9 | -38.2 | -9.5 | 1.0 | 57.2 | | 90.6 | | -33.4 | | H |
| 5.605 | 3.3 | 60.9 | | 35.2 | 6.3 | -36.2 | -9.5 | 1.0 | 57.7 | | 90.6 | | -32.9 | | H |
| 6.336 | 3.3 | 59.0 | | 35.4 | 6.8 | -36.3 | -9.5 | 1.0 | 56.4 | | 90.6 | | -34.2 | | H |

* No other emissions were found within 20dB under the limits up to 25GHz.

| | | | | | |
|------|-----------------------|--------|--------------------------------|---------|------------------------------|
| f | Measurement Frequency | Amp | Preamp Gain | Avg Lim | Average Field Strength Limit |
| Dist | Distance to Antenna | D Corr | Distance Correct to 3 meters | Pk Lim | Peak Field Strength Limit |
| Read | Analyzer Reading | Avg | Average Field Strength @ 3 m | Avg Mar | Margin vs. Average Limit |
| AF | Antenna Factor | Peak | Calculated Peak Field Strength | Pk Mar | Margin vs. Peak Limit |
| CL | Cable Loss | HPF | High Pass Filter | | |

08/03/02 FCC Measurement

Compliance Certification Services, Morgan Hill Open Field Site

Test Engr: Thu Chan
Project #: 02U1403
Company: Proxim Corporation QK
EUT Descrip.: 802.11a Cardbus
EUT M/N: Harmony/Skyline 802.11a/b/g #109
Test Target: FCC 15.247
Mode Oper: High Channel, 2.462GHz, Output Power = 13.5dBm, 54Mb Rate, g mode

Equipment for 1-22 GHz:

HP8566B Analyzer
Miteq NSP2600-44 Preamp
EMCO 3115 Antenna
Cable: 15.0 feet

Equipment for 22 - 58 GHz:

HP8566B Analyzer
HP 11975A Amplifier (LO)
HP 11970K External mixer/antenna
Cable: IF Only (321 MHz)

Peak Measurements:

1 MHz Resolution Bandwidth
1MHz Video Bandwidth

Average Measurements:

1MHz Resolution Bandwidth
10Hz Video Bandwidth

| f GHz | Dist feet | Read Pk dBuV | Read Avg. dBuV | AF dB/m | CL dB | Amp dB | D Corr dB | HPF | Peak dBuV/m | Avg dBuV/m | Pk Lim dBuV/m | Avg Lim dBuV/m | Pk Mar dB | Avg Mar dB | Notes |
|--|--------------|-----------------|-------------------|------------|----------|-----------|--------------|-----|----------------|---------------|------------------|-------------------|--------------|---------------|-------|
| Fundamental: | | | | | | | | | | | | | | | |
| 2.462 | 3.3 | 83.8 | | 29.0 | 3.1 | 0.0 | -9.5 | 0.0 | 106.5 | | | | | | V |
| 2.462 | 3.3 | 76.7 | | 29.0 | 3.1 | 0.0 | -9.5 | 0.0 | 99.3 | | | | | | H |
| Spurious & Harmonics within restricted bands: | | | | | | | | | | | | | | | |
| 2.484 | 3.3 | 48.5 | 28.7 | 29.1 | 3.1 | 0.0 | -9.5 | 0.0 | 71.2 | 51.4 | 74.0 | 54.0 | -2.8 | -2.6 | V |
| 2.494 | 3.3 | 39.0 | 30.2 | 29.1 | 3.1 | 0.0 | -9.5 | 0.0 | 61.7 | 52.9 | 74.0 | 54.0 | -12.3 | -1.1 | V |
| 4.924 | 3.3 | 52.0 | 38.0 | 34.1 | 5.8 | -36.1 | -9.5 | 1.0 | 47.3 | 33.3 | 74.0 | 54.0 | -26.7 | -20.7 | V |
| 7.386 | 3.3 | 58.0 | 44.0 | 37.3 | 7.3 | -36.2 | -9.5 | 1.0 | 58.0 | 44.0 | 74.0 | 54.0 | -16.0 | -10.0 | V |
| 12.310 | 3.3 | 51.4 | 37.0 | 39.2 | 9.6 | -36.4 | -9.5 | 1.0 | 55.3 | 40.9 | 74.0 | 54.0 | -18.7 | -13.1 | V |
| 2.484 | 3.3 | 41.3 | 23.8 | 29.1 | 3.1 | 0.0 | -9.5 | 0.0 | 64.0 | 46.5 | 74.0 | 54.0 | -10.0 | -7.5 | H |
| 2.494 | 3.3 | 33.7 | 24.2 | 29.1 | 3.1 | 0.0 | -9.5 | 0.0 | 56.4 | 46.9 | 74.0 | 54.0 | -17.6 | -7.1 | H |
| 4.924 | 3.3 | 57.0 | 43.0 | 34.1 | 5.8 | -36.1 | -9.5 | 1.0 | 52.3 | 38.3 | 74.0 | 54.0 | -21.7 | -15.7 | H |
| 7.386 | 3.3 | 56.0 | 42.0 | 37.3 | 7.3 | -36.2 | -9.5 | 1.0 | 56.0 | 42.0 | 74.0 | 54.0 | -18.0 | -12.0 | H |
| 12.310 | 3.3 | 51.1 | 38.0 | 39.2 | 9.6 | -36.4 | -9.5 | 1.0 | 55.0 | 41.9 | 74.0 | 54.0 | -19.0 | -12.1 | H |
| Spurious & Harmonics outside restricted bands: | | | | | | | | | | | | | | | |
| 9.848 | 3.3 | 56.4 | | 40.0 | 8.6 | -35.5 | -9.5 | 1.0 | 61.0 | | 86.5 | | -25.4 | | V |
| 14.772 | 3.3 | 51.6 | | 40.9 | 11.0 | -38.3 | -9.5 | 1.0 | 56.6 | | 86.5 | | -29.8 | | V |
| 5.630 | 3.3 | 62.2 | | 35.2 | 6.3 | -36.2 | -9.5 | 1.0 | 59.1 | | 86.5 | | -27.4 | | V |
| 6.336 | 3.3 | 60.7 | | 35.4 | 6.8 | -36.3 | -9.5 | 1.0 | 58.1 | | 86.5 | | -28.4 | | V |
| 9.848 | 3.3 | 51.2 | | 40.0 | 8.6 | -35.5 | -9.5 | 1.0 | 55.8 | | 86.5 | | -30.6 | | H |
| 14.772 | 3.3 | 51.0 | | 40.9 | 11.0 | -38.3 | -9.5 | 1.0 | 56.0 | | 86.5 | | -30.4 | | H |
| 5.630 | 3.3 | 57.1 | | 35.2 | 6.3 | -36.2 | -9.5 | 1.0 | 54.0 | | 86.5 | | -32.5 | | H |
| 6.336 | 3.3 | 58.7 | | 35.4 | 6.8 | -36.3 | -9.5 | 1.0 | 56.1 | | 86.5 | | -30.4 | | H |

* No other emissions were found within 20dB under the limits up to 25GHz.

| | | | | | |
|------|-----------------------|--------|--------------------------------|---------|------------------------------|
| f | Measurement Frequency | Amp | Preamp Gain | Avg Lim | Average Field Strength Limit |
| Dist | Distance to Antenna | D Corr | Distance Correct to 3 meters | Pk Lim | Peak Field Strength Limit |
| Read | Analyzer Reading | Avg | Average Field Strength @ 3 m | Avg Mar | Margin vs. Average Limit |
| AF | Antenna Factor | Peak | Calculated Peak Field Strength | Pk Mar | Margin vs. Peak Limit |
| CL | Cable Loss | HPF | High Pass Filter | | |

08/03/02 **FCC Measurement**
Compliance Certification Services, Morgan Hill Open Field Site

Test Engr: Frank Ibrahim
Project #: 02U1403
Company: Proxim Corporation QK
EUT Descrip.: 802.11a Cardbus
EUT M/N: Harmony/Skyline 802.11a/b/g #112
Test Target: FCC 15.247
Mode Oper: 5.745GHz, Low Channel, .11a Base mode, Pout = 17.5dBm

Equipment for 1-22 GHz:

HP8566B Analyzer
Miteq NSP2600-44 Preamp
EMCO 3115 Antenna
Cable: 18.0 feet
FCC Measurement

Equipment for 22 - 58 GHz:

HP8566B Analyzer
HP 11975A Amplifier (LO)
HP 11970K External mixer/antenna
Cable: IF Only (321 MHz)

Peak Measurements:

1 MHz Resolution Bandwidth
1MHz Video Bandwidth

Average Measurements:

1MHz Resolution Bandwidth
10Hz Video Bandwidth

| f GHz | Dist feet | Read Pk dBuV | Read Avg. dBuV | AF dB/m | CL dB | Amp dB | D Corr dB | HPF | Peak dBuV/m | Avg dBuV/m | Pk Lim dBuV/m | Avg Lim dBuV/m | Pk Mar dB | Avg Mar dB | Notes |
|---|--------------|-----------------|-------------------|------------|----------|-----------|--------------|-----|----------------|---------------|------------------|-------------------|--------------|---------------|-------|
| Fundamental: | | | | | | | | | | | | | | | |
| 5.745 | 3.3 | 77.2 | | 35.2 | 6.4 | 0.0 | -9.5 | 0.0 | 109.3 | | | | | | V |
| 5.745 | 3.3 | 80.5 | | 35.2 | 6.4 | 0.0 | -9.5 | 0.0 | 112.6 | | | | | | H |
| Spurious & Harmonics inside restricted bands: | | | | | | | | | | | | | | | |
| 11.490 | 3.3 | 57.2 | 42.1 | 39.7 | 11.1 | -33.9 | -9.5 | 1.0 | 65.6 | 50.5 | 74.0 | 54.0 | -8.4 | -3.5 | V |
| 11.490 | 3.3 | 57.1 | 41.2 | 39.7 | 11.1 | -33.9 | -9.5 | 1.0 | 65.5 | 49.6 | 74.0 | 54.0 | -8.5 | -4.4 | H |
| Spurious & Harmonics outside restricted bands: | | | | | | | | | | | | | | | |
| 17.235 | 3.3 | 55.7 | | 43.3 | 14.9 | -32.8 | -9.5 | 1.0 | 72.6 | 60.1 | 92.6 | | -20.0 | | V |
| 17.235 | 3.3 | 55.3 | | 43.3 | 14.9 | -32.8 | -9.5 | 1.0 | 72.3 | 60.2 | 92.6 | | -20.3 | | H |

Note: There are no other spurious or harmonic emissions found in the freq range of 1-40 GHz

| | | | | | |
|------|-----------------------|--------|--------------------------------|---------|------------------------------|
| f | Measurement Frequency | Amp | Preamp Gain | Avg Lim | Average Field Strength Limit |
| Dist | Distance to Antenna | D Corr | Distance Correct to 3 meters | Pk Lim | Peak Field Strength Limit |
| Read | Analyzer Reading | Avg | Average Field Strength @ 3 m | Avg Mar | Margin vs. Average Limit |
| AF | Antenna Factor | Peak | Calculated Peak Field Strength | Pk Mar | Margin vs. Peak Limit |
| CL | Cable Loss | HPF | High Pass Filter | | |

08/03/02 **FCC Measurement**

Compliance Certification Services, Morgan Hill Open Field Site

Test Engr: Frank Ibrahim
Project #: 02U1403
Company: Proxim Corporation QK
EUT Descrip.: 802.11a Cardbus
EUT M/N: Harmony/Skyline 802.11a/b/g #112
Test Target: FCC 15.247
Mode Oper: 5.785GHz, Middle Channel, .11a Base mode, Pout = 18.2dBm

Equipment for 1-22 GHz:

HP8566B Analyzer
Miteq NSP2600-44 Preamp
EMCO 3115 Antenna
Cable: 18.0 feet
FCC Measurement

Equipment for 22 - 58 GHz:

HP8566B Analyzer
HP 11975A Amplifier (LO)
HP 11970K External mixer/antenna

Peak Measurements:

1 MHz Resolution Bandwidth
1MHz Video Bandwidth

Average Measurements:

1MHz Resolution Bandwidth
10Hz Video Bandwidth

| f GHz | Dist feet | Read Pk dBuV | Read Avg. dBuV | AF dB/m | CL dB | Amp dB | D Corr dB | HPF | Peak dBuV/m | Avg dBuV/m | Pk Lim dBuV/m | Avg Lim dBuV/m | Pk Mar dB | Avg Mar dB | Notes |
|--|--------------|-----------------|-------------------|------------|----------|-----------|--------------|-----|----------------|---------------|------------------|-------------------|--------------|---------------|----------------|
| Fundamental: | | | | | | | | | | | | | | | |
| 5.785 | 3.3 | 75.5 | | 35.2 | 6.4 | 0.0 | -9.5 | 0.0 | 107.6 | | | | | | V |
| 5.785 | 3.3 | 79.2 | | 35.2 | 6.4 | 0.0 | -9.5 | 1.0 | 112.3 | | | | | | H |
| Spurious & Harmonics within restricted bands: | | | | | | | | | | | | | | | |
| 11.570 | 3.3 | 55.8 | 43.3 | 39.7 | 11.1 | -33.9 | -9.5 | 1.0 | 64.3 | 51.7 | 74.0 | 54.0 | -9.7 | -2.3 | V |
| 11.570 | 3.3 | 54.3 | 42.2 | 39.7 | 11.1 | -33.9 | -9.5 | 1.0 | 62.8 | 50.7 | 74.0 | 54.0 | -11.2 | -3.3 | H |
| Spurious & Harmonics outside restricted bands: | | | | | | | | | | | | | | | |
| 17.355 | 3.3 | 50.8 | | 43.3 | 15.0 | -32.8 | -9.5 | 1.0 | 67.9 | 57.7 | 92.3 | | -24.4 | | V |
| 23.140 | 3.3 | 45.8 | | 32.8 | 18.8 | -33.3 | -9.5 | 1.0 | 55.6 | 45.1 | 92.3 | | -36.7 | | V, Noise Floor |
| 17.355 | 3.3 | 50.2 | | 43.3 | 15.0 | -32.8 | -9.5 | 1.0 | 67.2 | 57.7 | 92.3 | | -25.1 | | H |
| 23.140 | 3.3 | 48.9 | | 32.8 | 18.8 | -33.3 | -9.5 | 1.0 | 58.7 | 50.8 | 92.3 | | -33.6 | | H |

Note: There are no other spurious or harmonic emissions found in the freq range of 1-40 GHz

| | | | | | |
|------|-----------------------|--------|--------------------------------|------------|------------------------------|
| f | Measurement Frequency | Amp | Preamp Gain | Average Fi | Average Field Strength Limit |
| Dist | Distance to Antenna | D Corr | Distance Correct to 3 meters | Peak Field | Peak Field Strength Limit |
| Read | Analyzer Reading | Avg | Average Field Strength @ 3 m | Margin vs. | Margin vs. Average Limit |
| AF | Antenna Factor | Peak | Calculated Peak Field Strength | Margin vs. | Margin vs. Peak Limit |
| CL | Cable Loss | HPF | High Pass Filter | | |

08/03/02 **FCC Measurement**

Compliance Certification Services, Morgan Hill Open Field Site

Test Engr: Frank Ibrahim
Project #: 02U1403
Company: Proxim Corporation QK
EUT Descrip.: 802.11a Cardbus
EUT M/N: Harmony/Skyline 802.11a/b/g #112
Test Target: FCC 15.247
Mode Oper: 5.825GHz, High Channel, .11a Base mode, Pout = 17.3dBm

Equipment for 1-22 GHz:

HP8566B Analyzer
Miteq NSP2600-44 Preamp
EMCO 3115 Antenna
Cable: 18.0 feet
FCC Measurement

Equipment for 22 - 58 GHz:

HP8566B Analyzer
HP 11975A Amplifier (LO)
HP 11970K External mixer/antenna

Peak Measurements:

1 MHz Resolution Bandwidth
1 MHz Video Bandwidth

Average Measurements:

1 MHz Resolution Bandwidth
10 Hz Video Bandwidth

| f GHz | Dist feet | Read Pk dBuV | Read Avg. dBuV | AF dB/m | CL dB | Amp dB | D Corr dB | HPF | Peak dBuV/m | Avg dBuV/m | Pk Lim dBuV/m | Avg Lim dBuV/m | Pk Mar dB | Avg Mar dB | Notes |
|--|--------------|-----------------|-------------------|------------|----------|-----------|--------------|-----|----------------|---------------|------------------|-------------------|--------------|---------------|-------|
| Fundamental: | | | | | | | | | | | | | | | |
| 5.825 | 3.3 | 70.5 | | 35.2 | 6.4 | 0.0 | -9.5 | 0.0 | 102.6 | | | | | | V |
| 5.825 | 3.3 | 80.7 | | 35.2 | 6.4 | 0.0 | -9.5 | 1.0 | 113.8 | | | | | | H |
| Spurious & Harmonics within restricted bands: | | | | | | | | | | | | | | | |
| 11.650 | 3.3 | 57.7 | 45.3 | 39.7 | 11.2 | -33.9 | -9.5 | 1.0 | 66.2 | 53.8 | 74.0 | 54.0 | -7.8 | -0.2 | V |
| 11.650 | 3.3 | 57.0 | 44.7 | 39.7 | 11.2 | -33.9 | -9.5 | 1.0 | 65.5 | 53.2 | 74.0 | 54.0 | -8.5 | -0.8 | H |
| Spurious & Harmonics outside restricted bands: | | | | | | | | | | | | | | | |
| 17.475 | 3.3 | 50.7 | | 43.3 | 15.1 | -32.8 | -9.5 | 1.0 | 67.8 | 59.6 | 93.8 | | -26.0 | | V |
| 23.300 | 3.3 | 48.5 | | 32.8 | 18.8 | -33.3 | -9.5 | 1.0 | 58.3 | 47.3 | 93.8 | | -35.5 | | V |
| 17.475 | 3.3 | 50.0 | | 43.3 | 15.1 | -32.8 | -9.5 | 1.0 | 67.1 | 59.1 | 93.8 | | -26.7 | | H |
| 23.300 | 3.3 | 50.8 | | 32.8 | 18.8 | -33.3 | -9.5 | 1.0 | 60.6 | 52.6 | 93.8 | | -33.2 | | H |

Note: There are no other spurious or harmonic emissions found in the freq range of 1-40 GHz

| | | | | | |
|------|-----------------------|--------|--------------------------------|---------|------------------------------|
| f | Measurement Frequency | Amp | Preamp Gain | Avg Lim | Average Field Strength Limit |
| Dist | Distance to Antenna | D Corr | Distance Correct to 3 meters | Pk Lim | Peak Field Strength Limit |
| Read | Analyzer Reading | Avg | Average Field Strength @ 3 m | Avg Mar | Margin vs. Average Limit |
| AF | Antenna Factor | Peak | Calculated Peak Field Strength | Pk Mar | Margin vs. Peak Limit |
| CL | Cable Loss | HPF | High Pass Filter | | |

08/03/02 **FCC Measurement**

Compliance Certification Services, Morgan Hill Open Field Site

Test Engr: Frank Ibrahim
Project #: 02U1403
Company: Proxim Corporation QK
EUT Descrip.: 802.11a Cardbus
EUT M/N: Harmony/Skyline 802.11a/b/g #112
Test Target: FCC 15.247
Mode Oper: 5.76GHz, Low Channel, .11a Turbo mode, Pout = 17.4dBm

Equipment for 1-22 GHz:

HP8566B Analyzer
Miteq NSP2600-44 Preamp
EMCO 3115 Antenna
Cable: 18.0 feet
FCC Measurement

Equipment for 22 - 58 GHz:

HP8566B Analyzer
HP 11975A Amplifier (LO)
HP 11970K External mixer/antenna

Peak Measurements:

1 MHz Resolution Bandwidth
1 MHz Video Bandwidth

Average Measurements:

1 MHz Resolution Bandwidth
10 Hz Video Bandwidth

| f | Dist | Read Pk | Read Avg. | AF | CL | Amp | D Corr | HPF | Peak | Avg | Pk Lim | Avg Lim | Pk Mar | Avg Mar | Notes |
|--|------|---------|-----------|------|------|-------|--------|-----|--------|--------|--------|---------|--------|---------|----------------|
| GHz | feet | dBuV | dBuV | dB/m | dB | dB | dB | | dBuV/m | dBuV/m | dBuV/m | dBuV/m | dB | dB | |
| Fundamental: | | | | | | | | | | | | | | | |
| 5.760 | 3.3 | 75.5 | | 35.2 | 6.4 | 0.0 | -9.5 | 0.0 | 107.6 | | | | | | V |
| 5.745 | 3.3 | 77.2 | | 35.2 | 6.4 | 0.0 | -9.5 | 0.0 | 109.3 | | | | | | H |
| Spurious & Harmonics within restricted bands: | | | | | | | | | | | | | | | |
| 11.490 | 3.3 | 57.0 | 44.9 | 39.7 | 11.1 | -33.9 | -9.5 | 1.0 | 65.4 | 53.3 | 74.0 | 54.0 | -8.6 | -0.7 | V |
| 11.490 | 3.3 | 57.8 | 44.7 | 39.7 | 11.1 | -33.9 | -9.5 | 1.0 | 66.2 | 53.1 | 74.0 | 54.0 | -7.8 | -0.9 | H |
| 23.040 | 3.3 | 44.2 | 34.6 | 32.8 | 18.8 | -33.3 | -9.5 | 1.0 | 54.0 | 44.4 | 74.0 | 54.0 | -20.0 | -9.6 | V, Noise Floor |
| 23.040 | 3.3 | 47.8 | 36.5 | 32.8 | 18.8 | -33.3 | -9.5 | 1.0 | 57.6 | 46.3 | 74.0 | 54.0 | -16.4 | -7.7 | H |
| Spurious & Harmonics outside restricted bands: | | | | | | | | | | | | | | | |
| 17.280 | 3.3 | 54.3 | | 43.3 | 15.0 | -32.8 | -9.5 | 1.0 | 71.3 | 48.0 | 89.3 | | -18.0 | | V |
| 17.235 | 3.3 | 52.5 | | 43.3 | 14.9 | -32.8 | -9.5 | 1.0 | 69.4 | 57.4 | 89.3 | | -19.9 | | H |

Note: There are no other spurious or harmonic emissions found in the freq range of 1-40 GHz

| | | | | | |
|------|-----------------------|--------|--------------------------------|---------|------------------------------|
| f | Measurement Frequency | Amp | Preamp Gain | Avg Lim | Average Field Strength Limit |
| Dist | Distance to Antenna | D Corr | Distance Correct to 3 meters | Pk Lim | Peak Field Strength Limit |
| Read | Analyzer Reading | Avg | Average Field Strength @ 3 m | Avg Mar | Margin vs. Average Limit |
| AF | Antenna Factor | Peak | Calculated Peak Field Strength | Pk Mar | Margin vs. Peak Limit |
| CL | Cable Loss | HPF | High Pass Filter | | |

08/03/02 **FCC Measurement**

Compliance Certification Services, Morgan Hill Open Field Site

Test Engr: Frank Ibrahim
Project #: 02U1403
Company: Proxim Corporation QK
EUT Descrip.: 802.11a Cardbus
EUT M/N: Harmony/Skyline 802.11a/b/g #112
Test Target: FCC 15.247
Mode Oper: 5.8GHz, High Channel, .11a Turbo mode, Pout = 18.15dBm

Equipment for 1-22 GHz:

HP8566B Analyzer
Miteq NSP2600-44 Preamp
EMCO 3115 Antenna
Cable: 18.0 feet
FCC Measurement

Equipment for 22 - 58 GHz:

HP8566B Analyzer
HP 11975A Amplifier (LO)
HP 11970K External mixer/antenna

Peak Measurements:

1 MHz Resolution Bandwidth
1MHz Video Bandwidth

Average Measurements:

1MHz Resolution Bandwidth
10Hz Video Bandwidth

| f GHz | Dist feet | Read Pk dBuV | Read Avg. dBuV | AF dB/m | CL dB | Amp dB | D Corr dB | HPF | Peak dBuV/m | Avg dBuV/m | Pk Lim dBuV/m | Avg Lim dBuV/m | Pk Mar dB | Avg Mar dB | Notes |
|--|--------------|-----------------|-------------------|------------|----------|-----------|--------------|-----|----------------|---------------|------------------|-------------------|--------------|---------------|----------------|
| Fundamental: | | | | | | | | | | | | | | | |
| 5.800 | 3.3 | 73.2 | | 35.2 | 6.4 | 0.0 | -9.5 | 0.0 | 105.3 | | | | | | V |
| 5.800 | 3.3 | 76.3 | | 35.2 | 6.4 | 0.0 | -9.5 | 0.0 | 108.4 | | | | | | H |
| Spurious & Harmonics within restricted bands: | | | | | | | | | | | | | | | |
| 11.600 | 3.3 | 59.3 | 44.3 | 39.7 | 11.2 | -33.9 | -9.5 | 1.0 | 67.8 | 52.8 | 74.0 | 54.0 | -6.2 | -1.2 | V |
| 11.600 | 3.3 | 60.8 | 44.5 | 39.7 | 11.2 | -33.9 | -9.5 | 1.0 | 69.3 | 53.0 | 74.0 | 54.0 | -4.7 | -1.0 | H |
| Spurious & Harmonics outside restricted bands: | | | | | | | | | | | | | | | |
| 17.400 | 3.3 | 52.8 | | 43.3 | 15.0 | -32.8 | -9.5 | 1.0 | 69.9 | 57.3 | 88.4 | | -18.5 | | V |
| 23.200 | 3.3 | 44.3 | | 32.8 | 18.8 | -33.3 | -9.5 | 1.0 | 54.1 | 44.6 | 88.4 | | -35.3 | | V, Noise Floor |
| 17.400 | 3.3 | 50.2 | | 43.3 | 15.0 | -32.8 | -9.5 | 1.0 | 67.2 | 56.2 | 88.4 | | -21.2 | | H |
| 23.200 | 3.3 | 44.2 | | 32.8 | 18.8 | -33.3 | -9.5 | 1.0 | 54.0 | 44.3 | 88.4 | | -36.7 | | H, Noise Floor |

Note: There are no other spurious or harmonic emissions found in the freq range of 1-40 GHz

| | | | | | |
|------|-----------------------|--------|--------------------------------|---------|------------------------------|
| f | Measurement Frequency | Amp | Preamp Gain | Avg Lim | Average Field Strength Limit |
| Dist | Distance to Antenna | D Corr | Distance Correct to 3 meters | Pk Lim | Peak Field Strength Limit |
| Read | Analyzer Reading | Avg | Average Field Strength @ 3 m | Avg Mar | Margin vs. Average Limit |
| AF | Antenna Factor | Peak | Calculated Peak Field Strength | Pk Mar | Margin vs. Peak Limit |
| CL | Cable Loss | HPF | High Pass Filter | | |

DIGITAL DEVICE RADIATED EMISSIONS



FCC, VCCI, CISPR, CE, AUSTEL, NZ
UL, CSA, TUV, BSMI, DHHS, NVLAP

561F MONTEREY ROAD, SAN JOSE, CA 95037-9001
PHONE: (408) 463-0885 FAX: (408) 463-0888

Project #: 02U1403-2
Report #: 020710C1
Date & Time: 07/10/02 10:33 AM
Test Engr: Thu Chan

Company: Proxim Corporation QK
EUT Description: 802.11a Cardbus (M/N: Harmony / Skyline 802.11a/b/g)
Test Configuration : EUT/Printer/USB-Mouse/Laptop IBM R31
Type of Test: FCC Class B
Mode of Operation: TX @ 5.745GHz

[<< Main Sheet](#)

| Freq. | Reading | AF | Closs | Pre-amp | Level | Limit | Margin | Pol | Az | Height | Mark |
|--------------|---------|-------|-------|---------|----------|-------|--------|-------|--------|---------|---------|
| (MHz) | (dBuV) | (dB) | (dB) | (dB) | (dBuV/m) | FCC_B | (dB) | (H/V) | (Deg) | (Meter) | (P/Q/A) |
| 396.00 | 53.00 | 15.45 | 2.97 | 27.32 | 44.10 | 46.00 | -1.90 | 3mV | 180.00 | 1.00 | P |
| 312.39 | 53.00 | 14.76 | 2.63 | 26.73 | 43.66 | 46.00 | -2.34 | 3mH | 180.00 | 2.00 | P |
| 396.00 | 52.00 | 15.45 | 2.97 | 27.32 | 43.10 | 46.00 | -2.90 | 3mH | 90.00 | 2.00 | QP |
| 159.62 | 47.00 | 17.03 | 1.66 | 27.09 | 38.59 | 43.50 | -4.91 | 3mH | 90.00 | 2.00 | P |
| 159.62 | 47.00 | 17.03 | 1.66 | 27.09 | 38.59 | 43.50 | -4.91 | 3mV | 90.00 | 1.00 | P |
| 280.08 | 50.70 | 13.65 | 2.43 | 26.65 | 40.13 | 46.00 | -5.87 | 3mH | 180.00 | 2.00 | P |
| 6 Worst Data | | | | | | | | | | | |

Note: Changing the transmitter band, mode or channel does not affect these emissions.

9.3 SETUP PHOTOS

TRANSMITTER RADIATED RF MEASUREMENT SETUP



DIGITAL DEVICE RADIATED EMISSIONS MEASUREMENT SETUP



POWERLINE CONDUCTED EMISSIONS MEASUREMENT SETUP



END OF REPORT