




Test report No:
2320056R-RF-US-P06V01

FCC & ISED TEST REPORT

Product Name	Handheld radio
Trademark	Sepura
Model and /or type reference	SC2124
FCC ID	XX6SC2124M
IC	8739A-SC2124M
Applicant's name / address	Sepura Limited. 9000 Cambridge Research Park, Beach Drive, Waterbeach, Cambridge CB25 9TL, UK
Test method requested, standard	CFR 47, FCC Part 15 Subpart C ANSI C63.10: 2013 RSS-Gen / RSS-247
Verdict Summary	IN COMPLIANCE
Documented by (name / position & signature)	Tim Cao/Project Manager 
Approved by (name / position & signature)	Jack Zhang/ Manager 
Date of issue	2023-05-18
Report Version	V1.0
Report template No	Template_FCC Part 15C-RF-V1.0

INDEX

	page
General conditions	5
Environmental conditions	5
Possible test case verdicts	6
Abbreviations	6
Document History	7
Remarks and Comments.....	7
Used Equipment	8
Uncertainty	10
1 General Information.....	11
1.1 General Description of the Item(s)	11
1.2 Antenna Information	12
1.3 Date Rate.....	13
1.4 Channel List	14
2 Description of Test Setup	15
2.1 Operating mode(s) used for tests.....	15
2.2 Auxiliary equipment / Test software for the EUT.....	15
2.3 Test Configuration / Block diagram used for tests	16
2.4 Testing process.....	18
3 Verdict summary section	19
3.1 Standards.....	19
3.2 Deviation(s) from the Standard(s) / Test Specification(s).....	19
3.3 Overview of results.....	20
3.4 Power setting in test	22
3.5 Test Matrix	22
3.6 Test Facility.....	23
4 Test Items Of Limit/Setup/Procedure	24
4.1 DTS Bandwidth	24
4.1.1 Limit	24
4.1.2 Test Setup.....	24
4.1.3 Test Procedure	24
4.2 Occupied Channel Bandwidth.....	25
4.2.1 Limit	25
4.2.2 Test Setup.....	25
4.2.3 Test Procedure	25

4.3	Maximum Conducted Output Power	26
4.3.1	Limit	26
4.3.2	Test Setup	26
4.3.3	Test Procedure	27
4.4	Maximum Power Spectral Density	28
4.4.1	Limit	28
4.4.2	Test Setup	28
4.4.3	Test Procedure	28
4.5	Band Edge Measurements	29
4.5.1	Limit	29
4.5.2	Test Setup	29
4.5.3	Test Procedure	29
4.6	Conducted Spurious Emission	30
4.6.1	Limit	30
4.6.2	Test Setup	30
4.6.3	Test Procedure	30
4.7	Duty cycle	31
4.7.1	Limit	31
4.7.2	Test Setup	31
4.7.3	Test Procedure	31
4.8	Emissions in Restricted Bands	32
4.8.1	Limit	32
4.8.2	Test Setup	34
4.8.3	Test Procedure	35
4.9	AC Power Line Conducted Emission	36
4.9.1	Limit	36
4.9.2	Test Setup	36
4.9.3	Test Procedure	36
4.10	Antenna Requirement.....	37
4.10.1	Limit:	37
4.10.2	Antenna Connector Construction:	37
5	Test setup photo and EUT Photo.....	37
6	Test Result.....	38
	Appendix A: DTS Bandwidth	38
	Test Result.....	38
	Test Graphs	39
	Appendix B: Occupied Channel Bandwidth.....	43

Test Result.....	43
Test Graphs	44
Appendix C: Maximum conducted output power	48
Test Result Peak.....	48
Appendix D: Maximum power spectral density.....	49
Test Result.....	49
Test Graphs	50
Appendix E: Band edge measurements.....	54
Test Result.....	54
Appendix F: Conducted Spurious Emission	78
Test Result.....	78
Test Graphs	79
Appendix G: Duty Cycle	91
Test Result.....	91
Appendix H: Emissions in Restricted Bands	92
Test Result.....	92
Appendix I: AC Power Line Conducted Emission.....	112
Test Result.....	112

COMPETENCES AND GUARANTEES

DEKRA is a testing laboratory competent to carry out the tests described in this report.

In order to assure the traceability to other national and international laboratories, DEKRA has a calibration and maintenance program for its measurement equipment.

DEKRA guarantees the reliability of the data presented in this report, which is the result of the measurements and the tests performed to the item under test on the date and under the conditions stated in the report and it is based on the knowledge and technical facilities available at DEKRA at the time of performance of the test.

DEKRA is liable to the client for the maintenance of the confidentiality of all information related to the item under test and the results of the test.

The results presented in this Test Report apply only to the particular item under test established in this document.

IMPORTANT: No parts of this report may be reproduced or quoted out of context, in any form or by any means, except in full, without the previous written permission of DEKRA.

GENERAL CONDITIONS

Test Location	No. 99, Hongye Road, Suzhou Industrial Park Suzhou, 215006, P.R. China
Date(receive sample)	Feb. 02, 2023
Date (start test)	Feb. 05, 2023
Date (finish test)	Feb. 19, 2023

1. This report is only referred to the item that has undergone the test.
2. This report does not constitute or imply on its own an approval of the product by the Certification Bodies or Competent Authorities.
3. This document is only valid if complete; no partial reproduction can be made without previous written permission of DEKRA.
4. This test report cannot be used partially or in full for publicity and/or promotional purposes without previous written permission of DEKRA.

ENVIRONMENTAL CONDITIONS

The climatic conditions during the tests are within the limits specified by the manufacturer for the operation of the EUT and the test equipment. The climatic conditions during the tests were within the following limits:

Ambient temperature	15 °C – 35 °C
Relative Humidity air	30% - 60%

If explicitly required in the basic standard or applied product / product family standard the climatic values are recorded and documented separately in this test report.

POSSIBLE TEST CASE VERDICTS

Test case does not apply to test object	N/A
Test object does meet requirement	P (Pass) / PASS
Test object does not meet requirement	F (Fail) / FAIL
Not measured	N/M

ABBREVIATIONS

For the purposes of the present document, the following abbreviations apply:

EUT	: Equipment Under Test
QP	: Quasi-Peak
CAV	: CISPR Average
AV	: Average
CDN	: Coupling Decoupling Network
SAC	: Semi-Anechoic Chamber
OATS	: Open Area Test Site
BW	: Bandwidth
AM	: Amplitude Modulation
PM	: Pulse Modulation
HCP	: Horizontal Coupling Plane
VCP	: Vertical Coupling Plane
U_N	: Nominal voltage
T_x	: Transmitter
R_x	: Receiver
N/A	: Not Applicable
N/M	: Not Measured

DOCUMENT HISTORY

Report No.	Version	Description	Issued Date
2320056R-RF-US-P06V01	V1.0	Initial issue of report.	2023-05-18

REMARKS AND COMMENTS

1. The equipment under test (EUT) does meet the essential requirements of the stated standard(s)/test(s).
2. These test results on a sample of the device are for the purpose of demonstrating Compliance with Part 15 Subpart C Paragraph 15.247, RSS-Gen Issue 5, RSS-247 Issue 2.
3. The measurement result is considered in conformance with the requirement if it is within the prescribed limit, It is not necessary to account the uncertainty associated with the measurement result.
4. The test results presented in this report relate only to the object tested.
5. The test report shall not be reproduced without the written approval of DEKRA Testing and Certification (Suzhou) Co., Ltd.
6. This report will not be used for social proof function in China market.
7. DEKRA declines any responsibility with the following test data provided by customer that may affect the validity of result:
 - Chapter 1.1 General Description of the Item(s);
 - Chapter 1.2 Antenna Informaion;
 - Chapter 1.3 Channel List.

USED EQUIPMENT

AC Power Line Conducted Emission / TR1

Instrument	Manufacturer	Model No.	Serial No.	Cal. Date	Next Cal. Date
EMI Test Receiver	R&S	ESCI	100906	2022.09.04	2023.09.03
Two-Line V-Network	R&S	ENV216	101189	2022.07.01	2023.06.30
Two-Line V-Network	R&S	ENV216	101044	2022.03.12	2023.03.11
Artificial Mains Network	SCHWARZBECK	NNLK 8129	8129-294	2022.11.27	2023.11.26
Impedance Stabilization Network	Teseq GmbH	ISN T800	57318	2022.03.21	2023.03.20
Impedance Stabilization Network	Teseq GmbH	ISN T8-Cat6	29680	2022.03.16	2023.03.15
50ohm Coaxial Switch	Anritsu	MP59B	6200464462	N/A	N/A
Coaxial Cable	Suhner	RG 223	TR1-C1	2022.03.30	2023.03.29
Temperature/Humidity Meter	RTS	RTS-8S	TR1-TH	2022.07.07	2023.07.06

Conducted Test / TR8

Instrument	Manufacturer	Model No.	Serial No.	Cal. Date	Next Cal. Date
Wireless Connectivity Tester	R&S	CMW 270	102593	2022.05.21	2023.05.20
Coaxial Cable	N/A	N/A	2187	2022.06.09	2023.06.08
High and low temperature and fast temperature change test box	ASTUOD	ASTD-FBT-225K	N/A	2022.07.13	2023.07.12
Temperature/Humidity Meter	RTS	RTS-8S	RF08	2022.07.07	2023.07.06
Test system					
4TX MIMO Power Sensor	Keysight	X8750A	MY59400102	2022.03.16	2023.03.15
MAX Signal Analyzer	Keysight	N9020B	MY59050482	2022.09.17	2023.09.16
Switch Box	Keysight	X8749A	N/A	N/A	N/A
High and low temperature and fast temperature change test box	ASTUOD	ASTD-FBT-225K	N/A	2022.07.13	2023.07.12
MXG-B RF Vector Signal Generator	Keysight	N5182B	MY61252529	2022.07.14	2023.07.13
Frequency extender for EXG or MXG	Keysight	N5182BX07	MY59362500	2022.07.14	2023.07.13
EXG-B MW Analog Signal Generator	Keysight	N5173B	MY61252566	2022.09.28	2023.09.27

Radiated Emission(9kHz-1GHz) / AC3

Instrument	Manufacturer	Model No.	Serial No.	Cal. Date	Next Cal. Date
EMI Test Receiver	R&S	ESCI	100573	2022.07.10	2023.07.09
Bilog Antenna	Teseq GmbH	CBL6112D	27611	2022.08.28	2023.08.27
Coaxial Cable	Huber+Suhner	RG 214	AC2-C	2022.03.30	2023.03.29
Loop Antenna	R&S	HFH2-Z2	833799/003	2022.04.15	2023.04.14
Temperature/Humidity Meter	RTS	RTS-8S	AC2-TH	2022.07.07	2023.07.06

Radiated Emission (1GHz-40GHz) / AC5

Instrument	Manufacturer	Model No.	Serial No.	Cal. Date	Next Cal. Date
MXA Signal Analyzer	Keysight	N9020B	MY60112218	2022.12.08	2023.12.07
Preamplifier	SKET	LNPA_0118G-45	SK2021041201	2022.04.15	2023.04.14
Pre-Amplifier	Schwarzbeck	BBV 9721	9721-024	2022.12.08	2023.12.07
DRG Horn	ETS-Lindgren	3117	00123988	2022.08.29	2023.08.28
Broad-Band Horn Antenna	SCHWARZBECK	BBHA 9170	01249	2022.09.22	2023.09.21
Coaxial Cable	Huber+Suhner	SUCOFLEX 106	AC5-C2	2022.03.30	2023.03.29
Coaxial Cable	ROSENBERGER	LA1-C011-2000/3000	AC5-40G	2022.03.21	2023.03.20
Notch Filter	Micro-mve	MFN-2400.2485.S1	AN0003N	2022.07.18	2023.07.17

UNCERTAINTY

Uncertainties have been calculated according to the DEKRA internal document. The reported expanded uncertainties are based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95% .

Test item	Uncertainty
AC Power Line Conducted Emission	9kHz~30MHz: 2.92dB
Peak Power Output	± 1.13 dB
Radiated Emission(30MHz~1GHz)	30MHz~300MHz: 4.81 dB 300MHz~1GHz: 4.15 dB
Radiated Emission(1GHz~26.5GHz)	1GHz~18GHz: 4.98 dB 18GHz~26.5GHz: 4.72 dB
RF antenna conducted test	± 1.27 dB
Radiated Emission Band Edge	1GHz~18GHz: 4.98 dB
DTS Bandwidth	± 279 Hz
Occupied Bandwidth	± 279 Hz
Power Density	± 0.95 dB

1 GENERAL INFORMATION

1.1 General Description of the Item(s)

Product Name..... :	Handheld radio
Model No. :	SC2124
Trademark :	Sepura
FCC ID :	XX6SC2124M
IC..... :	8739A-SC2124M
Hardware Version :	PLX-41216515-02 mod state 14
Software Version..... :	1810 002 07367
Manufacturer..... :	Sepura Limited
Manufacturer address :	9000 Cambridge Research Park, Beach Drive, Waterbeach, Cambridge CB25 9TL, UK
Factory :	Plexus (Oradea) Manufacturing Solutions
Factory address :	Strada Eugeniu Carada, nr. 2 – 4, Oradea, Bihor

Wireless specification..... :	802.11b/g/n
Operating frequency range(s)..... :	802.11b/g/n(20MHz): 2412~2462MHz
Type of Modulation..... :	802.11b: DSSS-DBPSK, DQPSK, CCK 802.11g/n: OFDM-BPSK, QPSK, 16QAM, 64QAM
Number of channels :	802.11b/g/n(20MHz): 11

Rated power supply	Voltage and Frequency	
	☐	AC: 220 - 240 V, 50/60 Hz
	☐	AC: 100 - 240 V, 50/60 Hz
	☐	DC: 24 V
	☒	Battery: 7.4V _{DC}
	☐	Adapter:Input: Output:
Brand of adapter	N/A	
Adapter model	N/A	
Mounting position.....	☐	Table top equipment
	☐	Wall/Ceiling mounted equipment
	☐	Floor standing equipment
	☒	Hand-held/Portable equipment
	☐	Other:

1.2 Antenna Information

Antenna Model..... :	N/A		
Antenna serial number	N/A		
Antenna Delivery	☒	1TX + 1RX	
	☐	2TX + 2RX	
	☐	Others:.....	
Antenna technology	☒	SISO	
	☐	MIMO	☐ CDD
			☐ Beam-forming
Antenna Type	☐	External	☐ Dipole
			☐ Sectorized
	☒	Internal	☒ Ceramic Chip
			☐ PIFA
			☐ PCB
			☐ Others:.....
Antenna Gain..... :	1.3 dBi		

1.3 Data Rate

IEEE 802.11b

Modulation	Data Rate(Mb/s)
DSSS	1
DSSS	2
CCK	5.5
CCK	11

IEEE 802.11g

Modulation	R	Data Rate(Mb/s)
BPSK	1/2	6
BPSK	3/4	9
QPSK	1/2	12
QPSK	3/4	18
16-QAM	1/2	24
16-QAM	3/4	36
64-QAM	2/3	48
64-QAM	3/4	54

IEEE 802.11n

Spatial streames	MCS Index	Modulation	R	Data Rate(Mb/s)			
				800ns GI		400ns GI	
				20MHz	40MHz	20MHz	40MHz
1	0	BPSK	1/2	6.5	13.5	7.2	15.0
1	1	QPSK	1/2	13.0	27.0	14.4	30.0
1	2	QPSK	3/4	19.5	40.5	21.7	45.0
1	3	16-QAM	1/2	26.0	54.0	28.9	60.0
1	4	16-QAM	3/4	39.0	81.0	43.3	90.0
1	5	64-QAM	2/3	52.0	108.0	57.8	120.0
1	6	64-QAM	3/4	58.5	121.5	65.0	135.0
1	7	64-QAM	5/6	65.0	135.0	72.2	150.0

Note 1: Support of 400ns GI is optional on transmit and receive.

Symbol	Explanation
R	Code rate
GI	guard interval

Note: The data rate marks blue are the worst.

1.4 Channel List

IEEE 802.11b/g & IEEE 802.11n(20MHz)

Working Frequency of Each Channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
001	2412 MHz	002	2417 MHz	003	2422 MHz	004	2427 MHz
005	2432 MHz	006	2437 MHz	007	2442 MHz	008	2447 MHz
009	2452 MHz	010	2457 MHz	011	2462 MHz	N/A	N/A

Note: The general description of the Item(s), antenna information, data rate and channel list in clause 1 are provided and confirmed by the client.

2 DESCRIPTION OF TEST SETUP

2.1 Operating mode(s) used for tests

During the tests the following operating mode(s) has(have) been used.

Test Mode For Wi-Fi	Mode 1: Transmit by 802.11b
	Mode 2: Transmit by 802.11g
	Mode 3: Transmit by 802.11n(20MHz)


2.2 Auxiliary equipment / Test software for the EUT

Auxiliary equipment	Type / Version	Manufacturer	Supplied by
(1) Notebook	Think pad x220	Lenovo	Adapter
(2) USB Control Cable	N/A	N/A	N/A
(3) USB Cable	N/A	N/A	N/A
software	Type / Version	Manufacturer	Supplied by
Putty	0.71	N/A	N/A


Accessories Information	Cable		
	Length used during test [m]	Attached during test	Shielded
(2)USB Control Cable	2	☒	☒
(3)USB Cable	8	☒	☒

2.3 Test Configuration / Block diagram used for tests


Test setup Diagram- AC Line Conducted Emission Test

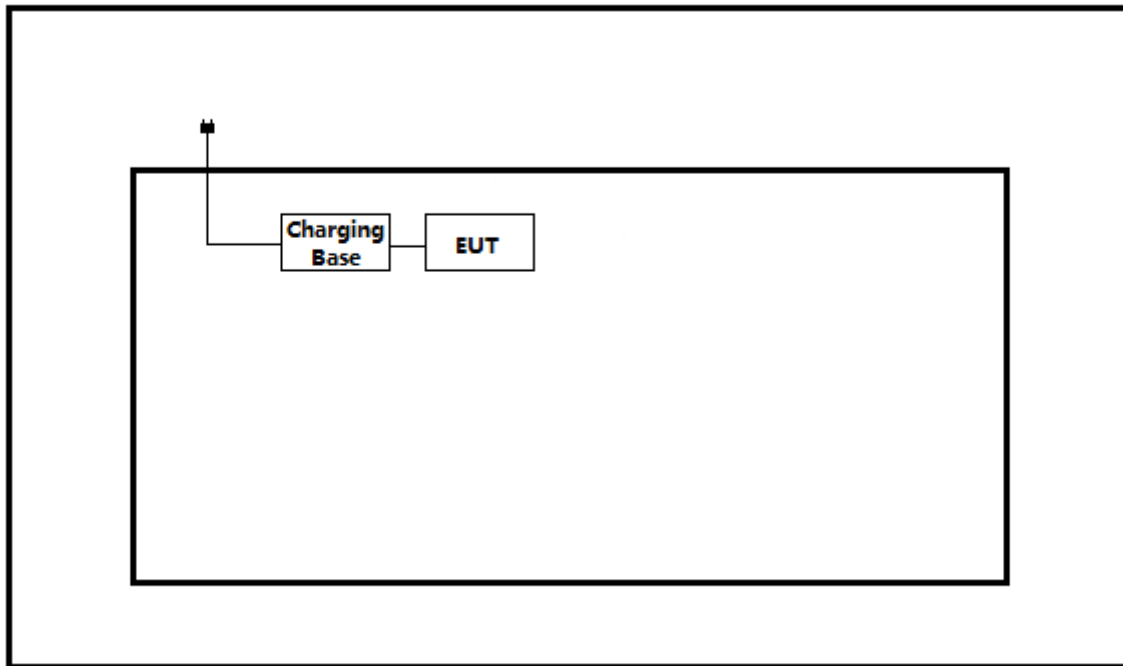

Test setup Diagram- Conducted test

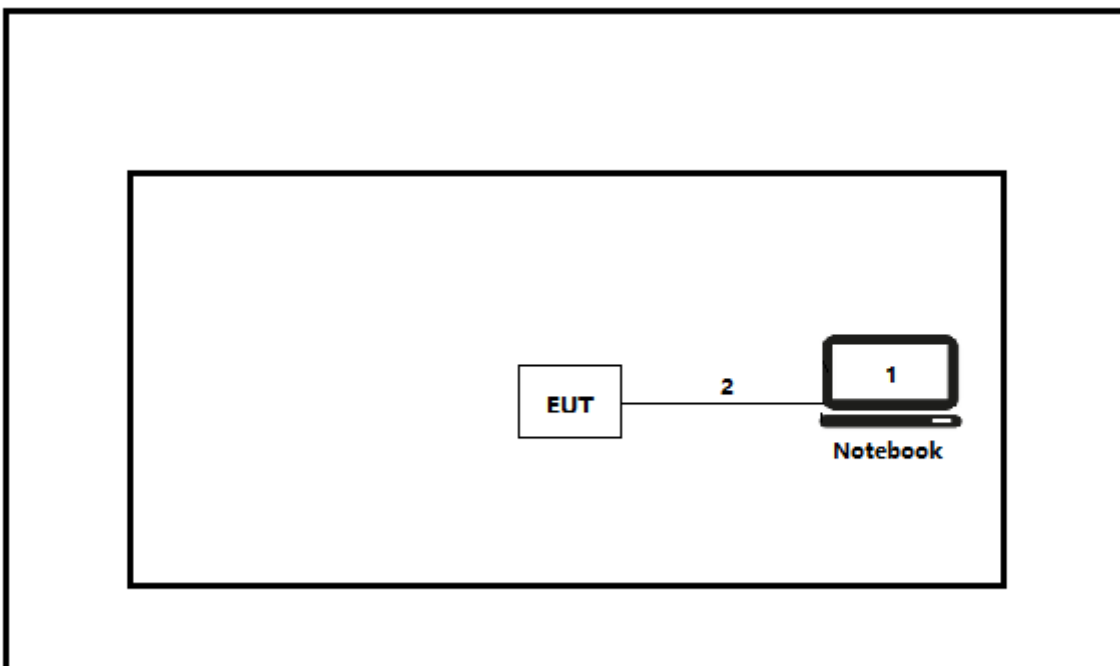

Test setup Diagram- Radiated test

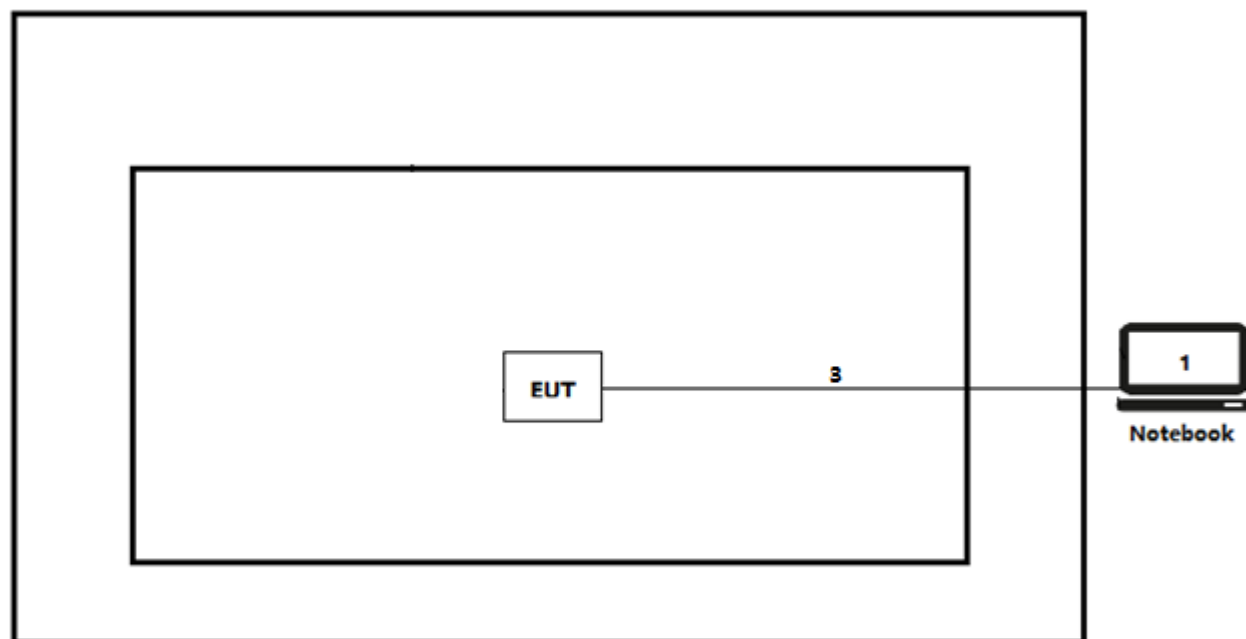

2.4 Testing process

1	Setup the EUT shown in Section 2.3.
2	Run the software “PUTTY” and enter the corresponding instructions on the notebook computer.
3	Open the serial port and enter the corresponding commands to configure the test mode, test channel, test power and data rate.
4	Verify that the EUT works properly.

3 VERDICT SUMMARY SECTION

This chapter presents an overview of standards and results. Refer to the next chapters for details of measured test results and applied test levels.

3.1 Standards

Standard	Year	Description
CFR 47, FCC Part 15 C	2023	Operation within the bands 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz.
ANSI C63.10	2013	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
KDB 558074 D01V05r02	2019	GUIDANCE FOR COMPLIANCE MEASUREMENTS ON DIGITAL TRANSMISSION SYSTEM, FREQUENCY HOPPING SPREAD SPECTRUM SYSTEM, AND HYBRID SYSTEM DEVICES OPERATING UNDER SECTION 15.247 OF THE FCC RULES
KDB 662911 D01V02r01	2013	Emissions Testing of Transmitters with Multiple Outputs in the Same Band
RSS-Gen Issue 5 Amendment 1	2019	General Requirements for Compliance of Radio Apparatus
RSS-247 Issue 2	2017	Digital Transmission Systems (DTSs), Frequency Hopping Systems (FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices

3.2 Deviation(s) from the Standard(s) / Test Specification(s)

The following deviation(s) was / were made from the published requirements of the listed standards: N/A.

(Please define the deviations from the standard(s) if applicable)

3.3 Overview of results

Requirement – Test Item of FCC	Standard(s)	Verdict	Remark
DTS Bandwidth	FCC 15.247(a)(2)	PASS	Test data please refer to Appendix A
Maximum conducted output power	15.247 (b)(3)	PASS	Test data please refer to Appendix C
Maximum power spectral density	FCC 15.247(e)	PASS	Test data please refer to Appendix D
Band edge measurements	FCC 15.247(d) FCC 15.205 FCC 15.209	PASS	Test data please refer to Appendix E
Conducted Spurious Emission	FCC 15.247(d), FCC 15.209	PASS	Test data please refer to Appendix F
Duty cycle	ANSI C63.10:2013	PASS	Test data please refer to Appendix G
Emissions in Restricted Bands	FCC 15.205 FCC 15.209	PASS	Test data please refer to Appendix H
AC Power Line Conducted Emission	FCC 15.207	PASS	Test data please refer to Appendix I
Antenna Requirement	FCC 15.203	PASS	---

Requirement – Test case of ISED	Standard(s)	Verdict	Remark
DTS Bandwidth	RSS-Gen Issue 5 Paragraph 6.7 RSS-247 Issue 2 Paragraph 5.2	PASS	Test data please refer to Appendix A
Occupied Channel Bandwidth	RSS-Gen Issue 5 Paragraph 6.7 RSS-247 Issue 2 Paragraph 5.2	PASS	Test data please refer to Appendix B
Maximum conducted output power	RSS-247 Issue 2 Paragraph 5.4(d)	PASS	Test data please refer to Appendix C
Maximum power spectral density	RSS-247 Issue 2 Paragraph 5.2(b)	PASS	Test data please refer to Appendix D
Band edge measurements	RSS-Gen Issue 5 Paragraph 8.10	PASS	Test data please refer to Appendix E
Conducted Spurious Emission	RSS-247 Issue 2 Paragraph 5.5	PASS	Test data please refer to Appendix F
Duty cycle	ANSI C63.10:2013	PASS	Test data please refer to Appendix G
Emissions in Restricted Bands	RSS-Gen Issue 5 Paragraph 8.9	PASS	Test data please refer to Appendix H
AC Power Line Conducted Emission	RSS-Gen Issue 5 Paragraph 8.8	PASS	Test data please refer to Appendix I
Antenna Requirement	RSS-Gen Issue 5 Paragraph 6.8	PASS	---

3.4 Power setting in test

Mode	Channel	Frequency (MHz)	Power setting
802.11b	01	2412	58
	06	2437	58
	11	2462	58
802.11g	01	2412	41
	06	2437	41
	11	2462	41
802.11n(20MHz)	01	2412	41
	06	2437	41
	11	2462	41

3.5 Test Matrix

Test item	Model / Type		
	1(#1)	2(#2)	3()
DTS Bandwidth	☒	☐	☐
Occupied Channel Bandwidth	☒	☐	☐
Maximum conducted output power	☒	☐	☐
Maximum power spectral density	☒	☐	☐
Band edge measurements	☐	☒	☐
Conducted Spurious Emission	☒	☐	☐
Duty cycle	☒	☐	☐
Emissions in Restricted Bands	☒	☐	☐
AC Power Line Conducted Emission	☐	☒	☐
Antenna Requirement	☐	☒	☐
Note: The only difference between sample #1 and sample 2 is whether to keep the original antenna, sample #1 is a conduction test product that removes the original antenna and is equipped with SMA wires, and sample #2 is a complete product that retains the original antenna.			

3.6 Test Facility

USA	:	FCC Designation Number: CN1199
CA	:	ISED CAB identifier: CN0040

4 TEST ITEMS OF LIMIT/SETUP/PROCEDURE

4.1 DTS Bandwidth


VERDICT: PASS

4.1.1 Limit

Standard FCC Part 15 Subpart C Paragraph 15.247 (a)(2); RSS-247 Issue 2 Paragraph 5.2.

Systems using digital modulation techniques operate in the 2400-2483.5 MHz. The minimum 6 dB bandwidth shall be at least 500 kHz

4.1.2 Test Setup

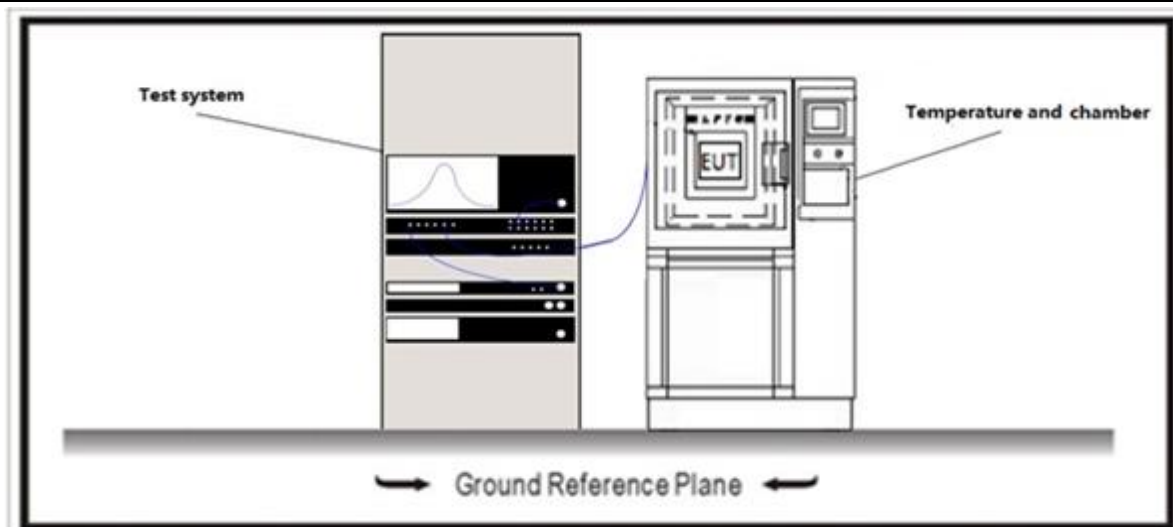

4.1.3 Test Procedure

	Reference Rule	Chapter	Description
☒	ANSI C63.10	11.8	DTS bandwidth
☐	ANSI C63.10	11.8.1	Option 1
☒	ANSI C63.10	11.8.2	Option 2

4.2 Occupied Channel Bandwidth

VERDICT: PASS


4.2.1 Limit

Standard

RSS-Gen Issue 5 Paragraph 6.7

The occupied bandwidth or the "99% emission bandwidth" is defined as the frequency range between two points, one above and the other below the carrier frequency, within which 99% of the total transmitted power of the fundamental transmitted emission is contained. The occupied bandwidth shall be reported for all equipment in addition to the specified bandwidth required in the applicable RSSs

4.2.2 Test Setup

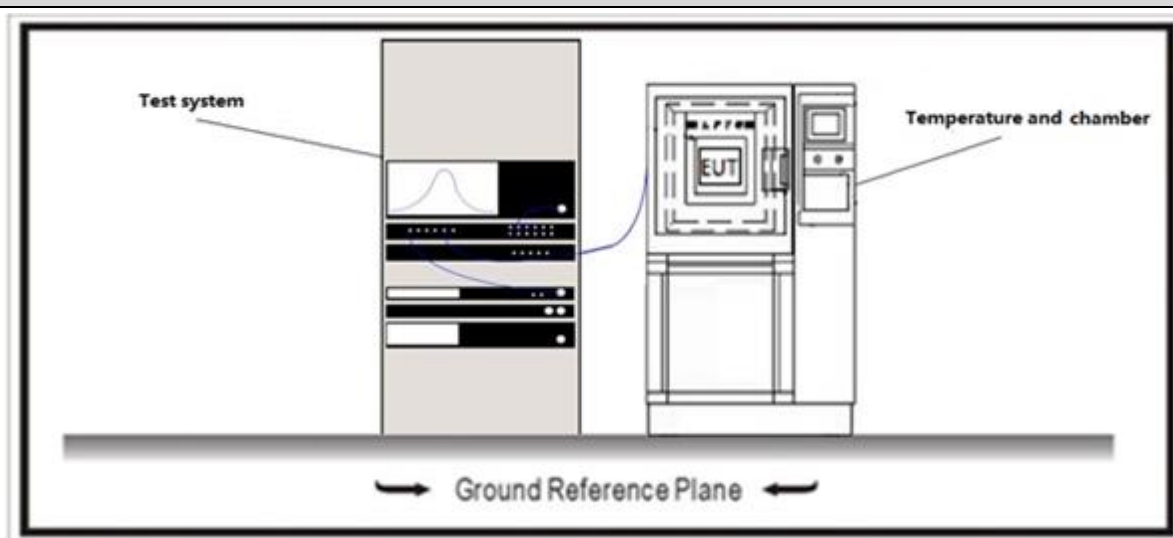

4.2.3 Test Procedure

	Reference Rule	Chapter	Description
☒	ANSI C63.10	6.9	Occupied bandwidth tests
☐	ANSI C63.10	6.9.2	Relative measurement procedure
☒	ANSI C63.10	6.9.3	Power bandwidth (99%) measurement procedure

4.3 Maximum Conducted Output Power


VERDICT: PASS

4.3.1 Limit

Standard		FCC Part 15 Subpart C Paragraph 15.247 (b)(3); RSS-247 Issue 2 Paragraph 5.4(d).
☒	GTX < 6dBi	Pout ≤ 30dBm
☐	GTX > 6dBi	
☐	Non-Fix point-point	Pout ≤ 30 - (GTX - 6)
☐	Fix point-point	Pout ≤ 30 - [(GTX - 6)]/3
☐	Point-to-multipoint	Pout ≤ 30 - (GTX - 6)
☐	Overlap Beams	Pout ≤ 30 - [(GTX - 6)]/3
☐	Aggregate power transmitted simultaneously on all beams	Pout ≤ 30 - [(GTX - 6)]/3
☐	single directional beam	Pout ≤ 30 - [(GTX - 6)]/3 + 8dB

Note 1 : GTX directional gain of transmitting antennas.
Note 2 : Pout is maximum peak conducted output power .

4.3.2 Test Setup

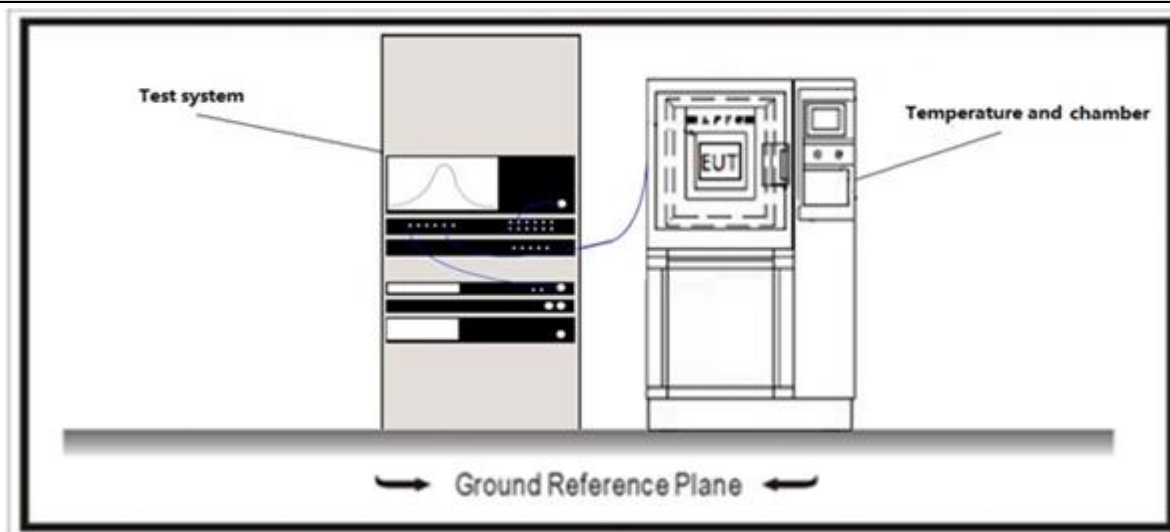

4.3.3 Test Procedure

	References Rule			Chapter	Description		
☒	ANSI C63.10			11.9	Fundamental emission output power		
	☒	ANSI C63.10			11.9.1	Maximum peak conducted output power	
		☐	ANSI C63.10		11.9.1.1	RBW ≥ DTS bandwidth	
		☐	ANSI C63.10		11.9.1.2	Integrated band power method	
		☒	ANSI C63.10		11.9.1.3	PKPM1 Peak power meter method	
	☐	ANSI C63.10			11.9.2	Maximum conducted (average) output power	
		☐	ANSI C63.10		11.9.2.2	Measurement using a spectrum analyzer (SA)	
			☐	ANSI C63.10		11.9.2.2.2	Method AVGSA-1(Duty cycle ≥98%)
			☐	ANSI C63.10		11.9.2.2.3	Method AVGSA-1A(Duty cycle ≥98%)
			☐	ANSI C63.10		11.9.2.2.4	Method AVGSA-2(Duty cycle ≤98%)
			☐	ANSI C63.10		11.9.2.2.5	Method AVGSA-2A(Duty cycle ≤98%)
			☐	ANSI C63.10		11.9.2.2.4	Method AVGSA-3
			☐	ANSI C63.10		11.9.2.2.5	Method AVGSA-3A
		☐	ANSI C63.10			11.9.2.3	Measurement using a power meter (PM)
			☐	ANSI C63.10		11.9.2.3.1	Method AVGPM
			☐	ANSI C63.10		11.9.2.3.2	Method AVGPM-G

4.4 Maximum Power Spectral Density

VERDICT: PASS


4.4.1 Limit

Standard

 FCC Part 15 Subpart C Paragraph 15.247 (b)(3);
 RSS-247 Issue 2 Paragraph 5.2(b).

 Power Spectral Density $\leq 8\text{dBm}/3\text{kHz}$

4.4.2 Test Setup

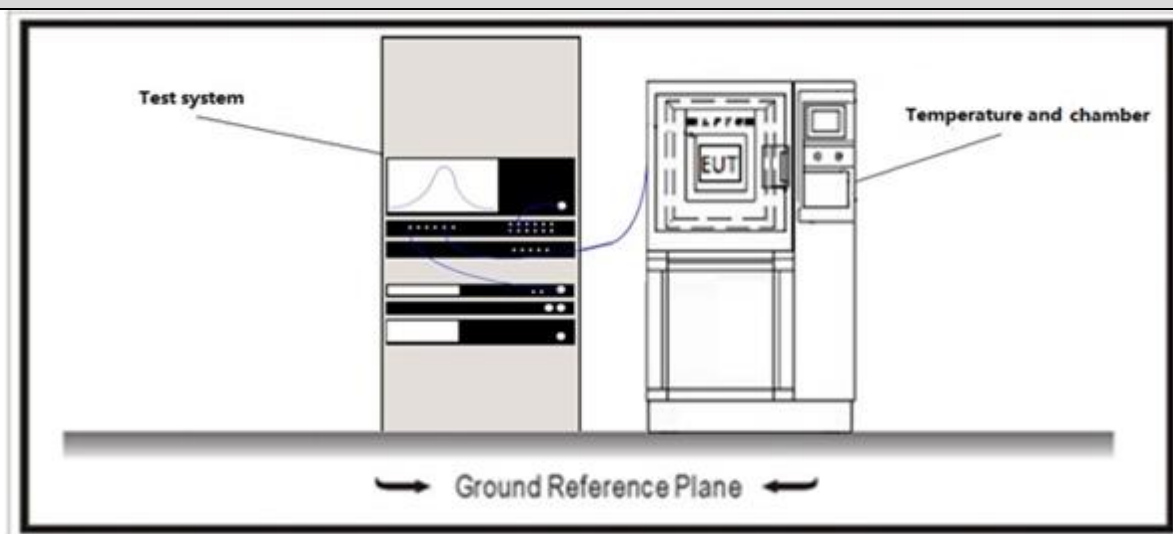

4.4.3 Test Procedure

	References Rule		Chapter	Description
☒	ANSI C63.10		11.10	Maximum power spectral density level in the fundamental emission
	☒	ANSI C63.10	11.10.2	Method PKPSD (peak PSD)
	☐	ANSI C63.10	11.10.3	Method AVGPSD-1(Duty cycle $\geq 98\%$)
	☐	ANSI C63.10	11.10.4	Method AVGPSD-1A(Duty cycle $\geq 98\%$)
	☐	ANSI C63.10	11.10.5	Method AVGPSD-2(Duty cycle $< 98\%$)
	☐	ANSI C63.10	11.10.6	Method AVGPSD-2A(Duty cycle $< 98\%$)
	☐	ANSI C63.10	11.10.7	Method AVGPSD-3
	☐	ANSI C63.10	11.10.8	Method AVGPSD-3A

4.5 Band Edge Measurements

VERDICT: PASS


4.5.1 Limit

Standard		FCC Part 15 Subpart C Paragraph 15.247(d) , 15.209; RSS-Gen Issue 5 Paragraph 8.10.		
Frequency bands (MHz)	Detector	Limit (dB μ V/m)	RBW (MHz)	Distance (m)
2310-2390	PK	74	1	3
2483.5-2500	AV	54	1	3

Note: The field strength of emissions appearing within these frequency bands shall not exceed the limits.

4.5.2 Test Setup

Above 1GHz Test Setup:

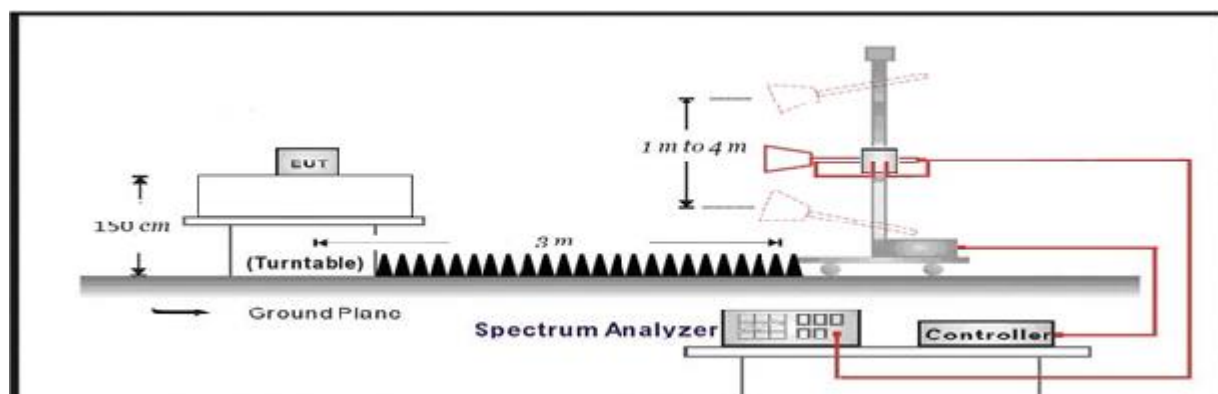

4.5.3 Test Procedure

	References Rule	Chapter	Description
☒	ANSI C63.10	6.10	Band-edge testing
☒	☒ ANSI C63.10	6.10.5	Restricted-band band-edge measurements
☐	☐ ANSI C63.10	6.10.6	Marker-delta method
☒	ANSI C63.10	11.12	Emissions in restricted frequency bands
☒	☒ ANSI C63.10	11.12.1	Radiated emission measurements
☒	☒ ANSI C63.10	11.12.2.7	Radiated spurious emission test
☐	ANSI C63.10	6.4	Radiated emissions from unlicensed wireless devices below 30 MHz
☐	ANSI C63.10	6.5	Radiated emissions from unlicensed wireless devices in the frequency range of 30 MHz to 1000 MHz
☒	ANSI C63.10	6.6	Radiated emissions from unlicensed wireless devices above 1 GHz

4.6 Conducted Spurious Emission

VERDICT: PASS


4.6.1 Limit

Standard	FCC Part 15 Subpart C Paragraph 15.247(d); RSS-247 Issue 2 Paragraph 5.5.
RF Output power (Detection methods)	Limit(dB)
RF Output power(Average detector)	30dBc(Note1)
RF Output power(PK detector)	20dBc(Note2)

Note 1: If maximum conducted (average) output power was used to demonstrate compliance as described in 9.2, then the peak power in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum in-band peak PSD level in 100 kHz (i.e., 30 dBc).

Note 2: If the maximum peak conducted output power procedure was used, then the peak output power measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz (i.e., 20 dBc).

4.6.2 Test Setup

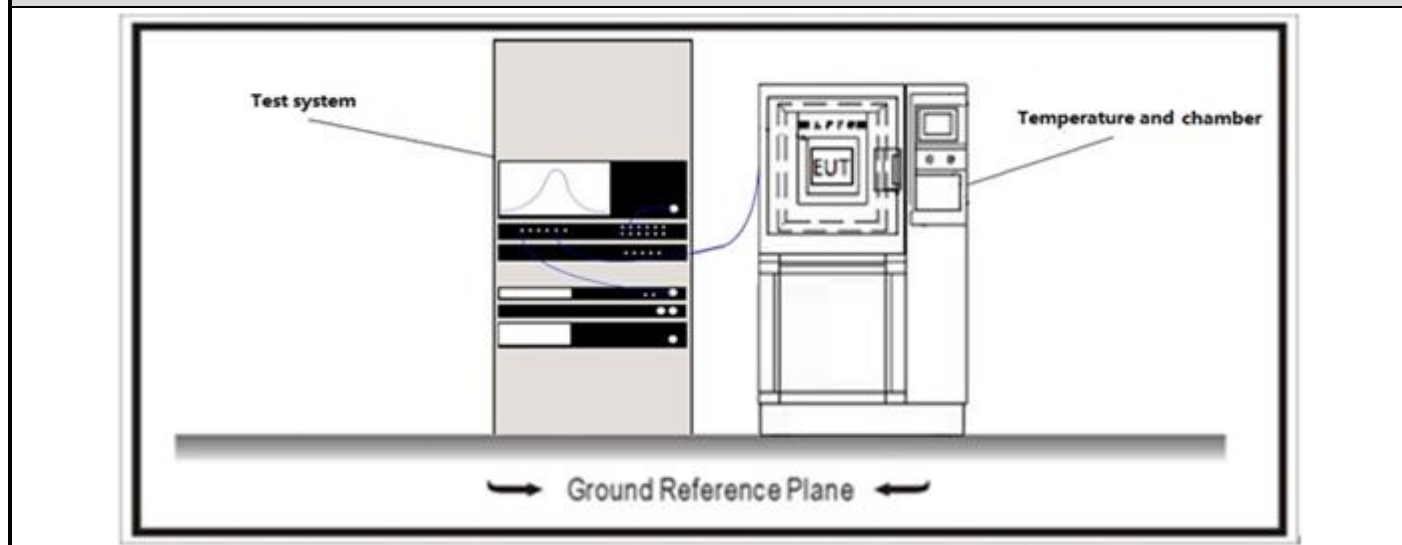


4.6.3 Test Procedure

References Rule	Chapter	Description
☒ ANSI C63.10	11.11	Emissions in non-restricted frequency bands
☒ ANSI C63.10	11.11.1	General
☒ ANSI C63.10	11.11.2	Reference level measurement
☒ ANSI C63.10	11.11.3	Emission level measurement

4.7 Duty cycle**VERDICT: PASS****4.7.1 Limit**

N/A

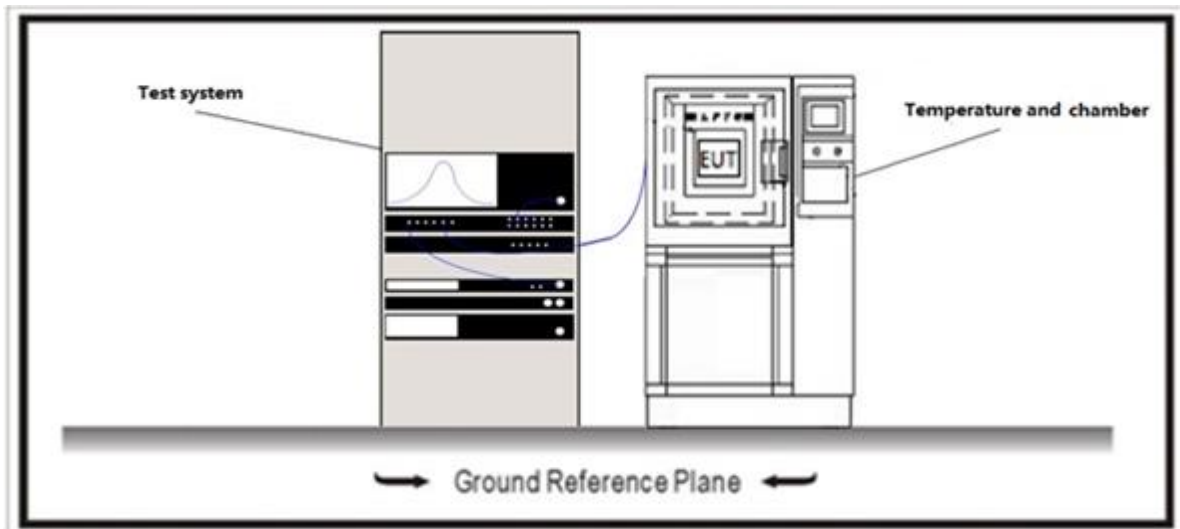4.7.2 Test Setup**4.7.3 Test Procedure**

References Rule		Chapter	Description
☒	ANSI C63.10	11.6	Duty cycle (D), transmission duration (T), and maximum power control level

4.8 Emissions in Restricted Bands**VERDICT: PASS****4.8.1 Limit**

Standard	FCC Part 15 Subpart C Paragraph 15.205
-----------------	--

Restricted Bands of operation

Frequency (MHz)	Frequency (MHz)	Frequency (MHz)	Frequency (GHz)
0.090 – 0.110	16.42 – 16.423	399.9 – 410	4.5 – 5.15
0.495 – 0.505	16.69475 – 16.69525	608 – 614	5.35 – 5.46
2.1735 – 2.1905	16.80425 – 16.80475	960 – 1240	7.25 – 7.75
4.125 – 4.128	25.5 – 25.67	1300 – 1427	8.025 – 8.5
4.17725 – 4.17775	37.5 – 38.25	1435 – 1626.5	9.0 – 9.2
4.20725 – 4.20775	73 – 74.6	1645.5 – 1646.5	9.3 – 9.5
6.215 – 6.218	74.8 – 75.2	1660 – 1710	10.6 – 12.7
6.26775 – 6.26825	108 – 121.94	1718.8 – 1722.2	13.25 – 13.4
6.31175 – 6.31225	123 – 138	2200 – 2300	14.47 – 14.5
8.291 – 8.294	149.9 – 150.05	2310 – 2390	15.35 – 16.2
8.362 – 8.366	156.52475 – 156.52525	2483.5 – 2500	17.7 – 21.4
8.37625 – 8.38675	156.7 – 156.9	2690 – 2900	22.01 – 23.12
8.81425 – 8.81475	162.0125 – 167.17	3260 – 3267	23.6 – 24.0
12.29 – 12.293	167.72 – 173.2	3332 – 3339	31.2 – 31.8
12.51975 – 12.52025	240 – 285	3345.8 – 3358	36.43 – 36.5
12.57675 – 12.57725	322 – 335.4	3600 – 4400	
13.36 – 13.41			

Standard	RSS-Gen Issue 5 Paragraph 8.10
-----------------	--------------------------------

Restricted Bands of operation for IC

0.090 - 0.110	13.36 - 13.41	960 - 1427	9.0 - 9.2
0.495 - 0.505	16.42 - 16.423	1435 - 1626.5	9.3 - 9.5
2.1735 - 2.1905	16.69475 - 16.69525	1645.5 - 1646.5	10.6 - 12.7
3.020 - 3.026	16.80425 - 16.80475	1660 - 1710	13.25 - 13.4
4.125 - 4.128	25.5 - 25.67	1718.8 - 1722.2	14.47 - 14.5
4.17725 - 4.17775	37.5 - 38.25	2200 - 2300	15.35 - 16.2
4.20725 - 4.20775	73 - 74.6	2310 - 2390	17.7 - 21.4
5.677 - 5.683	74.8 - 75.2	2483.5 - 2500	22.01 - 23.12
6.215 - 6.218	108 - 138	2655 - 2900	23.6 - 24.0
6.26775 - 6.26825	149.9 - 150.05	3260 - 3267	31.2 - 31.8
6.31175 - 6.31225	156.52475 - 156.52525	3332 - 3339	36.43 - 36.5
8.291 - 8.294	156.7 - 156.9	3345.8 - 3358	Above 38.6
8.362 - 8.366	162.0125 - 167.17	3500 - 4400	
8.37625 - 8.38675	167.72 - 173.2	4500 - 5150	
8.41425 - 8.41475	240 - 285	5350 - 5460	
12.29 - 12.293	322 - 335.4	7250 - 7750	
12.51975 - 12.52025	399.9 - 410	8025 - 8500	
12.57675 - 12.57725	608 - 614	--	

Restricted Band Emissions Limit

FCC Part 15 Subpart C Paragraph 15.209

Frequency (MHz)	Field strength ($\mu\text{V/m}$)	Field strength ($\text{dB}\mu\text{V/m}$)	Measurement distance (m)
0.009 - 0.49	$2400/F(\text{kHz})$	48.5 – 13.8	300 _(Note 1)
0.49 - 1.705	$24000/F(\text{kHz})$	33.8 - 23	30 _(Note 1)
1.705 - 30	30	29.5	30 _(Note 1)
30 - 88	100	40	3 _(Note 2)
88 - 216	150	43.5	3 _(Note 2)
216 - 960	200	46	3 _(Note 2)
Above 960	500	54	3 _(Note 2)

RSS-Gen Issue 5 Paragraph 8.9.


Frequency (MHz)	Field strength	Field strength ($\text{dB}\mu\text{V/m}$)	Measurement distance (m)
0.009 - 0.49	$6.37/F(\text{kHz}) \mu\text{A/m}$	48.5 – 13.8	300 _(Note 1)
0.49 - 1.705	$63.7/F(\text{kHz}) \mu\text{A/m}$	33.8 - 23	30 _(Note 1)
1.705 - 30	30 $\mu\text{V/m}$	29.5	30 _(Note 1)
30 - 88	100 $\mu\text{V/m}$	40	3 _(Note 2)
88 - 216	150 $\mu\text{V/m}$	43.5	3 _(Note 2)
216 - 960	200 $\mu\text{V/m}$	46	3 _(Note 2)
Above 960	500 $\mu\text{V/m}$	54	3 _(Note 2)

Note 1: At frequencies below 30 MHz, measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field. Pending the development of an appropriate measurement procedure for measurements performed below 30 MHz, when performing measurements at a closer distance than specified, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade).


Note 2: At frequencies at or above 30 MHz, measurements may be performed at a distance other than what is specified provided: measurements are not made in the near field except where it can be shown that near field measurements are appropriate due to the characteristics of the device; and it can be demonstrated that the signal levels needed to be measured at the distance employed can be detected by the measurement equipment. Measurements shall not be performed at a distance greater than 30 meters unless it can be further demonstrated that measurements at a distance of 30 meters or less are impractical. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse linear-distance for field strength measurements; inverse-linear-distance-squared for power density measurements).

4.8.2 Test Setup


Below 30MHz Test Setup:

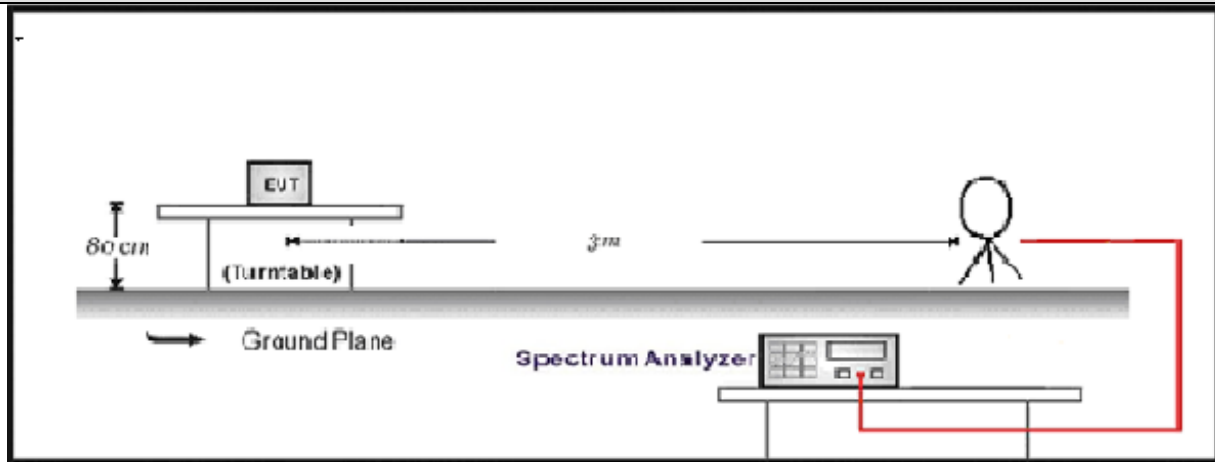

30MHz-1GHz Test Setup:

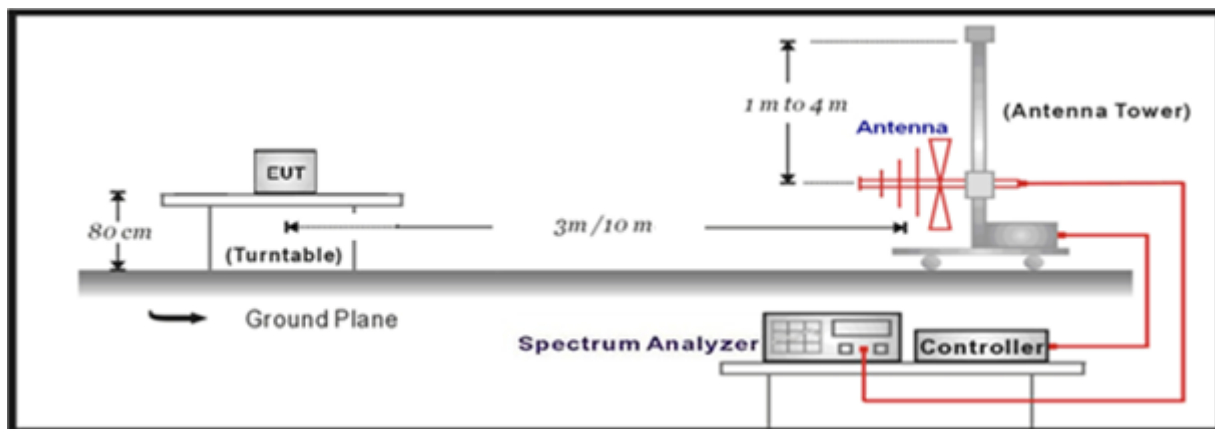

Above 1GHz Test Setup:

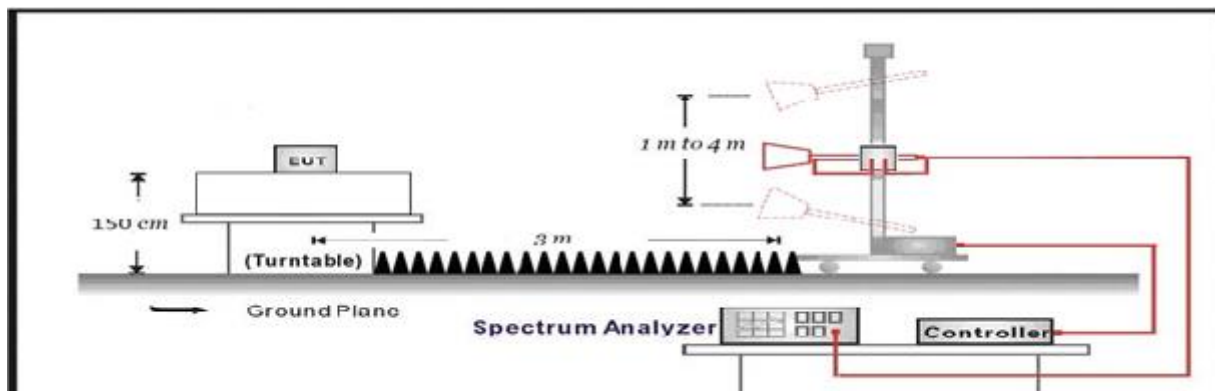

4.8.3 Test Procedure

	References Rule		Chapter	Description
☒	ANSI C63.10		11.12	Emissions in restricted frequency bands
	☒	ANSI C63.10	11.12.1	Radiated emission measurements
	☒	ANSI C63.10	11.12.2.7	Radiated spurious emission test
	☒	ANSI C63.10	6.4	Radiated emissions from unlicensed wireless devices below 30 MHz
	☒	ANSI C63.10	6.5	Radiated emissions from unlicensed wireless devices in the frequency range of 30 MHz to 1000 MHz
	☒	ANSI C63.10	6.6	Radiated emissions from unlicensed wireless devices above 1 GHz

4.9 AC Power Line Conducted Emission**VERDICT: PASS****4.9.1 Limit**


Standard	FCC Part 15 Subpart C Paragraph 15.207; RSS-Gen Issue 5 Paragraph 8.8.	
Frequency range [MHz]	Limit: QP [dB(μV) ¹⁾]	Limit: AV [dB(μV) ¹⁾]
0,15 - 0,50	66 - 56 ²⁾	56 - 46 ²⁾
0,50 - 5,0	56	46
5,0 - 30	60	50

¹⁾ At the transition frequency, the lower limit applies.

²⁾ The limit decreases linearly with the logarithm of the frequency.

NOTE 1: The exclusion band for transmitters shall be considered for transmitters operating at frequencies below 30 MHz.

NOTE 2: Where the AC output port is directly connected (or via a circuit breaker) to the AC power input port of the EUT the AC power output port need not to be tested.

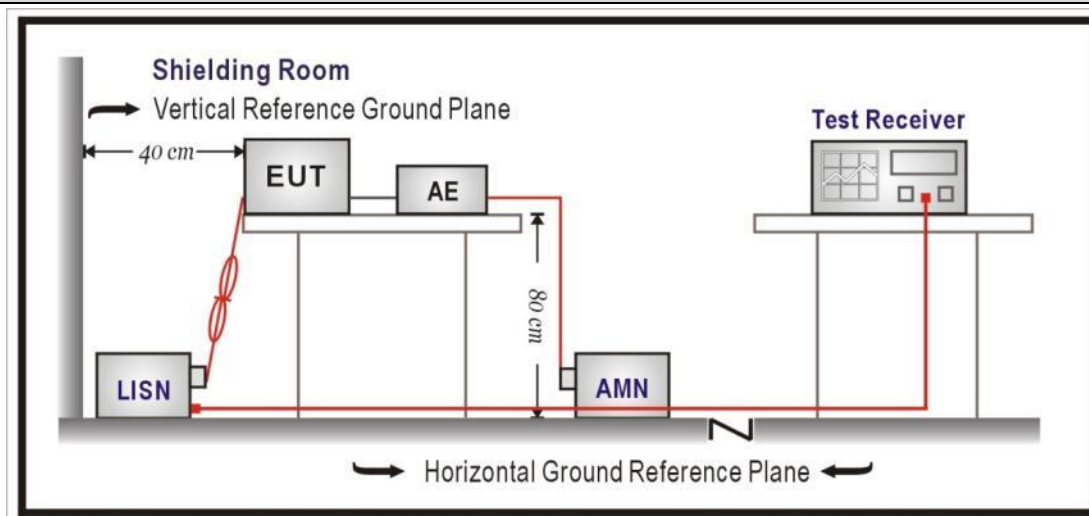4.9.2 Test Setup**4.9.3 Test Procedure**

	References Rule	Chapter	Item
☒	ANSI C63.10-2013	6.2	Standard test method for ac power-line conducted emissions from unlicensed wireless devices

4.10 Antenna Requirement**VERDICT: PASS****4.10.1 Limit:****Standard**FCC Part 15 Subpart C Paragraph 15.203;
RSS-Gen Issue 5 Paragraph 6.8.

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §15.211, §15.213, §15.217, §15.219, or §15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

4.10.2 Antenna Connector Construction:

- | | |
|-------------------------------------|--|
| ☒ | The use of a permanently attached antenna |
| ☐ | The antenna use of a unique coupling to the intentional radiator |
| ☐ | The use of a nonstandard antenna jack or electrical connector |

Please refer to the attached document "Internal Photograph" to show the antenna connector.

5 TEST SETUP PHOTO AND EUT PHOTO

Remark: The test setup photo and EUT Photo please see appendix.

6 TEST RESULT

Appendix A: DTS Bandwidth Test Result

Test Mode	Frequency[MHz]	DTS BW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
Mode1	2412	8.080	2407.960	2416.040	≥0.5	PASS
	2437	8.040	2433.000	2441.040	≥0.5	PASS
	2462	8.560	2457.960	2466.520	≥0.5	PASS
Mode2	2412	16.360	2403.840	2420.200	≥0.5	PASS
	2437	16.360	2428.840	2445.200	≥0.5	PASS
	2462	16.320	2453.840	2470.160	≥0.5	PASS
Mode3	2412	16.360	2403.840	2420.200	≥0.5	PASS
	2437	16.400	2428.800	2445.200	≥0.5	PASS
	2462	16.360	2453.840	2470.200	≥0.5	PASS

Test Graphs

Mode1 2412




Mode1 2437



Mode1_2462




Mode2_2412

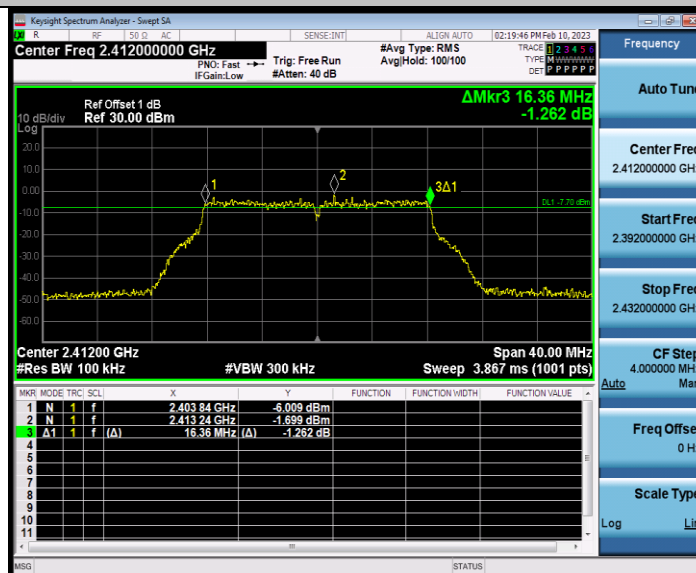

Mode2_2437



Mode2_2462

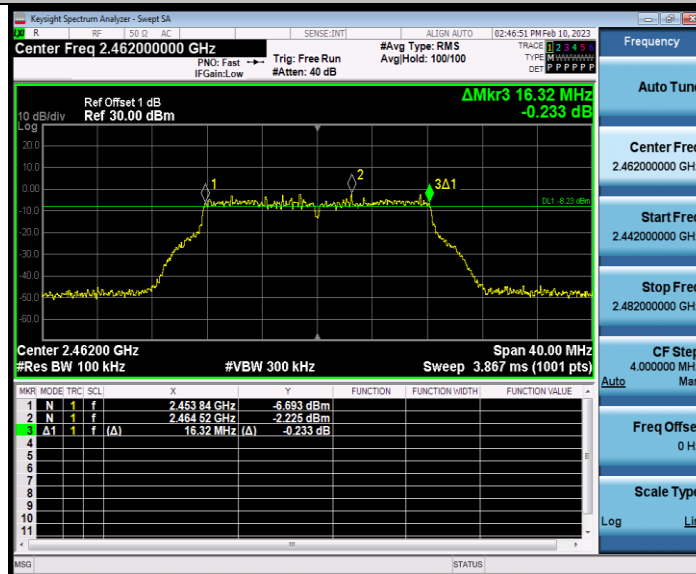


Mode3_2412



Mode3_2437



Mode3_2462

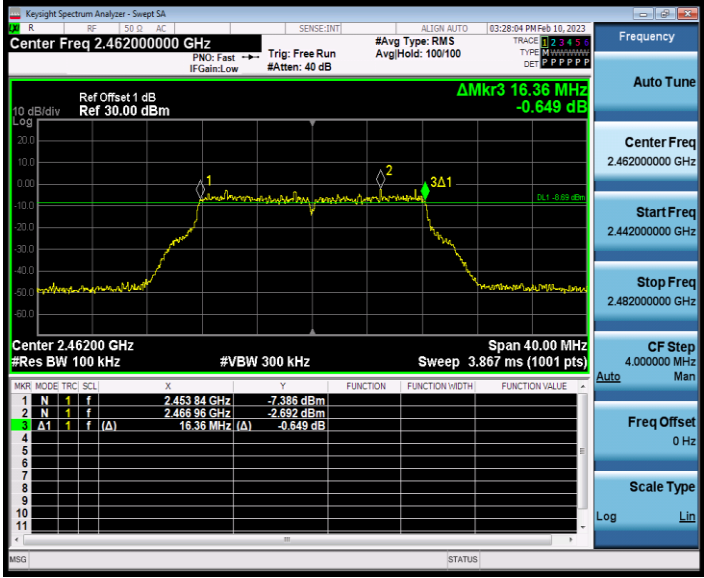

Appendix B: Occupied Channel Bandwidth Test Result


Test Mode	Channel Frequency[MHz]	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
Mode1	2412	11.202	2406.4486	2417.6506	Within 2400~2483.5	Pass
	2437	11.189	2431.4639	2442.6529	Within 2400~2483.5	Pass
	2462	11.168	2456.4344	2467.6024	Within 2400~2483.5	Pass
Mode2	2412	17.467	2403.2697	2420.7367	Within 2400~2483.5	Pass
	2437	17.478	2428.2600	2445.7380	Within 2400~2483.5	Pass
	2462	17.461	2453.2696	2470.7306	Within 2400~2483.5	Pass
Mode3	2412	17.530	2403.2318	2420.7618	Within 2400~2483.5	Pass
	2437	17.475	2428.2657	2445.7407	Within 2400~2483.5	Pass
	2462	17.406	2453.3051	2470.7111	Within 2400~2483.5	Pass

Test Graphs


Mode1_2412




Mode1_2437

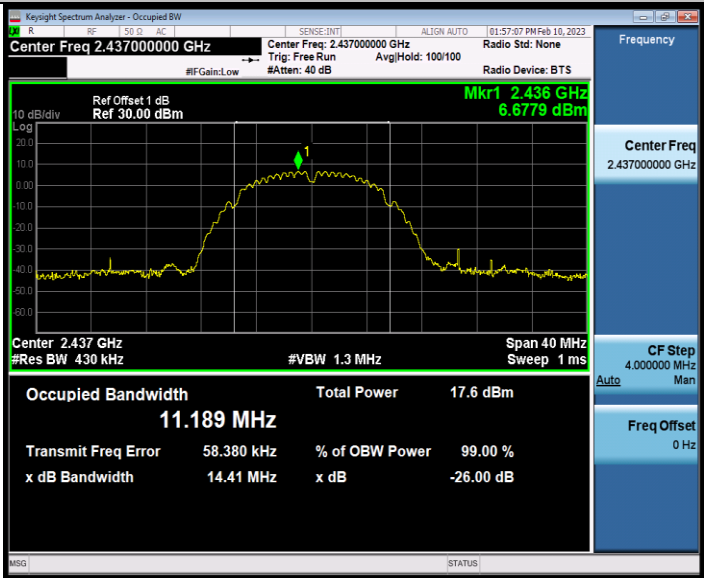


Mode1_2462

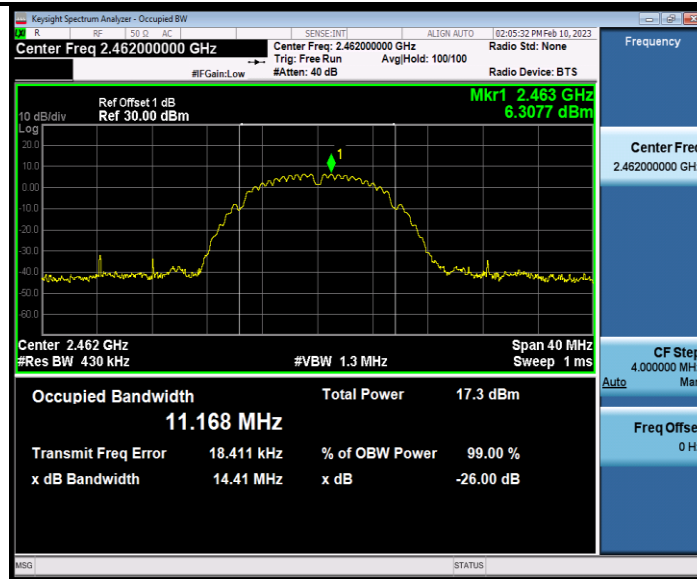


Mode2_2412

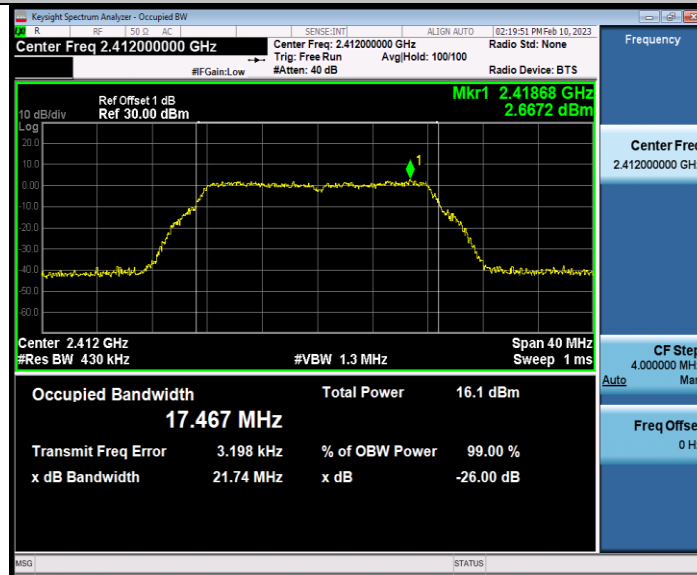


Mode2_2437

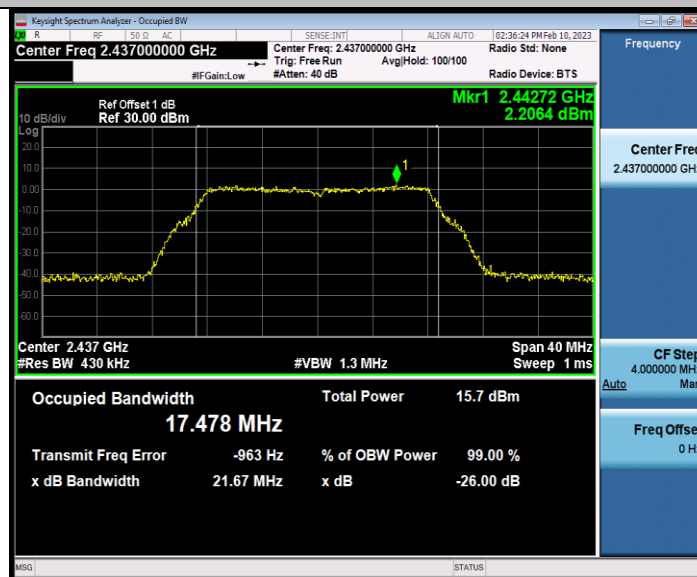


Mode2_2462

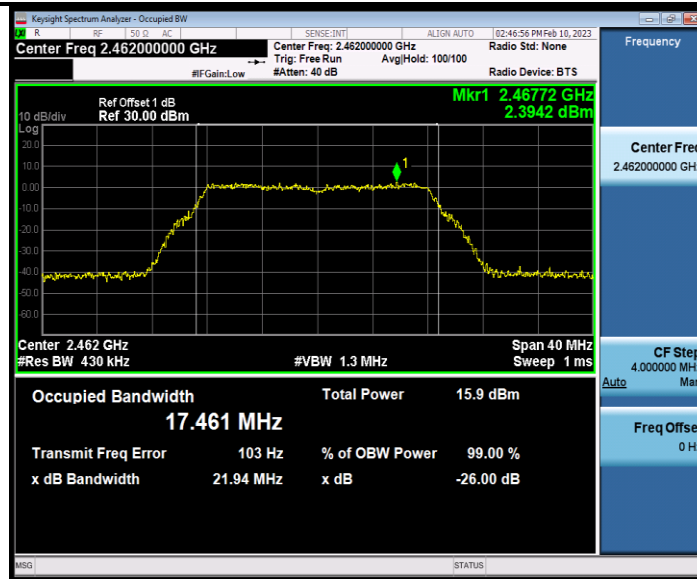

Mode3_2412

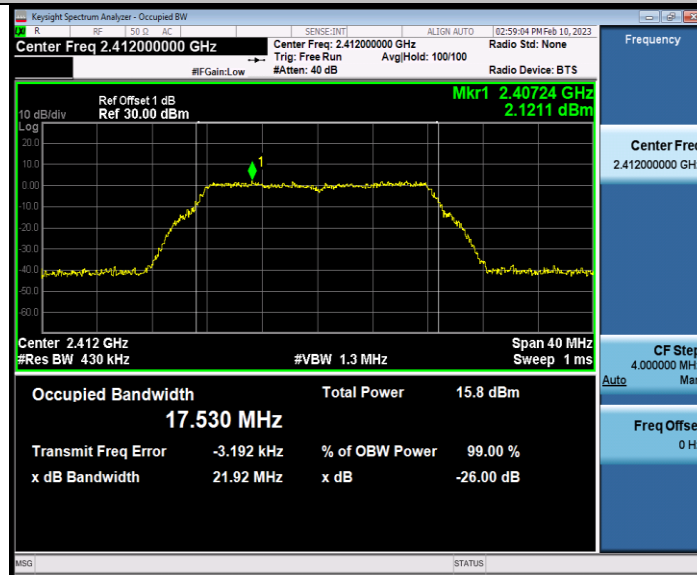

Mode3_2437

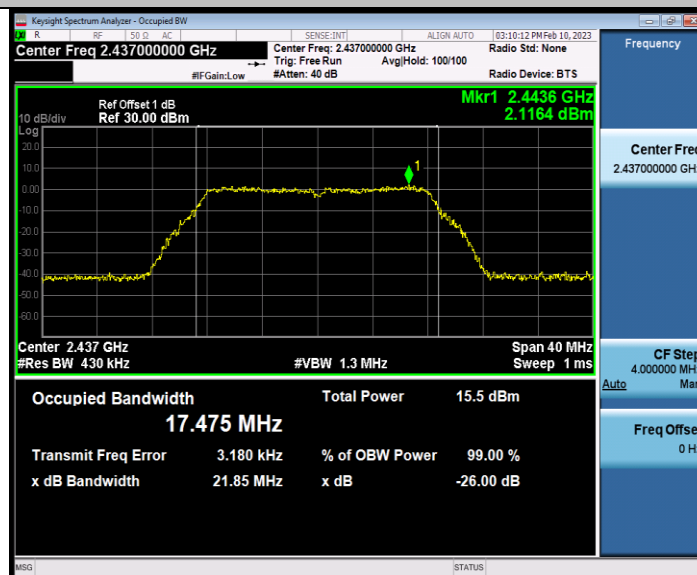

Mode3_2462

Appendix C: Maximum conducted output power

Test Result Peak

Test Mode	Frequency[MHz]	Peak Power[dBm]	Conducted Limit[dBm]	EIRP [dBm]	EIRP Limit[dBm]	Verdict
Mode1	2412	17.36	≤30.00	18.66	≤36.00	PASS
	2437	17.00	≤30.00	18.30	≤36.00	PASS
	2462	17.30	≤30.00	18.60	≤36.00	PASS
Mode2	2412	17.41	≤30.00	18.71	≤36.00	PASS
	2437	16.59	≤30.00	17.89	≤36.00	PASS
	2462	16.98	≤30.00	18.28	≤36.00	PASS
Mode3	2412	17.01	≤30.00	18.31	≤36.00	PASS
	2437	16.49	≤30.00	17.79	≤36.00	PASS
	2462	16.99	≤30.00	18.29	≤36.00	PASS

Appendix D: Maximum power spectral density Test Result

TestMode	Frequency[MHz]	Result[dBm/3kHz]	Limit[dBm/3kHz]	Verdict
Mode1	2412	-16.31	≤8.00	PASS
	2437	-16.78	≤8.00	PASS
	2462	-16.40	≤8.00	PASS
Mode2	2412	-20.97	≤8.00	PASS
	2437	-20.87	≤8.00	PASS
	2462	-20.73	≤8.00	PASS
Mode3	2412	-19.39	≤8.00	PASS
	2437	-20.67	≤8.00	PASS
	2462	-20.54	≤8.00	PASS

Test Graphs

Mode1_2412




Mode1_2437




Mode1_2462




Mode2_2412

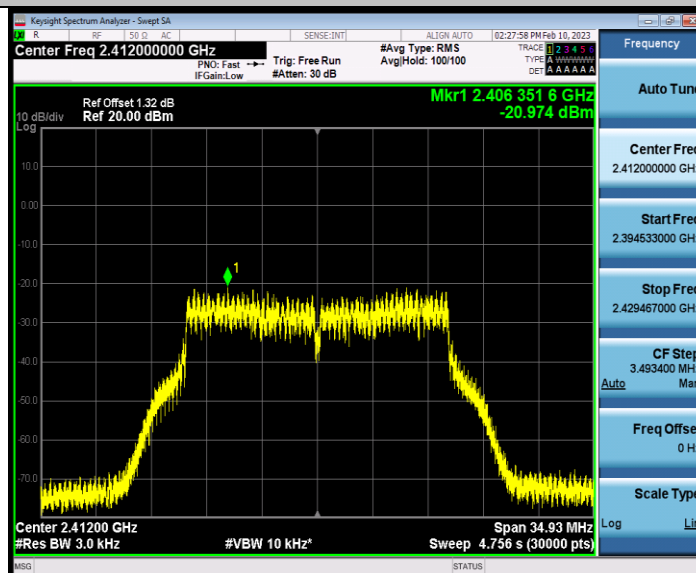


Mode2_2437

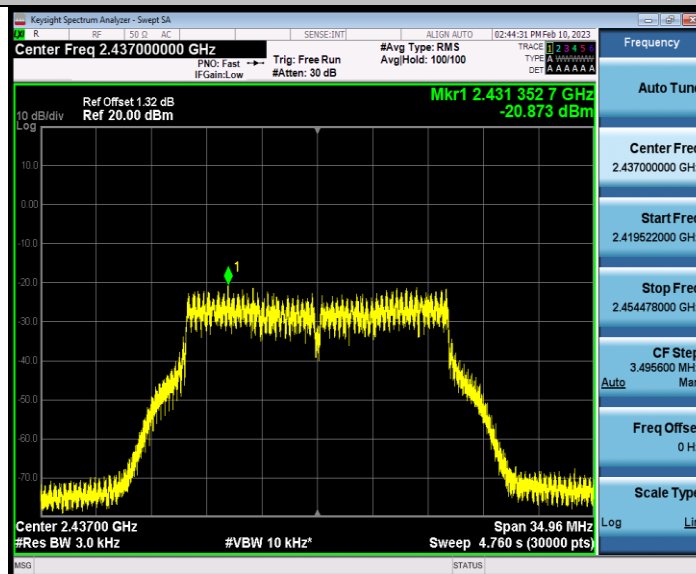


Mode2_2462

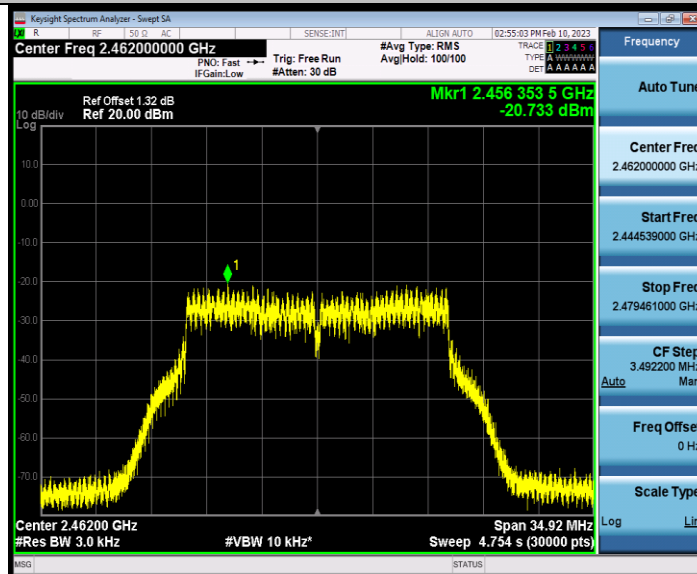


Mode3_2412

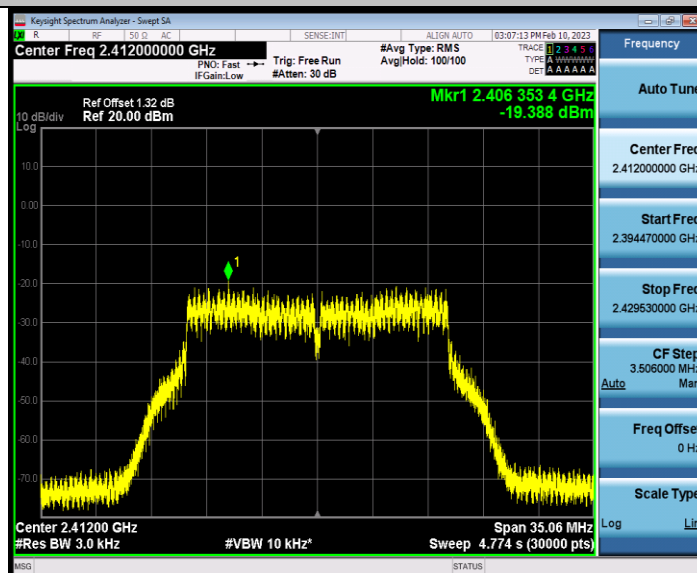

Mode3_2437

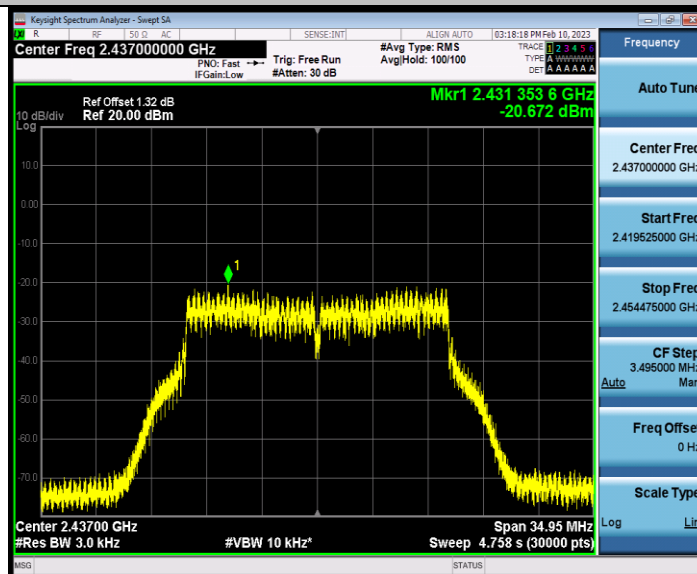


Mode3_2462

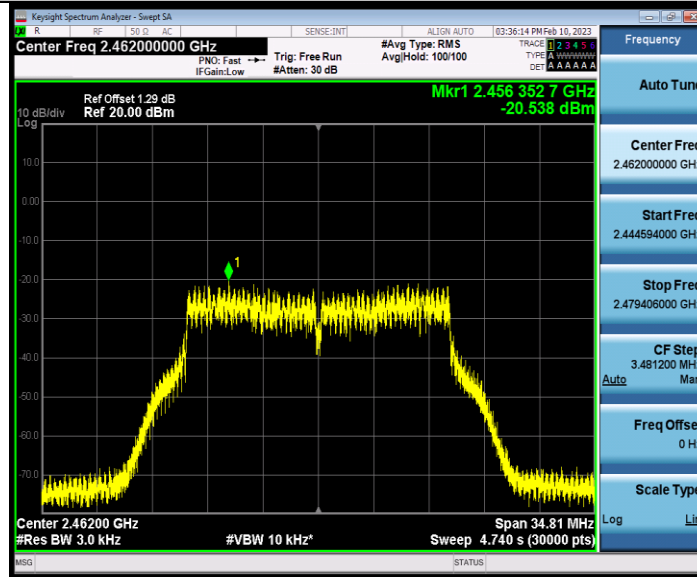

Appendix E: Band edge measurements


Test Result

Profile: 2320056R	Page No.: 1
Engineer: Yu Liu	
Site: AC5	Time: 2022/12/27 - 21:03
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)2022	Polarity: Horizontal
EUT: SC2124	Power: Battery
Note: Mode 1 : Transmit at 2412MHz by 802.11b	

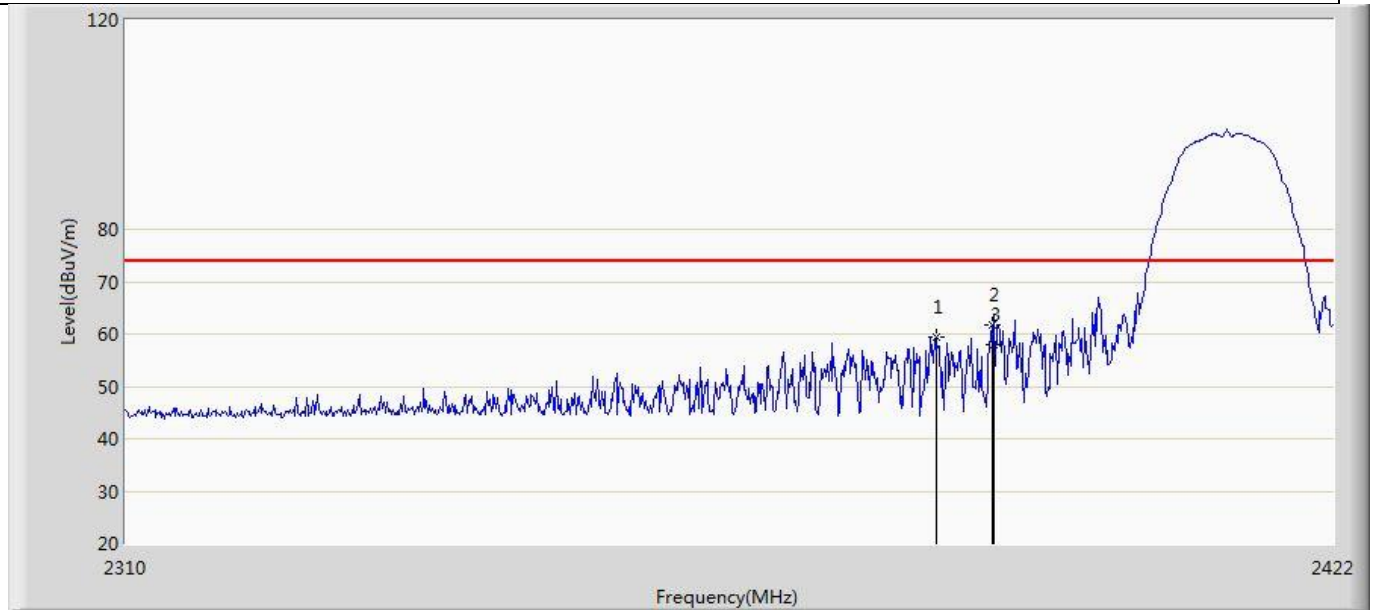


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2384.592	59.365	25.304	-14.635	74.000	34.061	PK
2	*	2389.856	61.659	27.576	-12.341	74.000	34.083	PK
3		2390.000	58.051	23.967	-15.949	74.000	34.084	PK

Profile: 2320056R	Page No.: 2
Engineer: Yu Liu	
Site: AC5	Time: 2023/02/13 - 21:35
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)2022	Polarity: Horizontal
EUT: SC2124	Power: Battery
Note: Mode 1 : Transmit at 2412MHz by 802.11b	

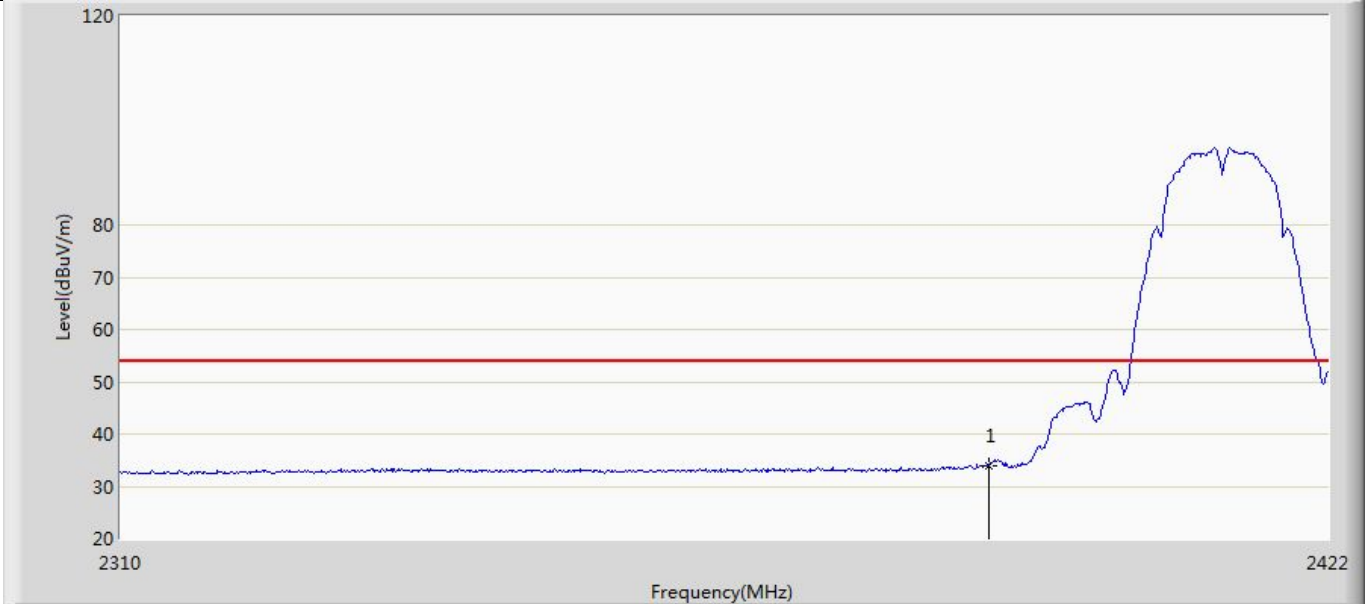


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2390.000	33.963	-0.121	-20.037	54.000	34.084	AV

Profile: 2320056R	Page No.: 3
Engineer: Yu Liu	
Site: AC5	Time: 2023/02/13 - 21:36
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)2022	Polarity: Vertical
EUT: SC2124	Power: Battery
Note: Mode 1 : Transmit at 2412MHz by 802.11b	

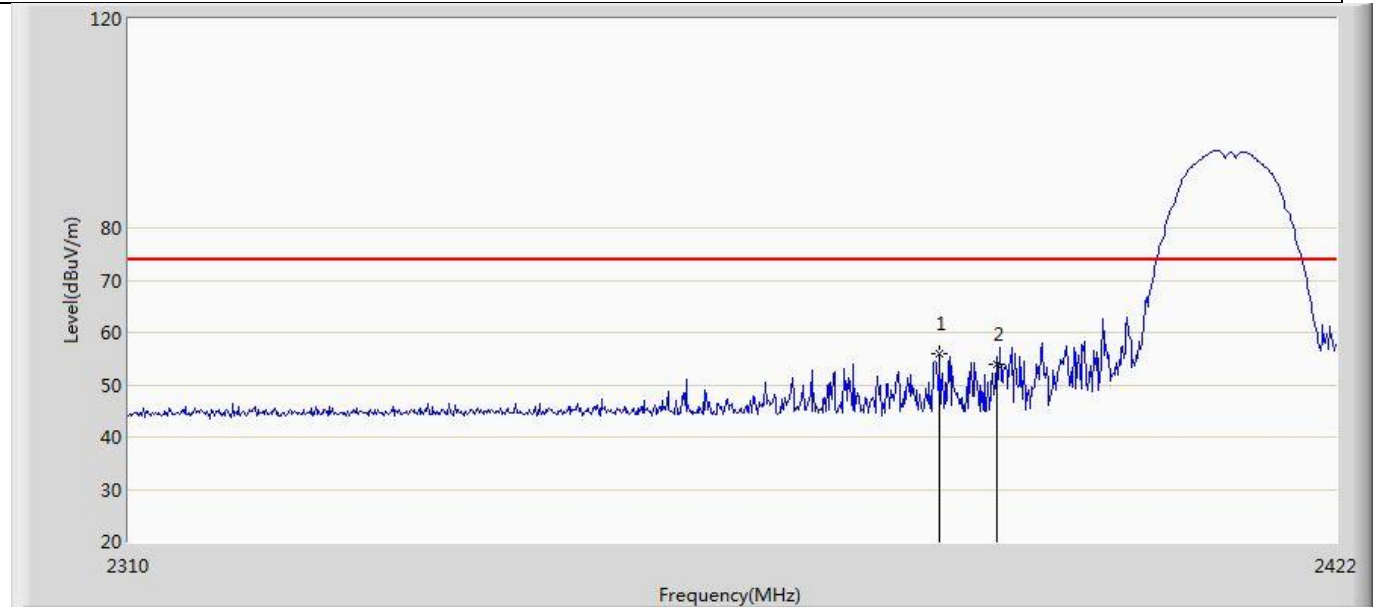


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2384.704	55.811	21.749	-18.189	74.000	34.062	PK
2		2390.000	53.904	19.820	-20.096	74.000	34.084	PK

Profile: 2320056R	Page No.: 4
Engineer: Yu Liu	
Site: AC5	Time: 2023/02/13 - 21:37
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)2022	Polarity: Vertical
EUT: SC2124	Power: Battery
Note: Mode 1 : Transmit at 2412MHz by 802.11b	

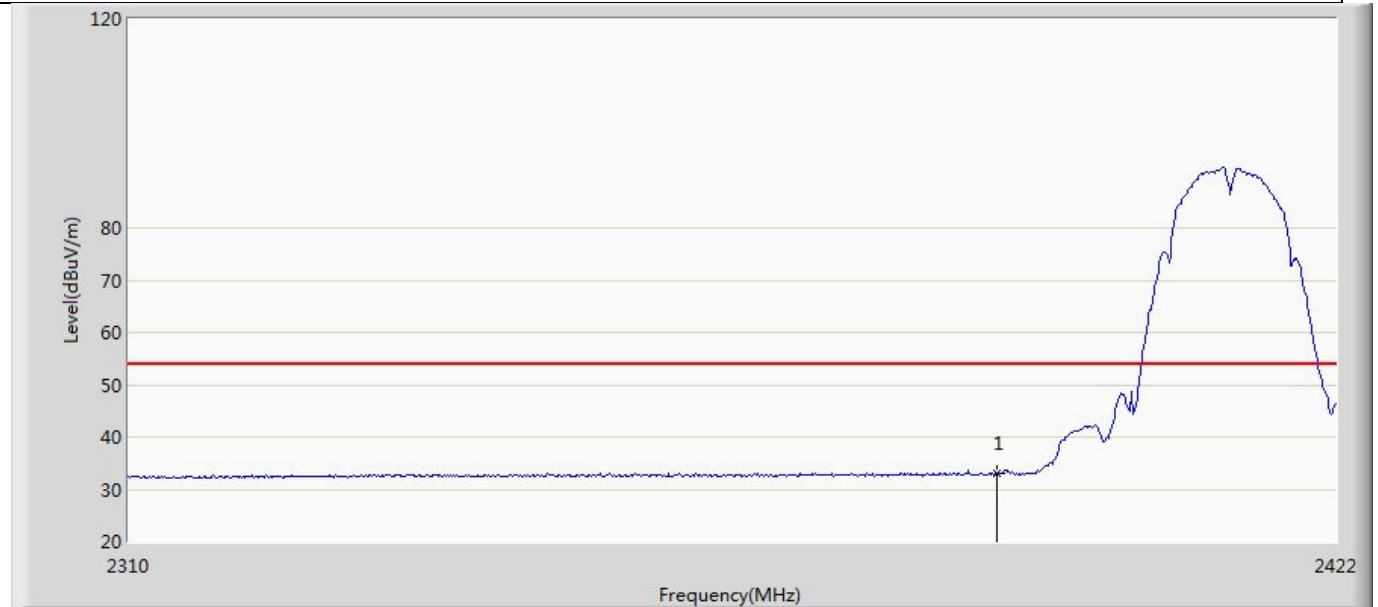


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2390.000	33.016	-1.068	-20.984	54.000	34.084	AV

Profile: 2320056R	Page No.: 5
Engineer: Yu Liu	
Site: AC5	Time: 2023/02/13 - 21:38
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)2022	Polarity: Horizontal
EUT: SC2124	Power: Battery
Note: Mode 1 : Transmit at 2462MHz by 802.11b	

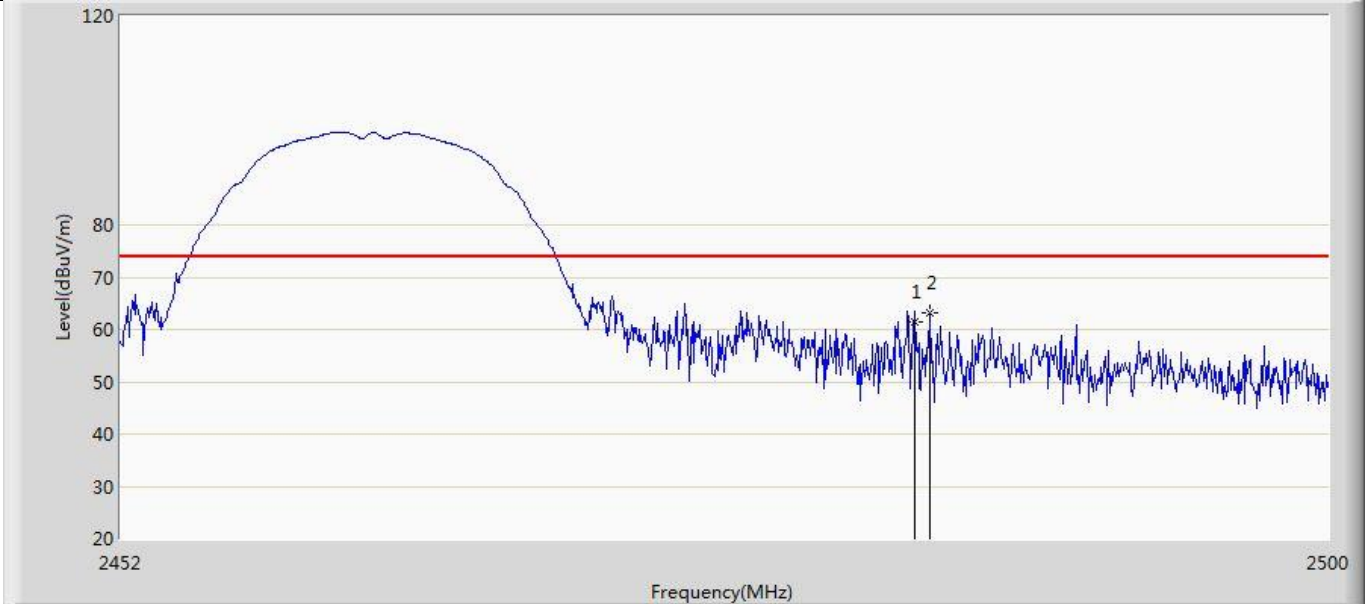


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2483.500	61.572	27.081	-12.428	74.000	34.491	PK
2	*	2484.064	63.223	28.729	-10.777	74.000	34.494	PK

Profile: 2320056R	Page No.: 6
Engineer: Yu Liu	
Site: AC5	Time: 2023/02/13 - 21:40
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)2022	Polarity: Horizontal
EUT: SC2124	Power: Battery
Note: Mode 1 : Transmit at 2462MHz by 802.11b	

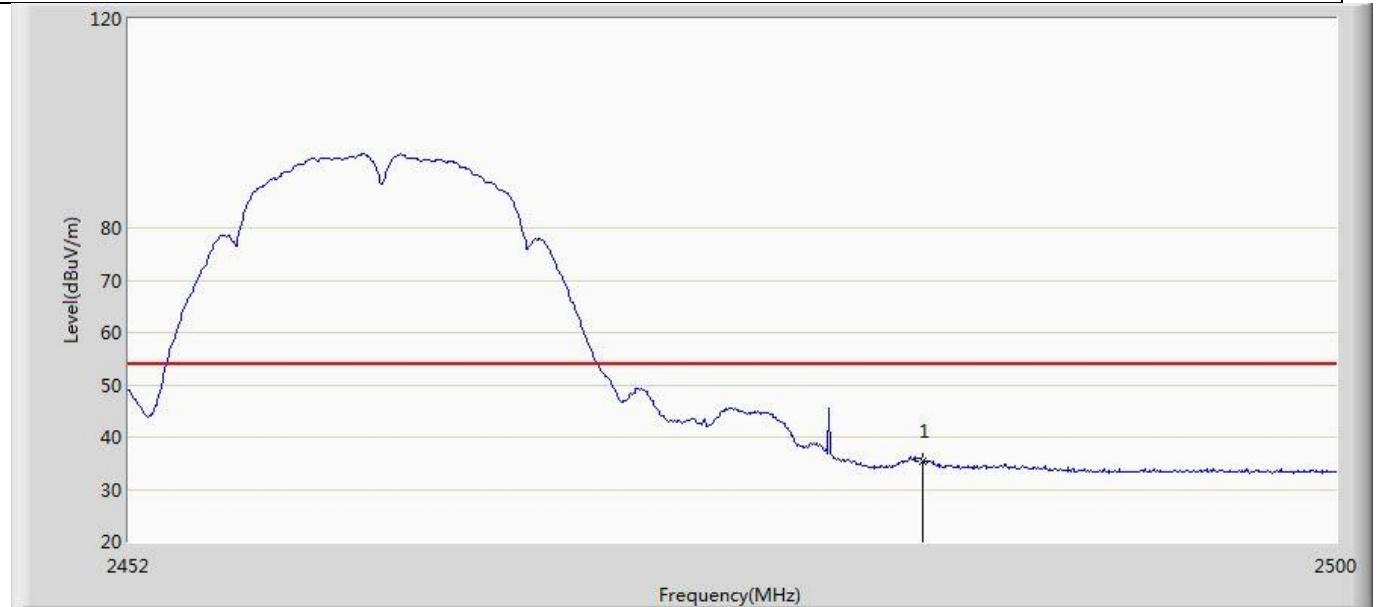


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2483.500	35.419	0.928	-18.581	54.000	34.491	AV

Profile: 2320056R	Page No.: 7
Engineer: Yu Liu	
Site: AC5	Time: 2023/02/13 - 21:41
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)2022	Polarity: Vertical
EUT: SC2124	Power: Battery
Note: Mode 1 : Transmit at 2462MHz by 802.11b	

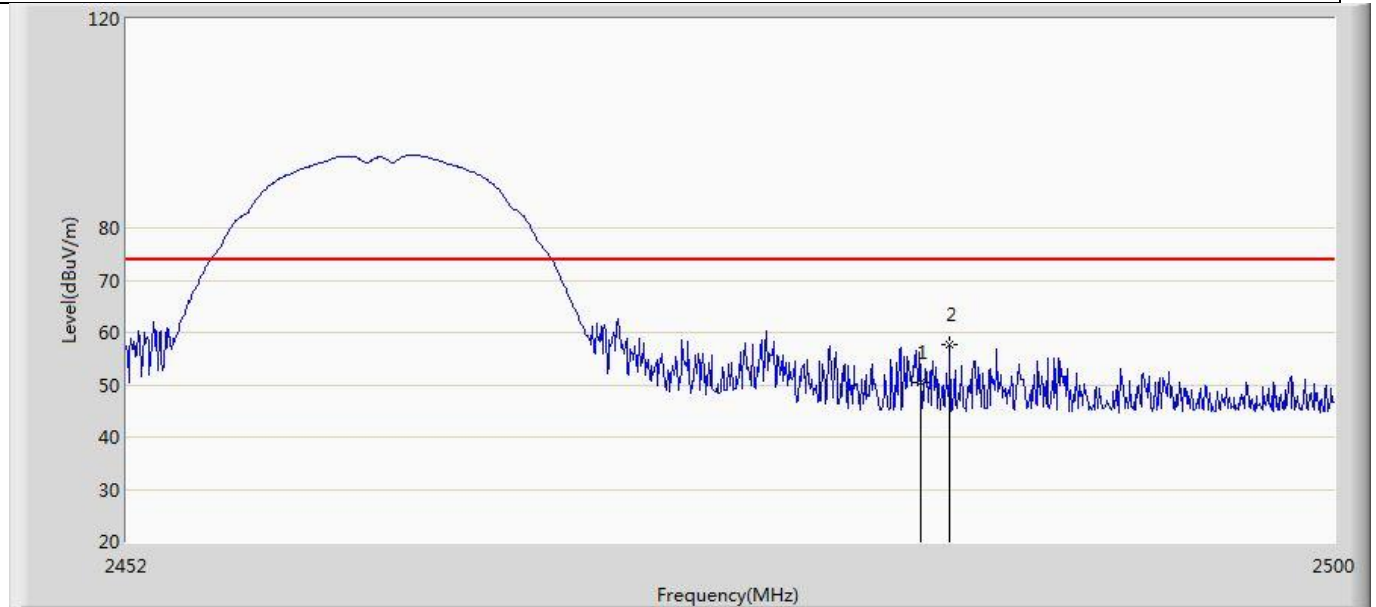


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2483.500	50.436	15.945	-23.564	74.000	34.491	PK
2	*	2484.640	57.669	23.172	-16.331	74.000	34.496	PK

Profile: 2320056R	Page No.: 8
Engineer: Yu Liu	
Site: AC5	Time: 2023/02/13 - 21:42
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)2022	Polarity: Vertical
EUT: SC2124	Power: Battery
Note: Mode 1 : Transmit at 2462MHz by 802.11b	

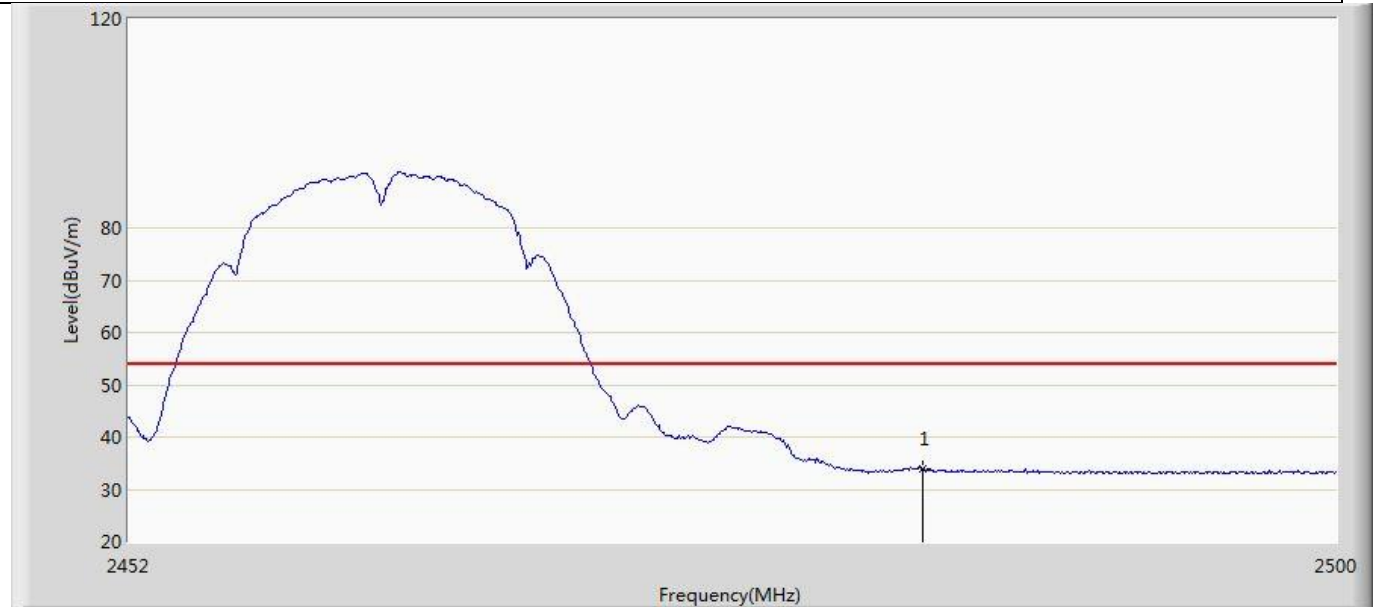


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2483.500	33.915	-0.576	-20.085	54.000	34.491	AV

Profile: 2320056R	Page No.: 9
Engineer: Yu Liu	
Site: AC5	Time: 2023/02/13 - 21:43
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)2022	Polarity: Horizontal
EUT: SC2124	Power: Battery
Note: Mode 2 : Transmit at 2412MHz by 802.11g	

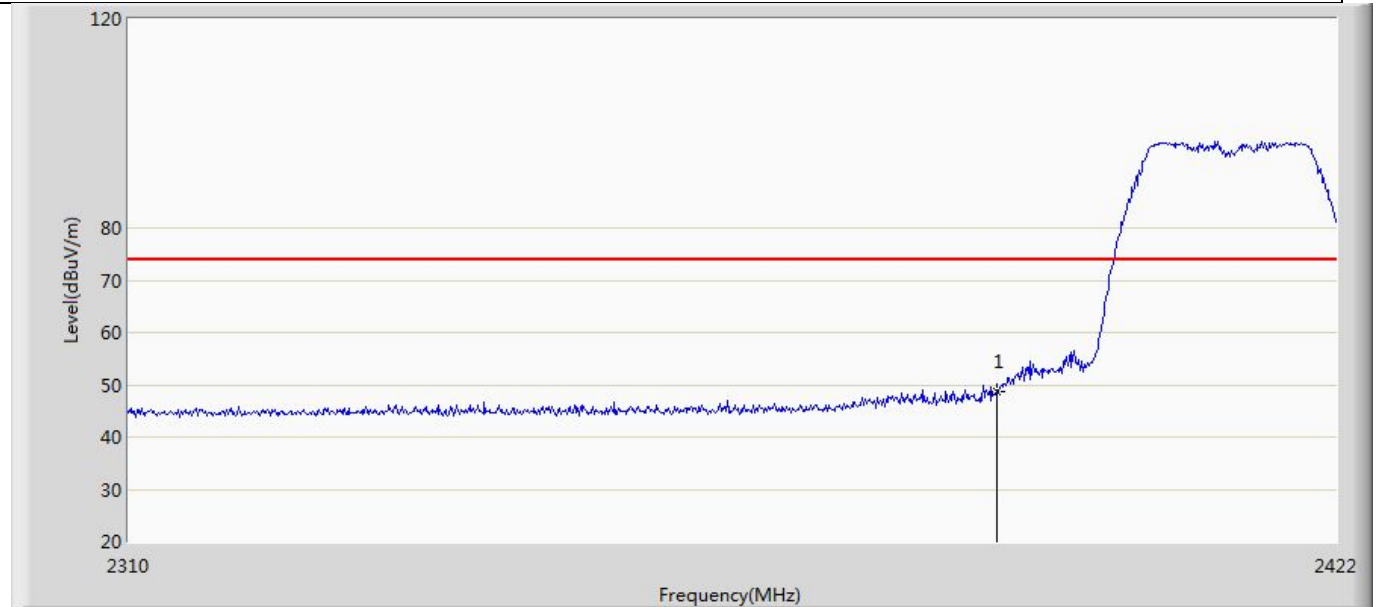


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2390.000	48.667	14.583	-25.333	74.000	34.084	PK

Profile: 2320056R	Page No.: 10
Engineer: Yu Liu	
Site: AC5	Time: 2023/02/13 - 21:45
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)2022	Polarity: Horizontal
EUT: SC2124	Power: Battery
Note: Mode 2 : Transmit at 2412MHz by 802.11g	

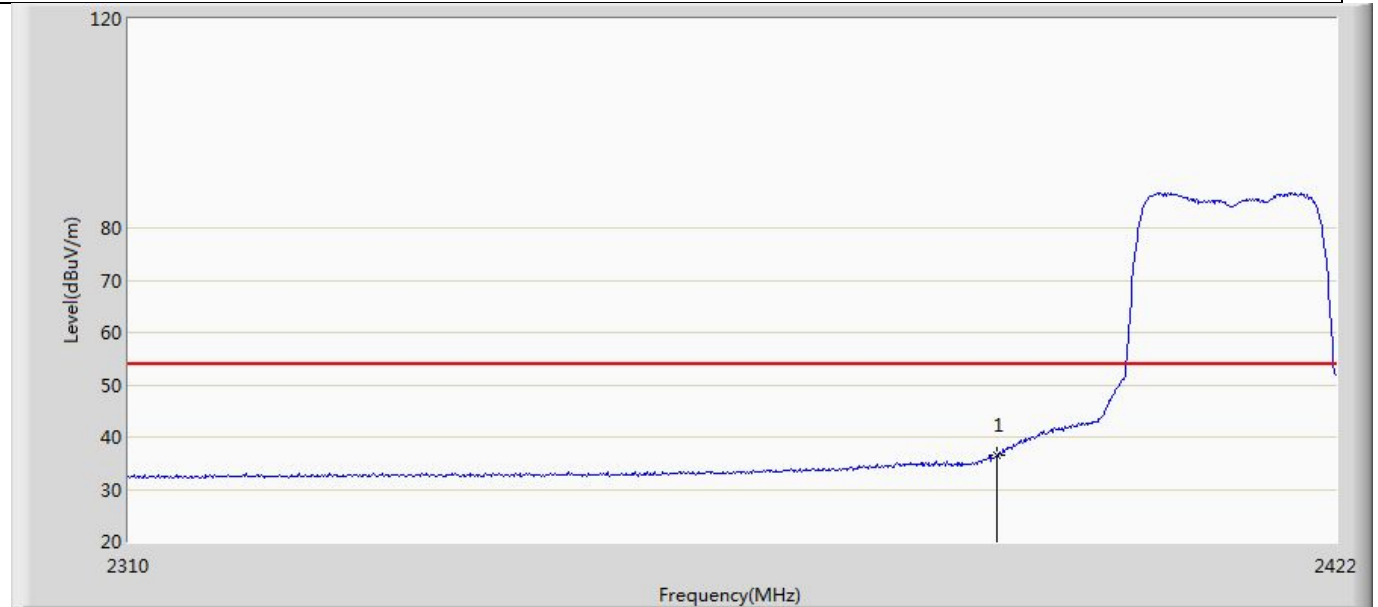


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2390.000	36.499	2.415	-17.501	54.000	34.084	AV

Profile: 2320056R	Page No.: 11
Engineer: Yu Liu	
Site: AC5	Time: 2023/02/13 - 21:46
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)2022	Polarity: Vertical
EUT: SC2124	Power: Battery
Note: Mode 2 : Transmit at 2412MHz by 802.11g	

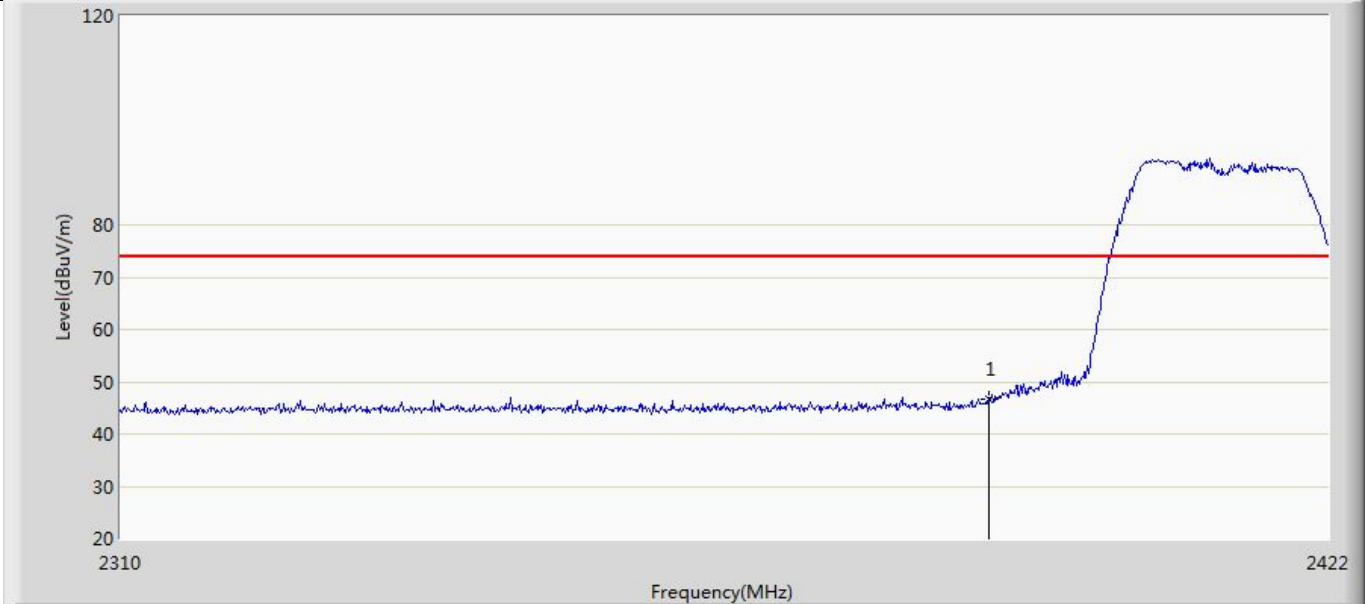


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2390.000	46.721	12.637	-27.279	74.000	34.084	PK

Profile: 2320056R	Page No.: 12
Engineer: Yu Liu	
Site: AC5	Time: 2023/02/13 - 21:47
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)2022	Polarity: Vertical
EUT: SC2124	Power: Battery
Note: Mode 2 : Transmit at 2412MHz by 802.11g	

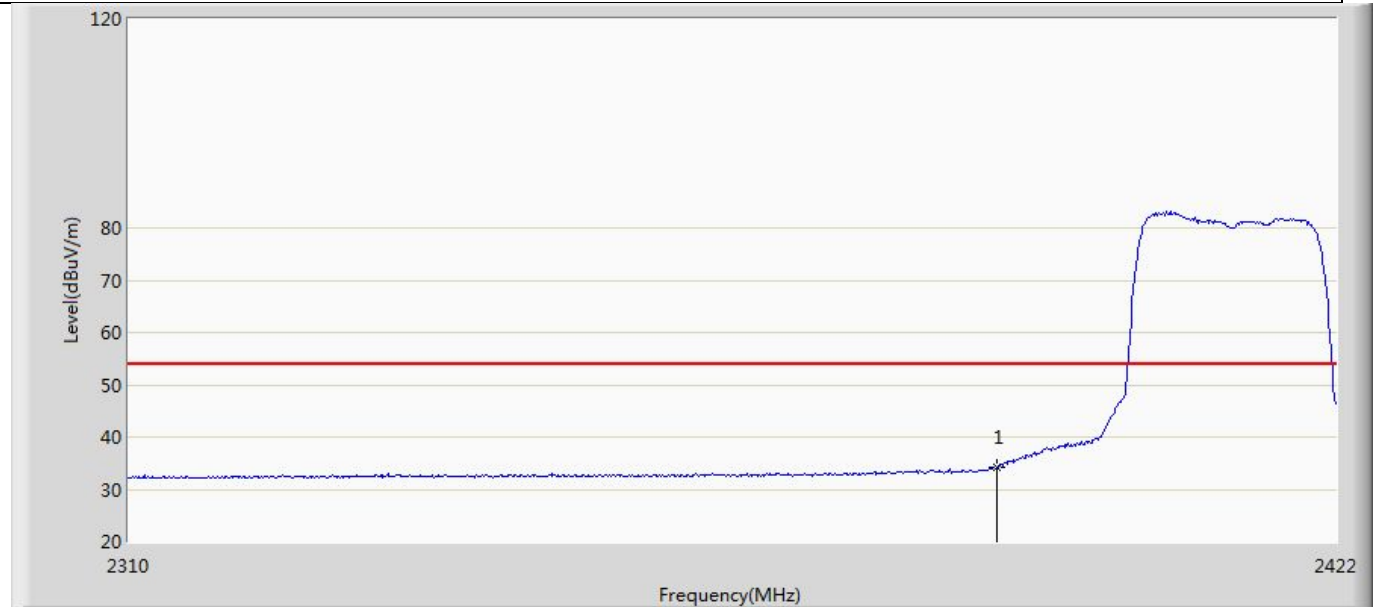


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2390.000	34.170	0.086	-19.830	54.000	34.084	AV

Profile: 2320056R	Page No.: 13
Engineer: Yu Liu	
Site: AC5	Time: 2023/02/13 - 21:48
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)2022	Polarity: Horizontal
EUT: SC2124	Power: Battery
Note: Mode 2 : Transmit at 2462MHz by 802.11g	

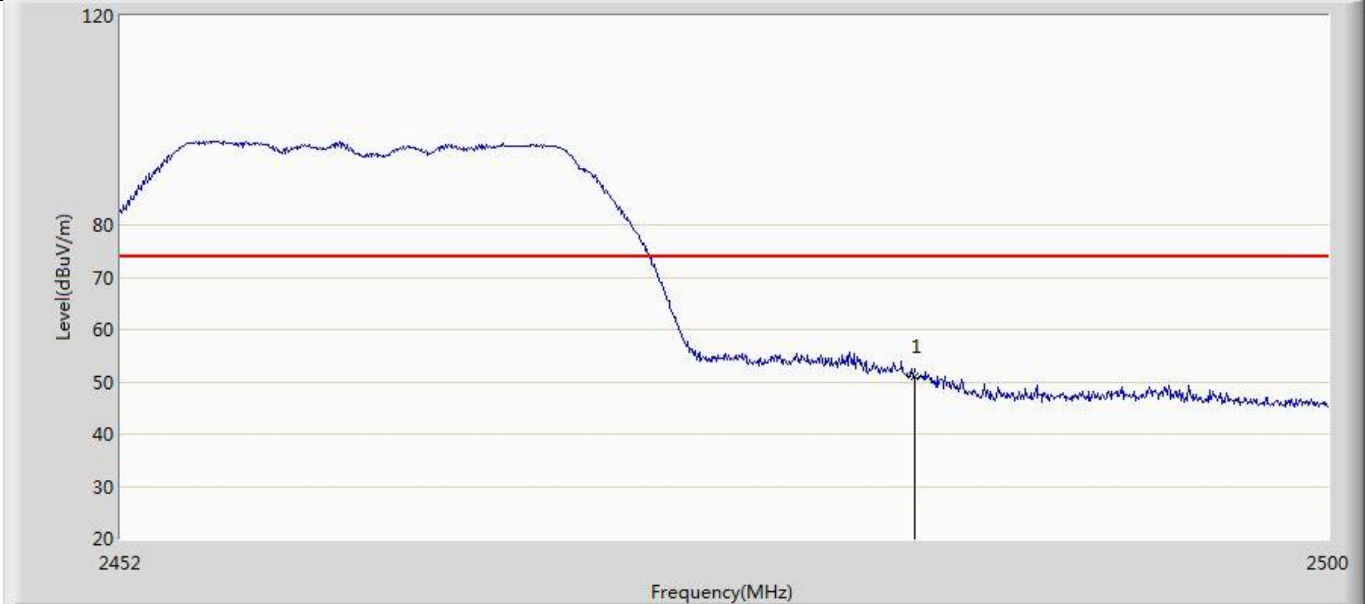


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2483.500	50.930	16.439	-23.070	74.000	34.491	PK

Profile: 2320056R	Page No.: 14
Engineer: Yu Liu	
Site: AC5	Time: 2023/02/13 - 21:49
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)2022	Polarity: Horizontal
EUT: SC2124	Power: Battery
Note: Mode 2 : Transmit at 2462MHz by 802.11g	

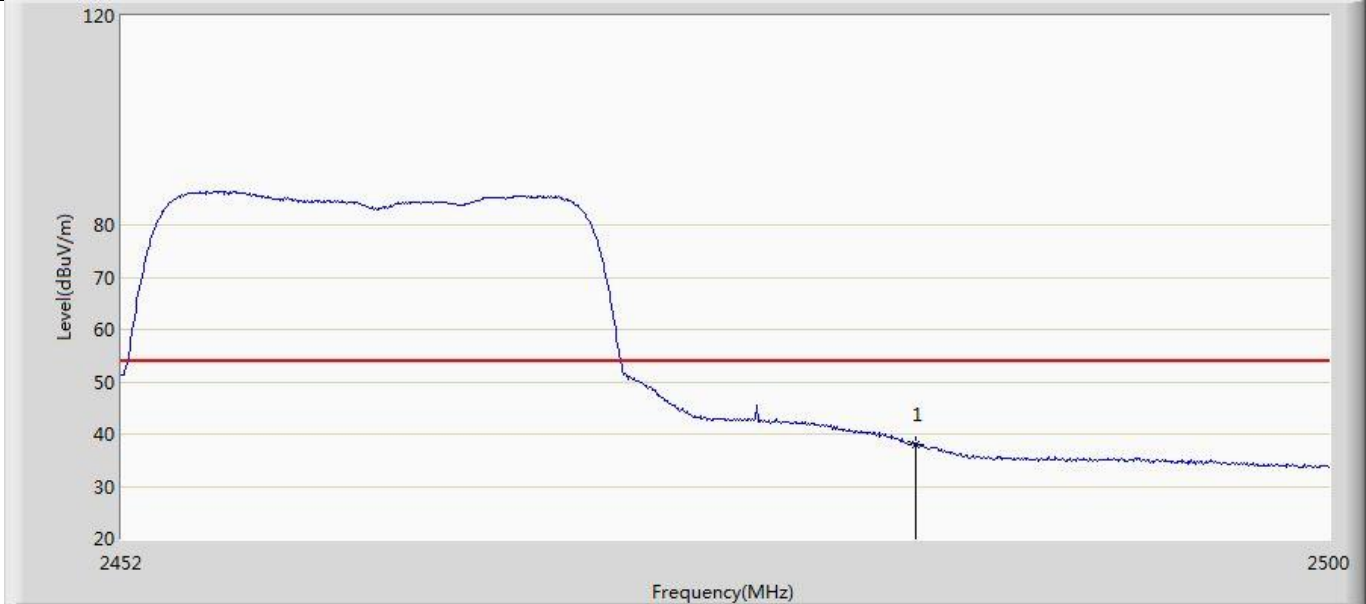


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2483.500	38.108	3.617	-15.892	54.000	34.491	AV

Profile: 2320056R	Page No.: 15
Engineer: Yu Liu	
Site: AC5	Time: 2023/02/13 - 21:50
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)2022	Polarity: Vertical
EUT: SC2124	Power: Battery
Note: Mode 2 : Transmit at 2462MHz by 802.11g	

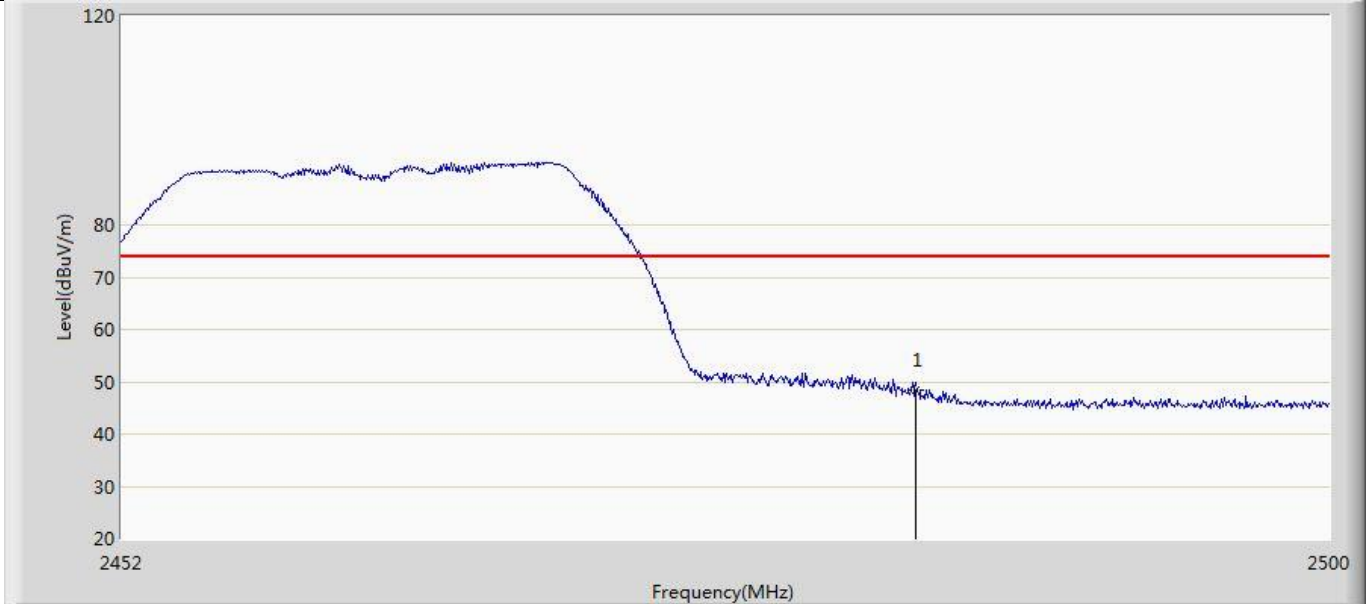


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2483.500	48.399	13.908	-25.601	74.000	34.491	PK

Profile: 2320056R	Page No.: 16
Engineer: Yu Liu	
Site: AC5	Time: 2023/02/13 - 21:51
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)2022	Polarity: Vertical
EUT: SC2124	Power: Battery
Note: Mode 2 : Transmit at 2462MHz by 802.11g	

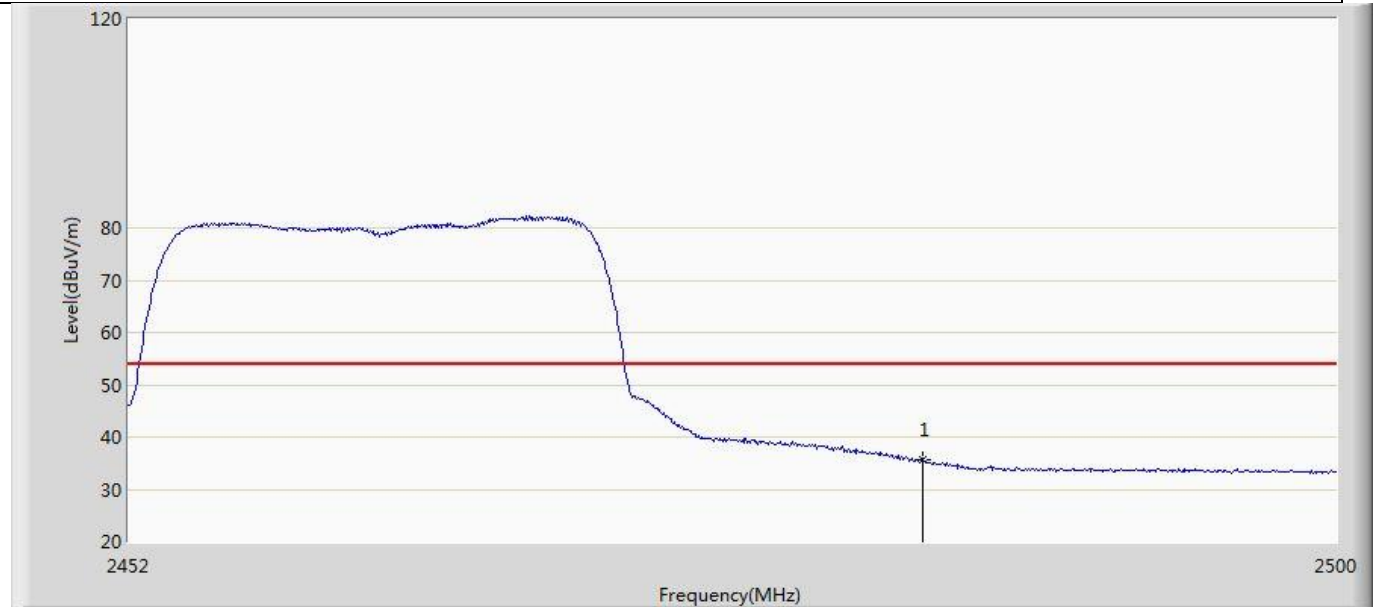


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2483.500	35.719	1.228	-18.281	54.000	34.491	AV

Profile: 2320056R	Page No.: 17
Engineer: Yu Liu	
Site: AC5	Time: 2023/02/13 - 21:52
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)2022	Polarity: Horizontal
EUT: SC2124	Power: Battery
Note: Mode 3 : Transmit at 2412MHz by 802.11n(20MHz)	

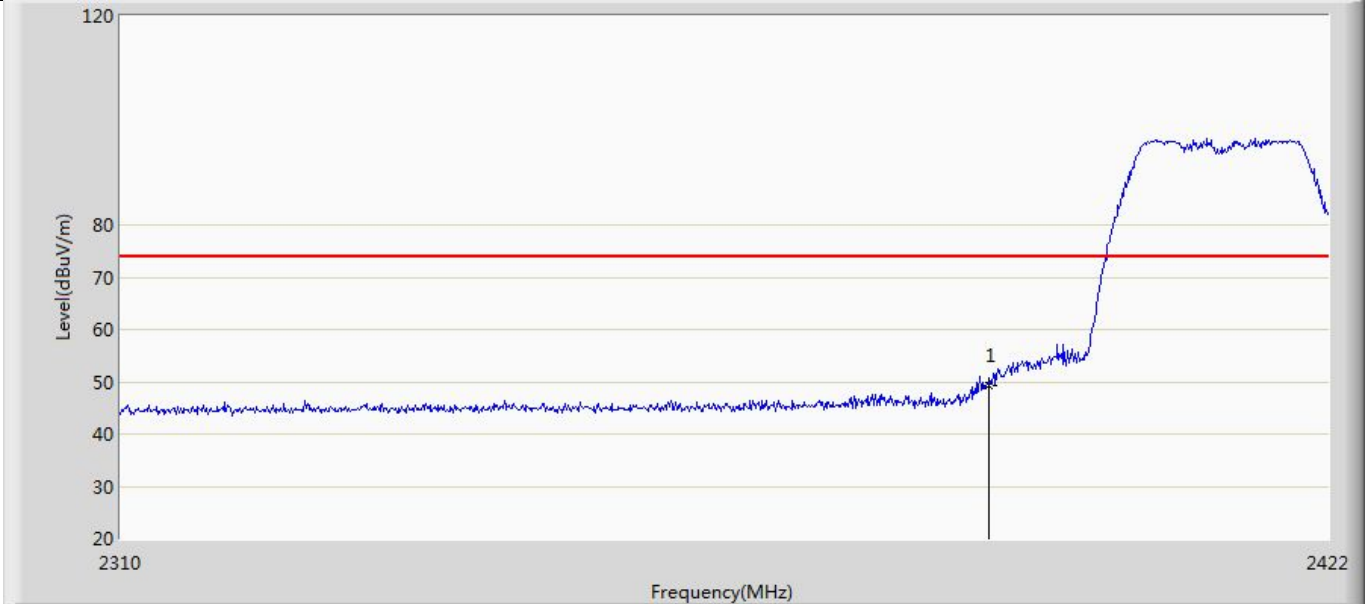


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2390.000	49.415	15.331	-24.585	74.000	34.084	PK

Profile: 2320056R	Page No.: 18
Engineer: Yu Liu	
Site: AC5	Time: 2023/02/13 - 21:54
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)2022	Polarity: Horizontal
EUT: SC2124	Power: Battery
Note: Mode 3 : Transmit at 2412MHz by 802.11n(20MHz)	

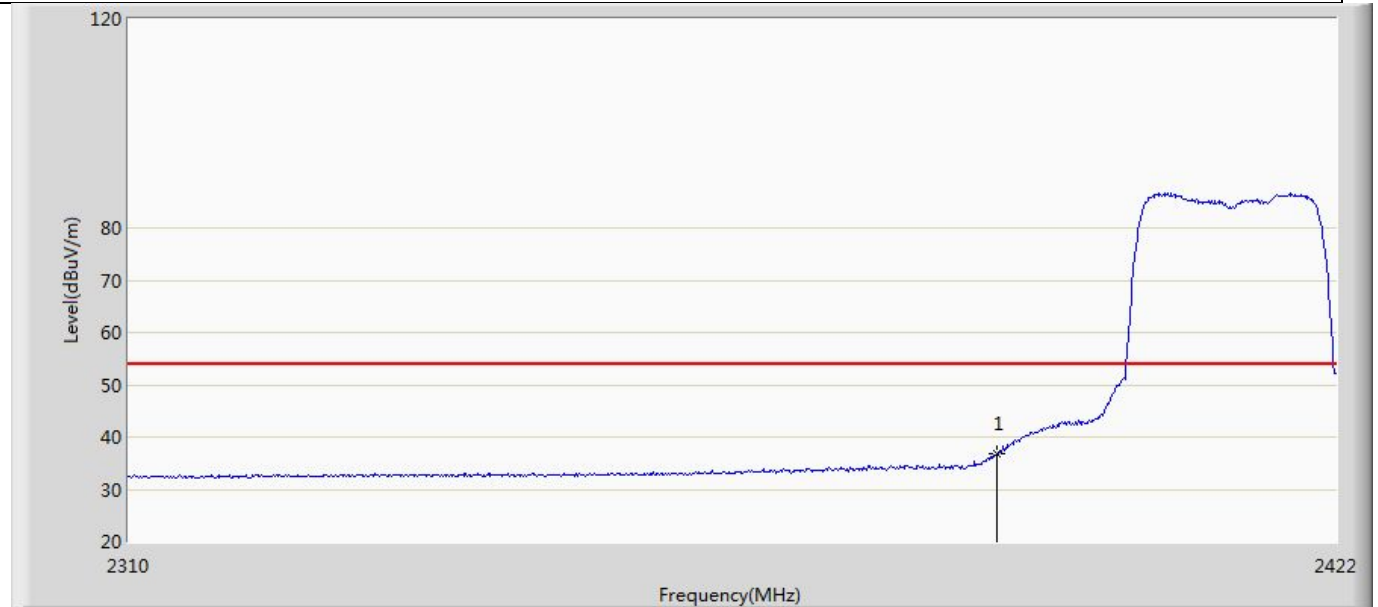


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2390.000	36.747	2.663	-17.253	54.000	34.084	AV

Profile: 2320056R	Page No.: 19
Engineer: Yu Liu	
Site: AC5	Time: 2023/02/13 - 21:55
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)2022	Polarity: Vertical
EUT: SC2124	Power: Battery
Note: Mode 3 : Transmit at 2412MHz by 802.11n(20MHz)	

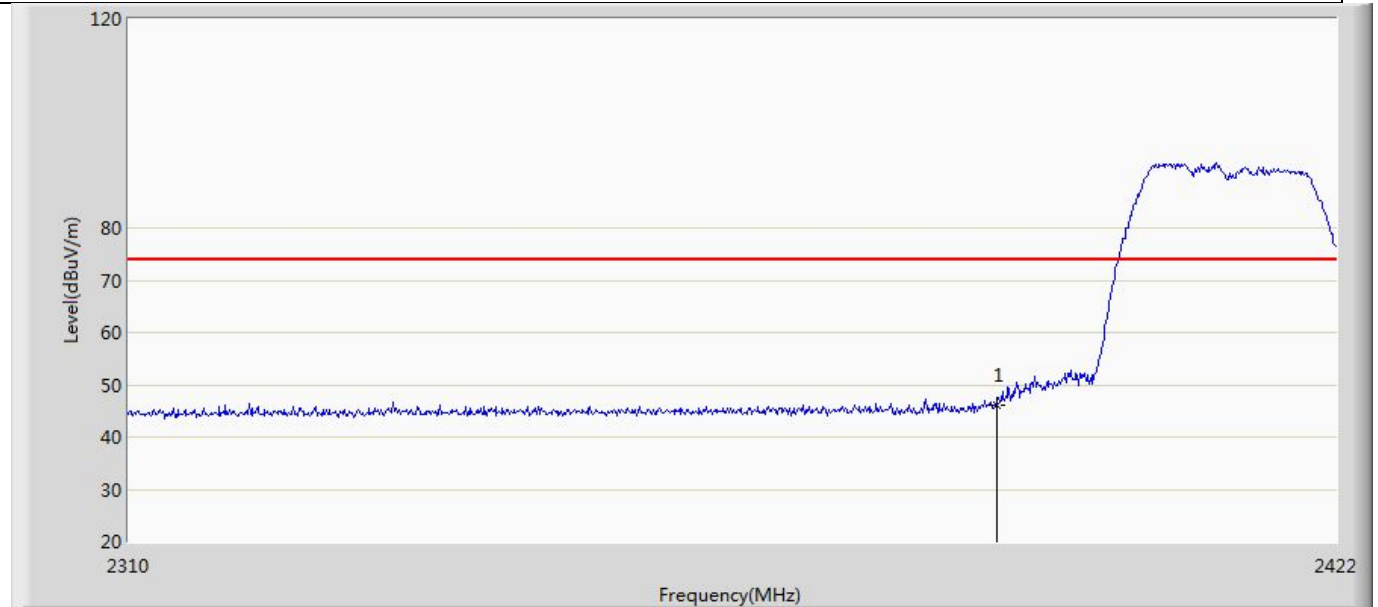

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2390.000	46.077	11.993	-27.923	74.000	34.084	PK


Profile: 2320056R	Page No.: 20
Engineer: Yu Liu	
Site: AC5	Time: 2023/02/13 - 21:56
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)2022	Polarity: Vertical
EUT: SC2124	Power: Battery
Note: Mode 3 : Transmit at 2412MHz by 802.11n(20MHz)	

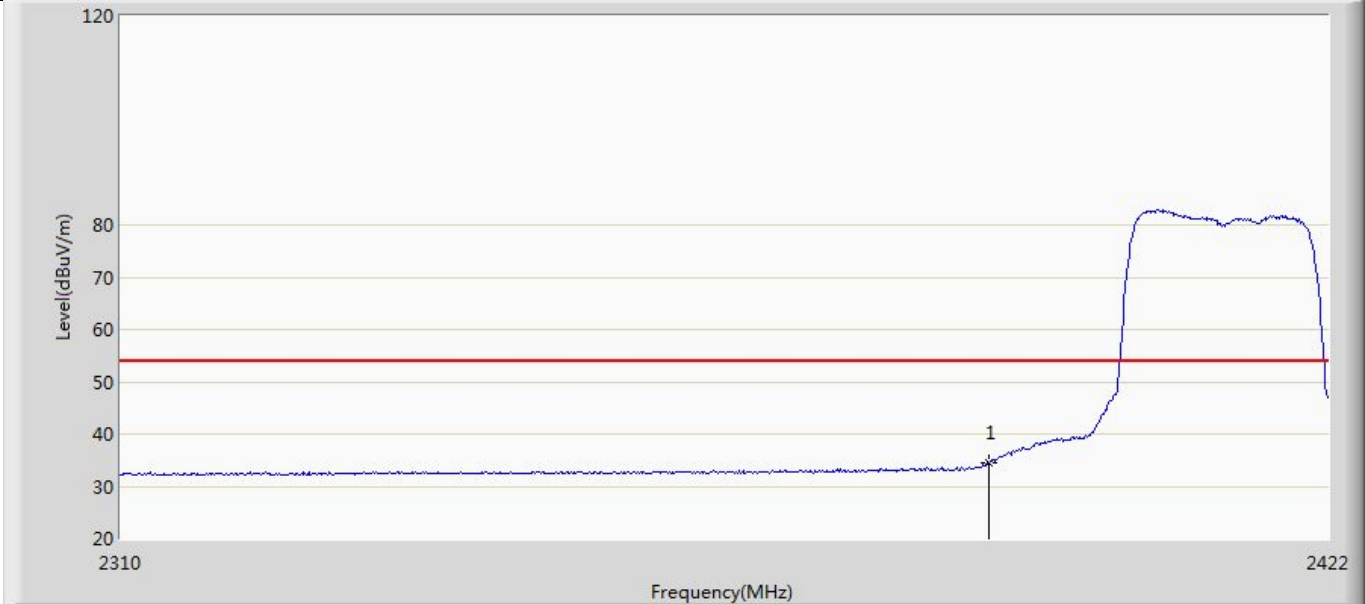

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2390.000	34.372	0.288	-19.628	54.000	34.084	AV




Profile: 2320056R	Page No.: 21
Engineer: Yu Liu	
Site: AC5	Time: 2023/02/13 - 21:57
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)2022	Polarity: Horizontal
EUT: SC2124	Power: Battery
Note: Mode 3 : Transmit at 2462MHz by 802.11n(20MHz)	

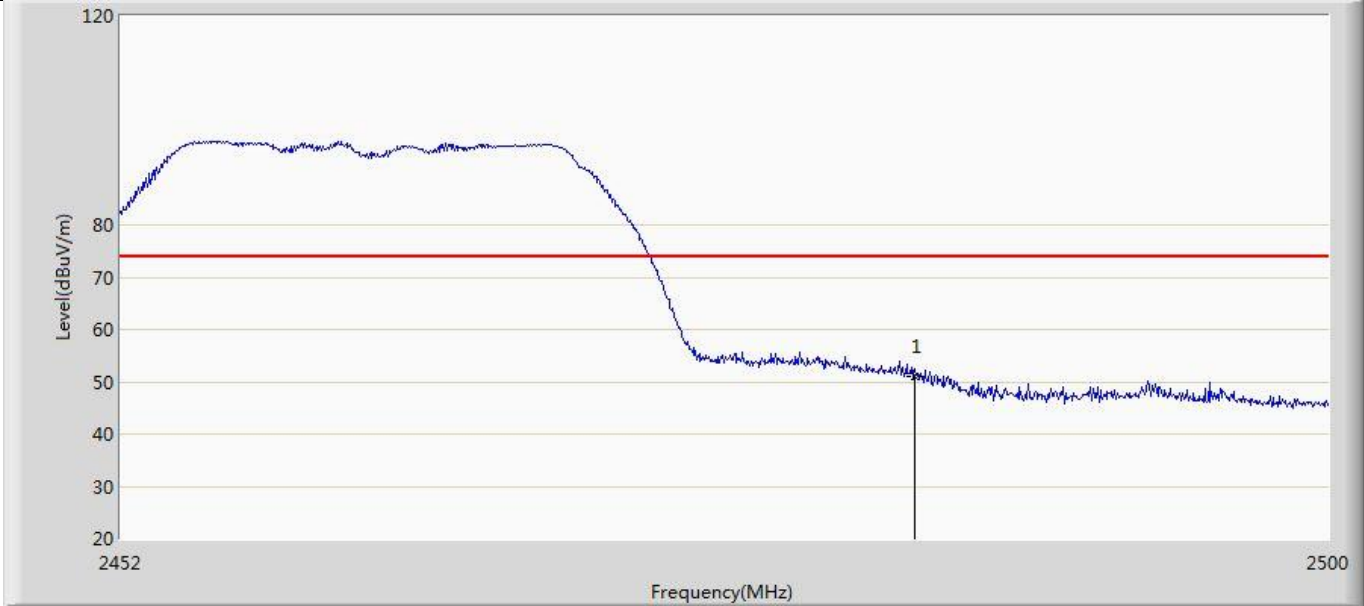

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2483.500	51.131	16.640	-22.869	74.000	34.491	PK


Profile: 2320056R	Page No.: 22
Engineer: Yu Liu	
Site: AC5	Time: 2023/02/13 - 21:58
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)2022	Polarity: Horizontal
EUT: SC2124	Power: Battery
Note: Mode 3 : Transmit at 2462MHz by 802.11n(20MHz)	

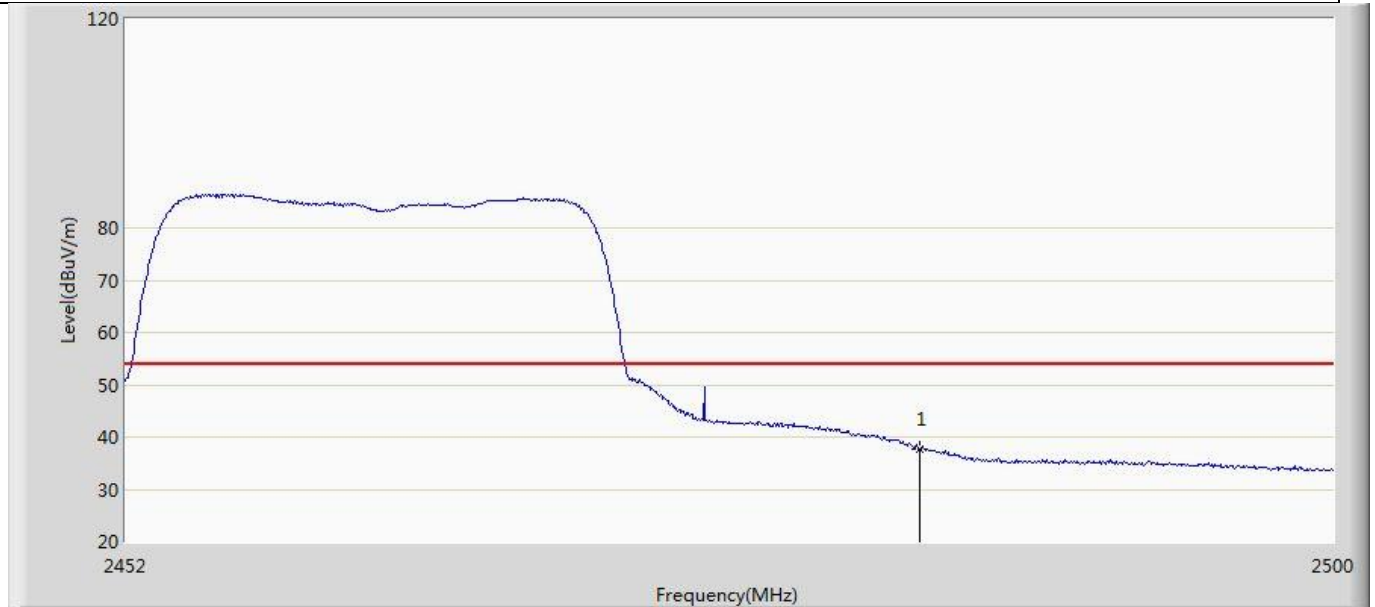

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2483.500	37.767	3.276	-16.233	54.000	34.491	AV




Profile: 2320056R	Page No.: 23
Engineer: Yu Liu	
Site: AC5	Time: 2023/02/13 - 22:00
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)2022	Polarity: Vertical
EUT: SC2124	Power: Battery
Note: Mode 3 : Transmit at 2462MHz by 802.11n(20MHz)	

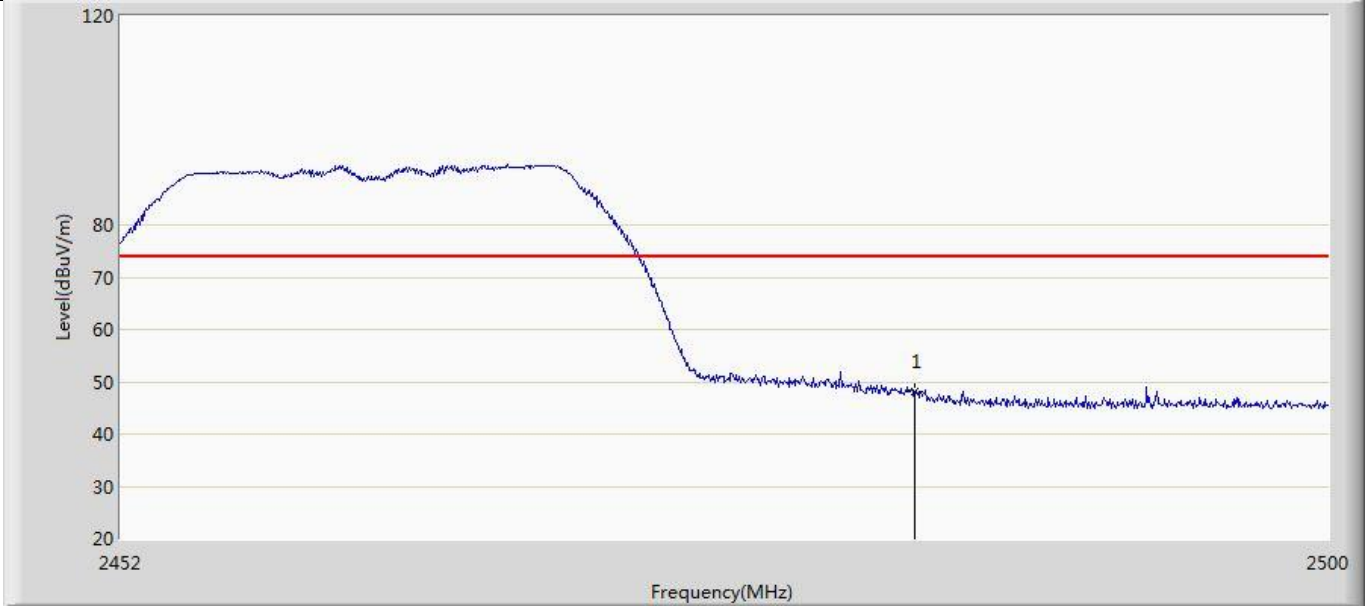

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2483.500	48.031	13.540	-25.969	74.000	34.491	PK

Profile: 2320056R	Page No.: 24
Engineer: Yu Liu	
Site: AC5	Time: 2023/02/13 - 22:01
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)2022	Polarity: Vertical
EUT: SC2124	Power: Battery
Note: Mode 3 : Transmit at 2462MHz by 802.11n(20MHz)	

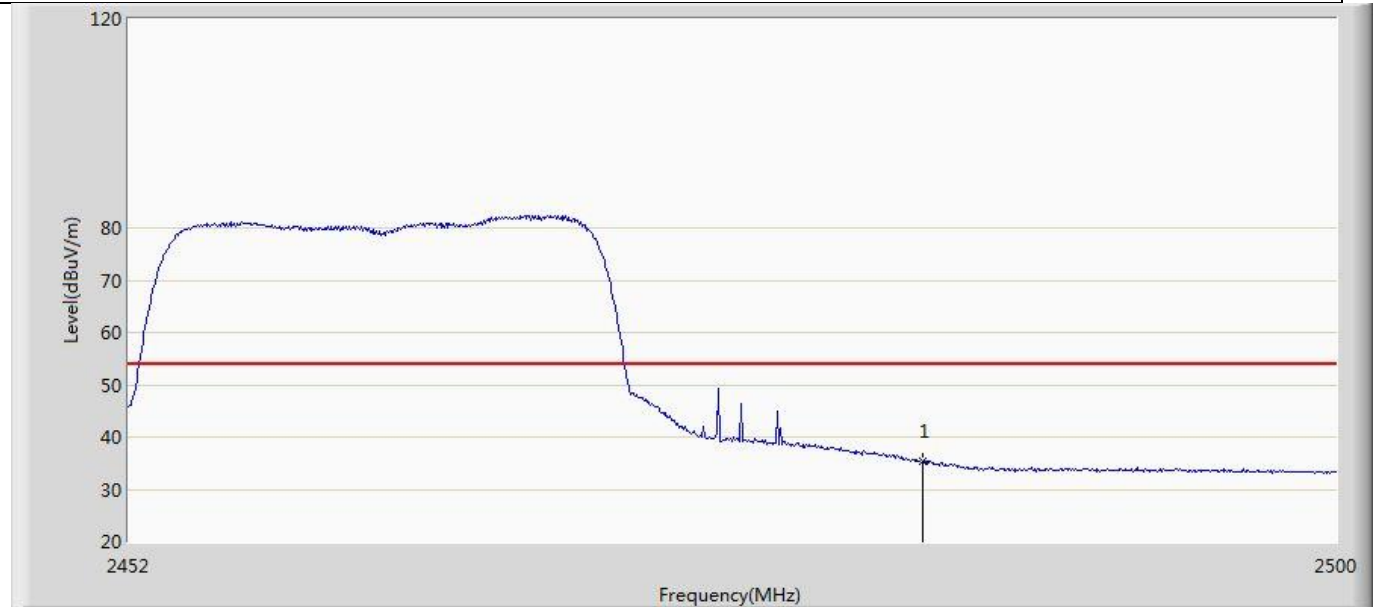

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2483.500	35.268	0.777	-18.732	54.000	34.491	AV

Note:

1. " * ", means this data is the worst emission level.
2. Measured Level = Reading Level + Factor.

Appendix F: Conducted Spurious Emission Test Result


Test Mode	Frequency[MHz]	FreqRange [Mhz]	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
Mode1	2412	Reference	4.81	4.81	---	PASS
		30~1000	4.81	-68.43	≤ -15.19	PASS
		2350~2422	4.81	-46.32	≤ -15.19	PASS
		1000~26500	4.81	-44.31	≤ -15.19	PASS
	2437	Reference	5.76	5.76	---	PASS
		30~1000	5.76	-68.81	≤ -14.24	PASS
		1000~26500	5.76	-44.34	≤ -14.24	PASS
	2462	Reference	5.07	5.07	---	PASS
		30~1000	5.07	-68.38	≤ -14.93	PASS
		2520~2600	5.07	-44.33	≤ -14.93	PASS
		1000~26500	5.07	-45.72	≤ -14.93	PASS
Mode2	2412	Reference	-2.54	-2.54	---	PASS
		30~1000	-2.54	-68.51	≤ -22.54	PASS
		2350~2422	-2.54	-48.42	≤ -22.54	PASS
		1000~26500	-2.54	-52.93	≤ -22.54	PASS
	2437	Reference	-2.66	-2.66	---	PASS
		30~1000	-2.66	-68.89	≤ -22.66	PASS
		1000~26500	-2.66	-52.68	≤ -22.66	PASS
	2462	Reference	-2.41	-2.41	---	PASS
		30~1000	-2.41	-69.13	≤ -22.41	PASS
		2520~2600	-2.41	-46.55	≤ -22.41	PASS
		1000~26500	-2.41	-53.29	≤ -22.41	PASS
Mode3	2412	Reference	-4.27	-4.27	---	PASS
		30~1000	-4.27	-68.44	≤ -24.27	PASS
		2350~2422	-4.27	-48.09	≤ -24.27	PASS
		1000~26500	-4.27	-53.14	≤ -24.27	PASS
	2437	Reference	-3.66	-3.66	---	PASS
		30~1000	-3.66	-68.95	≤ -23.66	PASS
		1000~26500	-3.66	-52.52	≤ -23.66	PASS
	2462	Reference	-1.65	-1.65	---	PASS
		30~1000	-1.65	-68.9	≤ -21.65	PASS
		2520~2600	-1.65	-47.25	≤ -21.65	PASS
		1000~26500	-1.65	-53.48	≤ -21.65	PASS

Test Graphs

Mode1_2412_0~Reference




Mode1_2412_30~1000

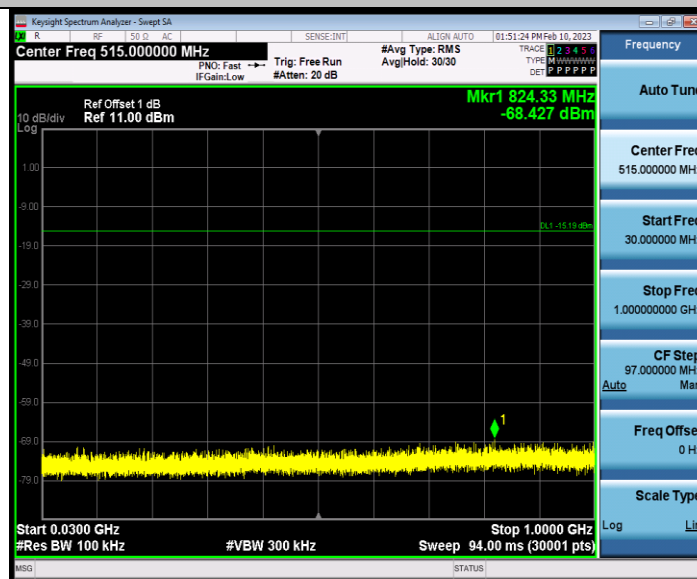

Mode1_2412_2350~2422




Mode1_2412_1000~26500

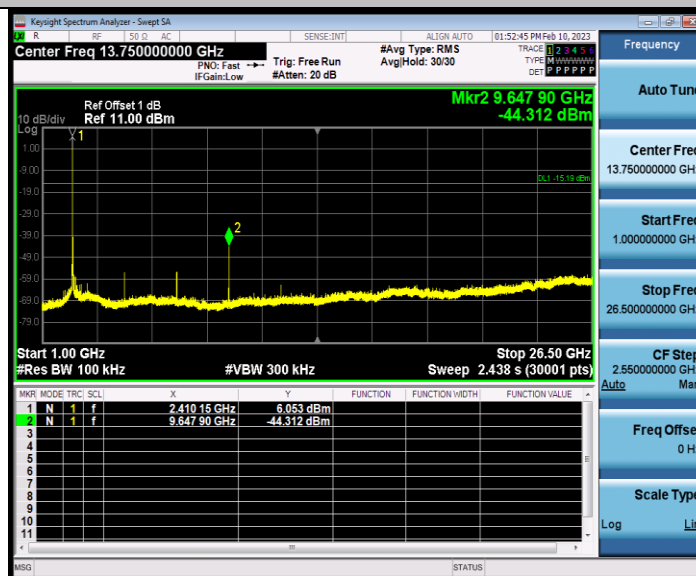


Mode1_2437_0~Reference



Mode1_2437_30~1000

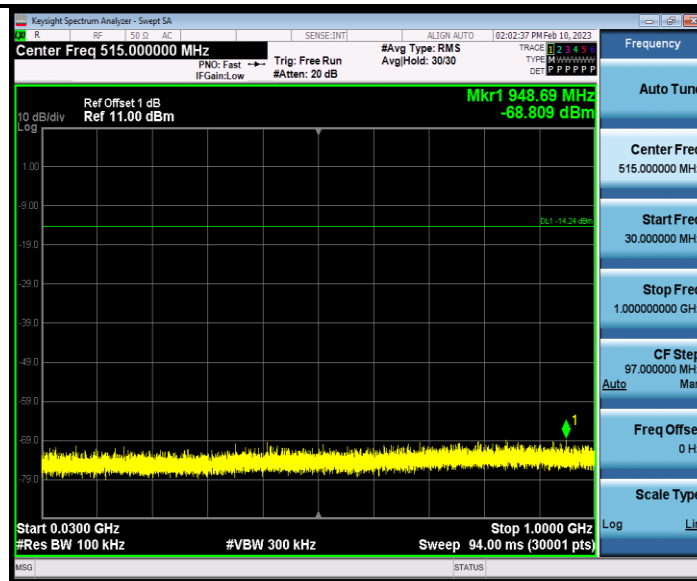

Mode1_2437_1000~26500

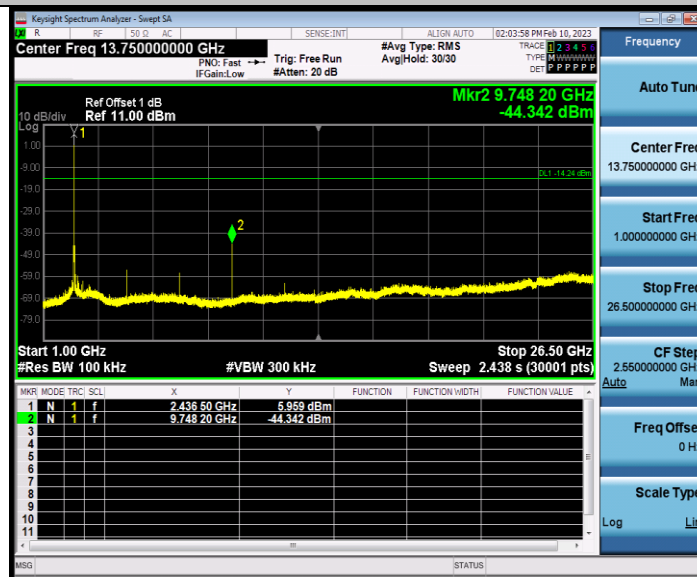

Mode1_2462_0~Reference

