

## 7.4. TEST RESULTS

(9KHz-30MHz)

Temperature:	22.7°C	Relative Humidity:	61%
Test Voltage:	AC 120V/60Hz	Test Mode:	802.11b

Freq.	Reading	Limit	Margin	State	Test Result
(MHz)	(dBuV/m)	(dBuV/m)	(dB)	P/F	
--	--	--	--	--	PASS
--	--	--	--	--	PASS

### Note:


The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor =  $40 \log (\text{specific distance/test distance})$ (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.

(30MHz-1000MHz)

Temperature:	24.7°C	Relative Humidity:	61%
Test Voltage:	AC 120V/60Hz	Phase:	Horizontal
Test Mode:	802.11b(worst)		

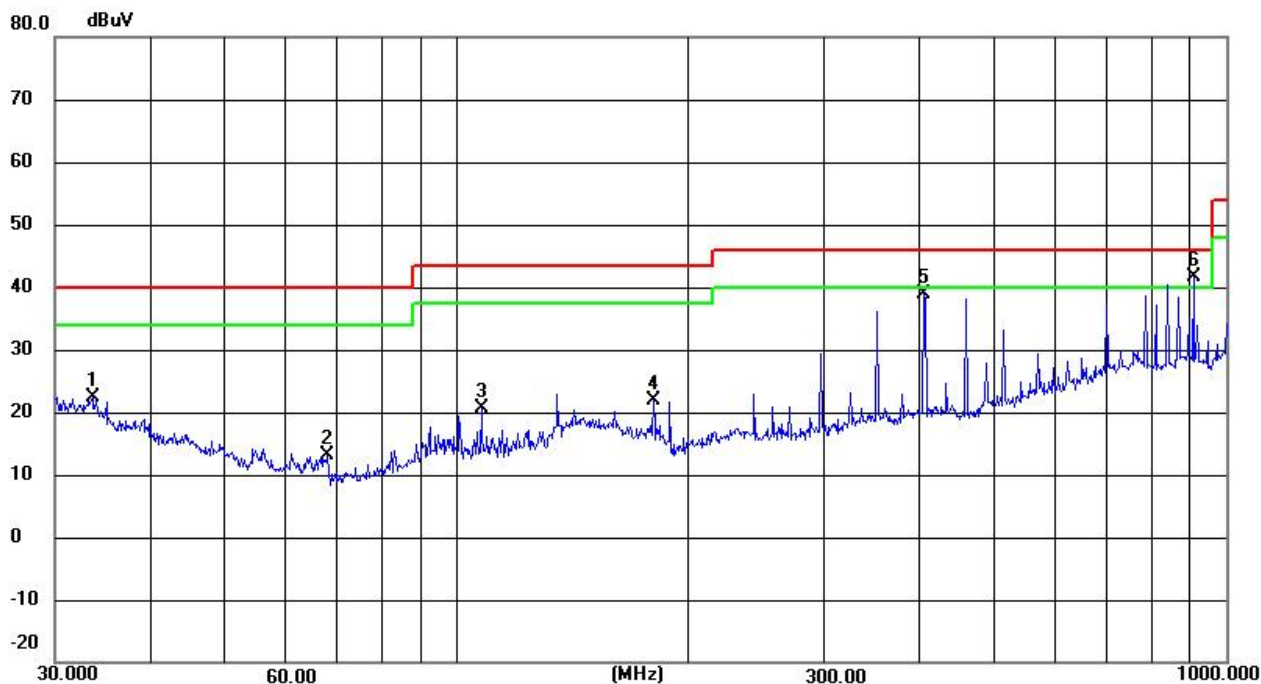


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	33.5623	31.94	-9.50	22.44	40.00	-17.56	QP
2	67.9128	32.92	-19.91	13.01	40.00	-26.99	QP
3	107.5100	52.82	-32.19	20.63	43.50	-22.87	QP
4	180.0164	53.89	-32.08	21.81	43.50	-21.69	QP
5	404.6664	70.40	-31.59	38.81	46.00	-7.19	QP
6	906.4823	72.42	-30.69	41.73	46.00	-4.27	QP

Note: 1. Margin = Result (Result = Reading + Factor) - Limit

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

Temperature:	22.7°C	Relative Humidity:	61%
Test Voltage:	AC 120V/60Hz	Phase:	Vertical
Test Mode:	802.11b(worst)		

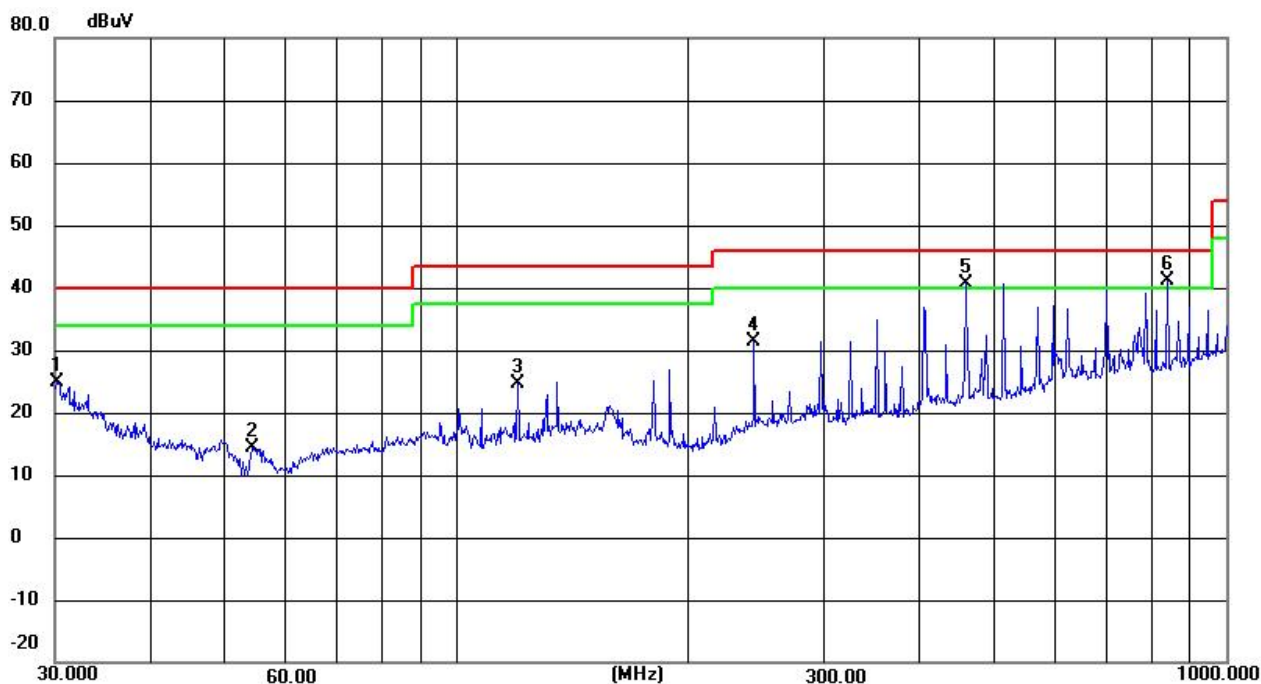

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	30.2110	32.22	-7.30	24.92	40.00	-15.08	QP
2	54.2610	33.56	-19.13	14.43	40.00	-25.57	QP
3	119.8555	56.75	-32.17	24.58	43.50	-18.92	QP
4	243.3771	63.38	-31.98	31.40	46.00	-14.60	QP
5	459.1143	71.93	-31.42	40.51	46.00	-5.49	QP
6	839.1817	72.00	-30.76	41.24	46.00	-4.76	QP

Note: 1. Margin = Result (Result =Reading + Factor )-Limit

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

## (1GHz~25GHz) Restricted band and Spurious emission Requirements

## 802.11b(Worst)-Low

**Peak value:**

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4824.00	36.26	31.79	8.62	32.10	44.57	74.00	-29.43	Vertical
7236.00	31.67	36.19	11.68	31.97	47.57	74.00	-26.43	Vertical
9648.00	30.89	38.07	14.16	31.56	51.56	74.00	-22.44	Vertical
12060.00	*					74.00		Vertical
14472.00	*					74.00		Vertical
16884.00	*					74.00		Vertical
4824.00	35.56	31.79	8.62	32.10	43.87	74.00	-30.13	Horizontal
7236.00	31.74	36.19	11.68	31.97	47.64	74.00	-26.36	Horizontal
9648.00	30.61	38.07	14.16	31.56	51.28	74.00	-22.72	Horizontal
12060.00	*					74.00		Horizontal
14472.00	*					74.00		Horizontal
16884.00	*					74.00		Horizontal

**Average value:**

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4824.00	25.66	31.79	8.62	32.10	33.97	54.00	-20.03	Vertical
7236.00	20.63	36.19	11.68	31.97	36.53	54.00	-17.47	Vertical
9648.00	21.31	38.07	14.16	31.56	41.98	54.00	-12.02	Vertical
12060.00	*					54.00		Vertical
14472.00	*					54.00		Vertical
16884.00	*					54.00		Vertical
4824.00	25.31	31.79	8.62	32.10	33.62	54.00	-20.38	Horizontal
7236.00	20.39	36.19	11.68	31.97	36.29	54.00	-17.71	Horizontal
9648.00	20.42	38.07	14.16	31.56	41.09	54.00	-12.91	Horizontal
12060.00	*					54.00		Horizontal
14472.00	*					54.00		Horizontal
16884.00	*					54.00		Horizontal

## 802.11b(Worst)-Middle

**Peak value:**

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4874.00	36.02	31.85	8.66	32.12	44.41	74.00	-29.59	Vertical
7311.00	32.18	36.37	11.71	31.91	48.35	74.00	-25.65	Vertical
9748.00	32.23	38.27	14.25	31.56	53.19	74.00	-20.81	Vertical
12185.00	*					74.00		Vertical
14622.00	*					74.00		Vertical
17059.00	*					74.00		Vertical
4874.00	37.02	31.85	8.66	32.12	45.41	74.00	-28.59	Horizontal
7311.00	31.09	36.37	11.71	31.91	47.26	74.00	-26.74	Horizontal
9748.00	32.23	38.27	14.25	31.56	53.19	74.00	-20.81	Horizontal
12185.00	*					74.00		Horizontal
14622.00	*					74.00		Horizontal
17059.00	*					74.00		Horizontal

**Average value:**

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4874.00	27.13	31.85	8.66	32.12	35.52	54.00	-18.48	Vertical
7311.00	20.57	36.37	11.71	31.91	36.74	54.00	-17.26	Vertical
9748.00	21.54	38.27	14.25	31.56	42.50	54.00	-11.50	Vertical
12185.00	*					54.00		Vertical
14622.00	*					54.00		Vertical
17059.00	*					54.00		Vertical
4874.00	27.30	31.85	8.66	32.12	35.69	54.00	-18.31	Horizontal
7311.00	20.23	36.37	11.71	31.91	36.40	54.00	-17.60	Horizontal
9748.00	22.00	38.27	14.25	31.56	42.96	54.00	-11.04	Horizontal
12185.00	*					54.00		Horizontal
14622.00	*					54.00		Horizontal
17059.00	*					54.00		Horizontal

## 802.11b(Worst)-High

**Peak value:**

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4924.00	39.14	31.90	8.70	32.15	47.59	74.00	-26.41	Vertical
7386.00	31.33	36.49	11.76	31.83	47.75	74.00	-26.25	Vertical
9848.00	34.43	38.62	14.31	31.77	55.59	74.00	-18.41	Vertical
12310.00	*					74.00		Vertical
14772.00	*					74.00		Vertical
17234.00	*					74.00		Vertical
4924.00	39.34	31.90	8.70	32.15	47.79	74.00	-26.21	Horizontal
7386.00	30.69	36.49	11.76	31.83	47.11	74.00	-26.89	Horizontal
9848.00	30.80	38.62	14.31	31.77	51.96	74.00	-22.04	Horizontal
12310.00	*					74.00		Horizontal
14772.00	*					74.00		Horizontal
17234.00	*					74.00		Horizontal

**Average value:**

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4924.00	30.50	31.90	8.70	32.15	38.95	54.00	-15.05	Vertical
7386.00	21.38	36.49	11.76	31.83	37.80	54.00	-16.20	Vertical
9848.00	23.04	38.62	14.31	31.77	44.20	54.00	-9.80	Vertical
12310.00	*					54.00		Vertical
14772.00	*					54.00		Vertical
17234.00	*					54.00		Vertical
4924.00	30.00	31.90	8.70	32.15	38.45	54.00	-15.55	Horizontal
7386.00	20.18	36.49	11.76	31.83	36.60	54.00	-17.40	Horizontal
9848.00	20.15	38.62	14.31	31.77	41.31	54.00	-12.69	Horizontal
12310.00	*					54.00		Horizontal
14772.00	*					54.00		Horizontal
17234.00	*					54.00		Horizontal

**Remark:**

1. Final Level =Receiver Read level + Antenna Factor + Cable Loss- Preamplifier Factor
2. The amplitude of spurious emissions which are attenuated more than 20 dB below the limits are not reported.
3. "\*", means this data is the too weak instrument of signal is unable to test.

## Radiated Band Edge data

802.11 b low CH

### Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2390.00	48.89	27.59	5.38	34.01	47.85	74.00	-26.15	Horizontal
2400.00	54.73	27.58	5.39	34.01	53.69	74.00	-20.31	Horizontal
2390.00	47.76	27.59	5.38	34.01	46.72	74.00	-27.28	Vertical
2400.00	51.59	27.58	5.39	34.01	50.55	74.00	-23.45	Vertical

### Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2390.00	37.90	27.59	5.38	34.01	36.86	54.00	-17.14	Horizontal
2400.00	43.82	27.58	5.39	34.01	42.78	54.00	-11.22	Horizontal
2390.00	36.12	27.59	5.38	34.01	35.08	54.00	-18.92	Vertical
2400.00	40.68	27.58	5.39	34.01	39.64	54.00	-14.36	Vertical

802.11 b High CH

### Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	48.23	27.53	5.47	33.92	47.31	74.00	-26.69	Horizontal
2500.00	45.87	27.55	5.49	29.93	48.98	74.00	-25.02	Horizontal
2483.50	47.68	27.53	5.47	33.92	46.76	74.00	-27.24	Vertical
2500.00	44.05	27.55	5.49	29.93	47.16	74.00	-26.84	Vertical

### Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	37.14	27.53	5.47	33.92	36.22	54.00	-17.78	Horizontal
2500.00	34.14	27.55	5.49	29.93	37.25	54.00	-16.75	Horizontal
2483.50	35.29	27.53	5.47	33.92	34.37	54.00	-19.63	Vertical
2500.00	32.40	27.55	5.49	29.93	35.51	54.00	-18.49	Vertical

## 802.11 g Low CH

**Peak value:**

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2390.00	61.94	27.59	5.38	34.01	60.90	74.00	-13.10	Horizontal
2400.00	70.56	27.58	5.39	34.01	69.52	74.00	-4.48	Horizontal
2390.00	58.19	27.59	5.38	34.01	57.15	74.00	-16.85	Vertical
2400.00	67.21	27.58	5.39	34.01	66.17	74.00	-7.83	Vertical

**Average value:**

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2390.00	44.24	27.59	5.38	34.01	43.20	54.00	-10.80	Horizontal
2400.00	50.90	27.58	5.39	34.01	49.86	54.00	-4.14	Horizontal
2390.00	41.78	27.59	5.38	34.01	40.74	54.00	-13.26	Vertical
2400.00	47.82	27.58	5.39	34.01	46.78	54.00	-7.22	Vertical

## 802.11 g High CH

**Peak value:**

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	53.82	27.53	5.47	33.92	52.90	74.00	-21.10	Horizontal
2500.00	47.07	27.55	5.49	29.93	50.18	74.00	-23.82	Horizontal
2483.50	48.91	27.53	5.47	33.92	47.99	74.00	-26.01	Vertical
2500.00	45.36	27.55	5.49	29.93	48.47	74.00	-25.53	Vertical

**Average value:**

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	36.70	27.53	5.47	33.92	35.78	54.00	-18.22	Horizontal
2500.00	34.80	27.55	5.49	29.93	37.91	54.00	-16.09	Horizontal
2483.50	35.25	27.53	5.47	33.92	34.33	54.00	-19.67	Vertical
2500.00	33.11	27.55	5.49	29.93	36.22	54.00	-17.78	Vertical

## 802.11 N 20 Low CH

**Peak value:**

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2390.00	61.98	27.59	5.38	34.01	60.94	74.00	-13.06	Horizontal
2400.00	72.50	27.58	5.39	34.01	71.46	74.00	-2.54	Horizontal
2390.00	57.89	27.59	5.38	34.01	56.85	74.00	-17.15	Vertical
2400.00	68.39	27.58	5.39	34.01	67.35	74.00	-6.65	Vertical

**Average value:**

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2390.00	46.17	27.59	5.38	34.01	45.13	54.00	-8.87	Horizontal
2400.00	51.36	27.58	5.39	34.01	50.32	54.00	-3.68	Horizontal
2390.00	42.53	27.59	5.38	34.01	41.49	54.00	-12.51	Vertical
2400.00	47.69	27.58	5.39	34.01	46.65	54.00	-7.35	Vertical

## 802.11 N 20 High CH

**Peak value:**

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	52.73	27.53	5.47	33.92	51.81	74.00	-22.19	Horizontal
2500.00	47.15	27.55	5.49	29.93	50.26	74.00	-23.74	Horizontal
2483.50	48.88	27.53	5.47	33.92	47.96	74.00	-26.04	Vertical
2500.00	45.26	27.55	5.49	29.93	48.37	74.00	-25.63	Vertical

**Average value:**

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	36.68	27.53	5.47	33.92	35.76	54.00	-18.24	Horizontal
2500.00	34.84	27.55	5.49	29.93	37.95	54.00	-16.05	Horizontal
2483.50	35.51	27.53	5.47	33.92	34.59	54.00	-19.41	Vertical
2500.00	33.13	27.55	5.49	29.93	36.24	54.00	-17.76	Vertical

**Remark.**

- 1.Final Level =Receiver Read level + Antenna Factor + Cable Loss - Preamplifier Factor
- 2.The amplitude of spurious emissions which are attenuated more than 20 dB below the limits are not reported.

## 8. CONDUCTED EMISSION MEASUREMENT

### 8.1 LIMIT

Operating frequency band. In case the emission fall within the restricted band specified on Part 207(a) limit in the table below has to be followed.

FREQUENCY (MHz)	Conducted Emissionlimit (dBuV)	
	Quasi-peak	Average
0.15 -0.5	66 - 56 *	56 - 46 *
0.50 -5.0	56.00	46.00
5.0 -30.0	60.00	50.00

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " \* " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.


### 8.2 TEST PROCEDURE

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

- a. The EUT was 0.8 meters from the horizontal ground plane and 0.4 meters from the vertical ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

### 8.3 TEST SETUP

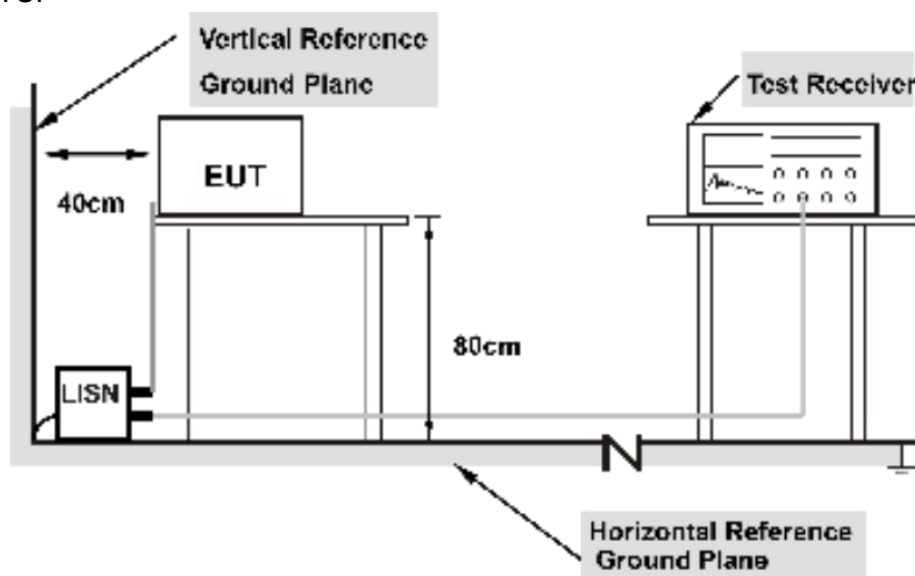


Note: 1.Support units were connected to second LISN.

2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes


## 8.4 TEST RESULTS

Temperature:	25℃	Relative Humidity:	50%
Test Mode:	802.11b(worst)	Test Voltage:	AC 120V/60Hz
Result:	L	Result:	Pass

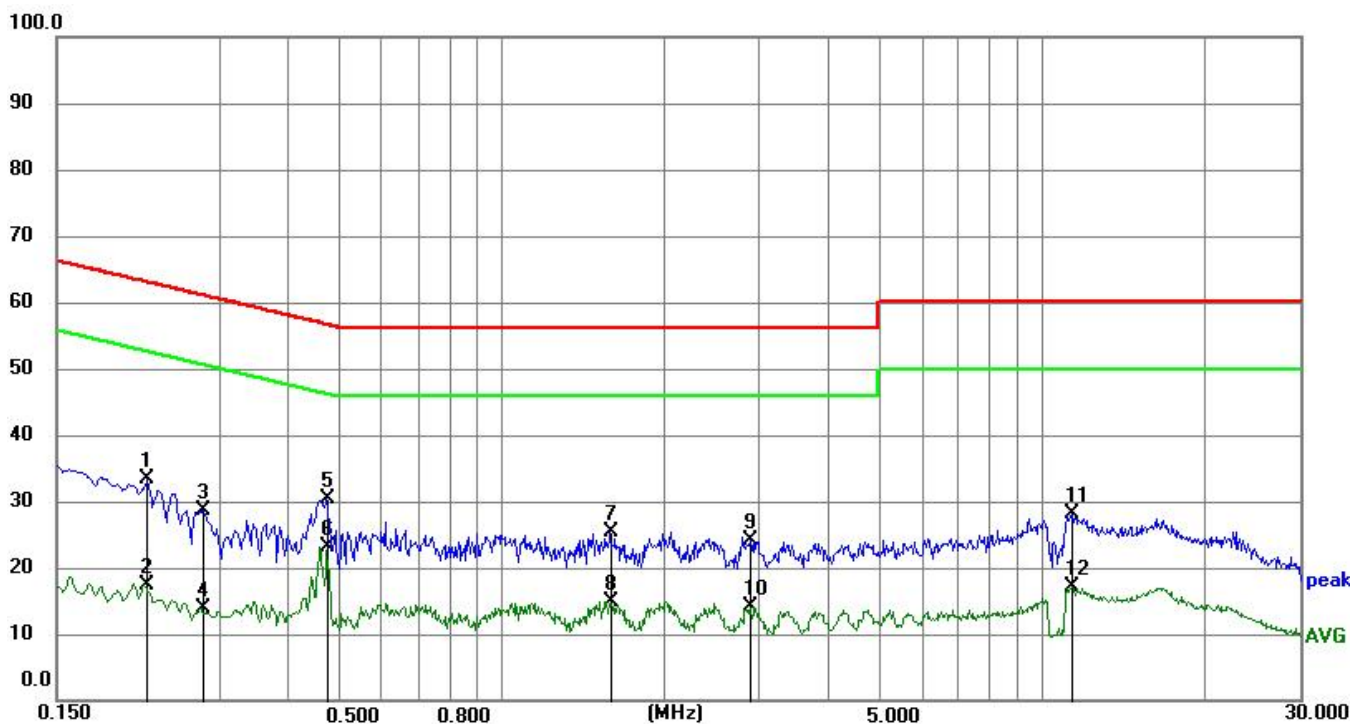

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.2220	23.38	10.07	33.45	62.74	29.29	QP
2	0.2220	7.29	10.07	17.36	52.74	35.38	AVG
3	0.2805	18.61	10.03	28.64	60.80	32.16	QP
4	0.2805	3.95	10.03	13.98	50.80	36.82	AVG
5	0.4740	20.41	10.02	30.43	56.44	26.01	QP
6	0.4740	13.04	10.02	23.06	46.44	23.38	AVG
7	1.5854	15.38	9.98	25.36	56.00	30.64	QP
8	1.5854	4.97	9.98	14.95	46.00	31.05	AVG
9	2.8995	14.08	9.94	24.02	56.00	31.98	QP
10	2.8995	4.19	9.94	14.13	46.00	31.87	AVG
11	11.4045	18.31	9.80	28.11	60.00	31.89	QP
12	11.4045	7.40	9.80	17.20	50.00	32.80	AVG

Temperature:	25°C	Relative Humidity:	50%
Test Mode:	802.11b(worst)	Test Voltage:	AC 120V/60Hz
Result:	N	Result:	Pass

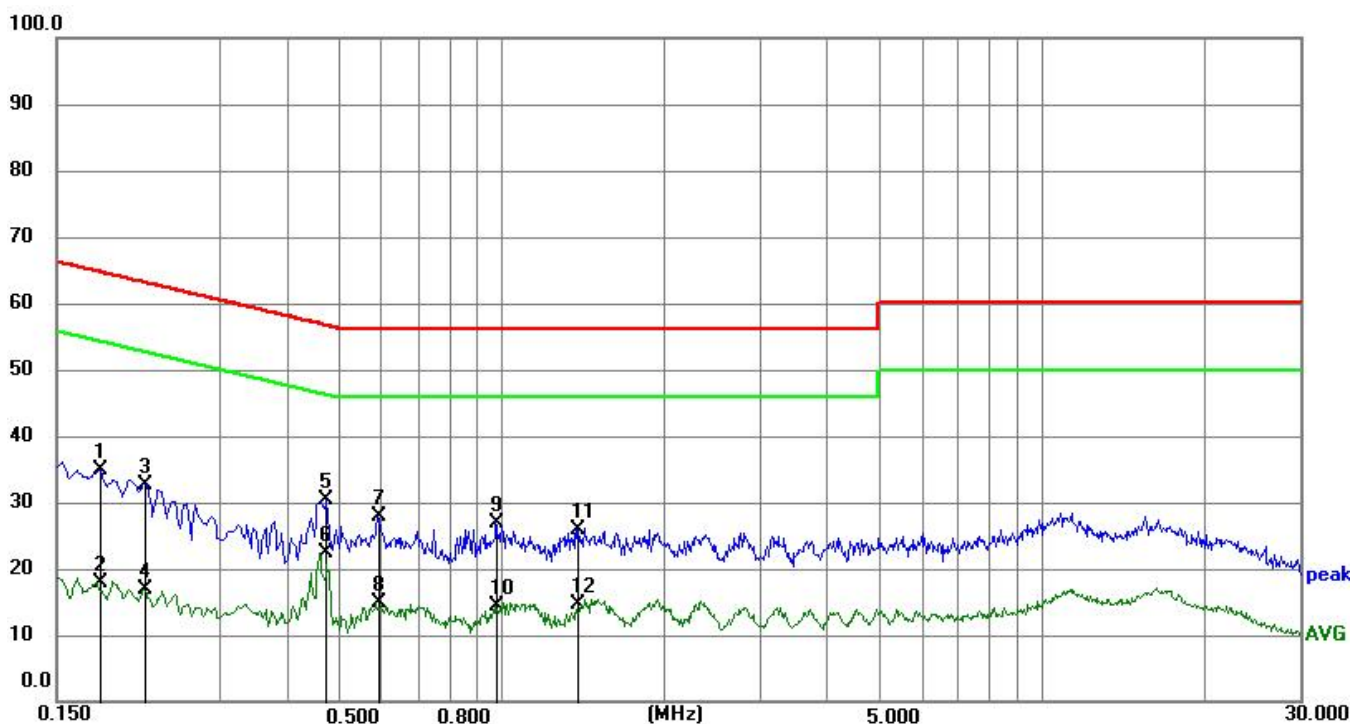

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1815	24.78	10.06	34.84	64.42	29.58	QP
2	0.1815	7.90	10.06	17.96	54.42	36.46	AVG
3	0.2185	22.70	10.05	32.75	62.88	30.13	QP
4	0.2185	6.91	10.05	16.96	52.88	35.92	AVG
5	0.4740	20.29	10.01	30.30	56.44	26.14	QP
6	0.4740	12.30	10.01	22.31	46.44	24.13	AVG
7	0.5910	17.84	10.00	27.84	56.00	28.16	QP
8	0.5910	4.77	10.00	14.77	46.00	31.23	AVG
9	0.9780	17.01	9.99	27.00	56.00	29.00	QP
10	0.9780	4.28	9.99	14.27	46.00	31.73	AVG
11	1.3785	15.95	9.98	25.93	56.00	30.07	QP
12	1.3785	4.60	9.98	14.58	46.00	31.42	AVG

Remark:

1. All readings are Quasi-Peak and Average values
2. During the test, pre-scan all modes, only the worst case is recorded in the report. AC conducted emission pre-test at both at AC 120V/60Hz and AC 240V/60Hz modes, recorded worst case AC 120V/60Hz.

## 9. ANTENNA REQUIREMENT

### 9.1 STANDARD REQUIREMENT

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

### 9.2 RESULT

The antennas used for this product are PCB antenna antenna and other than that furnished by the responsible party shall be used with the device, the maximum peak gain of the transmit antenna is 1.73dBi.

\*\*\*\*\*END OF THE REPORT\*\*\*\*\*