



© 2022 GALLAGHER
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF
GALLAGHER GROUP LTD. ANY REPRODUCTION IN PART OR WHOLE WITHOUT
THE WRITTEN PERMISSION OF GALLAGHER GROUP LTD IS PROHIBITED.

Current Rating - 250mA Continuous and
450mA Peak


A

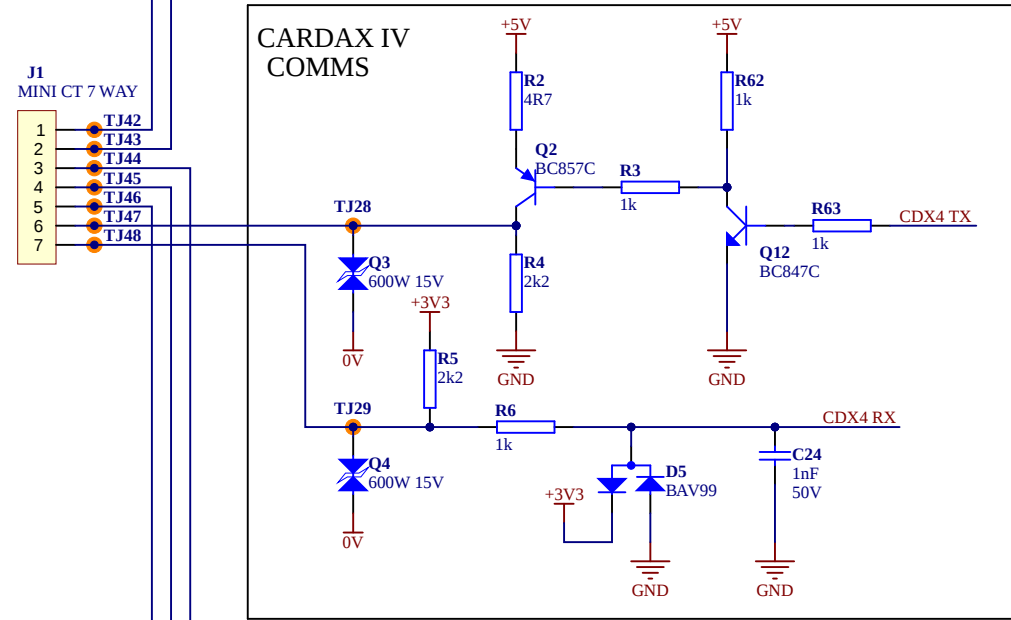


B

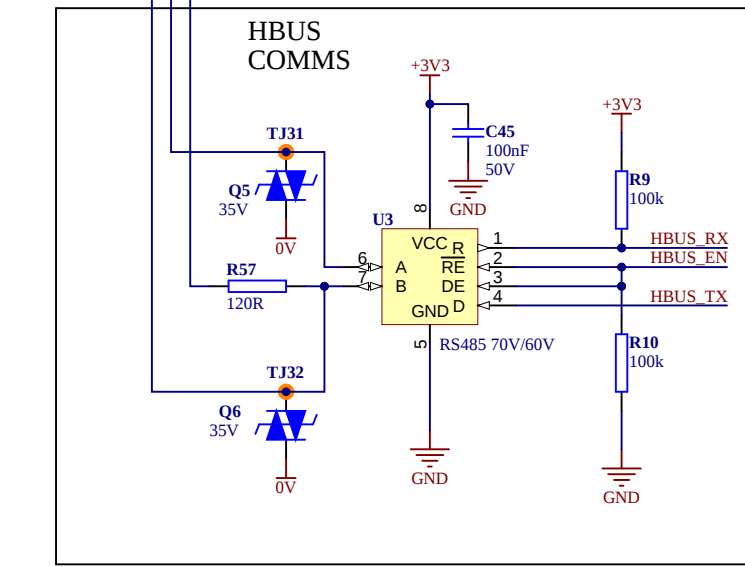


C

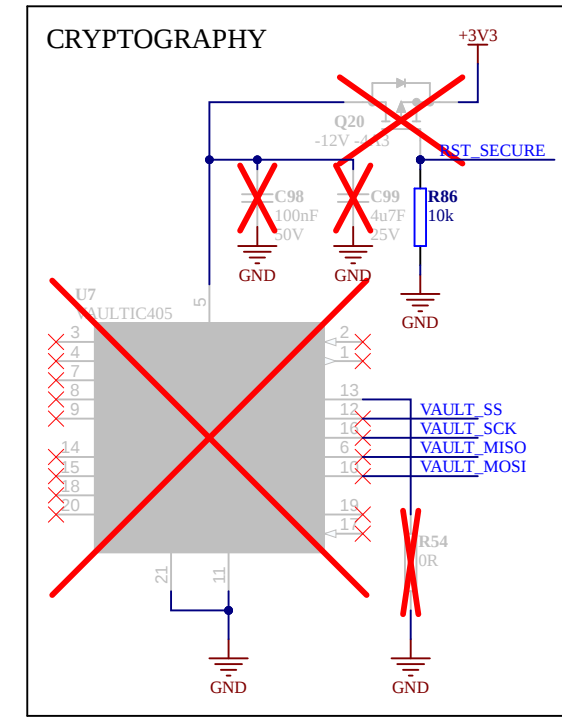


D

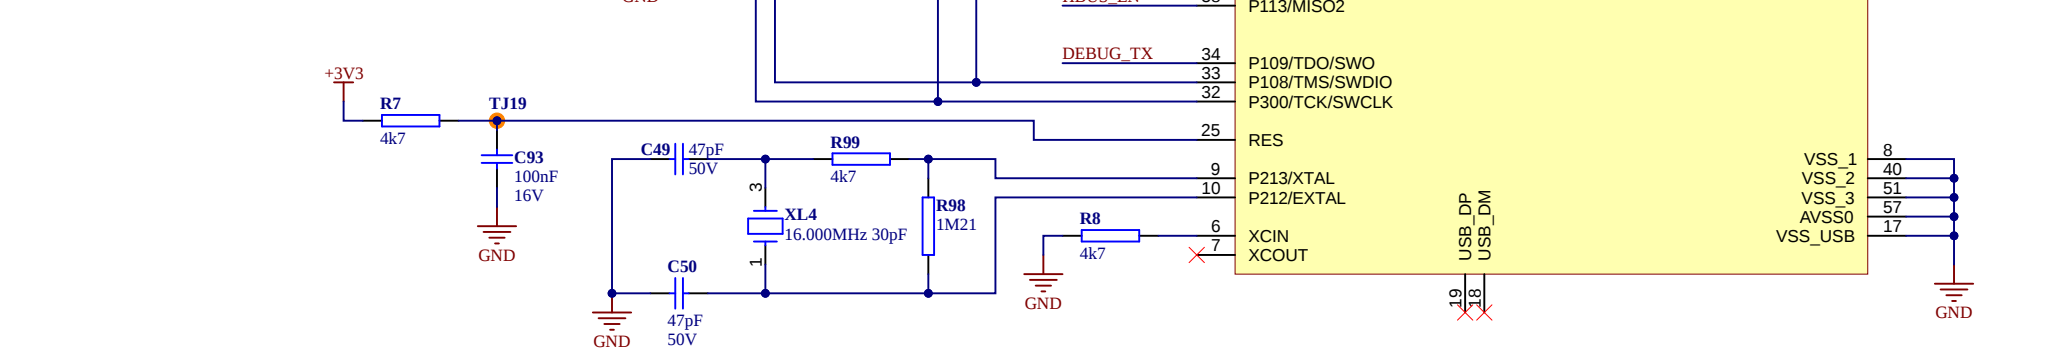


+3V3 Switchmode

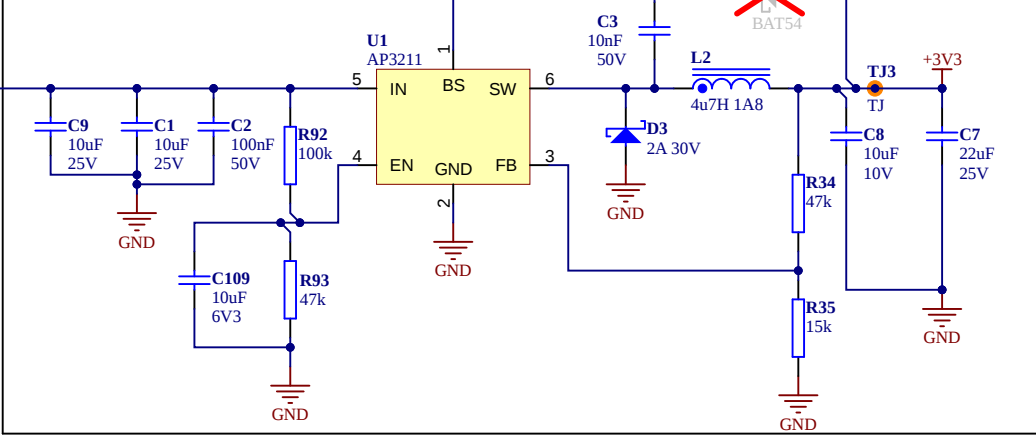


+5V Linear

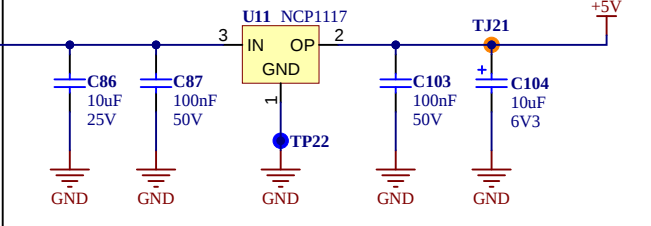


MIFARE

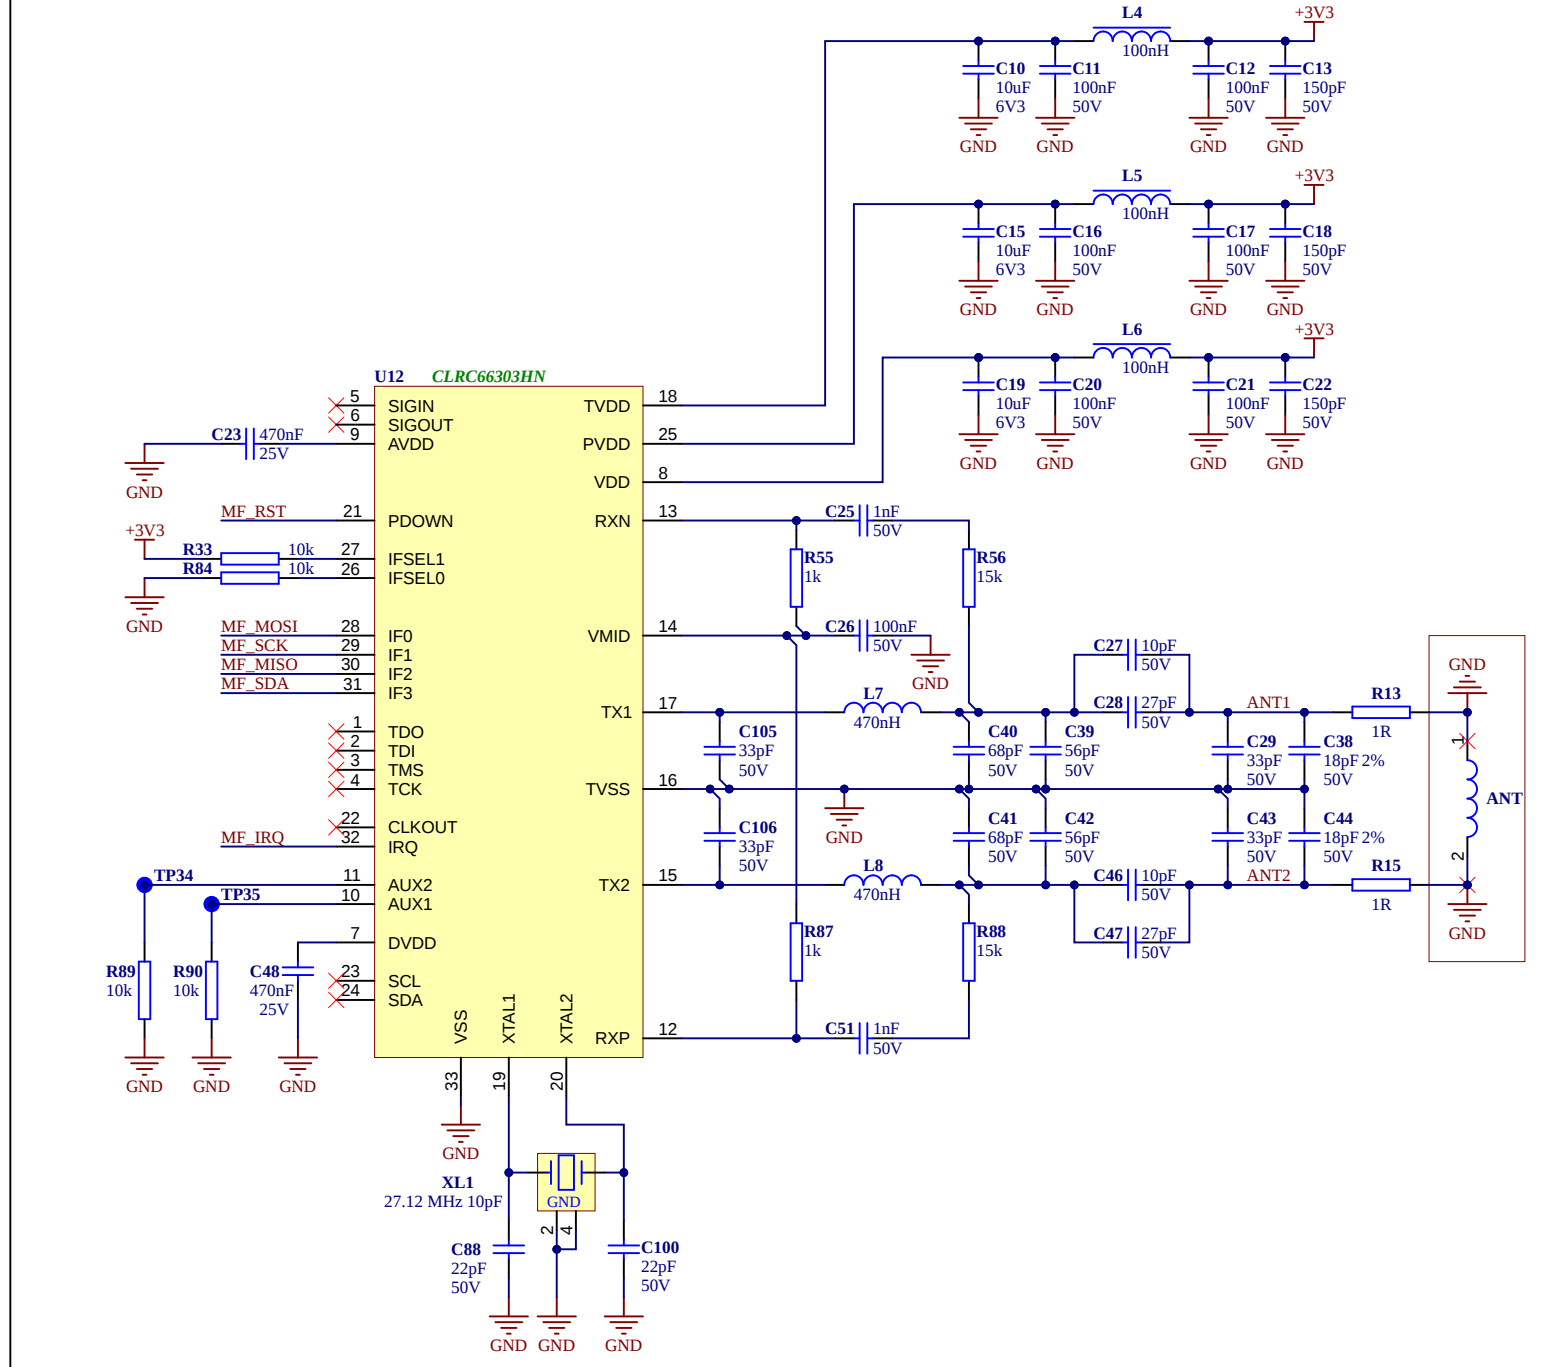

LEDS

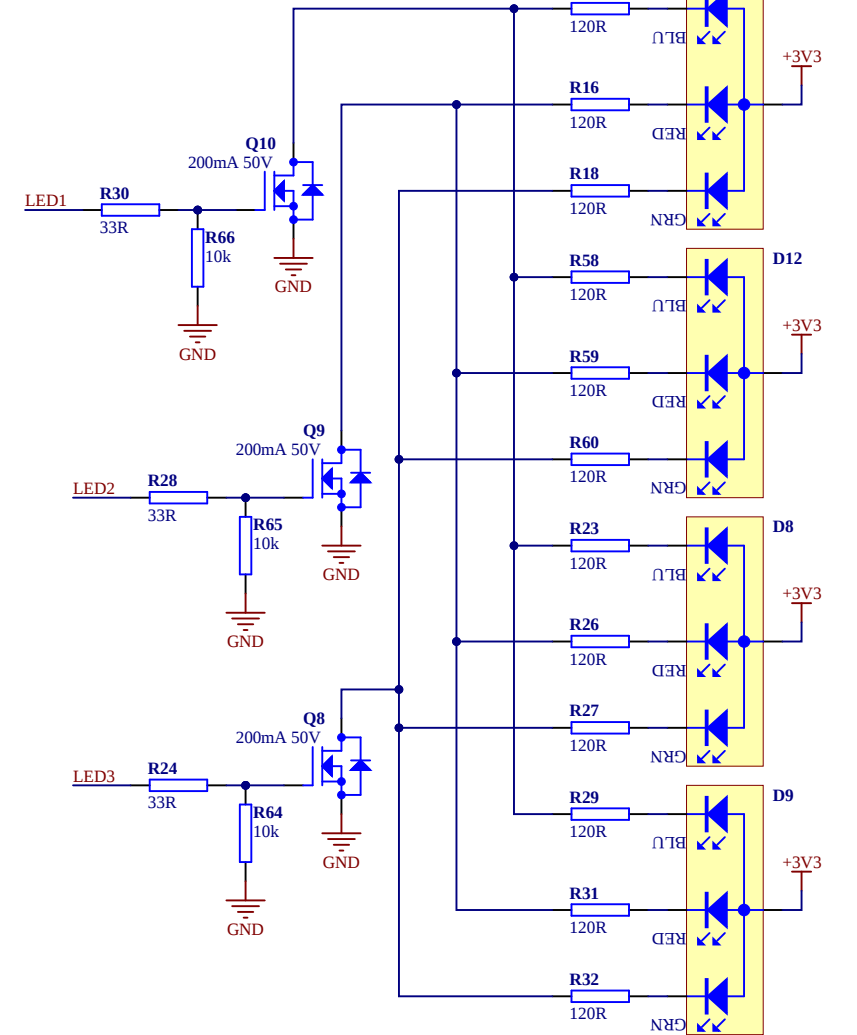

GPIO

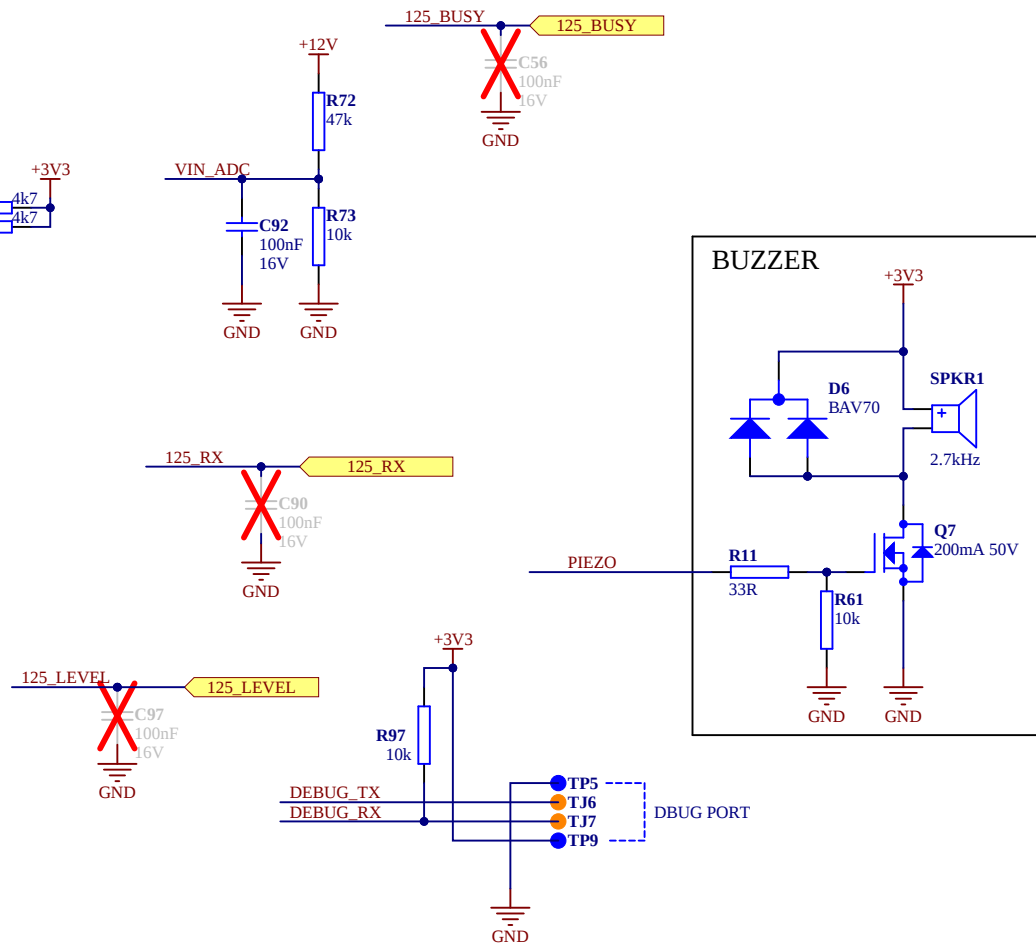

Revision History		
Rev	Description	Date
A	Bluetooth module change	07 DEC 2012
B	U12 MIFARE 2G1226S to 2G1315S for 2A0771LF-3, 2A0788LF-2	03 AUG 2022
C	Improving the Mifare Read Range after potting.	29 AUG 2022

Cannot open file C:\Users\EilynC\Gallagher Group Ltd\R&D Design Services Team-NZ-ORG - GALLAGHER GROUP LIMITED 181 Kaitiaki Drive Hamilton 3206, New Zealand.		Title: T11 Reader Renesas MIFARE and Control 2A0788LF-2 T11 MIFARE RENESAS	
PCB No: 2M8377.3	Date: 29/08/2022	Time: 1:17:08 pm	Sch Rev: C Size: A3 Sheet 1 of 2

Revision History		
Rev	Description	Date
A	Bluetooth module change	07 DEC 2012
B	U12 MIFARE 2G1226S to 2G1315S for 2A0771LF-3, 2A0788LF-2	03 AUG 2022
C	Improving the Mifare Read Range after potting.	29 AUG 2022

A

B

C


D

A

B

C

D

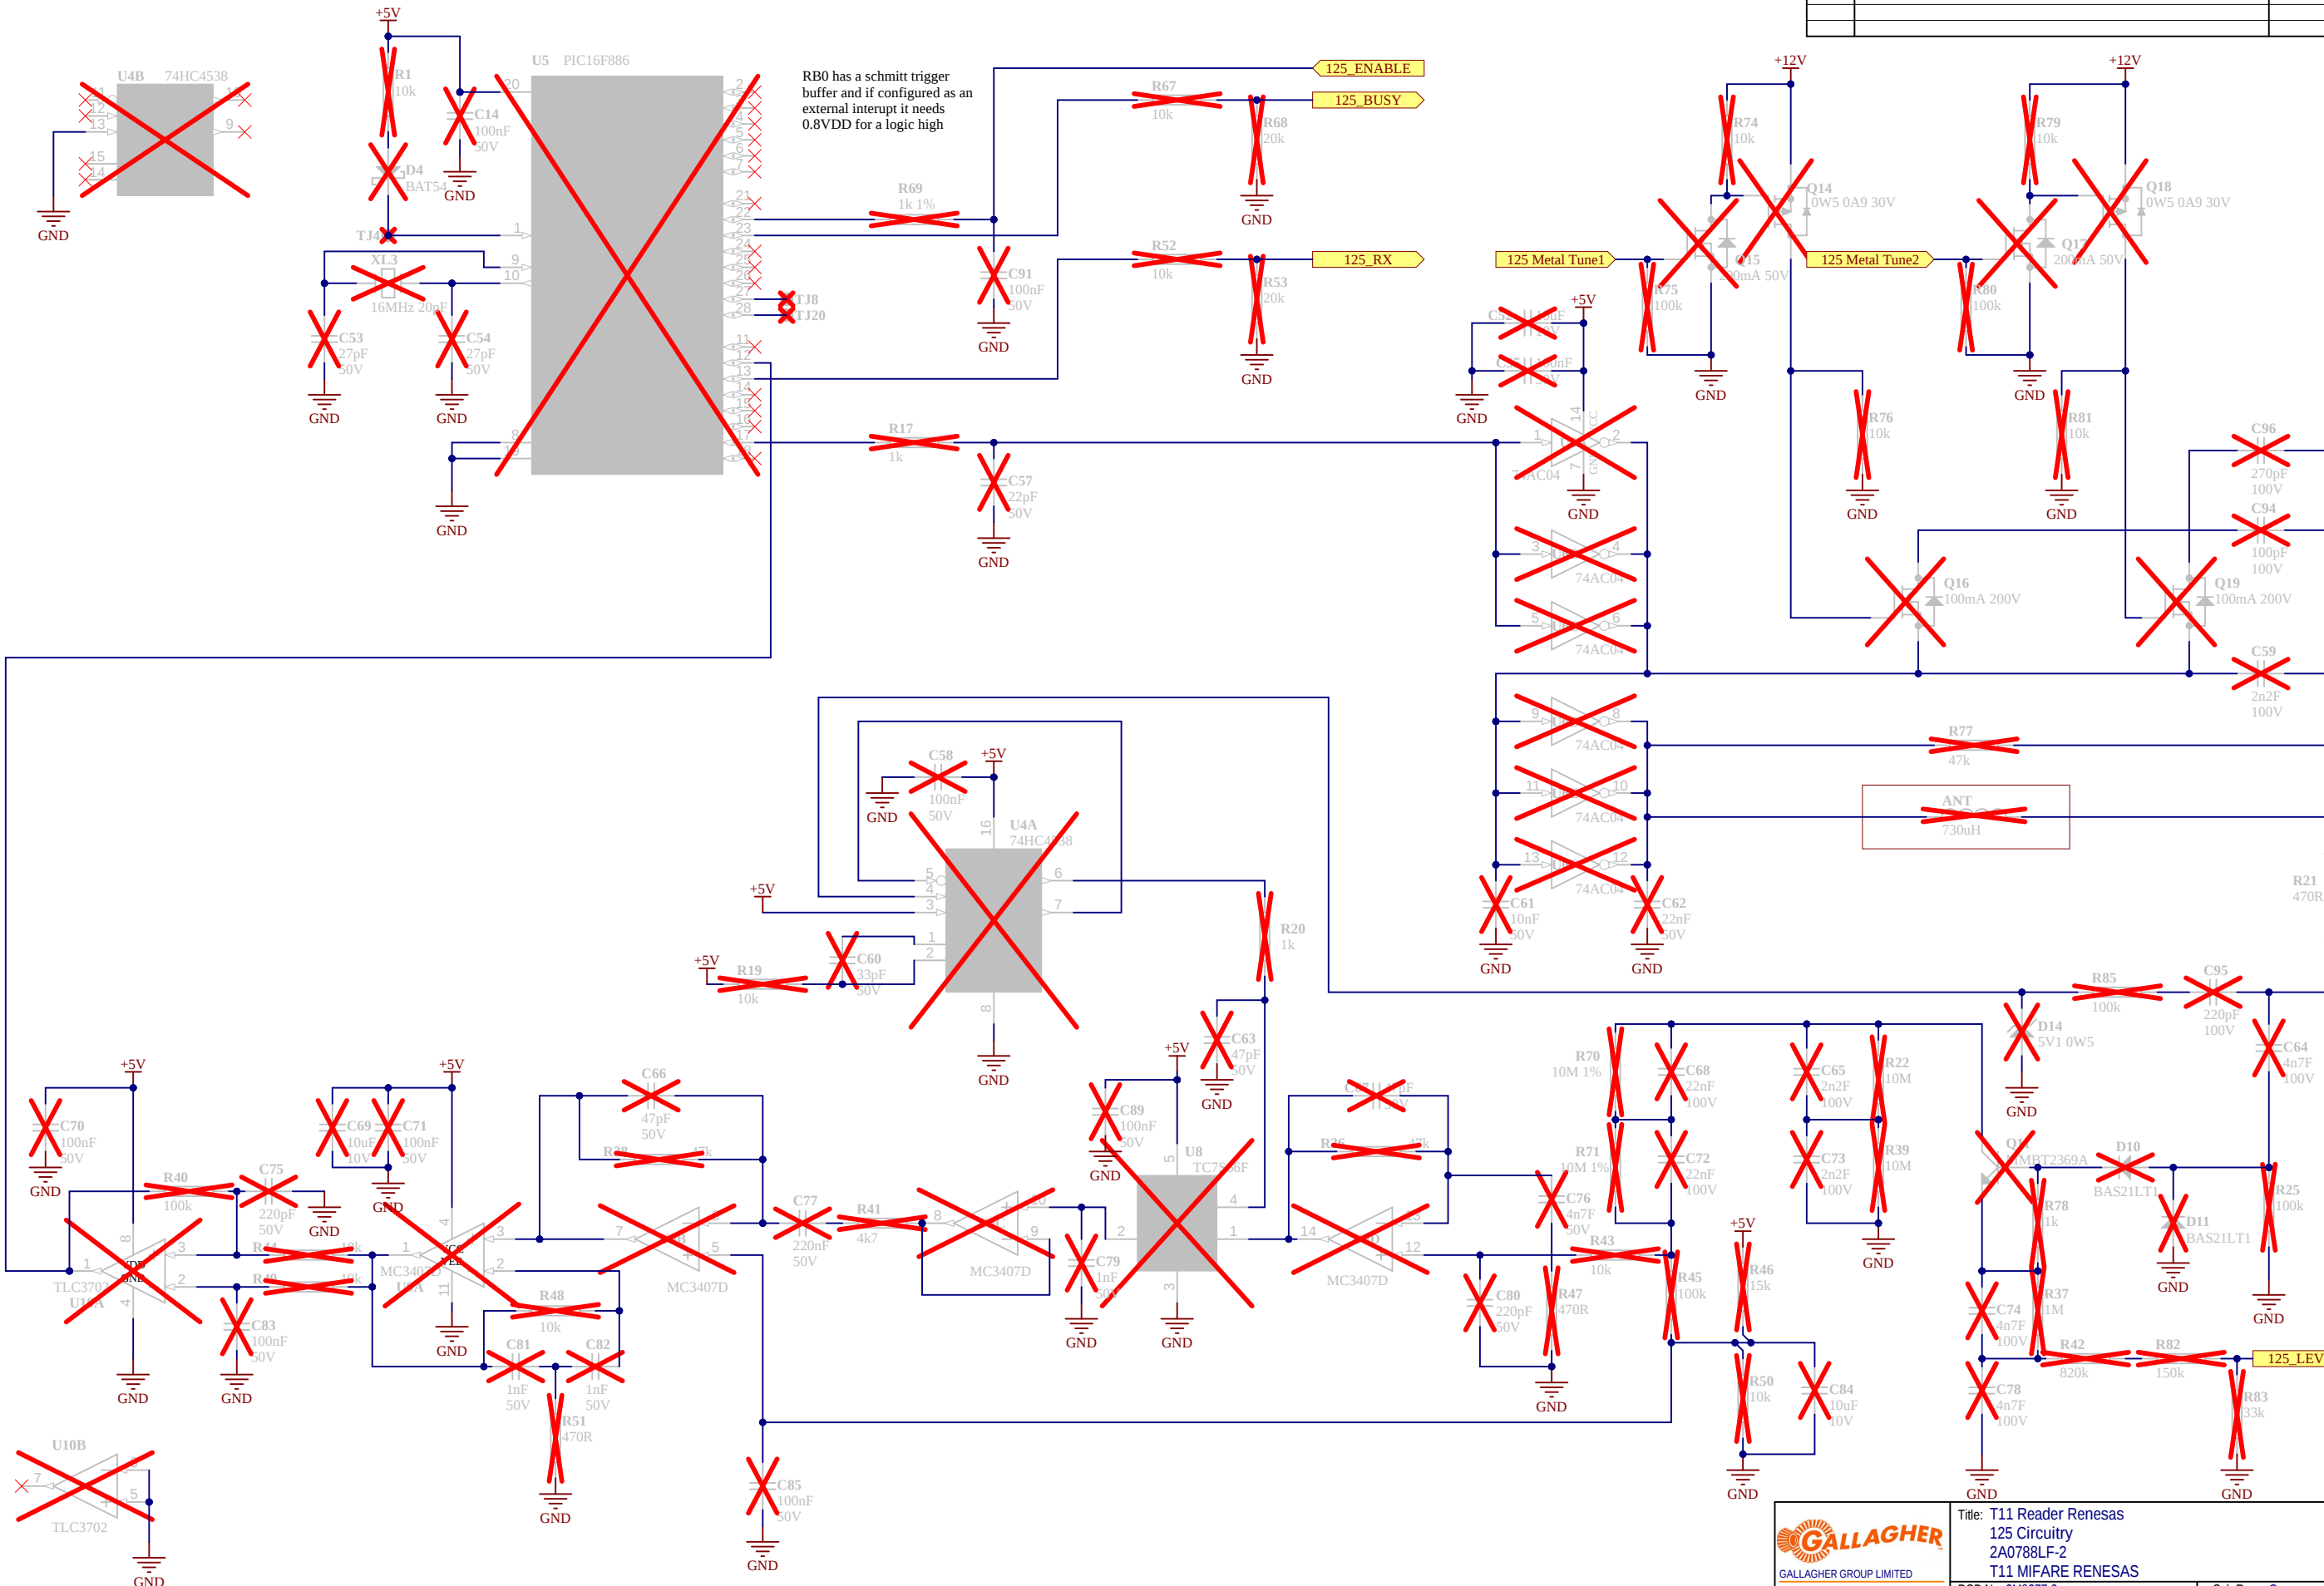

© 2022 GALLAGHER
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF
GALLAGHER GROUP LTD. ANY REPRODUCTION IN PART OR WHOLE WITHOUT
THE WRITTEN PERMISSION OF GALLAGHER GROUP LTD IS PROHIBITED.

Revision History		
Rev	Description	Date
A	Bluetooth module change	07 DEC 2012
B	U12 MIFARE 2G1226S to 2G1315S for 2A0771LF-3, 2A0788LF-2	03 AUG 2022
C	Improving the Mifare Read Range after potting.	29 AUG 2022

