




Test Mode : 2TX 11ac20 CH120 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

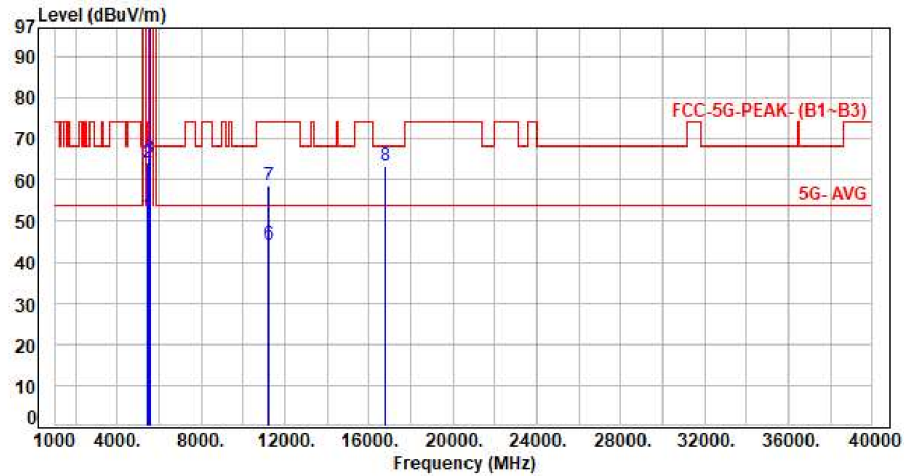

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.45	43.97	51.42	54.00	-2.58	Average	100	165	P
2	5460.00	7.45	56.77	64.22	74.00	-9.78	Peak	100	165	P
3	5470.00	7.46	57.73	65.19	68.20	-3.01	Peak	100	165	P
4	5600.00	7.43	92.20	99.63	200.00	-100.37	Average	100	165	P
5	5600.00	7.43	104.50	111.93	200.00	-88.07	Peak	100	165	P
6	11200.00	15.91	28.47	44.38	54.00	-9.62	Average	100	244	P
7	11200.00	15.91	42.68	58.59	74.00	-15.41	Peak	100	244	P
8	16800.00	20.49	43.05	63.54	68.20	-4.66	Peak	100	130	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ac20 CH140 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

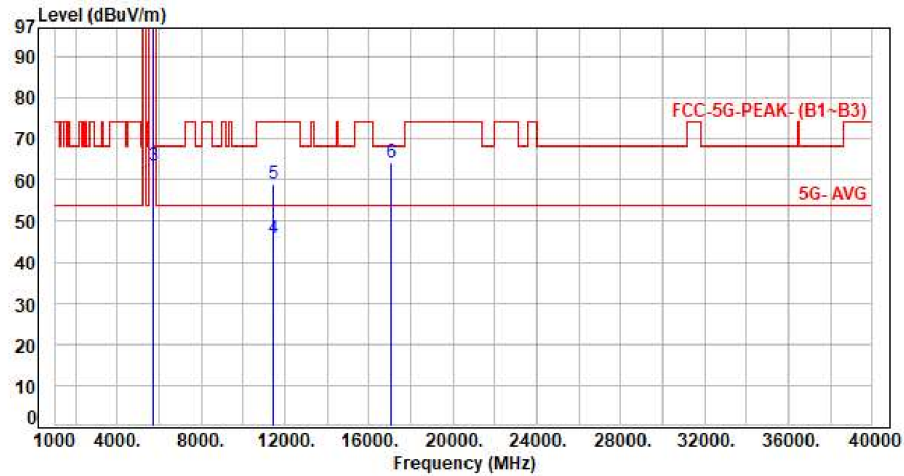


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5700.00	7.37	91.51	98.88	200.00	-101.12	Average	100	241	P
2	5700.00	7.37	101.10	108.47	200.00	-91.53	Peak	100	241	P
3	5725.00	7.33	55.97	63.30	68.20	-4.90	Peak	100	241	P
4	11400.00	16.14	29.56	45.70	54.00	-8.30	Average	100	109	P
5	11400.00	16.14	42.96	59.10	74.00	-14.90	Peak	100	109	P
6	17100.00	21.98	42.18	64.16	68.20	-4.04	Peak	100	177	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ac20 CH140 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

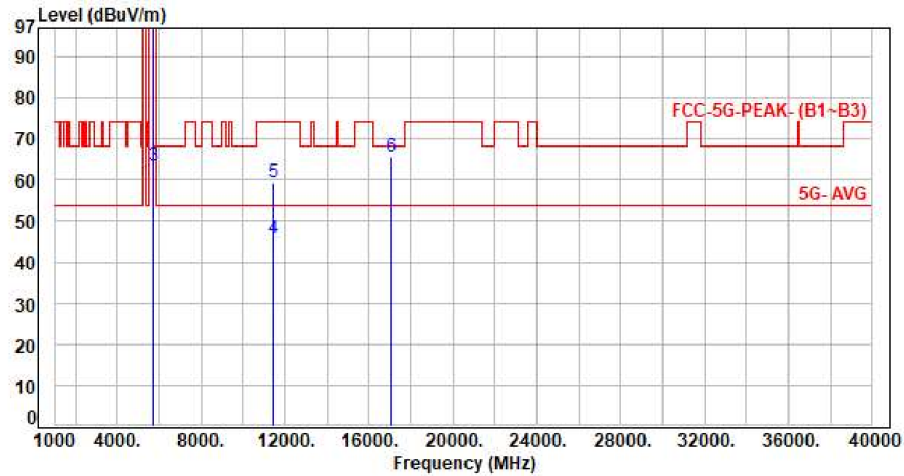


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5700.00	7.37	93.75	101.12	200.00	-98.88	Average	100	360	P
2	5700.00	7.37	103.45	110.82	200.00	-89.18	Peak	100	360	P
3	5725.00	7.33	56.08	63.41	68.20	-4.79	Peak	100	360	P
4	11400.00	16.14	29.61	45.75	54.00	-8.25	Average	100	155	P
5	11400.00	16.14	43.14	59.28	74.00	-14.72	Peak	100	155	P
6	17100.00	21.98	43.51	65.49	68.20	-2.71	Peak	100	162	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ac40 CH102 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

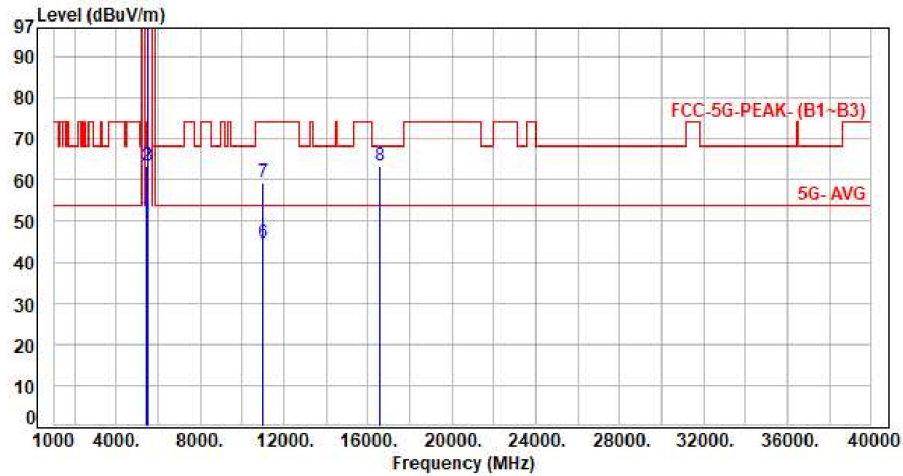

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.45	43.35	50.80	54.00	-3.20	Average	100	243	P
2	5460.00	7.45	56.08	63.53	74.00	-10.47	Peak	100	243	P
3	5470.00	7.46	56.12	63.58	68.20	-4.62	Peak	100	243	P
4	5510.00	7.47	90.07	97.54	200.00	-102.46	Average	100	243	P
5	5510.00	7.47	99.27	106.74	200.00	-93.26	Peak	100	243	P
6	11020.00	15.65	29.12	44.77	54.00	-9.23	Average	100	288	P
7	11020.00	15.65	43.61	59.26	74.00	-14.74	Peak	100	288	P
8	16530.00	18.77	44.51	63.28	68.20	-4.92	Peak	100	240	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ac40 CH102 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

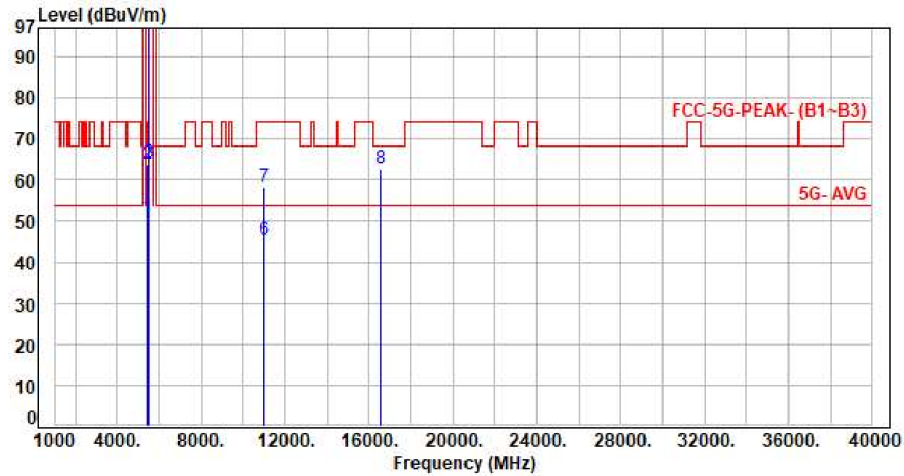

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.45	43.52	50.97	54.00	-3.03	Average	100	360	P
2	5460.00	7.45	56.25	63.70	74.00	-10.30	Peak	100	360	P
3	5470.00	7.46	56.55	64.01	68.20	-4.19	Peak	100	360	P
4	5510.00	7.47	91.36	98.83	200.00	-101.17	Average	100	360	P
5	5510.00	7.47	100.56	108.03	200.00	-91.97	Peak	100	360	P
6	11020.00	15.65	29.61	45.26	54.00	-8.74	Average	100	165	P
7	11020.00	15.65	42.64	58.29	74.00	-15.71	Peak	100	165	P
8	16530.00	18.77	44.04	62.81	68.20	-5.39	Peak	100	170	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ac40 CH118 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

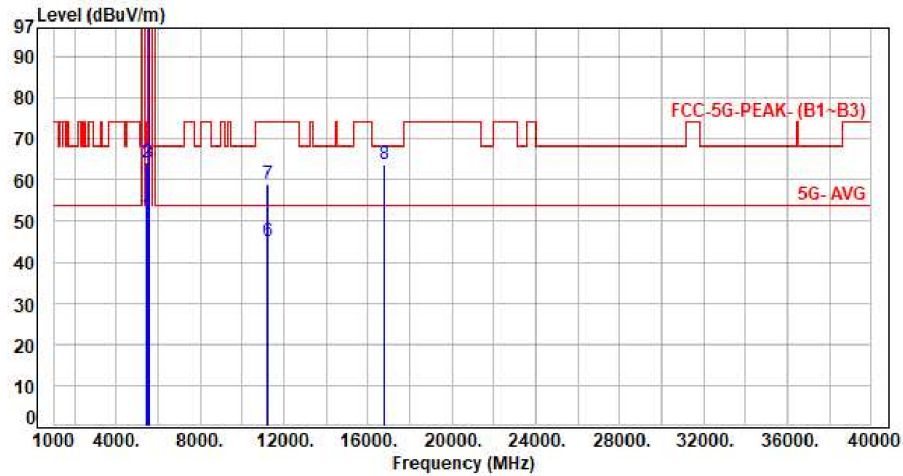

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.45	43.83	51.28	54.00	-2.72	Average	100	291	P
2	5460.00	7.45	56.58	64.03	74.00	-9.97	Peak	100	291	P
3	5470.00	7.46	56.70	64.16	68.20	-4.04	Peak	100	291	P
4	5590.00	7.43	88.05	95.48	200.00	-104.52	Average	100	291	P
5	5590.00	7.43	97.65	105.08	200.00	-94.92	Peak	100	291	P
6	11180.00	15.90	29.15	45.05	54.00	-8.95	Average	100	142	P
7	11180.00	15.90	43.22	59.12	74.00	-14.88	Peak	100	142	P
8	16770.00	20.44	43.39	63.83	68.20	-4.37	Peak	100	310	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ac40 CH118 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

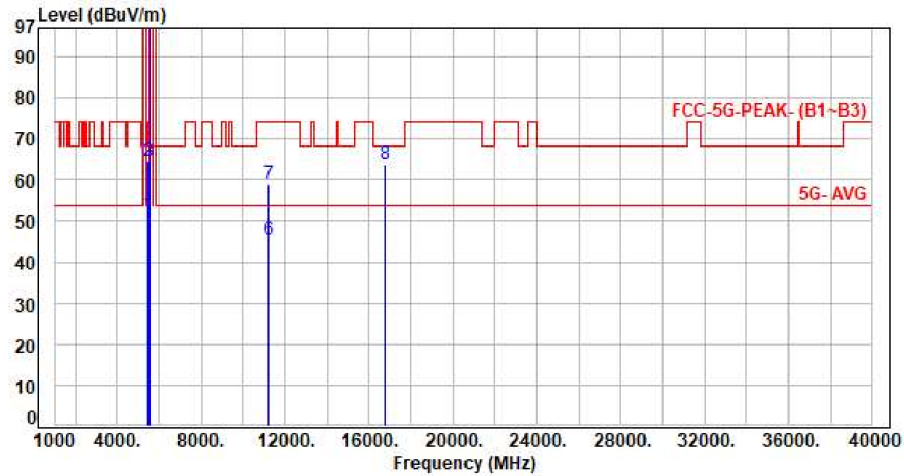

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.45	44.18	51.63	54.00	-2.37	Average	100	164	P
2	5460.00	7.45	57.09	64.54	74.00	-9.46	Peak	100	164	P
3	5470.00	7.46	57.12	64.58	68.20	-3.62	Peak	100	164	P
4	5590.00	7.43	91.21	98.64	200.00	-101.36	Average	100	164	P
5	5590.00	7.43	100.29	107.72	200.00	-92.28	Peak	100	164	P
6	11180.00	15.90	29.32	45.22	54.00	-8.78	Average	100	238	P
7	11180.00	15.90	42.94	58.84	74.00	-15.16	Peak	100	238	P
8	16770.00	20.44	43.21	63.65	68.20	-4.55	Peak	100	124	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ac40 CH134 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

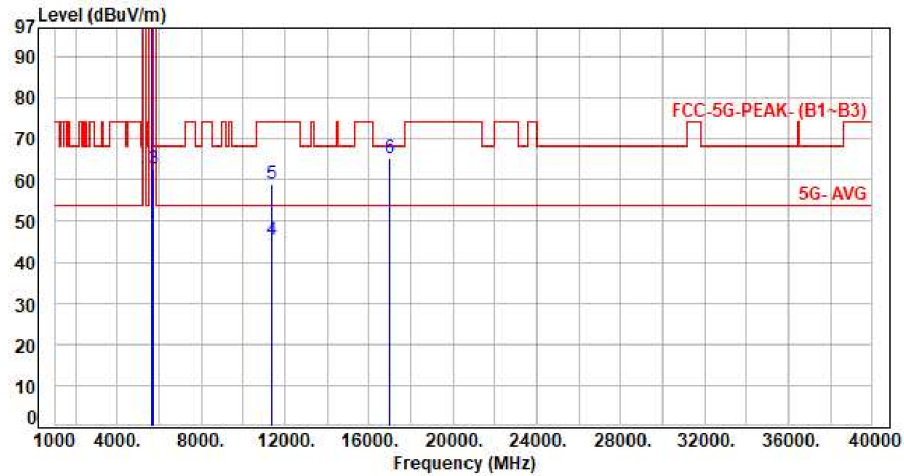


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5670.00	7.36	89.36	96.72	200.00	-103.28	Average	100	243	P
2	5670.00	7.36	99.20	106.56	200.00	-93.44	Peak	100	243	P
3	5725.00	7.33	55.38	62.71	68.20	-5.49	Peak	100	243	P
4	11340.00	16.00	29.37	45.37	54.00	-8.63	Average	100	195	P
5	11340.00	16.00	42.95	58.95	74.00	-15.05	Peak	100	195	P
6	17010.00	21.87	43.52	65.39	68.20	-2.81	Peak	100	256	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ac40 CH134 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

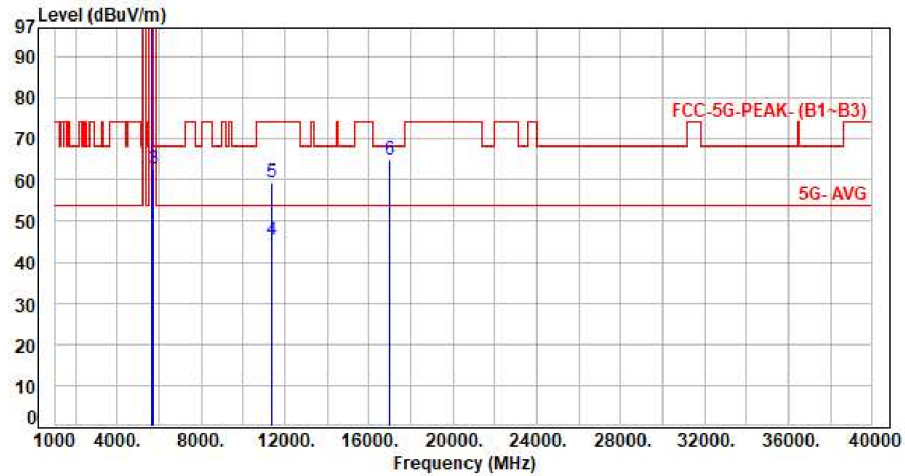


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5670.00	7.36	91.97	99.33	200.00	-100.67	Average	100	360	P
2	5670.00	7.36	101.70	109.06	200.00	-90.94	Peak	100	360	P
3	5725.00	7.33	55.49	62.82	68.20	-5.38	Peak	100	360	P
4	11340.00	16.00	29.48	45.48	54.00	-8.52	Average	100	207	P
5	11340.00	16.00	43.28	59.28	74.00	-14.72	Peak	100	207	P
6	17010.00	21.87	43.00	64.87	68.20	-3.33	Peak	100	224	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ac80 CH106 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

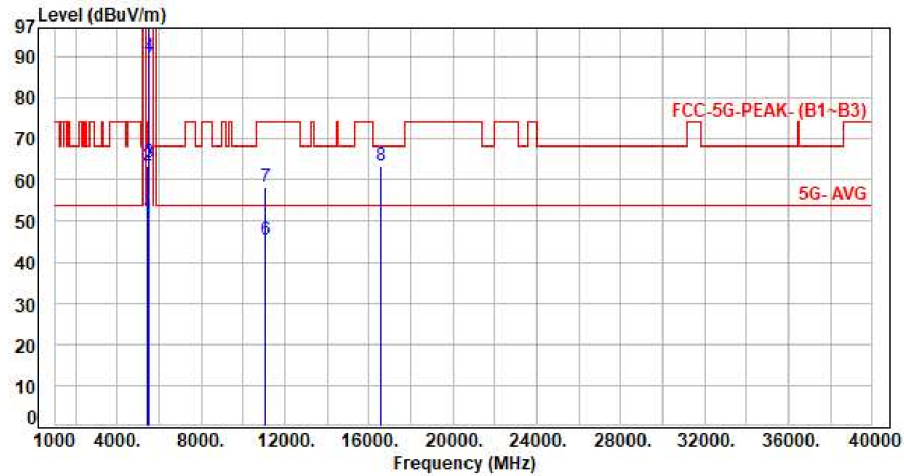

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.45	42.91	50.36	54.00	-3.64	Average	227	270	P
2	5460.00	7.45	55.85	63.30	74.00	-10.70	Peak	227	270	P
3	5470.00	7.46	56.64	64.10	68.20	-4.10	Peak	227	270	P
4	5530.00	7.44	82.48	89.92	200.00	-110.08	Average	227	270	P
5	5530.00	7.44	91.74	99.18	200.00	-100.82	Peak	227	270	P
6	11060.00	15.66	29.77	45.43	54.00	-8.57	Average	100	147	P
7	11060.00	15.66	42.62	58.28	74.00	-15.72	Peak	100	147	P
8	16590.00	19.23	44.25	63.48	68.20	-4.72	Peak	100	335	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ac80 CH106 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

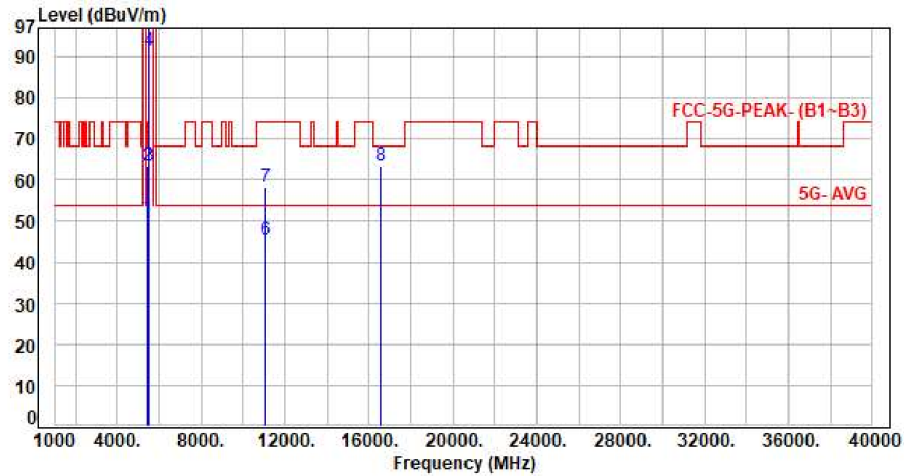

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.45	43.48	50.93	54.00	-3.07	Average	339	360	P
2	5460.00	7.45	56.07	63.52	74.00	-10.48	Peak	339	360	P
3	5470.00	7.46	56.03	63.49	68.20	-4.71	Peak	339	360	P
4	5530.00	7.44	84.17	91.61	200.00	-108.39	Average	339	360	P
5	5530.00	7.44	94.21	101.65	200.00	-98.35	Peak	339	360	P
6	11060.00	15.66	29.83	45.49	54.00	-8.51	Average	100	256	P
7	11060.00	15.66	42.73	58.39	74.00	-15.61	Peak	100	256	P
8	16590.00	19.23	44.18	63.41	68.20	-4.79	Peak	100	241	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ac80 CH122 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

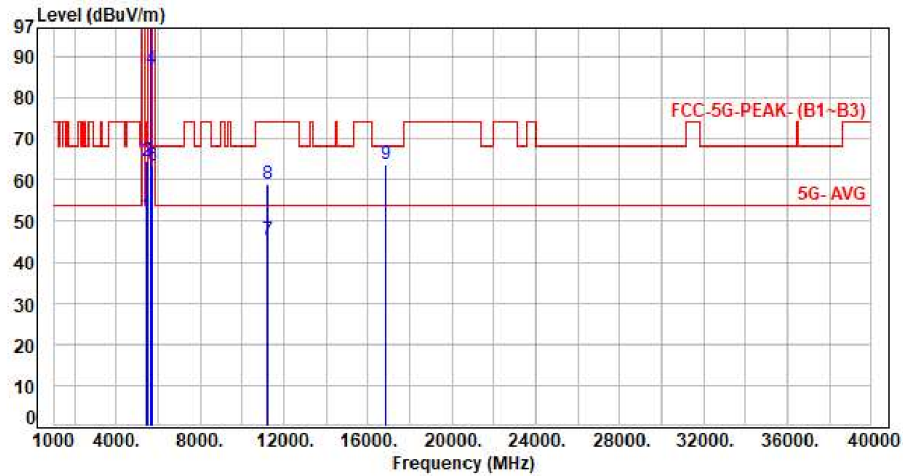


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.45	43.74	51.19	54.00	-2.81	Average	331	70	P
2	5460.00	7.45	57.08	64.53	74.00	-9.47	Peak	331	70	P
3	5470.00	7.46	57.12	64.58	68.20	-3.62	Peak	331	70	P
4	5610.00	7.42	79.62	87.04	200.00	-112.96	Average	331	70	P
5	5610.00	7.42	94.87	102.29	200.00	-97.71	Peak	331	70	P
6	5725.00	7.33	56.11	63.44	68.20	-4.76	Peak	331	70	P
7	11220.00	15.93	29.41	45.34	54.00	-8.66	Average	100	128	P
8	11220.00	15.93	43.08	59.01	74.00	-14.99	Peak	100	128	P
9	16830.00	20.55	43.28	63.83	68.20	-4.37	Peak	100	294	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ac80 CH122 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

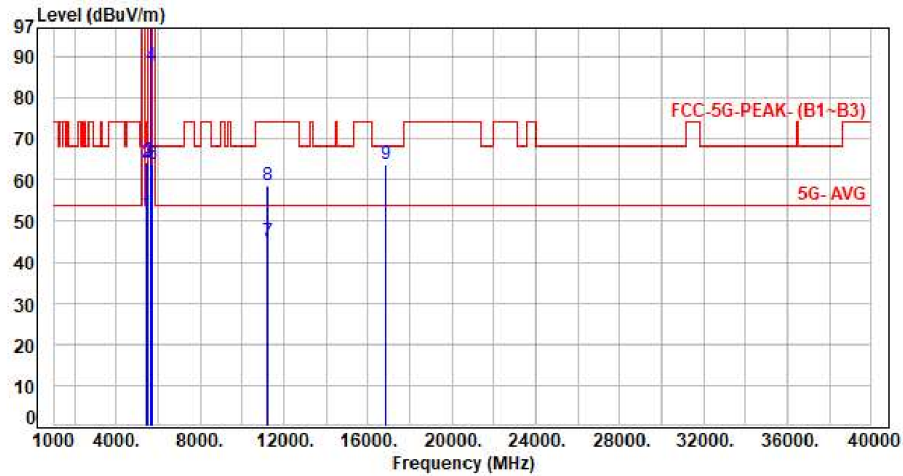

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.45	44.12	51.57	54.00	-2.43	Average	103	104	P
2	5460.00	7.45	56.78	64.23	74.00	-9.77	Peak	103	104	P
3	5470.00	7.46	56.92	64.38	68.20	-3.82	Peak	103	104	P
4	5610.00	7.42	80.26	87.68	200.00	-112.32	Average	103	104	P
5	5610.00	7.42	95.51	102.93	200.00	-97.07	Peak	103	104	P
6	5725.00	7.33	56.57	63.90	68.20	-4.30	Peak	100	104	P
7	11220.00	15.93	29.17	45.10	54.00	-8.90	Average	100	241	P
8	11220.00	15.93	42.85	58.78	74.00	-15.22	Peak	100	126	P
9	16830.00	20.55	43.28	63.83	68.20	-4.37	Peak	100	126	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11a CH144 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

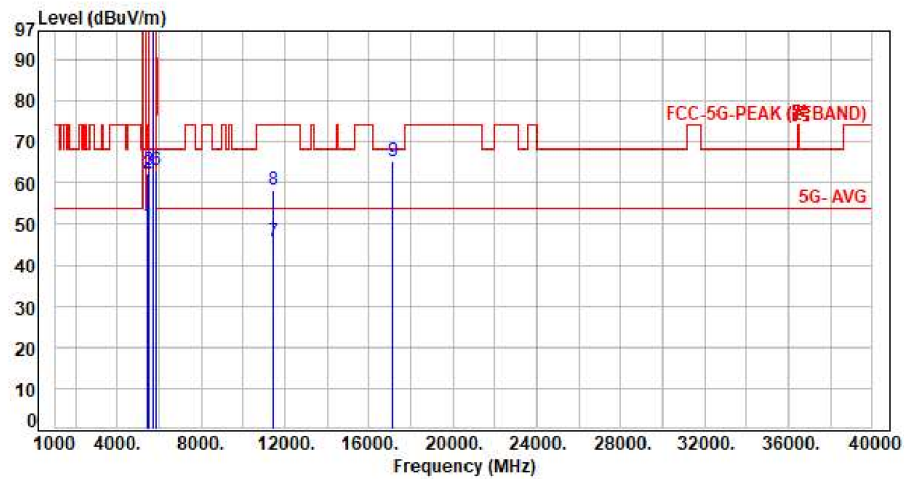


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.45	42.30	49.75	54.00	-4.25	Average	390	271	P
2	5460.00	7.45	54.81	62.26	74.00	-11.74	Peak	390	271	P
3	5470.00	7.46	55.61	63.07	68.20	-5.13	Peak	390	271	P
4	5720.00	7.34	93.89	101.23	200.00	-98.77	Average	390	271	P
5	5720.00	7.34	103.52	110.86	200.00	-89.14	Peak	390	271	P
6	5850.00	7.43	55.75	63.18	68.20	-5.02	Peak	390	271	P
7	11440.00	16.25	29.62	45.87	54.00	-8.13	Average	100	193	P
8	11440.00	16.25	42.18	58.43	74.00	-15.57	Peak	100	193	P
9	17160.00	22.12	43.15	65.27	68.20	-2.93	Peak	100	127	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11a CH144 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

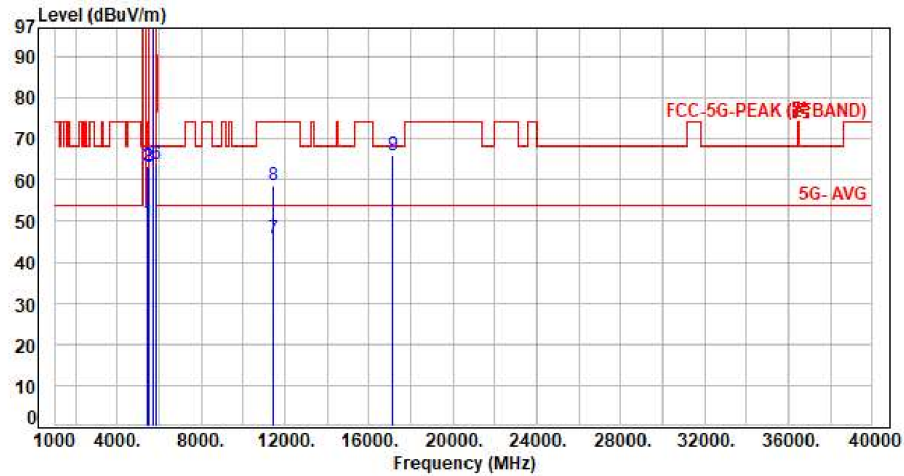


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.45	42.33	49.78	54.00	-4.22	Average	100	360	P
2	5460.00	7.45	56.00	63.45	74.00	-10.55	Peak	100	360	P
3	5470.00	7.46	55.43	62.89	68.20	-5.31	Peak	100	360	P
4	5720.00	7.34	95.01	102.35	200.00	-97.65	Average	100	360	P
5	5720.00	7.34	104.36	111.70	200.00	-88.30	Peak	100	360	P
6	5850.00	7.43	56.31	63.74	68.20	-4.46	Peak	100	360	P
7	11440.00	16.25	29.36	45.61	54.00	-8.39	Average	100	152	P
8	11440.00	16.25	42.32	58.57	74.00	-15.43	Peak	100	152	P
9	17160.00	22.12	43.74	65.86	68.20	-2.34	Peak	100	147	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ac20 CH144 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

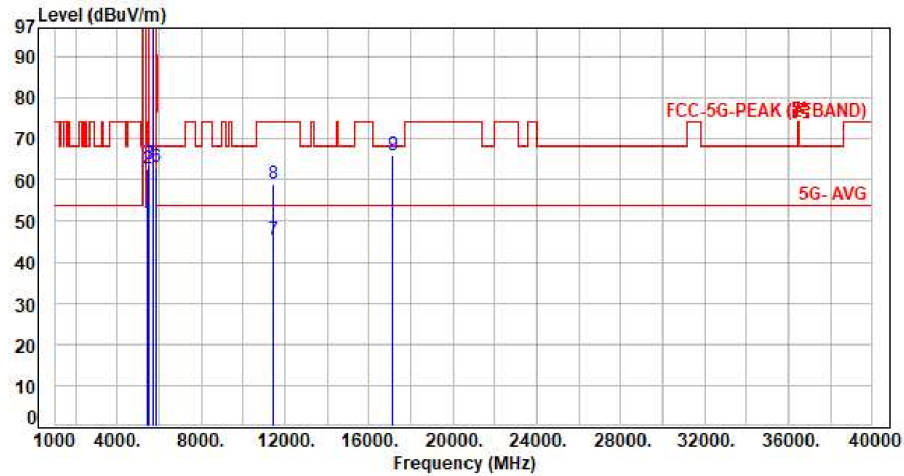

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.45	42.33	49.78	54.00	-4.22	Average	391	267	P
2	5460.00	7.45	55.22	62.67	74.00	-11.33	Peak	391	267	P
3	5470.00	7.46	56.50	63.96	68.20	-4.24	Peak	391	267	P
4	5720.00	7.34	93.19	100.53	200.00	-99.47	Average	391	267	P
5	5720.00	7.34	103.15	110.49	200.00	-89.51	Peak	391	267	P
6	5850.00	7.43	55.51	62.94	68.20	-5.26	Peak	391	267	P
7	11440.00	16.25	29.19	45.44	54.00	-8.56	Average	100	142	P
8	11440.00	16.25	42.62	58.87	74.00	-15.13	Peak	100	142	P
9	17160.00	22.12	43.85	65.97	68.20	-2.23	Peak	100	115	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor