



FCC 47 CFR PART 15 SUBPART C

TEST REPORT

For

Ultra Mobile PC

Trade Name / Model
AMTEK / T700
Smart Caddie / SCA001

Issued to

AMTEK SYSTEM CO., LTD.
14F-11, No.79, Sec.1, Hsin Tai Wu rd., Hsi Chih City,
Taipei Hsien, Taiwan, R.O.C.

Issued by

Compliance Certification Services Inc.
No. 81-1, Lane 210, Bade Rd. 2, Luchu Hsiang,
Taoyuan Hsien, (338) Taiwan, R.O.C.
<http://www.ccsemc.com.tw>
service@tw.ccsemc.com



***Note:** This report shall not be reproduced except in full, without the written approval of Compliance Certification Services Inc. This document may be altered or revised by Compliance Certification Services Inc. personnel only, and shall be noted in the revision section of the document*



TABLE OF CONTENTS

1. TEST RESULT CERTIFICATION	3
2. EUT DESCRIPTION	4
3. TEST METHODOLOGY	5
3.1 EUT CONFIGURATION	5
3.2 EUT EXERCISE	5
3.3 GENERAL TEST PROCEDURES	5
3.4 FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS	6
3.5 DESCRIPTION OF TEST MODES	6
4. INSTRUMENT CALIBRATION	7
4.1 MEASURING INSTRUMENT CALIBRATION	7
4.2 MEASUREMENT EQUIPMENT USED	7
5. FACILITIES AND ACCREDITATIONS	8
5.1 FACILITIES	8
5.2 EQUIPMENT	8
5.3 TABLE OF ACCREDITATIONS AND LISTINGS	9
6. SETUP OF EQUIPMENT UNDER TEST	10
6.1 SETUP CONFIGURATION OF EUT	10
6.2 SUPPORT EQUIPMENT	10
7. FCC PART 15.247 REQUIREMENTS	11
CONDITION A: WLAN OPERATION	11
7.1 6DB BANDWIDTH	11
7.2 PEAK POWER	15
7.3 AVERAGE POWER	19
7.4 BAND EDGES MEASUREMENT	23
7.5 PEAK POWER SPECTRAL DENSITY	32
7.6 SPURIOUS EMISSIONS	36
CONDITION B: BLUETOOTH OPERATION	50
7.7 PEAK POWER	50
7.8 AVERAGE POWER	51
7.9 BAND EDGES MEASUREMENT	52
7.10 PEAK POWER SPECTRAL DENSITY	57
7.11 FREQUENCY SEPARATION	60
7.12 NUMBER OF HOPPING FREQUENCY	62
7.13 TIME OF OCCUPANCY (DWELL TIME)	64
7.14 SPURIOUS EMISSIONS	71
CONDITION C: CO-LOCATED OPERATION	79
7.15 POWER LINE CONDUCTED EMISSIONS	79
APPENDIX I RADIO FREQUENCY EXPOSURE	82
APPENDIX II PHOTOGRAPHS OF TEST SETUP	84



1. TEST RESULT CERTIFICATION

Applicant: AMTEK SYSTEM CO., LTD.
14F-11, No.79, Sec.1, Hsin Tai Wu rd., Hsi Chih City,
Taipei Hsien, Taiwan, R.O.C.

Equipment Under Test: Ultra Mobile PC

Trade Name / Model: AMTEK / T700
Smart Caddie / SCA001

Date of Test: March 10 ~ 18, 2006

APPLICABLE STANDARDS	
STANDARD	TEST RESULT
FCC 47 CFR Part 15 Subpart C	No non-compliance noted

We hereby certify that:

The above equipment was tested by Compliance Certification Services Inc. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4: 2003 and the energy emitted by the sample EUT tested as described in this report is in compliance with conducted and radiated emission limits of FCC Rules Part 15.207, 15.209 and 15.247.

The test results of this report relate only to the tested sample EUT identified in this report.

Approved by:

Reviewed by:

Gavin Lim
Section Manager
Compliance Certification Services Inc.

Amanda Wu
Section Manager
Compliance Certification Services Inc.



2. EUT DESCRIPTION

Product	Ultra Mobile PC
Trade Name / Model	AMTEK / T700 Smart Caddie / SCA001
Model Name Discrepancy	All the specification and layout are identical except they come with different model numbers and trade names for marketing purpose.
Power Supply	Adapter: Model: F10653-A I/P: AC 100-240V, 1.8A, 50-60Hz O/P: DC 18-24V 3.61-2.70A Adapter: Model: 0335A1965 I/P: AC 100-240V, 1.7A, 50-60Hz O/P: DC 19V, 3.42A Battery: Li-ion 10.8V-2400mAh
Frequency Range	IEEE 802.11b / g: 2412 ~ 2462 MHz Bluetooth: 2402 MHz ~ 2480 MHz
Transmit Power	IEEE 802.11b: 15.06 dBm IEEE 802.11g: 14.15 dBm Bluetooth: 3.56 dBm
Modulation Technique	IEEE 802.11b: DSSS (CCK, DQPSK, DBPSK) IEEE 802.11g: DSSS (CCK, DQPSK, DBPSK) + OFDM (QPSK, BPSK, 16-QAM, 64-QAM) Bluetooth: FHSS (GFSK)
Number of Channels	IEEE 802.11b / g: 11 Channels Bluetooth: 79 Channels
Antenna Specification	IEEE 802.11b / g: 1.08 dBi Bluetooth: 2.0dBi
Antenna Designation	IEEE 802.11b / g: PIFA Antenna Bluetooth: Multilayer Chip Antenna

Remark:

1. The sample selected for test was engineering sample that approximated to production product and was provided by manufacturer.
2. This submittal(s) (test report) is intended for FCC ID: R4R-AIRT700UMPC filing to comply with Section 15.207, 15.209 and 15.247 of the FCC Part 15, Subpart C Rules.



3. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.4. Radiated testing was performed at an antenna to EUT distance 3 meters.

3.1 EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

3.2 EUT EXERCISE

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements.

According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.247 under the FCC Rules Part 15 Subpart C.

3.3 GENERAL TEST PROCEDURES

Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 13.1.4.1 of ANSI C63.4. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in Section 13.1.4.1 of ANSI C63.4.

3.4 FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS

- (a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 -	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.52525	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	156.7 - 156.9	3260 - 3267	23.6 - 24.0
12.29 - 12.293	162.0125 - 167.17	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	167.72 - 173.2	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	240 - 285	3600 - 4400	(²)
13.36 - 13.41	322 - 335.4		

¹ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

² Above 38.6

- (b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

3.5 DESCRIPTION OF TEST MODES

The EUT (model: T700) comes with two types of adapter for sale. After the preliminary test, the EUT with adapter (Model: F10653-A) was found to emit the worst emissions and therefore had been tested under operating condition.

Software used to control the EUT for staying in continuous transmitting mode was programmed.

After verification, all tests were carried out with the worst case test modes as shown below except radiated spurious emission below 1GHz, which worst case was in normal link mode only.

Condition A:

IEEE802.11b: Channel Low (2412MHz), Channel Mid (2437MHz) and Channel High (2462MHz) with 11Mbps data rate were chosen for full testing.

IEEE802.11g: Channel Low (2412MHz), Channel Mid (2437MHz) and Channel High (2462MHz) with 6Mbps data rate were chosen for full testing.

Condition B:

Bluetooth: Channel Low (2402MHz), Channel Mid (2441MHz) and Channel High (2480MHz) were chosen for final testing.

The field strength of spurious emission was measured in the following position: EUT stand-up position (Z mode), lie-down position (X, Y mode). The worst emission was found in lie-down position (X axis) and the worst case was recorded.



4. INSTRUMENT CALIBRATION

4.1 MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

4.2 MEASUREMENT EQUIPMENT USED

Equipment Used for Emissions Measurement

Remark: Each piece of equipment is scheduled for calibration once a year.

Conducted Emissions Test Site				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	E4446A	MY43360131	01/10/2007

3M Semi Anechoic Chamber				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	E4446A	US42510252	07/25/2006
Test Receiver	Rohde&Schwarz	ESCI	100064	06/28/2006
Switch Controller	TRC	Switch Controller	SC94050010	05/05/2006
4 Port Switch	TRC	4 Port Switch	SC94050020	05/05/2006
Horn-Antenna	TRC	HA-0502	06	06/02/2006
Horn-Antenna	TRC	HA-0801	04	05/05/2006
Horn-Antenna	TRC	HA-1201A	01	07/04/2006
Horn-Antenna	TRC	HA-1301A	01	07/04/2006
Bilog- Antenna	Sunol Sciences	JB3	A030205	03/09/2007
Turn Table	Max-Full	MFT-120S	T120S940302	N.C.R.
Antenna Tower	Max-Full	MFA-430	A440940302	N.C.R.
Controller	Max-Full	MF-CM886	CC-C-1F-13	N.C.R.
Site NSA	CCS	N/A	FCC: 965860 IC: IC 6106	09/26/2008
Test S/W	LABVIEW (V 6.1)			

Remark: The measurement uncertainty is less than $\pm 2.0065\text{dB}$ (30MHz ~ 1GHz), $\pm 3.0958\text{dB}$ (Above 1GHz) which is evaluated as per the NAMAS NIS 81 and CISPR/A/291/CDV.

Powerline Conducted Emissions Test Site				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
EMI TEST RECEIVER 9kHz-30MHz	ROHDE & SCHWARZ	ESHS30	828144/003	09/24/2006
TWO-LINE V-NETWORK 9kHz-30MHz	SCHAFFNER	NNB41	03/10013	06/11/2006
LISN 10kHz-100MHz	EMCO	3825/2	9106-1809	02/17/2007
Test S/W	LABVIEW (V 6.1)			

Remark: The measurement uncertainty is less than $\pm 2.81\text{dB}$, which is evaluated as per the NAMAS NIS 81 and CISPR/A/291/CDV.



5. FACILITIES AND ACCREDITATIONS

5.1 FACILITIES

All measurement facilities used to collect the measurement data are located at

☐ No.199, Chunghsen Road, Hsintien City, Taipei Hsien, Taiwan, R.O.C.

Tel: 886-2-2217-0894 / Fax: 886-2-2217-1029

☒ No.11, Wugong 6th Rd., Wugu Industrial Park, Taipei Hsien 248, Taiwan

Tel: 886-2-2299-9720 / Fax: 886-2-2298-4045

☒ No.81-1, Lane 210, Bade 2nd Rd., Luchu Hsiang, Taoyuan Hsien 338, Taiwan

Tel: 886-3-324-0332 / Fax: 886-3-324-5235

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 and CISPR Publication 22.

5.2 EQUIPMENT








Radiated emissions are measured with one or more of the following types of linearly polarized antennas: tuned dipole, biconical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers.

Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

5.3 TABLE OF ACCREDITATIONS AND LISTINGS

Country	Agency	Scope of Accreditation	Logo
USA	A2LA	EN 55011, EN 55014-1/2, CISPR 11, CISPR 14-1/2, EN 55022, EN 55015, CISPR 22, CISPR 15, AS/NZS 3548, VCCI V3 (2001), CFR 47, FCC Part 15/18, CNS 13783-1, CNS 13439, CNS 13438, CNS 13803, CNS 14115, EN 55024, IEC 801-2, IEC 801-3, IEC 801-4, IEC/EN 61000-3-2, EIC/EN 61000-3-3, IEC/EN 61000-4-2/3/4/5/6/8/11, EN 50081-1/ EN 61000-6-3, EN 50081-2/EN 61000-6-4, EN 50081-2/EN 61000-6-1: 2001	 0824-01
USA	FCC	3/10 meter Open Area Test Sites (93105, 90471) / 3M Semi Anechoic Chamber (965860) to perform FCC Part 15/18 measurements	 93105, 90471 965860
Japan	VCCI	3/10 meter Open Area Test Sites to perform conducted/radiated measurements	 R-393/1066/725/879 C-402/747/912
Norway	NEMKO	EN 50081-1/2, EN 50082-1/2, IEC 61000-6-1/2, EN 50091-2, EN 50130-4, EN 55011, EN 55013, EN 55014-1/2, EN 55015, EN 55022, EN 55024, EN 61000-3-2/3, EN 61326-1, IEC 61000-4-2/3/4/5/6/8/11, EN 60601-1-2, EN 300 328-2, EN 300 422-2, EN 301 419-1, EN 301 489-01/03/07/08/09/17, EN 301 419-2/3, EN 300 454-2, EN 301 357-2	 ELA 124a ELA 124b ELA 124c
Taiwan	TAF	EN 300 328-1, EN 300 328-2, EN 300 220-1, EN 300 220-2, EN 300 220-3, 47 CFR FCC Part 15 Subpart C, EN 61000-3-2, EN 61000-3-3, CNS 13439, CNS 13783-1, CNS 14115, CNS 13438, AS/NZS CISPR 22, CNS 13022-1, IEC 61000-4-2/3/4/5/6/8/11, CNS 13022-2/3	
Taiwan	BSMI	CNS 13438, CNS 13783-1, CNS 13439, CNS 14115	 SL2-IS-E-0014 SL2-IN-E-0014 SL2-A1-E-0014 SL2-R1-E-0014 SL2-R2-E-0014 SL2-L1-E-0014
Canada	Industry Canada	3/10 meter Open Area Test Sites (IC 3991-3, IC 3991-4) / 3M Semi Anechoic Chamber (IC 6106) to perform RSS 212 Issue 1	 IC 3991-3 IC 3991-4 IC 6106

* No part of this report may be used to claim or imply product endorsement by A2LA or any agency of the US Government.



6. SETUP OF EQUIPMENT UNDER TEST

6.1 SETUP CONFIGURATION OF EUT

See test photographs attached in Appendix 1 for the actual connections between EUT and support equipment.

6.2 SUPPORT EQUIPMENT

No.	Device Type	Brand	Model	Series No.	FCC ID	Data Cable	Power Cord
1.	USB Mouse	HP	MO19UCA	20440964	FCC DoC	Shielded, 1.8m	N/A
2.	USB Keyboard	Compaq	KU-9978	B463AOAGALT097	FCC DoC	Shielded, 1.8m	N/A
3.	Earphone	Labtec	Axis-301	N/A	FCC DoC	Unshielded, 1.8m	N/A
4.	Super a/g 108Mbps Wireless Lan Router (Remote)	PLANEX	BLW-04SAG	40DDA0421	SJ9-BLW54SAG	N/A	Unshielded, 1.8m
5.	USB Bluetooth Dongle (Remote)	TECOM	BT3033A	H3I01824	D6XBT3033	N/A	N/A

Remark:

- All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.*
- Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.*



7. FCC PART 15.247 REQUIREMENTS


CONDITION A: WLAN OPERATION

7.1 6DB BANDWIDTH

LIMIT

According to §15.247(a)(2), systems using digital modulation techniques may operate in the 902 - 928 MHz, 2400 - 2483.5 MHz, and 5725 - 5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

Test Configuration



TEST PROCEDURE

1. Place the EUT on the table and set it in the transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set the spectrum analyzer as RBW = 100kHz, VBW = RBW, Span = 50MHz, Sweep = auto.
4. Mark the peak frequency and -6dB (upper and lower) frequency.
5. Repeat until all the rest channels are investigated.

TEST RESULTS

No non-compliance noted

Test Data

IEEE 802.11b

Channel	Frequency (MHz)	Bandwidth (kHz)	Limit (kHz)	Test Result
Low	2412	9500	>500	PASS
Mid	2437	9000		PASS
High	2462	9670		PASS


IEEE 802.11g

Channel	Frequency (MHz)	Bandwidth (kHz)	Limit (kHz)	Test Result
Low	2412	15170	>500	PASS
Mid	2437	16330		PASS
High	2462	16170		PASS




Test Plot

6dB Bandwidth (IEEE 802.11b / CH Low)

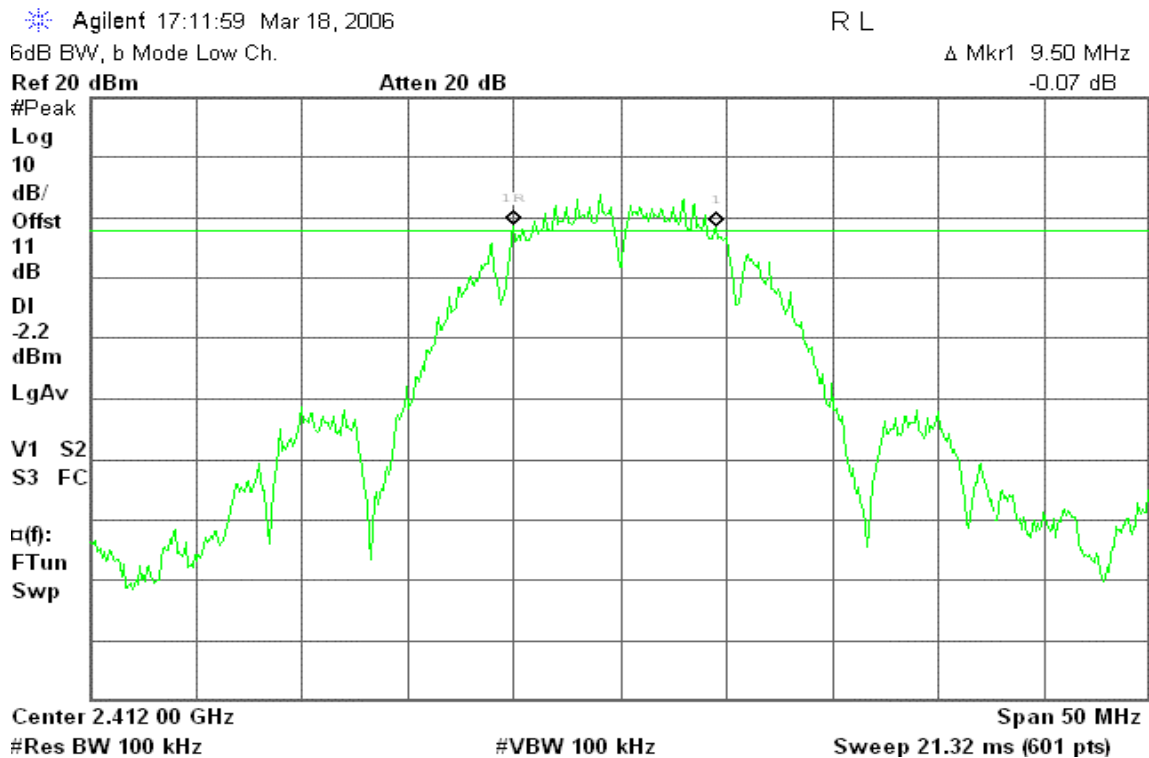

6dB Bandwidth (IEEE 802.11b / CH Mid)

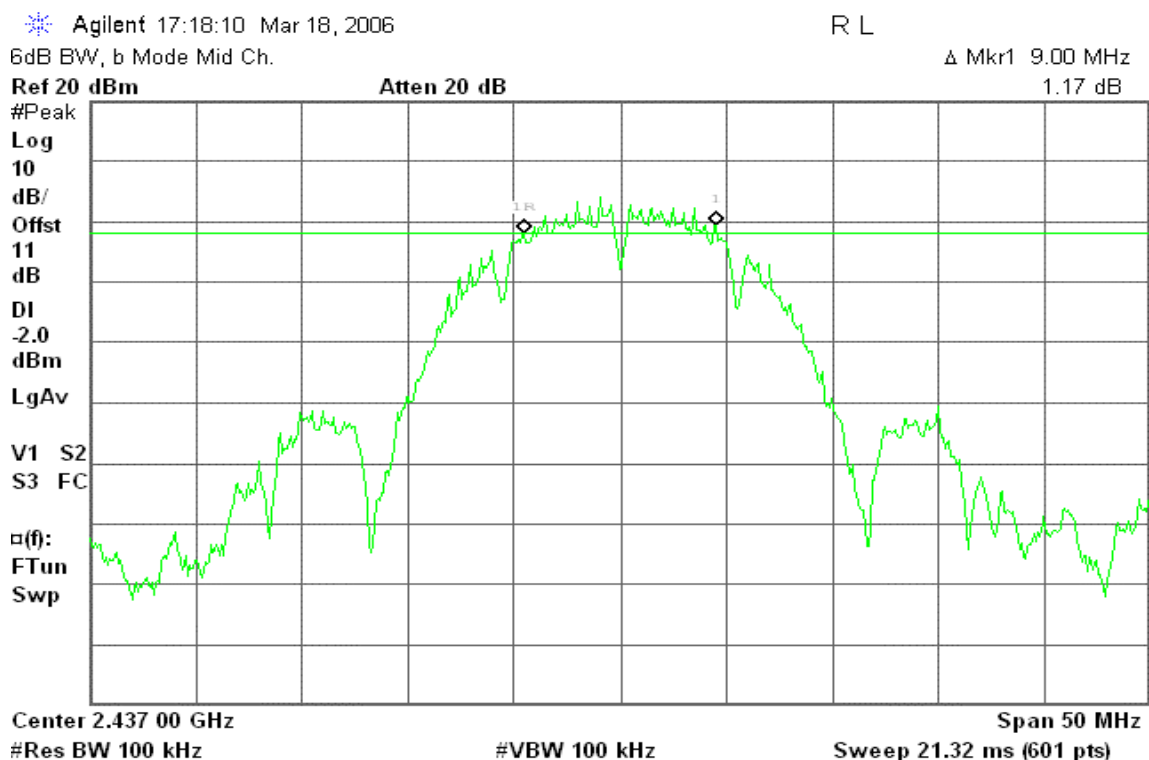



6dB Bandwidth (IEEE 802.11b / CH High)

Agilent 17:24:11 Mar 18, 2006

R L

6dB BW, b Mode High Ch.

Δ Mkr1 9.67 MHz

Ref 20 dBm

Atten 20 dB

0.90 dB

#Peak

Log

10

dB/

Offst

11

dB

DI

-3.4

dBm

LgAv


V1 S2

S3 FC

$\alpha(f)$:

FTun

Swp

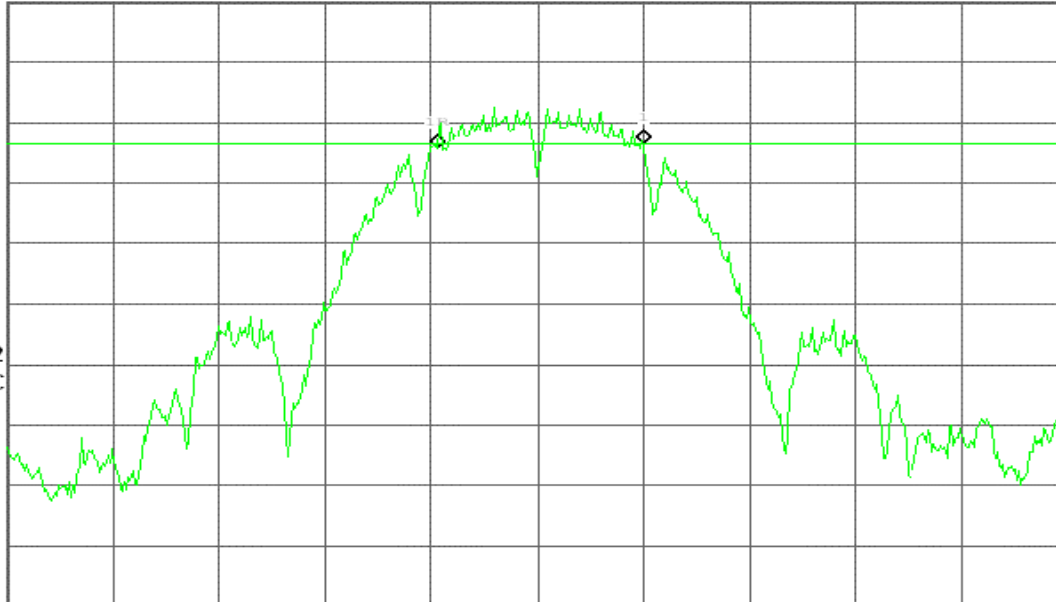

Center 2.462 00 GHz

Span 50 MHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 21.32 ms (601 pts)

6dB Bandwidth (IEEE 802.11g / CH Low)

Agilent 17:37:21 Mar 18, 2006

R L

6dB BW, g Mode Low Ch.

Δ Mkr1 15.17 MHz

Ref 20 dBm

Atten 20 dB

1.78 dB

#Peak

Log

10

dB/

Offst

11

dB

DI

-7.0

dBm

LgAv


V1 S2

S3 FC

$\alpha(f)$:

FTun

Swp

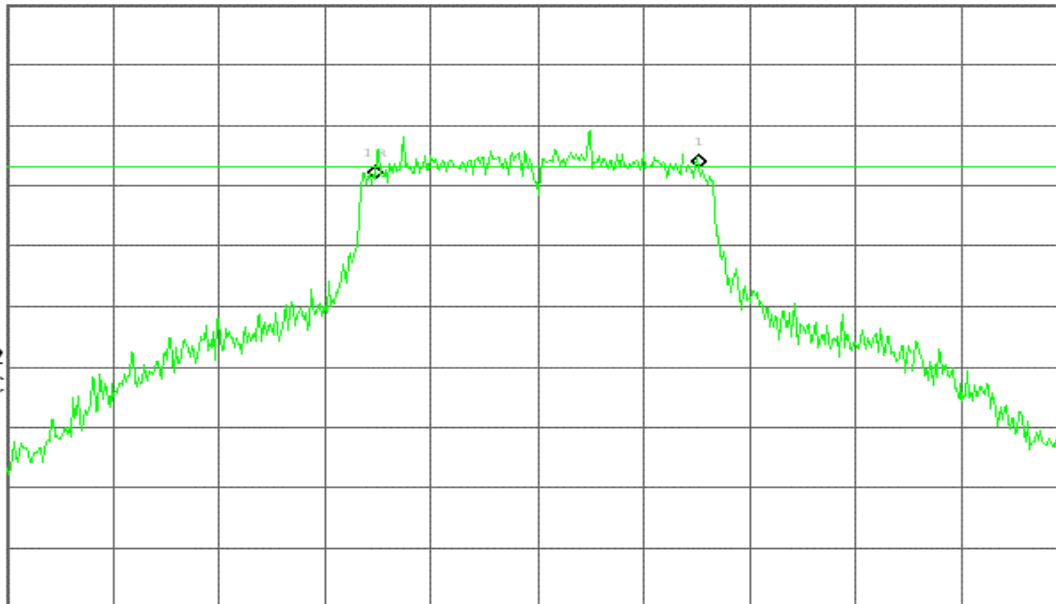

Center 2.412 00 GHz

Span 50 MHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 6.04 ms (601 pts)



6dB Bandwidth (IEEE 802.11g / CH Mid)

Agilent 17:55:19 Mar 18, 2006

R L

6dB BW, g Mode Mid Ch.

Δ Mkr1 16.33 MHz

Ref 20 dBm

Atten 20 dB

0.51 dB

#Peak

Log

10

dB/

Offst

11

dB

DI

-7.3

dBm

LgAv


V1 S2

S3 FC

$\alpha(f)$:

FTun

Swp

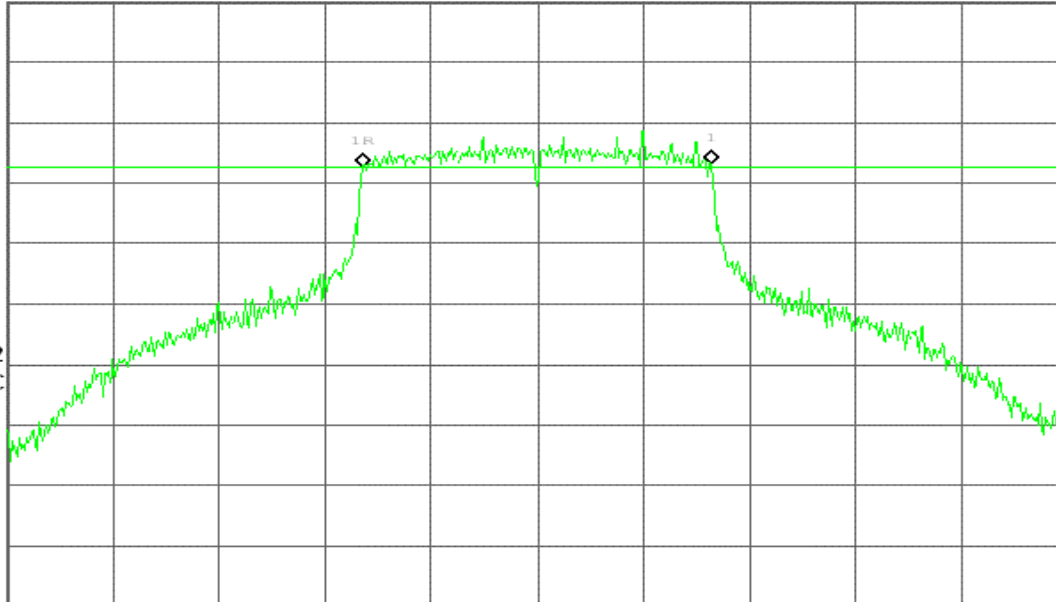

Center 2.437 00 GHz

Span 50 MHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 21.32 ms (601 pts)

6dB Bandwidth (IEEE 802.11g / CH High)

Agilent 18:00:20 Mar 18, 2006

R L

6dB BW, g Mode High Ch.

Δ Mkr1 16.17 MHz

Ref 20 dBm

Atten 20 dB

0.89 dB

#Peak

Log

10

dB/

Offst

11

dB

DI

-7.0

dBm

LgAv


V1 S2

S3 FC

$\alpha(f)$:

FTun

Swp

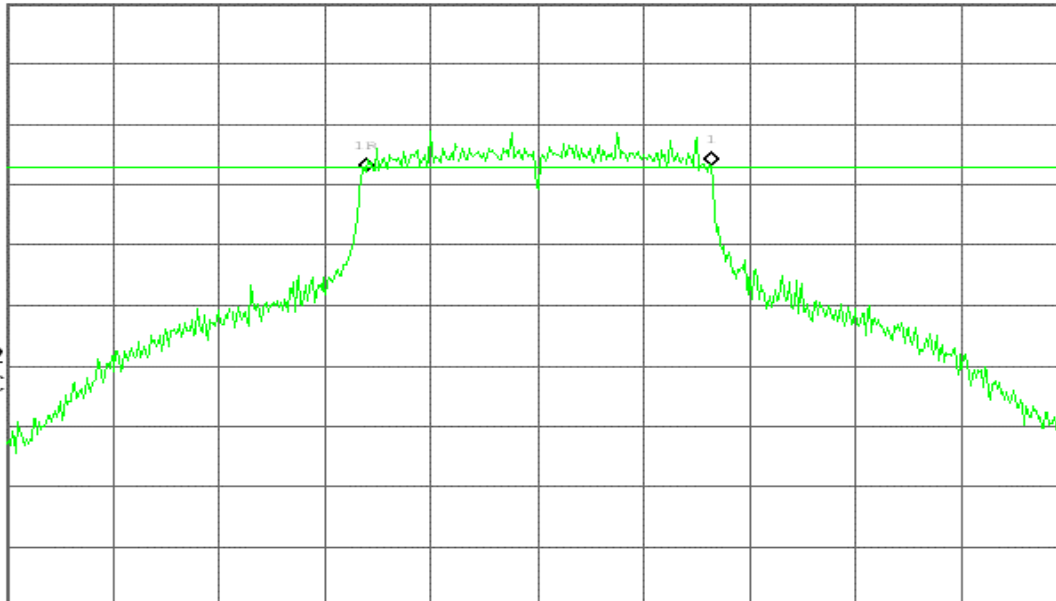

Center 2.462 00 GHz

Span 50 MHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 21.32 ms (601 pts)




7.2 PEAK POWER

LIMIT

The maximum peak output power of the intentional radiator shall not exceed the following:

1. According to §15.247(b)(3), for systems using digital modulation in the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz: 1 Watt.
2. According to §15.247(b)(4), the conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Test Configuration



TEST PROCEDURE

The transmitter output is connected to the Spectrum analyzer. The Spectrum analyzer is set to the peak power detection.

TEST RESULTS

No non-compliance noted

Test Data

IEEE 802.11b

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)	Limit (W)	Test Result
Low	2412	14.66	0.0292	1	PASS
Mid	2437	15.02	0.0318		PASS
High	2462	15.06	0.0321		PASS

IEEE 802.11g

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)	Limit (W)	Test Result
Low	2412	13.92	0.0247	1	PASS
Mid	2437	13.99	0.0251		PASS
High	2462	14.15	0.0260		PASS



Test Plot

Peak Power (IEEE 802.11b / CH Low)


Agilent 18:13:15 Mar 18, 2006

R L

Peak Output Power, b Mode Low Ch.

Ref 20 dBm

Atten 20 dB

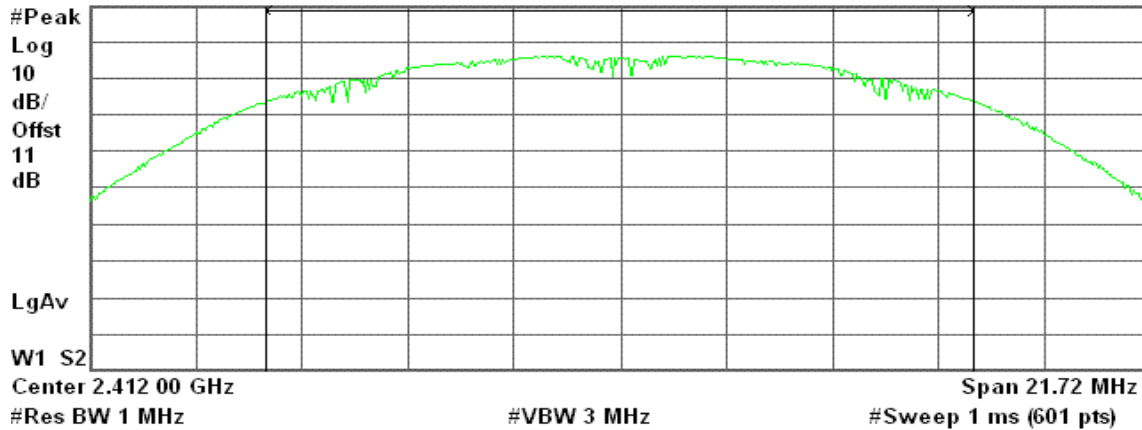

Channel Power

14.66 dBm / 14.4770 MHz

Power Spectral Density

-56.95 dBm/Hz

Peak Power (IEEE 802.11b / CH Mid)


Agilent 18:14:29 Mar 18, 2006

R L

Peak Output Power, b Mode Mid Ch.

Ref 20 dBm

Atten 20 dB

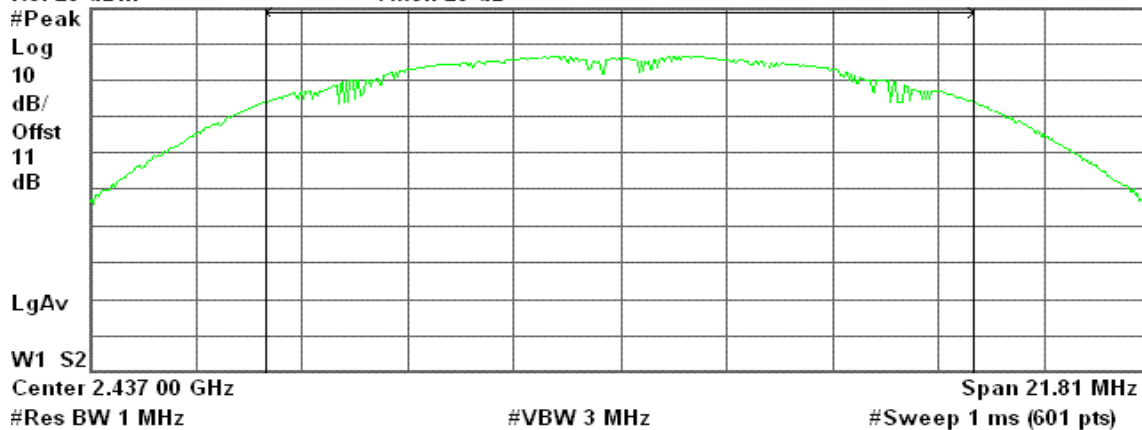

Channel Power

15.02 dBm / 14.5370 MHz

Power Spectral Density

-56.60 dBm/Hz



Peak Power (IEEE 802.11b / CH High)


Agilent 18:15:51 Mar 18, 2006

R L

Peak Output Power, b Mode High Ch.

Ref 20 dBm

Atten 20 dB

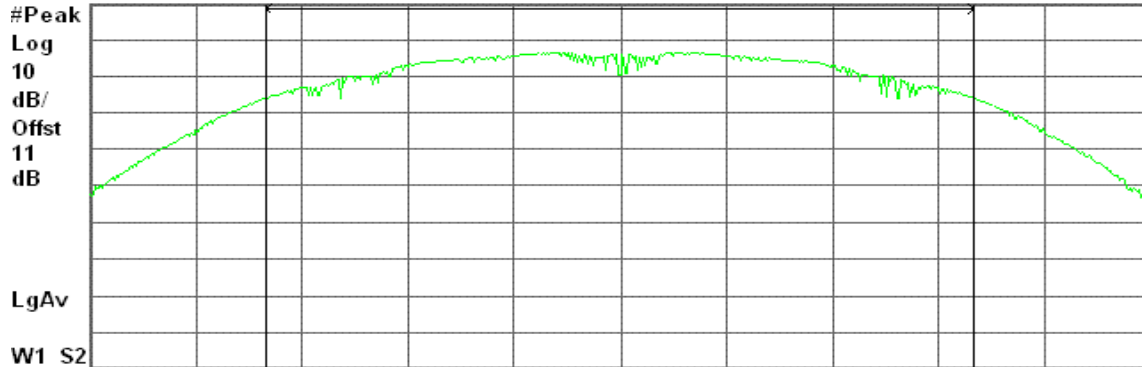

Center 2.462 00 GHz

Span 21.84 MHz

#Res BW 1 MHz

#VBW 3 MHz

#Sweep 1 ms (601 pts)

Channel Power

Power Spectral Density

15.06 dBm / 14.5600 MHz

-56.57 dBm/Hz

Peak Power (IEEE 802.11g / CH Low)


Agilent 18:10:27 Mar 18, 2006

R L

Peak Output Power, g Mode Low Ch.

Ref 20 dBm

Atten 20 dB

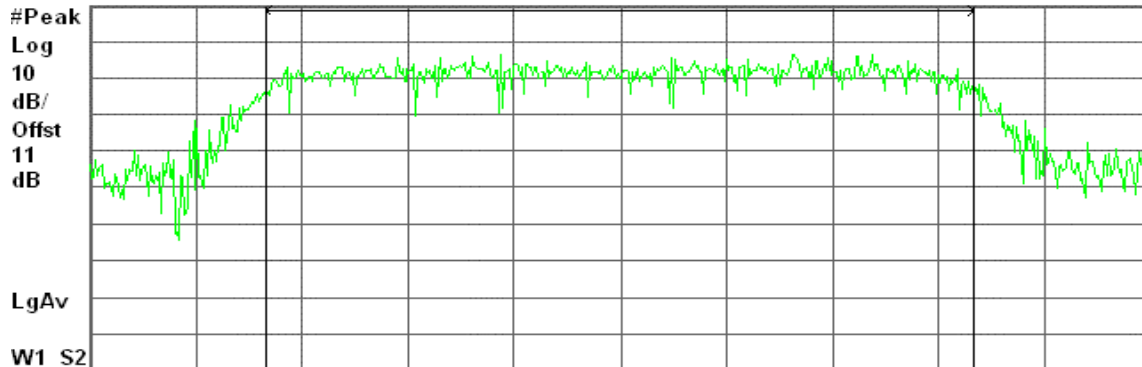

Center 2.412 00 GHz

Span 24.84 MHz

#Res BW 1 MHz

#VBW 3 MHz

#Sweep 1 ms (601 pts)

Channel Power

Power Spectral Density

13.92 dBm / 16.5610 MHz

-58.27 dBm/Hz



Peak Power (IEEE 802.11g / CH Mid)


Agilent 18:09:44 Mar 18, 2006

R L

Peak Output Power , g Mode Mid Ch.

Ref 20 dBm

Atten 20 dB

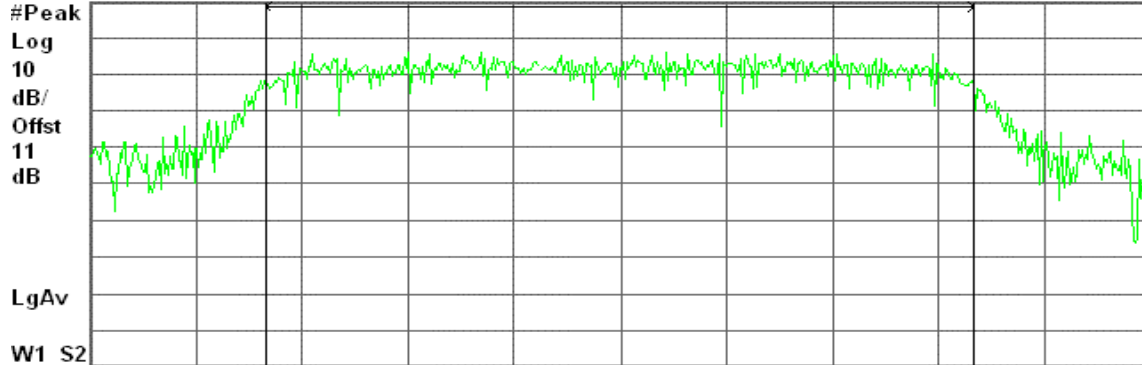

Center 2.437 00 GHz

Span 24.88 MHz

#Res BW 1 MHz

#VBW 3 MHz

#Sweep 1 ms (601 pts)

Channel Power

Power Spectral Density

13.99 dBm / 16.5880 MHz

-58.20 dBm/Hz

Peak Power (IEEE 802.11g / CH High)

Agilent 18:02:16 Mar 18, 2006

R L

Peak Output Power , g Mode High Ch.

Ref 20 dBm

Atten 20 dB



Center 2.462 00 GHz

Span 25.02 MHz

#Res BW 1 MHz

#VBW 3 MHz

#Sweep 1 ms (601 pts)

Channel Power

Power Spectral Density

14.15 dBm / 16.6770 MHz

-58.07 dBm/Hz




7.3 AVERAGE POWER

LIMIT

None; for reporting purposes only.

Test Configuration

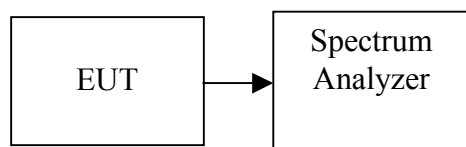

TEST PROCEDURE

The transmitter output is connected to the Spectrum analyzer. The Spectrum analyzer is set to the average power detection.

TEST RESULTS

No non-compliance noted.

Test Data

IEEE 802.11b

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)
Low	2412	12.12	0.0163
Mid	2437	12.25	0.0168
High	2462	12.45	0.0176

IEEE 802.11g


Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)
Low	2412	10.24	0.0106
Mid	2437	10.56	0.0114
High	2462	10.84	0.0121




Test Plot

IEEE 802.11b

CH Low

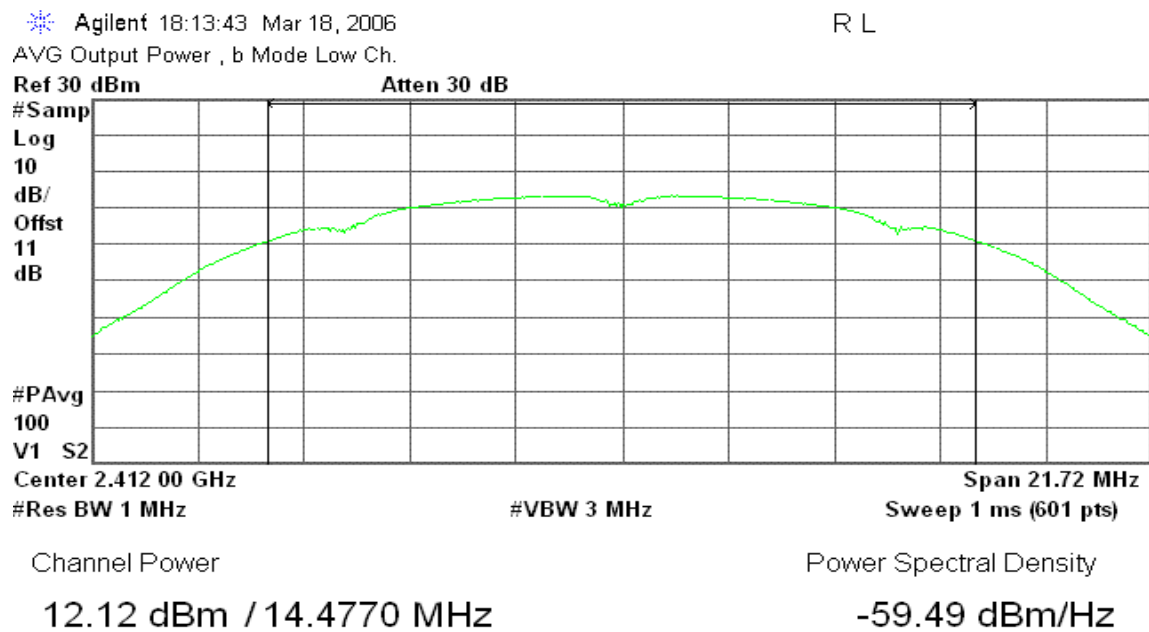

CH Mid

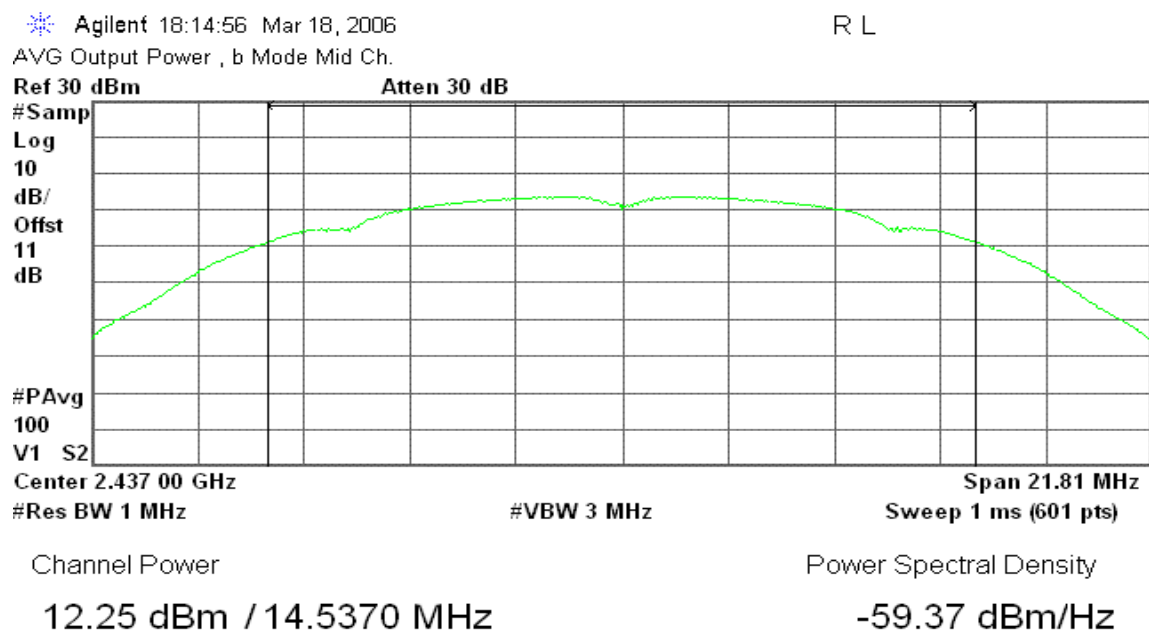



CH High

Agilent 18:16:21 Mar 18, 2006

R L

AVG Output Power, b Mode High Ch.

Ref 30 dBm

Atten 30 dB

#Samp

Log

10

dB/

Offst

11

dB

#PAvg

100

V1 S2

Center 2.462 00 GHz

#Res BW 1 MHz

#VBW 3 MHz

Span 21.84 MHz

Sweep 1 ms (601 pts)

Channel Power

12.45 dBm / 14.5600 MHz

Power Spectral Density

-59.18 dBm/Hz

IEEE 802.11g

CH Low

Agilent 18:11:00 Mar 18, 2006

R L

AVG Output Power, g Mode Low Ch.

Ref 30 dBm

Atten 30 dB

#Samp

Log

10

dB/

Offst

11

dB

#PAvg

100

V1 S2

Center 2.412 00 GHz

#Res BW 1 MHz

#VBW 3 MHz

Span 24.84 MHz

Sweep 1 ms (601 pts)

Channel Power

10.24 dBm / 16.5610 MHz

Power Spectral Density

-61.95 dBm/Hz



CH Mid


Agilent 18:09:17 Mar 18, 2006

R L

AVG Output Power , g Mode Mid Ch.

Ref 30 dBm

Atten 30 dB

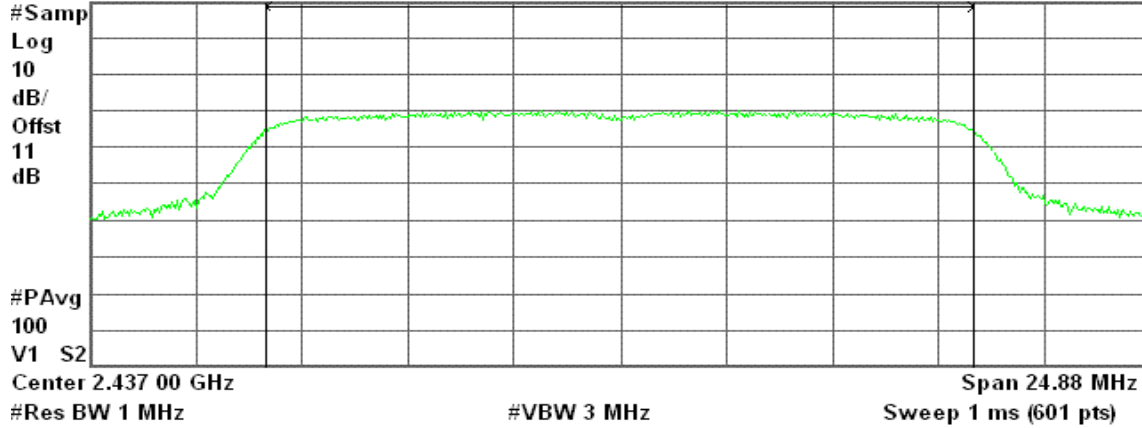

Channel Power

Power Spectral Density

10.56 dBm / 16.5880 MHz

-61.64 dBm/Hz

CH High


Agilent 18:08:33 Mar 18, 2006

R L

AVG Output Power , g Mode High Ch.

Ref 30 dBm

Atten 30 dB

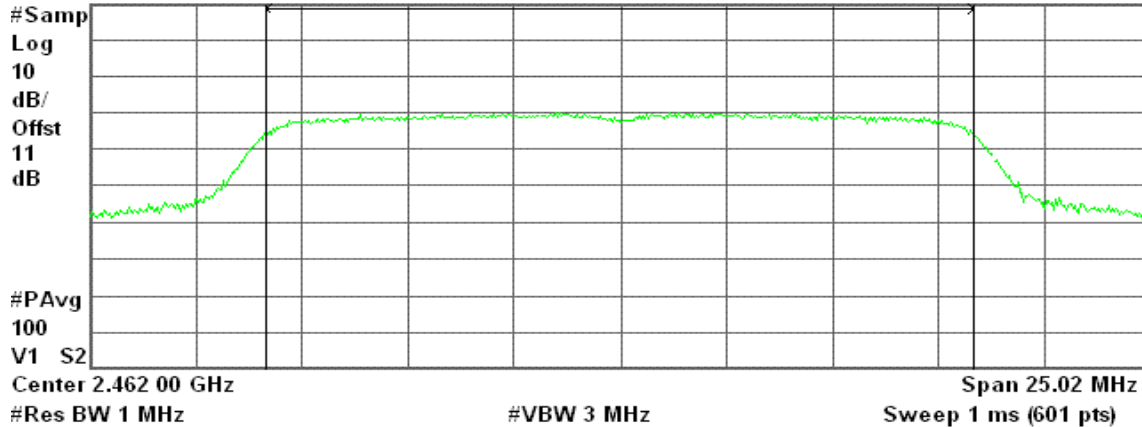

Channel Power

Power Spectral Density

10.84 dBm / 16.6770 MHz


-61.38 dBm/Hz

7.4 BAND EDGES MEASUREMENT

LIMIT

According to §15.247(d), in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a) (see Section 15.205(c)).

Test Configuration

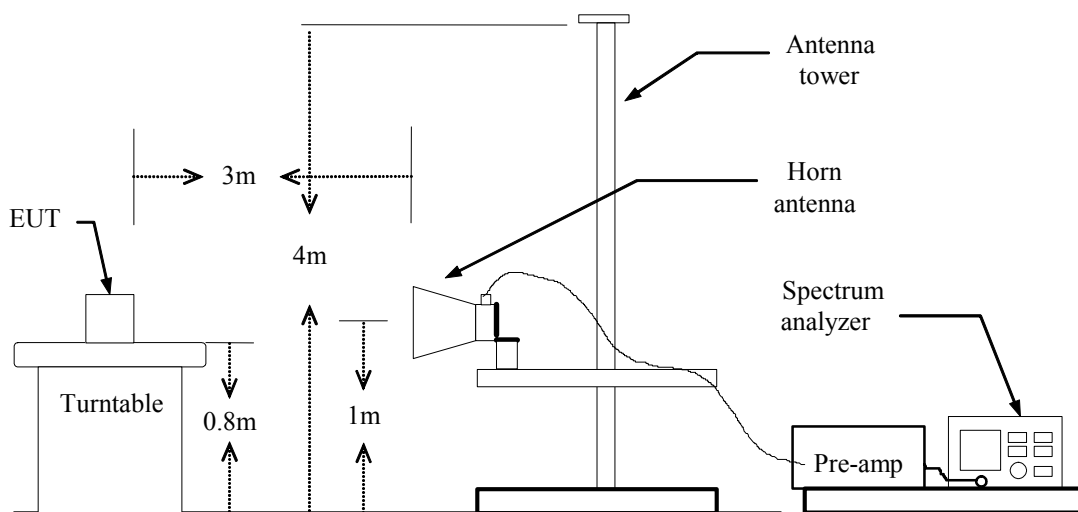

TEST PROCEDURE

1. The EUT is placed on a turntable, which is 0.8m above the ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.
4. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission:
 - (a) PEAK: RBW=VBW=1MHz / Sweep=AUTO
 - (b) AVERAGE: RBW=1MHz / VBW=10Hz / Sweep=AUTO
5. Repeat the procedures until all the PEAK and AVERAGE versus POLARIZATION are measured.

TEST RESULTS

Refer to attach spectrum analyzer data chart.




Band Edges (IEEE 802.11b / CH Low)

Detector mode: Peak

Polarity: Vertical

Agilent 11:04:30 Mar 18, 2006

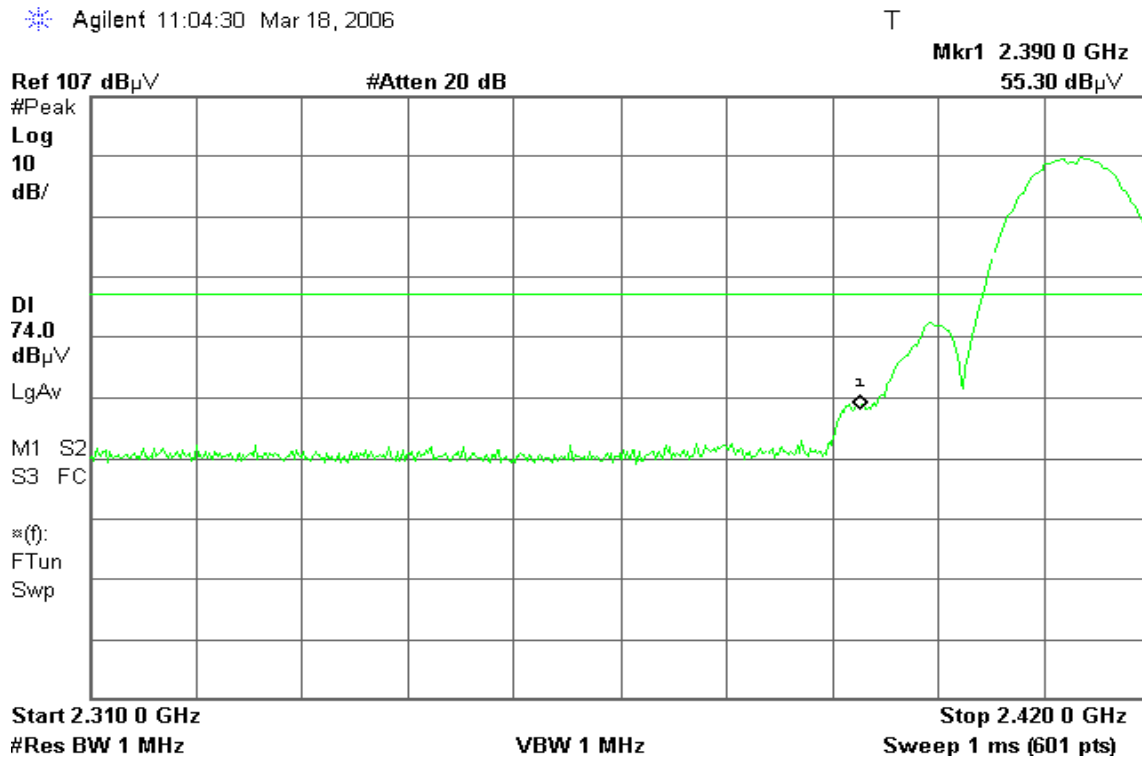

Detector mode: Average

Polarity: Vertical

Agilent 11:03:45 Mar 18, 2006






Detector mode: Peak

Polarity: Horizontal

Agilent 10:43:56 Mar 18, 2006

T

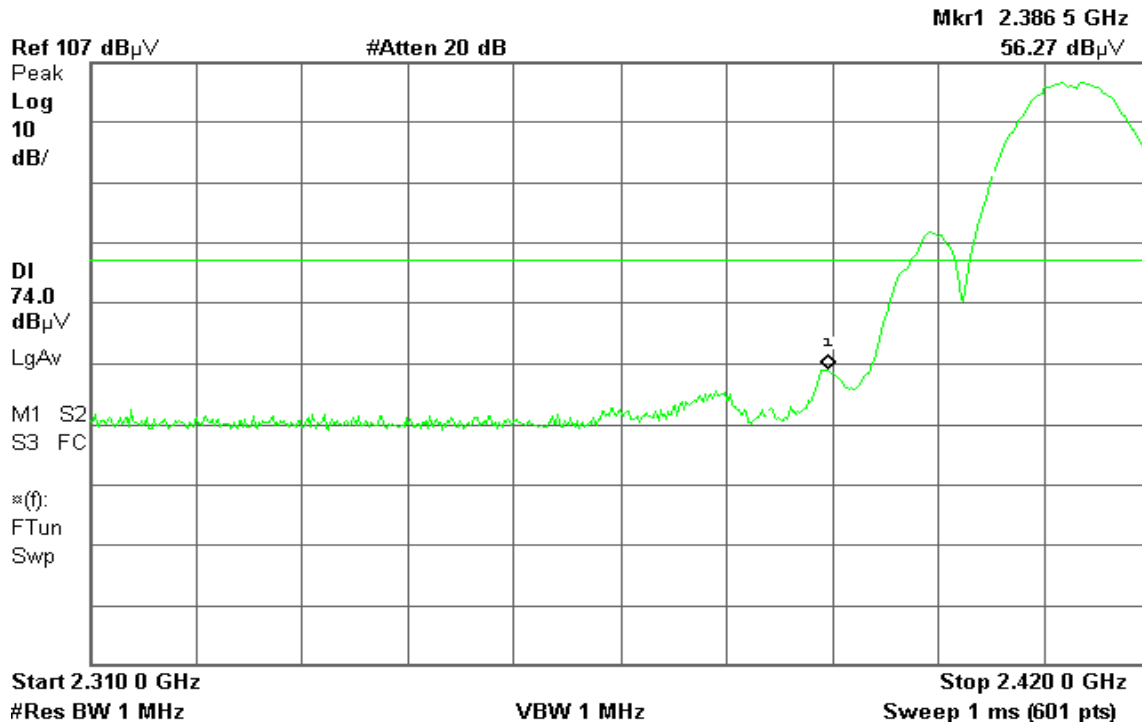


Detector mode: Average

Polarity: Horizontal

Agilent 10:43:29 Mar 18, 2006

T

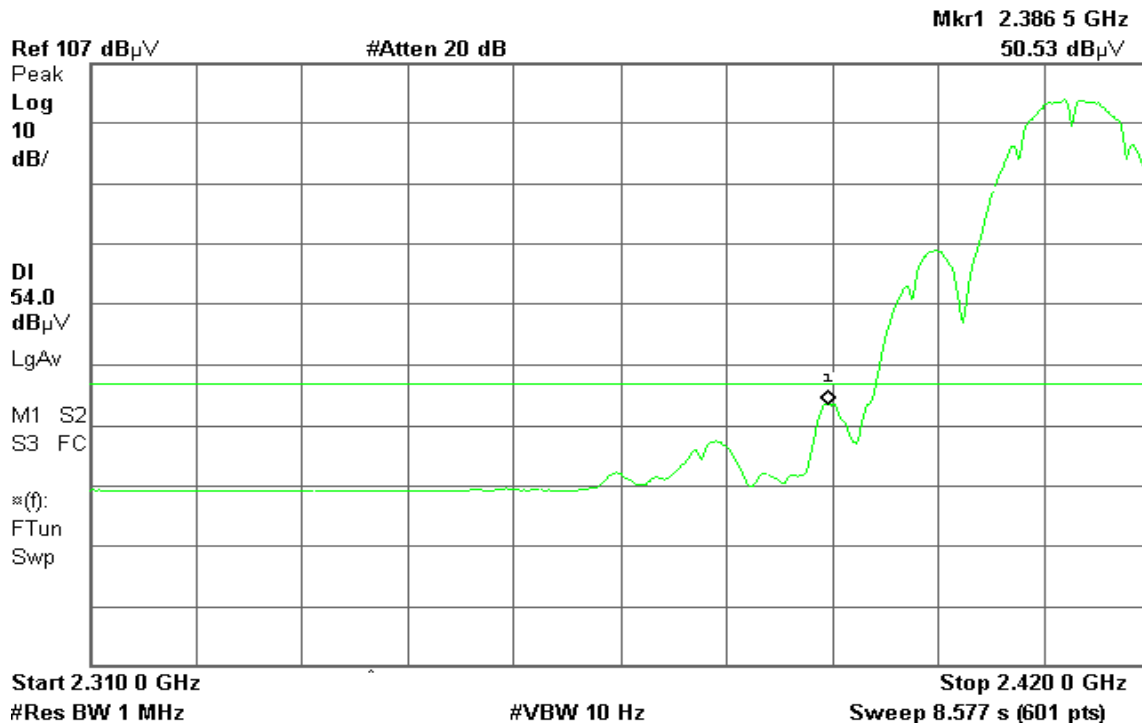




Band Edges (IEEE 802.11b / CH High)

Detector mode: Peak

Polarity: Vertical

Agilent 10:55:58 Mar 18, 2006

T

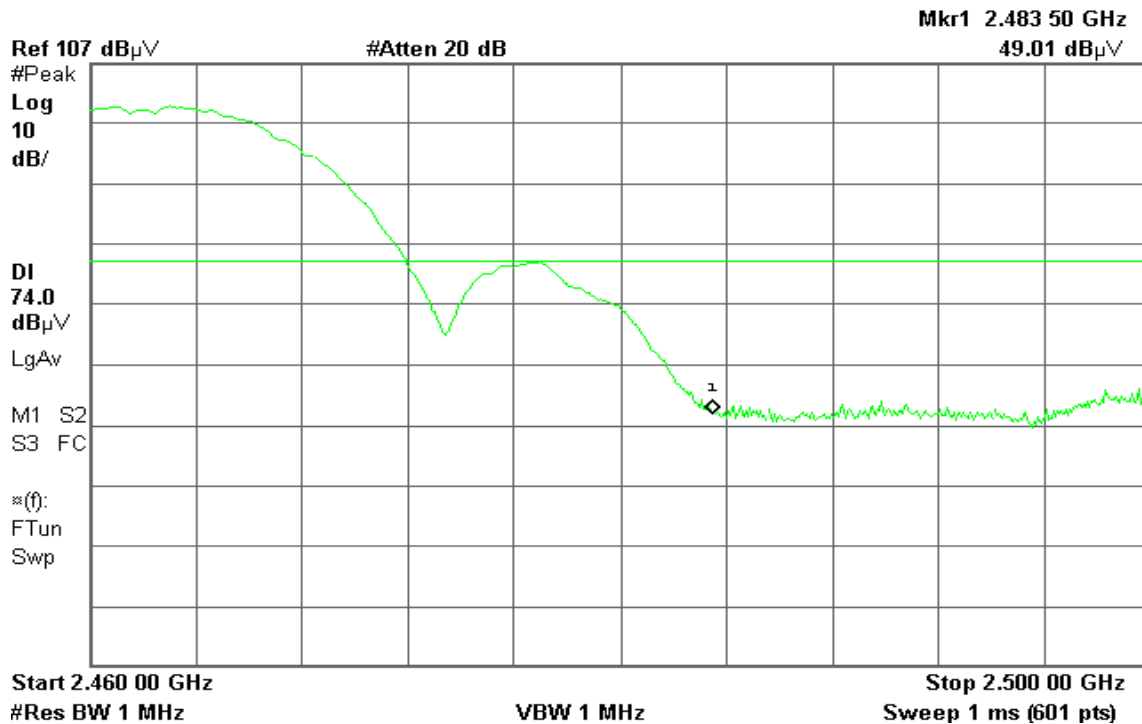


Detector mode: Average

Polarity: Vertical

Agilent 10:55:37 Mar 18, 2006

T

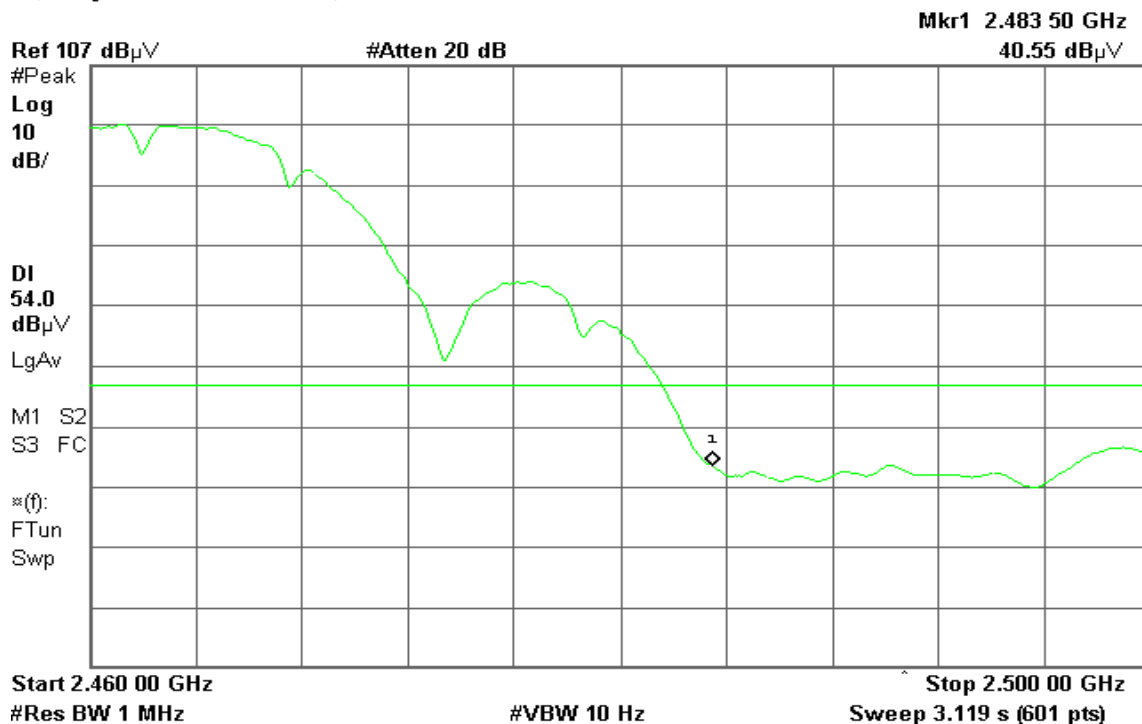




Detector mode: Peak

Polarity: Horizontal

Agilent 10:49:47 Mar 18, 2006

T

Mkr1 2.486 70 GHz
51.60 dB μ V

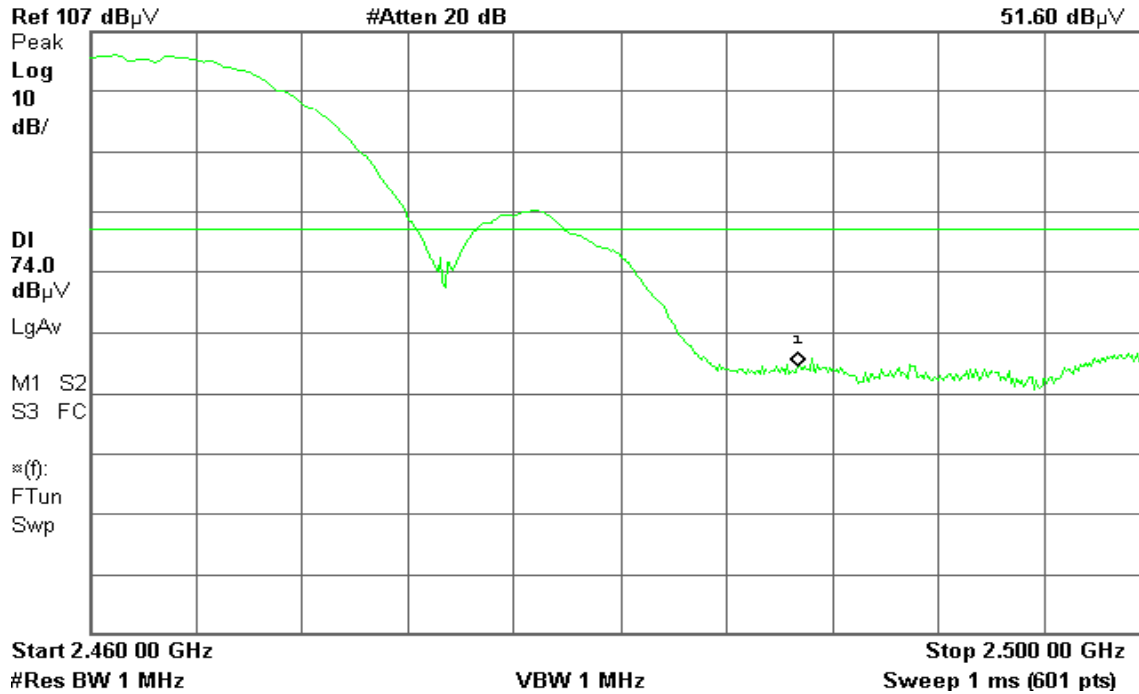


Detector mode: Average

Polarity: Horizontal

Agilent 10:49:25 Mar 18, 2006

T

Mkr1 2.486 70 GHz
44.41 dB μ V

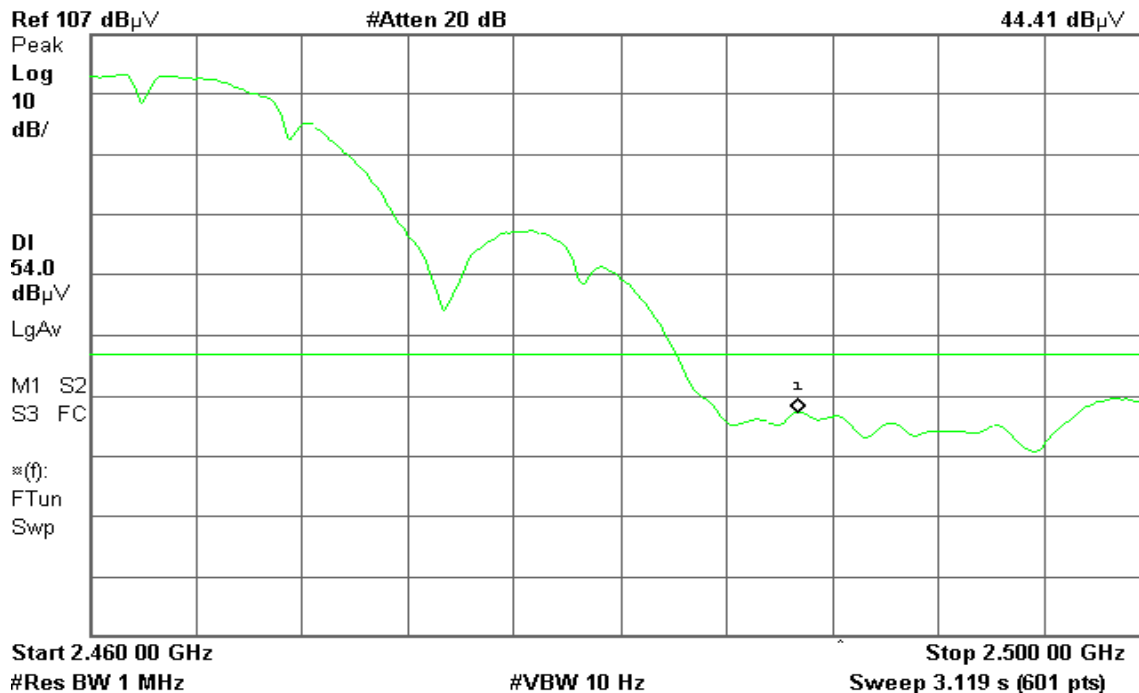




Band Edges (IEEE 802.11g / CH Low)

Detector mode: Peak

Polarity: Vertical

Agilent 11:00:15 Mar 18, 2006

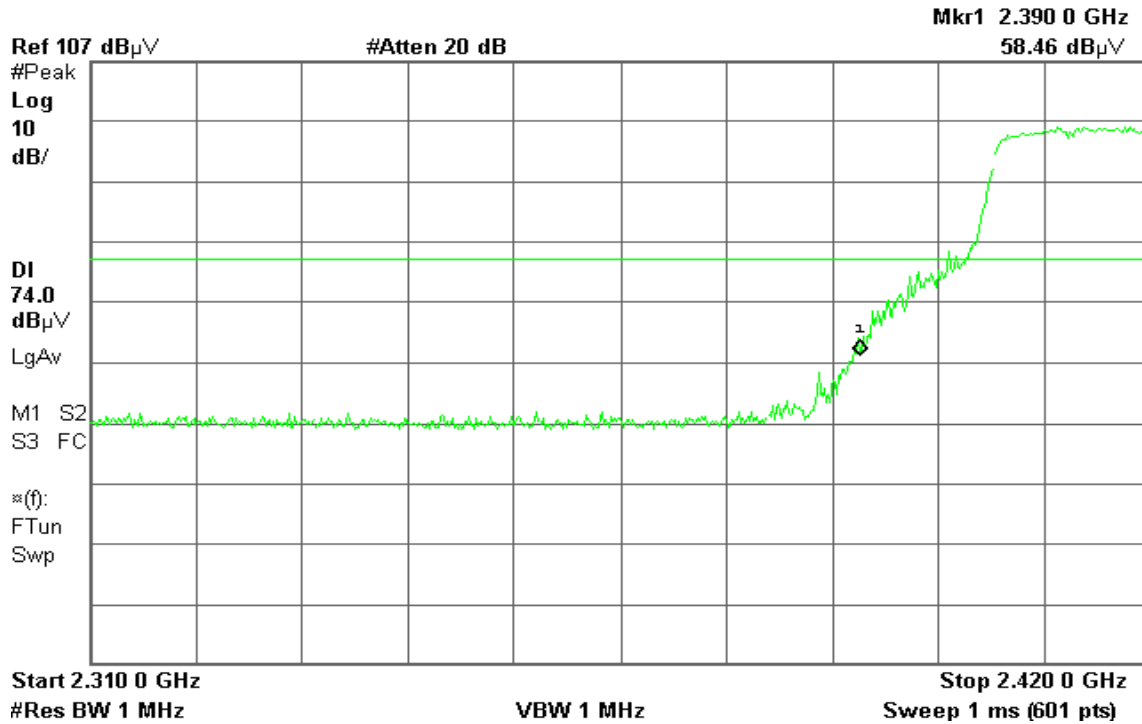

Detector mode: Average

Polarity: Vertical

Agilent 11:00:41 Mar 18, 2006






Detector mode: Peak

Polarity: Horizontal

Agilent 15:05:29 Mar 18, 2006

T

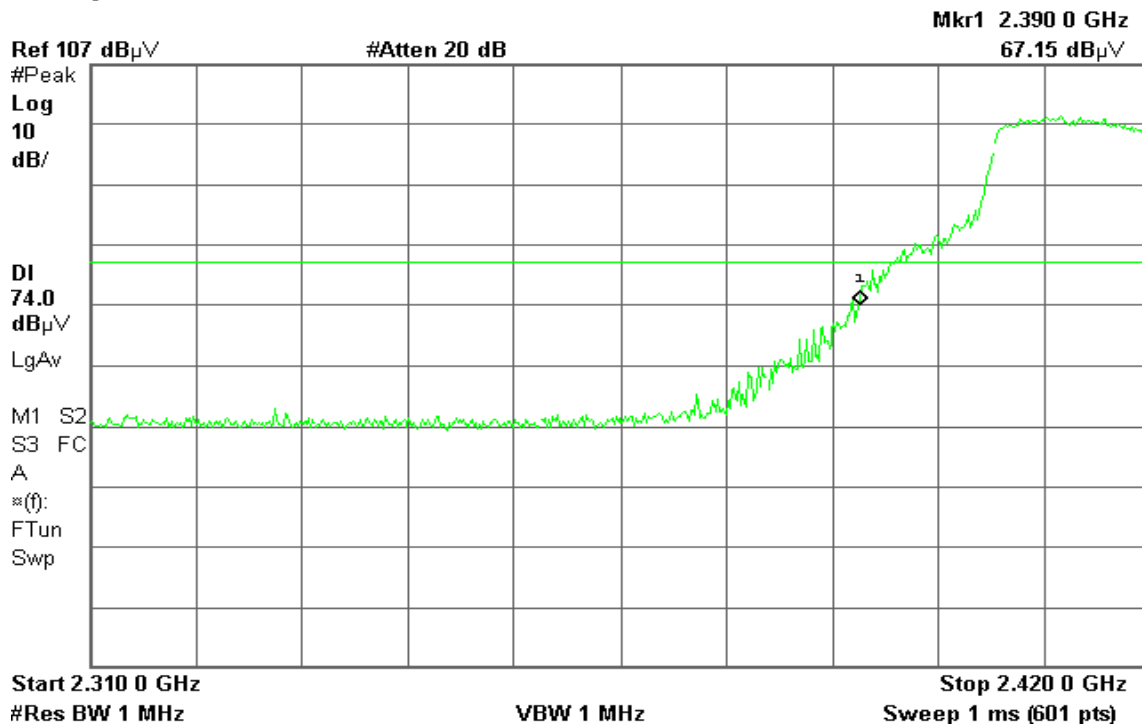

Detector mode: Average

Polarity: Horizontal

Agilent 15:05:01 Mar 18, 2006

T






Band Edges (IEEE 802.11g / CH High)

Detector mode: Peak

Polarity: Vertical

Agilent 10:58:27 Mar 18, 2006

T

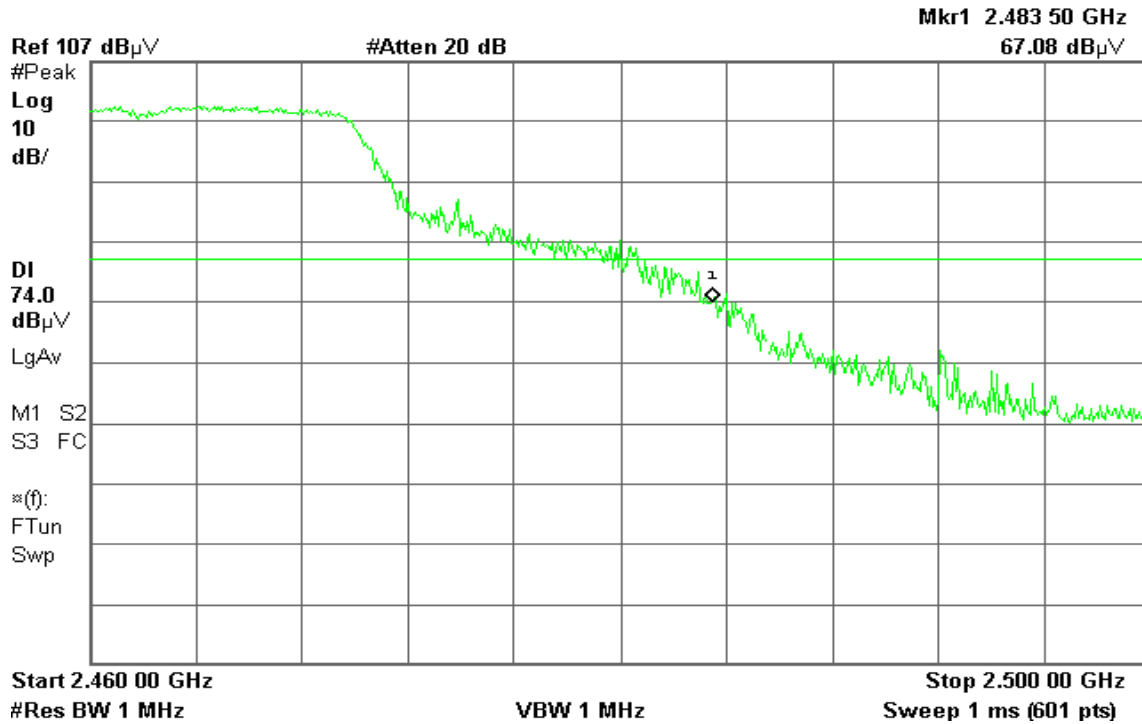


Detector mode: Average

Polarity: Vertical

Agilent 10:58:07 Mar 18, 2006

T

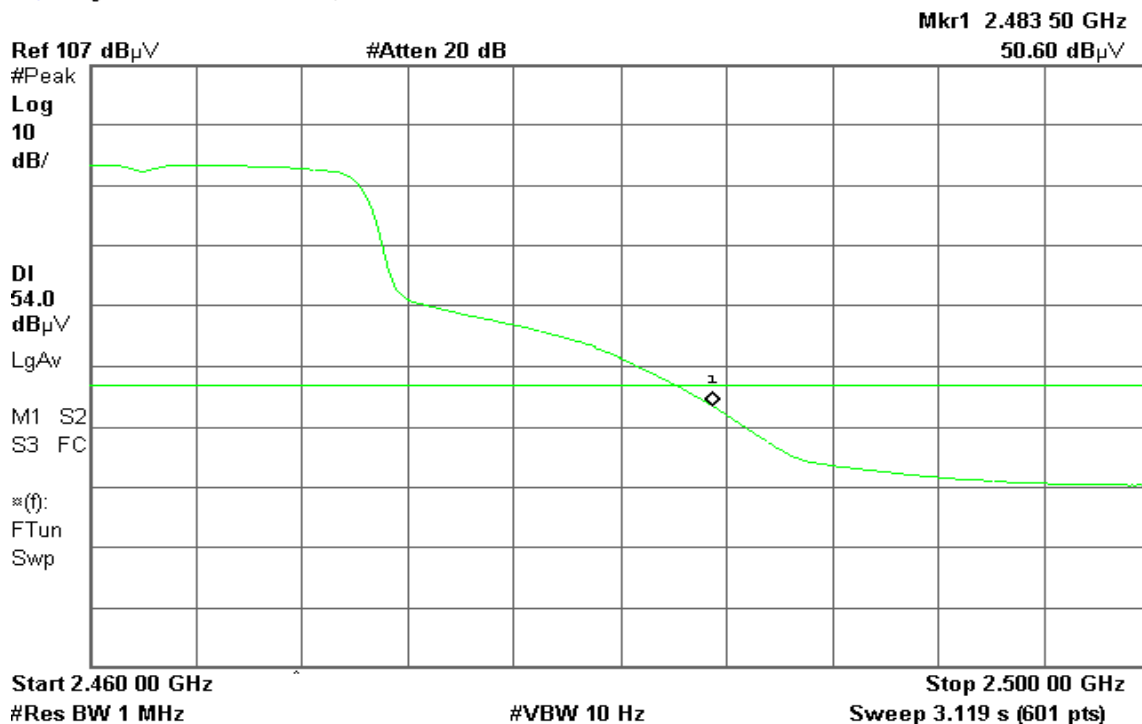




Detector mode: Peak

Polarity: Horizontal

Agilent 10:47:00 Mar 18, 2006

T

Mkr1 2.483 50 GHz
70.14 dB μ V

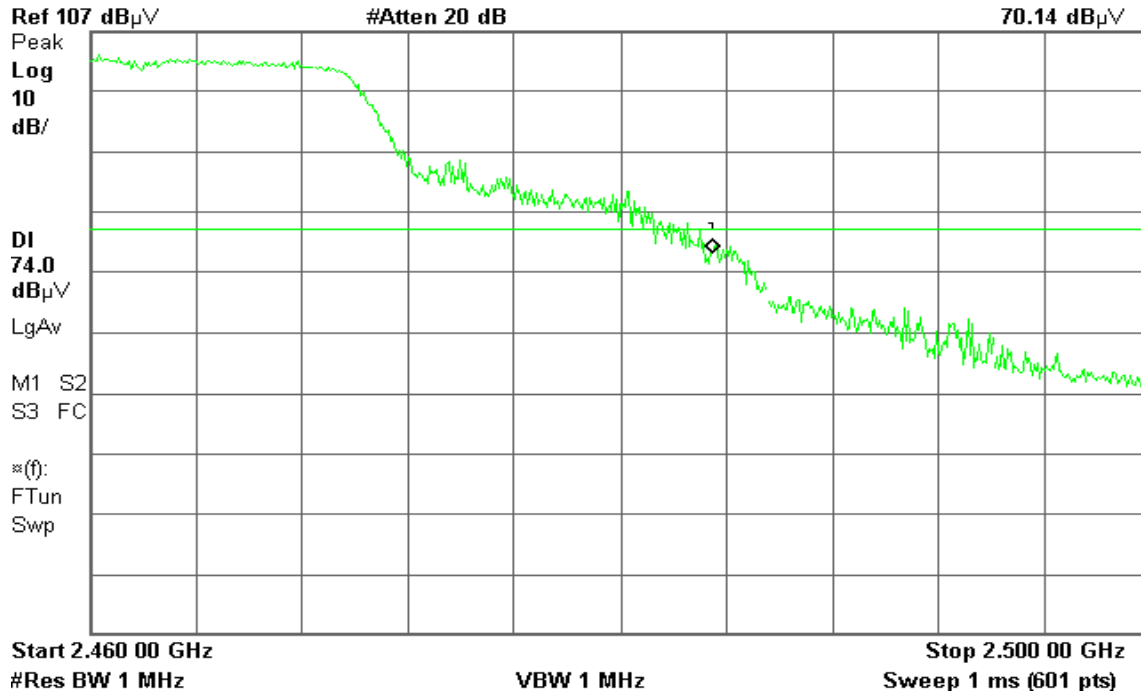


Detector mode: Average

Polarity: Horizontal

Agilent 10:47:21 Mar 18, 2006

T

Mkr1 2.483 50 GHz
52.31 dB μ V

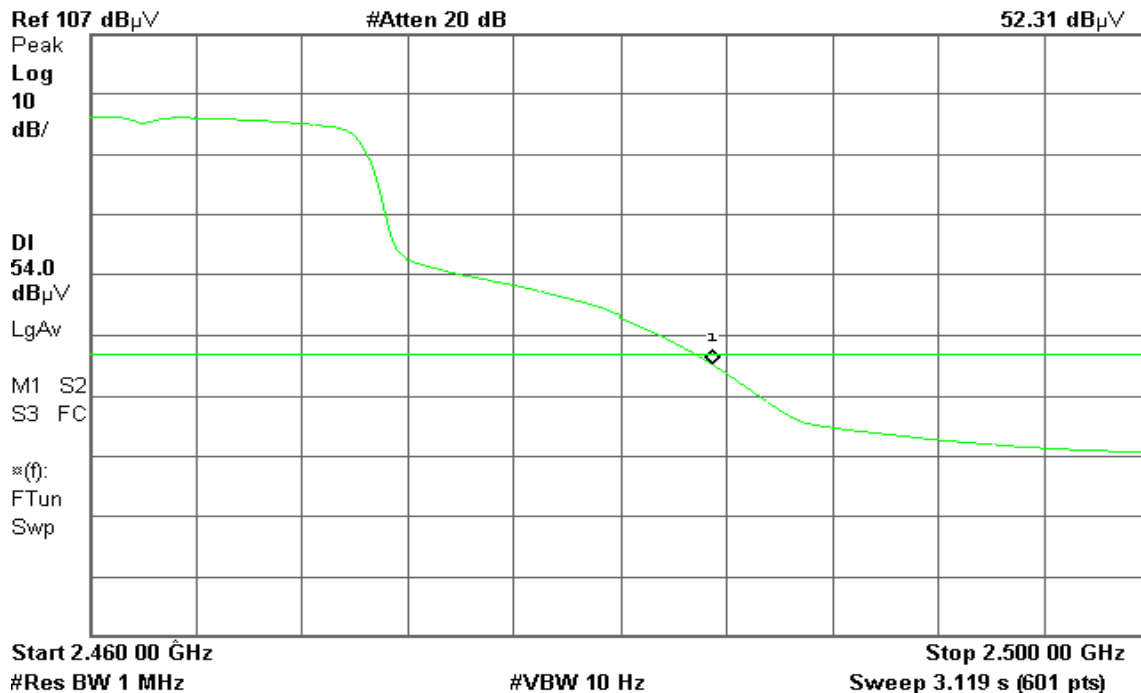




7.5 PEAK POWER SPECTRAL DENSITY

LIMIT

1. According to §15.247(e), for digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.
2. According to §15.247(f), the digital modulation operation of the hybrid system, with the frequency hopping turned off, shall comply with the power density requirements of paragraph (d) of this section.

Test Configuration



TEST PROCEDURE

1. Place the EUT on the table and set it in transmitting mode.
Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
2. Set the spectrum analyzer as RBW = 3kHz, VBW = 10kHz, Span = 300kHz, Sweep=100s
3. Record the max. reading.
4. Repeat the above procedure until the measurements for all frequencies are completed.

TEST RESULTS

No non-compliance noted

Test Data

IEEE 802.11b

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Test Result
Low	2412	-8.20	8.00	PASS
Mid	2437	-6.75		PASS
High	2462	-9.80		PASS


IEEE 802.11g

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Test Result
Low	2412	-14.16	8.00	PASS
Mid	2437	-14.29		PASS
High	2462	-13.84		PASS




Test Plot

PPSD (IEEE 802.11b / CH Low)

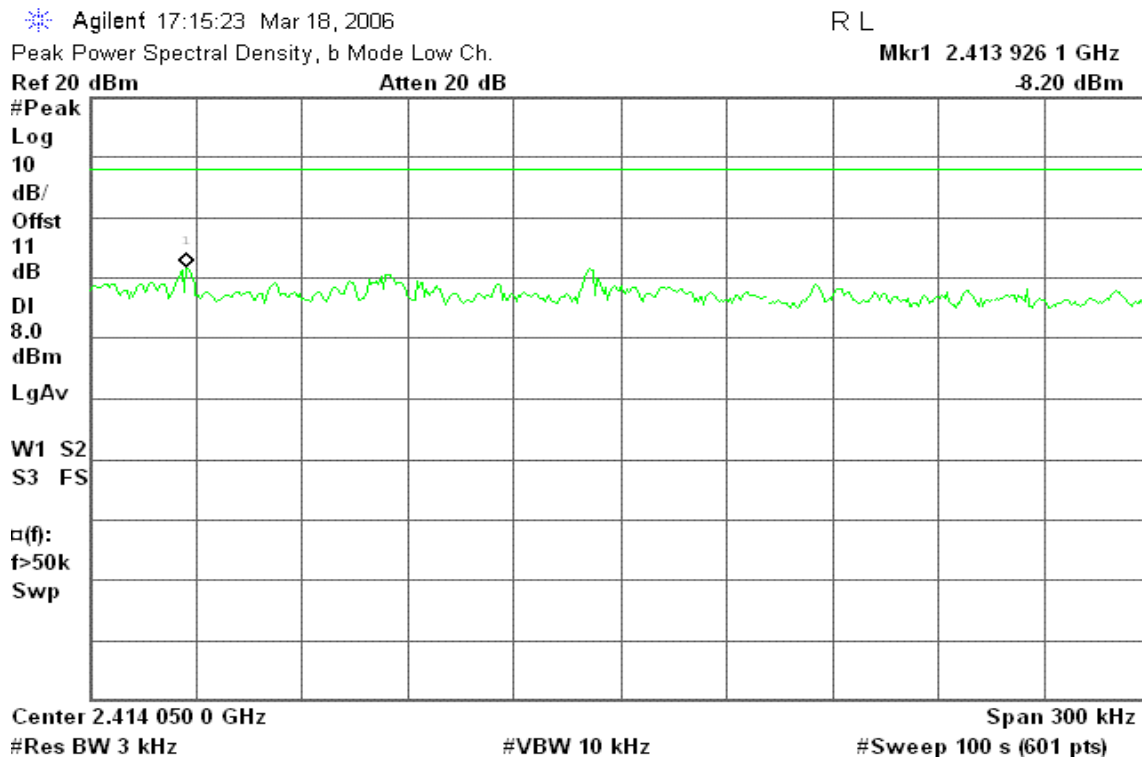


PPSD (IEEE 802.11b / CH Mid)

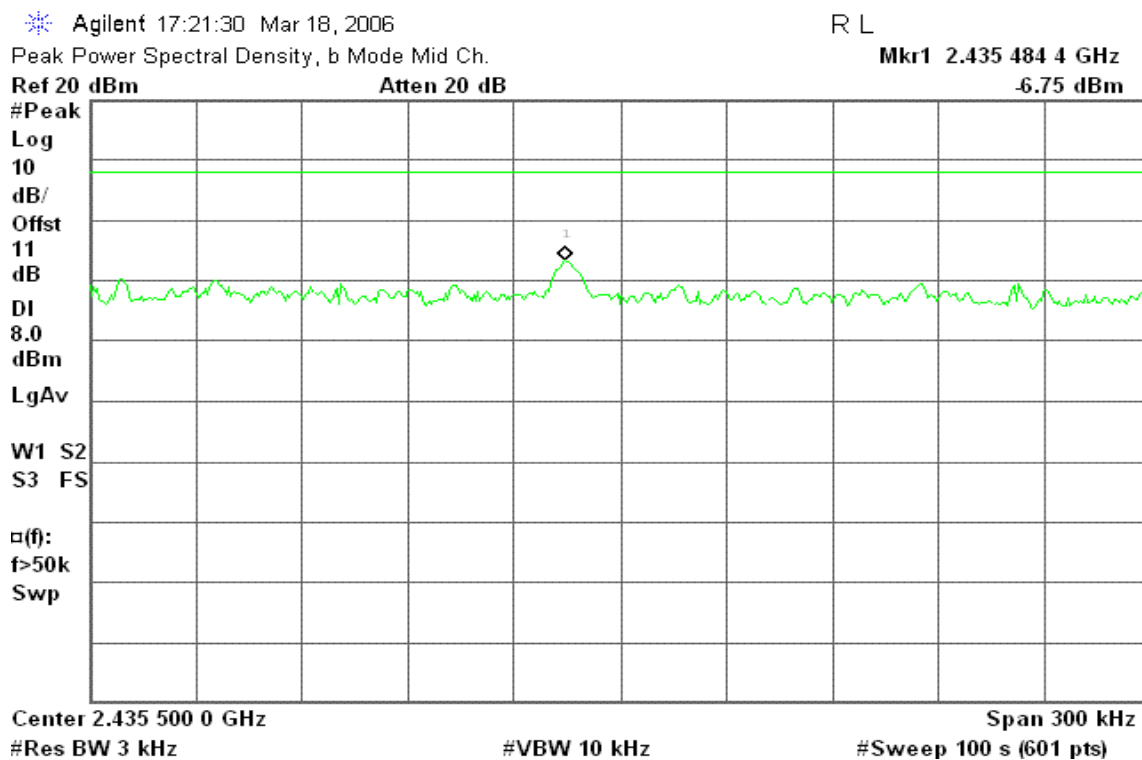




PPSD (IEEE 802.11b / CH High)

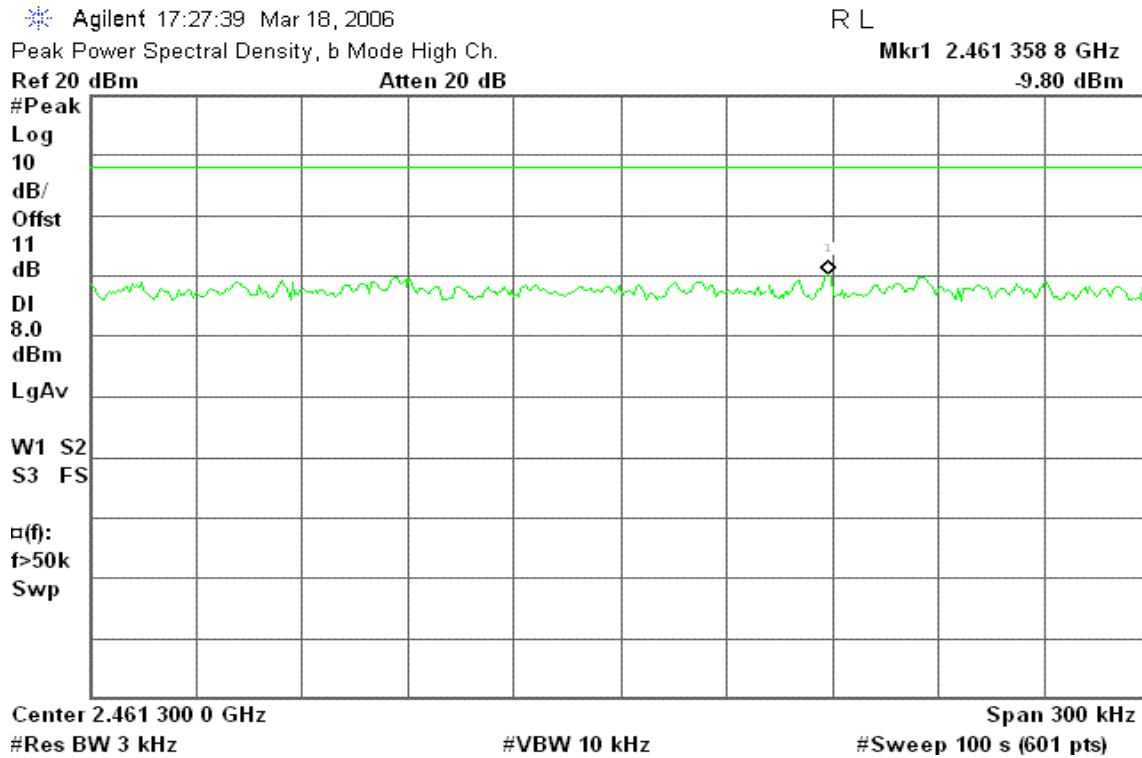

PPSD (IEEE 802.11g / CH Low)

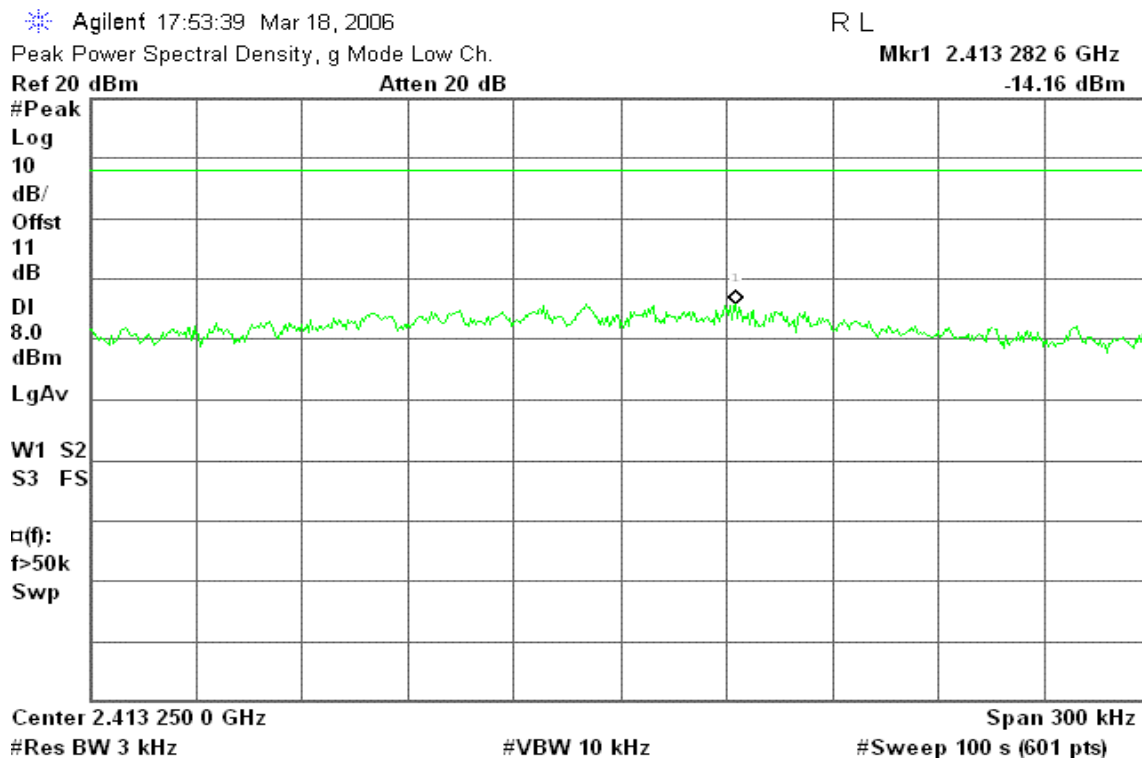



PPSD (IEEE 802.11g / CH Mid)

Agilent 17:58:43 Mar 18, 2006

R L

Peak Power Spectral Density, g Mode Mid Ch.

Mkr1 2.434 451 7 GHz

Ref 20 dBm

Atten 20 dB

-14.29 dBm

#Peak

Log

10

dB/

Offst

11

dB

DI

8.0

dBm

LgAv

W1 S2

S3 FS

$\alpha(f)$:

f>50k

Swp

Center 2.434 500 0 GHz

Span 300 kHz

#Res BW 3 kHz

#VBW 10 kHz

#Sweep 100 s (601 pts)

PPSD (IEEE 802.11g / CH High)

Agilent 18:06:55 Mar 18, 2006

R L

Peak Power Spectral Density, g Mode High Ch.

Mkr1 2.466 989 5 GHz

Ref 20 dBm

Atten 20 dB

-13.84 dBm

#Peak

Log

10

dB/

Offst

11

dB

DI

8.0

dBm

LgAv

W1 S2

S3 FS

$\alpha(f)$:

f>50k

Swp

Center 2.467 000 0 GHz

Span 300 kHz

#Res BW 3 kHz

#VBW 10 kHz

#Sweep 100 s (601 pts)




7.6 SPURIOUS EMISSIONS

7.6.1 Conducted Measurement

LIMIT

According to §15.247(d), in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a) (see Section 15.205(c)).

Test Configuration



TEST PROCEDURE

Conducted RF measurements of the transmitter output were made to confirm that the EUT antenna port conducted emissions meet the specified limit and to identify any spurious signals that require further investigation or measurements on the radiated emissions site.

The transmitter output is connected to the spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 100 kHz.

Measurements are made over the 30MHz to 26GHz range with the transmitter set to the lowest, middle, and highest channels.

TEST RESULTS

No non-compliance noted.



Test Plot

IEEE 802.11b / CH Low

Agilent 17:16:40 Mar 18, 2006

L

Spurious, b Mode Low Ch.

Mkr3 7.25 GHz

Ref 20 dBm

Atten 20 dB

-34.66 dBm

#Peak

Log

10

dB/

Offst

11

dB

DI

-18.2

dBm

LgAv

V1 S2

Center 13.02 GHz

Span 25.97 GHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 3.131 s (1001 pts)

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	2.42 GHz	1.82 dBm
2	(1)	Freq	4.83 GHz	-36.37 dBm
3	(1)	Freq	7.25 GHz	-34.66 dBm

IEEE 802.11b / CH Mid

Agilent 17:30:34 Mar 18, 2006

L

Spurious, b Mode Mid Ch.

Mkr2 4.89 GHz

Ref 20 dBm

Atten 20 dB

-37.71 dBm

#Peak

Log

10

dB/

Offst

11

dB

DI

-18.4

dBm

LgAv

V1 S2

Center 13.02 GHz

Span 25.97 GHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 3.131 s (1001 pts)

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	2.45 GHz	1.61 dBm
2	(1)	Freq	4.89 GHz	-37.71 dBm
3	(1)	Freq	7.30 GHz	-37.99 dBm

**IEEE 802.11b / CH High**

Agilent 17:28:46 Mar 18, 2006

L


Spurious, b Mode High Ch.

Mkr2 4.91 GHz

Ref 20 dBm

Atten 20 dB

-37.96 dBm

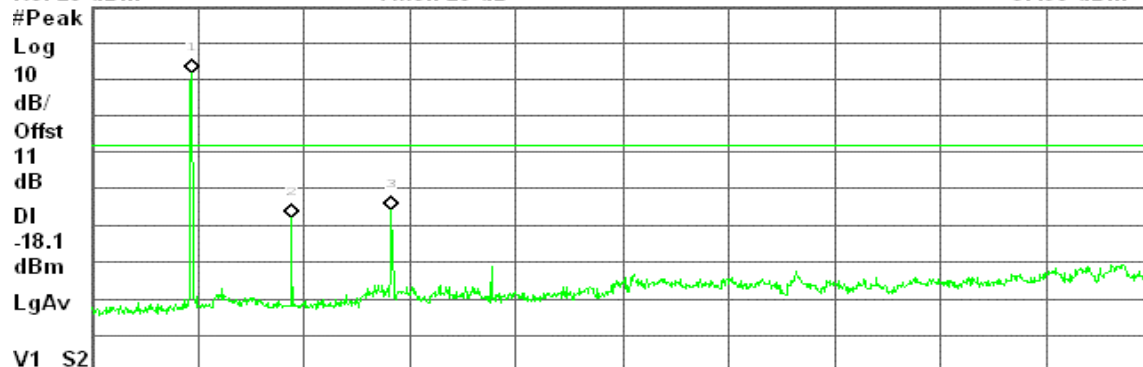

Center 13.02 GHz

Span 25.97 GHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 3.131 s (1001 pts)

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	2.47 GHz	1.87 dBm
2	(1)	Freq	4.91 GHz	-37.96 dBm
3	(1)	Freq	7.38 GHz	-35.91 dBm

IEEE 802.11g / CH Low

Agilent 17:54:39 Mar 18, 2006

R T


Spurious, g Mode Low Ch.

Mkr2 4.81 GHz

Ref 20 dBm

Atten 20 dB

-50.36 dBm

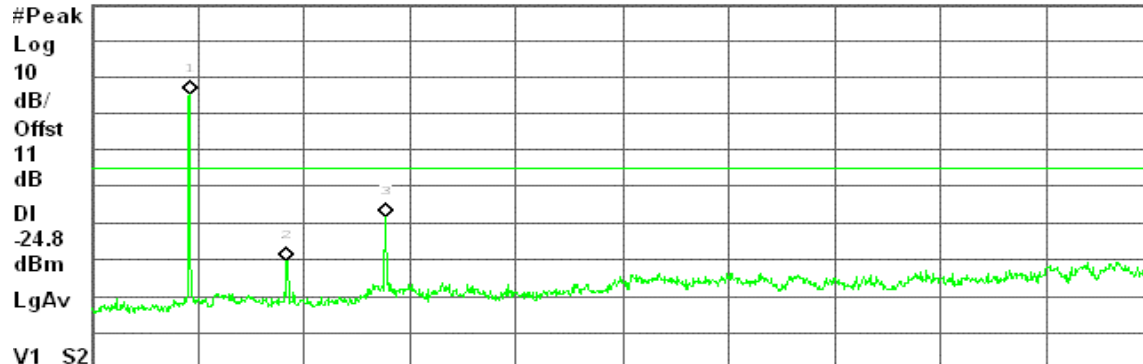

Center 13.02 GHz

Span 25.97 GHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 3.131 s (1001 pts)

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	2.42 GHz	-4.83 dBm
2	(1)	Freq	4.81 GHz	-50.36 dBm
3	(1)	Freq	7.22 GHz	-38.46 dBm

**IEEE 802.11g / CH Mid**

Agilent 17:59:41 Mar 18, 2006

L


Spurious, g Mode Mid Ch.

Mkr2 4.89 GHz

Ref 20 dBm

Atten 20 dB

-51.30 dBm

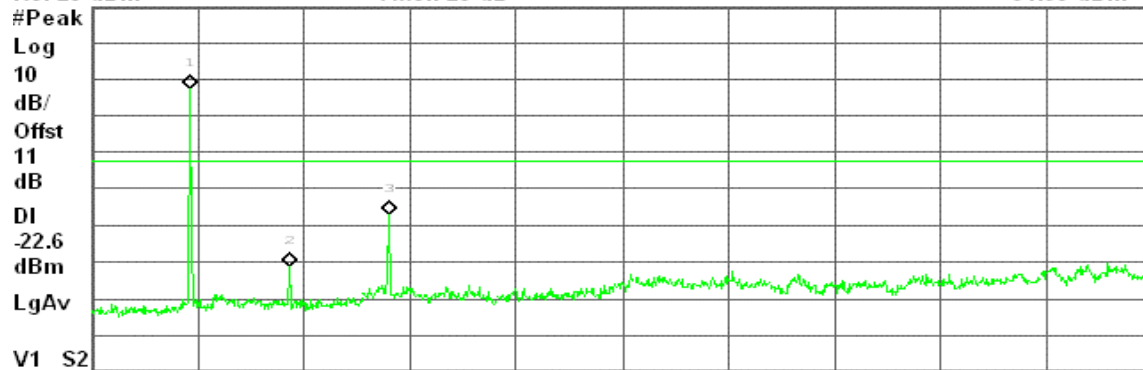

Center 13.02 GHz

Span 25.97 GHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 3.131 s (1001 pts)

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	2.45 GHz	-2.57 dBm
2	(1)	Freq	4.89 GHz	-51.30 dBm
3	(1)	Freq	7.30 GHz	-37.13 dBm

IEEE 802.11g / CH High

Agilent 18:07:51 Mar 18, 2006

L


Spurious, g Mode High Ch.

Mkr2 4.91 GHz

Ref 20 dBm

Atten 20 dB

-52.58 dBm

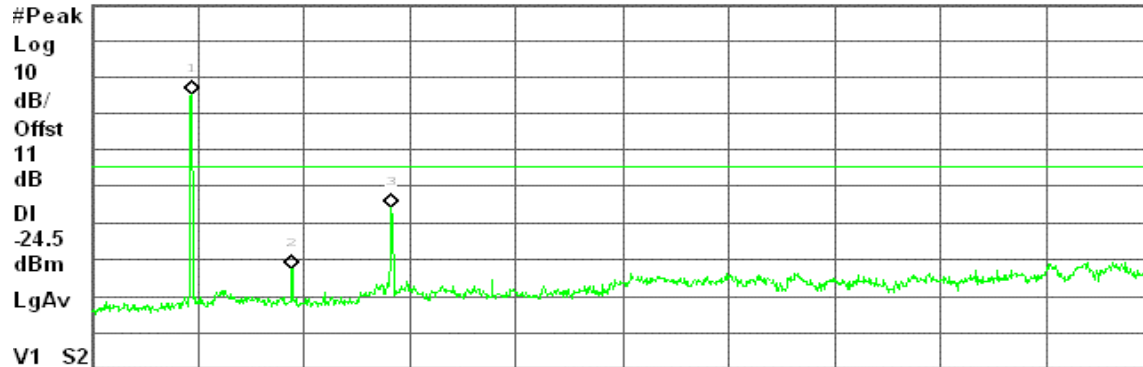

Center 13.02 GHz

Span 25.97 GHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 3.131 s (1001 pts)

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	2.47 GHz	-4.52 dBm
2	(1)	Freq	4.91 GHz	-52.58 dBm
3	(1)	Freq	7.38 GHz	-36.05 dBm



7.6.2 Radiated Emissions

LIMIT

1. According to §15.209(a), except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (μ V/m)	Measurement Distance (m)
30-88	100*	3
88-216	150*	3
216-960	200*	3
Above 960	500	3


Remark: Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

2. In the emission table above, the tighter limit applies at the band edges.


Frequency (MHz)	Field Strength (μ V/m at 3-meter)	Field Strength (dB μ V/m at 3-meter)
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54

Test Configuration

Below 1 GHz

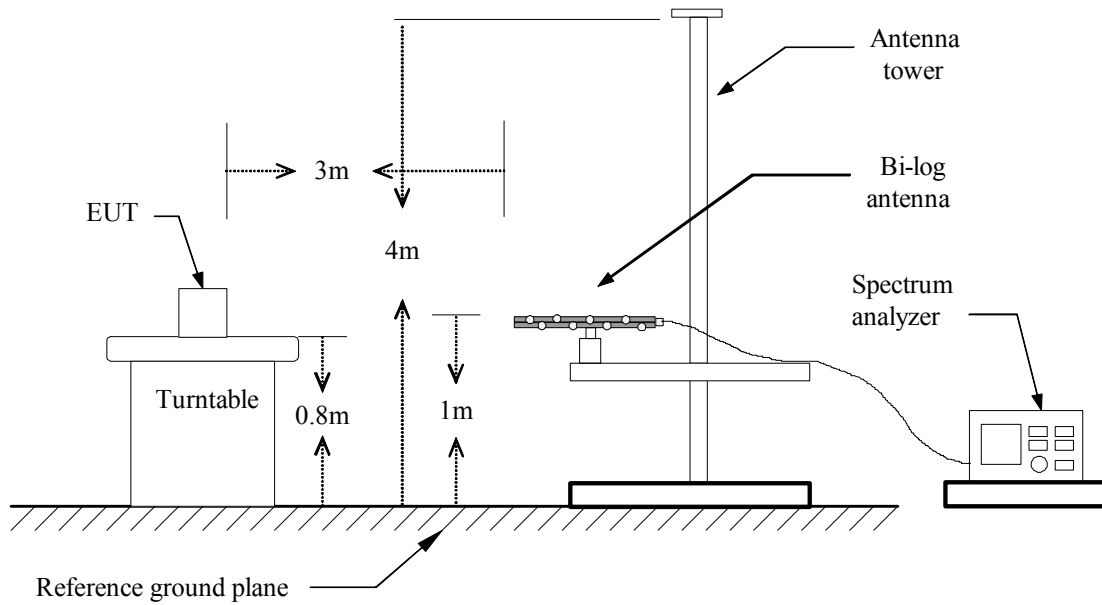

Above 1 GHz

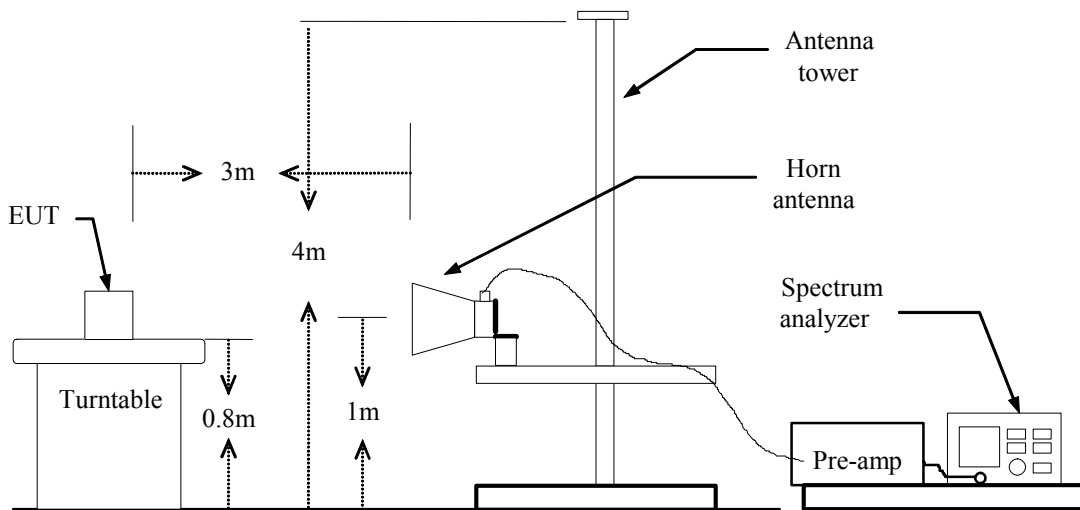



TEST PROCEDURE

1. The EUT is placed on a turntable, which is 0.8m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Set the spectrum analyzer in the following setting as:
Below 1GHz:
RBW=100kHz / VBW=300kHz / Sweep=AUTO
Above 1GHz:
(a) PEAK: RBW=VBW=1MHz / Sweep=AUTO
(b) AVERAGE: RBW=1MHz / VBW=10Hz / Sweep=AUTO
7. Repeat above procedures until the measurements for all frequencies are complete.

**TEST RESULTS****Below 1 GHz****Operation Mode:** Normal Link**Test Date:** March 17, 2006**Temperature:** 26°C**Tested by:** Rex Lai**Humidity:** 55 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Ant.Pol. (H/V)	Reading (Peak) (dBuV)	Reading (QP) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (QP) (dBuV/m)	Limit (QP) (dBuV/m)	Margin (dB)	Remark
433.57	V	13.27	---	17.88	31.15	---	46.00	-14.85	Peak
487.57	V	14.14	---	18.98	33.12	---	46.00	-12.88	Peak
568.40	V	10.87	---	20.70	31.57	---	46.00	-14.43	Peak
649.90	V	10.14	---	21.73	31.87	---	46.00	-14.13	Peak
848.10	V	7.26	---	24.06	31.32	---	46.00	-14.68	Peak
897.79	V	7.57	---	24.85	32.42	---	46.00	-13.58	Peak
384.14	H	14.08	---	17.12	31.20	---	46.00	-14.80	Peak
422.46	H	13.88	---	17.74	31.62	---	46.00	-14.38	Peak
455.89	H	13.43	---	18.22	31.65	---	46.00	-14.35	Peak
666.10	H	10.65	---	21.85	32.50	---	46.00	-13.50	Peak
768.90	H	7.03	---	23.07	30.10	---	46.00	-15.90	Peak
922.90	H	7.27	---	25.00	32.27	---	46.00	-13.73	Peak

Remark:

1. Measuring frequencies from 30 MHz to the 1GHz.
2. Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using peak/quasi-peak detector mode.
3. Quasi-peak test would be performed if the peak result were greater than the quasi-peak limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser; with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Quasi-peak limit (dBuV/m).

**WLAN OPERATION****Above 1 GHz****Operation Mode:** IEEE 802.11b / TX / CH Low**Test Date:** March 18, 2006**Temperature:** 26°C**Tested by:** Chris Hsieh**Humidity:** 45 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Ant.Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1195.00	V	62.24	---	-14.52	47.72	---	74.00	54.00	-6.28	Peak
1855.00	V	59.90	---	-11.78	48.11	---	74.00	54.00	-5.89	Peak
1997.50	V	59.98	---	-10.93	49.06	---	74.00	54.00	-4.94	Peak
2800.00	V	57.13	---	-9.89	47.24	---	74.00	54.00	-6.76	Peak
4825.00	V	58.28	---	-7.80	50.48	---	74.00	54.00	-3.52	Peak
7232.50	V	58.58	---	-5.70	52.88	---	74.00	54.00	-1.12	Peak
1600.00	H	61.28	---	-13.32	47.97	---	74.00	54.00	-6.03	Peak
2800.00	H	58.93	---	-9.89	49.04	---	74.00	54.00	-4.96	Peak
4825.00	H	62.45	59.63	-7.80	54.66	51.83	74.00	54.00	-2.17	AVG
7232.50	H	61.37	57.51	-5.70	55.67	51.81	74.00	54.00	-2.19	AVG
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Operation Mode:** IEEE 802.11b / TX / CH Mid**Test Date:** March 18, 2006**Temperature:** 26°C**Tested by:** Chris Hsieh**Humidity:** 45 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Ant.Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1600.00	V	61.42	---	-13.32	48.11	---	74.00	54.00	-5.89	Peak
1990.00	V	61.35	---	-10.97	50.38	---	74.00	54.00	-3.62	Peak
2800.00	V	58.98	---	-9.89	49.09	---	74.00	54.00	-4.91	Peak
3985.00	V	59.39	---	-8.49	50.90	---	74.00	54.00	-3.10	Peak
N/A										
1600.00	H	60.06	---	-13.32	46.74	---	74.00	54.00	-7.26	Peak
2440.00	H	56.92	---	-10.35	46.57	---	74.00	54.00	-7.43	Peak
2785.00	H	59.21	---	-9.91	49.30	---	74.00	54.00	-4.70	Peak
4870.00	H	60.83	---	-7.79	53.04	---	74.00	54.00	-0.96	Peak
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Operation Mode:** IEEE 802.11b / TX / CH High**Test Date:** March 18, 2006**Temperature:** 26°C**Tested by:** Chris Hsieh**Humidity:** 45 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Ant.Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1600.00	V	62.65	---	-13.32	49.33	---	74.00	54.00	-4.67	Peak
1990.00	V	60.69	---	-10.97	49.72	---	74.00	54.00	-4.28	Peak
2785.00	V	58.78	---	-9.91	48.87	---	74.00	54.00	-5.13	Peak
4000.00	V	58.97	---	-8.47	50.50	---	74.00	54.00	-3.50	Peak
N/A										
1600.00	H	60.21	---	-13.32	46.90	---	74.00	54.00	-7.10	Peak
2800.00	H	59.36	---	-9.89	49.47	---	74.00	54.00	-4.53	Peak
4930.00	H	61.48	60.43	-7.77	53.70	52.66	74.00	54.00	-1.34	Average
7390.00	H	53.80	---	-5.58	48.22	---	74.00	54.00	-5.78	Peak
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. $\text{Margin (dB)} = \text{Remark result (dBuV/m)} - \text{Average limit (dBuV/m)}$.

**Operation Mode:** IEEE 802.11g / TX / CH Low**Test Date:** March 18, 2006**Temperature:** 26°C**Tested by:** Chris Hsieh**Humidity:** 45 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Ant.Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
2005.00	V	61.94	---	-10.90	51.03	---	74.00	54.00	-2.97	Peak
2800.00	V	59.43	---	-9.89	49.54	---	74.00	54.00	-4.46	Peak
3985.00	V	57.95	---	-8.49	49.46	---	74.00	54.00	-4.54	Peak
4795.00	V	55.12	---	-7.80	47.32	---	74.00	54.00	-6.68	Peak
N/A										
1600.00	H	60.32	---	-13.32	47.00	---	74.00	54.00	-7.00	Peak
2410.00	H	57.11	---	-10.39	46.72	---	74.00	54.00	-7.28	Peak
2785.00	H	58.84	---	-9.91	48.93	---	74.00	54.00	-5.07	Peak
4825.00	H	55.78	---	-7.80	47.98	---	74.00	54.00	-6.02	Peak
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. $\text{Margin (dB)} = \text{Remark result (dBuV/m)} - \text{Average limit (dBuV/m)}$.

**Operation Mode:** IEEE 802.11g / TX / CH Mid**Test Date:** March 18, 2006**Temperature:** 26°C**Tested by:** Chris Hsieh**Humidity:** 45 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Ant.Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1600.00	V	64.42	---	-13.32	51.10	---	74.00	54.00	-2.90	Peak
1990.00	V	62.19	---	-10.97	51.22	---	74.00	54.00	-2.78	Peak
2800.00	V	59.44	---	-9.89	49.55	---	74.00	54.00	-4.45	Peak
3985.00	V	58.58	---	-8.49	50.09	---	74.00	54.00	-3.91	Peak
N/A										
1600.00	H	60.71	---	-13.32	47.39	---	74.00	54.00	-6.61	Peak
1990.00	H	58.88	---	-10.97	47.91	---	74.00	54.00	-6.09	Peak
2785.00	H	58.61	---	-9.91	48.70	---	74.00	54.00	-5.30	Peak
4870.00	H	58.56	---	-7.79	50.77	---	74.00	54.00	-3.23	Peak
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Operation Mode:** IEEE 802.11g / TX / CH High**Test Date:** March 18, 2006**Temperature:** 26°C**Tested by:** Chris Hsieh**Humidity:** 45 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Ant.Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1990.00	V	60.79	---	-10.97	49.82	---	74.00	54.00	-4.18	Peak
2800.00	V	59.57	---	-9.89	49.68	---	74.00	54.00	-4.32	Peak
3985.00	V	57.99	---	-8.49	49.50	---	74.00	54.00	-4.50	Peak
N/A										
1600.00	H	61.42	---	-13.32	48.11	---	74.00	54.00	-5.89	Peak
2785.00	H	59.30	---	-9.91	49.39	---	74.00	54.00	-4.61	Peak
4930.00	H	59.33	---	-7.77	51.55	---	74.00	54.00	-2.45	Peak
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser; with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. $\text{Margin (dB)} = \text{Remark result (dBuV/m)} - \text{Average limit (dBuV/m)}$.



CONDITION B: BLUETOOTH OPERATION


7.7 PEAK POWER

LIMIT

The maximum peak output power of the intentional radiator shall not exceed the following:

1. According to §15.247(b)(3), for systems using digital modulation in the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz: 1 Watt.
2. According to §15.247(b)(4), the conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Test Configuration

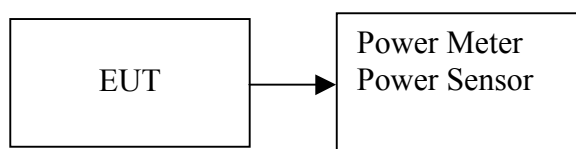

TEST PROCEDURE

The transmitter output is connected to the Power Meter. The Power Meter is set to the peak power detection.

TEST RESULTS

No non-compliance noted

Test Data

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)	Limit (W)	Result
Low	2402	3.56	0.00227	1	PASS
Mid	2441	3.32	0.00215		PASS
High	2480	3.32	0.00215		PASS




7.8 AVERAGE POWER

LIMIT

None; for reporting purposes only.

Test Configuration



TEST PROCEDURE

The transmitter output is connected to the Spectrum analyzer. The Spectrum analyzer is set to the average power detection.

TEST RESULTS

No non-compliance noted.

Test Data


Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)
Low	2402	-1.25	0.000750
Mid	2441	-1.52	0.000705
High	2480	-1.44	0.000718

7.9 BAND EDGES MEASUREMENT

LIMIT

According to §15.247(d), in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a) (see Section 15.205(c)).

Test Configuration

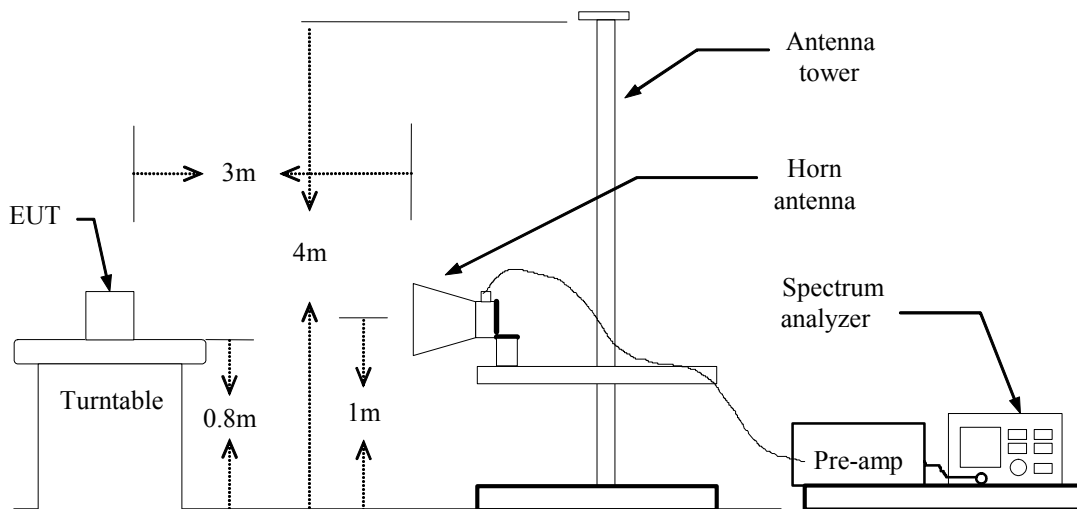

TEST PROCEDURE

1. The EUT is placed on a turntable, which is 0.8m above the ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.
4. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission:
 - (c) PEAK: RBW=VBW=1MHz / Sweep=AUTO
 - (d) AVERAGE: RBW=1MHz / VBW=10Hz / Sweep=AUTO
5. Repeat the procedures until all the PEAK and AVERAGE versus POLARIZATION are measured.

TEST RESULTS

Refer to attach spectrum analyzer data chart.




Band Edges (Bluetooth mode / CH Low)

Detector mode: Peak

Polarity: Vertical

Agilent 16:31:46 Mar 13, 2006

R T

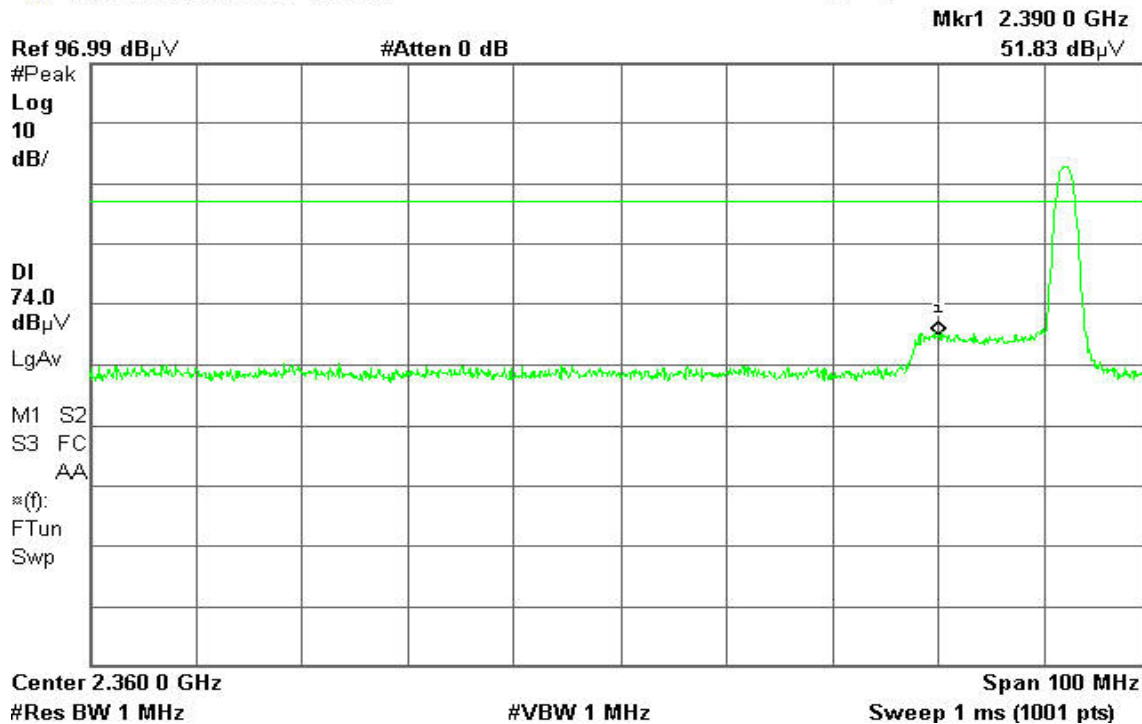


Detector mode: Average

Polarity: Vertical

Agilent 16:32:15 Mar 13, 2006

T

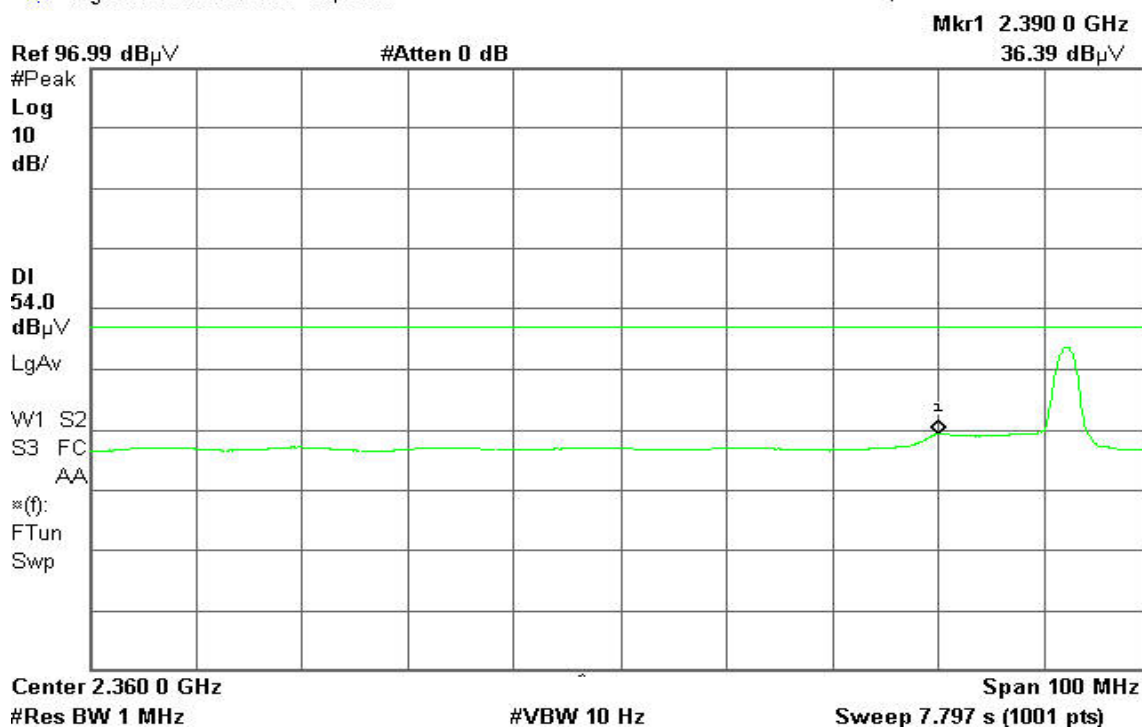




Detector mode: Peak

Polarity: Horizontal

Agilent 16:52:45 Mar 13, 2006

T

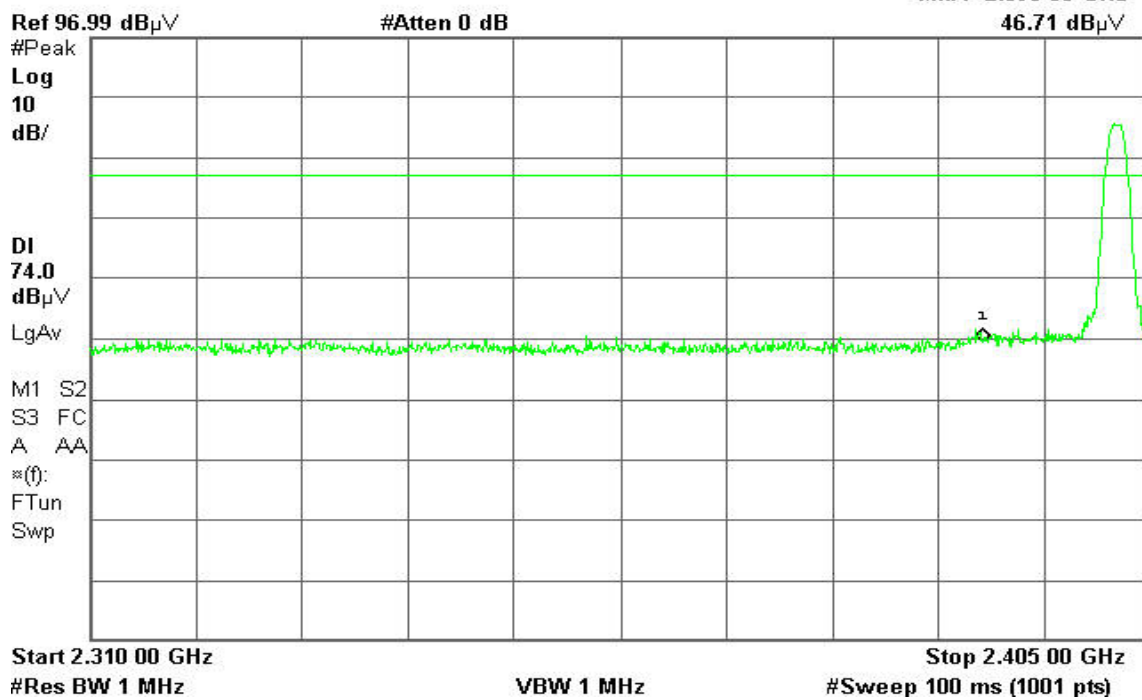


Detector mode: Average

Polarity: Horizontal

Agilent 16:52:26 Mar 13, 2006

T

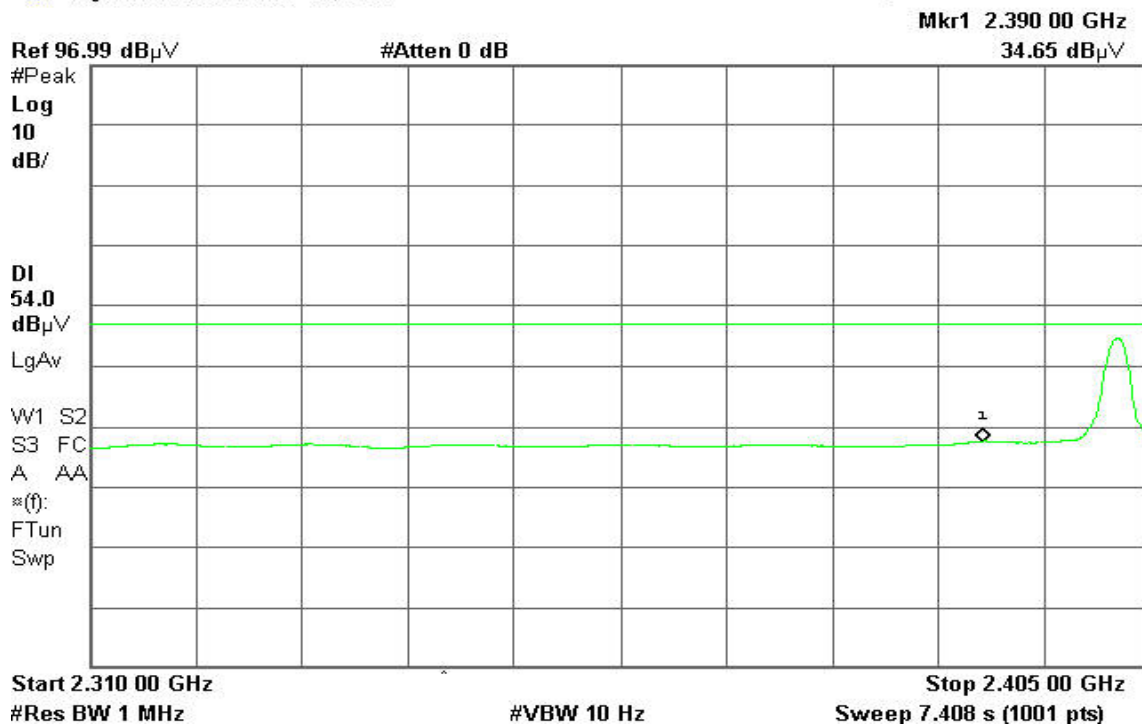




Band Edges (Bluetooth mode / CH High)

Detector mode: Peak

Polarity: Vertical

Agilent 17:07:26 Mar 13, 2006

T

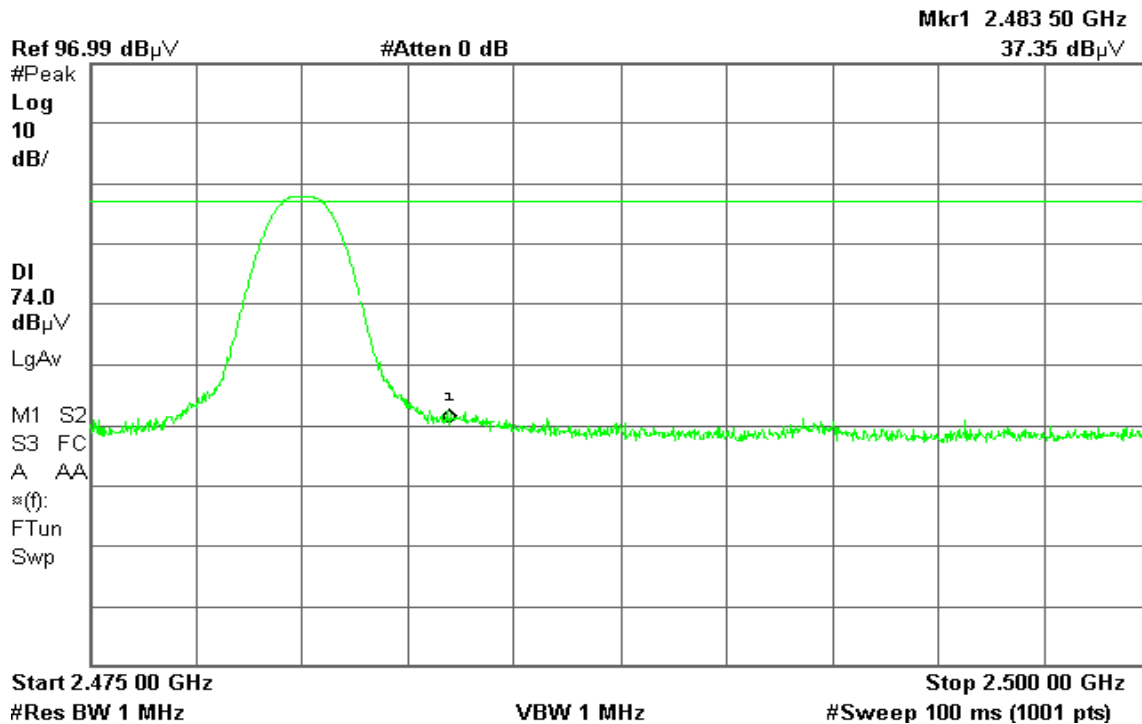


Detector mode: Average

Polarity: Vertical

Agilent 17:07:08 Mar 13, 2006

T

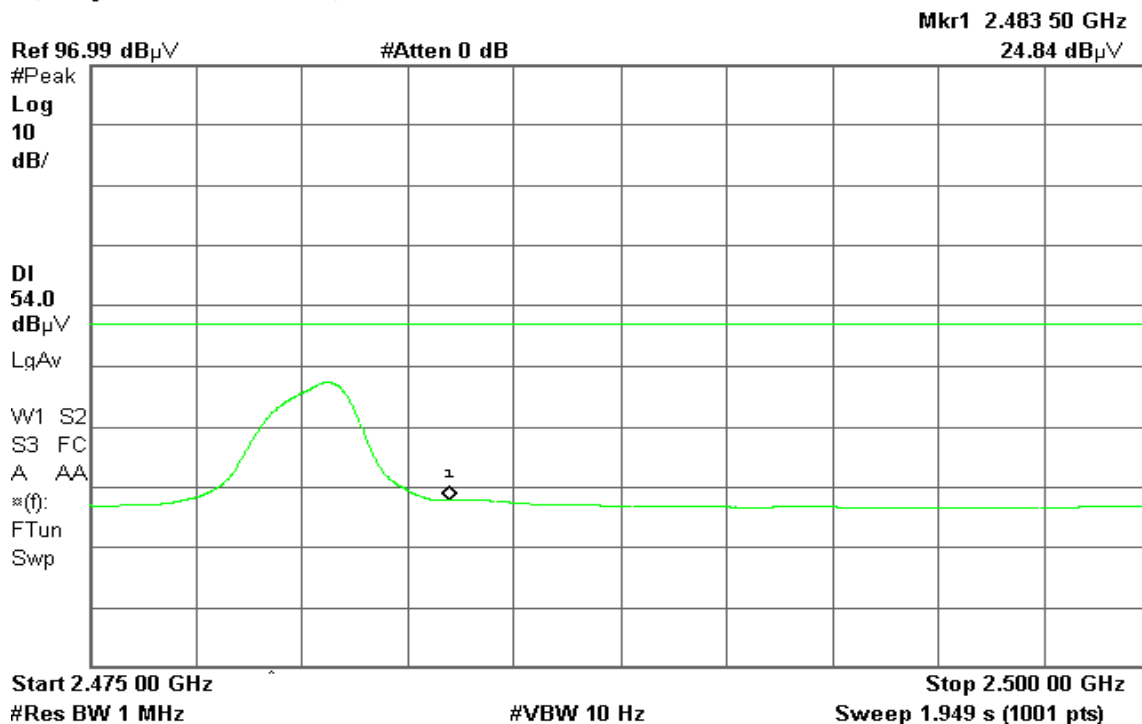




Detector mode: Peak

Polarity: Horizontal

Agilent 17:10:30 Mar 13, 2006

T

Mkr1 2.483 50 GHz
43.44 dB μ V

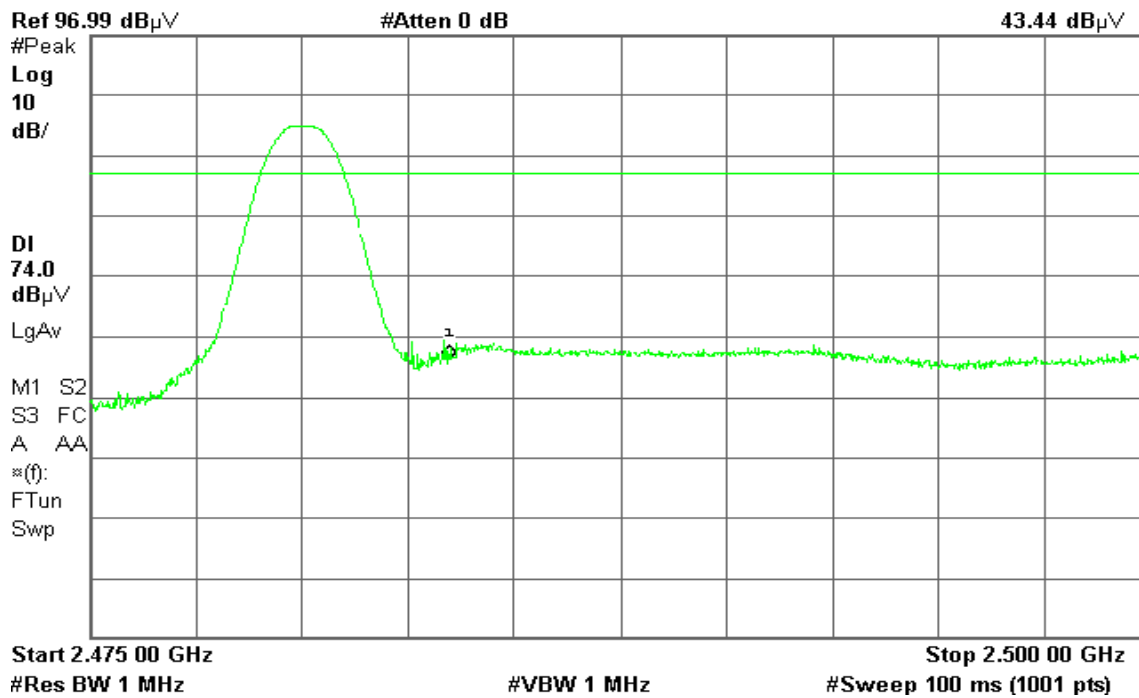


Detector mode: Average

Polarity: Horizontal

Agilent 17:10:05 Mar 13, 2006

T

Mkr1 2.483 50 GHz
26.73 dB μ V

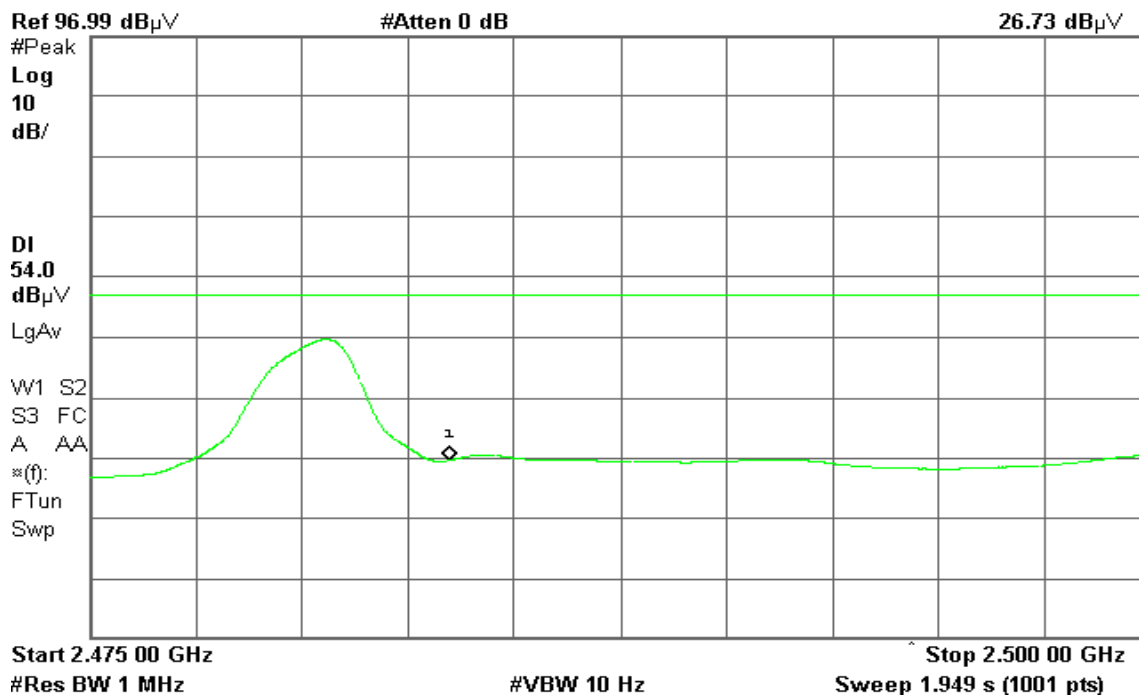




7.10 PEAK POWER SPECTRAL DENSITY

LIMIT

1. According to §15.247(e), for digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.
2. According to §15.247(f), the digital modulation operation of the hybrid system, with the frequency hopping turned off, shall comply with the power density requirements of paragraph (d) of this section.

Test Configuration



TEST PROCEDURE

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set the spectrum analyzer as RBW = 3kHz, VBW = 10kHz, Span = 300kHz, Sweep=100s
4. Record the max. reading.
5. Repeat the above procedure until the measurements for all frequencies are completed.

TEST RESULTS

No non-compliance noted

Test Data

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Result
Low	2402	-8.13	8.00	PASS
Mid	2441	-9.09		PASS
High	2480	-9.29		PASS



Test Plot


PPSD (CH Low)

Agilent 16:38:12 Mar 23, 2006

R T

Mkr1 2.402 023 6 GHz

-8.13 dBm

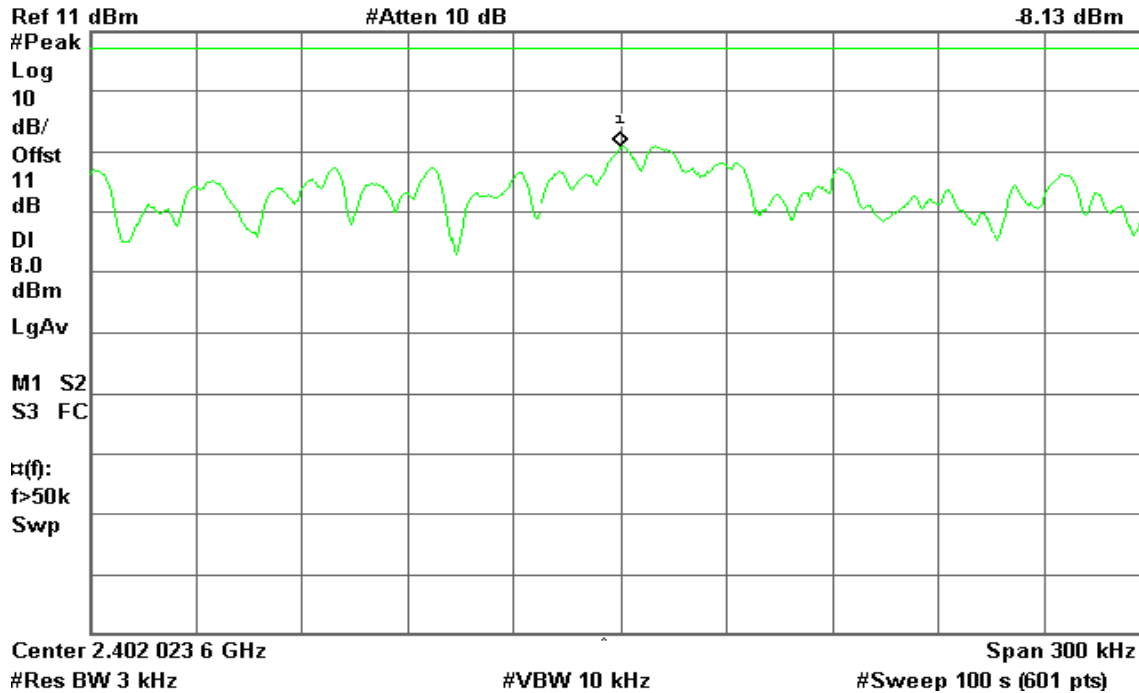


PPSD (CH Mid)

Agilent 16:43:38 Mar 23, 2006

R T

Mkr1 2.441 034 5 GHz

-9.09 dBm

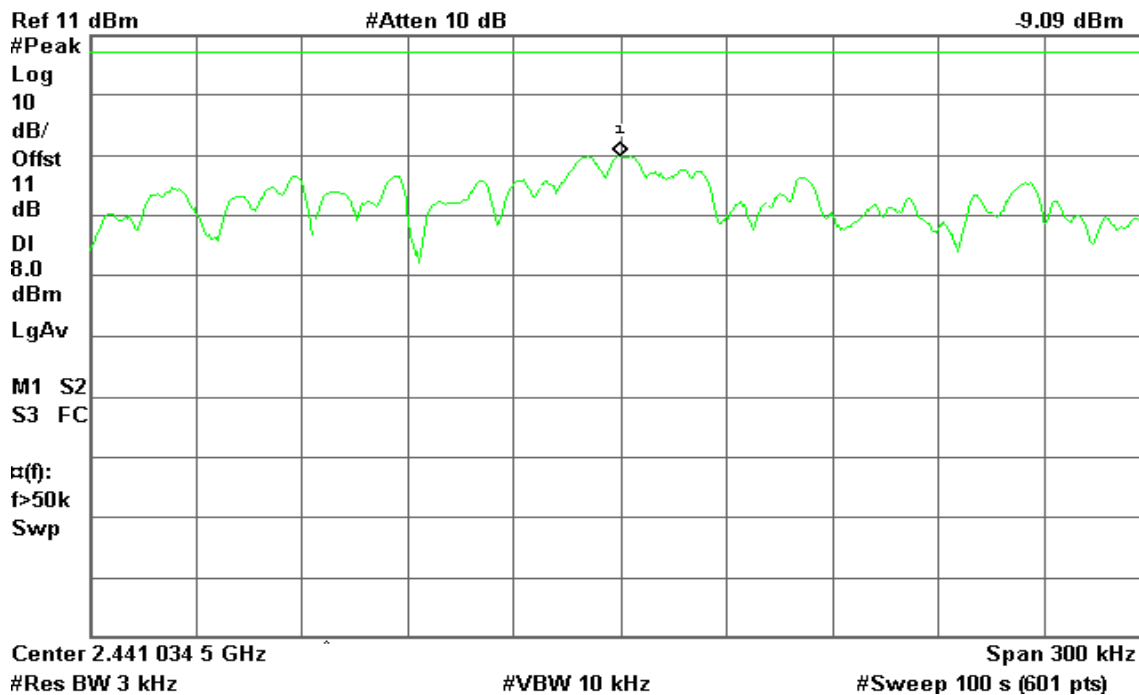



PPSD (CH High)

Agilent 16:48:23 Mar 23, 2006


R T

Mkr1 2.480 035 0 GHz

Ref 11 dBm

#Atten 10 dB

-9.29 dBm

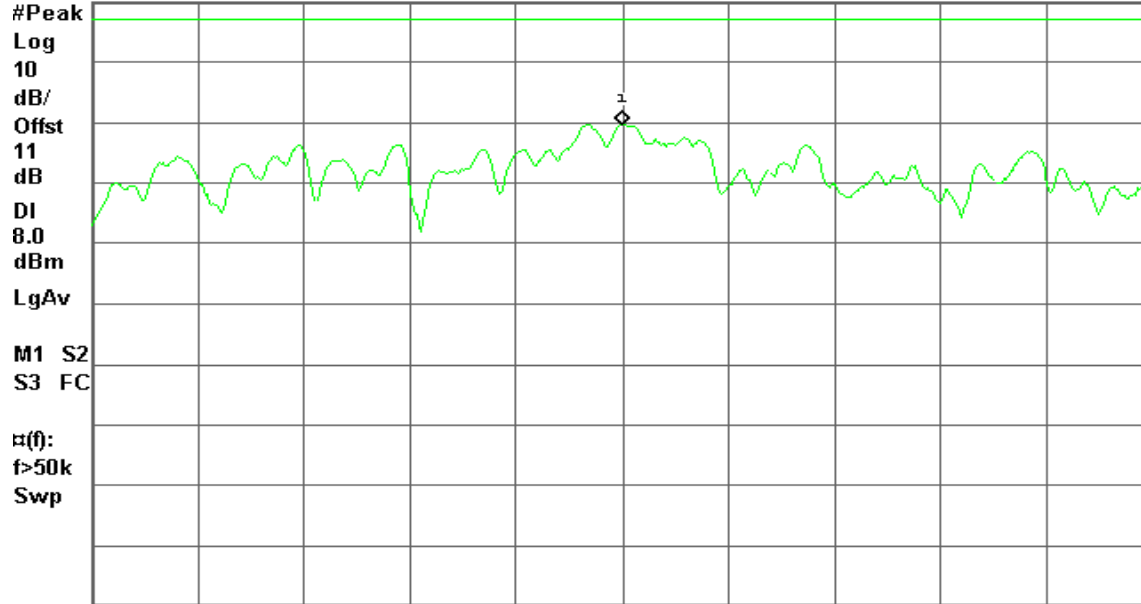

Center 2.480 035 0 GHz

Span 300 kHz

#Res BW 3 kHz

#VBW 10 kHz

#Sweep 100 s (601 pts)




7.11 FREQUENCY SEPARATION

LIMIT

According to §15.247(a)(1), Frequency hopping systems shall have hopping channel carrier frequencies separated by minimum of 25kHz or the 20dB bandwidth of the hopping channel, whichever is greater.

Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

Test Configuration



TEST PROCEDURE

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set center frequency of spectrum analyzer = middle of hopping channel.
4. Set the spectrum analyzer as RBW = 30kHz, VBW = 100kHz, Span = 3MHz, Sweep = auto.
5. Max hold. Mark 3 Peaks of hopping channel and record the 3 peaks frequency.

TEST RESULTS

No non-compliance noted

Test Data

Channel Separation (MHz)	20dB Bandwidth (kHz)	Limit (kHz)	Result
1.00	835	>25	Pass




Test Plot

Measurement of Channel Separation

Agilent 20:58:00 Mar 14, 2006

R T

Mkr3 2.442 050 GHz

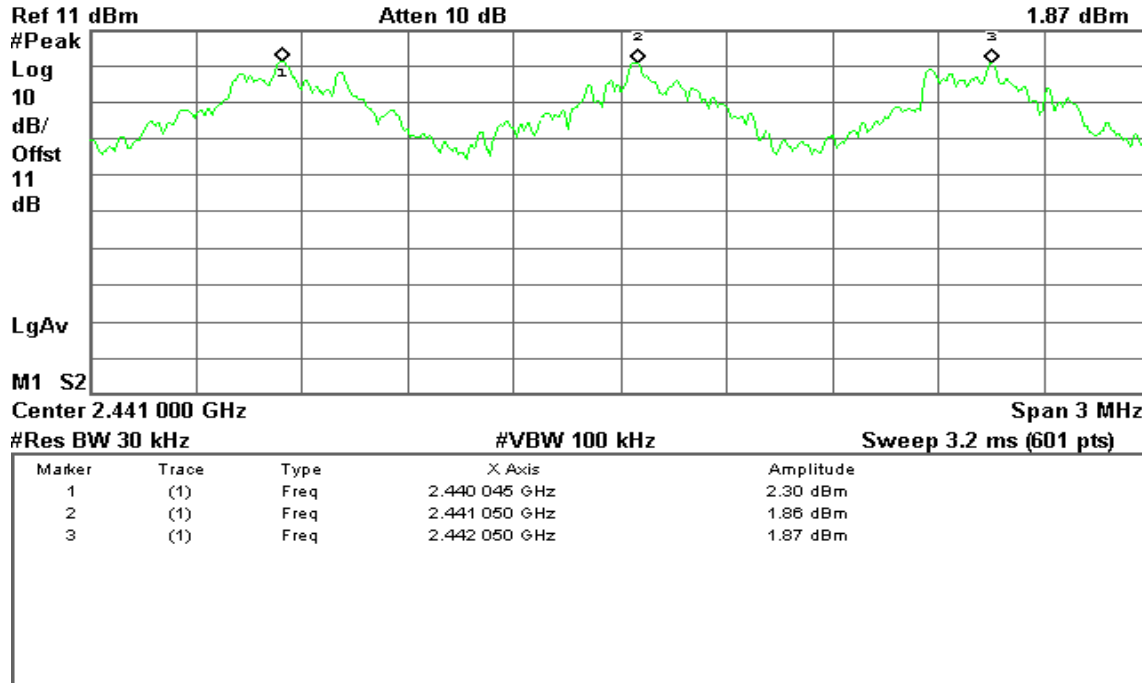


Measurement of 20dB Bandwidth

Agilent 19:52:40 Mar 14, 2006

R T

Δ Mkr2 835 kHz

-0.20 dB

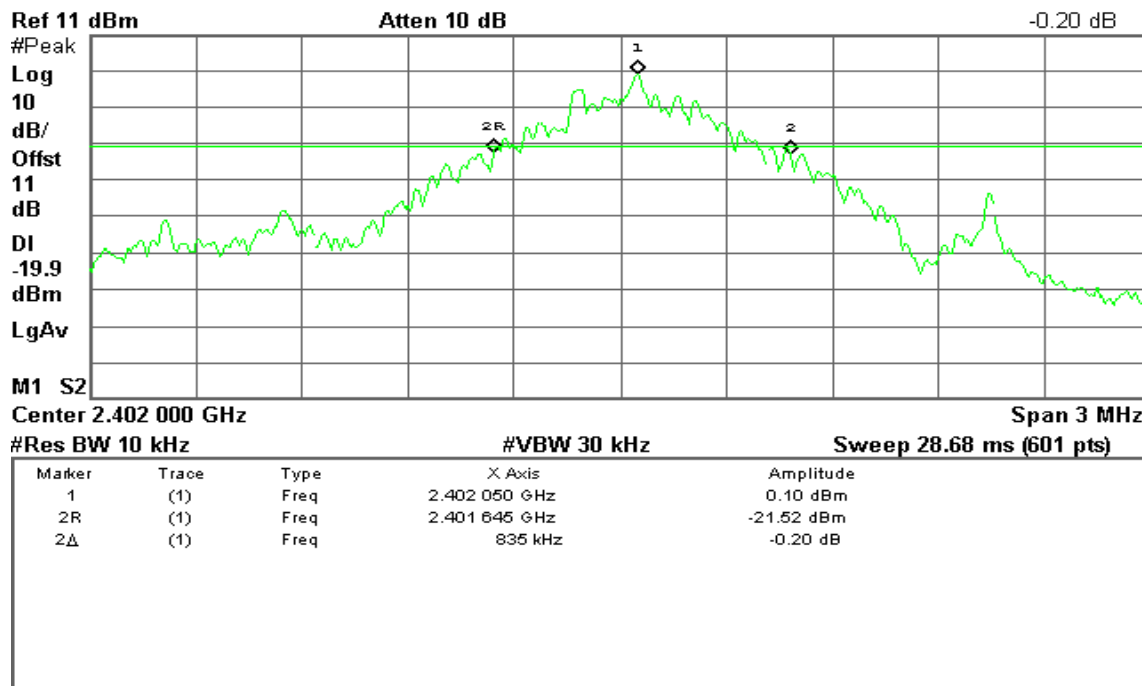




7.12 NUMBER OF HOPPING FREQUENCY

LIMIT

According to §15.247(a)(1)(ii), Frequency hopping systems operating in the 2400MHz-2483.5 MHz bands shall use at least 75 hopping frequencies.

Test Configuration



TEST PROCEDURE

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set spectrum analyzer Start=2400MHz, Stop = 2441.5MHz, Sweep = auto and Start=2441.5MHz, Stop = 2483.5MHz, Sweep = auto.
4. Set the spectrum analyzer as RBW, VBW=510kHz.
5. Max hold, view and count how many channel in the band.

TEST RESULTS

No non-compliance noted

Test Data

Result (No. of CH)	Limit (No. of CH)	Result
79	>75	PASS




Test Plot

Channel Number

2.4 GHz – 2.441 GHz

Agilent 20:18:00 Mar 14, 2006


R T

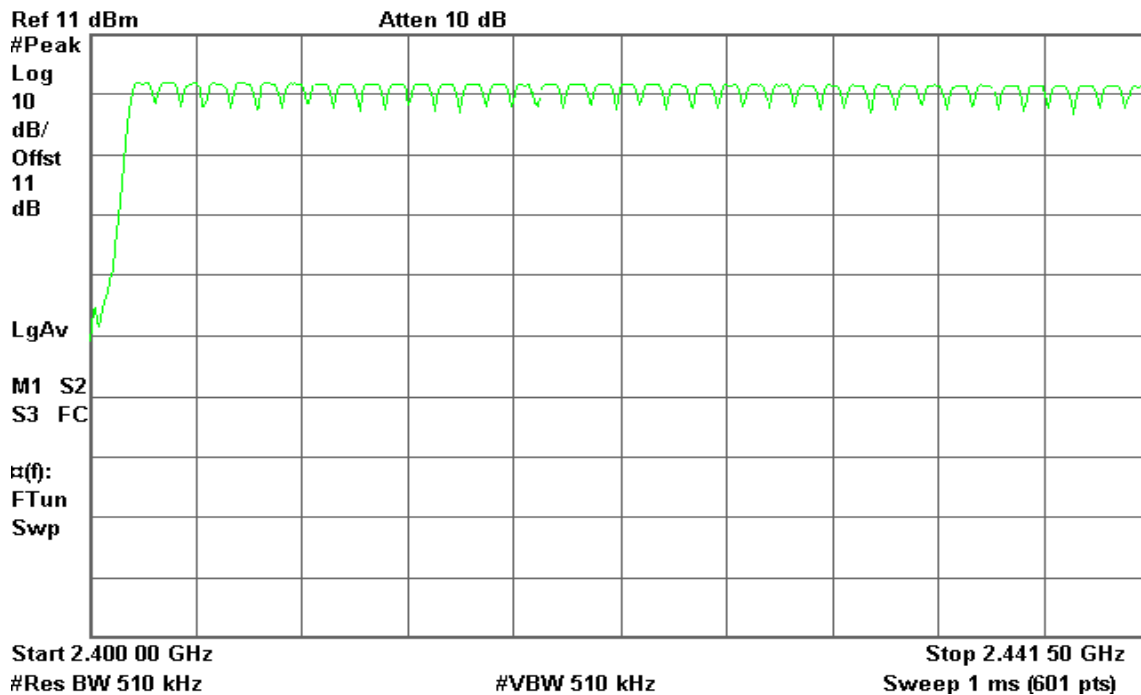

2.441 GHz – 2.4835 GHz

Agilent 20:19:25 Mar 14, 2006

R T

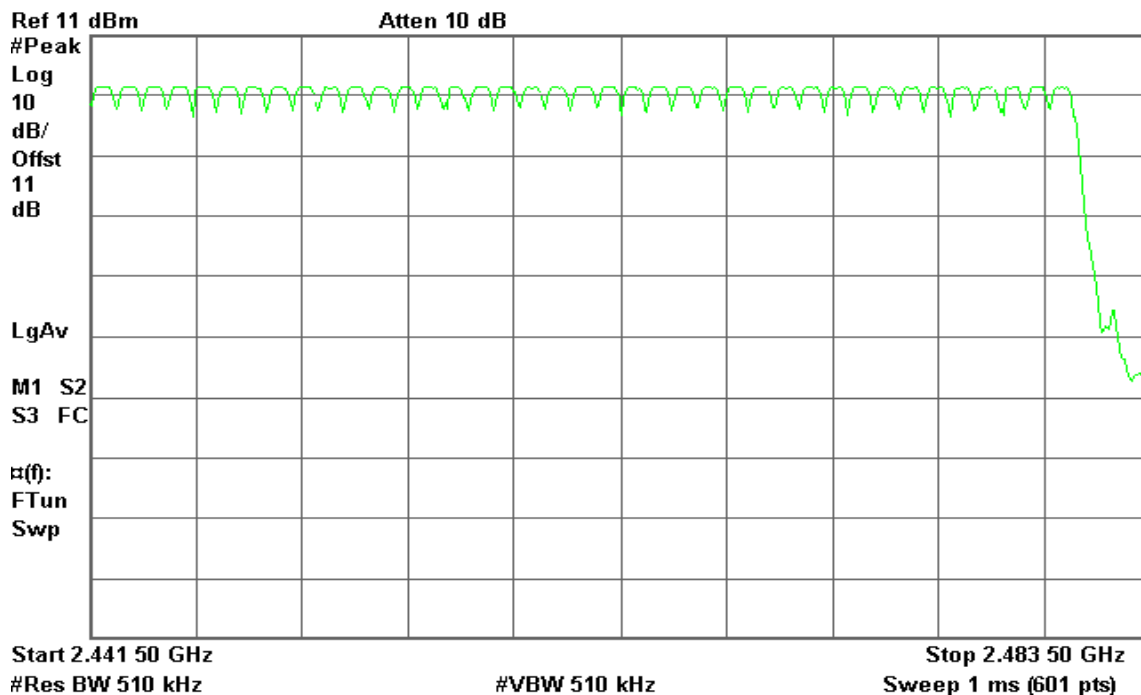




7.13 TIME OF OCCUPANCY (DWEELL TIME)

LIMIT

According to §15.247(a)(1)(iii), Frequency hopping systems operating in the 2400MHz-2483.5 MHz bands. The average time of occupancy on any channels shall not greater than 0.4 s within a period 0.4 s multiplied by the number of hopping channels employed.

Test Configuration



TEST PROCEDURE

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set center frequency of spectrum analyzer = operating frequency.
4. Set the spectrum analyzer as RBW, VBW=1MHz, Span = 0Hz, Sweep = auto.
5. Repeat above procedures until all frequency measured were complete.



TEST RESULTS

No non-compliance noted

Test Data

DH 1

CH Low: $0.42 * (1600/2)/79 * 31.6 = 134.4$ (ms)

CH Mid: $0.42 * (1600/2)/79 * 31.6 = 134.4$ (ms)

CH High: $0.42 * (1600/2)/79 * 31.6 = 134.4$ (ms)

CH	Pulse Time (ms)	Total of Dwell (ms)	Period Time (s)	Limit (ms)	Result
Low	0.42	134.4	31.60	400.00	PASS
Mid	0.42	134.4	31.60		PASS
High	0.42	134.4	31.60		PASS

DH 3

CH Low: $1.68 * (1600/4)/79 * 31.6 = 268.8$ (ms)

CH Mid: $1.67 * (1600/4)/79 * 31.6 = 267.2$ (ms)

CH High: $1.68 * (1600/4)/79 * 31.6 = 268.8$ (ms)

CH	Pulse Time (ms)	Total of Dwell (ms)	Period Time (s)	Limit (ms)	Result
Low	1.68	268.8	31.60	400.00	PASS
Mid	1.67	267.2	31.60		PASS
High	1.68	268.8	31.60		PASS

DH 5

CH Low: $2.92 * (1600/6)/79 * 31.6 = 311.5$ (ms)

CH Mid: $2.92 * (1600/6)/79 * 31.6 = 311.5$ (ms)

CH High: $2.93 * (1600/6)/79 * 31.6 = 312.5$ (ms)

CH	Pulse Time (ms)	Total of Dwell (ms)	Period Time (s)	Limit (ms)	Result
Low	2.92	311.5	31.60	400.00	PASS
Mid	2.92	311.5	31.60		PASS
High	2.93	312.5	31.60		PASS



Test Plot


DH 1

(CH Low)

Agilent 21:19:23 Mar 14, 2006

R T

Δ Mkr1 416.7 μ s
-0.01 dB

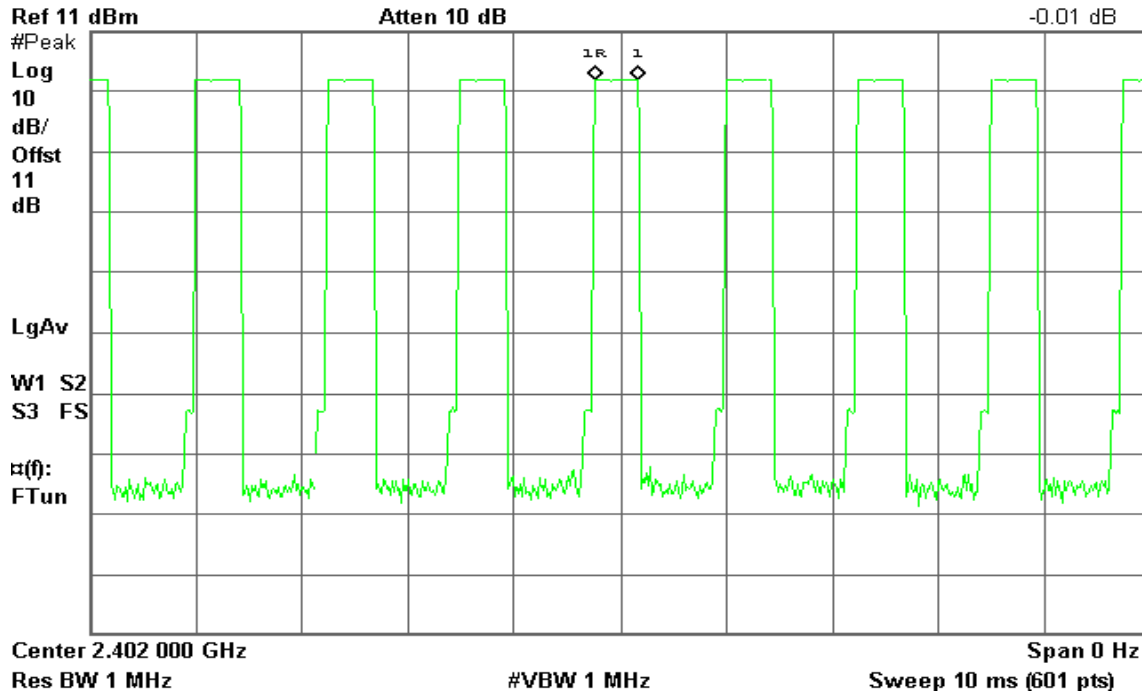


(CH Mid)

Agilent 21:18:31 Mar 14, 2006

R T

Δ Mkr1 416.7 μ s
-0.03 dB

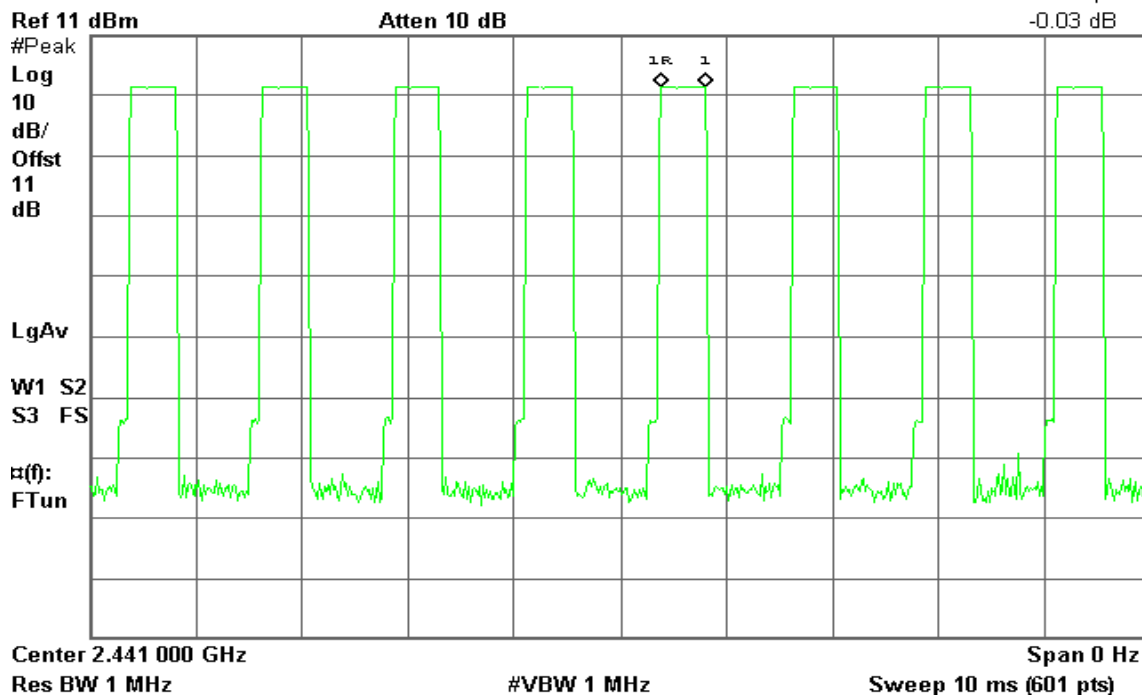




(CH High)

Agilent 21:17:28 Mar 14, 2006

R T

Δ Mkr1 416.7 μ s
0.06 dB

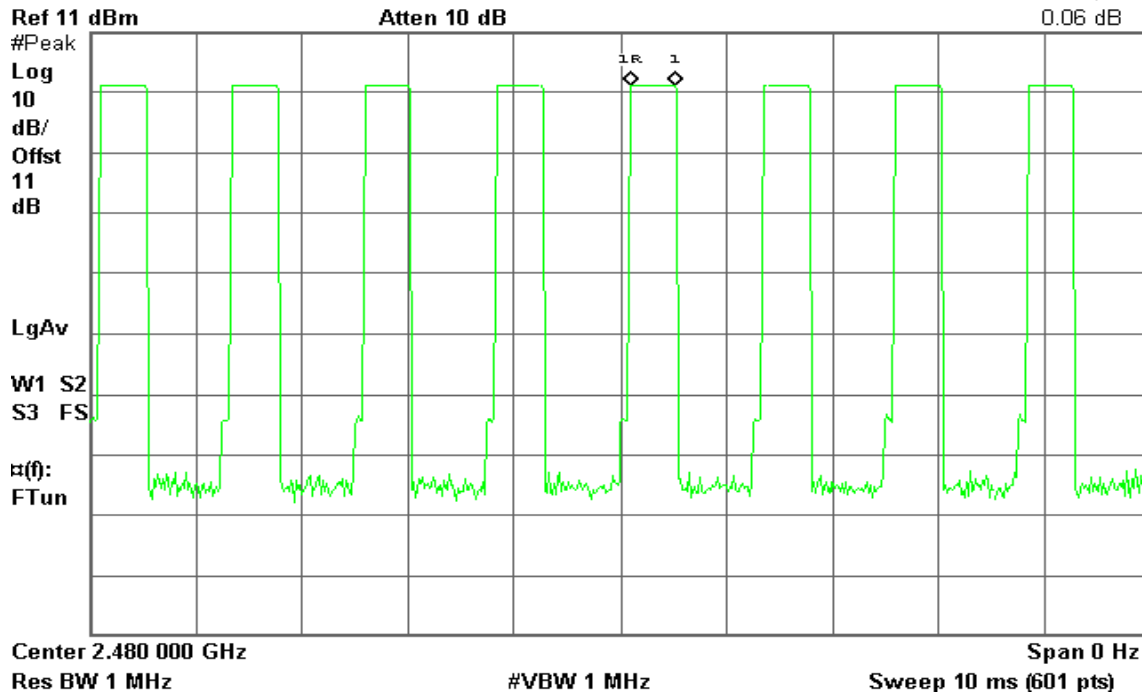


DH 3

(CH Low)

Agilent 21:13:58 Mar 14, 2006

R T

Δ Mkr1 1.683 ms
-0.28 dB

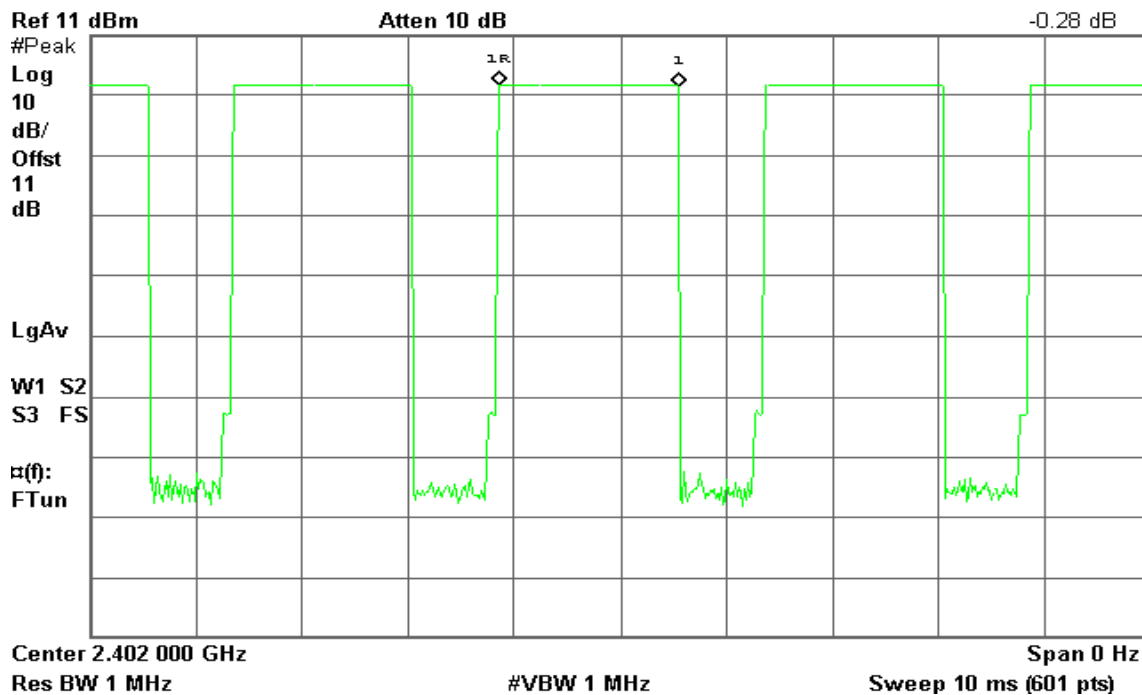




(CH Mid)

Agilent 21:15:02 Mar 14, 2006

R T

Δ Mkr1 1.667 ms
-0.03 dB

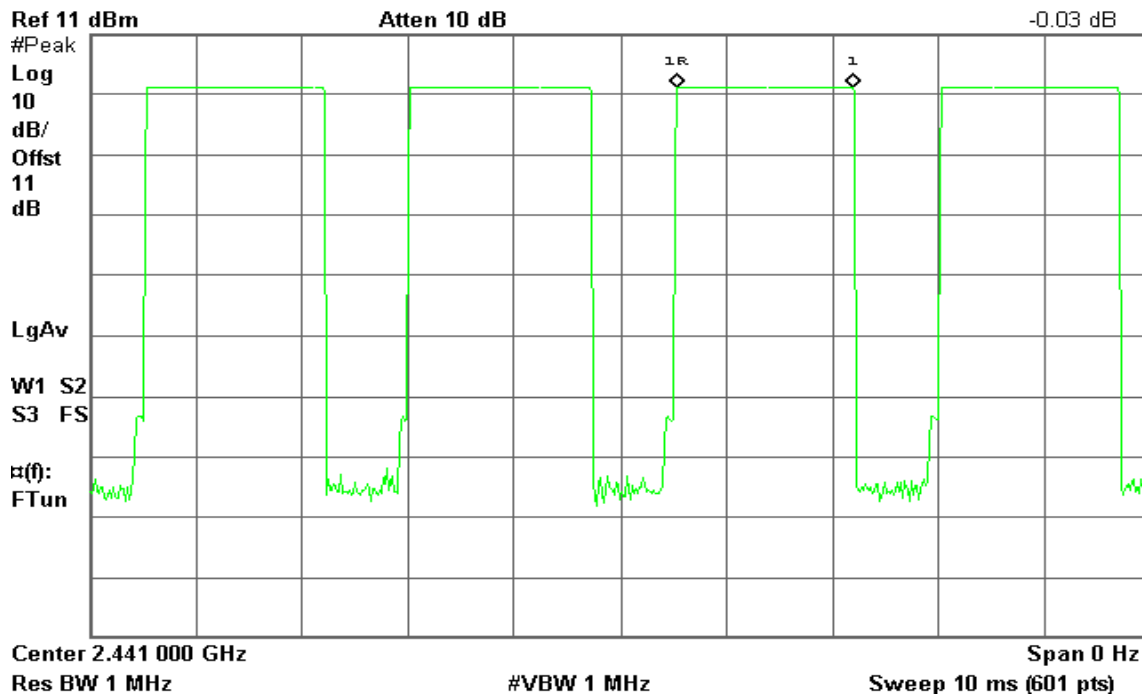


(CH High)

Agilent 21:16:09 Mar 14, 2006

R L

Δ Mkr1 1.683 ms
-0.03 dB

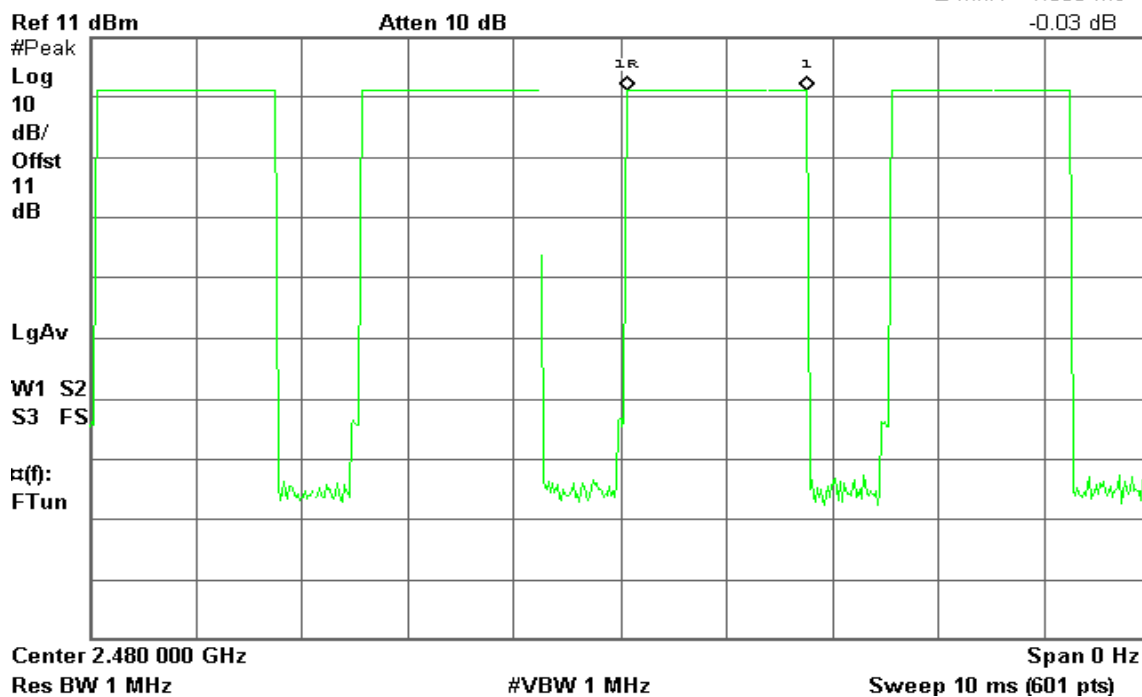




DH 5

(CH Low)

Agilent 21:21:00 Mar 14, 2006

R T

Δ Mkr1 2.917 ms
-0.03 dB

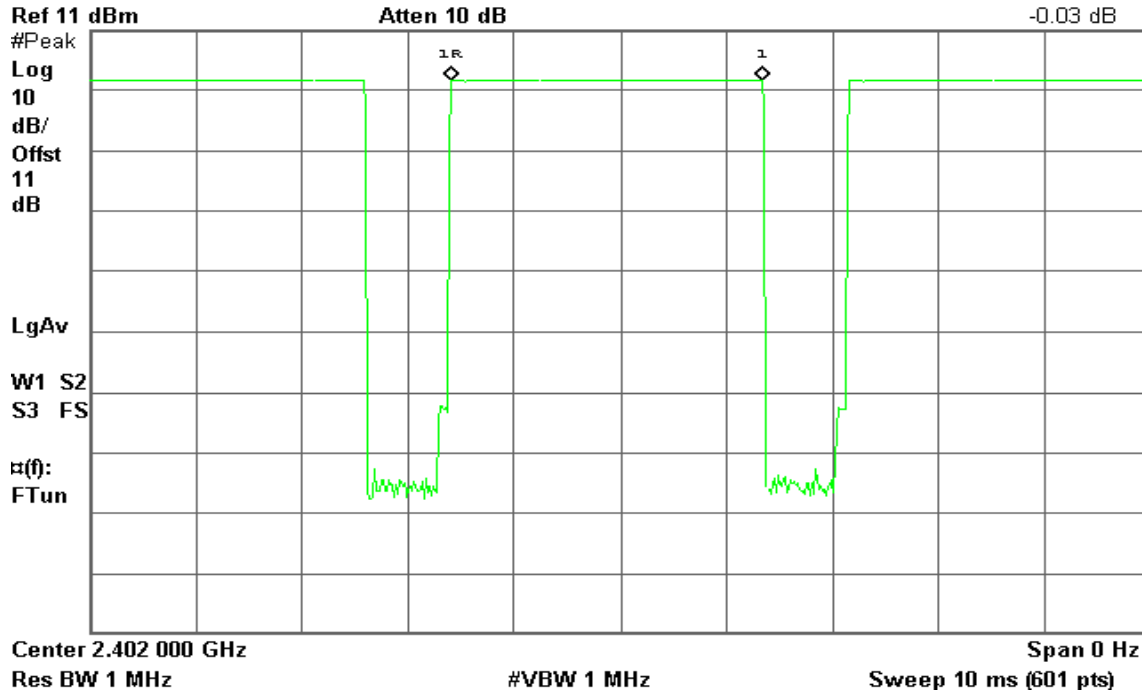


(CH Mid)

Agilent 21:22:11 Mar 14, 2006

R T

Δ Mkr1 2.917 ms
-0.05 dB

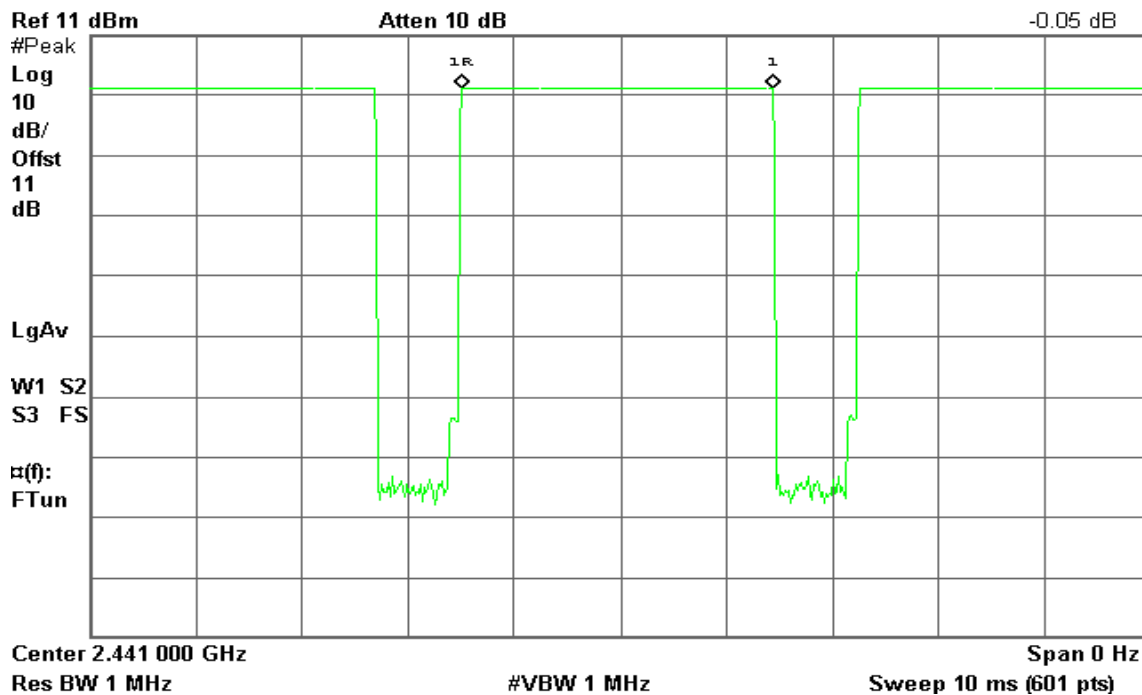



(CH High)

Agilent 21:23:08 Mar 14, 2006

R T

Δ Mkr1 2.933 ms
0.35 dB

Ref 11 dBm

Atten 10 dB

#Peak

Log

10

dB/

Offst

11

dB


LgAv

W1 S2

S3 FS

$\alpha(f)$:

FTun

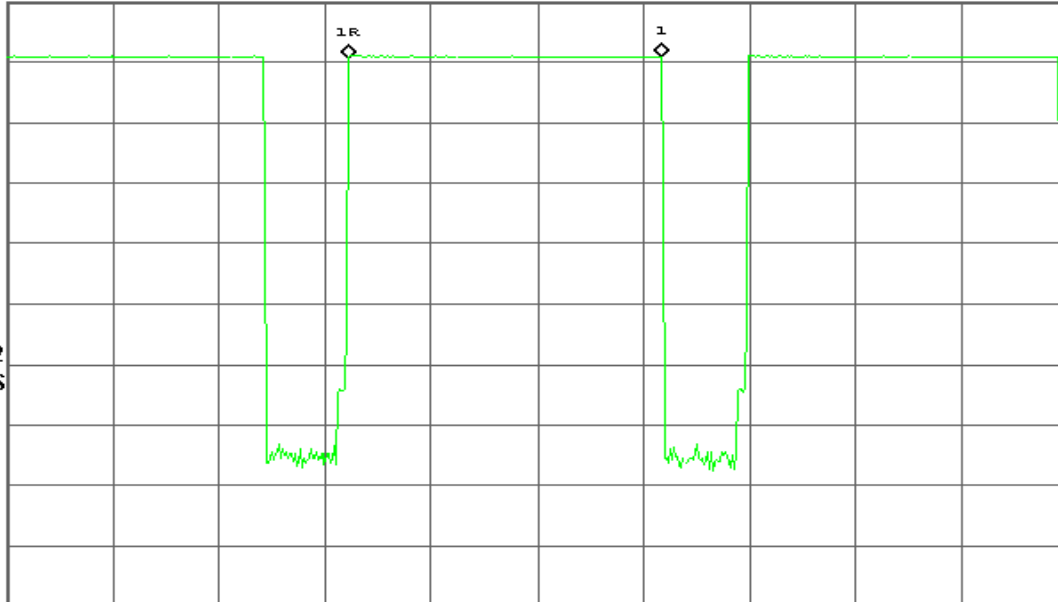

Center 2.480 000 GHz

Res BW 1 MHz

#VBW 1 MHz

Span 0 Hz

Sweep 10 ms (601 pts)



7.14 Spurious Emissions

7.14.1 Conducted Measurement

LIMIT

(Same as Section 7.6.1 in this test report)

TEST PROCEDURE

(Same as Section 7.6.1 in this test report)

TEST RESULTS

No non-compliance noted.



Test Plot


CH Low

* Agilent 20:51:23 Mar 14, 2006

R T

Mkr1 2.40 GHz

2.32 dBm

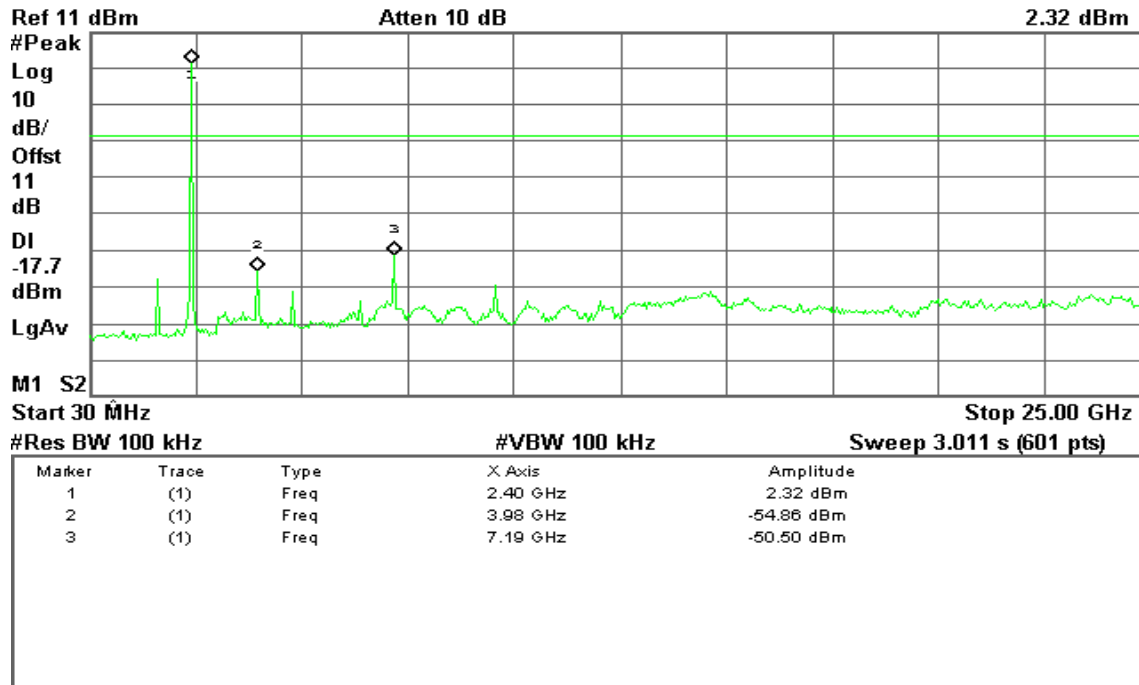


CH Mid

* Agilent 20:52:40 Mar 14, 2006

R T

Mkr1 2.44 GHz

1.90 dBm

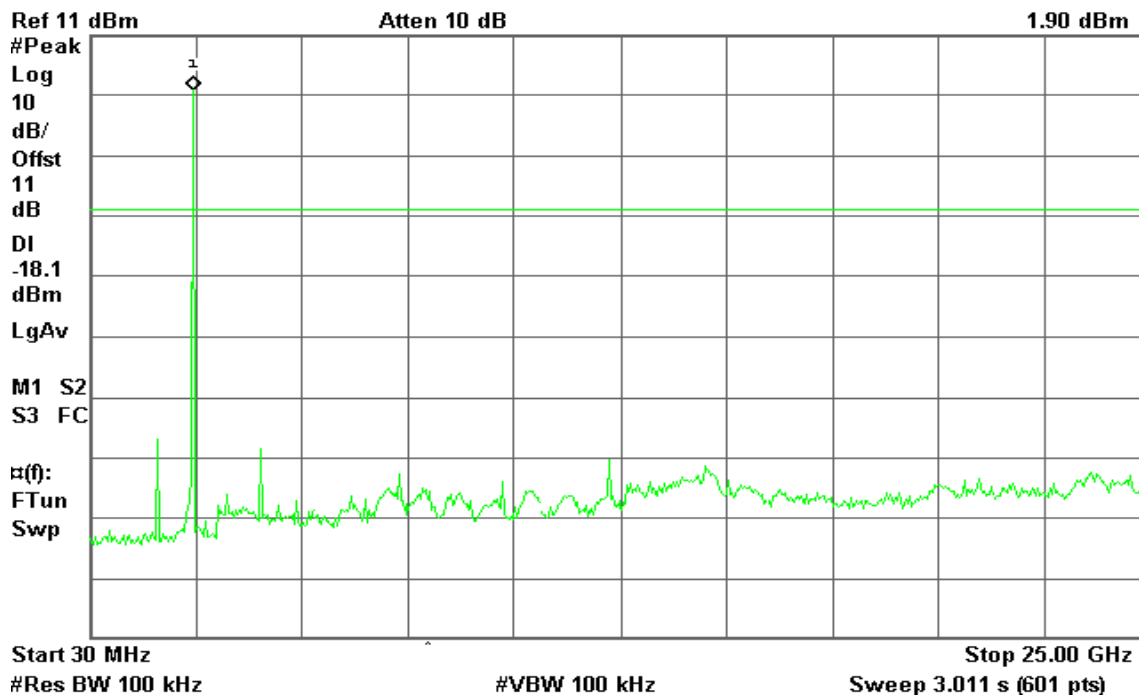




CH High

Agilent 20:53:29 Mar 14, 2006

R T

Mkr1 2.49 GHz
2.01 dBm

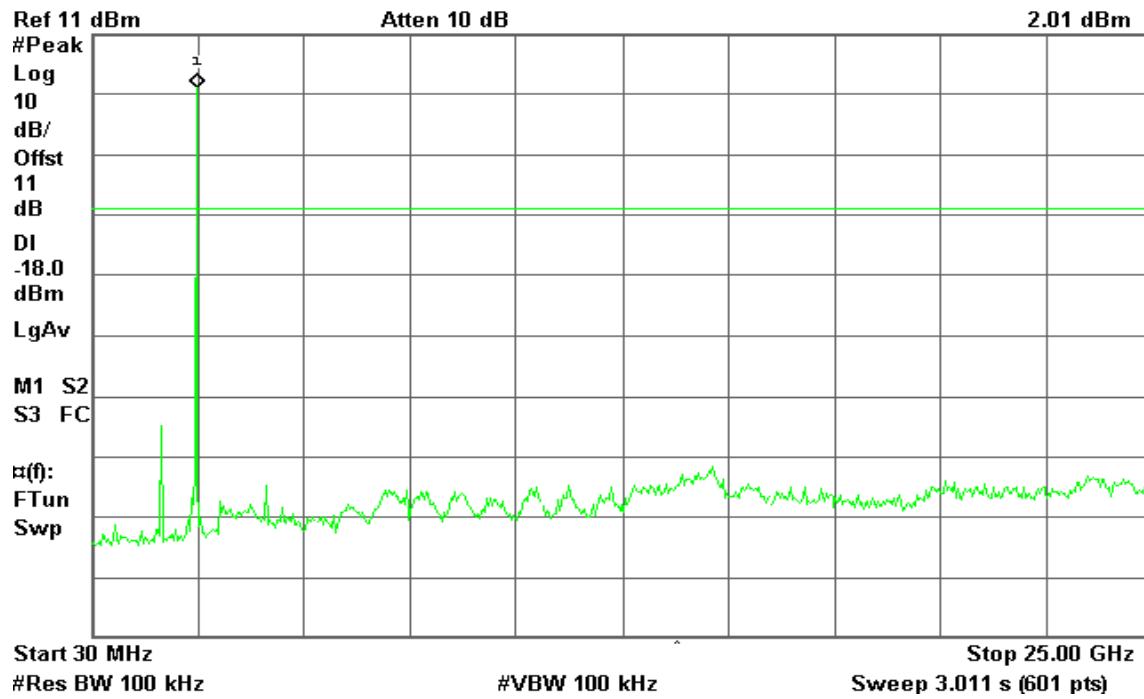



7.14.2 Radiated Emissions

LIMIT

(Same as Section 7.6.2 in this test report)

TEST PROCEDURE

(Same as Section 7.6.2 in this test report)



TEST RESULTS

Below 1 GHz

Operation Mode: Normal Link**Test Date:** March 17, 2006**Temperature:** 26°C**Tested by:** Rex Lai**Humidity:** 55 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Ant.Pol. (H/V)	Reading (Peak) (dBuV)	Reading (QP) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (QP) (dBuV/m)	Limit (QP) (dBuV/m)	Margin (dB)	Remark
433.57	V	13.27	---	17.88	31.15	---	46.00	-14.85	Peak
487.57	V	14.14	---	18.98	33.12	---	46.00	-12.88	Peak
568.40	V	10.87	---	20.70	31.57	---	46.00	-14.43	Peak
649.90	V	10.14	---	21.73	31.87	---	46.00	-14.13	Peak
848.10	V	7.26	---	24.06	31.32	---	46.00	-14.68	Peak
897.79	V	7.57	---	24.85	32.42	---	46.00	-13.58	Peak
384.14	H	14.08	---	17.12	31.20	---	46.00	-14.80	Peak
422.46	H	13.88	---	17.74	31.62	---	46.00	-14.38	Peak
455.89	H	13.43	---	18.22	31.65	---	46.00	-14.35	Peak
666.10	H	10.65	---	21.85	32.50	---	46.00	-13.50	Peak
768.90	H	7.03	---	23.07	30.10	---	46.00	-15.90	Peak
922.90	H	7.27	---	25.00	32.27	---	46.00	-13.73	Peak

Remark:

1. Measuring frequencies from 30 MHz to the 1GHz.
2. Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using peak/quasi-peak detector mode.
3. Quasi-peak test would be performed if the peak result were greater than the quasi-peak limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. $\text{Margin (dB)} = \text{Remark result (dBuV/m)} - \text{Quasi-peak limit (dBuV/m)}$.

**BLUETOOTH OPERATION****Above 1 GHz****Operation Mode:** Bluetooth / TX / CH Low**Test Date:** March 13, 2006**Temperature:** 21°C**Tested by:** Ryan Chen**Humidity:** 58 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Ant.Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1792.00	V	63.12	---	-12.16	50.96	---	74.00	54.00	-3.04	Peak
1990.00	V	61.12	---	-10.97	50.15	---	74.00	54.00	-3.85	Peak
3195.00	V	56.55	---	-9.48	47.07	---	74.00	54.00	-6.93	Peak
3585.00	V	55.57	---	-9.10	46.47	---	74.00	54.00	-7.53	Peak
3990.00	V	59.24	---	-8.49	50.75	---	74.00	54.00	-3.25	Peak
4785.00	V	53.25	---	-7.80	45.45	---	74.00	54.00	-8.55	Peak
1598.00	H	64.35	---	-13.33	51.02	---	74.00	54.00	-2.98	Peak
1994.00	H	63.15	42.16	-10.95	52.21	31.21	74.00	54.00	-22.79	Average
2790.00	H	58.20	---	-9.90	48.30	---	74.00	54.00	-5.70	Peak
3585.00	H	54.18	---	-9.10	45.08	---	74.00	54.00	-8.92	Peak
3990.00	H	55.44	---	-8.49	46.96	---	74.00	54.00	-7.04	Peak
4395.00	H	51.79	---	-7.99	43.80	---	74.00	54.00	-10.20	Peak

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Operation Mode:** Bluetooth / TX / CH Mid**Test Date:** March 13, 2006**Temperature:** 21°C**Tested by:** Ryan Chen**Humidity:** 58 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Ant.Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1992.00	V	60.34	---	-10.96	49.38	---	74.00	54.00	-4.62	Peak
2190.00	V	62.41	---	-10.67	51.74	---	74.00	54.00	-2.26	Peak
2400.00	V	64.40	44.30	-10.40	54.00	33.90	74.00	54.00	-20.10	Average
3195.00	V	56.72	---	-9.48	47.24	---	74.00	54.00	-6.76	Peak
3990.00	V	59.32	---	-8.49	50.83	---	74.00	54.00	-3.17	Peak
4785.00	V	53.16	---	-7.80	45.35	---	74.00	54.00	-8.65	Peak
1592.00	H	64.75	---	-13.37	51.38	---	74.00	54.00	-2.62	Peak
1994.00	H	63.37	43.59	-10.95	52.42	32.64	74.00	54.00	-21.36	Average
2194.00	H	59.68	---	-10.66	49.02	---	74.00	54.00	-4.98	Peak
2398.00	H	57.80	---	-10.40	47.40	---	74.00	54.00	-6.60	Peak
2794.00	H	58.12	---	-9.90	48.22	---	74.00	54.00	-5.78	Peak
3990.00	H	56.07	---	-8.49	47.58	---	74.00	54.00	-6.42	Peak

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Operation Mode:** Bluetooth / TX / CH High**Test Date:** March 13, 2006**Temperature:** 21°C**Tested by:** Ryan Chen**Humidity:** 58 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Ant.Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1598.00	V	58.96	---	-13.33	45.63	---	74.00	54.00	-8.37	Peak
1994.00	V	60.56	---	-10.95	49.61	---	74.00	54.00	-4.39	Peak
3195.00	V	56.90	---	-9.48	47.42	---	74.00	54.00	-6.58	Peak
3585.00	V	56.90	---	-9.10	47.80	---	74.00	54.00	-6.20	Peak
3990.00	V	59.45	---	-8.49	50.96	---	74.00	54.00	-3.04	Peak
4785.00	V	53.47	---	-7.80	45.67	---	74.00	54.00	-8.33	Peak
1394.00	H	66.04	---	-14.13	51.91	---	74.00	54.00	-2.09	Peak
1596.00	H	64.39	---	-13.34	51.05	---	74.00	54.00	-2.95	Peak
1996.00	H	63.20	43.18	-10.93	52.27	32.25	74.00	54.00	-21.75	Average
2192.00	H	60.04	---	-10.66	49.38	---	74.00	54.00	-4.62	Peak
2794.00	H	58.18	---	-9.90	48.29	---	74.00	54.00	-5.71	Peak
4395.00	H	52.99	---	-7.99	45.00	---	74.00	54.00	-9.00	Peak

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. $\text{Margin (dB)} = \text{Remark result (dBuV/m)} - \text{Average limit (dBuV/m)}$.



CONDITION C: CO-LOCATED OPERATION

7.15 POWER LINE CONDUCTED EMISSIONS

LIMIT

According to §15.207(a), except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency Range (MHz)	Limits (dB μ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56*	56 to 46*
0.50 to 5	56	46
5 to 30	60	50

* Decreases with the logarithm of the frequency.

Test Configuration

See test photographs attached in Appendix 1 for the actual connections between EUT and support equipment.

TEST PROCEDURE

1. The EUT was placed on a table, which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all frequency measured were complete.



TEST RESULTS

The initial step in collecting conducted data is a spectrum analyzer peak scan of the measurement range. Significant peaks are then marked as shown on the following data page, and these signals are then quasi-peaked.

Operation Mode: Normal Link**Test Date:** March 10, 2006**Temperature:** 25°C**Tested by:** Chris Hsieh**Humidity:** 55% RH

Freq. (MHz)	QP Reading (dBuV)	AV Reading (dBuV)	Corr. factor (dB)	QP Result (dBuV)	AV Result (dBuV)	QP Limit (dBuV)	AV Limit (dBuV)	QP Margin (dB)	AV Margin (dB)	Note
0.423	31.620	29.890	0.100	31.720	29.990	57.389	47.389	-25.669	-17.399	L1
0.545	35.790	33.820	0.100	35.890	33.920	56.000	46.000	-20.110	-12.080	L1
0.787	30.840	28.330	0.100	30.940	28.430	56.000	46.000	-25.060	-17.570	L1
1.210	17.760	14.240	0.100	17.860	14.340	56.000	46.000	-38.140	-31.660	L1
2.130	26.330	22.050	0.100	26.430	22.150	56.000	46.000	-29.570	-23.850	L1
10.911	31.960	28.030	0.718	32.678	28.748	60.000	50.000	-27.322	-21.252	L1
0.300	30.150	28.820	0.100	30.250	28.920	60.243	50.243	-29.993	-21.323	L2
0.484	31.160	26.750	0.100	31.260	26.850	56.270	46.270	-25.010	-19.420	L2
1.032	29.990	25.240	0.100	30.090	25.340	56.000	46.000	-25.910	-20.660	L2
1.890	27.760	24.790	0.100	27.860	24.890	56.000	46.000	-28.140	-21.110	L2
11.086	30.850	26.360	0.722	31.572	27.082	60.000	50.000	-28.428	-22.918	L2
27.497	27.930	19.920	1.300	29.230	21.220	60.000	50.000	-30.770	-28.780	L2


Remark:

1. The measuring frequencies range between 0.15 MHz and 30 MHz.
2. The emissions measured in the frequency range between 0.15 MHz and 30MHz were made with an instrument using Quasi-peak detector and Average detector.
3. The IF bandwidth of SPA between 0.15MHz and 30MHz was 10kHz. The IF bandwidth of Test Receiver between 0.15MHz and 30MHz was 9kHz.
4. L1 = Line One (Live Line) / L2 = Line Two (Neutral Line)




Test Data Plots

Conducted emissions (Line 1)

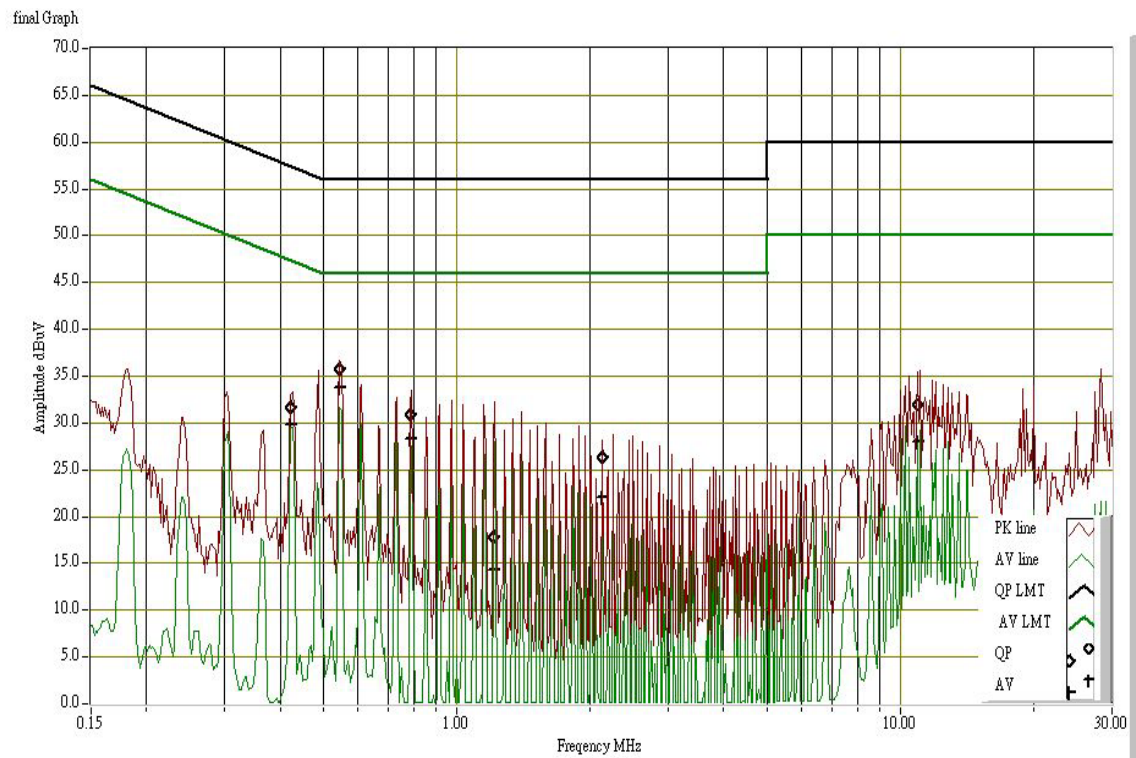

Conducted emissions (Line 2)

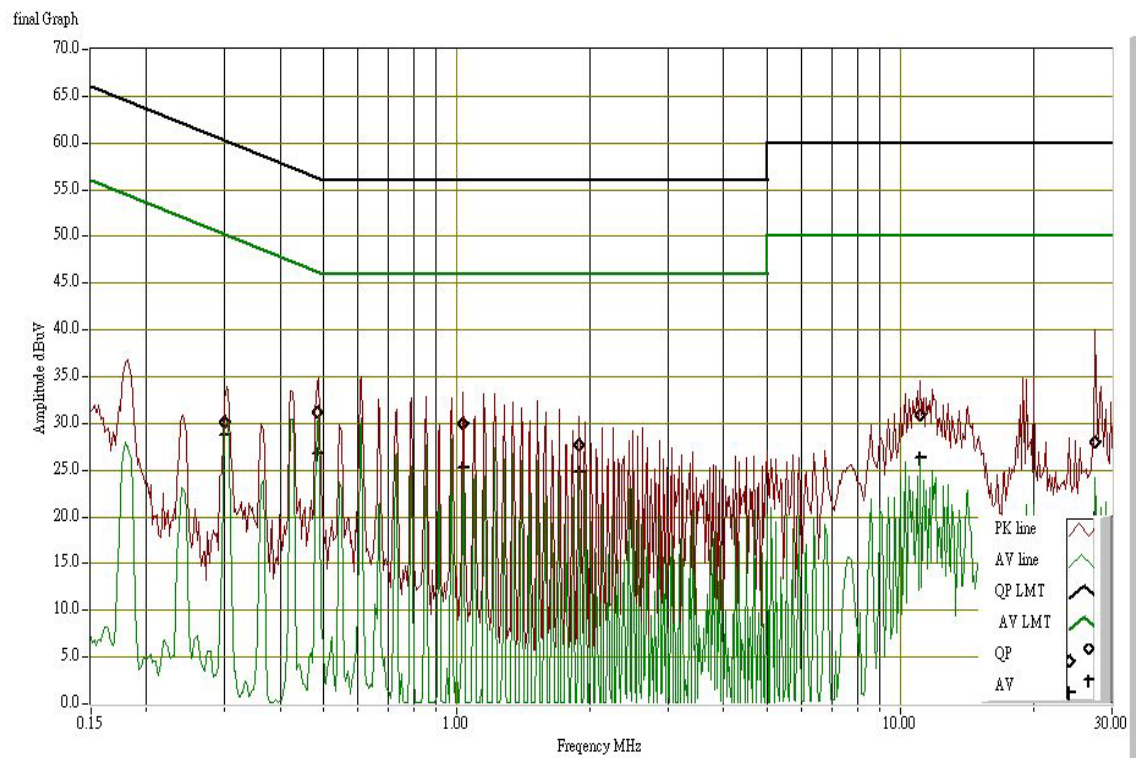



APPENDIX I

RADIO FREQUENCY EXPOSURE

LIMIT

According to §15.247(i), systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess of the Commission's guidelines. See § 1.1307(b)(1) of this chapter.

EUT Specification

EUT	Ultra Mobile PC
Frequency band (Operating)	<input checked="" type="checkbox"/> WLAN: 2.412GHz ~ 2.462GHz <input type="checkbox"/> WLAN: 5.18GHz ~ 5.32GHz / 5.50GHz ~ 5.70GHz <input type="checkbox"/> WLAN: 5.745GHz ~ 5.825GHz <input type="checkbox"/> Others
Device category	<input checked="" type="checkbox"/> Portable (<20cm separation) <input type="checkbox"/> Mobile (>20cm separation) <input type="checkbox"/> Others
Exposure classification	<input checked="" type="checkbox"/> Occupational/Controlled exposure (S = 5mW/cm ²) <input type="checkbox"/> General Population/Uncontrolled exposure (S=1mW/cm ²)
Antenna diversity	<input checked="" type="checkbox"/> Single antenna <input type="checkbox"/> Multiple antennas <div style="margin-left: 20px;"> <input type="checkbox"/> Tx diversity <input type="checkbox"/> Rx diversity <input type="checkbox"/> Tx/Rx diversity </div>
Max. output power	IEEE 802.11b: 15.06 dBm (32.06mW) IEEE 802.11g: 14.15 dBm (26.00mW)
Antenna gain (Max)	1.08dBi (Numeric gain: 1.28)
Evaluation applied	<input type="checkbox"/> MPE Evaluation <input checked="" type="checkbox"/> SAR Evaluation* <input type="checkbox"/> N/A

Remark:

1. The maximum output power is 15.06dBm (32.06mW) at 2462MHz (with 1.28 numeric antenna gain.)
2. DTS device is not subject to routine RF evaluation; MPE estimate is used to justify the compliance.
3. For mobile or fixed location transmitters, no SAR consideration applied. The minimum separation generally be used is at least 20 cm, even if the calculations indicate that the MPE distance would be lesser.

TEST RESULTS

No non-compliance noted.

Remark: Please refer to the separated SAR report.

MPE evaluation

Not applicable.

**EUT Specification**

EUT	Ultra Mobile PC
Frequency band (Operating)	<input type="checkbox"/> WLAN: 2.412GHz ~ 2.462GHz <input type="checkbox"/> WLAN: 5.18GHz ~ 5.32GHz / 5.50GHz ~ 5.70GHz <input type="checkbox"/> WLAN: 5.745GHz ~ 5.825GHz <input checked="" type="checkbox"/> Others <u>Bluetooth: 2.402GHz ~ 2.480GHz</u>
Device category	<input checked="" type="checkbox"/> Portable (<20cm separation) <input type="checkbox"/> Mobile (>20cm separation) <input type="checkbox"/> Others _____
Exposure classification	<input type="checkbox"/> Occupational/Controlled exposure ($S = 5mW/cm^2$) <input checked="" type="checkbox"/> General Population/Uncontrolled exposure ($S=1mW/cm^2$)
Antenna diversity	<input checked="" type="checkbox"/> Single antenna <input type="checkbox"/> Multiple antennas <input type="checkbox"/> Tx diversity <input type="checkbox"/> Rx diversity <input type="checkbox"/> Tx/Rx diversity
Max. output power	3.56 dBm (2.27mW)
Antenna gain (Max)	2.0 dBi (Numeric gain: 1.58)
Evaluation applied	<input type="checkbox"/> MPE Evaluation <input type="checkbox"/> SAR Evaluation <input checked="" type="checkbox"/> N/A*

Remark:

1. The maximum output power is 3.56dBm (2.27mW) at 2441, 2480MHz (with 1.58 numeric antenna gain.)
2. DTS device is not subject to routine RF evaluation; MPE estimate is used to justify the compliance.
3. For mobile or fixed location transmitters, no SAR consideration applied. The maximum power density is $1.0 mW/cm^2$ even if the calculation indicates that the power density would be larger.

TEST RESULTS

No non-compliance noted.

(SAR evaluation is not required for the PORTABLE device while its maximum output power is lower than the general population low threshold: $60/f_{(GHz)}=60/2.441=24.58mW$)