RM1105,11FL, ACE TECHNO TOWER
197-22,GURO-DONG GURO-GU SEOUL KOREA
81221095059F81221095056 email thrukang@kornet.net



Test Report

Product Name: 49.82-49.90 MHz Wireless R/C Toy - TX

FCC ID: QG33282T49

#### Applicant:

PLANET TOYS WORLDWIDE LTD.
1107 CHINACHEM GOLDEN PLAZA
77 MODY ROAD, TSIMSHATSUI EAST
KOWLOON
HONG KONG

Date Receipt: 12/30/2003

Date Tested: 12/29/2003

APPLICANT: PLANET TOYS WORLDWIDE LTD.

RM1105,11FL, ACE TECHNO TOWER
197-22,GURO-DONG GURO-GU SEOUL KOREA
81221095059F81221095056 email thrukang@kornet.net

#### TABLE OF CONTENTS LIST

APPLICANT: PLANET TOYS WORLDWIDE LTD.

**FCC ID:** QG33282T49

#### TEST REPORT CONTAINING:

PAGE	3TEST EQUIPMENT LIST
PAGE	4TEST PROCEDURE
PAGE	5-6RADIATION INTERFERENCE TEST DATA
PAGE	7 OCCUPIED BANDWIDTH
PAGE	8-9OCCUPIED BANDWIDTH PLOT

#### EXHIBITS CONTAINING:

EXHIBIT 2	BLOCK DIAGRAM
EXHIBIT 3	SCHEMATIC
EXHIBIT 4	A-4BPARTS LIST
EXHIBIT 5	INSTRUCTION MANUAL
EXHIBIT 6	SAMPLE OF FCC ID LABEL
EXHIBIT 7	LOCATION OF FCC ID LABEL
EXHIBIT 8	EXTERNAL PHOTO - FRONT SIDE
EXHIBIT 9	EXTERNAL PHOTO - BACK SIDE
EXHIBIT 1	0INTERNAL PHOTO - COMPONENT SIDE
EXHIBIT 1	1INTERNAL PHOTO - COPPER SIDE
EXHIBIT 1	4CIRCUIT DESCRIPTION

APPLICANT: PLANET TOYS WORLDWIDE LTD.

RM1105,11FL, ACE TECHNO TOWER 197-22,GURO-DONG GURO-GU SEOUL KOREA 81221095059F81221095056 email thrukang@kornet.net

### **Equipment List**

DEVICE	DEVICE MODEL		MODEL MFGR SERNO		SERNO	DUE.CAL	
EMI Test Receiver	ESVS 10	Rohde & Schwarz	830489/001	2004.04.25.			
Spectrum Analyzer	8566B	Hewlett Packard	2311A02394	2004.03.17			
Spectrum Display	85662A	Hewlett Packard	2542A12429	2004.03.17			
Quasi-Peak Adapter	85650A	Hewlett Packard	2521A00887	2004.03.17			
RF Preselector	85685A	Hewlett Packard	2648A00504	2004.03.17			
Pre- Amplifier	8449B	Hewlett Packard	3008A00375	2004.03.17			
Pre- Amplifier	8447F	Hewlett Packard	3113A05367	2004.03.17			
Spectrum Monitor	EZM	Rohde & Schwarz	862304/007	2004.03.17			
Bico- Antenna	94455-1	Eaton	977	2004.03.17			
Log- Periodic Antenna	3146	EMCO	2051	2004.03.17			
Dipole Antenna	TDA25/1/2	Electro Metrics	176/200/200	2004.03.17			
Horn Antenna	SAS-571	A.H Systems	414	2004.03.17			
Spectrum Analyzer	R3261C	Advantest	71720189	2004.04.26			
LISN	KNW-242	Kyoritsu	8-923-2	2004.07.12			
LISN	8012-50-R-24	Solar	8379121	2004.07.12			
Loop Ant	6507	EMCO	1435	2004.10.06			

APPLICANT: PLANET TOYS WORLDWIDE LTD.

RM1105,11FL, ACE TECHNO TOWER 197-22,GURO-DONG GURO-GU SEOUL KOREA 81221095059F81221095056 email thrukang@kornet.net

#### TEST PROCEDURE

**GENERAL:** This report shall NOT be reproduced except in full without the written approval of THRULab & ENGINEERING.

RADIATION INTERFERENCE: The test procedure used was ANSI STANDARD C63.4-1992 using a HEWLETT PACKARD spectrum analyzer with a preselector. The bandwidth of the spectrum analyzer was 100 kHz with an appropriate sweep speed. The analyzer was calibrated in dB above a microvolt at the output of the antenna. The resolution bandwidth was 100 kHz and the video bandwidth was 300 kHz. The ambient temperature of the UUT was 80°C with a humidity of 76%.

FORMULA OF CONVERSION FACTORS: The Field Strength at 3m was established by adding the meter reading of the spectrum analyzer (which is set to read in units of dBuV) to the antenna correction factor supplied by the antenna manufacturer. The antenna correction factors are stated in terms of dB. The gain of the Preselector was accounted for in the Spectrum Analyzer Meter Reading.

#### Example:

Freq (MHz) METER READING + ACF = FS 33 20 dBuV + 10.36 dB = 30.36 dBuV/m @ 3m

ANSI STANDARD C63.4-1992 10.1.7 MEASUREMENT PROCEDURES: The unit under test was placed on a table 80 cm high and with dimensions of 1m by 1.5m. The table used for radiated measurements is capable of continuous rotation.

When an emission was found, the table was rotated to produce the maximum signal strength. At this point, the antenna was raised and lowered from 1m to 4m. The antenna was placed in both the horizontal and vertical planes.

The situation was similar for the conducted measurement except that the table did not rotate. The EUT was setup as described in ANSIC63.4-1992 with the EUT 40 cm from the vertical ground wall.

Not Applicable, battery operated.

APPLICANT: PLANET TOYS WORLDWIDE LTD.

RM1105,11FL, ACE TECHNO TOWER
197-22,GURO-DONG GURO-GU SEOUL KOREA
81221095059F81221095056 email thrukang@kornet.net

APPLICANT: PLANET TOYS WORLDWIDE LTD.

FCC ID: QG33282T49

NAME OF TEST: RADIATION INTERFERENCE

RULES PART NO.: 15.235

REQUIREMENTS: CARRIER FREQUENCY SHALL NOT EXCEEDS 10,000 microvolts/meter

AT 3M.

	Frequency	Result	Antenna	Cable	Limit	Value	Margin
	(MHz)	(dBuv)	Factor	Loss	(dBuv)	(dBuv)	(dBuv)
PK	49.85	53.8	10.9	1	100	41.9	-47.5
AV	49.85	49.7	10.9	1	80	37.8	-34.9

APPLICANT: PLANET TOYS WORLDWIDE LTD.

RM1105,11FL, ACE TECHNO TOWER 197-22,GURO-DONG GURO-GU SEOUL KOREA 81221095059F81221095056 email thrukang@kornet.net

APPLICANT: PLANET TOYS WORLDWIDE LTD.

FCC ID: QG33282T49

NAME OF TEST: RADIATION INTERFERENCE

**RULES PART NO.:** 15.235

**REQUIREMENTS:** 

OUT-OF-BAND EMISSIONS SHALL NOT EXCEED:

30 - 88 MHz 40.0 dBuV/M MEASURED AT 3 METERS

88 - 216 MHz 43.5 dBuV/M 216 - 960 MHz 46.0 dBuV/M ABOVE 960 MHz 54.0 dBuV/M

#### TEST DATA:

Result (dBuv)	Polar	Antenna Factor	Cable Loss	Limit value (dBuv)	Value (dBuv)	Margin (dBuv)
16.1	Н	9.09	1.07	40.0	5.9	-23.9
18.4	V	6.35	1.17	40.0	10.9	-21.6
15.7	Н	9.47	1.45	40.0	4.8	-24.3
17.9	V	11.2	1.6	40.0	5.1	-22.1
18.7	Н	11.20	1.62	40.0	5.9	-21.3
22.9	V	16.7	2.1	43.5	4.1	-20.6
20.6	V	16.0	2.5	43.5	2.1	-22.9
20.8	V	11.8	3.1	46.0	5.9	-25.2
35.3	V	16.3	3.4	46.0	15.6	-10.7
30.3	V	14.9	3.8	46.0	11.6	-15.7
29.4	V	15.4	4.2	46.0	9.8	-16.6
25.4	V	16.4	4.5	46.0	4.5	-20.6
25.4	V	18.2	4.9	46.0	2.3	-20.6
	16.1 18.4 15.7 17.9 18.7 22.9 20.6 20.8 35.3 30.3 29.4 25.4	(dBuv)  16.1 H  18.4 V  15.7 H  17.9 V  18.7 H  22.9 V  20.6 V  20.8 V  35.3 V  30.3 V  29.4 V  25.4 V	(dBuv)     Factor       16.1     H     9.09       18.4     V     6.35       15.7     H     9.47       17.9     V     11.2       18.7     H     11.20       22.9     V     16.7       20.6     V     16.0       20.8     V     11.8       35.3     V     16.3       30.3     V     14.9       29.4     V     15.4       25.4     V     16.4	(dBuv)     Factor     Loss       16.1     H     9.09     1.07       18.4     V     6.35     1.17       15.7     H     9.47     1.45       17.9     V     11.2     1.6       18.7     H     11.20     1.62       22.9     V     16.7     2.1       20.6     V     16.0     2.5       20.8     V     11.8     3.1       35.3     V     16.3     3.4       30.3     V     14.9     3.8       29.4     V     15.4     4.2       25.4     V     16.4     4.5	(dBuv)         Factor         Loss         value (dBuv)           16.1         H         9.09         1.07         40.0           18.4         V         6.35         1.17         40.0           15.7         H         9.47         1.45         40.0           17.9         V         11.2         1.6         40.0           18.7         H         11.20         1.62         40.0           22.9         V         16.7         2.1         43.5           20.6         V         16.0         2.5         43.5           20.8         V         11.8         3.1         46.0           35.3         V         16.3         3.4         46.0           30.3         V         14.9         3.8         46.0           29.4         V         15.4         4.2         46.0           25.4         V         16.4         4.5         46.0	(dBuv)         Factor         Loss         value (dBuv)           16.1         H         9.09         1.07         40.0         5.9           18.4         V         6.35         1.17         40.0         10.9           15.7         H         9.47         1.45         40.0         4.8           17.9         V         11.2         1.6         40.0         5.1           18.7         H         11.20         1.62         40.0         5.9           22.9         V         16.7         2.1         43.5         4.1           20.6         V         16.0         2.5         43.5         2.1           20.8         V         11.8         3.1         46.0         5.9           35.3         V         16.3         3.4         46.0         15.6           30.3         V         14.9         3.8         46.0         11.6           29.4         V         15.4         4.2         46.0         9.8           25.4         V         16.4         4.5         46.0         4.5

**SAMPLE CALCULATION:** FSdBuV/m = MR (dBuV) + ACFdB.

TEST PROCEDURE: The procedure used was ANSI STANDARD C63.4-1992. The spectrum was scanned from 30 MHz to 1000 MHz. When an emission was found, the table was rotated to produce the maximum signal strength. The antenna was placed in both the horizontal and vertical planes and the worse case emissions were reported. The UUT was tested in 3 orthogonal planes.

TEST RESULTS: THE UNIT DOES MEET THE FCC REQUIREMENTS.

PERFORMED BY: Kyoung.M Choi DATE: 12/30/2003

APPLICANT: PLANET TOYS WORLDWIDE LTD.

RM1105,11FL, ACE TECHNO TOWER 197-22,GURO-DONG GURO-GU SEOUL KOREA 81221095059F81221095056 email thrukang@kornet.net

APPLICANT: PLANET TOYS WORLDWIDE LTD.

**FCC ID:** QG33282T49

NAME OF TEST: Occupied Bandwidth

**RULES PART NO.:** 15.235

**REQUIREMENTS:** The field strength of any emissions appearing between the band edges and up to 10 kHz above and below the band edges shall be attenuated at least 26 dB below the level of the unmodulated carrier or to the general limits of 15.209, whichever permits the higher emission levels.

30 - 88 MHz 40.0 dBuV/M MEASURED AT 3 METERS

88 - 216 MHz 43.5 dBuV/M 216 - 960 MHz 46.0 dBuV/m ABOVE 960 MHz 54.0 dBuV/m

THE GRAPH ON THE NEXT PAGE REPRESENTS THE EMISSIONS TAKEN FOR THE DEVICE.

**METHOD OF MEASUREMENT:** A small sample of the transmitter output was fed into the spectrum analyzer and the attached plot was taken. The vertical scale is set to 10 dB per division. The horizontal scale is set to 10 kHz per division.


TEST RESULTS: The unit DOES meet the FCC requirements.

PERFORMED BY: Kyoung.M Choi DATE: 12/29/2003

APPLICANT: PLANET TOYS WORLDWIDE LTD.


RM1105,11FL, ACE TECHNO TOWER 197-22,GURO-DONG GURO-GU SEOUL KOREA 81221095059F81221095056 email thrukang@kornet.net

#### OCCUPIED BANDWIDTH PLOT

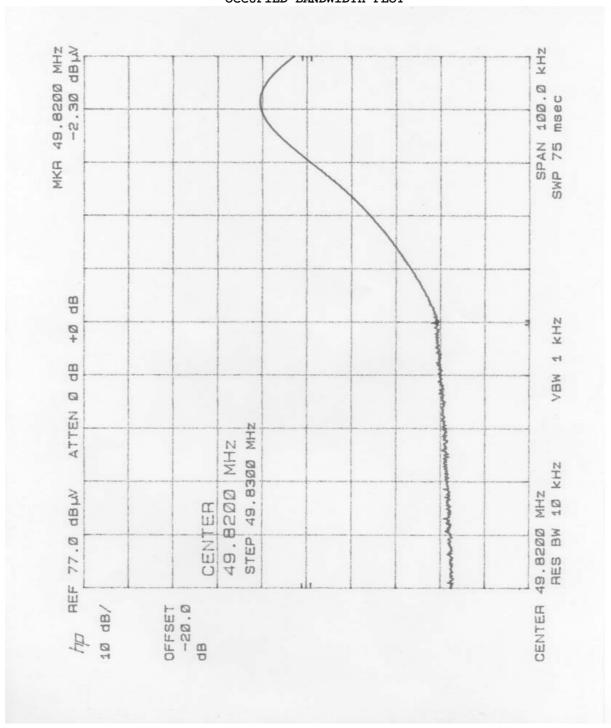

APPLICANT: PLANET TOYS WORLDWIDE LTD.

RM1105,11FL, ACE TECHNO TOWER 197-22,GURO-DONG GURO-GU SEOUL KOREA 81221095059F81221095056 email thrukang@kornet.net

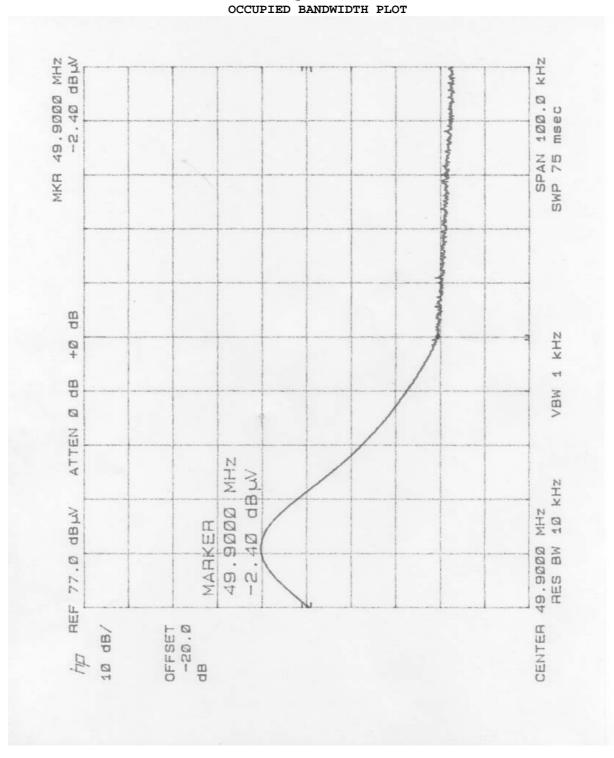

APPLICANT: PLANET TOYS WORLDWIDE LTD.