

TEST REPORT

Product : Wireless Smart Audio Module
Trade mark : Linkplay
Model/Type reference : A98ML, A98L, A98L-12, A98L-22, A98L-55
A98ML-12, A98ML-22, A98ML-55
Serial Number : N/A
Report Number : EED32L00168302
FCC ID : 2ANOG-A98XLXX
Date of Issue : Aug. 16, 2019
Test Standards : 47 CFR Part 15 Subpart C
Test result : PASS

Prepared for:

Linkplay Technology Inc
8F-8036, Qianren Building, No. 7, Yingcui Road,
Jiangning District, Nanjing, China

Prepared by:

Centre Testing International Group Co., Ltd.
Hongwei Industrial Zone, Bao'an 70 District,
Shenzhen, Guangdong, China
TEL: +86-755-3368 3668
FAX: +86-755-3368 3385

Tested By:

Jay Zheng
Jay Zheng

Compiled by:

Alex Wu
Alex Wu

Reviewed by:

Ware Xin

Approved by:

Kevin Tang

Date:

Aug. 16, 2019

Check No:3915541757



2 Version

Version No.	Date	Description
00	Aug. 16, 2019	Original

3 Test Summary

Test Item	Test Requirement	Test method	Result
Antenna Requirement	47 CFR Part 15 Subpart C Section 15.203/15.247 (c)	ANSI C63.10-2013	N/A
AC Power Line Conducted Emission	47 CFR Part 15 Subpart C Section 15.207	ANSI C63.10-2013	PASS
Conducted Peak Output Power	47 CFR Part 15 Subpart C Section 15.247 (b)(1)	ANSI C63.10-2013	PASS
20dB Occupied Bandwidth	47 CFR Part 15 Subpart C Section 15.247 (a)(1)	ANSI C63.10-2013	PASS
Carrier Frequencies Separation	47 CFR Part 15 Subpart C Section 15.247 (a)(1)	ANSI C63.10-2013	PASS
Hopping Channel Number	47 CFR Part 15 Subpart C Section 15.247 (b)	ANSI C63.10-2013	PASS
Dwell Time	47 CFR Part 15 Subpart C Section 15.247 (a)(1)	ANSI C63.10-2013	PASS
Pseudorandom Frequency Hopping Sequence	47 CFR Part 15 Subpart C Section 15.247(b)(4)&TCB Exclusion List (7 July 2002)	ANSI C63.10-2013	PASS
Band-edge for RF Conducted Emissions	47 CFR Part 15 Subpart C Section 15.247(d)	ANSI C63.10-2013	PASS
RF Conducted Spurious Emissions	47 CFR Part 15 Subpart C Section 15.247(d)	ANSI C63.10-2013	PASS
Radiated Spurious emissions	47 CFR Part 15 Subpart C Section 15.205/15.209	ANSI C63.10-2013	PASS
Restricted bands around fundamental frequency (Radiated Emission)	47 CFR Part 15 Subpart C Section 15.205	ANSI C63.10-2013	PASS

Remark:

Test according to ANSI C63.4-2014 & ANSI C63.10-2013.

The tested samples and the sample information are provided by the client.

Model No:A98ML,A98L,A98L-12,A98L-22,A98L-55 A98ML-12,A98ML-22,A98ML-55

Only the model A98ML was tested, The difference is that ROM and RAM are different in size or customer.


4 Content

1 COVER PAGE.....	1
2 VERSION.....	2
3 TEST SUMMARY.....	3
4 CONTENT.....	4
5 TEST REQUIREMENT.....	5
5.1 TEST SETUP.....	5
5.1.1 For Conducted test setup.....	5
5.1.2 For Radiated Emissions test setup.....	5
5.1.3 For Conducted Emissions test setup.....	6
5.2 TEST ENVIRONMENT.....	6
5.3 TEST CONDITION.....	6
6 GENERAL INFORMATION.....	7
6.1 CLIENT INFORMATION.....	7
6.2 GENERAL DESCRIPTION OF EUT.....	7
6.3 PRODUCT SPECIFICATION SUBJECTIVE TO THIS STANDARD.....	8
6.4 DESCRIPTION OF SUPPORT UNITS.....	9
6.5 TEST LOCATION.....	9
6.6 DEVIATION FROM STANDARDS.....	9
6.7 ABNORMALITIES FROM STANDARD CONDITIONS.....	9
6.8 OTHER INFORMATION REQUESTED BY THE CUSTOMER.....	9
6.9 MEASUREMENT UNCERTAINTY (95% CONFIDENCE LEVELS, K=2).....	9
7 EQUIPMENT LIST.....	10
8 RADIO TECHNICAL REQUIREMENTS SPECIFICATION.....	14
Appendix A): 20dB Occupied Bandwidth.....	15
Appendix B): Carrier Frequency Separation.....	19
Appendix C): Dwell Time.....	23
Appendix D): Hopping Channel Number.....	27
Appendix E): Conducted Peak Output Power.....	29
Appendix F): Band-edge for RF Conducted Emissions.....	33
Appendix G): RF Conducted Spurious Emissions.....	38
Appendix H): Pseudorandom Frequency Hopping Sequence.....	48
Appendix I): Antenna Requirement.....	49
Appendix J): AC Power Line Conducted Emission.....	50
Appendix K): Restricted bands around fundamental frequency (Radiated).....	53
Appendix L): Radiated Spurious Emissions.....	78
PHOTOGRAPHS OF TEST SETUP.....	91
PHOTOGRAPHS OF EUT CONSTRUCTIONAL DETAILS.....	93

5 Test Requirement

5.1 Test setup

5.1.1 For Conducted test setup

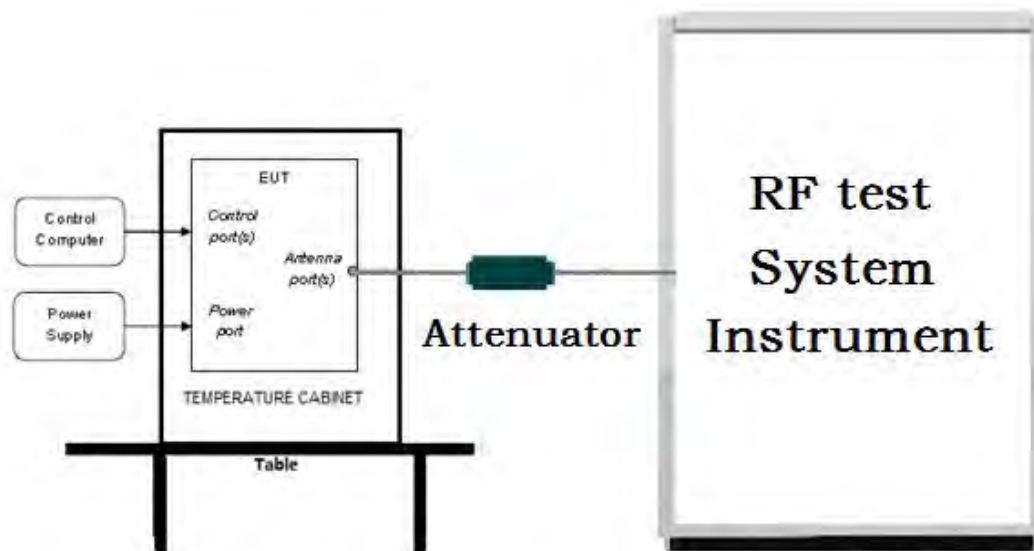

5.1.2 For Radiated Emissions test setup

Radiated Emissions setup:

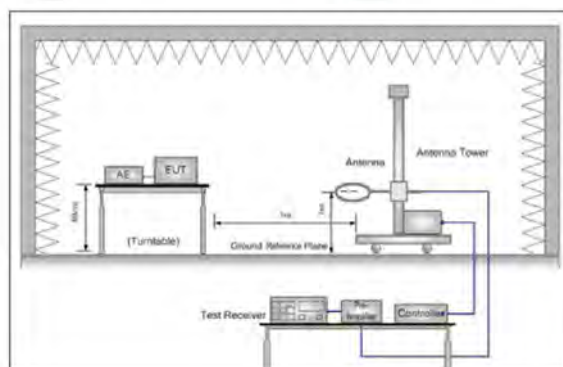


Figure 1. Below 30MHz

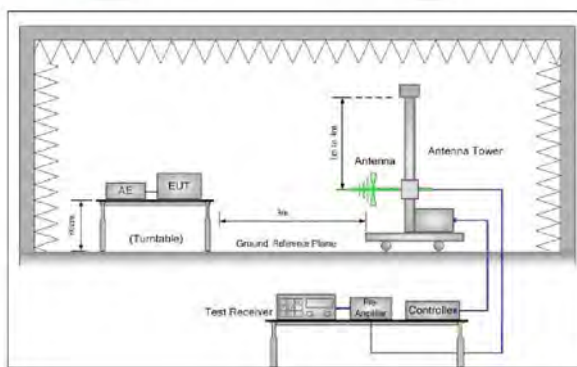


Figure 2. 30MHz to 1GHz


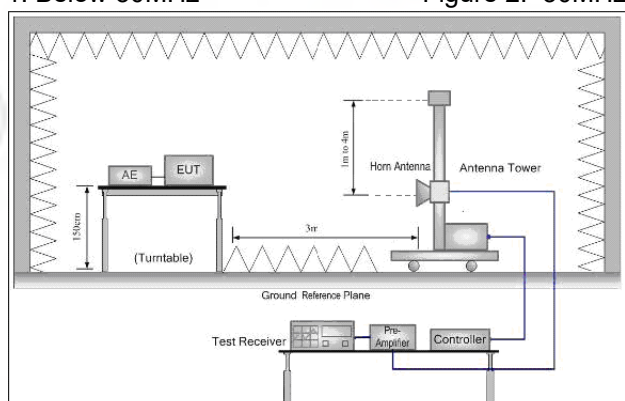


Figure 3. Above 1GHz

5.1.3 For Conducted Emissions test setup

Conducted Emissions setup

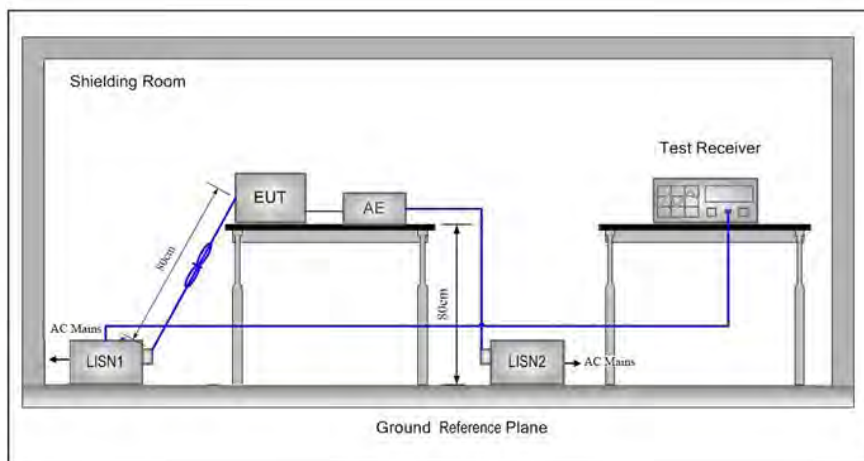

5.2 Test Environment

Operating Environment:

Temperature:	25.0 °C
Humidity:	58 % RH
Atmospheric Pressure:	1010mbar

5.3 Test Condition

Test Mode	Tx	RF Channel		
		Low(L)	Middle(M)	High(H)
GFSK/π/4DQPSK/ 8DPSK(DH1,DH3, DH5)	2402MHz ~2480 MHz	Channel 1	Channel 40	Channel79
		2402MHz	2441MHz	2480MHz
TX mode: The EUT transmitted the continuous modulation test signal at the specific channel(s).				

6 General Information

6.1 Client Information

Applicant:	Linkplay Technology Inc
Address of Applicant:	8F-8036, Qianren Building, No. 7, Yingcui Road, Jiangning District, Nanjing, China
Manufacturer:	Linkplay Technology Inc
Address of Manufacturer:	8F-8036, Qianren Building, No. 7, Yingcui Road, Jiangning District, Nanjing, China
Factory:	Linkplay Technology Inc
Address of Factory:	8F-8036, Qianren Building, No. 7, Yingcui Road, Jiangning District, Nanjing, China

6.2 General Description of EUT

Product Name:	Wireless Smart Audio Module
Model No.(EUT):	A98ML,A98L,A98L-12,A98L-22,A98L-55 A98ML-12,A98ML-22,A98ML-55
Test Model No.:	A98ML
Trade mark:	Linkplay
EUT Supports Radios application:	Bluetooth 4.1
Power Supply:	DC 5V
Sample Received Date:	Jun. 26, 2019
Sample tested Date:	Jun. 26, 2019 to Aug. 16, 2019

6.3 Product Specification subjective to this standard

Operation Frequency:	2402MHz~2480MHz						
Bluetooth Version:	3.0+EDR						
Modulation Technique:	FHSS						
Modulation Type:	GFSK, $\pi/4$ DQPSK, 8DPSK						
Number of Channel:	79						
Hopping Channel Type:	Adaptive Frequency Hopping systems						
Test Power Grade:	Default Setting						
Test Software of EUT:	Linkplay Factory Tool For Custom (manufacturer declare)						
Antenna Type:	PCB antenna						
Antenna Gain:	1.6dBi						
Test Voltage:	DC 5V						
Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2402MHz	21	2422MHz	41	2442MHz	61	2462MHz
2	2403MHz	22	2423MHz	42	2443MHz	62	2463MHz
3	2404MHz	23	2424MHz	43	2444MHz	63	2464MHz
4	2405MHz	24	2425MHz	44	2445MHz	64	2465MHz
5	2406MHz	25	2426MHz	45	2446MHz	65	2466MHz
6	2407MHz	26	2427MHz	46	2447MHz	66	2467MHz
7	2408MHz	27	2428MHz	47	2448MHz	67	2468MHz
8	2409MHz	28	2429MHz	48	2449MHz	68	2469MHz
9	2410MHz	29	2430MHz	49	2450MHz	69	2470MHz
10	2411MHz	30	2431MHz	50	2451MHz	70	2471MHz
11	2412MHz	31	2432MHz	51	2452MHz	71	2472MHz
12	2413MHz	32	2433MHz	52	2453MHz	72	2473MHz
13	2414MHz	33	2434MHz	53	2454MHz	73	2474MHz
14	2415MHz	34	2435MHz	54	2455MHz	74	2475MHz
15	2416MHz	35	2436MHz	55	2456MHz	75	2476MHz
16	2417MHz	36	2437MHz	56	2457MHz	76	2477MHz
17	2418MHz	37	2438MHz	57	2458MHz	77	2478MHz
18	2419MHz	38	2439MHz	58	2459MHz	78	2479MHz
19	2420MHz	39	2440MHz	59	2460MHz	79	2480MHz
20	2421MHz	40	2441MHz	60	2461MHz		

6.4 Description of Support Units

The EUT has been tested independently.

6.5 Test Location

All tests were performed at:

Centre Testing International Group Co., Ltd

Building C, Hongwei Industrial Park Block 70, Bao'an District, Shenzhen, China

Telephone: +86 (0) 755 33683668 Fax: +86 (0) 755 33683385

No tests were sub-contracted.

FCC Designation No.: CN1164

6.6 Deviation from Standards

None.

6.7 Abnormalities from Standard Conditions

None.

6.8 Other Information Requested by the Customer

None.

6.9 Measurement Uncertainty (95% confidence levels, k=2)

No.	Item	Measurement Uncertainty
1	Radio Frequency	7.9×10^{-8}
2	RF power, conducted	0.46dB (30MHz-1GHz)
		0.55dB (1GHz-18GHz)
3	Radiated Spurious emission test	4.3dB (30MHz-1GHz)
		4.5dB (1GHz-12.75GHz)
4	Conduction emission	3.5dB (9kHz to 150kHz)
		3.1dB (150kHz to 30MHz)
5	Temperature test	0.64°C
6	Humidity test	3.8%
7	DC power voltages	0.026%

7 Equipment List

RF test system					
Equipment	Manufacturer	Model No.	Serial Number	Cal. Date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
Signal Generator	Keysight	E8257D	MY53401106	03-01-2019	02-28-2020
Spectrum Analyzer	Keysight	N9010A	MY54510339	03-01-2019	02-28-2020
Signal Generator	Keysight	N5182B	MY53051549	03-01-2019	02-28-2020
High-pass filter	Sinoscite	FL3CX03WG1 8NM12-0398-002	---	01-09-2019	01-08-2020
High-pass filter	MICRO-TRONICS	SPA-F-63029-4	---	01-09-2019	01-08-2020
DC Power	Keysight	E3642A	MY54426035	03-01-2019	02-28-2020
PC-1	Lenovo	R4960d	---	03-01-2019	02-28-2020
BT&WI-FI Automatic control	R&S	OSP120	101374	03-01-2019	02-28-2020
RF control unit	JS Tonscend	JS0806-2	15860006	03-01-2019	02-28-2020
RF control unit	JS Tonscend	JS0806-1	15860004	03-01-2019	02-28-2020
RF control unit	JS Tonscend	JS0806-4	158060007	03-01-2019	02-28-2020
BT&WI-FI Automatic test software	JS Tonscend	JS1120-2	---	03-01-2019	02-28-2020
Temperature/Humidity Indicator	biaozhi	HM10	1804186	10-12-2018	10-11-2019

Conducted disturbance Test					
Equipment	Manufacturer	Model No.	Serial Number	Cal. date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
Receiver	R&S	ESCI	100435	05-20-2019	05-18-2020
Temperature/ Humidity Indicator	Defu	TH128	/	06-14-2019	06-12-2020
Communication test set	Agilent	E5515C	GB47050 534	03-01-2019	02-28-2020
Communication test set	R&S	CMW500	102898	01-18-2019	01-17-2020
LISN	R&S	ENV216	100098	05-08-2019	05-06-2020
LISN	schwarzbeck	NNLK8121	8121-529	05-08-2019	05-06-2020
Voltage Probe	R&S	ESH2-Z3 0299.7810.5 6	100042	06-13-2017	06-11-2020
Current Probe	R&S	EZ-17 816.2063.03	100106	05-20-2019	05-18-2020
ISN	TESEQ	ISN T800	30297	01-06-2019	01-15-2020
Barometer	changchun	DYM3	1188	06-20-2019	06-18-2020

3M Semi/full-anechoic Chamber					
Equipment	Manufacturer	Model No.	Serial Number	Cal. date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
3M Chamber & Accessory Equipment	TDK	SAC-3	---	05-24-2019	05-22-2020
TRILOG Broadband Antenna	Schwarzbeck	VULB9163	9163-401	12-21-2018	12-20-2019
TRILOG Broadband Antenna	Schwarzbeck	VULB9163	9163-618	07-26-2019	07-24-2020
Microwave Preamplifier	Agilent	8449B	3008A02425	08-21-2018	08-20-2019
Microwave Preamplifier	Tonscend	EMC051845 SE	980380	01-16-2019	01-15-2020
Horn Antenna	Schwarzbeck	BBHA 9120D	9120D-1869	04-25-2018	04-23-2021
Horn Antenna	ETS-LINDGREN	3117	00057410	06-05-2018	06-03-2021
Double ridge horn antenna	A.H.SYSTEMS	SAS-574	374	06-05-2018	06-04-2021
Pre-amplifier	A.H.SYSTEMS	PAP-1840-60	6041.6041	07-26-2019	07-24-2020
Loop Antenna	Schwarzbeck	FMZB 1519B	1519B-076	04-25-2018	04-25-2021
Spectrum Analyzer	R&S	FSP40	100416	04-28-2019	04-26-2020
Receiver	R&S	ESCI	100435	05-20-2019	05-18-2020
Receiver	R&S	ESCI7	100938-003	11-23-2018	11-22-2019
Multi device Controller	maturo	NCD/070/10711112	---	01-09-2019	01-08-2020
Signal Generator	Agilent	E4438C	MY45095744	03-01-2019	02-28-2020
Signal Generator	Keysight	E8257D	MY53401106	03-01-2019	02-28-2020
Temperature/Humidity Indicator	Shanghai qixiang	HM10	1804298	10-12-2018	10-11-2019
Communication test set	Agilent	E5515C	GB47050534	03-01-2019	02-28-2020
Cable line	Fulai(7M)	SF106	5219/6A	01-09-2019	01-08-2020
Cable line	Fulai(6M)	SF106	5220/6A	01-09-2019	01-08-2020
Cable line	Fulai(3M)	SF106	5216/6A	01-09-2019	01-08-2020
Cable line	Fulai(3M)	SF106	5217/6A	01-09-2019	01-08-2020
High-pass filter	Sinoscite	FL3CX03WG18NM12-0398-002	---	01-09-2019	01-08-2020
High-pass filter	MICRO-TRONICS	SPA-F-63029-4	---	01-09-2019	01-08-2020
band rejection filter	Sinoscite	FL5CX01CA09CL12-0395-001	---	01-09-2019	01-08-2020
band rejection filter	Sinoscite	FL5CX01CA08CL12-0393-001	---	01-09-2019	01-08-2020
band rejection filter	Sinoscite	FL5CX02CA04CL12-0396-002	---	01-09-2019	01-08-2020
band rejection filter	Sinoscite	FL5CX02CA03CL12-0394-001	---	01-09-2019	01-08-2020

3M full-anechoic Chamber					
Equipment	Manufacturer	Model No.	Serial Number	Cal. date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
RSE Automatic test software	JS Tonscend	JS36-RSE	10166	06-19-2019	06-17-2020
Receiver	Keysight	N9038A	MY57290136	03-27-2019	03-25-2020
Spectrum Analyzer	Keysight	N9020B	MY57111112	03-27-2019	03-25-2020
Spectrum Analyzer	Keysight	N9030B	MY57140871	03-27-2019	03-25-2020
Loop Antenna	Schwarzbeck	FMZB 1519B	1519B-075	04-25-2018	04-23-2021
Loop Antenna	Schwarzbeck	FMZB 1519B	1519B-076	04-25-2018	04-23-2021
TRILOG Broadband Antenna	Schwarzbeck	VULB 9163	9163-1148	04-25-2018	04-23-2021
Horn Antenna	Schwarzbeck	BBHA 9170	9170-832	04-25-2018	04-23-2021
Horn Antenna	Schwarzbeck	BBHA 9170	9170-829	04-25-2018	04-23-2021
Communication Antenna	Schwarzbeck	CLSA 0110L	1014	02-14-2019	02-13-2020
Biconical antenna	Schwarzbeck	VUBA 9117	9117-381	04-25-2018	04-23-2021
Horn Antenna	ETS-LINDGREN	3117	00057407	07-10-2018	07-08-2021
Preamplifier	EMCI	EMC184055SE	980596	05-22-2019	5-20-2020
Communication test set	R&S	CMW500	102898	01-18-2019	01-17-2020
Preamplifier	EMCI	EMC001330	980563	05-08-2019	05-06-2020
Preamplifier	Agilent	8449B	3008A02425	08-21-2018	08-20-2019
Temperature/Humidity Indicator	biaozhi	GM1360	EE1186631	05-01-2019	04-30-2020
Signal Generator	KEYSIGHT	E8257D	MY53401106	03-01-2019	02-28-2020
Fully Anechoic Chamber	TDK	FAC-3	---	01-17-2018	01-15-2021
Filter bank	JS Tonscend	JS0806-F	188060094	04-10-2018	04-08-2021
Cable line	Times	SFT205-NMSM-2.50M	394812-0001	01-09-2019	01-08-2020
Cable line	Times	SFT205-NMSM-2.50M	394812-0002	01-09-2019	01-08-2020
Cable line	Times	SFT205-NMSM-2.50M	394812-0003	01-09-2019	01-08-2020
Cable line	Times	SFT205-NMSM-2.50M	393495-0001	01-09-2019	01-08-2020
Cable line	Times	EMC104-NMNM-1000	SN160710	01-09-2019	01-08-2020
Cable line	Times	SFT205-NMSM-3.00M	394813-0001	01-09-2019	01-08-2020
Cable line	Times	SFT205-NMNM-1.50M	381964-0001	01-09-2019	01-08-2020
Cable line	Times	SFT205-NMSM-7.00M	394815-0001	01-09-2019	01-08-2020
Cable line	Times	HF160-KMKM-3.00M	393493-0001	01-09-2019	01-08-2020

8 Radio Technical Requirements Specification

Reference documents for testing:

No.	Identity	Document Title
1	FCC Part15C	Subpart C-Intentional Radiators
2	ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices

Test Results List:

Test requirement	Test method	Test item	Verdict	Note
Part15C Section 15.247 (a)(1)	ANSI 63.10	20dB Occupied Bandwidth	PASS	Appendix A)
Part15C Section 15.247 (a)(1)	ANSI 63.10	Carrier Frequencies Separation	PASS	Appendix B)
Part15C Section 15.247 (a)(1)	ANSI 63.10	Dwell Time	PASS	Appendix C)
Part15C Section 15.247 (b)	ANSI 63.10	Hopping Channel Number	PASS	Appendix D)
Part15C Section 15.247 (b)(1)	ANSI 63.10	Conducted Peak Output Power	PASS	Appendix E)
Part15C Section 15.247(d)	ANSI 63.10	Band-edge for RF Conducted Emissions	PASS	Appendix F)
Part15C Section 15.247(d)	ANSI 63.10	RF Conducted Spurious Emissions	PASS	Appendix G)
Part15C Section 15.247 (a)(1)	ANSI 63.10	Pseudorandom Frequency Hopping Sequence	PASS	Appendix H)
Part15C Section 15.203/15.247 (c)	ANSI 63.10	Antenna Requirement	PASS	Appendix I)
Part15C Section 15.207	ANSI 63.10	AC Power Line Conducted Emission	PASS	Appendix J)
Part15C Section 15.205/15.209	ANSI 63.10	Restricted bands around fundamental frequency (Radiated) Emission)	PASS	Appendix K)
Part15C Section 15.205/15.209	ANSI 63.10	Radiated Spurious Emissions	PASS	Appendix L)




Appendix A): 20dB Occupied Bandwidth



Test Result

Mode	Channel.	20dB Bandwidth [MHz]	99% OBW [MHz]	Verdict
GFSK	LCH	1.007	0.90905	PASS
GFSK	MCH	1.006	0.90643	PASS
GFSK	HCH	1.009	0.90584	PASS
$\pi/4$ DQPSK	LCH	1.357	1.2036	PASS
$\pi/4$ DQPSK	MCH	1.359	1.2028	PASS
$\pi/4$ DQPSK	HCH	1.354	1.2054	PASS
8DPSK	LCH	1.314	1.2095	PASS
8DPSK	MCH	1.315	1.2085	PASS
8DPSK	HCH	1.315	1.2098	PASS

Test Graph

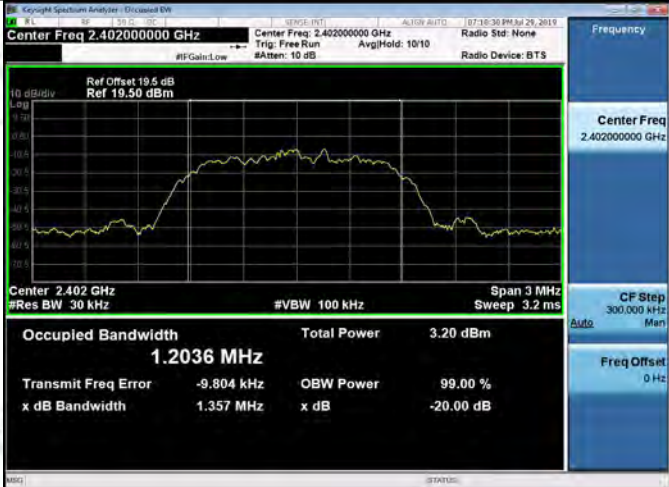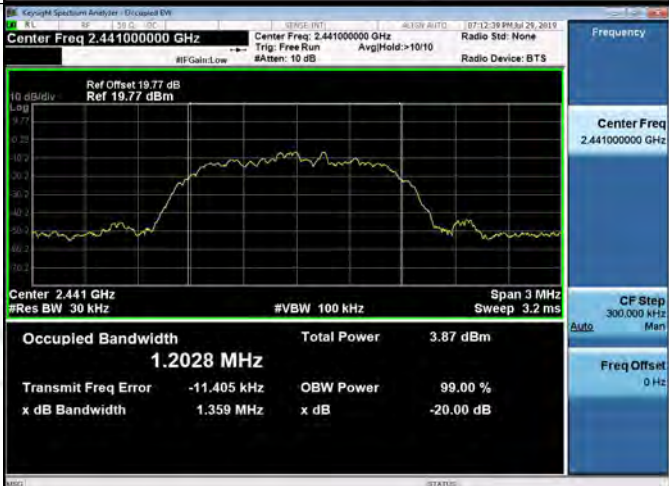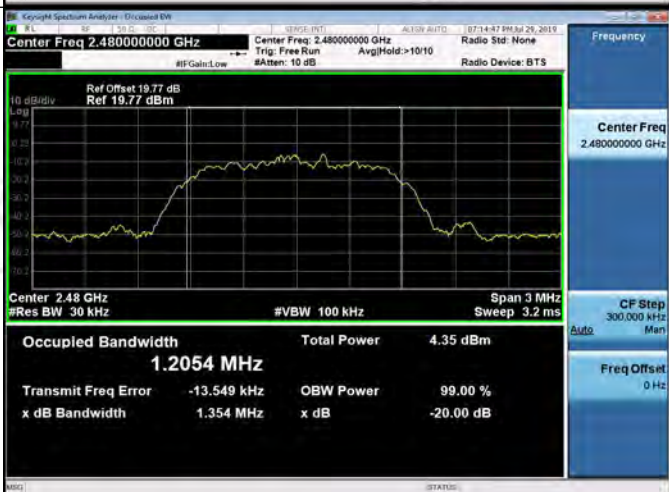

$\pi/4$DQPSK/LCH	 Center Freq 2.402000000 GHz Ref Offset 19.5 dB Ref 19.50 dBm Center 2.402 GHz #Res BW 30 kHz #VBW 100 kHz Span 3 MHz Sweep 3.2 ms Occupied Bandwidth 1.2036 MHz Total Power 3.20 dBm Transmit Freq Error -9.804 kHz OBW Power 99.00 % x dB Bandwidth 1.357 MHz x dB -20.00 dB
$\pi/4$DQPSK/MCH	 Center Freq 2.441000000 GHz Ref Offset 19.77 dB Ref 19.77 dBm Center 2.441 GHz #Res BW 30 kHz #VBW 100 kHz Span 3 MHz Sweep 3.2 ms Occupied Bandwidth 1.2028 MHz Total Power 3.87 dBm Transmit Freq Error -11.405 kHz OBW Power 99.00 % x dB Bandwidth 1.359 MHz x dB -20.00 dB
$\pi/4$DQPSK/HCH	 Center Freq 2.480000000 GHz Ref Offset 19.77 dB Ref 19.77 dBm Center 2.48 GHz #Res BW 30 kHz #VBW 100 kHz Span 3 MHz Sweep 3.2 ms Occupied Bandwidth 1.2054 MHz Total Power 4.35 dBm Transmit Freq Error -13.549 kHz OBW Power 99.00 % x dB Bandwidth 1.354 MHz x dB -20.00 dB

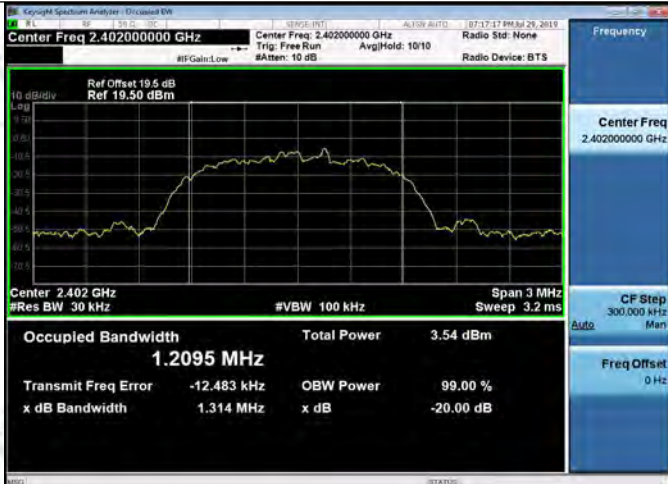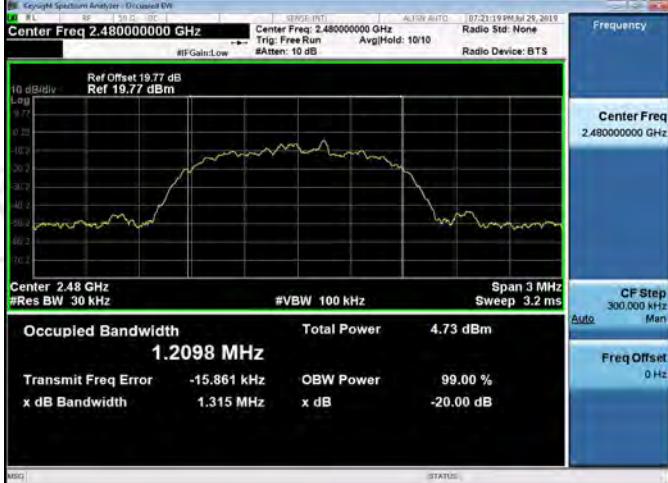8DPSK/LCH	 Center Freq 2.402000000 GHz Ref Offset 19.5 dB Ref 19.50 dBm Center 2.402 GHz #Res BW 30 kHz #VBW 100 kHz Span 3 MHz Sweep 3.2 ms Occupied Bandwidth 1.2095 MHz Total Power 3.54 dBm Transmit Freq Error -12.483 kHz OBW Power 99.00 % x dB Bandwidth 1.314 MHz x dB -20.00 dB
8DPSK/MCH	 Center Freq 2.441000000 GHz Ref Offset 19.77 dB Ref 19.77 dBm Center 2.441 GHz #Res BW 30 kHz #VBW 100 kHz Span 3 MHz Sweep 3.2 ms Occupied Bandwidth 1.2085 MHz Total Power 4.20 dBm Transmit Freq Error -13.678 kHz OBW Power 99.00 % x dB Bandwidth 1.315 MHz x dB -20.00 dB
8DPSK/HCH	 Center Freq 2.480000000 GHz Ref Offset 19.77 dB Ref 19.77 dBm Center 2.48 GHz #Res BW 30 kHz #VBW 100 kHz Span 3 MHz Sweep 3.2 ms Occupied Bandwidth 1.2098 MHz Total Power 4.73 dBm Transmit Freq Error -15.861 kHz OBW Power 99.00 % x dB Bandwidth 1.315 MHz x dB -20.00 dB

Appendix B): Carrier Frequency Separation




Result Table

Mode	Channel.	Carrier Frequency Separation [MHz]	Verdict
GFSK	LCH	1.002	PASS
GFSK	MCH	0.998	PASS
GFSK	HCH	0.994	PASS
$\pi/4$ DQPSK	LCH	1.016	PASS
$\pi/4$ DQPSK	MCH	0.942	PASS
$\pi/4$ DQPSK	HCH	1.000	PASS
8DPSK	LCH	1.044	PASS
8DPSK	MCH	1.128	PASS
8DPSK	HCH	1.138	PASS

Test Graph



$\pi/4$DQPSK/LCH	
$\pi/4$DQPSK/MCH	
$\pi/4$DQPSK/HCH	

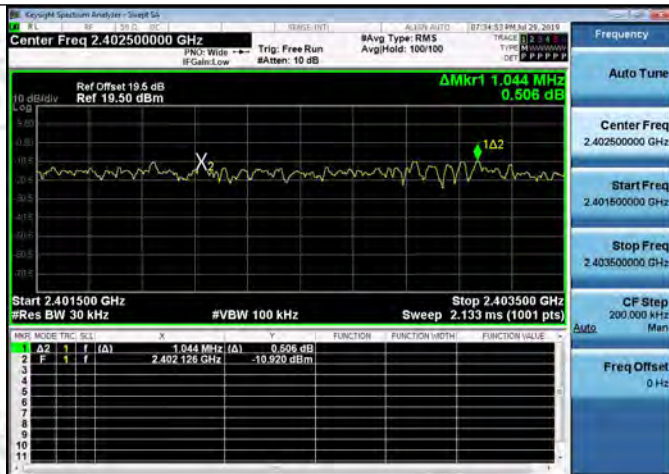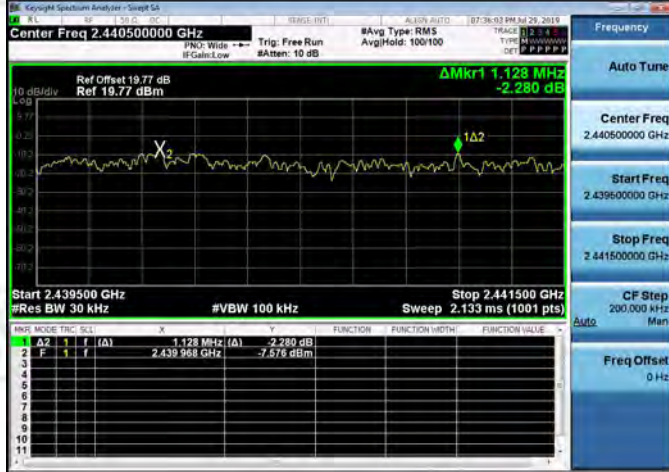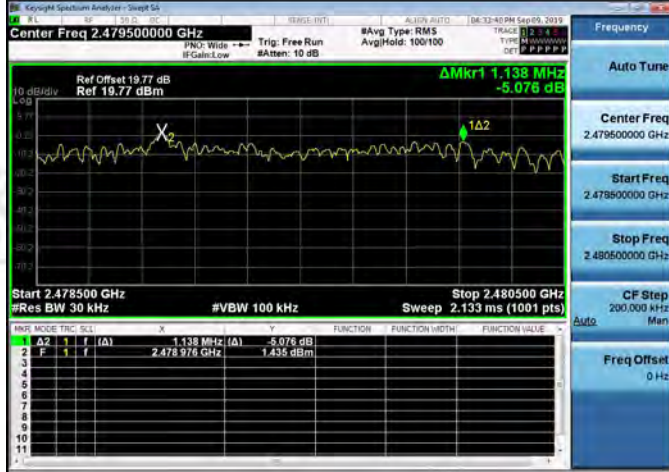
8DPSK/LCH	 Center Freq 2.402500000 GHz Ref Offset 19.5 dB Ref 19.50 dBm ΔMkr1 1.044 MHz 0.506 dB Start 2.401500 GHz #Res BW 30 kHz #VBW 100 kHz Sweep 2.133 ms (1001 pts) <table><tr><th>NR</th><th>MODE</th><th>TRC</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION METH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>A2</td><td>1</td><td>f</td><td>(A)</td><td>1.044 MHz (A)</td><td>0.506 dB</td><td></td><td></td></tr><tr><td>2</td><td>F</td><td>1</td><td>f</td><td>(A)</td><td>2.402126 GHz</td><td>-10.920 dBm</td><td></td><td></td></tr></table>	NR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION METH	FUNCTION VALUE	1	A2	1	f	(A)	1.044 MHz (A)	0.506 dB			2	F	1	f	(A)	2.402126 GHz	-10.920 dBm		
NR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION METH	FUNCTION VALUE																				
1	A2	1	f	(A)	1.044 MHz (A)	0.506 dB																						
2	F	1	f	(A)	2.402126 GHz	-10.920 dBm																						
8DPSK/MCH	 Center Freq 2.440500000 GHz Ref Offset 19.77 dB Ref 19.77 dBm ΔMkr1 1.128 MHz -2.280 dB Start 2.439500 GHz #Res BW 30 kHz #VBW 100 kHz Sweep 2.133 ms (1001 pts) <table><tr><th>NR</th><th>MODE</th><th>TRC</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION METH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>A2</td><td>1</td><td>f</td><td>(A)</td><td>1.128 MHz (A)</td><td>-2.280 dB</td><td></td><td></td></tr><tr><td>2</td><td>F</td><td>1</td><td>f</td><td>(A)</td><td>2.439968 GHz</td><td>-7.576 dBm</td><td></td><td></td></tr></table>	NR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION METH	FUNCTION VALUE	1	A2	1	f	(A)	1.128 MHz (A)	-2.280 dB			2	F	1	f	(A)	2.439968 GHz	-7.576 dBm		
NR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION METH	FUNCTION VALUE																				
1	A2	1	f	(A)	1.128 MHz (A)	-2.280 dB																						
2	F	1	f	(A)	2.439968 GHz	-7.576 dBm																						
8DPSK/HCH	 Center Freq 2.479500000 GHz Ref Offset 19.77 dB Ref 19.77 dBm ΔMkr1 1.138 MHz -5.076 dB Start 2.478500 GHz #Res BW 30 kHz #VBW 100 kHz Sweep 2.133 ms (1001 pts) <table><tr><th>NR</th><th>MODE</th><th>TRC</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION METH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>A2</td><td>1</td><td>f</td><td>(A)</td><td>1.138 MHz (A)</td><td>-5.076 dB</td><td></td><td></td></tr><tr><td>2</td><td>F</td><td>1</td><td>f</td><td>(A)</td><td>2.478976 GHz</td><td>-1.435 dBm</td><td></td><td></td></tr></table>	NR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION METH	FUNCTION VALUE	1	A2	1	f	(A)	1.138 MHz (A)	-5.076 dB			2	F	1	f	(A)	2.478976 GHz	-1.435 dBm		
NR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION METH	FUNCTION VALUE																				
1	A2	1	f	(A)	1.138 MHz (A)	-5.076 dB																						
2	F	1	f	(A)	2.478976 GHz	-1.435 dBm																						

Appendix C): Dwell Time


Result Table

Mode	Packet	Channel	Burst Width [ms/hop/ch]	Total Hops[hop*ch]	Dwell Time[s]	Duty Cycle [%]	Verdict
GFSK	DH1	LCH	0.381267	320	0.122	0.30	PASS
GFSK	DH1	MCH	0.38127	320	0.122	0.30	PASS
GFSK	DH1	HCH	0.381263	320	0.122	0.30	PASS
GFSK	DH3	LCH	1.6378	160	0.262	0.66	PASS
GFSK	DH3	MCH	1.637803	160	0.262	0.66	PASS
GFSK	DH3	HCH	1.636537	160	0.262	0.65	PASS
GFSK	DH5	LCH	2.8704	106.7	0.306	0.76	PASS
GFSK	DH5	MCH	2.8704	106.7	0.306	0.76	PASS
GFSK	DH5	HCH	2.8704	106.7	0.306	0.77	PASS

Test Graph

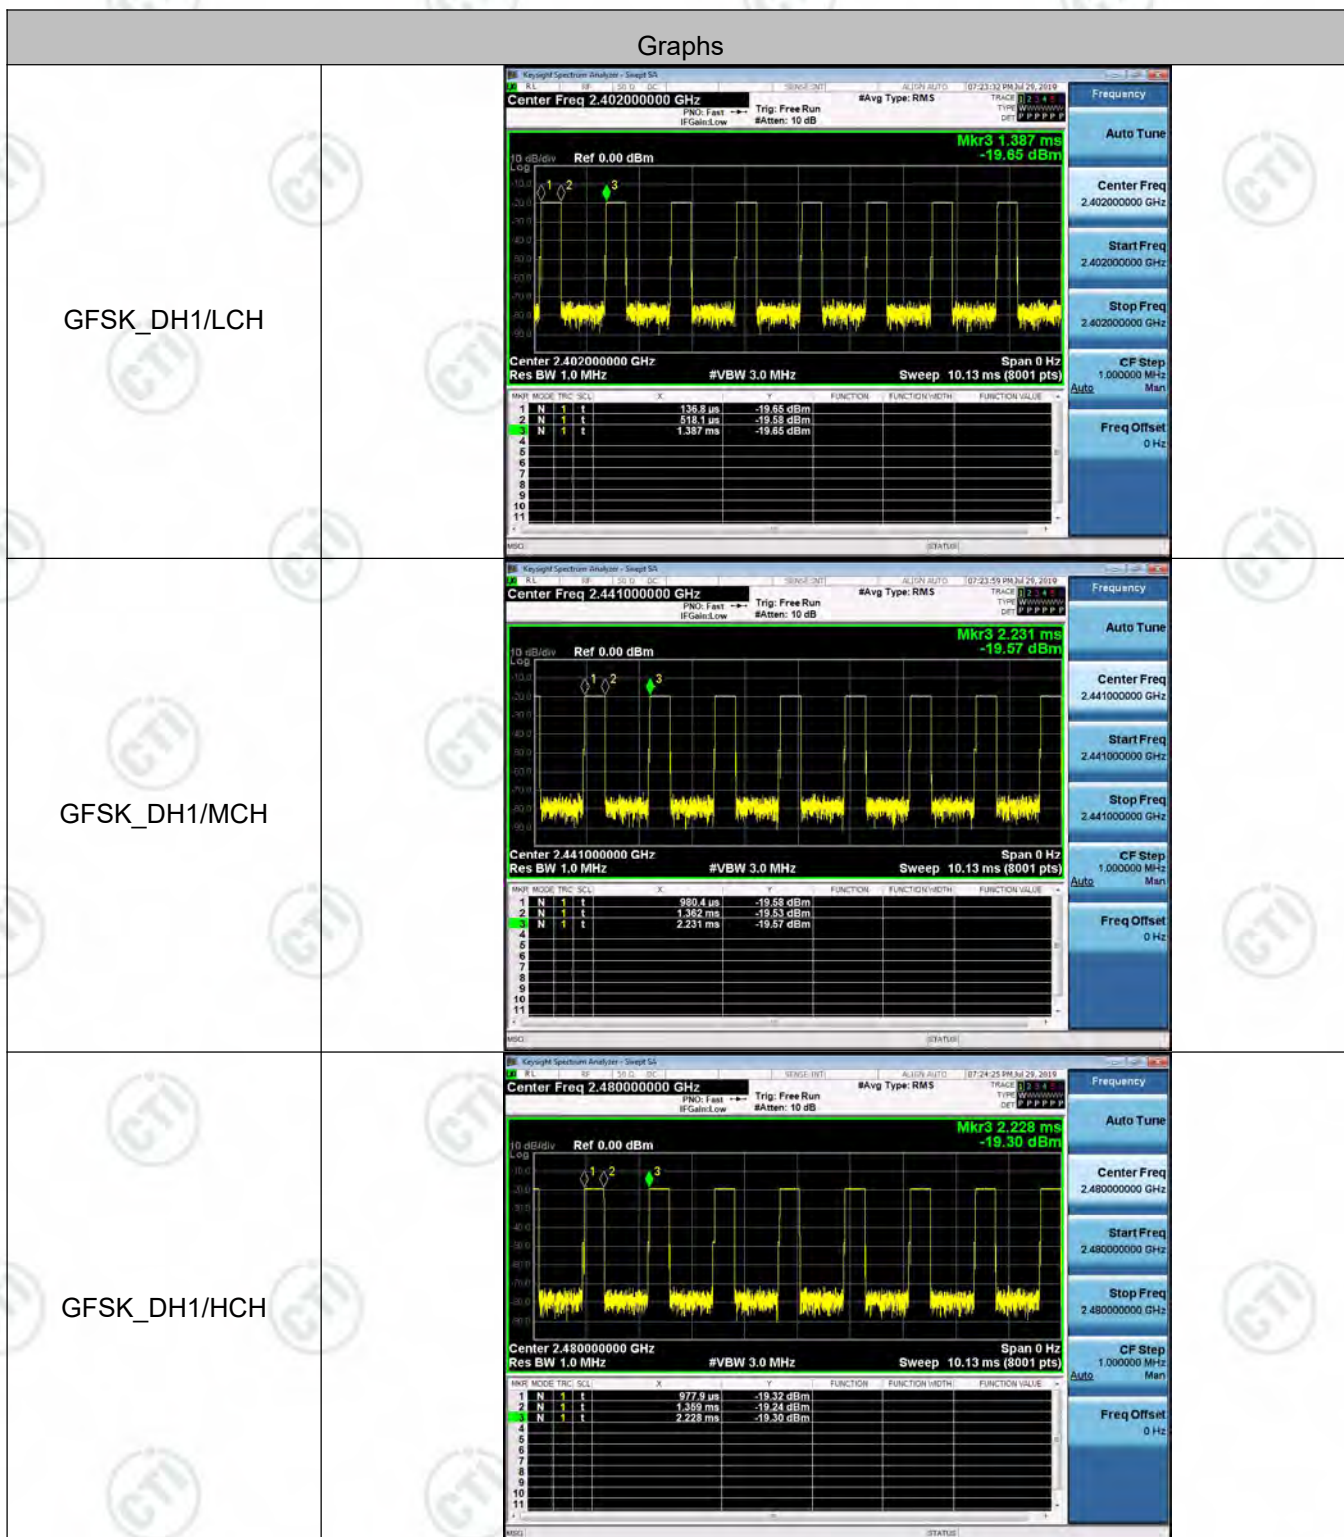



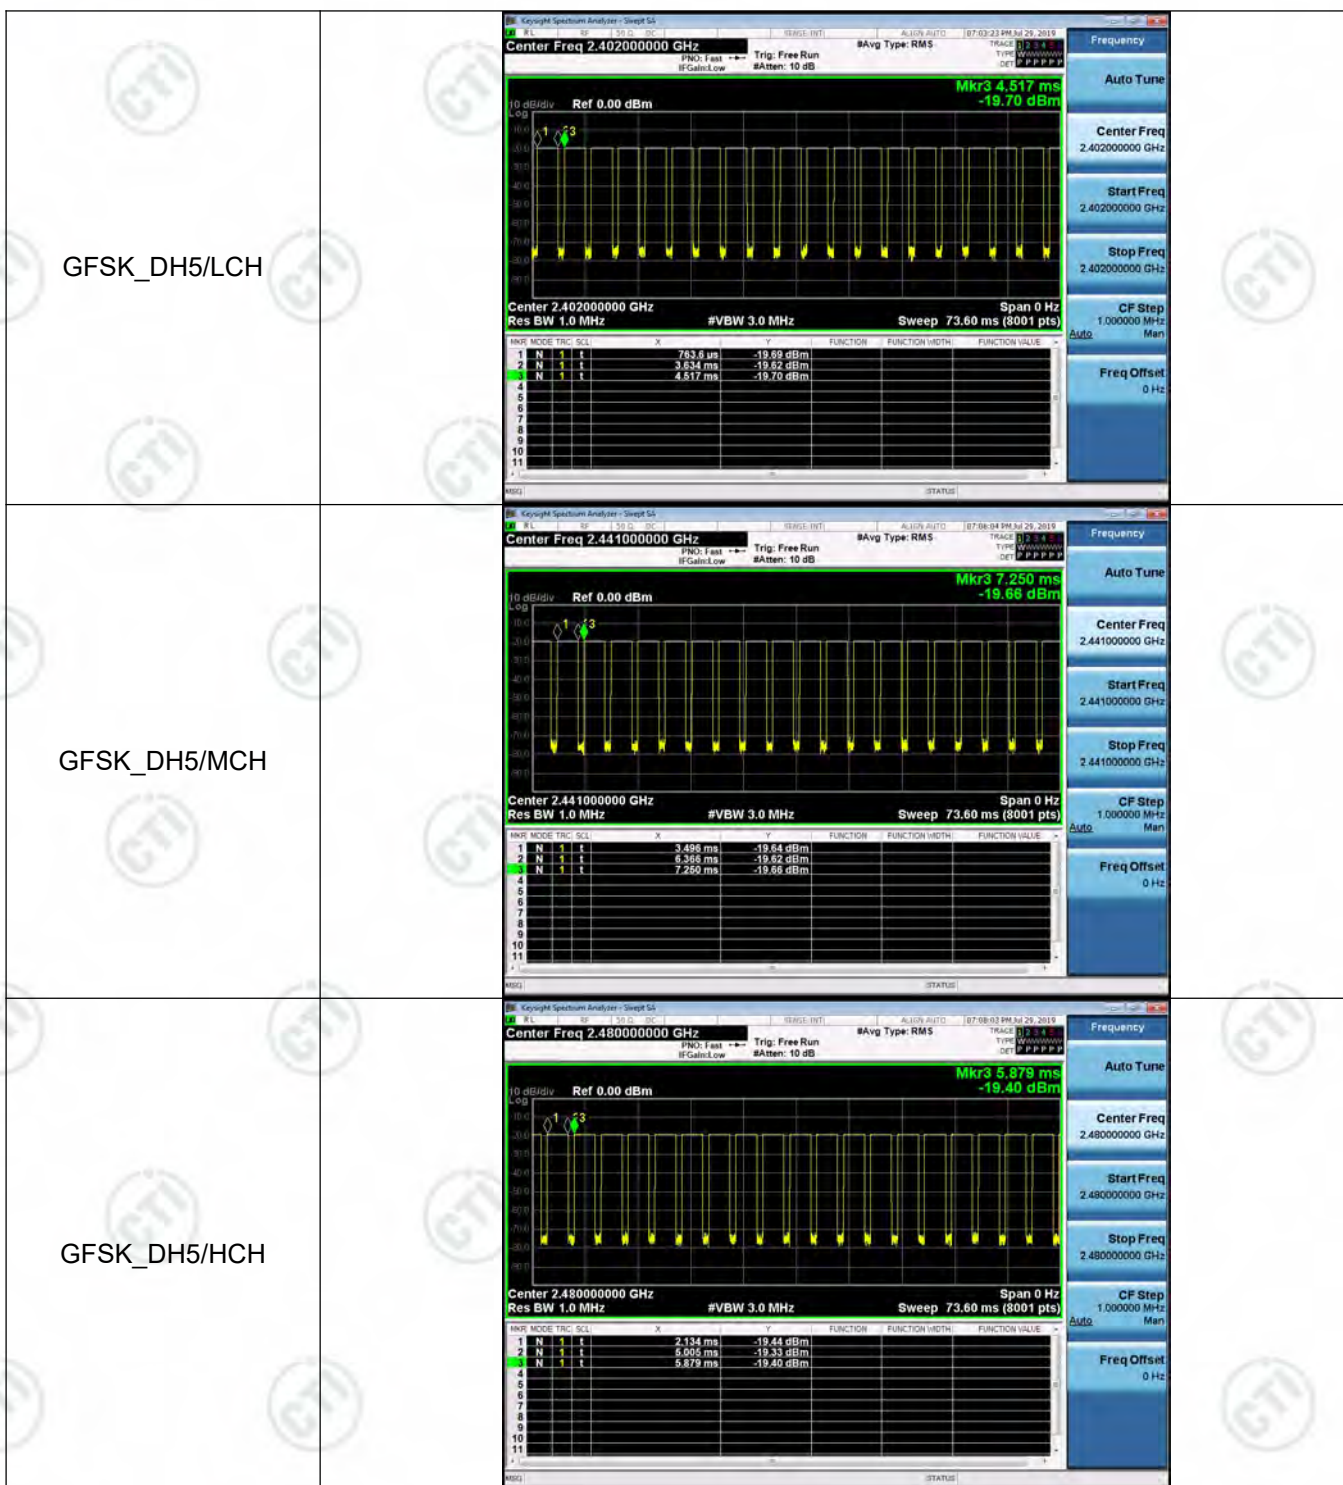

Appendix D): Hopping Channel Number

Result Table

Mode	Channel.	Number of Hopping Channel	Verdict
GFSK	Hop	79	PASS
π/4DQPSK	Hop	79	PASS
8DPSK	Hop	79	PASS

Test Graph

Graphs		
GFSK/Hop		
$\pi/4$ DQPSK/Hop		
8DPSK/Hop		

Appendix E): Conducted Peak Output Power


Result Table

Mode	Channel.	Maximum Peak Output Power [dBm]	Verdict
GFSK	LCH	0.005	PASS
GFSK	MCH	0.299	PASS
GFSK	HCH	0.556	PASS
$\pi/4$ DQPSK	LCH	-2.454	PASS
$\pi/4$ DQPSK	MCH	-1.844	PASS
$\pi/4$ DQPSK	HCH	-1.291	PASS
8DPSK	LCH	-1.994	PASS
8DPSK	MCH	-1.376	PASS
8DPSK	HCH	-0.839	PASS

Test Graph

Graphs	
GFSK/LCH	
GFSK/MCH	
GFSK/HCH	

$\pi/4$DQPSK/LCH	 Center Freq 2.402000000 GHz Ref Offset 19.5 dB Ref 19.50 dBm Mkr1 2.402 126 250 GHz -2.454 dBm Center 2.402000 GHz #Res BW 2.0 MHz #VBW 8.0 MHz Sweep 1.067 ms (8001 pts)
$\pi/4$DQPSK/MCH	 Center Freq 2.441000000 GHz Ref Offset 19.77 dB Ref 19.77 dBm Mkr1 2.441 121 875 GHz -1.844 dBm Center 2.441000 GHz #Res BW 2.0 MHz #VBW 8.0 MHz Sweep 1.067 ms (8001 pts)
$\pi/4$DQPSK/HCH	 Center Freq 2.480000000 GHz Ref Offset 19.77 dB Ref 19.77 dBm Mkr1 2.480 168 750 GHz -1.291 dBm Center 2.480000 GHz #Res BW 2.0 MHz #VBW 8.0 MHz Sweep 1.067 ms (8001 pts)

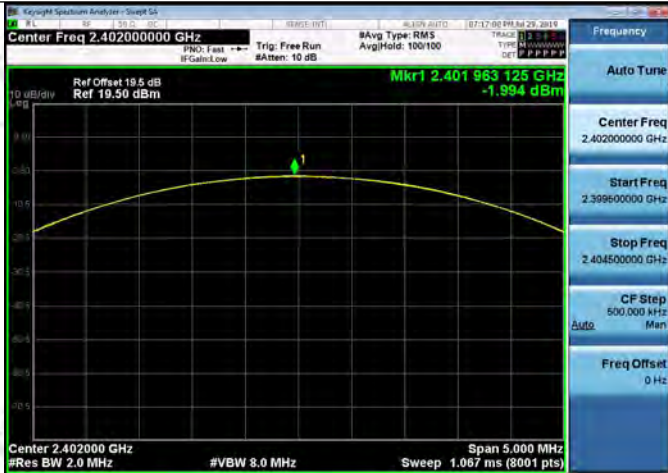8DPSK/LCH	
8DPSK/MCH	
8DPSK/HCH	

Appendix F): Band-edge for RF Conducted Emissions


Result Table

Mode	Channel	Carrier Frequency [MHz]	Carrier Power [dBm]	Frequency Hopping	Max Spurious Level [dBm]	Limit [dBm]	Verdict
GFSK	LCH	2402	-0.093	Off	-60.298	-20.09	PASS
			-0.082	On	-59.521	-20.08	PASS
GFSK	HCH	2480	0.405	Off	-58.639	-19.6	PASS
			0.566	On	-58.790	-19.43	PASS
$\pi/4$ DQPSK	LCH	2402	-4.934	Off	-59.822	-24.93	PASS
			-0.331	On	-59.357	-20.33	PASS
$\pi/4$ DQPSK	HCH	2480	-3.738	Off	-59.156	-23.74	PASS
			0.691	On	-58.919	-19.31	PASS
8DPSK	LCH	2402	-4.870	Off	-59.521	-24.87	PASS
			-5.429	On	-58.804	-25.43	PASS
8DPSK	HCH	2480	-3.656	Off	-59.153	-23.66	PASS
			-3.483	On	-58.917	-23.48	PASS


Test Graph

Graphs


GFSK/LCH/No Hop

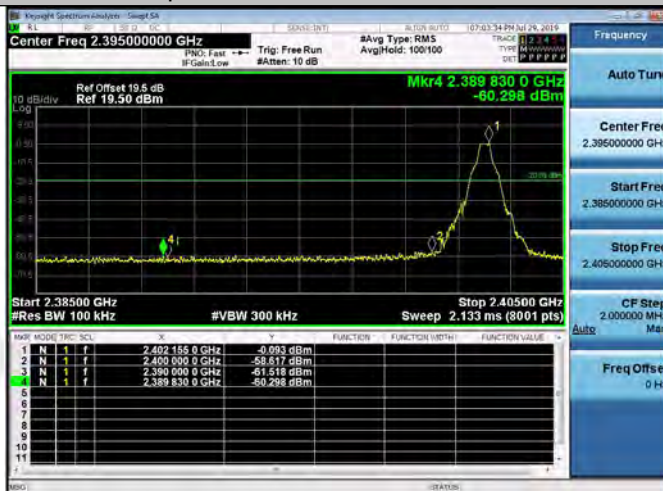



GFSK/LCH/Hop

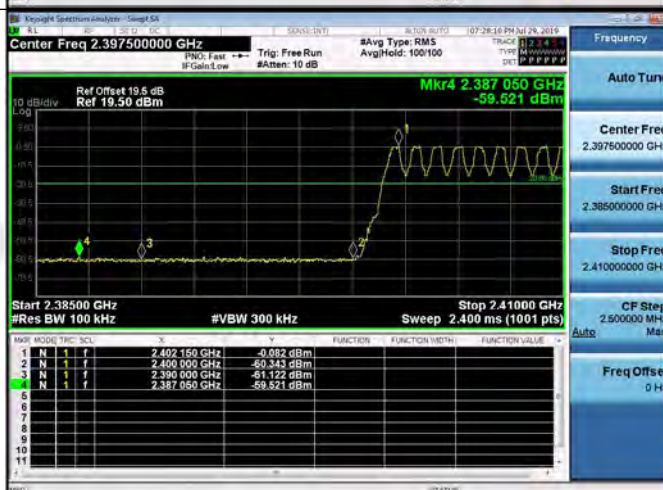


GFSK/HCH/No Hop

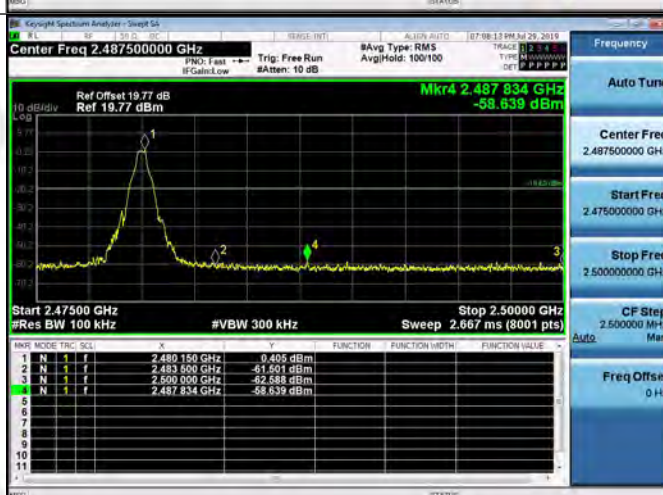

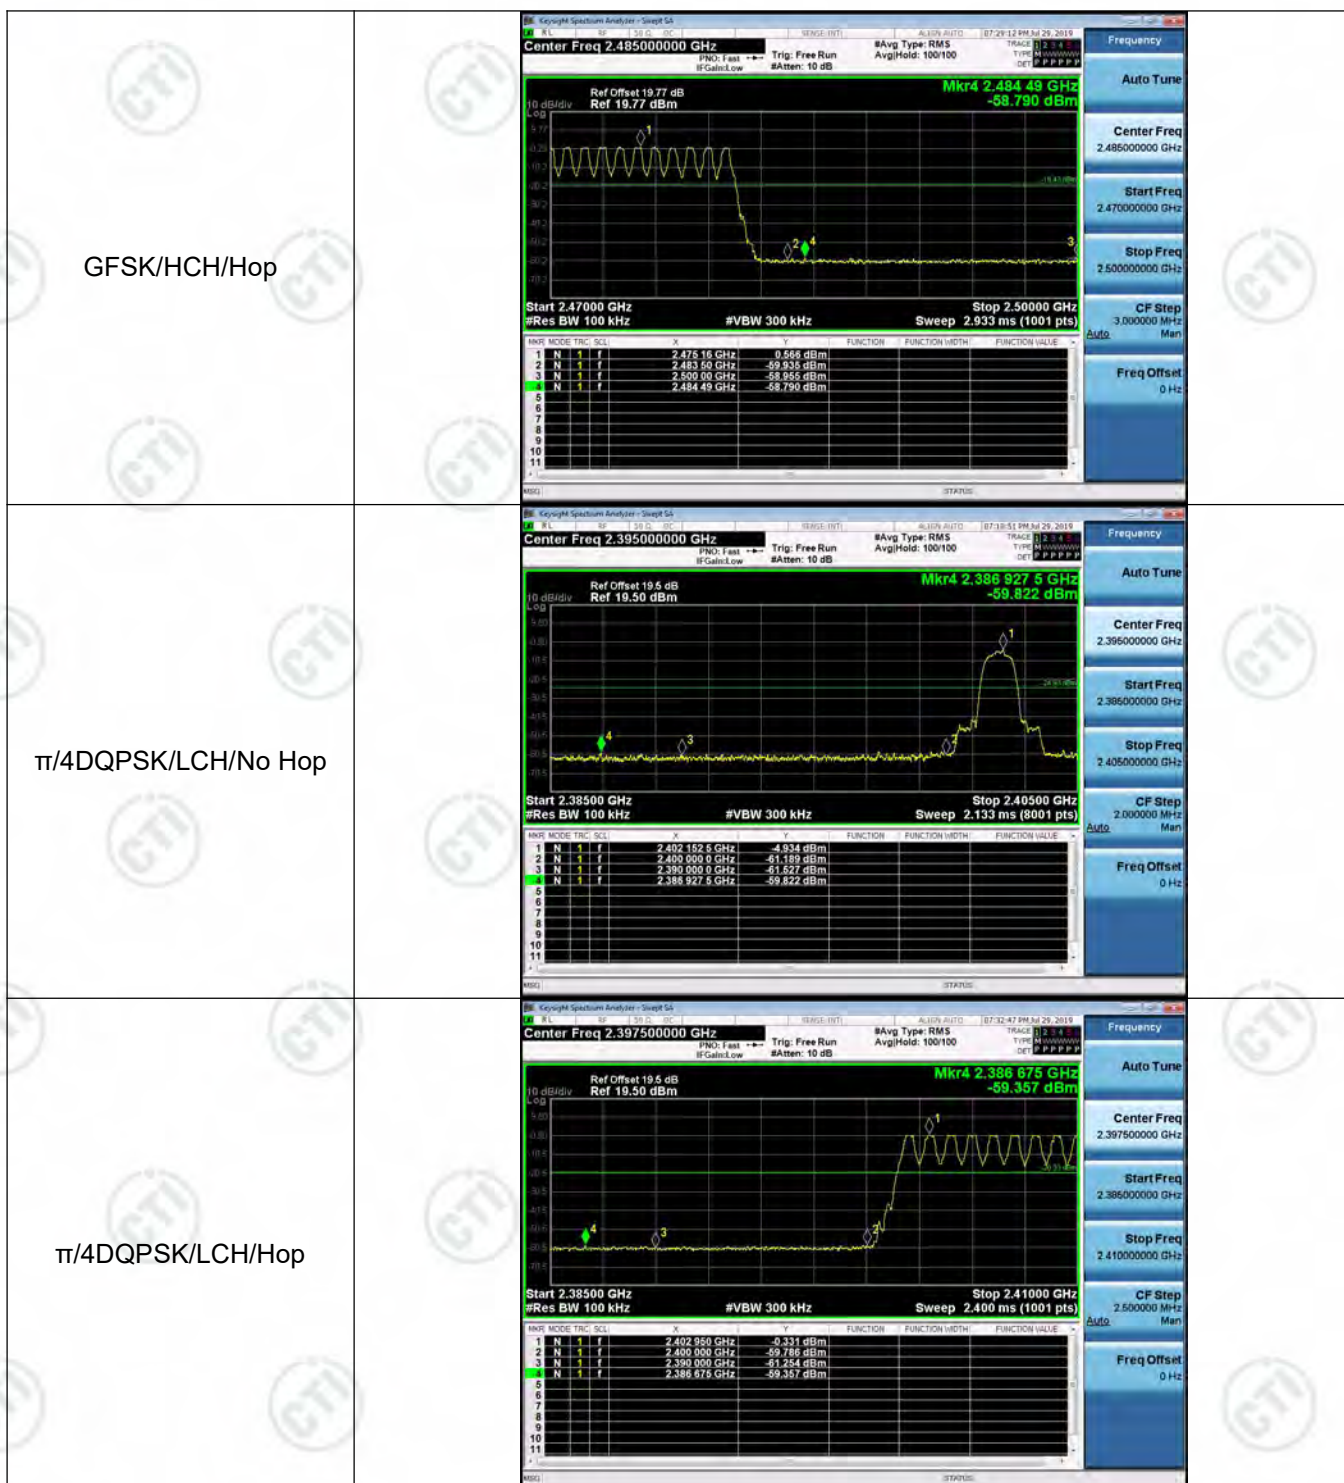

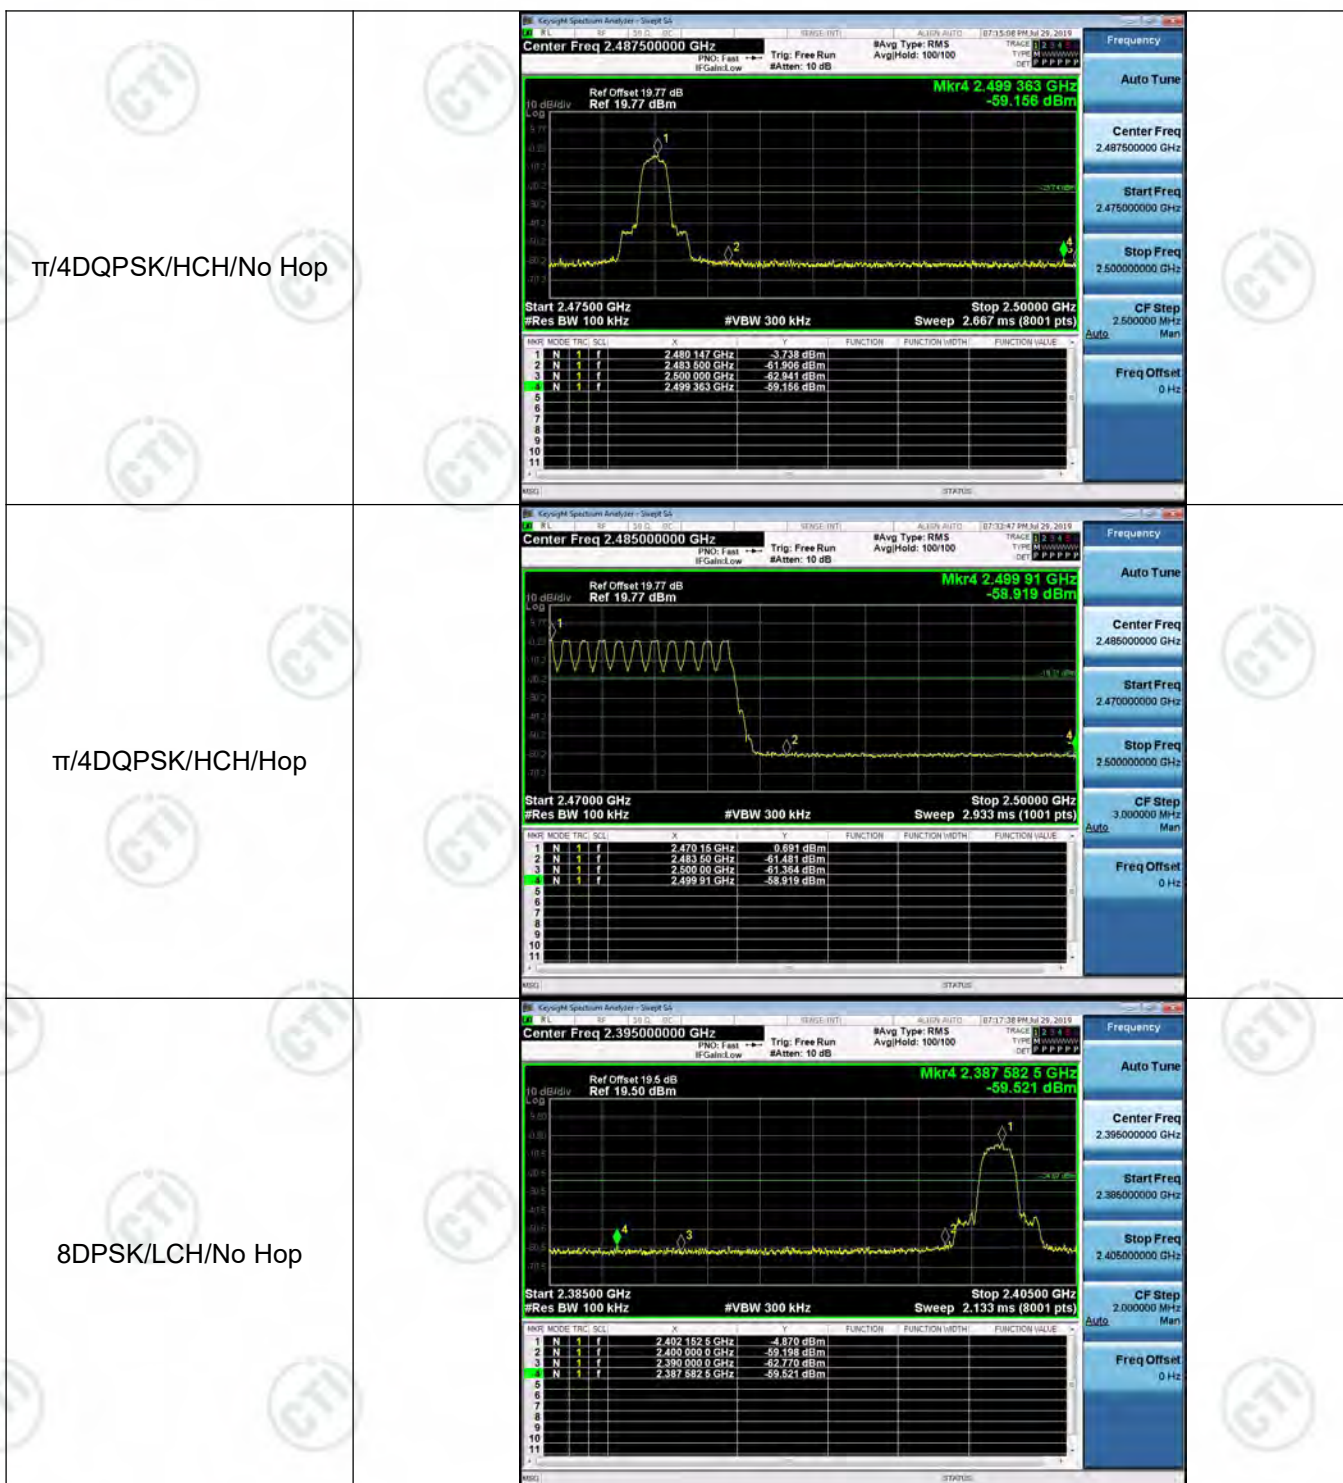

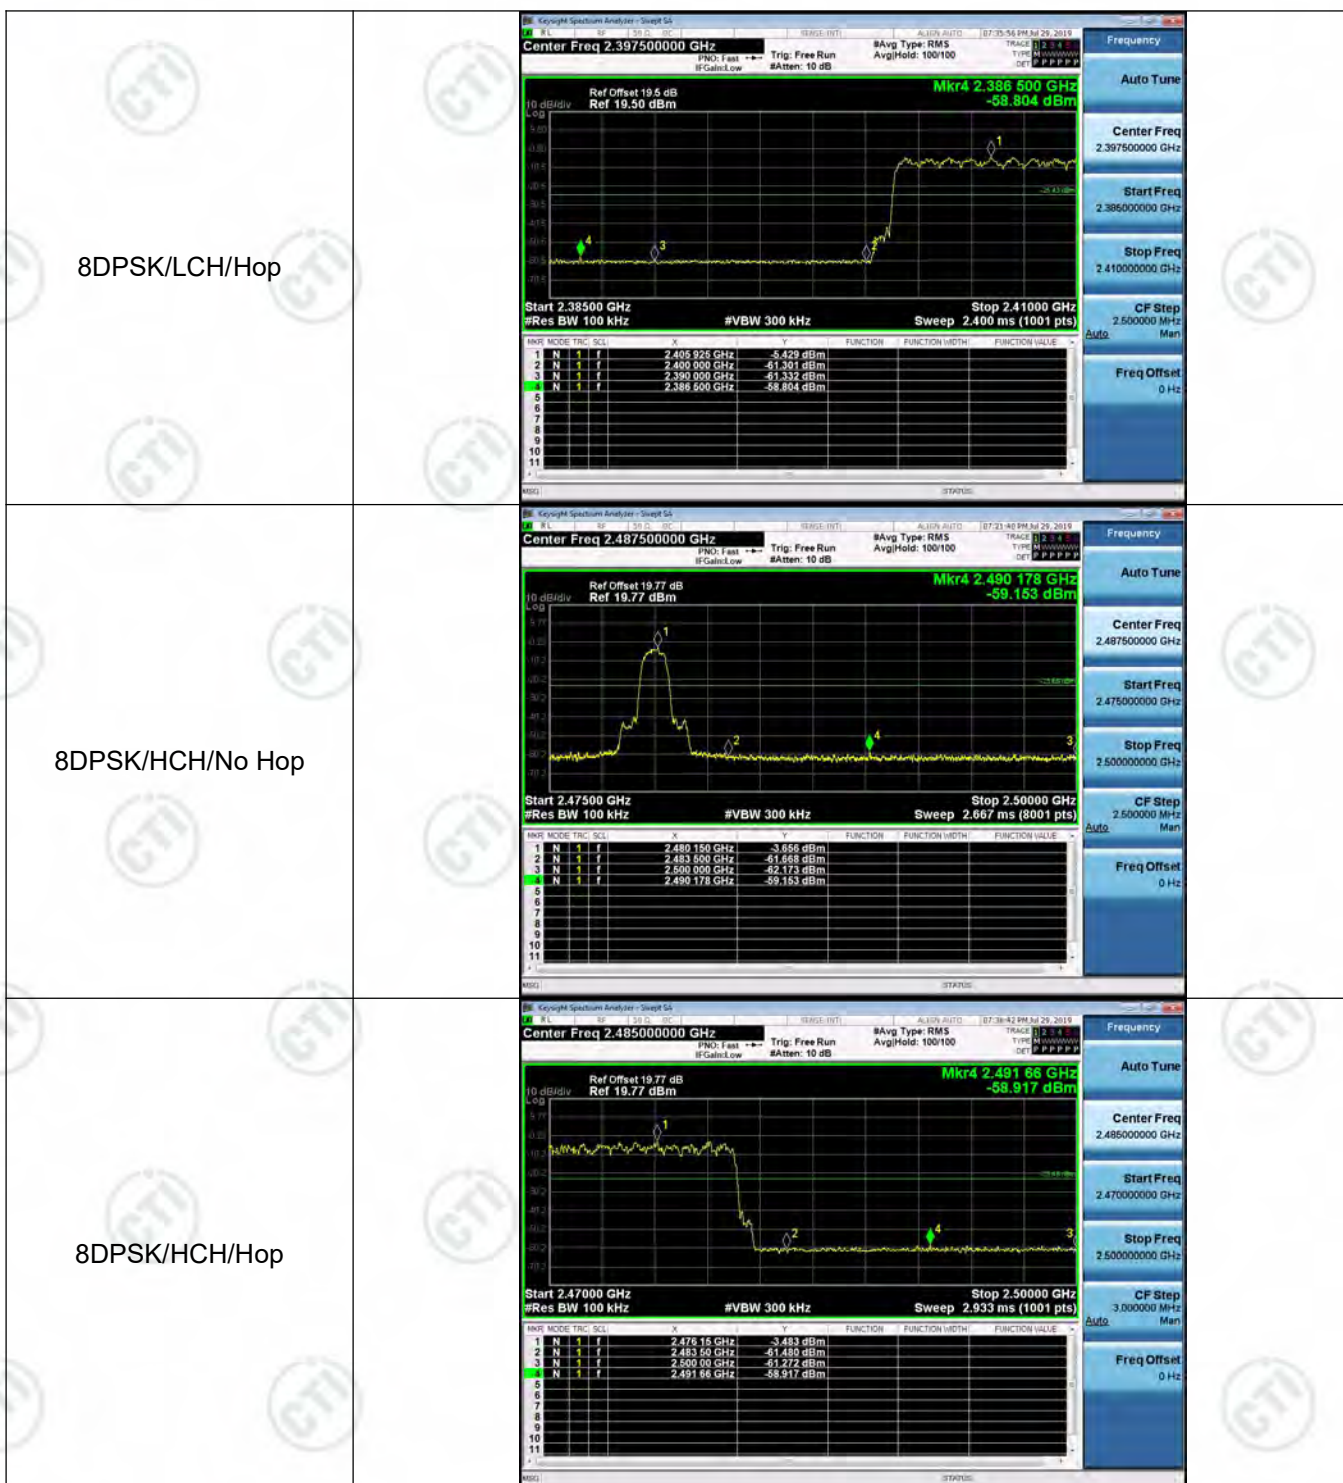

Appendix G): RF Conducted Spurious Emissions

Result Table


Mode	Channel	Pref [dBm]	Puw[dBm]	Verdict
GFSK	LCH	-0.127	<Limit	PASS
GFSK	MCH	0.178	<Limit	PASS
GFSK	HCH	0.434	<Limit	PASS
$\pi/4$ DQPSK	LCH	-5.035	<Limit	PASS
$\pi/4$ DQPSK	MCH	-4.523	<Limit	PASS
$\pi/4$ DQPSK	HCH	-3.893	<Limit	PASS
8DPSK	LCH	-4.901	<Limit	PASS
8DPSK	MCH	-4.321	<Limit	PASS
8DPSK	HCH	-4.014	<Limit	PASS

Test Graph









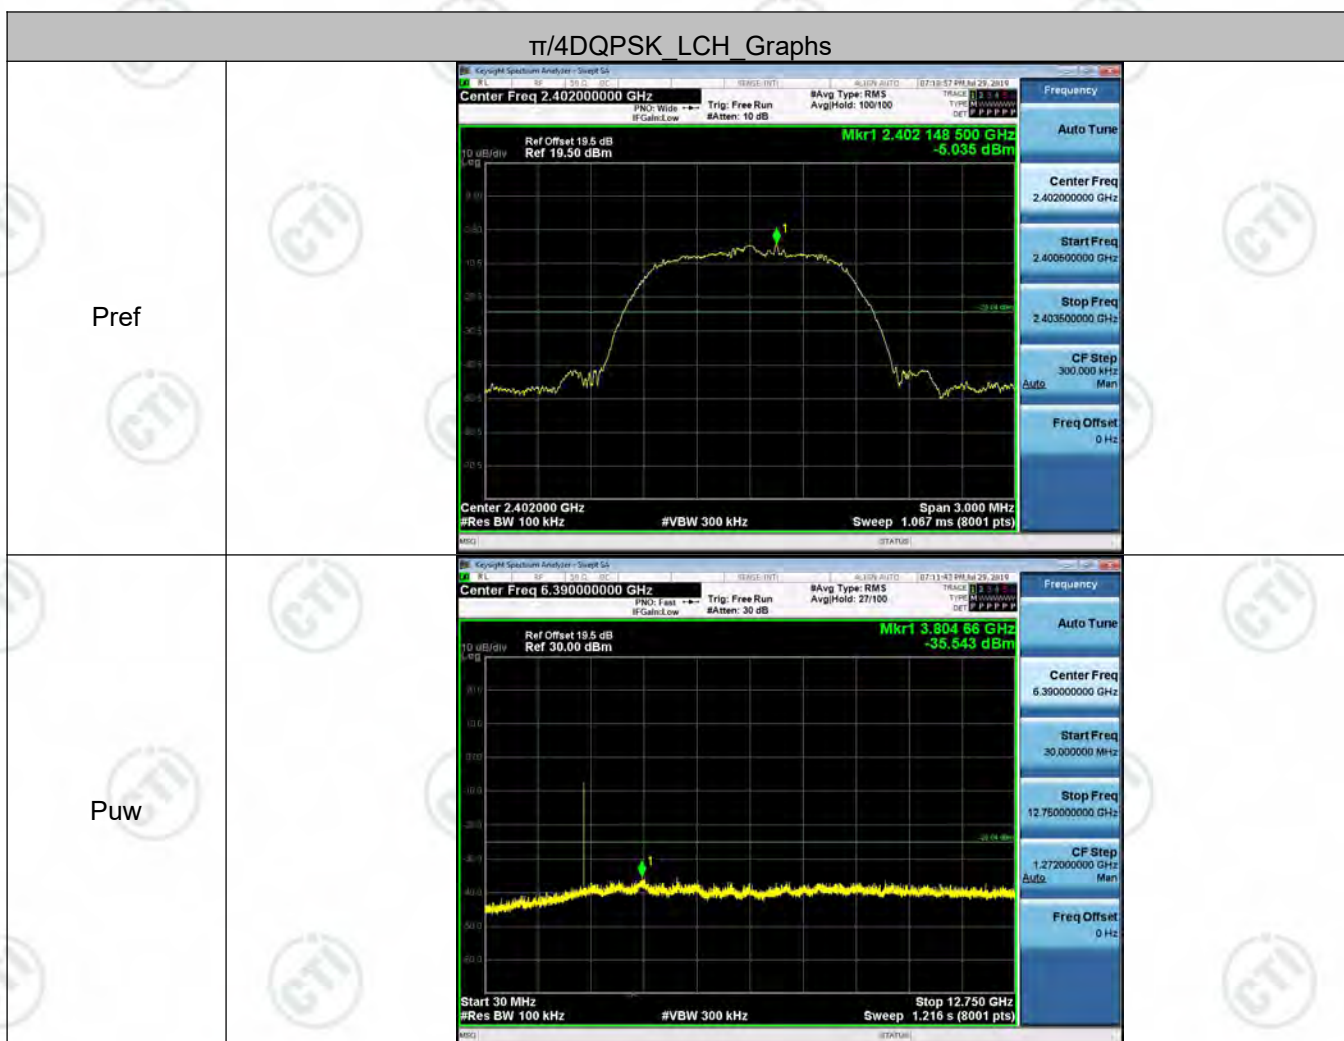






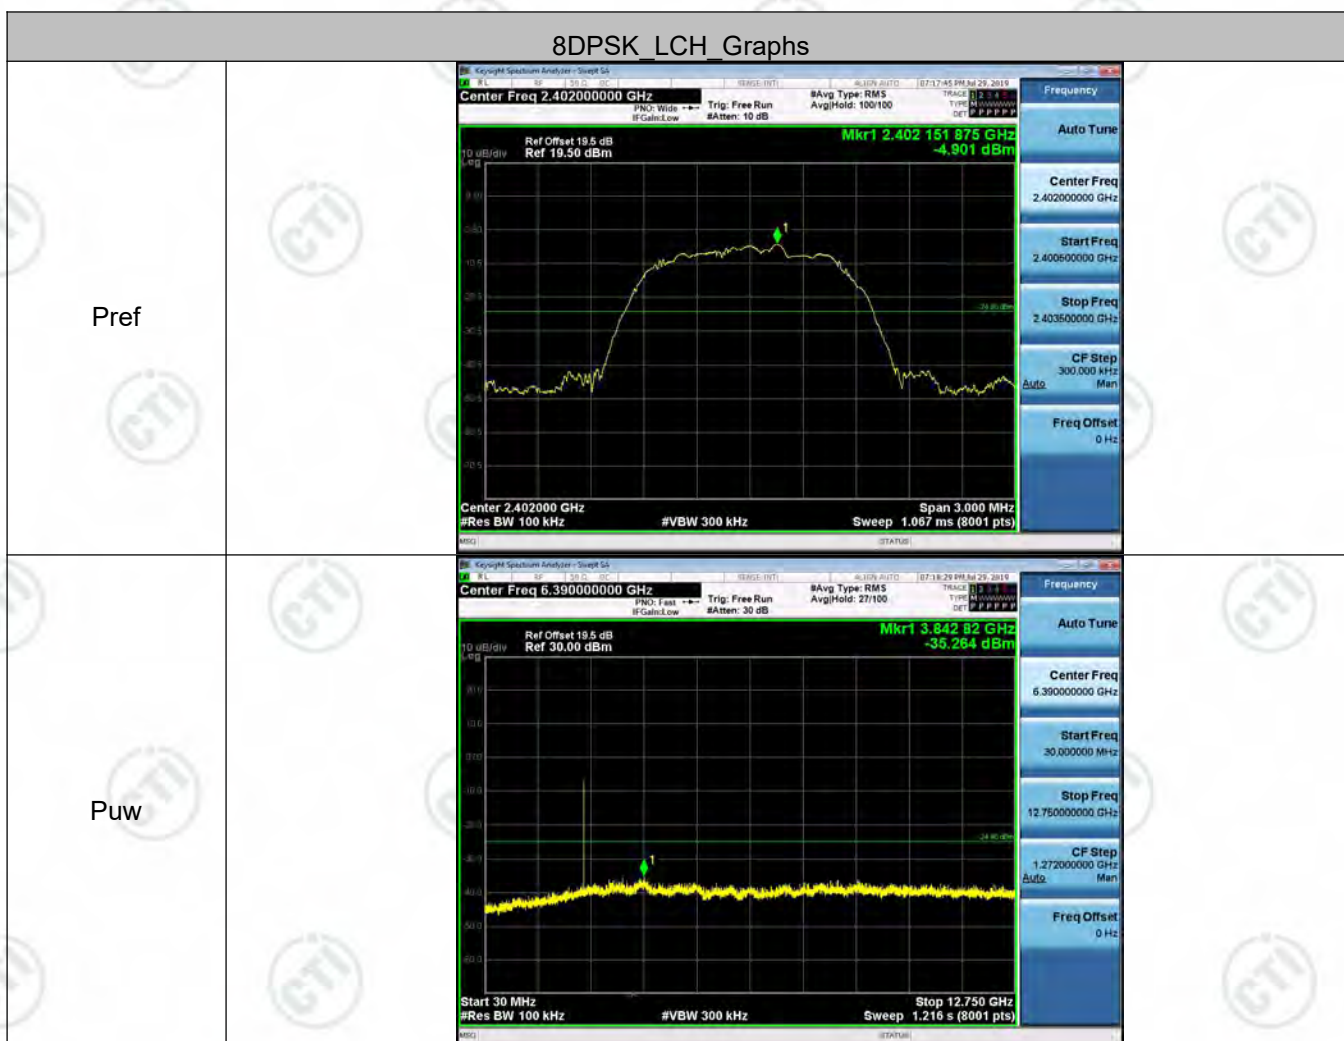

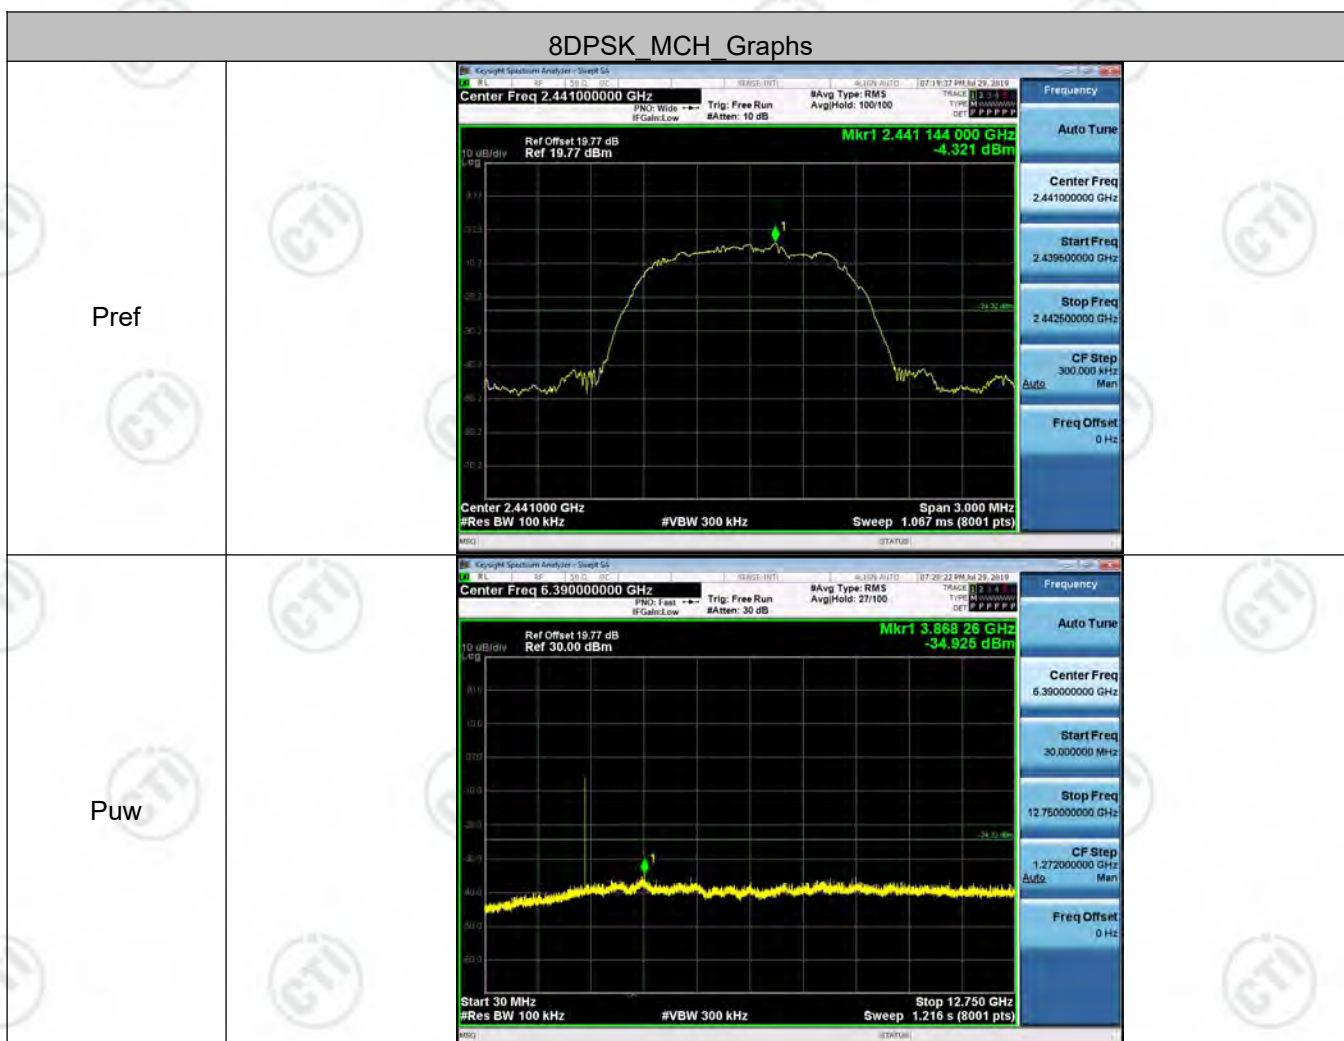

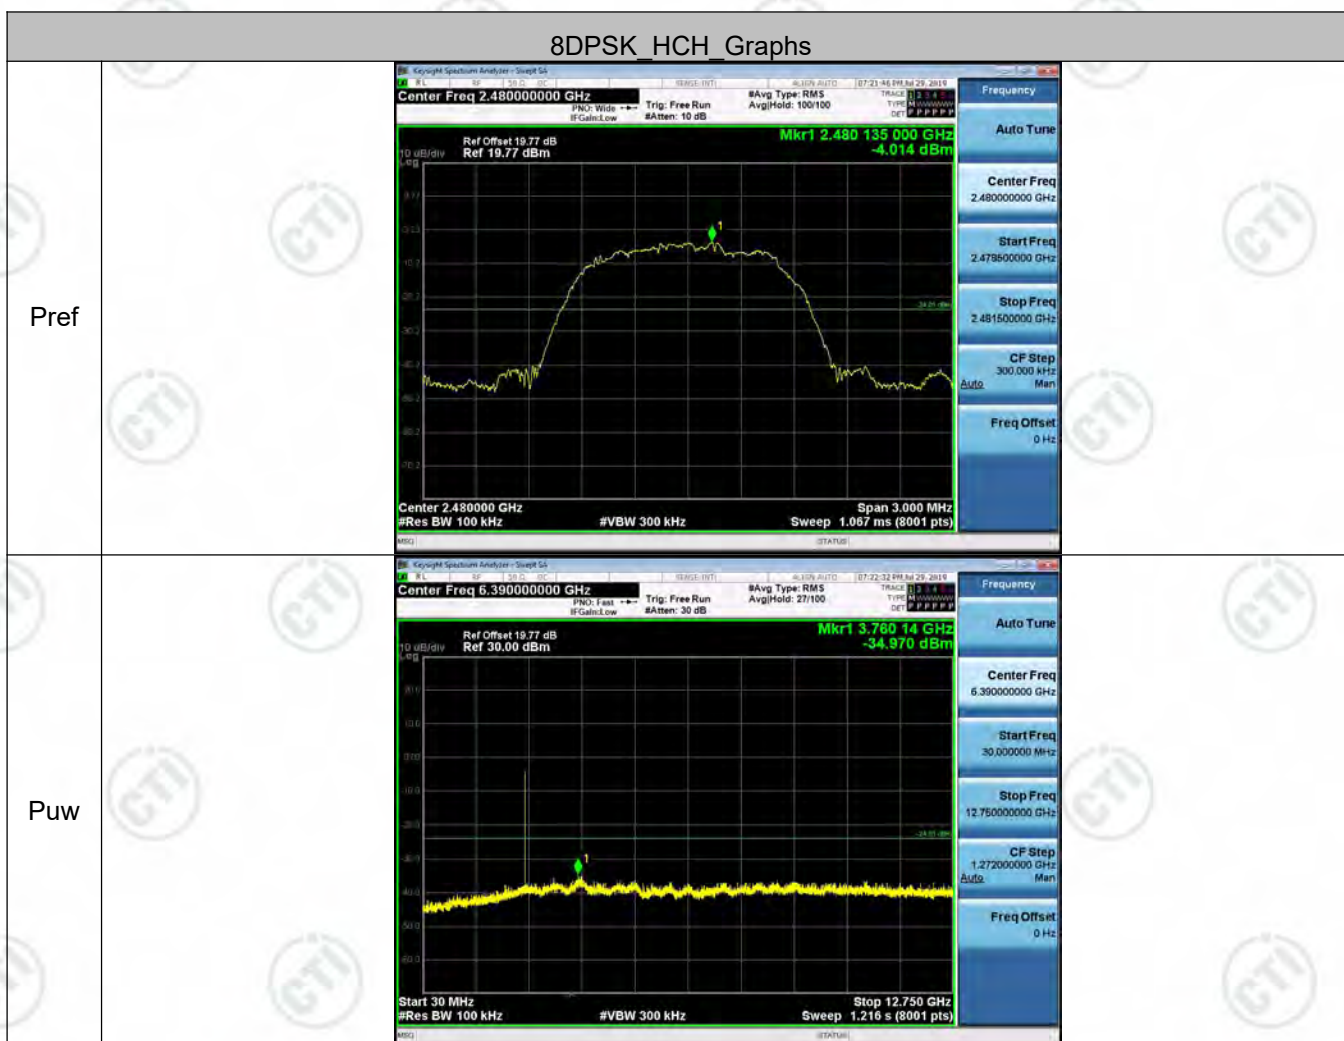

Appendix H): Pseudorandom Frequency Hopping Sequence

Test Requirement:

47 CFR Part 15C Section 15.247 (a)(1) requirement:


Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

Alternatively. Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a Pseudorandom ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

EUT Pseudorandom Frequency Hopping Sequence


The pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first ONE of 9 consecutive ONES; i.e. the shift register is initialized with nine ones.

- Number of shift register stages: 9
- Length of pseudo-random sequence: $2^9 - 1 = 511$ bits
- Longest sequence of zeros: 8 (non-inverted signal)

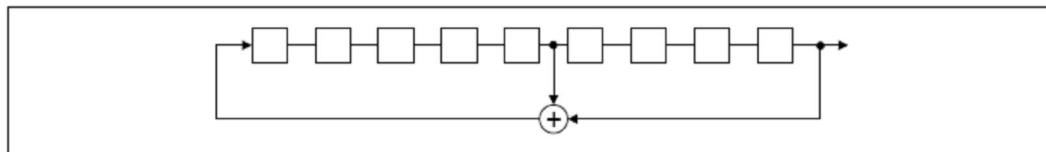

Linear Feedback Shift Register for Generation of the PRBS sequence

An example of Pseudorandom Frequency Hopping Sequence as follow:

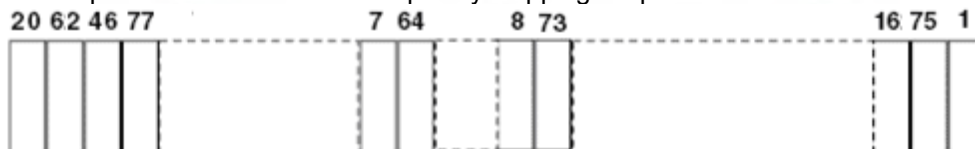

Each frequency used equally on the average by each transmitter.

The system receivers have input bandwidths that match the hopping channel bandwidths of their Corresponding transmitters and shift frequencies in synchronization with the transmitted signals.

The device does not have the ability to be coordinated with other FHSS systems in an effort to avoid the simultaneous occupancy of individual hopping frequencies by multiple transmitters.

Appendix I): Antenna Requirement


15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

EUT Antenna:

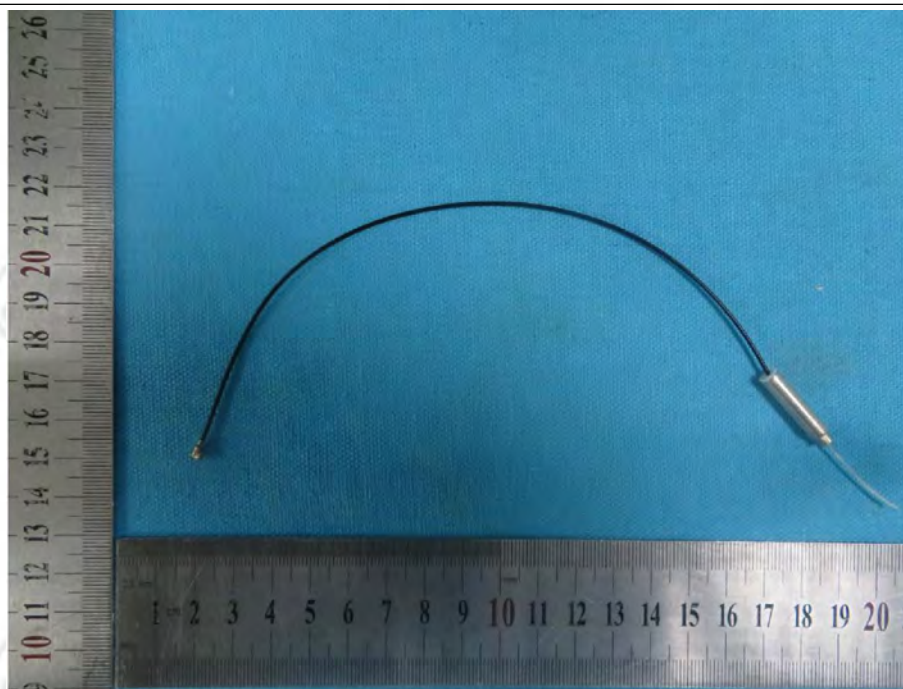

The antenna is PIFA Antenna and no consideration of replacement. The best case gain of the antenna is 1.6 dBi.

Appendix J): AC Power Line Conducted Emission


Test Procedure:	Test frequency range :150KHz-30MHz 1)The mains terminal disturbance voltage test was conducted in a shielded room. 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50Ω/50μH + 5Ω linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded. 3)The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane, 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2. 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.														
Limit:	<table><tr><th rowspan="2">Frequency range (MHz)</th><th colspan="2">Limit (dBμV)</th></tr><tr><th>Quasi-peak</th><th>Average</th></tr><tr><td>0.15-0.5</td><td>66 to 56*</td><td>56 to 46*</td></tr><tr><td>0.5-5</td><td>56</td><td>46</td></tr><tr><td>5-30</td><td>60</td><td>50</td></tr></table> * The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz. NOTE : The lower limit is applicable at the transition frequency	Frequency range (MHz)	Limit (dBμV)		Quasi-peak	Average	0.15-0.5	66 to 56*	56 to 46*	0.5-5	56	46	5-30	60	50
Frequency range (MHz)	Limit (dBμV)														
	Quasi-peak	Average													
0.15-0.5	66 to 56*	56 to 46*													
0.5-5	56	46													
5-30	60	50													

Measurement Data

An initial pre-scan was performed on the live and neutral lines with peak detector.

Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected.

Live line:

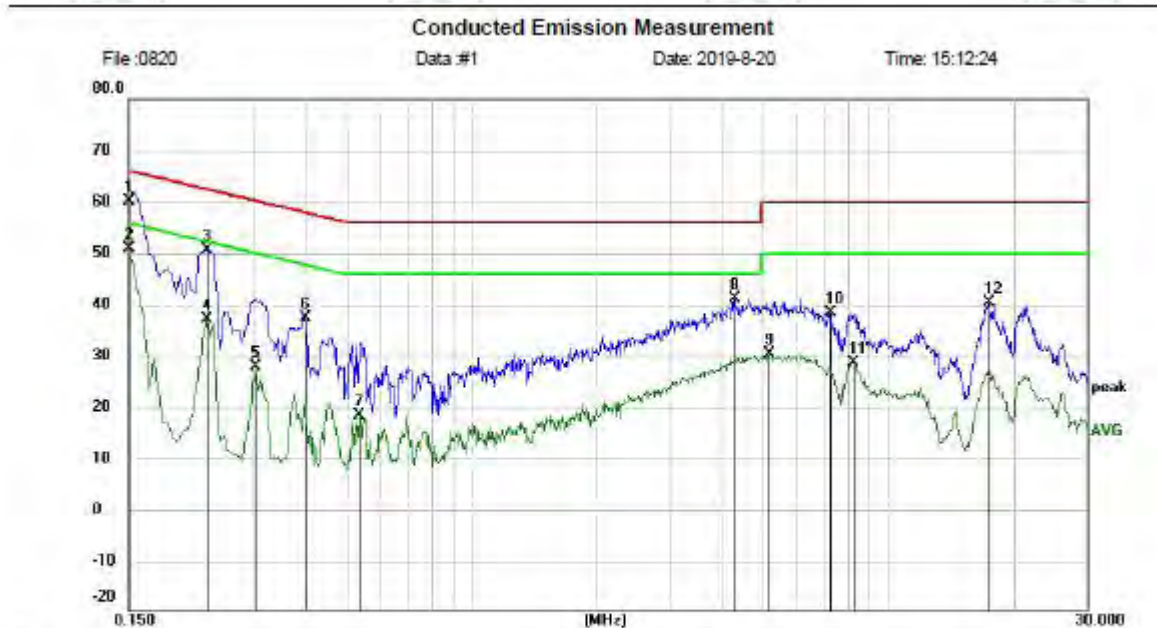

Site LAB

Limit: FCC Class B CE(QP)

EUT:

M/N:

Mode: ON

Note:

Phase: L1

Power: AC120/60Hz

Temperature: 21

Humidity: 51 %

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1500	50.05	9.97	60.02	66.00	-5.98	QP	
2	*	0.1500	40.82	9.97	50.79	56.00	-5.21	AVG	
3		0.2310	40.64	10.04	50.68	62.41	-11.73	peak	
4		0.2310	27.18	10.04	37.22	52.41	-15.19	AVG	
5		0.3030	17.88	10.10	27.98	50.16	-22.18	AVG	
6		0.3975	27.32	10.00	37.32	57.91	-20.59	peak	
7		0.5378	8.45	10.05	18.50	46.00	-27.50	AVG	
8		4.2540	31.37	9.83	41.20	56.00	-14.80	peak	
9		5.1855	20.52	9.83	30.35	50.00	-19.65	AVG	
10		7.2240	28.42	9.86	38.28	60.00	-21.72	peak	
11		8.1960	18.81	9.89	28.70	50.00	-21.30	AVG	
12		17.3895	30.31	9.96	40.27	60.00	-19.73	peak	

*:Maximum data x:Over limit !:over margin


Reference Only

File :0820\Data :#1

Page: 1

Engineer Signature:

Neutral line:

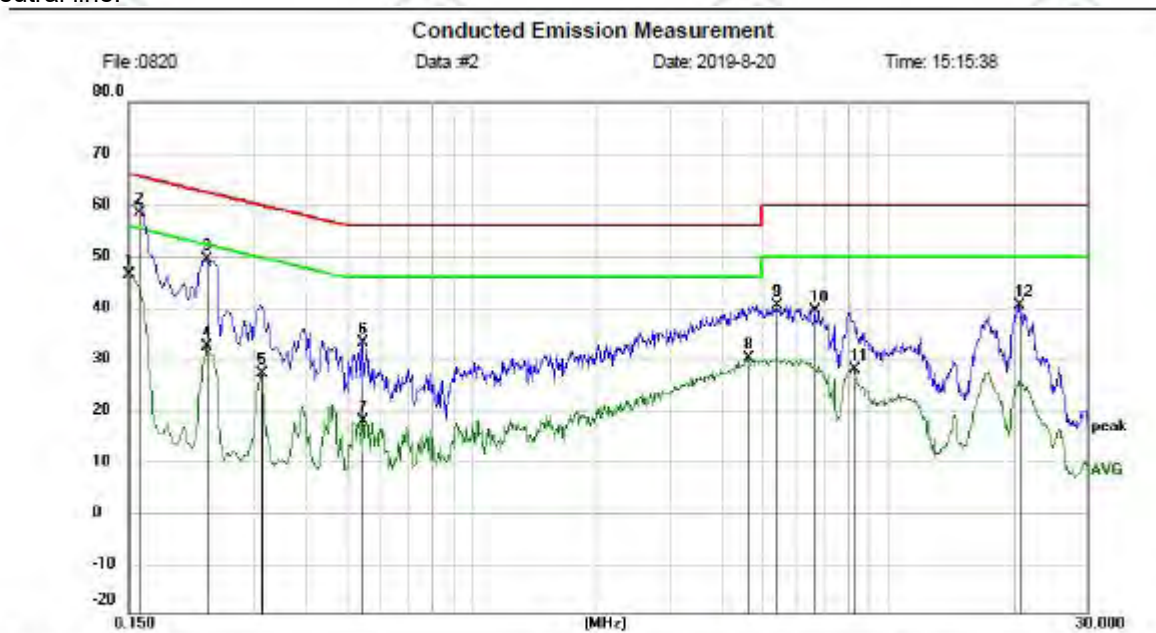

Site: LAB

Limit: FCC Class B CE(QP)

EUT:

M/N:

Mode: ON

Note:

Phase: N

Power: AC120/60Hz

Temperature: 21

Humidity: 51 %

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1500	36.32	9.97	46.29	56.00	-9.71	AVG	
2	*	0.1590	48.47	9.98	58.45	65.52	-7.07	QP	
3		0.2310	39.31	10.04	49.35	62.41	-13.06	peak	
4		0.2310	22.28	10.04	32.32	52.41	-20.09	AVG	
5		0.3120	17.10	10.09	27.19	49.92	-22.73	AVG	
6		0.5460	23.02	10.06	33.08	56.00	-22.92	peak	
7		0.5460	7.85	10.06	17.91	46.00	-28.09	AVG	
8		4.6140	20.27	9.83	30.10	46.00	-15.90	AVG	
9		5.4015	30.65	9.83	40.48	60.00	-19.52	peak	
10		6.6750	29.61	9.85	39.46	60.00	-20.54	peak	
11		8.3085	17.89	9.90	27.79	50.00	-22.21	AVG	
12		20.6924	30.54	9.93	40.47	60.00	-19.53	peak	

*:Maximum data x:Over limit !:over margin

(Reference Only)

File :0820\Data :#2

Page: 1

Engineer Signature:

Notes:1. The following Quasi-Peak and Average measurements were performed on the EUT:

2. Final Test Level =Receiver Reading + LISN Factor + Cable Loss.


Appendix K): Restricted bands around fundamental frequency (Radiated)

Receiver Setup:	Frequency	Detector	RBW	VBW	Remark
	30MHz-1GHz	Quasi-peak	120kHz	300kHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Peak	1MHz	10Hz	Average
Test Procedure:	Below 1GHz test procedure as below: - The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation. - The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. - The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. - For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. - The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. - Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest channel Above 1GHz test procedure as below: - Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 meter to 1.5 meter(Above 18GHz the distance is 1 meter and table is 1.5 meter). b. Test the EUT in the lowest channel , the Highest channel - The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is worse case. - Repeat above procedures until all frequencies measured was complete.				
Limit:	Frequency	Limit (dBμV/m @3m)	Remark		
	30MHz-88MHz	40.0	Quasi-peak Value		
	88MHz-216MHz	43.5	Quasi-peak Value		
	216MHz-960MHz	46.0	Quasi-peak Value		
	960MHz-1GHz	54.0	Quasi-peak Value		
	Above 1GHz	54.0	Average Value		
		74.0	Peak Value		

Test plot as follows:

Mode:	GFSK Transmitting	Channel:	2402
Remark:	PK		


Test Graph

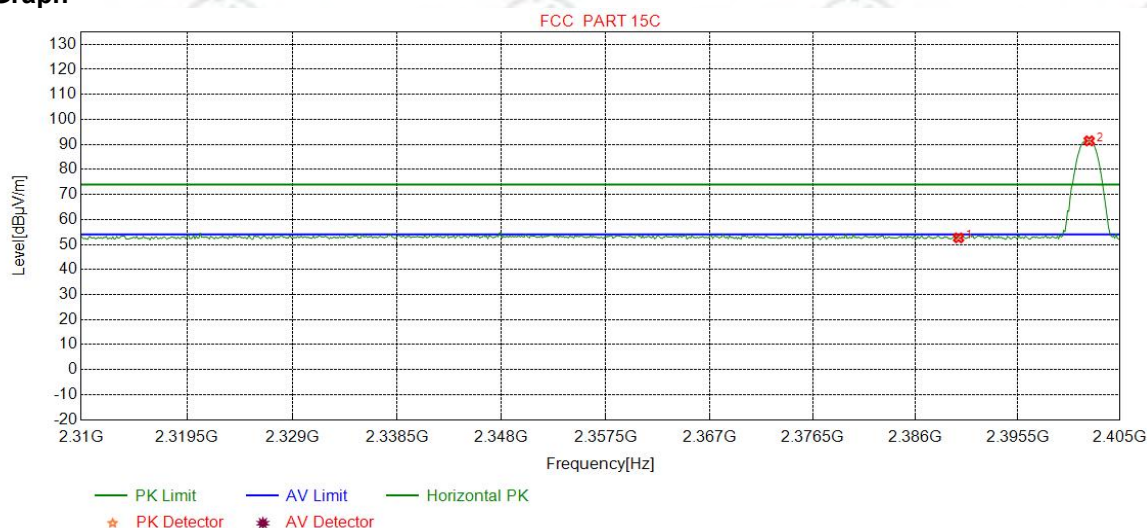

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2390.0000	32.25	13.37	-42.44	49.46	52.64	74.00	21.36	Pass	Horizontal
2	2402.1464	32.26	13.31	-42.43	88.27	91.41	74.00	-17.41	Pass	Horizontal

Mode:	GFSK Transmitting	Channel:	2402
Remark:	PK		


Test Graph

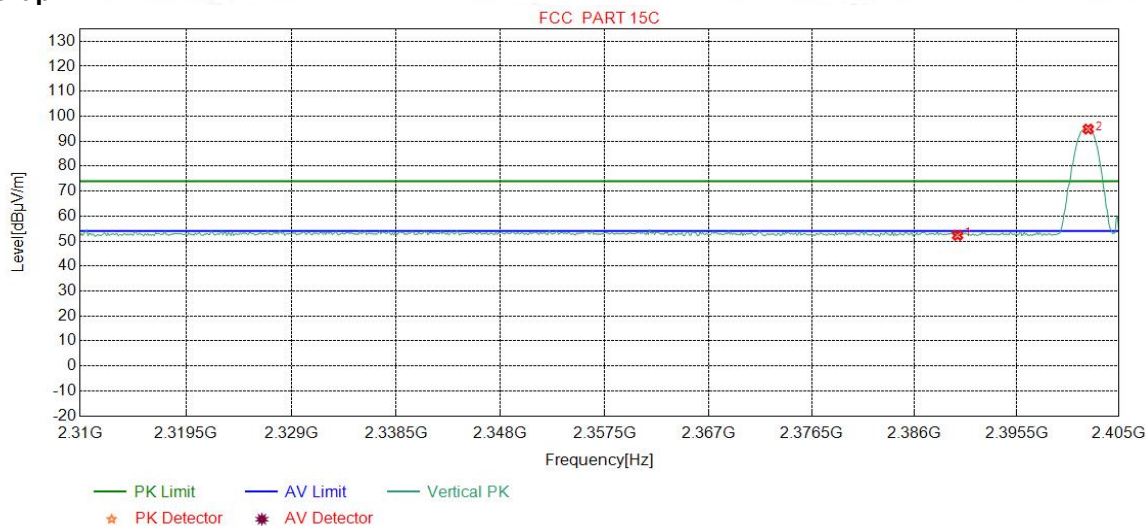

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2390.0000	32.25	13.37	-42.44	49.12	52.30	74.00	21.70	Pass	Vertical
2	2402.1464	32.26	13.31	-42.43	91.69	94.83	74.00	-20.83	Pass	Vertical

Mode:	GFSK Transmitting	Channel:	2402
Remark:	AV		


Test Graph

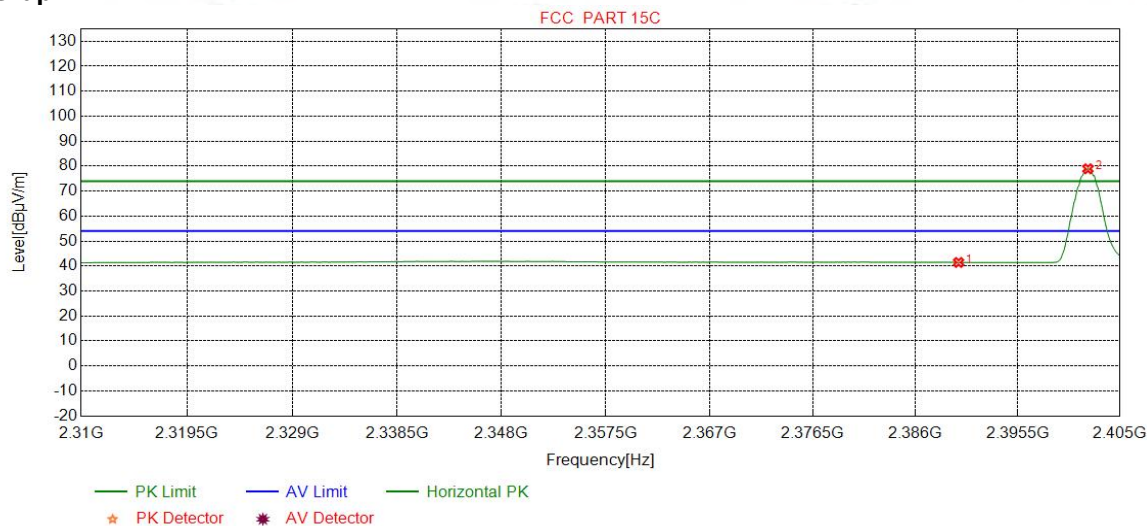

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2390.0000	32.25	13.37	-42.44	38.26	41.44	54.00	12.56	Pass	Horizontal
2	2402.0275	32.26	13.31	-42.43	75.80	78.94	54.00	-24.94	Pass	Horizontal

Mode:	GFSK Transmitting	Channel:	2402
Remark:	AV		


Test Graph

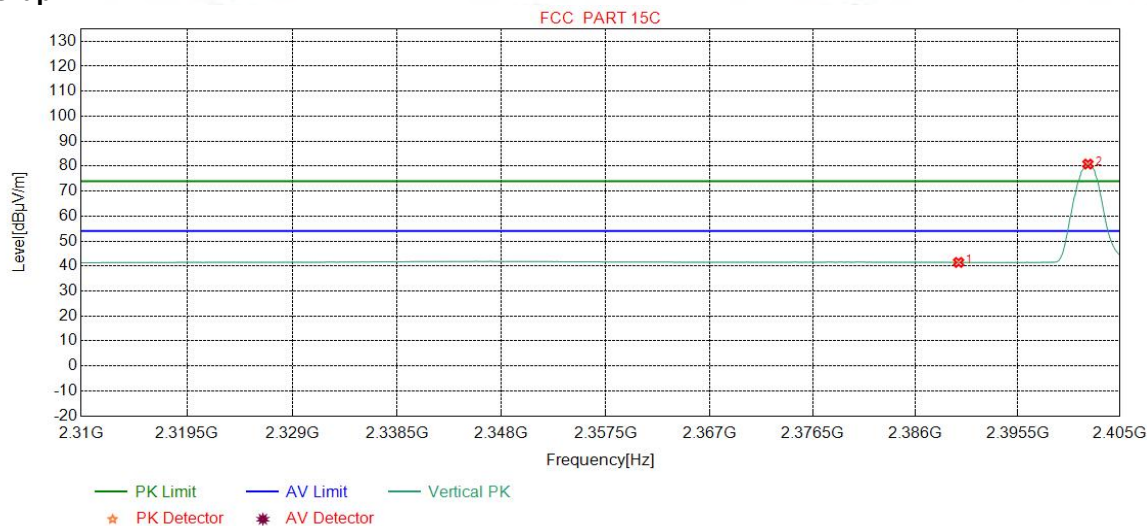

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2390.0000	32.25	13.37	-42.44	38.27	41.45	54.00	12.55	Pass	Vertical
2	2402.0275	32.26	13.31	-42.43	77.68	80.82	54.00	-26.82	Pass	Vertical

Mode:	GFSK Transmitting	Channel:	2480
Remark:	PK		


Test Graph

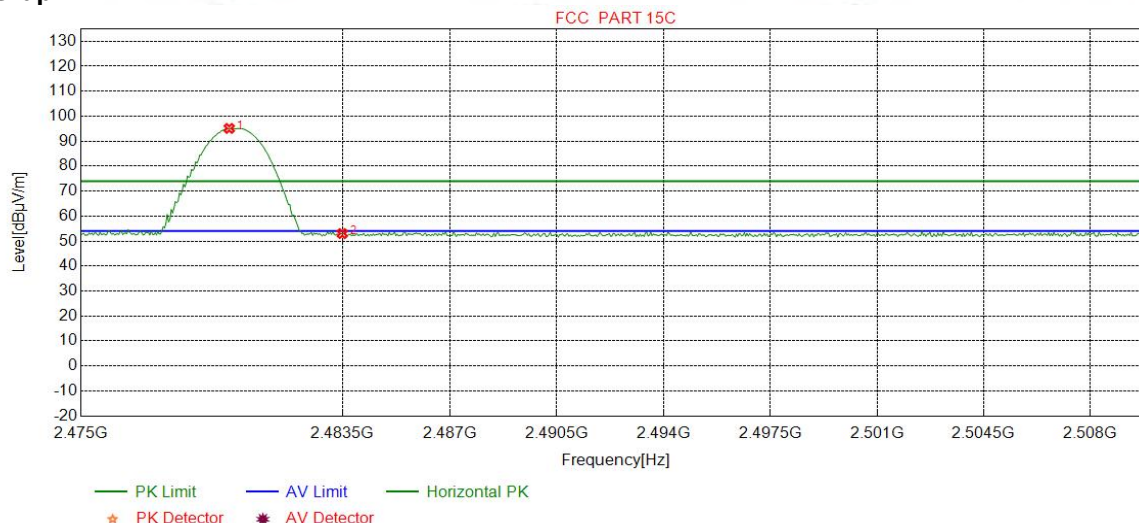

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2479.8185	32.37	13.39	-42.39	91.74	95.11	74.00	-21.11	Pass	Horizontal
2	2483.5000	32.38	13.38	-42.40	49.63	52.99	74.00	21.01	Pass	Horizontal

Mode:	GFSK Transmitting	Channel:	2480
Remark:	PK		


Test Graph

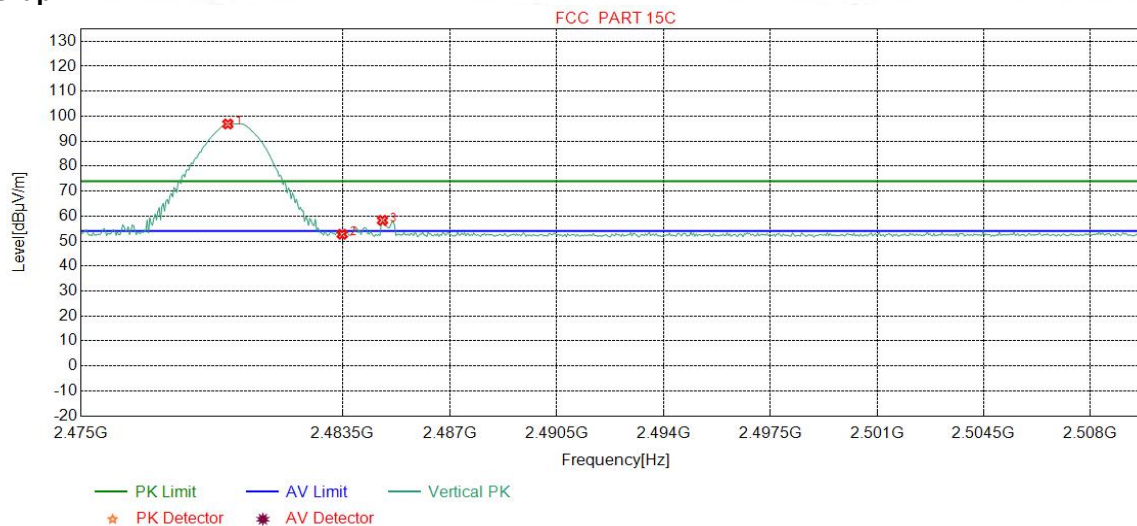

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2479.7747	32.37	13.39	-42.39	93.52	96.89	74.00	-22.89	Pass	Vertical
2	2483.5000	32.38	13.38	-42.40	49.38	52.74	74.00	21.26	Pass	Vertical
3	2484.8123	32.38	13.37	-42.40	54.94	58.29	74.00	15.71	Pass	Vertical

Mode:	GFSK Transmitting	Channel:	2480
Remark:	AV		


Test Graph

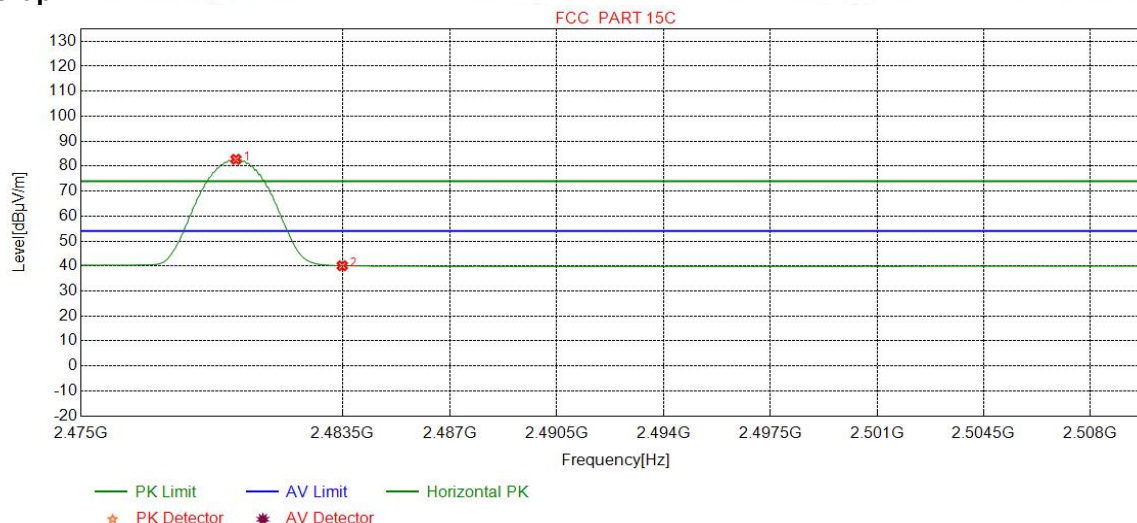

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2480.0375	32.37	13.39	-42.39	79.35	82.72	54.00	-28.72	Pass	Horizontal
2	2483.5000	32.38	13.38	-42.40	36.75	40.11	54.00	13.89	Pass	Horizontal

Mode:	GFSK Transmitting	Channel:	2480
Remark:	AV		


Test Graph

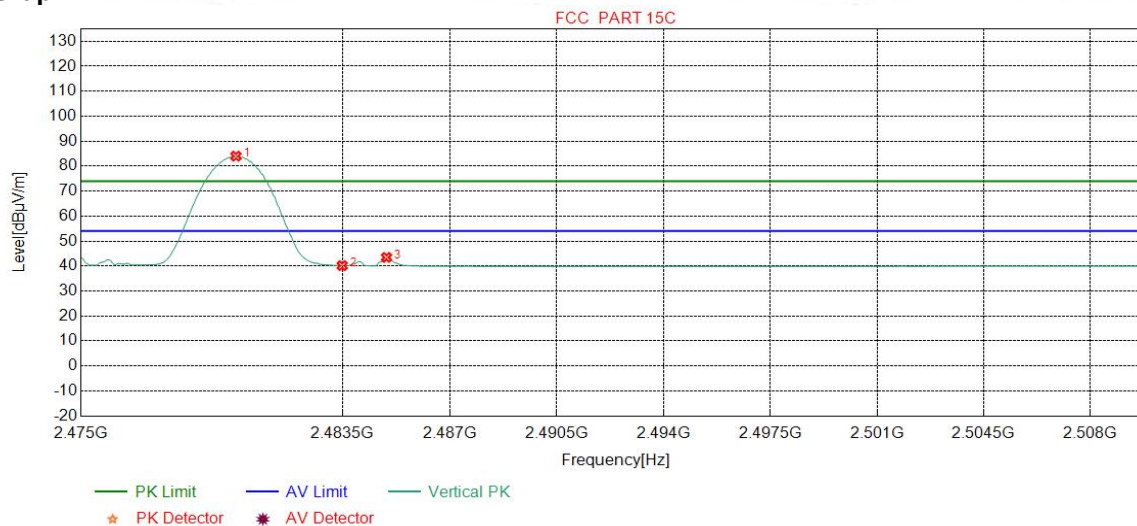

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2480.0375	32.37	13.39	-42.39	80.64	84.01	54.00	-30.01	Pass	Vertical
2	2483.5000	32.38	13.38	-42.40	36.80	40.16	54.00	13.84	Pass	Vertical
3	2484.9437	32.38	13.37	-42.40	40.11	43.46	54.00	10.54	Pass	Vertical

Mode:	$\pi/4$ DQPSK Transmitting	Channel:	2402
Remark:	PK		


Test Graph

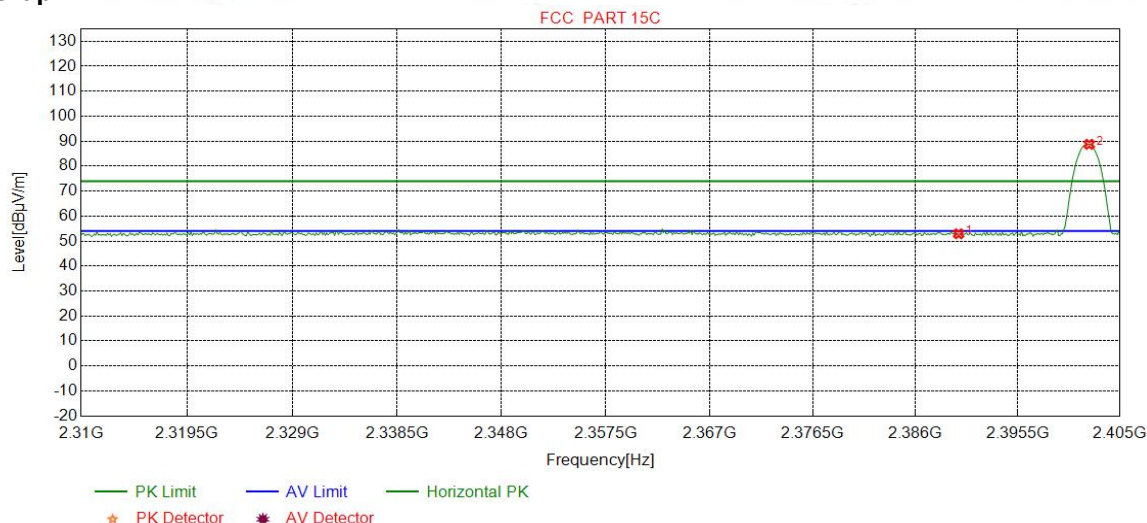

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2390.0000	32.25	13.37	-42.44	49.72	52.90	74.00	21.10	Pass	Horizontal
2	2402.1464	32.26	13.31	-42.43	85.60	88.74	74.00	-14.74	Pass	Horizontal

Mode:	$\pi/4$ DQPSK Transmitting	Channel:	2402
Remark:	PK		


Test Graph

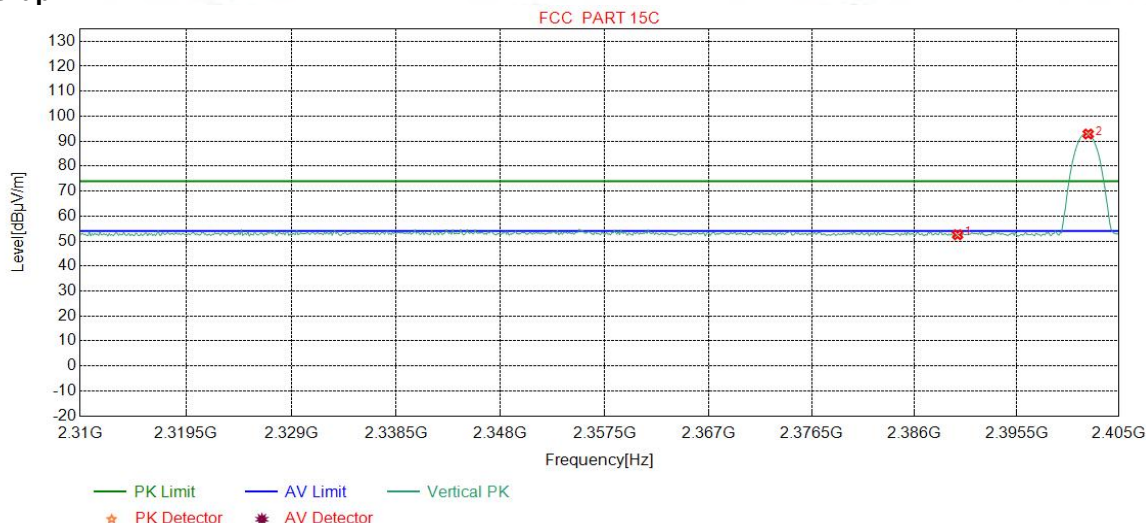

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2390.0000	32.25	13.37	-42.44	49.32	52.50	74.00	21.50	Pass	Vertical
2	2402.1464	32.26	13.31	-42.43	89.71	92.85	74.00	-18.85	Pass	Vertical

Mode:	$\pi/4$ DQPSK Transmitting	Channel:	2402
Remark:	AV		


Test Graph

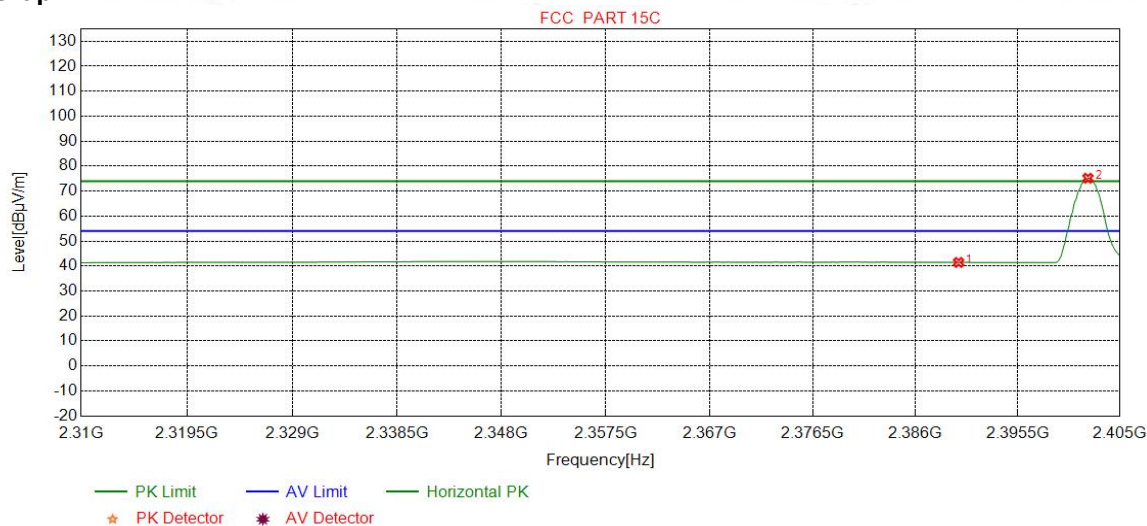

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2390.0000	32.25	13.37	-42.44	38.27	41.45	54.00	12.55	Pass	Horizontal
2	2402.0275	32.26	13.31	-42.43	72.02	75.16	54.00	-21.16	Pass	Horizontal

Mode:	$\pi/4$ DQPSK Transmitting	Channel:	2402
Remark:	AV		


Test Graph

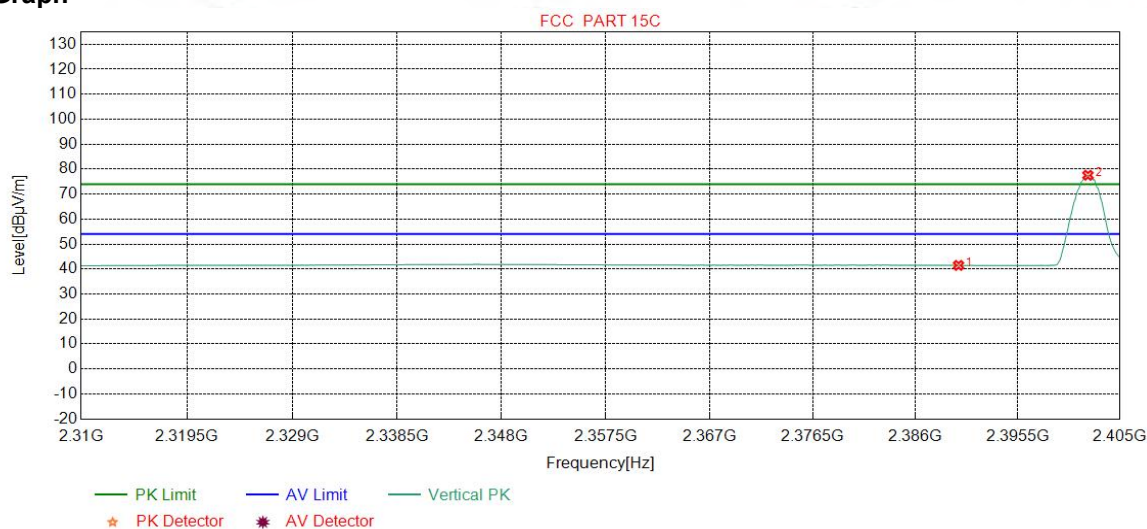

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2390.0000	32.25	13.37	-42.44	38.28	41.46	54.00	12.54	Pass	Vertical
2	2402.0275	32.26	13.31	-42.43	74.41	77.55	54.00	-23.55	Pass	Vertical

Mode:	$\pi/4$ DQPSK Transmitting	Channel:	2480
Remark:	PK		


Test Graph

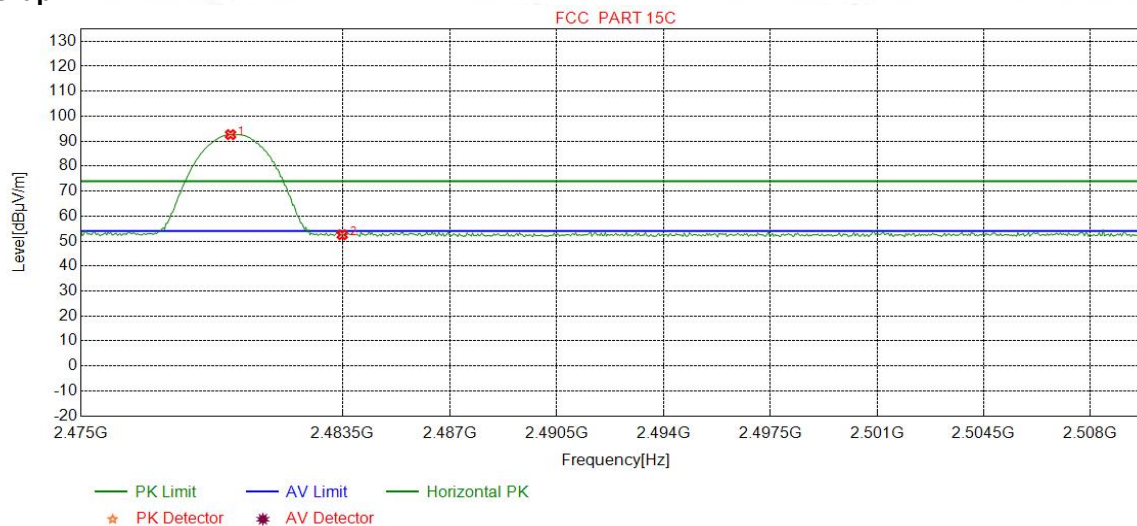

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2479.8623	32.37	13.39	-42.39	89.25	92.62	74.00	-18.62	Pass	Horizontal
2	2483.5000	32.38	13.38	-42.40	49.15	52.51	74.00	21.49	Pass	Horizontal

Mode:	$\pi/4$ DQPSK Transmitting	Channel:	2480
Remark:	PK		


Test Graph

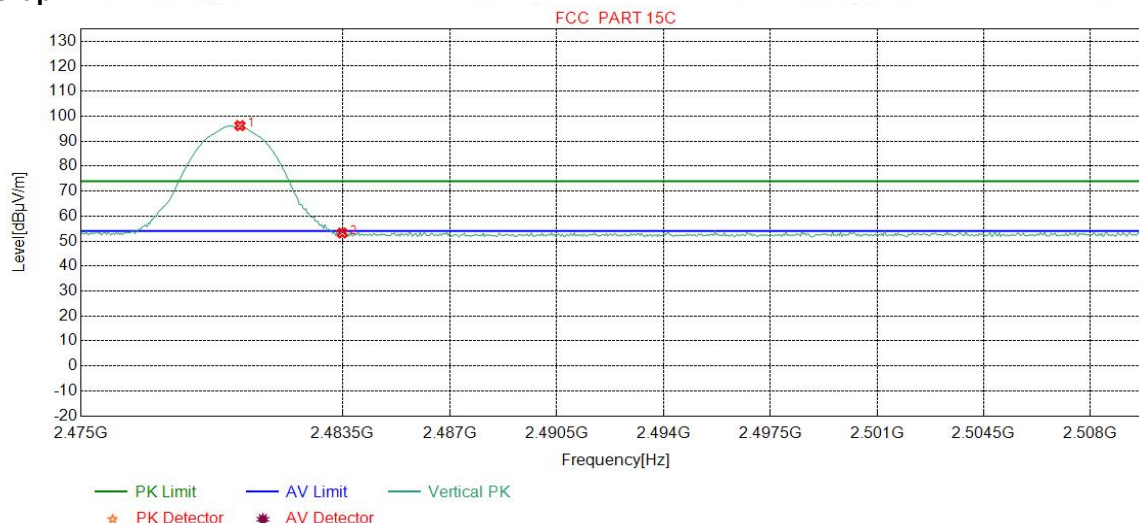

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2480.1690	32.37	13.39	-42.40	92.84	96.20	74.00	-22.20	Pass	Vertical
2	2483.5000	32.38	13.38	-42.40	49.85	53.21	74.00	20.79	Pass	Vertical

Mode:	$\pi/4$ DQPSK Transmitting	Channel:	2480
Remark:	AV		


Test Graph

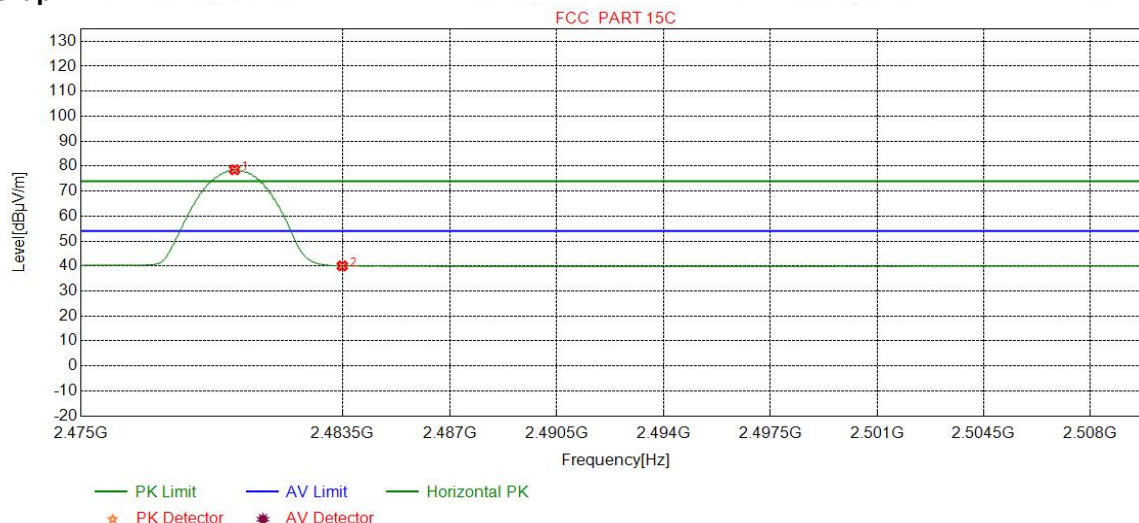

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2479.9937	32.37	13.39	-42.39	75.20	78.57	54.00	-24.57	Pass	Horizontal
2	2483.5000	32.38	13.38	-42.40	36.70	40.06	54.00	13.94	Pass	Horizontal

Mode:	$\pi/4$ DQPSK Transmitting	Channel:	2480
Remark:	AV		


Test Graph

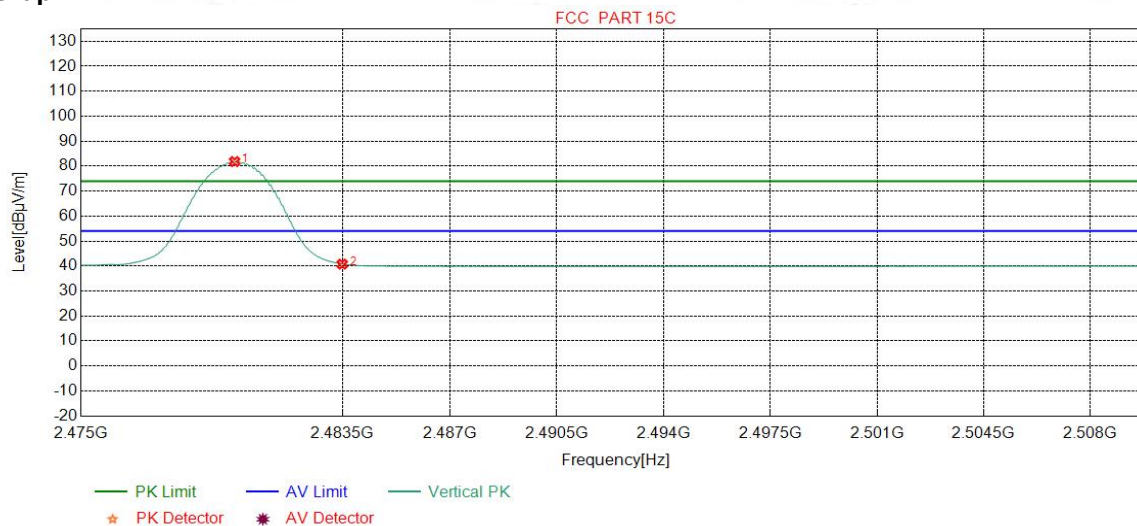

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2479.9937	32.37	13.39	-42.39	78.46	81.83	54.00	-27.83	Pass	Vertical
2	2483.5000	32.38	13.38	-42.40	37.39	40.75	54.00	13.25	Pass	Vertical

Mode:	8DPSK Transmitting	Channel:	2402
Remark:	PK		


Test Graph

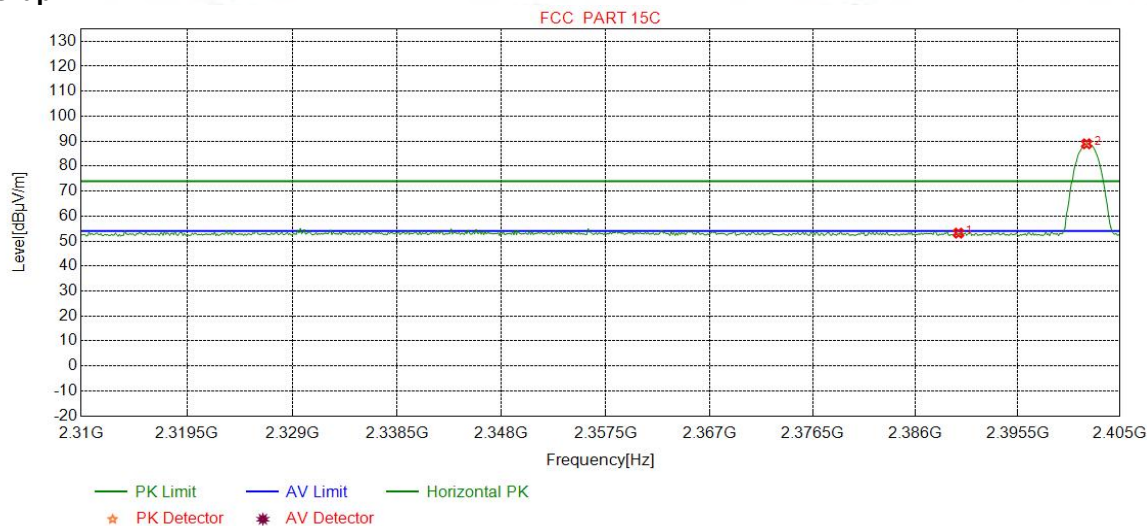

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2390.0000	32.25	13.37	-42.44	49.99	53.17	74.00	20.83	Pass	Horizontal
2	2401.9086	32.26	13.31	-42.43	85.81	88.95	74.00	-14.95	Pass	Horizontal

Mode:	8DPSK Transmitting	Channel:	2402
Remark:	PK		


Test Graph

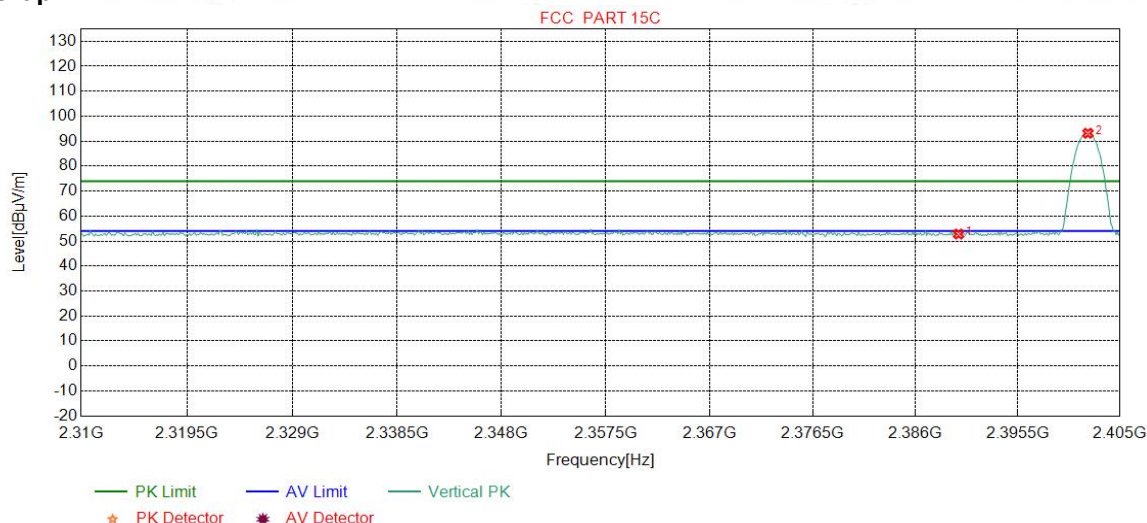

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2390.0000	32.25	13.37	-42.44	49.63	52.81	74.00	21.19	Pass	Vertical
2	2402.0275	32.26	13.31	-42.43	90.03	93.17	74.00	-19.17	Pass	Vertical

Mode:	8DPSK Transmitting	Channel:	2402
Remark:	AV		


Test Graph

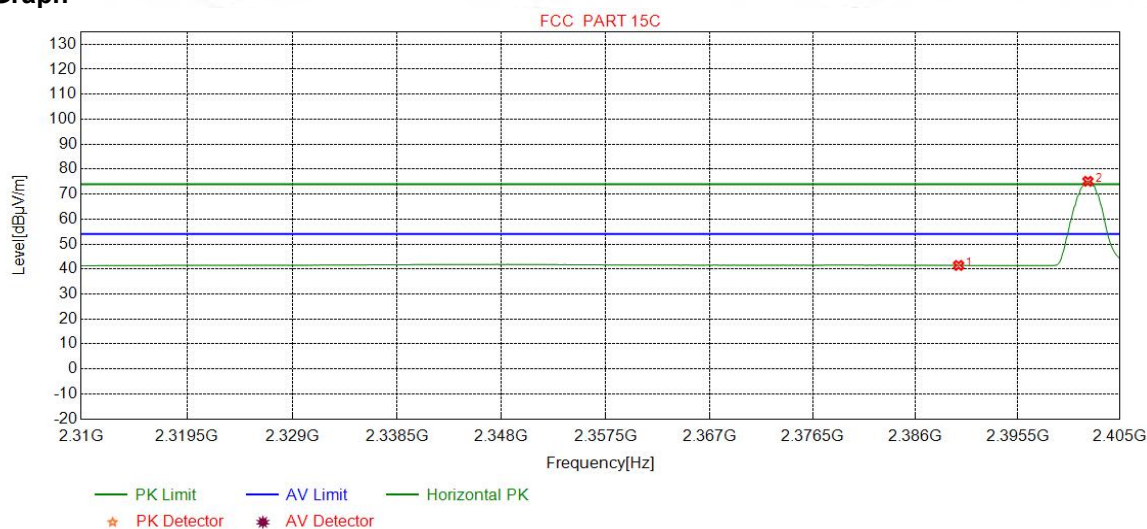

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2390.0000	32.25	13.37	-42.44	38.27	41.45	54.00	12.55	Pass	Horizontal
2	2402.0275	32.26	13.31	-42.43	71.99	75.13	54.00	-21.13	Pass	Horizontal

Mode:	8DPSK Transmitting	Channel:	2402
Remark:	AV		


Test Graph

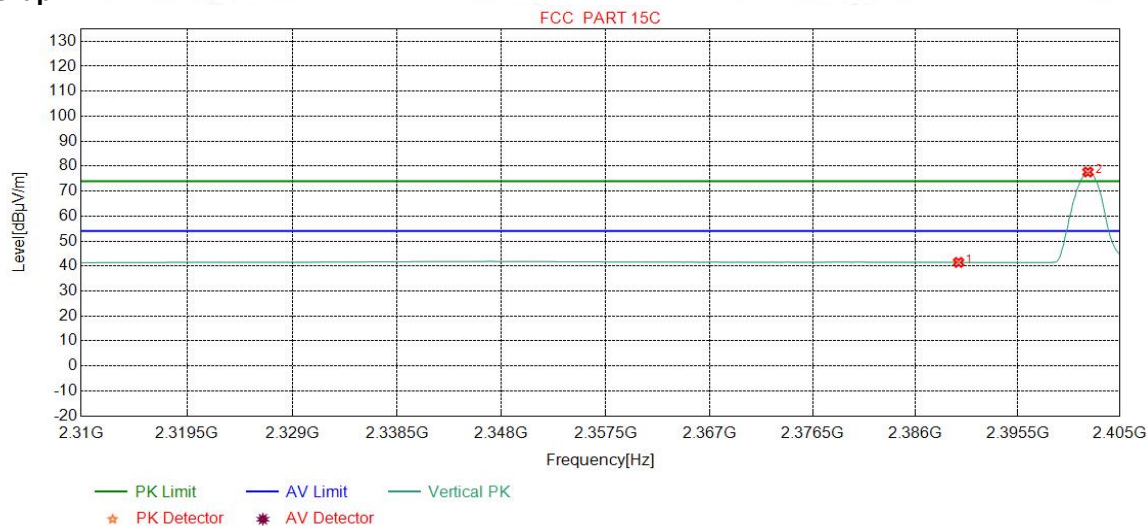

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2390.0000	32.25	13.37	-42.44	38.27	41.45	54.00	12.55	Pass	Vertical
2	2402.0275	32.26	13.31	-42.43	74.51	77.65	54.00	-23.65	Pass	Vertical

Mode:	8DPSK Transmitting	Channel:	2480
Remark:	PK		


Test Graph

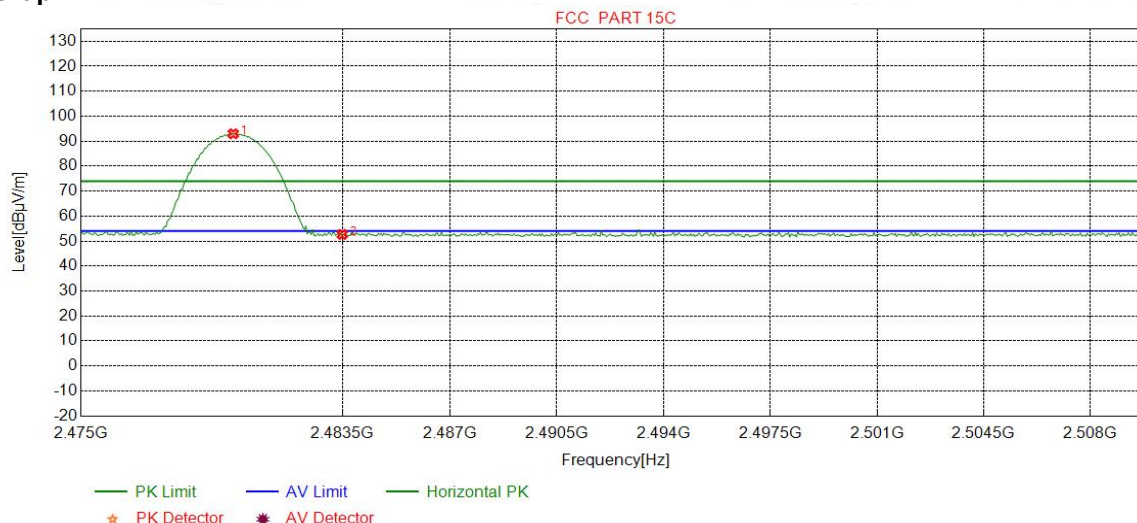

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2479.9499	32.37	13.39	-42.39	89.59	92.96	74.00	-18.96	Pass	Horizontal
2	2483.5000	32.38	13.38	-42.40	49.30	52.66	74.00	21.34	Pass	Horizontal

Mode:	8DPSK Transmitting	Channel:	2480
Remark:	PK		


Test Graph

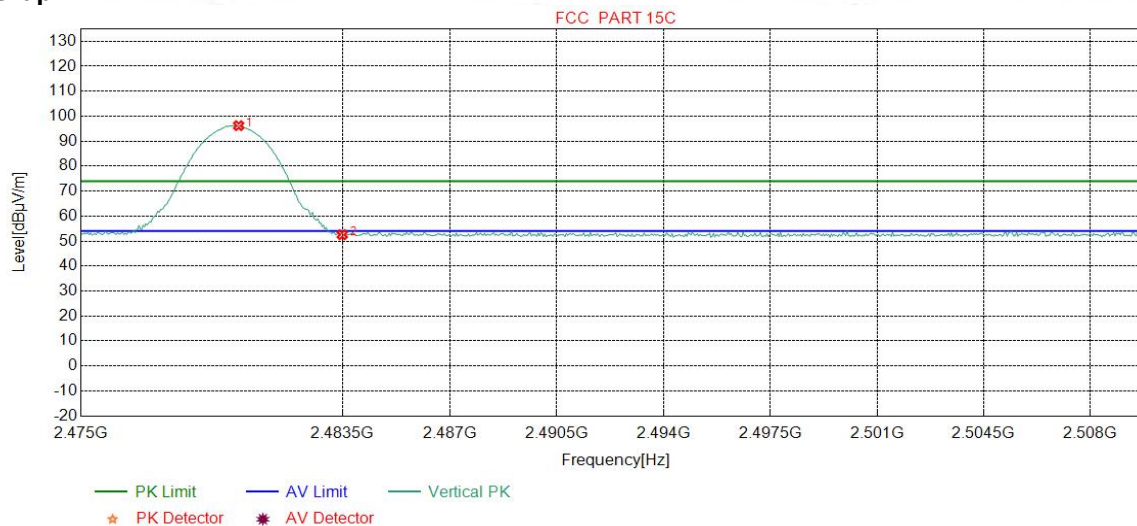

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2480.1252	32.37	13.39	-42.40	92.84	96.20	74.00	-22.20	Pass	Vertical
2	2483.5000	32.38	13.38	-42.40	49.19	52.55	74.00	21.45	Pass	Vertical

Mode:	8DPSK Transmitting	Channel:	2480
Remark:	AV		


Test Graph

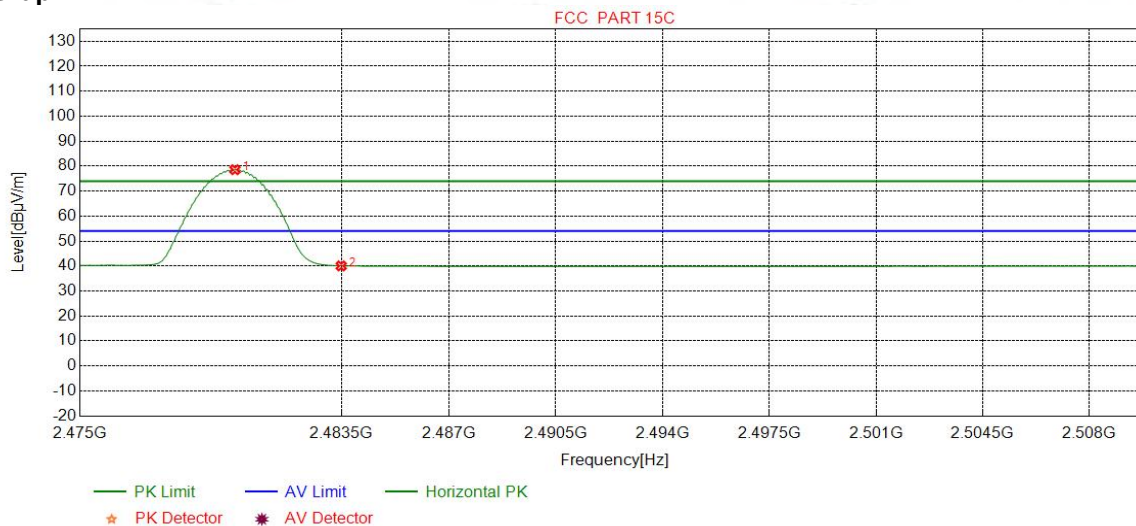

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2480.0375	32.37	13.39	-42.39	75.21	78.58	54.00	-24.58	Pass	Horizontal
2	2483.5000	32.38	13.38	-42.40	36.69	40.05	54.00	13.95	Pass	Horizontal

Mode:	8DPSK Transmitting	Channel:	2480
Remark:	AV		

Test Graph

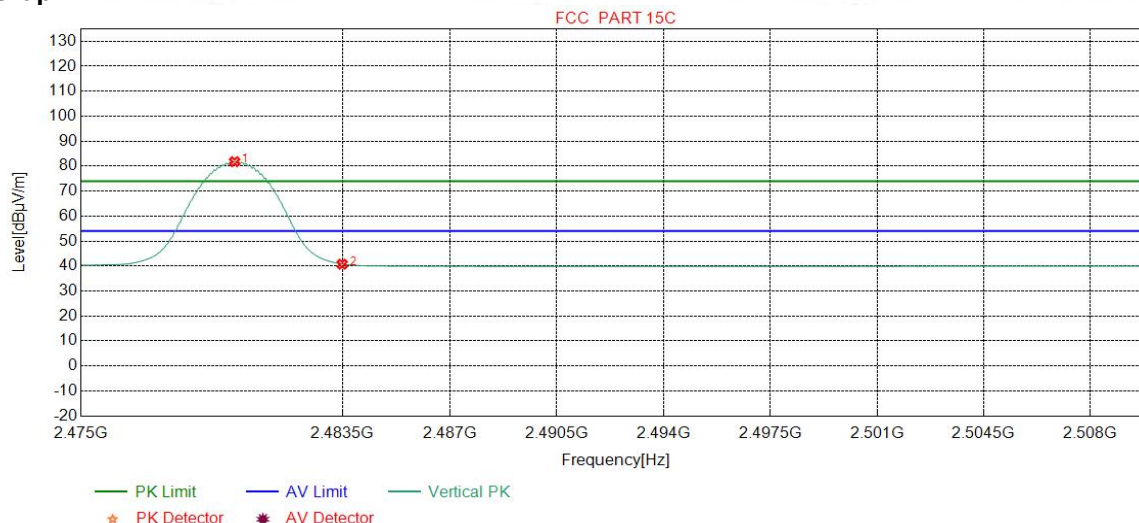

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2479.9937	32.37	13.39	-42.39	78.41	81.78	54.00	-27.78	Pass	Vertical
2	2483.5000	32.38	13.38	-42.40	37.37	40.73	54.00	13.27	Pass	Vertical

Note:

1) Through Pre-scan transmitter mode with all kind of modulation and all kind of data type, find the 1-DH5 of data type is the worse case of GFSK modulation type, the 2-DH5 of data type is the worse case of $\pi/4$ DQPSK modulation type, the 3-DH5 of data type is the worse case of 8DPSK modulation type in charge + transmitter mode.

2) As shown in this section, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. So, only the peak values are measured.

3) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading - Correct Factor

Correct Factor = Preamplifier Factor - Antenna Factor - Cable Factor

Appendix L): Radiated Spurious Emissions

Receiver Setup:

Frequency	Detector	RBW	VBW	Remark
0.009MHz-0.090MHz	Peak	10kHz	30kHz	Peak
0.009MHz-0.090MHz	Average	10kHz	30kHz	Average
0.090MHz-0.110MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
0.110MHz-0.490MHz	Peak	10kHz	30kHz	Peak
0.110MHz-0.490MHz	Average	10kHz	30kHz	Average
0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
30MHz-1GHz	Quasi-peak	120kHz	300kHz	Quasi-peak
Above 1GHz	Peak	1MHz	3MHz	Peak
	Peak	1MHz	10Hz	Average

Test Procedure:

Below 1GHz test procedure as below:

a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.

b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.

c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.

d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.

e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:

g. Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 meter to 1.5 meter(Above 18GHz the distance is 1 meter and table is 1.5 meter).

h. Test the EUT in the lowest channel ,the middle channel ,the Highest channel

i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is worse case.

j. Repeat above procedures until all frequencies measured was complete.

Limit:

Frequency	Field strength (microvolt/meter)	Limit (dBμV/m)	Remark	Measurement distance (m)
0.009MHz-0.490MHz	2400/F(kHz)	-	-	300
0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
1.705MHz-30MHz	30	-	-	30
30MHz-88MHz	100	40.0	Quasi-peak	3
88MHz-216MHz	150	43.5	Quasi-peak	3
216MHz-960MHz	200	46.0	Quasi-peak	3
960MHz-1GHz	500	54.0	Quasi-peak	3
Above 1GHz	500	54.0	Average	3

Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

Radiated Spurious Emissions test Data:
Radiated Emission below 1GHz

Mode:		GFSK Transmitting				Channel:		2402		
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	73.7514	8.29	1.00	-32.07	53.54	30.76	40.00	9.24	Pass	H
2	101.9812	10.98	1.18	-32.06	47.66	27.76	43.50	15.74	Pass	H
3	172.5073	8.59	1.54	-31.97	50.51	28.67	43.50	14.83	Pass	H
4	331.7972	13.90	2.17	-31.78	43.96	28.25	46.00	17.75	Pass	H
5	398.7339	15.37	2.38	-31.77	41.85	27.83	46.00	18.17	Pass	H
6	687.5318	19.70	3.14	-32.06	35.64	26.42	46.00	19.58	Pass	H
7	74.5275	8.14	1.00	-32.05	47.07	24.16	40.00	15.84	Pass	V
8	105.3765	10.95	1.21	-32.07	40.04	20.13	43.50	23.37	Pass	V
9	208.8859	11.13	1.71	-31.94	49.94	30.84	43.50	12.66	Pass	V
10	391.1671	15.21	2.35	-31.80	37.35	23.11	46.00	22.89	Pass	V
11	714.9855	19.96	3.20	-32.10	32.35	23.41	46.00	22.59	Pass	V
12	960.0320	22.46	3.71	-31.09	33.66	28.74	54.00	25.26	Pass	V

Mode:		GFSK Transmitting				Channel:		2441		
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	73.7514	8.29	1.00	-32.07	54.64	31.86	40.00	8.14	Pass	H
2	169.4029	8.42	1.53	-31.97	50.86	28.84	43.50	14.66	Pass	H
3	217.4227	11.35	1.76	-31.95	41.95	23.11	46.00	22.89	Pass	H
4	329.7600	13.85	2.16	-31.76	44.09	28.34	46.00	17.66	Pass	H
5	392.1372	15.23	2.36	-31.81	41.28	27.06	46.00	18.94	Pass	H
6	909.9750	22.16	3.60	-31.48	33.50	27.78	46.00	18.22	Pass	H
7	73.7514	8.29	1.00	-32.07	47.13	24.35	40.00	15.65	Pass	V
8	104.1154	10.96	1.20	-32.07	40.69	20.78	43.50	22.72	Pass	V
9	208.8859	11.13	1.71	-31.94	49.07	29.97	43.50	13.53	Pass	V
10	382.6303	15.02	2.33	-31.87	37.32	22.80	46.00	23.20	Pass	V
11	600.0290	19.00	2.96	-31.99	32.44	22.41	46.00	23.59	Pass	V
12	960.0320	22.46	3.71	-31.09	33.26	28.34	54.00	25.66	Pass	V

Mode:		GFSK Transmitting				Channel:		2480		
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	73.7514	8.29	1.00	-32.07	54.91	32.13	40.00	7.87	Pass	H
2	167.8508	8.33	1.52	-31.97	50.23	28.11	43.50	15.39	Pass	H
3	208.8859	11.13	1.71	-31.94	45.93	26.83	43.50	16.67	Pass	H
4	306.8657	13.35	2.08	-31.88	43.57	27.12	46.00	18.88	Pass	H
5	396.9877	15.33	2.37	-31.77	42.54	28.47	46.00	17.53	Pass	H
6	687.5318	19.70	3.14	-32.06	35.44	26.22	46.00	19.78	Pass	H
7	67.5428	9.64	0.94	-32.05	45.57	24.10	40.00	15.90	Pass	V
8	104.7945	10.95	1.20	-32.06	39.38	19.47	43.50	24.03	Pass	V
9	208.8859	11.13	1.71	-31.94	49.24	30.14	43.50	13.36	Pass	V
10	307.4477	13.36	2.08	-31.88	40.70	24.26	46.00	21.74	Pass	V
11	399.2189	15.38	2.38	-31.76	35.48	21.48	46.00	24.52	Pass	V
12	960.0320	22.46	3.71	-31.09	33.40	28.48	54.00	25.52	Pass	V

Mode:		$\pi/4$ DQPSK Transmitting				Channel:		2402		
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Result	Polarity
1	73.7514	8.29	1.00	-32.07	53.37	30.59	40.00	9.41	Pass	H
2	170.1790	8.46	1.53	-31.96	53.49	31.52	43.50	11.98	Pass	H
3	330.1480	13.86	2.16	-31.76	43.13	27.39	46.00	18.61	Pass	H
4	397.0847	15.34	2.37	-31.78	42.94	28.87	46.00	17.13	Pass	H
5	687.5318	19.70	3.14	-32.06	35.28	26.06	46.00	19.94	Pass	H
6	960.0320	22.46	3.71	-31.09	32.35	27.43	54.00	26.57	Pass	H
7	73.7514	8.29	1.00	-32.07	46.75	23.97	40.00	16.03	Pass	V
8	105.6676	10.94	1.21	-32.06	42.01	22.10	43.50	21.40	Pass	V
9	168.6269	8.37	1.52	-31.96	42.79	20.72	43.50	22.78	Pass	V
10	208.8859	11.13	1.71	-31.94	49.51	30.41	43.50	13.09	Pass	V
11	296.6797	13.13	2.05	-31.86	39.78	23.10	46.00	22.90	Pass	V
12	349.0649	14.28	2.23	-31.87	38.08	22.72	46.00	23.28	Pass	V

Mode:		$\pi/4$ DQPSK Transmitting				Channel:		2441		
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Result	Polarity
1	72.9753	8.43	0.99	-32.06	56.94	34.30	40.00	5.70	Pass	H
2	169.4029	8.42	1.53	-31.97	51.86	29.84	43.50	13.66	Pass	H
3	338.8789	14.06	2.20	-31.83	42.68	27.11	46.00	18.89	Pass	H
4	384.7645	15.06	2.33	-31.84	41.20	26.75	46.00	19.25	Pass	H
5	687.5318	19.70	3.14	-32.06	34.91	25.69	46.00	20.31	Pass	H
6	879.7080	21.86	3.55	-31.66	33.01	26.76	46.00	19.24	Pass	H
7	67.5428	9.64	0.94	-32.05	45.75	24.28	40.00	15.72	Pass	V
8	184.3424	9.41	1.59	-31.98	40.15	19.17	43.50	24.33	Pass	V
9	208.8859	11.13	1.71	-31.94	49.25	30.15	43.50	13.35	Pass	V
10	391.2641	15.21	2.35	-31.80	38.91	24.67	46.00	21.33	Pass	V
11	584.9925	18.70	2.91	-31.95	33.46	23.12	46.00	22.88	Pass	V
12	960.0320	22.46	3.71	-31.09	33.80	28.88	54.00	25.12	Pass	V

Mode:		$\pi/4$ DQPSK Transmitting				Channel:		2480		
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Result	Polarity
1	74.2364	8.20	1.00	-32.06	55.35	32.49	40.00	7.51	Pass	H
2	167.1717	8.29	1.51	-31.96	50.48	28.32	43.50	15.18	Pass	H
3	342.0802	14.13	2.21	-31.85	43.85	28.34	46.00	17.66	Pass	H
4	398.2488	15.36	2.37	-31.76	44.30	30.27	46.00	15.73	Pass	H
5	687.5318	19.70	3.14	-32.06	36.13	26.91	46.00	19.09	Pass	H
6	875.0515	21.80	3.55	-31.70	34.41	28.06	46.00	17.94	Pass	H
7	67.5428	9.64	0.94	-32.05	45.01	23.54	40.00	16.46	Pass	V
8	208.8859	11.13	1.71	-31.94	49.72	30.62	43.50	12.88	Pass	V
9	306.5747	13.34	2.08	-31.88	40.31	23.85	46.00	22.15	Pass	V
10	401.2561	15.42	2.39	-31.77	37.17	23.21	46.00	22.79	Pass	V
11	600.0290	19.00	2.96	-31.99	32.58	22.55	46.00	23.45	Pass	V
12	879.7080	21.86	3.55	-31.66	34.97	28.72	46.00	17.28	Pass	V

Mode:		8DPSK Transmitting				Channel:		2402		
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	73.7514	8.29	1.00	-32.07	53.92	31.14	40.00	8.86	Pass	H
2	171.4401	8.53	1.54	-31.97	50.53	28.63	43.50	14.87	Pass	H
3	341.6922	14.12	2.21	-31.84	43.25	27.74	46.00	18.26	Pass	H
4	393.6894	15.26	2.36	-31.79	42.17	28.00	46.00	18.00	Pass	H
5	687.5318	19.70	3.14	-32.06	35.22	26.00	46.00	20.00	Pass	H
6	879.6110	21.86	3.55	-31.66	34.11	27.86	46.00	18.14	Pass	H
7	73.7514	8.29	1.00	-32.07	47.25	24.47	40.00	15.53	Pass	V
8	105.0855	10.95	1.21	-32.07	39.42	19.51	43.50	23.99	Pass	V
9	208.8859	11.13	1.71	-31.94	49.49	30.39	43.50	13.11	Pass	V
10	399.9950	15.40	2.38	-31.76	37.91	23.93	46.00	22.07	Pass	V
11	779.9820	20.68	3.34	-32.01	33.07	25.08	46.00	20.92	Pass	V
12	879.7080	21.86	3.55	-31.66	34.58	28.33	46.00	17.67	Pass	V

Mode:		8DPSK Transmitting				Channel:		2441		
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	73.7514	8.29	1.00	-32.07	54.36	31.58	40.00	8.42	Pass	H
2	83.4523	7.89	1.05	-32.07	50.83	27.70	40.00	12.30	Pass	H
3	171.2461	8.52	1.54	-31.97	50.88	28.97	43.50	14.53	Pass	H
4	389.8090	15.18	2.35	-31.82	41.56	27.27	46.00	18.73	Pass	H
5	687.5318	19.70	3.14	-32.06	35.03	25.81	46.00	20.19	Pass	H
6	974.9715	22.55	3.75	-30.95	32.07	27.42	54.00	26.58	Pass	H
7	74.7215	8.10	1.01	-32.06	47.22	24.27	40.00	15.73	Pass	V
8	170.3730	8.47	1.53	-31.96	41.77	19.81	43.50	23.69	Pass	V
9	208.8859	11.13	1.71	-31.94	49.36	30.26	43.50	13.24	Pass	V
10	349.9380	14.30	2.23	-31.87	39.41	24.07	46.00	21.93	Pass	V
11	649.9890	19.40	3.10	-32.07	33.67	24.10	46.00	21.90	Pass	V
12	974.9715	22.55	3.75	-30.95	33.79	29.14	54.00	24.86	Pass	V

Mode:		8DPSK Transmitting				Channel:		2480		
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	73.7514	8.29	1.00	-32.07	53.28	30.50	40.00	9.50	Pass	H
2	171.9252	8.56	1.54	-31.97	50.92	29.05	43.50	14.45	Pass	H
3	208.8859	11.13	1.71	-31.94	45.53	26.43	43.50	17.07	Pass	H
4	339.1699	14.06	2.20	-31.83	43.08	27.51	46.00	18.49	Pass	H
5	392.0402	15.22	2.36	-31.80	42.17	27.95	46.00	18.05	Pass	H
6	879.7080	21.86	3.55	-31.66	34.61	28.36	46.00	17.64	Pass	H
7	73.7514	8.29	1.00	-32.07	49.00	26.22	40.00	13.78	Pass	V
8	104.4064	10.96	1.20	-32.07	39.33	19.42	43.50	24.08	Pass	V
9	184.3424	9.41	1.59	-31.98	40.97	19.99	43.50	23.51	Pass	V
10	208.8859	11.13	1.71	-31.94	49.05	29.95	43.50	13.55	Pass	V
11	394.9505	15.29	2.36	-31.78	38.20	24.07	46.00	21.93	Pass	V
12	960.0320	22.46	3.71	-31.09	32.94	28.02	54.00	25.98	Pass	V

Transmitter Emission above 1GHz

Mode:			GFSK Transmitting				Channel:		2402		
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1919.8920	31.17	3.42	-42.65	53.11	45.05	74.00	28.95	Pass	H	PK
2	3068.0045	33.23	4.79	-42.08	50.10	46.04	74.00	27.96	Pass	H	PK
3	4804.0000	34.50	4.55	-40.66	43.57	41.96	74.00	32.04	Pass	H	PK
4	7206.0000	36.31	5.81	-41.02	43.38	44.48	74.00	29.52	Pass	H	PK
5	9608.0000	37.64	6.63	-40.76	43.32	46.83	74.00	27.17	Pass	H	PK
6	12578.638	39.60	8.08	-41.20	46.07	52.55	74.00	21.45	Pass	H	PK
7	2998.5999	33.20	4.55	-42.13	50.14	45.76	74.00	28.24	Pass	V	PK
8	4804.0000	34.50	4.55	-40.66	44.76	43.15	74.00	30.85	Pass	V	PK
9	7206.0000	36.31	5.81	-41.02	43.26	44.36	74.00	29.64	Pass	V	PK
10	9608.0000	37.64	6.63	-40.76	42.78	46.29	74.00	27.71	Pass	V	PK
11	12010.000	39.31	7.60	-41.21	43.26	48.96	74.00	25.04	Pass	V	PK
12	13666.711	39.50	8.20	-41.20	46.20	52.70	74.00	21.30	Pass	V	PK

Mode:			GFSK Transmitting				Channel:		2441		
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2951.9952	33.12	4.41	-42.15	50.61	45.99	74.00	28.01	Pass	H	PK
2	4882.0000	34.50	4.81	-40.60	42.07	40.78	74.00	33.22	Pass	H	PK
3	7323.0000	36.42	5.85	-40.92	43.21	44.56	74.00	29.44	Pass	H	PK
4	9764.0000	37.71	6.71	-40.62	42.23	46.03	74.00	27.97	Pass	H	PK
5	12205.000	39.42	7.67	-41.16	43.74	49.67	74.00	24.33	Pass	H	PK
6	13671.711	39.50	8.23	-41.20	46.97	53.50	74.00	20.50	Pass	H	PK
7	3003.0002	33.20	4.92	-42.11	50.25	46.26	74.00	27.74	Pass	V	PK
8	4882.0000	34.50	4.81	-40.60	43.12	41.83	74.00	32.17	Pass	V	PK
9	7323.0000	36.42	5.85	-40.92	43.75	45.10	74.00	28.90	Pass	V	PK
10	9764.0000	37.71	6.71	-40.62	42.60	46.40	74.00	27.60	Pass	V	PK
11	12205.000	39.42	7.67	-41.16	43.53	49.46	74.00	24.54	Pass	V	PK
12	13724.715	39.53	8.33	-41.21	46.27	52.92	74.00	21.08	Pass	V	PK

Mode:			GFSK Transmitting				Channel:		2480		
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2947.9948	33.12	4.40	-42.15	51.48	46.85	74.00	27.15	Pass	H	PK
2	4960.0000	34.50	4.82	-40.53	43.37	42.16	74.00	31.84	Pass	H	PK
3	7440.0000	36.54	5.85	-40.82	43.96	45.53	74.00	28.47	Pass	H	PK
4	9920.0000	37.77	6.79	-40.48	42.24	46.32	74.00	27.68	Pass	H	PK
5	12400.000	39.54	7.86	-41.12	43.31	49.59	74.00	24.41	Pass	H	PK
6	14318.754	40.02	8.62	-41.90	46.69	53.43	74.00	20.57	Pass	H	PK
7	2947.5948	33.12	4.40	-42.15	50.66	46.03	74.00	27.97	Pass	V	PK
8	4960.0000	34.50	4.82	-40.53	45.04	43.83	74.00	30.17	Pass	V	PK
9	7440.0000	36.54	5.85	-40.82	43.50	45.07	74.00	28.93	Pass	V	PK
10	9920.0000	37.77	6.79	-40.48	41.63	45.71	74.00	28.29	Pass	V	PK
11	12400.000	39.54	7.86	-41.12	44.74	51.02	74.00	22.98	Pass	V	PK
12	13678.711	39.51	8.26	-41.21	46.42	52.98	74.00	21.02	Pass	V	PK

Mode:			$\pi/4$ DQPSK Transmitting				Channel:		2402		
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Result	Polarity	Remark
1	1919.8920	31.17	3.42	-42.65	52.71	44.65	74.00	29.35	Pass	H	PK
2	4804.0000	34.50	4.55	-40.66	43.03	41.42	74.00	32.58	Pass	H	PK
3	7206.0000	36.31	5.81	-41.02	44.32	45.42	74.00	28.58	Pass	H	PK
4	9589.4393	37.64	6.65	-40.78	46.11	49.62	74.00	24.38	Pass	H	PK
5	12010.000	39.31	7.60	-41.21	43.33	49.03	74.00	24.97	Pass	H	PK
6	12268.617	39.46	7.72	-41.15	46.21	52.24	74.00	21.76	Pass	H	PK
7	2809.9810	32.90	4.24	-42.23	50.96	45.87	74.00	28.13	Pass	V	PK
8	4804.0000	34.50	4.55	-40.66	42.90	41.29	74.00	32.71	Pass	V	PK
9	7206.0000	36.31	5.81	-41.02	43.35	44.45	74.00	29.55	Pass	V	PK
10	9608.0000	37.64	6.63	-40.76	43.06	46.57	74.00	27.43	Pass	V	PK
11	11961.597	39.27	7.51	-41.22	45.95	51.51	74.00	22.49	Pass	V	PK
12	13124.675	39.55	7.91	-41.60	46.74	52.60	74.00	21.40	Pass	V	PK

Mode:			$\pi/4$ DQPSK Transmitting				Channel:		2441		
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Result	Polarity	Remark
1	1917.4917	31.16	3.42	-42.66	52.40	44.32	74.00	29.68	Pass	H	PK
2	3297.0198	33.32	4.57	-41.94	49.72	45.67	74.00	28.33	Pass	H	PK
3	4882.0000	34.50	4.81	-40.60	43.94	42.65	74.00	31.35	Pass	H	PK
4	7323.0000	36.42	5.85	-40.92	43.20	44.55	74.00	29.45	Pass	H	PK
5	9710.4474	37.68	6.63	-40.66	45.29	48.94	74.00	25.06	Pass	H	PK
6	12267.617	39.46	7.72	-41.15	46.06	52.09	74.00	21.91	Pass	H	PK
7	2998.7999	33.20	4.55	-42.13	50.27	45.89	74.00	28.11	Pass	V	PK
8	4882.0000	34.50	4.81	-40.60	42.43	41.14	74.00	32.86	Pass	V	PK
9	5915.1943	35.66	5.14	-41.01	47.06	46.85	74.00	27.15	Pass	V	PK
10	7323.0000	36.42	5.85	-40.92	43.35	44.70	74.00	29.30	Pass	V	PK
11	9764.0000	37.71	6.71	-40.62	41.79	45.59	74.00	28.41	Pass	V	PK
12	12205.000	39.42	7.67	-41.16	44.73	50.66	74.00	23.34	Pass	V	PK

Mode:			$\pi/4$ DQPSK Transmitting				Channel:		2480		
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Result	Polarity	Remark
1	1917.8918	31.16	3.42	-42.65	52.81	44.74	74.00	29.26	Pass	H	PK
2	4960.0000	34.50	4.82	-40.53	43.96	42.75	74.00	31.25	Pass	H	PK
3	6771.2514	36.01	5.67	-41.19	46.45	46.94	74.00	27.06	Pass	H	PK
4	7440.0000	36.54	5.85	-40.82	43.62	45.19	74.00	28.81	Pass	H	PK
5	9920.0000	37.77	6.79	-40.48	43.16	47.24	74.00	26.76	Pass	H	PK
6	12400.000	39.54	7.86	-41.12	43.58	49.86	74.00	24.14	Pass	H	PK
7	2095.9096	31.83	3.58	-42.57	50.90	43.74	74.00	30.26	Pass	V	PK
8	3204.0136	33.28	4.63	-41.99	49.65	45.57	74.00	28.43	Pass	V	PK
9	4960.0000	34.50	4.82	-40.53	44.28	43.07	74.00	30.93	Pass	V	PK
10	7440.0000	36.54	5.85	-40.82	43.45	45.02	74.00	28.98	Pass	V	PK
11	9920.0000	37.77	6.79	-40.48	42.02	46.10	74.00	27.90	Pass	V	PK
12	12418.627	39.55	7.78	-41.11	46.22	52.44	74.00	21.56	Pass	V	PK

Mode:			8DPSK Transmitting				Channel:		2402		
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2052.5053	31.77	3.56	-42.58	58.08	50.83	74.00	23.17	Pass	H	PK
2	4804.0000	34.50	4.55	-40.66	44.36	42.75	74.00	31.25	Pass	H	PK
3	7206.0000	36.31	5.81	-41.02	43.66	44.76	74.00	29.24	Pass	H	PK
4	9608.0000	37.64	6.63	-40.76	43.94	47.45	74.00	26.55	Pass	H	PK
5	12027.601	39.32	7.59	-41.20	45.04	50.75	74.00	23.25	Pass	H	PK
6	12838.655	39.60	7.88	-41.53	46.90	52.85	74.00	21.15	Pass	H	PK
7	3046.0031	33.22	4.84	-42.10	51.05	47.01	74.00	26.99	Pass	V	PK
8	4804.0000	34.50	4.55	-40.66	44.66	43.05	74.00	30.95	Pass	V	PK
9	7206.0000	36.31	5.81	-41.02	43.59	44.69	74.00	29.31	Pass	V	PK
10	9608.0000	37.64	6.63	-40.76	43.75	47.26	74.00	26.74	Pass	V	PK
11	12010.000	39.31	7.60	-41.21	43.71	49.41	74.00	24.59	Pass	V	PK
12	12997.666	39.60	8.35	-41.74	46.07	52.28	74.00	21.72	Pass	V	PK

Mode:			8DPSK Transmitting				Channel:		2441		
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1920.4920	31.18	3.42	-42.65	52.32	44.27	74.00	29.73	Pass	H	PK
2	4882.0000	34.50	4.81	-40.60	42.09	40.80	74.00	33.20	Pass	H	PK
3	7362.2908	36.46	5.85	-40.88	46.14	47.57	74.00	26.43	Pass	H	PK
4	9764.0000	37.71	6.71	-40.62	42.16	45.96	74.00	28.04	Pass	H	PK
5	12205.000	39.42	7.67	-41.16	43.55	49.48	74.00	24.52	Pass	H	PK
6	13132.675	39.55	7.89	-41.58	47.03	52.89	74.00	21.11	Pass	H	PK
7	3001.0001	33.20	4.93	-42.12	49.55	45.56	74.00	28.44	Pass	V	PK
8	4882.0000	34.50	4.81	-40.60	44.24	42.95	74.00	31.05	Pass	V	PK
9	7323.0000	36.42	5.85	-40.92	44.34	45.69	74.00	28.31	Pass	V	PK
10	9586.4391	37.63	6.66	-40.78	46.41	49.92	74.00	24.08	Pass	V	PK
11	9764.0000	37.71	6.71	-40.62	43.01	46.81	74.00	27.19	Pass	V	PK
12	12205.000	39.42	7.67	-41.16	43.25	49.18	74.00	24.82	Pass	V	PK

Mode:			8DPSK Transmitting				Channel:		2480		
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	3009.0006	33.20	4.91	-42.11	50.52	46.52	74.00	27.48	Pass	H	PK
2	4960.0000	34.50	4.82	-40.53	44.62	43.41	74.00	30.59	Pass	H	PK
3	7440.0000	36.54	5.85	-40.82	44.60	46.17	74.00	27.83	Pass	H	PK
4	9920.0000	37.77	6.79	-40.48	42.09	46.17	74.00	27.83	Pass	H	PK
5	12446.629	39.57	7.66	-41.11	46.35	52.47	74.00	21.53	Pass	H	PK
6	13737.715	39.54	8.32	-41.21	46.17	52.82	74.00	21.18	Pass	H	PK
7	3041.0027	33.22	4.85	-42.10	50.00	45.97	74.00	28.03	Pass	V	PK
8	4960.0000	34.50	4.82	-40.53	43.69	42.48	74.00	31.52	Pass	V	PK
9	7440.0000	36.54	5.85	-40.82	43.31	44.88	74.00	29.12	Pass	V	PK
10	8037.3358	36.41	6.08	-40.96	46.83	48.36	74.00	25.64	Pass	V	PK
11	9920.0000	37.77	6.79	-40.48	43.64	47.72	74.00	26.28	Pass	V	PK
12	12332.622	39.50	7.68	-41.14	46.29	52.33	74.00	21.67	Pass	V	PK

Note:

1) Through Pre-scan transmitter mode with all kind of modulation and all kind of data type, find the 1-DH5 of data type is the worse case of GFSK modulation type, the 2-DH5 of data type is the worse case of $\pi/4$ DQPSK modulation type, the 3-DH5 of data type is the worse case of 8DPSK modulation type in transmitter mode.

2) As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. So, only the peak values are measured.

3) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading - Correct Factor

Correct Factor = Preamplifier Factor - Antenna Factor - Cable Factor

4) Scan from 9kHz to 25GHz, the disturbance above 13GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.