

1. MEASUREMENT RESULTS

1.1. SYSTEM VALIDATION

Prior to the assessment, the system validation kit was used to test whether the system was operating within its specifications of $\pm 10\%$. The validation results are tabulated below. And also the corresponding SAR plot is attached as well in the SAR plots files.

IEEE P1528 Recommended Reference Value

Frequency (MHz)	1 g SAR	10 g SAR	Local SAR at surface (Above feed point)	Local SAR at surface (y=2cm offset from feed point)
300	3.0	2.0	4.4	2.1
450	4.9	3.3	7.2	3.2
835	9.5	6.2	14.1	4.9
900	10.8	6.9	16.4	5.4
1450	29.0	16.0	50.2	6.5
1800	38.1	19.8	69.5	6.8
1900	39.7	20.5	72.1	6.6
2000	41.1	21.1	74.6	6.5
2450	52.4	24.0	104.2	7.7
3000	63.8	25.7	140.2	9.5

System Validation Results

Ambient conduction: Temperature: 24°C; Relative humidity: 41%

System Validation Dipole: D1800V2 SN: 294

Date: March 13, 2003

Medium			Parameters	Target	Measured	Deviation[%]	Limited[%]
Type	Temp. [°C]	Dipth [cm]					
Head	20.80	15.00	Permittivity:	40	39.5	-1.25	± 10
1800 MHz			Conductivity:	1.4	1.3639	-2.58	± 5
			1g SAR:	38.1	35.16	-7.72	± 10

1.2. TEST LIQUID CONFIRMATION

Simulated Tissue Liquid Parameter confirmation

The dielectric parameters were checked prior to assessment using the HP85070C dielectric probe kit. The dielectric parameters measured are reported in each correspondent section.

IEEE SCC-34/SC-2 P1528 recommended Tissue Dielectric Parameters

The head tissue dielectric parameters recommended by the IEEE SCC-34/SC-2 in P1528 have been incorporated in the following table. These head parameters are derived from planar layer models simulating the highest expected SAR for the dielectric properties and tissue thickness variations in a human head. Other head and body tissue parameters that have not been specified in P1528 are derived from the tissue dielectric parameters computed from the 4-Cole-Cole equations and extrapolated according to the head parameters specified in P1528

Target Frequency	Head		Body	
(MHz)	ϵ_r	σ (S/m)	ϵ_r	σ (S/m)
150	52.3	0.76	61.9	0.80
300	45.3	0.87	58.2	0.92
450	43.5	0.87	56.7	0.94
835	41.5	0.90	55.2	0.97
900	41.5	0.97	55.0	1.05
915	41.5	0.98	55.0	1.06
1450	40.5	1.20	54.0	1.30
1610	40.3	1.29	53.8	1.40
1800-2000	40.0	1.40	53.3	1.52
2450	39.2	1.80	52.7	1.95
3000	38.5	2.40	52.0	2.73
5800	45.3	5.27	48.2	6.00

(ϵ_r = relative permittivity, σ = conductivity and ρ = 1000 kg/m³)

Liquid Confirmation Results

Ambient conduction – Temperature: 23°C; Relative humidity: 41%

Date: March 13, 2003

Medium			Parameters	Target	Measured	Deviation[%]	Limited[%]
Type	Temp. [°C]	Dipth (cm)					
Head	20.50	15.00	Permittivity:	40	40.4	1.00	± 10
1900 Mhz			Conductivity:	1.4	1.3889	-0.79	± 5


Ambient conduction – Temperature: 23°C; Relative humidity: 41%

Date: March 13, 2003


Medium			Parameters	Target	Measured	Deviation[%]	Limited[%]
Type	Temp. [°C]	Dipth (cm)					
Muscle	20.50	15.00	Permittivity:	53.3	52.24	-1.99	± 10
1900 Mhz			Conductivity:	1.52	1.5422	1.46	± 5

1.3. EUT SETUP PHOTOS

EUT Setup Configuration 1
(Right Head -Touched position)

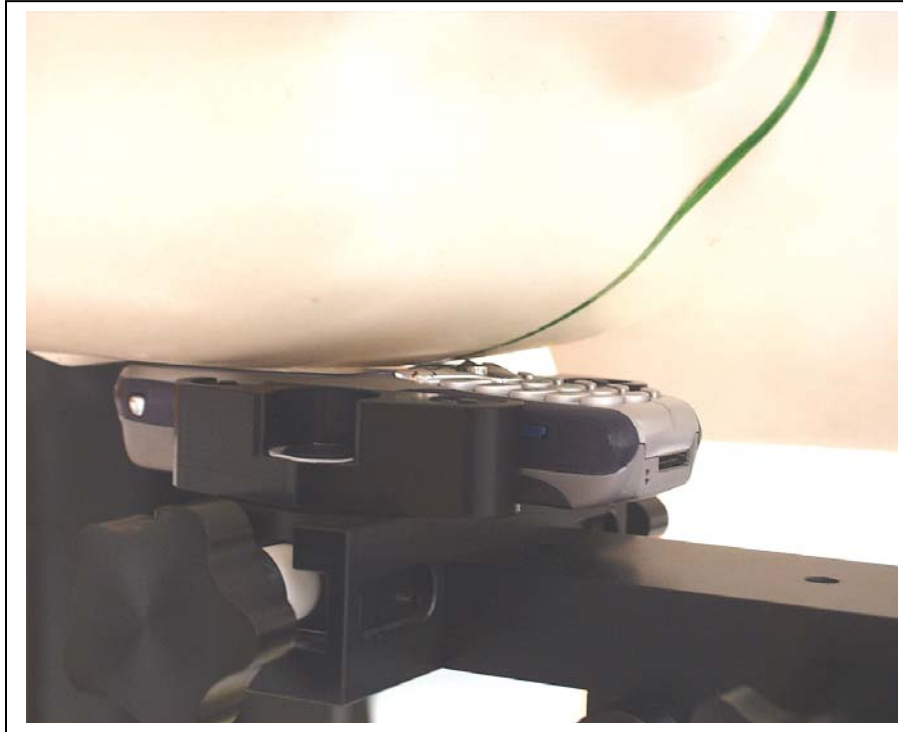

EUT Setup Configuration 2
(Flat/Body-worn position)

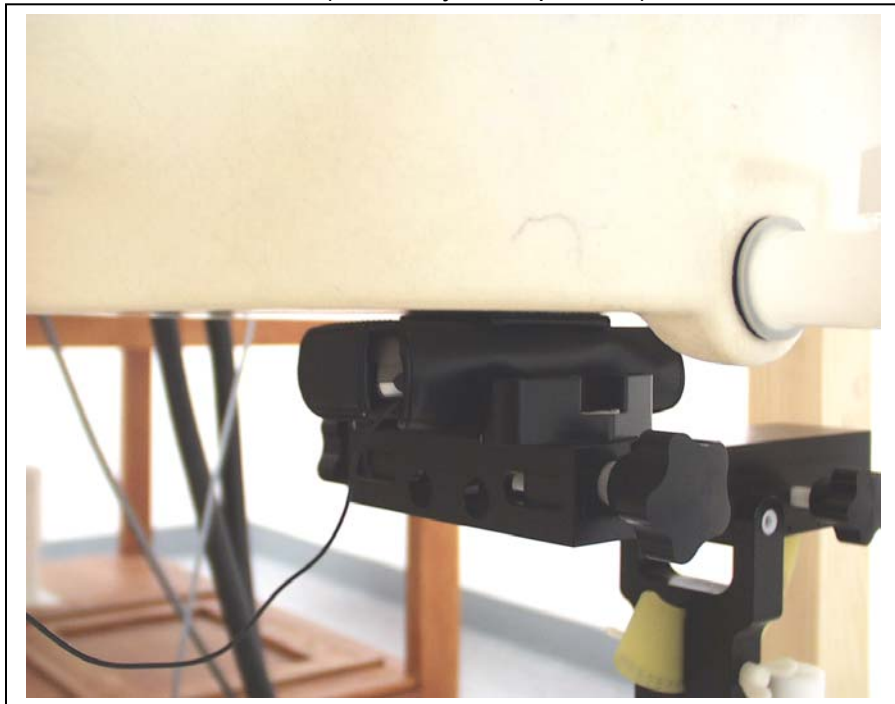

1.4. SAR MEASUREMENT RESULTS

Model Name: <u>PC20B</u>								
Modulation Type: <u>GSM</u> (Duty Cycle = <u>12.5</u> %, Crest Factor: <u>8</u>)								
EUT Setup Configuration 1 <u>Right</u> Head				Depth of liquid: <u>15.0</u> cm			Date: <u>March 13, 2003</u>	
EUT Set-up conditions		Frequency		Conducted Power [dBm] (Peak)		Liquid Temp [°C]	SAR (W/kg)	Limit (W/kg)
Sep. [cm]	Antenna	Channel	MHz	Before	After			
With memory card								1.6
Touched	Fixed	810	1909.8	29.8	29.7	20.5	0.388	
Without memory card								
Touched	Fixed	810	1909.8	29.8	29.7	20.5	0.377	
EUT Setup Configuration 2: <u>Body/Flat</u>				Depth of liquid: <u>15.0</u> cm				
EUT Set-up conditions		Frequency		Conducted Power [dBm] (Peak)		Liquid Temp [°C]	SAR (W/kg) *Cube 0 / Cube 1	Limit (W/kg)
Sep. [cm]	Antenna	Channel	MHz	Before	After			
Without memory card								1.6
With holster	Fixed	810	1909.8	29.8	29.7	20.2	0.421 / 0.352	
With memory card								
With holster	Fixed	810	1909.8	29.8	29.7	20.3	0.432 / 0.289	
Note (s):								
1. * Cube 0 = primary hot spot; Cube 1 = secondary hot spot								
2. Please refer to attachment for the result presentation in plot format.								

2. EUT PHOTOS



3. EQUIPMENTS LIST & CALIBRATION INFORMATION

Name of Equipment	Manufacturer	Type/Model	Serial Number	Calibration	
				last cal.	due date
S-Parameter Network Analyzer	Agilent	8753ES	MY40001647	8/6/02	8/6/03
Electronic Probe kit	Hewlett Packard	85070C	N/A	N/A	N/A
3.5 mm Calibration Kit	Agilent	85033D	3423A07200	8/6/02	8/6/03
Power Meter	Agilent	E5516A	GB41291160	8/9/02	8/9/03
Power Sensor	Agilent	E9327A	US40440755	9/5/02	9/5/03
Universal Radio Communication Tester	Rohde & Schwarz	CMU 200	838114/032	2/14/03	2/14/04
Amplifier	Mini-Circuit	ZHL-42W	D072701-5	N/A	N/A
DC Power generator	Kenwood	PA36-3A	7060074	N/A	N/A
Data Acquisition Electronics (DAE)	SPEAG	DAE3 V1	427	2/4/03	2/4/04
Dosimetric E-Field Probe	SPEAG	ET3DV6	1577	2/7/02	2/7/04
450 MHz System Validation Dipole	SPEAG	D450V2	1003	4/5/02	4/19/04
900 MHz System Validation Dipole	SPEAG	D900V2	108	4/17/01	4/17/03
1800 MHz System Validation Dipole	SPEAG	D1800V2	294	4/19/01	4/19/03
2450 MHz System Validation Dipole	SPEAG	D2450V2	706	6/4/02	6/4/04
Probe Alignment Unit	SPEAG	LB (V2)	261	N/A	N/A
Robot	Staubli	RX90B L	F00/5H31A1/A/01	N/A	N/A
Generic Twin Phantom	SPEAG	N/A	N/A	N/A	N/A
SAM Phantom	SPEAG	N/A	N/A	N/A	N/A
Devices Holder	SPEAG	N/A	N/A	N/A	N/A
Head 450 MHz	CCS	H450A	N/A	Daily	N/A
Muscle 450 MHz	CCS	M450A	N/A	Daily	N/A
Head 835 MHz	CCS	H835A	N/A	Daily	N/A
Muscle 835 MHz	CCS	M835A	N/A	Daily	N/A
Head 900 MHz	CCS	H900A	N/A	Daily	N/A
Muscle 900 MHz	CCS	M900A	N/A	Daily	N/A
Head 1800 MHz	CCS	H1800A	N/A	Daily	N/A
Muscle 1800 MHz	CCS	M1800A	N/A	Daily	N/A
Head 1900 MHz	CCS	H1900A	N/A	Daily	N/A
Muscle 1900 MHz	CCS	M1900A	N/A	Daily	N/A
Head 2450 MHz	CCS	H2450A	N/A	Daily	N/A
Muscle 2450 MHz	CCS	M2450A	N/A	Daily	N/A

4. ATTACHMENTS

Exhibit	Contents	No. of page (s)
1	System Validation Plots	1
2	SAR Test Plots	7
3	Dosimetric E-Field Probe - ET3DV6, S/N: 1577	14

End of Report