



Microtest
微 测 检 测

Test Report

Report No.: MTi220825017-08E1

Date of issue: 2023-02-21

Applicant: Shenzhen Gudsen Technology Co., Ltd

Product name: FSR Formula Wheel

Model(s): FSR, GS, HS, XS, W04, W05, W06, W07,
W08, W09, W10

FCC ID: 2AMJR-FSRD00

Shenzhen Microtest Co., Ltd.

<http://www.mtitest.com>



Instructions

1. The report shall not be partially reproduced without the written consent of the laboratory;
2. The test results of this report are only responsible for the samples submitted;
3. This report is invalid without the seal and signature of the laboratory;
4. This report is invalid if transferred, altered or tampered with in any form without authorization;
5. Any objection to this report shall be submitted to the laboratory within 15 days from the date of receipt of the report.



Table of Contents

1 GENERAL DESCRIPTION	5
1.1 FEATURE OF EQUIPMENT UNDER TEST (EUT).....	5
1.2 OPERATION CHANNEL LIST	5
1.3 TEST FREQUENCY CHANNEL.....	6
1.4 EUT OPERATION MODE	6
1.5 ANCILLARY EQUIPMENT LIST.....	6
2 SUMMARY OF TEST RESULT	6
3 TEST FACILITIES AND ACCREDITATIONS	7
3.1 TEST LABORATORY.....	7
3.2 ENVIRONMENTAL CONDITIONS	7
3.3 MEASUREMENT UNCERTAINTY.....	7
3.4 TEST SOFTWARE	7
4 LIST OF TEST EQUIPMENT	8
5 TEST RESULT	9
5.1 ANTENNA REQUIREMENT	9
5.1.1 Standard requirement.....	9
5.1.2 EUT Antenna	9
5.2 AC POWER LINE CONDUCTED EMISSION	10
5.2.1 Limits.....	10
5.2.2 Test setup	10
5.2.3 Test procedure.....	11
5.2.4 Test results	11
5.3 RADIATED SPURIOUS EMISSION.....	12
5.3.1 Limit	12
5.3.2 Test method.....	12
5.3.3 Test Result	13
5.3.4 Band edge–Field strength of fundamental	18
5.3.5 Band edge-radiated	19
5.4 20dB AND 99% BANDWIDTH	20
5.4.1 Limits.....	20
5.4.2 Test method.....	20
5.4.3 Test result	21
PHOTOGRAPHS OF THE TEST SETUP.....	23
PHOTOGRAPHS OF THE EUT	24



TEST RESULT CERTIFICATION	
Applicant's name	Shenzhen Gudsen Technology Co., Ltd
Address	Room 1903-1904, Building 3, Nanshan Zhiyuan Chongwen Park, No. 3370 Liuxian Avenue, Nanshan District, Shenzhen, China
Manufacturer's Name	Shenzhen Gudsen Technology Co., Ltd
Address	Room 1903-1904, Building 3, Nanshan Zhiyuan Chongwen Park, No. 3370 Liuxian Avenue, Nanshan District, Shenzhen, China
Product description	
Product name	FSR Formula Wheel
Trademark	MOZA
Model Name	FSR
Series Model	GS, HS, XS, W04, W05, W06, W07, W08, W09, W10
Standards.....	FCC Part 15.249
Test procedure.....	ANSI C63.10-2013
Date of Test	
Date (s) of performance of tests.....:	2022-09-22 ~ 2023-02-21
Test Result.....:	Pass

Testing Engineer : Letter Lan.
(Letter Lan)

Technical Manager : Leon Chen
(Leon Chen)

Authorized Signatory : Tom Xue
(Tom Xue)



1 General description

1.1 Feature of equipment under test (EUT)

Equipment:	FSR Formula Wheel
Model Name:	FSR
Serial Model:	GS, HS, XS, W04, W05, W06, W07, W08, W09, W10
Model Difference:	All the models are the same circuit and module, except the model name and color.
Operation Frequency:	2406 - 2470 MHz
Modulation Type:	GFSK
Antenna Type:	PCB antenna
Antenna Gain:	2.16dBi
Max. Field Strength:	76.77dBuV/m@3m
Power Source:	Input: DC 12V
Accessories:	N/A
Hardware version:	RS21-D03-HW FW-CU-V04
Software version:	V1.2.0.44
Test sample(s) number:	MTi220825017-08S1001

1.2 Operation channel list

Channel	Frequency(MHz)	Channel	Frequency(MHz)	Channel	Frequency(MHz)	Channel	Frequency(MHz)
1	2406	17	2422	33	2438	51	2456
2	2407	18	2423	34	2439	52	2457
3	2408	19	2424	35	2440	53	2458
4	2409	20	2425	36	2441	54	2459
5	2410	21	2426	37	2442	55	2460
6	2411	22	2427	38	2443	56	2461
7	2412	23	2428	39	2444	57	2462
8	2413	24	2429	40	2445	58	2463
9	2414	25	2430	41	2446	59	2464
10	2415	26	2431	42	2447	60	2465
11	2416	27	2432	43	2448	61	2466
12	2417	28	2433	44	2449	62	2467
13	2418	29	2434	45	2450	63	2468
14	2419	30	2435	46	2451	64	2469
15	2420	31	2436	47	2452	65	2470
16	2421	32	2437	48	2453		



1.3 Test Frequency Channel

Channel	Frequency(MHz)
Low	2406
Middle	2438
High	2470

1.4 EUT operation mode

During testing, RF test program provided by the manufacturer to control the Tx operation followed the test requirement.

1.5 Ancillary equipment list

Equipment	Model	S/N	Manufacturer
Laptop	/	/	Lenovo
Accumulator 1	55D23LX	/	CAMEL
Accumulator 2	55D23LX	/	CAMEL
Accumulator 3	55D23LX	/	CAMEL
Base	R9	/	Gudsen

2 Summary of Test Result

Test procedures according to the technical standards:

Item	FCC Part No.	Description of Test	Result
1	FCC Part15.203	Antenna Requirement	Pass
2	FCC Part15.207	AC power line conducted emission	N/A
5	FCC Part15.249(d)	Radiated spurious emission	Pass
4	FCC Part 15.215	20dB and 99% Bandwidth	Pass



3 Test Facilities and Accreditations

3.1 Test laboratory

Test Laboratory	Shenzhen Microtest Co., Ltd
Location	101, No. 7, Zone 2, Xinxing Industrial Park, Fuhai Avenue, Xinhe Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China.
FCC Registration No.	448573

3.2 Environmental conditions

Temperature:	15°C~35°C
Humidity	20%~75%
Atmospheric pressure	98kPa~101kPa

3.3 Measurement uncertainty

The reported uncertainty of measurement $y \pm U$, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %

RF frequency	1 x 10-7
RF power, conducted	± 1 dB
Conducted emission(150kHz~30MHz)	± 2.5 dB
Radiated emission (9 kHz ~ 30 MHz)	±4.0 dB
Radiated emission(30MHz~1GHz)	± 4.2 dB
Radiated emission (above 1GHz)	± 4.3 dB
Temperature	±1 degree
Humidity	± 5 %

3.4 Test software

Software Name	Manufacturer	Model	Version
Bluetooth and WiFi Test System	Shenzhen JS tonsend co.,ltd	JS1120-3	2.5.77.0418



4 List of test equipment

Equipment No.	Equipment Name	Manufacturer	Model	Serial No.	Calibration date	Due date
MTI-E043	EMI Test Receiver	Rohde&schwarz	ESCI7	101166	2022/05/05	2023/05/04
MTI-E044	TRILOG Broadband Antenna	schwarzb eck	VULB 9163	9163-133 8	2021/05/30	2023/05/29
MTI-E047	Amplifier	Hewlett-P ackard	8447F	3113A061 50	2022/05/05	2023/05/04
MTI-E089	ESG Vector Signal Generator	Agilent	N5182A	MY49060 455	2022/05/05	2023/05/04
MTI-E058	ESG Series Analog Ssignal Generator	Agilent	E4421B	GB40051 240	2022/05/05	2023/05/04
MTI-E062	PXA Signal Analyzer	Agilent	N9030A	MY51350 296	2022/05/05	2023/05/04
MTI-E066	MXA Signal Analyzer	Agilent	N9020A	MY50143 483	2022/05/05	2023/05/04
MTI-E078	Synthesized Sweeper	Agilent	83752A	3610A019 57	2022/05/05	2023/05/04
MTI-E079	DC Power Supply	Agilent	E3632A	MY40027 695	2022/05/05	2023/05/04
MTI-E045	Double Ridged Broadband Horn Antenna	schwarzb eck	BBHA 9120 D	9120D-22 78	2021/05/30	2023/05/29
MTI-E021	EMI Test Receiver	Rohde&schwarz	ESCS30	100210	2022/05/05	2023/05/04
MTI-E022	Pulse Limiter	Schwarzb eck	VSTD 9561-F	00679	2022/05/05	2023/05/04
MTI-E023	Artificial mains network	Schwarzb eck	NSLK 8127	NSLK 8127 #841	2022/05/05	2023/05/04
MTI-E046	Active Loop Antenna	Schwarzb eck	FMZB 1519 B	00044	2021/05/30	2023/05/29
MTI-E048	Amplifier	Agilent	8449B	3008A024 00	2022/05/05	2023/05/04
MTI-E072	Thermometer Clock Humidity Monitor	-	HTC-1	/	2022/05/05	2023/05/04
Note: the calibration interval of the above test instruments is 12 or 24 months and the calibrations are traceable to international system unit (SI).						



5 Test Result

5.1 Antenna requirement

5.1.1 Standard requirement

FCC PART 15.203;

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

This requirement does not apply to carrier current devices or to devices operated under the provisions of §§15.211, 15.213, 15.217, 15.219, 15.221, or §15.236. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

5.1.2 EUT Antenna

The antenna is a PCB antenna, which was permanently affixed to the device and un-replaced, complies with 15.203. In addition, the maximum antenna gain is 2.16dBi.



5.2 AC power line conducted emission

5.2.1 Limits


FCC §15.207;

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 Ω line impedance stabilization network (LISN).

Frequency (MHz)	Quasi-peak	Average
0.15 -0.5	66 - 56 ^{note2}	56 - 46 ^{note2}
0.50 -5.0	56.00	46.00
5.0 -30.0	60.00	50.00

Note1: The tighter limit applies at the band edges.
Note2: The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

5.2.2 Test setup

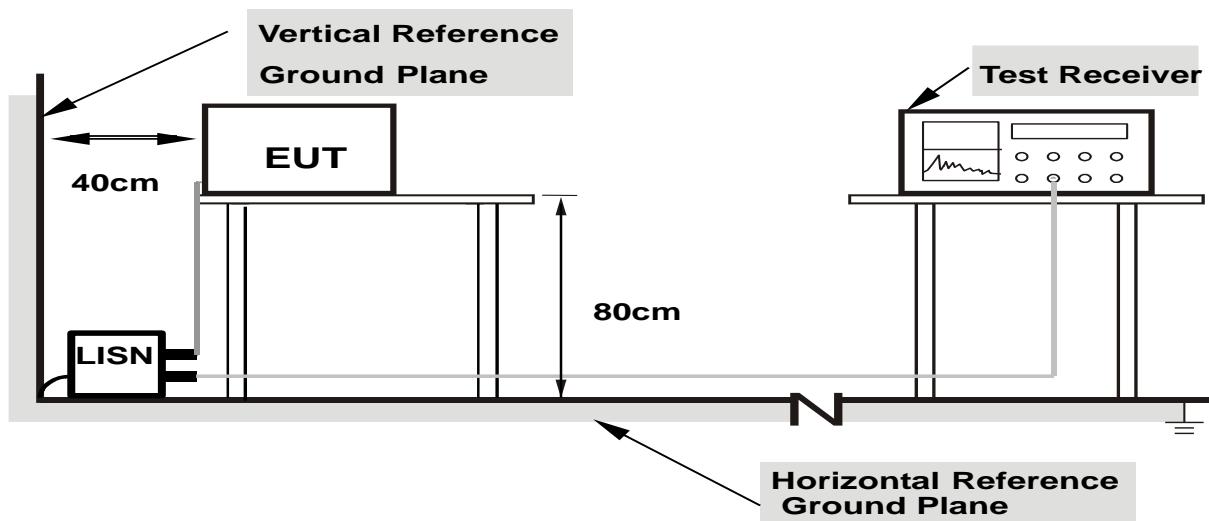

- Note:**
1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes



5.2.3 Test procedure

a. EUT Operating Conditions

The EUT was configured for testing in a typical fashion (as a customer would normally use it).

The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

b. The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

- c. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipment's powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- d. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- e. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- f. LISN at least 80 cm from nearest part of EUT chassis.

For the actual test configuration, please refer to the related Item –EUT Test Photos.

5.2.4 Test results

Note: Not applicable. The product does not TX when it is charged, so this item not applicable.



5.3 Radiated spurious emission

5.3.1 Limit

FCC PART 15.249(a);

Except as provided in paragraph (a) of this section, the field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:

Frequency (MHz)	Field Strength of Fundamental (mV/m)	Field Strength of Harmonics (μ V/m)
902-928	50	500
2400-2483.5	50	500
5725-5875	50	500

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in §15.209, whichever is the lesser attenuation.

According to FCC section 15.209 (a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (μ V/m)	Measurement Distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

5.3.2 Test method

- a) The EUT is placed on a turntable, which is 0.8m above ground plane for test frequency range below 1GHz, and 1.5m above ground plane for test frequency range above 1GHz.
- b) EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
- c) Use the following spectrum analyser settings:
 - 1) Span = wide enough to fully capture the emission being measured
 - 2) RBW = 1 MHz for $f \geq 1\text{GHz}$, 100 kHz for $f < 1\text{ GHz}$
 - 3) VBW \geq RBW, Sweep = auto
 - 4) Detector function = peak
 - 5) Trace = max hold
- d) Follow the guidelines in ANSI C63.4-2014 with respect to maximizing the emission by rotating the EUT, adjusting the measurement antenna height and polarization, etc. The peak reading of the emission, after being corrected by the antenna factor, cable loss, pre-amp gain, etc., is the peak field strength, submit this data. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.



- e) The peak level, once corrected, must comply with the limit specified in Section 15.209. Set the RBW = 1MHz, VBW = 10Hz, Detector = PK for AV value, while maintaining all of the other instrument settings.

5.3.3 Test Result

Below 30MHz

EUT:	FSR Formula Wheel	Model name. :	FSR
Pressure:	1010 hPa	Test voltage:	Powered by R9 base
Test mode:	TX	Polarization :	--

Freq. (MHz)	Reading (dB _{UV} /m)	Limit (dB _{UV} /m)	Margin (dB)	State P/F
--	--	--	--	Pass
--	--	--	--	Pass


Note:

1. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.
2. Distance extrapolation factor = $40 \log(\text{specific distance}/\text{test distance})$ (dB);
3. Limit line = specific limits (dB_{UV}) + distance extrapolation factor.



30MHz-1GHz


EUT:	FSR Formula Wheel	Model Name:	FSR
Pressure:	101kPa	Polarization:	Horizontal
Test voltage:	Powered by R9 base	Test Mode:	TX-2406MHz

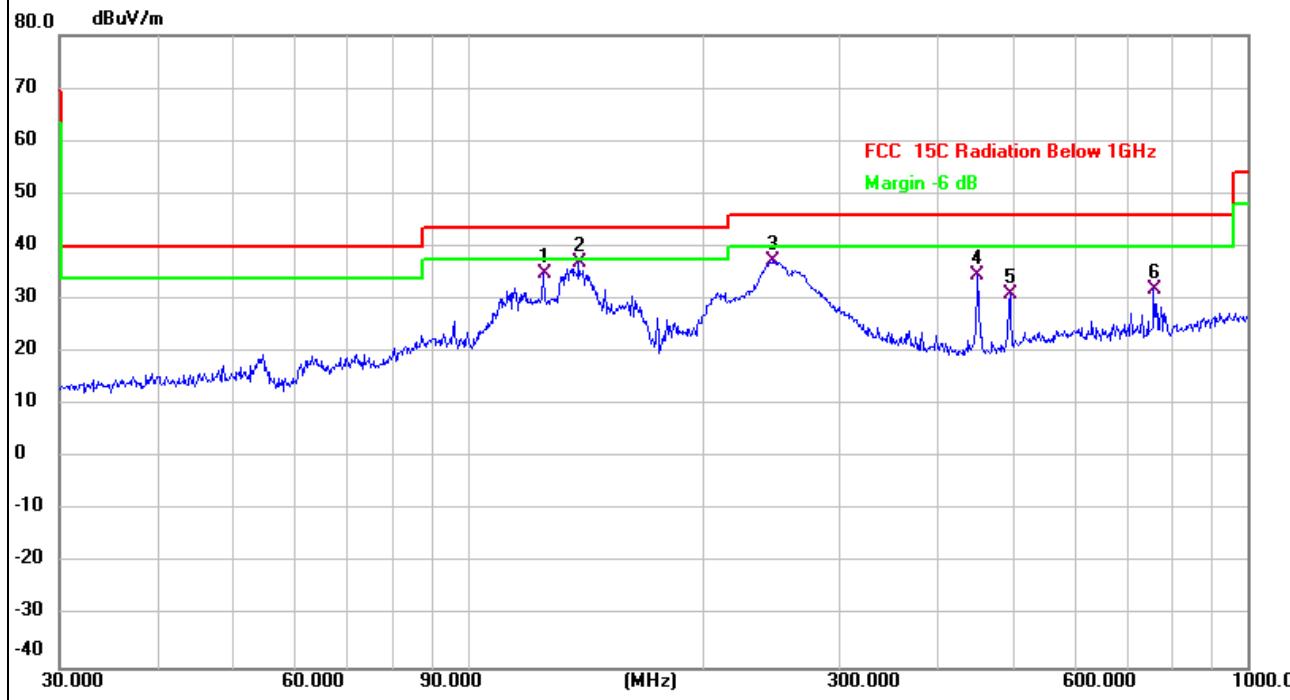

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over
			Level	Factor	ment		
		MHz	dBuV	dB	dBuV/m	dB	Detector
1		125.0066	47.49	-12.53	34.96	43.50	-8.54 QP
2	*	138.8735	49.85	-12.90	36.95	43.50	-6.55 QP
3		245.9509	45.51	-8.28	37.23	46.00	-8.77 QP
4		451.1350	40.64	-6.19	34.45	46.00	-11.55 QP
5		495.9344	36.14	-5.06	31.08	46.00	-14.92 QP
6		758.0408	33.85	-2.12	31.73	46.00	-14.27 QP



EUT:	FSR Formula Wheel	Model Name:	FSR
Pressure:	101kPa	Polarization:	Vertical
Test voltage:	Powered by R9 base	Test Mode:	TX-2406MHz

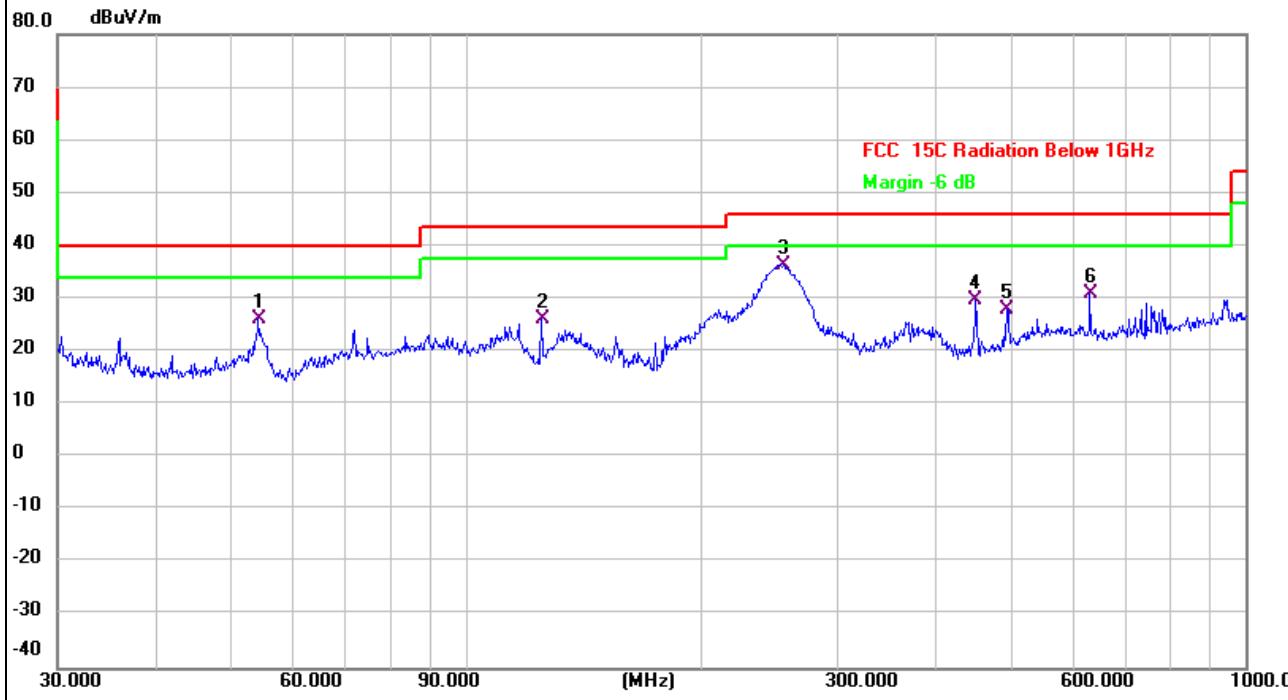

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		54.2610	36.31	-10.19	26.12	40.00	-13.88	QP
2		125.0066	38.55	-12.53	26.02	43.50	-17.48	QP
3	*	255.6231	44.50	-8.06	36.44	46.00	-9.56	QP
4		451.1350	35.97	-6.19	29.78	46.00	-16.22	QP
5		494.1984	33.08	-5.15	27.93	46.00	-18.07	QP
6		631.6884	33.88	-2.98	30.90	46.00	-15.10	QP

Note:

1. Emission Level = Meter Reading + Factor, Margin= Emission Level- Limit, Factor = Antenna Factor + Cable Loss – Pre-amplifier.
2. The three modulated high, medium and low channels have been tested. The report only shows the worst mode. The worst mode is CH1.



1GHz-26.5GHz:

Frequency (MHz)	Reading Level (dB μ V)	Correct Factor (dB/m)	Measureme nt (dB μ V/m)	Limits (dB μ V/m)	Over (dB)	Detector Peak/AVG	Polarization H/V
GFSK - 2406 MHz TX mode							
4808.000	56.34	0.76	57.10	74.00	-16.90	Peak	V
4808.000	47.09	0.76	47.85	54.00	-6.15	Avg	V
7218.000	40.84	6.02	46.86	74.00	-27.14	Peak	V
7218.000	34.21	6.02	40.23	54.00	-13.77	Avg	V
9624.000	40.90	6.01	46.91	74.00	-27.09	Peak	V
9624.000	34.30	6.01	40.31	54.00	-13.69	Avg	V
4812.000	54.72	0.78	55.50	74.00	-18.50	Peak	H
4812.000	45.45	0.78	46.23	54.00	-7.77	Avg	H
7218.000	40.72	6.02	46.74	74.00	-27.26	Peak	H
7218.000	34.57	6.02	40.59	54.00	-13.41	Avg	H
9624.000	41.90	6.01	47.91	74.00	-26.09	Peak	H
9624.000	35.14	6.01	41.15	54.00	-12.85	Avg	H
GFSK - 2438 MHz TX mode							
4876.000	51.64	1.02	52.66	74.00	-21.34	Peak	V
4876.000	46.57	1.02	47.59	54.00	-6.41	Avg	V
7314.000	41.53	5.94	47.47	74.00	-26.53	Peak	V
7314.000	36.32	5.94	42.26	54.00	-11.74	Avg	V
9752.000	42.21	6.56	48.77	74.00	-25.23	Peak	V
9752.000	37.12	6.56	43.68	54.00	-10.32	Avg	V
4876.000	53.30	1.02	54.32	74.00	-19.68	Peak	H
4876.000	49.24	1.02	50.26	54.00	-3.74	Avg	H
7314.000	41.10	5.94	47.04	74.00	-26.96	Peak	H
7314.000	36.25	5.94	42.19	54.00	-11.81	Avg	H
9752.000	43.15	6.56	49.71	74.00	-24.29	Peak	H
9752.000	38.67	6.56	45.23	54.00	-8.77	Avg	H



Frequency (MHz)	Reading Level (dB μ V)	Correct Factor (dB/m)	Measureme nt (dB μ V/m)	Limits (dB μ V/m)	Over (dB)	Detector Peak/AVG	Polarization H/V
GFSK - 2470 MHz TX mode							
4940.000	49.48	1.37	50.85	74.00	-23.15	Peak	V
4940.000	45.01	1.37	46.38	54.00	-7.62	Avg	V
7410.000	45.51	5.79	51.30	74.00	-22.70	Peak	V
7410.000	41.40	5.79	47.19	54.00	-6.81	Avg	V
9880.000	41.23	6.16	47.39	74.00	-26.61	Peak	V
9880.000	35.16	6.16	41.32	54.00	-12.68	Avg	V
4940.000	46.09	1.37	47.46	74.00	-26.54	Peak	H
4940.000	41.75	1.37	43.12	54.00	-10.88	Avg	H
7410.000	44.41	5.79	50.20	74.00	-23.80	Peak	H
7410.000	40.44	5.79	46.23	54.00	-7.77	Avg	H
9880.000	42.25	6.16	48.41	74.00	-25.59	Peak	H
9880.000	37.86	6.16	44.02	54.00	-9.98	Avg	H

Note:

1. All Readings are Peak Value (VBW=3MHz) and AV Value (VBW=10Hz).
2. Emission Level= Antenna Factor + Cable Loss + Read Level - Preamp Factor
3. All the modulation modes have been tested, and the worst results are reflected in the report.



5.3.4 Band edge—Field strength of fundamental

Frequency (MHz)	Ant. Polarization	Emission level dB μ V/m	Limits dB μ V/m	Detector	Result
2406	H	75.45	114	PK	PASS
2406	H	75.40	94	AV	PASS
2406	V	67.59	114	PK	PASS
2406	V	67.51	94	AV	PASS

Frequency (MHz)	Ant. Polarization	Emission level dB μ V/m	Limits dB μ V/m	Detector	Result
2438	H	76.77	114	PK	PASS
2438	H	76.37	94	AV	PASS
2438	V	72.27	114	PK	PASS
2438	V	69.79	94	AV	PASS

Frequency (MHz)	Ant. Polarization	Emission level dB μ V/m	Limits dB μ V/m	Detector	Result
2470	H	76.14	114	PK	PASS
2470	H	76.06	94	AV	PASS
2470	V	73.13	114	PK	PASS
2470	V	73.09	94	AV	PASS



5.3.5 Band edge-radiated

Frequency (MHz)	Reading Level (dB μ V)	Correct Factor (dB/m)	Measurement (dB μ V/m)	Limits (dB μ V/m)	Over (dB)	Detector Peak/AVG	Polarization H/V
GFSK – Low band-edge							
(MHz)	(dB μ V)	(dB/m)	(dB μ V/m)	(dB μ V/m)	(dB)	Peak/AVG	H/V
2310.000	49.46	-8.08	41.38	74.00	-32.62	Peak	V
2310.000	37.35	-8.08	29.27	54.00	-24.73	Avg	V
2390.000	47.69	-7.71	39.98	74.00	-34.02	Peak	V
2390.000	37.76	-7.71	30.05	54.00	-23.95	Avg	V
2400.000	57.73	-6.18	51.55	74	-22.45	Peak	V
2400.000	45.02	-6.18	38.84	54	-15.16	Avg	V
2310.000	47.65	-8.08	39.57	74.00	-34.43	Peak	H
2310.000	37.33	-8.08	29.25	54.00	-24.75	Avg	H
2390.000	47.60	-7.71	39.89	74.00	-34.11	Peak	H
2390.000	37.46	-7.71	29.75	54.00	-24.25	Avg	H
2400.000	57.36	-6.18	51.18	74	-22.82	Peak	H
2400.000	45.19	-6.18	39.01	54	-14.99	Avg	H
GFSK – High band-edge							
2483.5	48.10	-7.24	40.86	74.00	-33.14	Peak	V
2483.5	37.52	-7.24	30.28	54.00	-23.72	Avg	V
2500	48.16	-7.17	40.99	74.00	-33.01	Peak	V
2500	37.94	-7.17	30.77	54.00	-23.23	Avg	V
2483.5	48.53	-7.24	41.29	74.00	-32.71	Peak	H
2483.5	37.51	-7.24	30.27	54.00	-23.73	Avg	H
2500	47.14	-7.17	39.97	74.00	-34.03	Peak	H
2500	37.81	-7.17	30.64	54.00	-23.36	Avg	H



5.4 20dB and 99% bandwidth

5.4.1 Limits

FCC §15.215(c)

Intentional radiators operating under the alternative provisions to the general emission limits, as contained in § 15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.

5.4.2 Test method

Use the following spectrum analyzer settings:

For 20 dB bandwidth

Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel

RBW \geq 1% of the 20 dB bandwidth

VBW \geq RBW

Sweep = auto

Detector function = peak

Trace = max hold


The EUT should be transmitting at its maximum data rate. Allow the trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. Use the marker-delta function to measure 20 dB down one side of the emission. Reset the marker-delta function, and move the marker to the other side of the emission, until it is (as close as possible to) even with the reference marker level. The marker-delta reading at this point is the 20 dB bandwidth and 99% occupied bandwidth of the emission



5.4.3 Test result

Frequency (MHz)	20dB bandwidth (MHz)
2406	2.100
2438	2.512
2470	1.028

Test plots

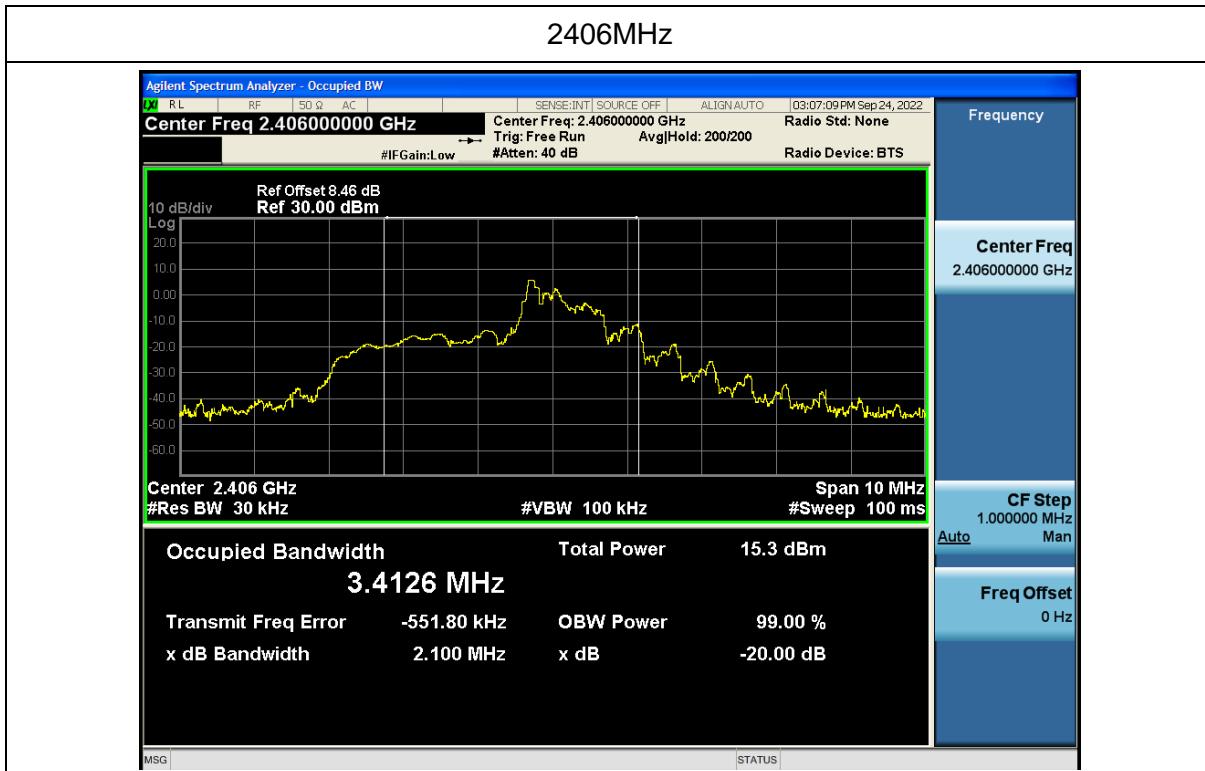




2438MHz



2470MHz

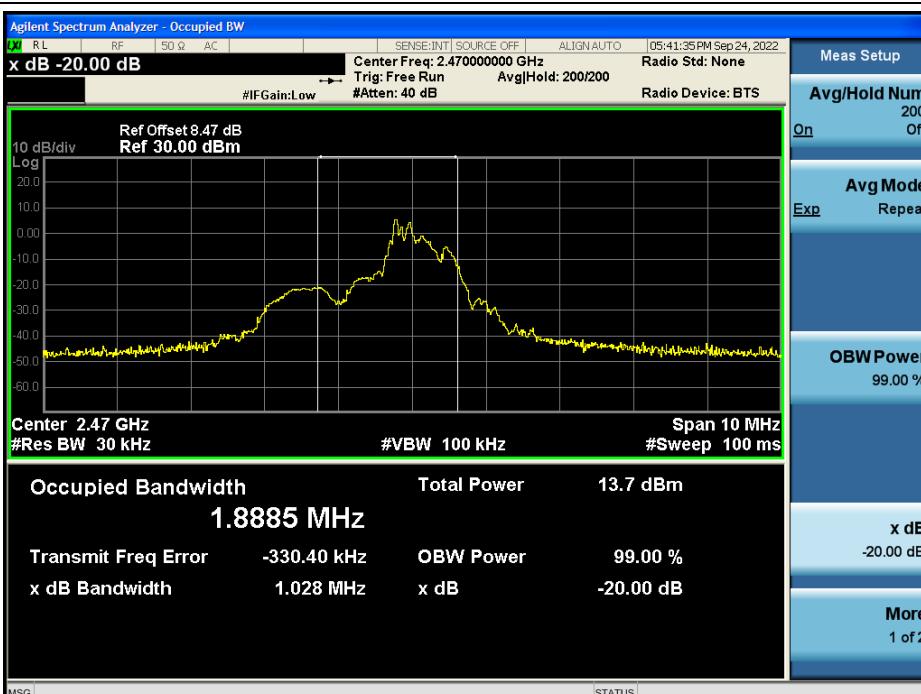



Photographs of the Test Setup

See the APPENDIX – Test setup photos.



Photographs of the EUT

See the Appendix - EUT Photos.

----END OF REPORT----