

Unit B2 Linhay Business Park Eastern Road Ashburton Devon TQ13 7UP United Kingdom

19<sup>th</sup> October 2015

Telecommunication Certification Body UL VS Ltd Offices 18-26 Grove House Lutyens Close Chineham Court Basingstoke Hampshire RG24 8AG United Kingdom

Subject: Attestation of Compliance to FCC Rules

Application for FCC ID: QWP-45700

Applicant: Cambium Networks Ltd

Dear Examiner,

## Attestations:

Cambium Networks Ltd confirms that: -

The PTP 700 products comply with the requirements of Section 15.407(a)(1)(i) including "The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm)" and KDB 789033 D02 General UNII Test Procedures New Rules v01 Clause H 1. a).

KDB 662911 D01 Multiple Transmitter Output v02r01 and KDB 662911 D02 MIMO with Cross-Polarized Antennas v01 have been applied in the product test program.

The antenna types supported in this band are listed in phn-4160 000V008 PTP 700 Theory of Operation.



## **Evidence of Compliance:**

Calculations and polar plots upon which the calculations have been made are attached in: -

Annex A – EIRP above 30° Elevation

Annex B - KPPA-OMNI-DP-5 Polar Elevation at 5.2GHz

Annex C - Laird 17dBi Sectorized Antenna - Horizontal Envelope

Annex D - Laird 17dBi Sectorized Antenna - Vertical Envelope

If you have any questions regarding this application, please feel free to contact me.

Sincerely yours,


Donald W Reid

CEng MIET, MInstLM

Principal Regulatory Engineer

Sorald W Reid

Cambium Networks Ltd




## Annex A – EIRP above 30° Elevation

Antenna Plot	Nominal angle of antenna lobe with highest gain at elevations above 30° Elevation (Degrees)	Antenna Gain (dBi)	Max Transmit Power (dB)*	EIRP of Highest Antenna Lobe above 30° Elevation (dBm)	EIRP Limit (dBm)	EIRP Pass Margin (dBm)
KPPA-OMNI-DP-5_5 2_Elevation_polar	95	-2	22	20	21	1.0
Laird 17dBi Sectorized Antenna - Horizontal Envelope	32	-5.7	14.5	8.8	21	12.2
Laird 17dBi Sectorized Antenna - Vertical Envelope	39	-4.72	14.5	9.78	21	11.22


<sup>\*</sup> The Maximum transmit power applied is taken from UL VS Ltd test report UL-RPT-RP10700048JD03C which is filed with this submission

Annex B - KPPA-OMNI-DP-5 Polar Elevation at 5.2GHz, emission used for calculation in red

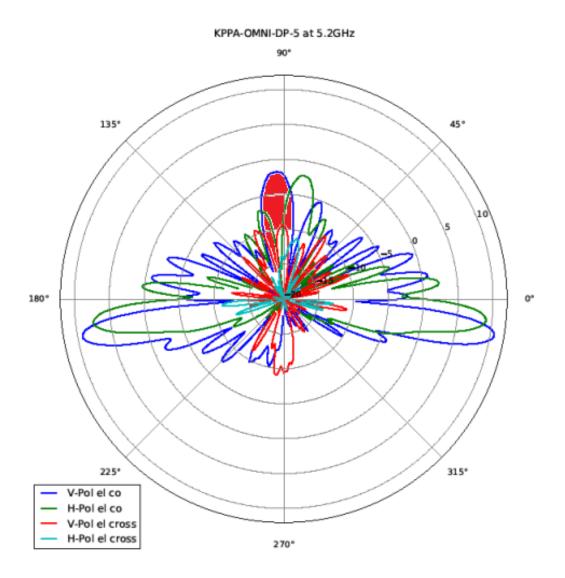



Annex C - Laird 17dBi Sectorized Antenna - Horizontal Envelope, emission used for calculation in red

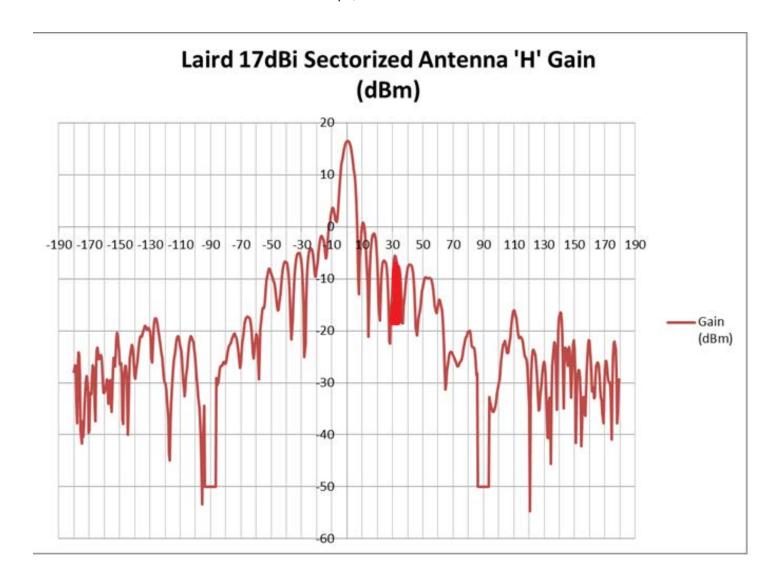



Annex D - Laird 17dBi Sectorized Antenna - Vertical Envelope, emission used for calculation in red

