

FCC Test Report

FCC ID : 2AF82-TD0350
Equipment : Panel PC
Brand Name : Qbic
Model Name : TD-035XXX, (where X can be 0-9, A-Z or blank)
Applicant / Manufacturer : Qbic technology Co., Ltd
26F. -12, No.99, Sec.1, Xintai 5th Rd., Xizhi Dist.,
New Taipei City 221, Taiwan(R.O.C)
Standard : 47 CFR FCC Part 15.225

The product was received on Jul. 09, 2018, and testing was started from Jul. 09, 2018 and completed on Jul. 12, 2018. We, SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.10-2013 and shown compliance with the applicable technical standards.

The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any agency of United States government.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.



Approved by: Allen Lin

SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory

No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.)

Table of Contents

HISTORY OF THIS TEST REPORT	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION	5
1.1 Information.....	5
1.2 Testing Applied Standards	7
1.3 Testing Location Information	7
1.4 Measurement Uncertainty	7
2 TEST CONFIGURATION OF EUT.....	8
2.1 The Worst Case Modulation Configuration	8
2.2 Test Channel Frequencies Configuration.....	8
2.3 The Worst Case Measurement Configuration.....	9
2.4 Accessories and Support Equipment	10
2.5 Test Setup Diagram	11
3 TRANSMITTER TEST RESULT	12
3.1 AC Power-line Conducted Emissions	12
3.2 Emission Bandwidth	16
3.3 Field Strength of Fundamental Emissions and Spectrum Mask	18
3.4 Transmitter Radiated Unwanted Emissions	21
3.5 Frequency Stability.....	28
4 TEST EQUIPMENT AND CALIBRATION DATA.....	30

Appendix A. Test Photos

Photographs of EUT V01

[illegible]

Summary of Test Result

Report Clause	Ref. Std. Clause	Test Items	Result (PASS/FAIL)	Remark
1.1.2	15.203	Antenna Requirement	PASS	FCC 15.203
3.1	15.207	AC Power-line Conducted Emissions	PASS	FCC 15.207
3.2	15.215(c)	Emission Bandwidth	PASS	Fall in band $F_L \geq 13.553 \text{ MHz}$ $F_H \leq 13.567 \text{ MHz}$
3.3	15.225(a)~(d)	Field Strength of Fundamental Emissions and Spectrum Mask	PASS	124 dBuV/m at 3m
3.4	15.225(d)	Transmitter Radiated Unwanted Emissions	PASS	FCC 15.209
3.5	15.225(e)	Frequency Stability	PASS	$\pm 0.01\%$ (100ppm)

Reviewed by: Sam Tsai

Report Producer: Ann Hou

1 General Description

1.1 Information

1.1.1 RF General Information

NFC Chip	Brand Name	Model Name
	NXP	P1003

RF General Information				
Frequency Range	Modulation	Ch. Frequency (MHz)	Channel Number	Field Strength (dBuV/m)
13.553 – 13.567 MHz	ISO 14443-3A (ASK)	13.56	1	59.23
Note 1: Field strength performed peak level at 3m.				

1.1.2 Antenna Information

Antenna Category	
<input checked="" type="checkbox"/>	Integral antenna (antenna permanently attached)
<input type="checkbox"/>	Temporary RF connector provided
<input checked="" type="checkbox"/>	No temporary RF connector provided Transmit chains bypass antenna and soldered temporary RF connector provided for connected measurement. In case of conducted measurements the transmitter shall be connected to the measuring equipment via a suitable attenuator and correct for all losses in the RF path.
<input type="checkbox"/>	External antenna (dedicated antennas)

Antenna General Information		
No.	Ant. Cat.	Ant. Type
1	Integral	Loop

1.1.3 Type of EUT

Type of EUT	
<input checked="" type="checkbox"/>	Stand-alone
<input type="checkbox"/>	Combined (EUT where the radio part is fully integrated within another device) Combined Equipment - Brand Name / Model No.:
<input type="checkbox"/>	Plug-in radio (EUT intended for a variety of host systems) Host System - Brand Name / Model No.:
<input type="checkbox"/>	Other:

1.1.4 Test Signal Duty Cycle

Duty Cycle Operation Restriction	
The transmitter is used for	The transmitter is operated
<input checked="" type="checkbox"/> Inductive applications	<input checked="" type="checkbox"/> Automatically triggered
<input type="checkbox"/> Duty cycle fixed mode	<input checked="" type="checkbox"/> Duty cycle random mode
Duty cycle mode - NFC-A (ISO 14443-3A)	
Declare transmitter duty cycle / 1 hour =	100%

1.1.5 EUT Operational Condition

Supply Voltage	<input checked="" type="checkbox"/> AC mains	<input checked="" type="checkbox"/> DC	
Type of DC Source	<input checked="" type="checkbox"/> External AC adapter	<input checked="" type="checkbox"/> From Host System	<input type="checkbox"/> Battery
Test Voltage	<input checked="" type="checkbox"/> Vnom (120 V)	<input checked="" type="checkbox"/> Vmax (138 V)	<input checked="" type="checkbox"/> Vmin (102V)
Test Climatic	<input checked="" type="checkbox"/> Tnom (20°C)	<input checked="" type="checkbox"/> Tmax (50°C)	<input checked="" type="checkbox"/> Tmin (-20°C)

1.2 Testing Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR FCC Part 15
- ♦ ANSI C63.10-2013
- ♦ KDB 174176 D01 v01r01

1.3 Testing Location Information

Testing Location				
<input checked="" type="checkbox"/>	HWA YA	ADD : No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.)		
		TEL : 886-3-327-3456 FAX : 886-3-327-0973		
Test site Designation No. TW1190 with FCC.				
Test Condition	Test Site No.	Test Engineer	Test Environment	Test Date
AC Conduction	CO04-HY	Jeremy Lin	22.8°C / 60%	12/Jul/2018
RF Conducted	TH01-HY	Randy Shih	23.8°C / 60.9%	09/Jul/2018
Radiated	03CH03-HY	Jeff Lin	22.8°C / 60%	10/Jul/2018

1.4 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

Test Items	Uncertainty	Remark
Conducted Emission (150kHz ~ 30MHz)	3.6 dB	Confidence levels of 95%
Radiated Emission (9kHz ~ 30MHz)	3.0 dB	Confidence levels of 95%
Radiated Emission (30MHz ~ 1,000MHz)	4.3 dB	Confidence levels of 95%
Conducted Emission	1.3 dB	Confidence levels of 95%
Temperature	0.7 °C	Confidence levels of 95%
Humidity	4 %	Confidence levels of 95%

2 Test Configuration of EUT

2.1 The Worst Case Modulation Configuration

Modulation Used for Conformance Testing	
Modulation Mode	Field Strength (dBuV/m at 3 m)
NFC	59.23




2.2 Test Channel Frequencies Configuration

Modulation Mode	Test Channel Frequencies (MHz)
NFC	13.56

2.3 The Worst Case Measurement Configuration

The Worst Case Mode for Following Conformance Tests	
Tests Item	AC power-line conducted emissions
Condition	AC power-line conducted measurement for line and neutral Test Voltage: 120Vac / 60Hz
Operating Mode	Adapter mode

The Worst Case Mode for Following Conformance Tests	
Tests Item	Emission Bandwidth, Frequency Stability
Test Condition	Conducted measurement

The Worst Case Mode for Following Conformance Tests			
Tests Item	Field Strength of Fundamental Emissions Spectrum Mask, Transmitter Radiated Unwanted Emissions		
Test Condition	Radiated measurement		
Pretest Mode	<input checked="" type="checkbox"/> 1. EUT Built in NFC A type		
	<input type="checkbox"/> 2. EUT Built in NFC B type		
	<input type="checkbox"/> 3. EUT Built in NFC F type		
	<input type="checkbox"/> 4. EUT Built in NFC V type		
Operating Mode < 1GHz	<input checked="" type="checkbox"/> 1. Adapter mode		
Modulation Mode	NFC		
Orthogonal Planes of EUT	X Plane	Y Plane	Z Plane
			
Worst Planes of EUT		V	

2.4 Accessories and Support Equipment

Accessories Information				
AC Adapter 1	Brand Name	SOY	Model Name	SOY-0500200-090
	Power Rating	I/P: 100 - 240Vac, 0.5A, O/P: 5Vdc, 2A		
AC Adapter 2	Brand Name	PHIHONE	Model Name	PSAF10R-050Q
	Power Rating	I/P: 100 - 240Vac, 0.3A, O/P: 5Vdc, 2A		
USB Cable	Brand Name	NA	Model Name	389G175GZAAFAMOOHF
	Signal Line	3 meter, non-shielded cable, without ferrite core		

Reminder: Regarding to more detail and other information, please refer to user manual.

Support Equipment - AC Conduction			
No.	Equipment	Brand Name	Model Name
1	NFC Card	-	-

Note: Support equipment No.1 was provided by customer.



Support Equipment - RF Conducted			
No.	Equipment	Brand Name	Model Name
1	NFC Card	-	-
1	AC Power Source	GW	APS-9102

Note: Support equipment No.1 was provided by customer.

Support Equipment - Radiated			
No.	Equipment	Brand Name	Model Name
1	NFC Card	-	-

Note: Support equipment No.1 was provided by customer.

2.5 Test Setup Diagram

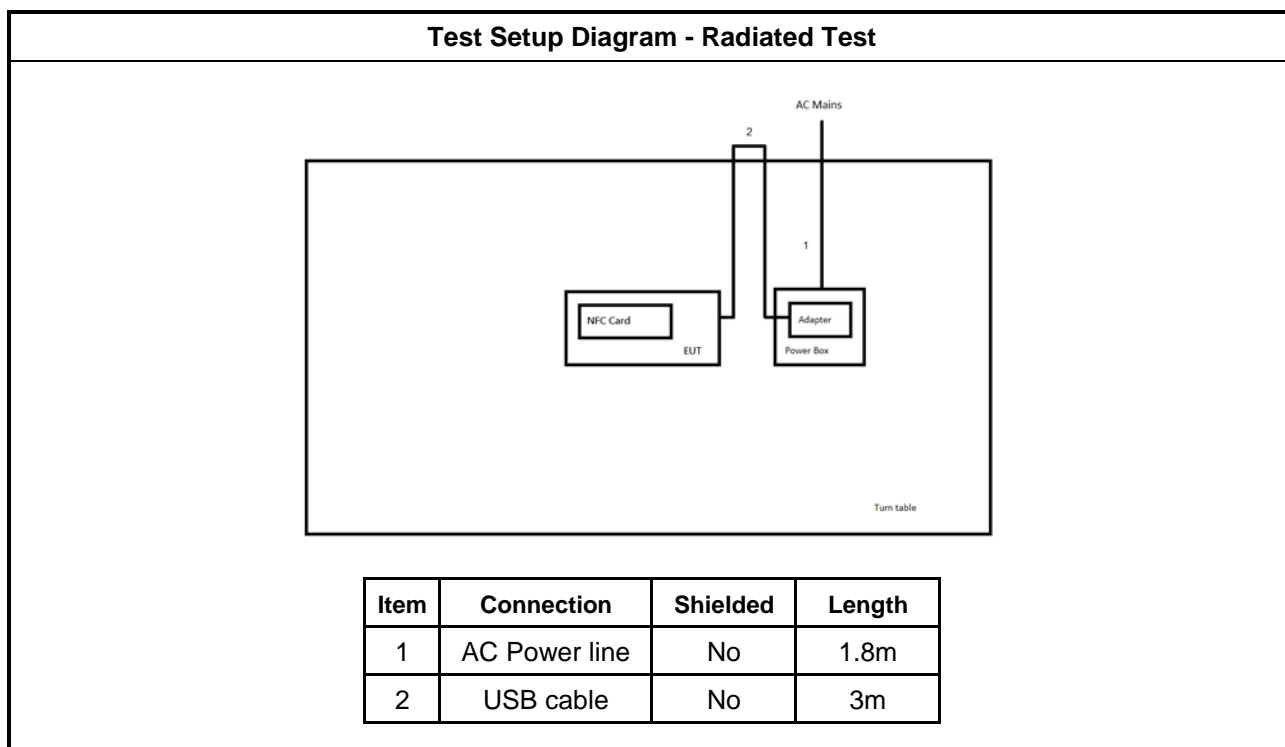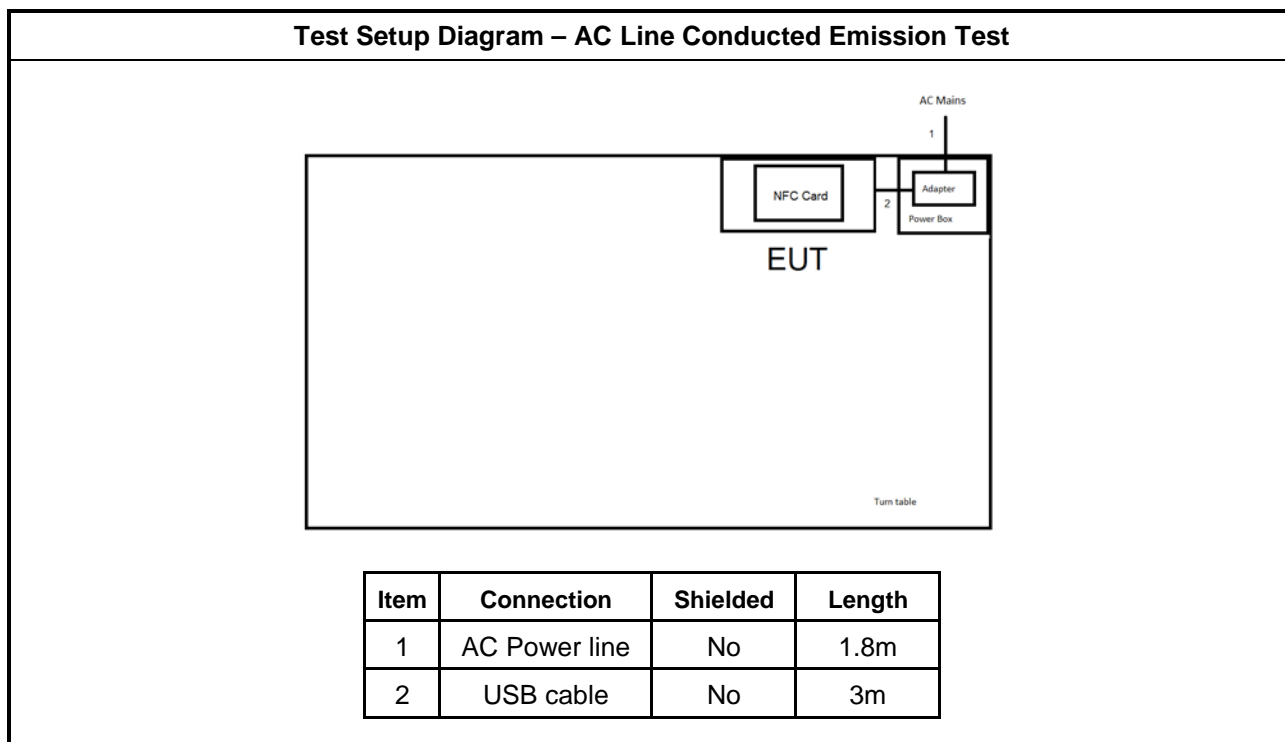

3 Transmitter Test Result

3.1 AC Power-line Conducted Emissions

3.1.1 AC Power-line Conducted Emissions Limit

AC Power-line Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50

Note 1: * Decreases with the logarithm of the frequency.


3.1.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.


3.1.3 Test Procedures

Test Method	
<input checked="" type="checkbox"/>	Refer as ANSI C63.10-2013, clause 6.2 for AC power-line conducted emissions.
<input checked="" type="checkbox"/>	If AC conducted emissions fall in operating band, then following below test method confirm final result.
<input type="checkbox"/>	Accept measurements done with a suitable dummy load replacing the antenna under the following conditions: (1) Perform the AC line conducted tests with the antenna connected to determine compliance with FCC 15.207 limits outside the transmitter's fundamental emission band; (2) Retest with a dummy load to determine compliance with FCC 15.207 limits within the transmitter's fundamental emission band.
<input checked="" type="checkbox"/>	For a device with a permanent antenna operating at or below 30 MHz, accept measurements done with a suitable dummy load, in lieu of the permanent antenna under the following conditions: (1) Perform the AC line conducted tests with the permanent antenna to determine compliance with the FCC 15.207 limits outside the transmitter's fundamental emission band; (2) Retest with a dummy load in lieu of the permanent antenna to determine compliance with the FCC 15.207 limits within the transmitter's fundamental emission band.

3.1.4 Test Setup

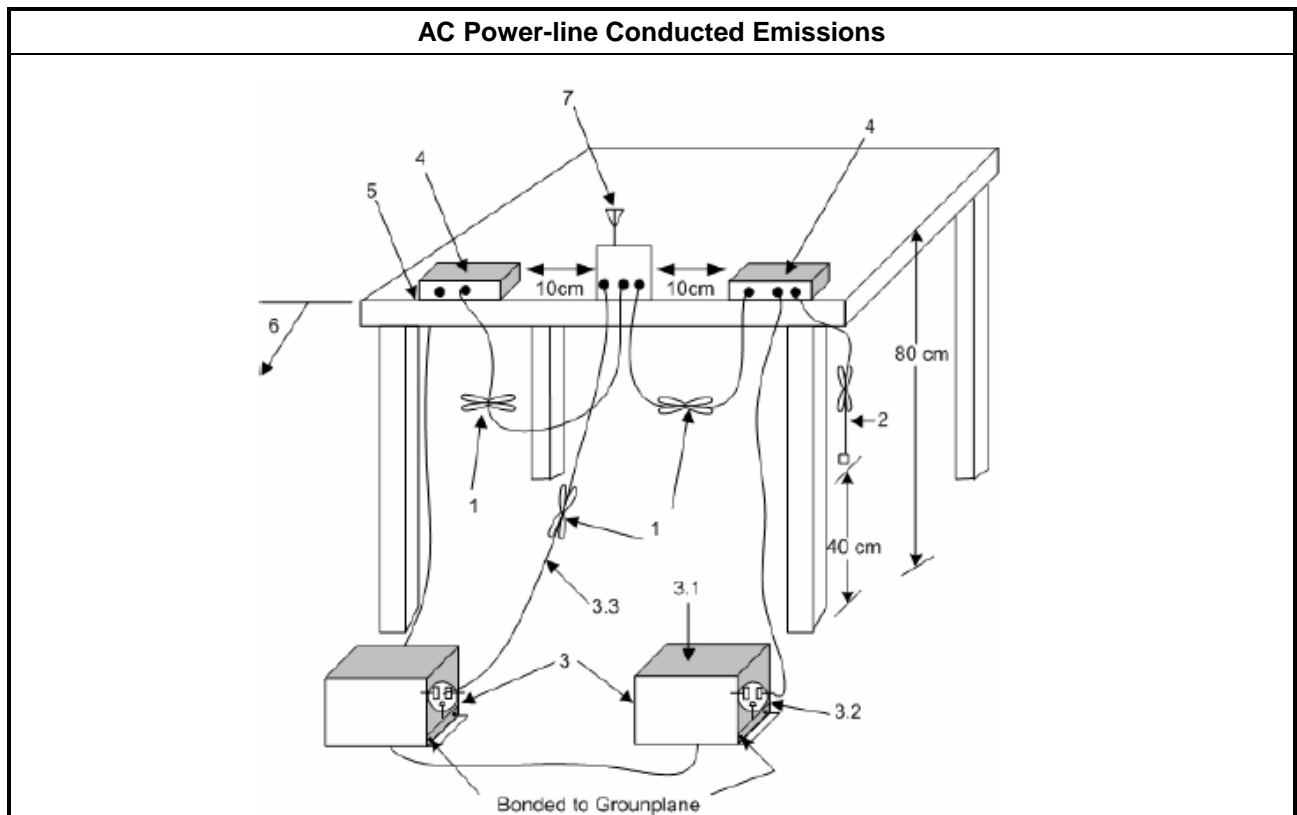


3.1.5 Test Result of AC Power-line Conducted Emissions

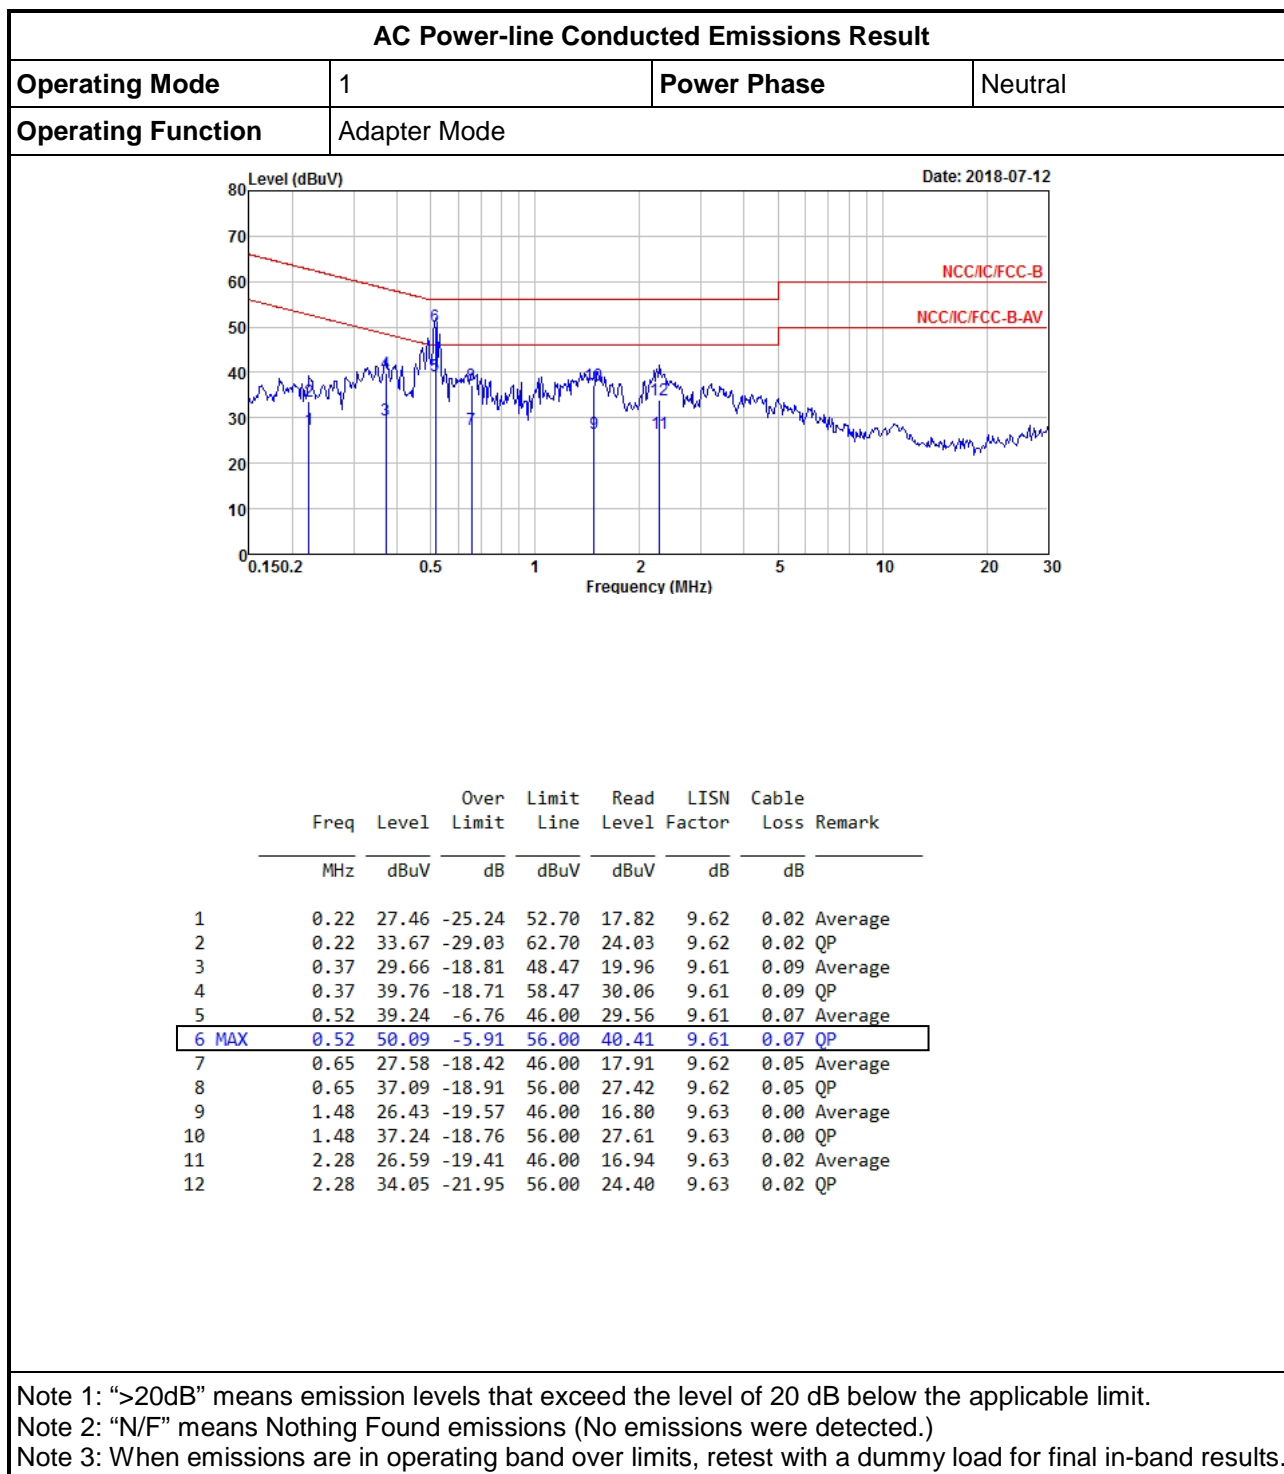

AC Power-line Conducted Emissions Result

Operating Mode	1	Power Phase	Line
Operating Function	Adapter Mode		

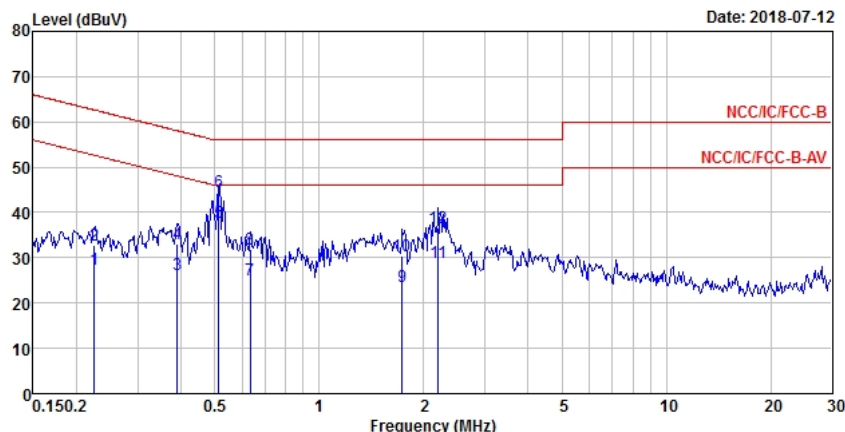

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.23	27.34	-25.28	52.62	17.70	9.62	0.02	Average
2	0.23	32.76	-29.86	62.62	23.12	9.62	0.02	QP
3	0.39	26.24	-21.84	48.08	16.53	9.61	0.10	Average
4	0.39	33.10	-24.98	58.08	23.39	9.61	0.10	QP
5 MAX	0.51	37.91	-8.09	46.00	28.23	9.61	0.07	Average
6	0.51	44.54	-11.46	56.00	34.86	9.61	0.07	QP
7	0.63	25.15	-20.85	46.00	15.49	9.61	0.05	Average
8	0.63	31.85	-24.15	56.00	22.19	9.61	0.05	QP
9	1.73	23.50	-22.50	46.00	13.88	9.62	0.00	Average
10	1.73	30.46	-25.54	56.00	20.84	9.62	0.00	QP
11	2.20	28.83	-17.17	46.00	19.20	9.62	0.01	Average
12	2.20	36.70	-19.30	56.00	27.07	9.62	0.01	QP

Note 1: ">20dB" means emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found emissions (No emissions were detected.)

Note 3: When emissions are in operating band over limits, retest with a dummy load for final in-band results.

3.2 Emission Bandwidth

3.2.1 Emission Bandwidth Limit

20dB Bandwidth Limit	
<input checked="" type="checkbox"/>	Intentional radiators must be designed to ensure that the 20 dB bandwidth of the emissions in the specific band (13.553 – 13.567 MHz).


3.2.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.2.3 Test Procedures

Test Method	
<input checked="" type="checkbox"/>	For the emission bandwidth refer ANSI C63.10, clause 6.9.1 for occupied bandwidth testing.
<input checked="" type="checkbox"/>	For radiated measurement. Loop antenna was rotated about the horizontal and vertical axis and the equipment to be measured and the test antenna shall be oriented to obtain the maximum emitted field strength level.


3.2.4 Test Setup

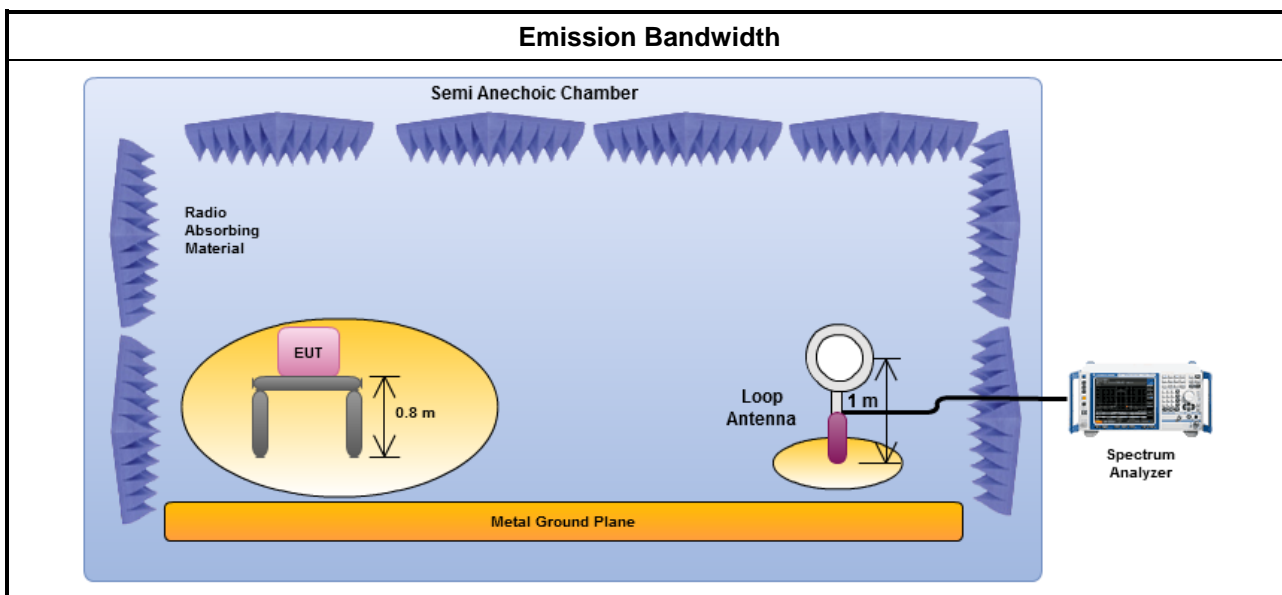


3.2.5 Test Result of Emission Bandwidth

Occupied Channel Bandwidth Result					
Modulation Mode	Frequency (MHz)	20dB Bandwidth (kHz)	99% Bandwidth (kHz)	F _L at 20dB BW (MHz)	F _H at 20dB BW (MHz)
NFC	13.56	2.46000	2.09841	13.55932	13.56178
Limit		N/A	N/A	13.553	13.567
Result		Complied			

Emission Bandwidth Plot - 20dB Bandwidth

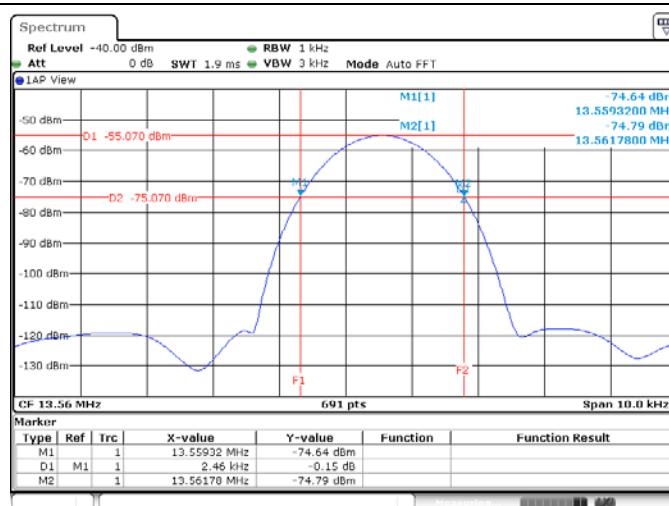

mission Bandwidth Plot - 99% Bandwidth

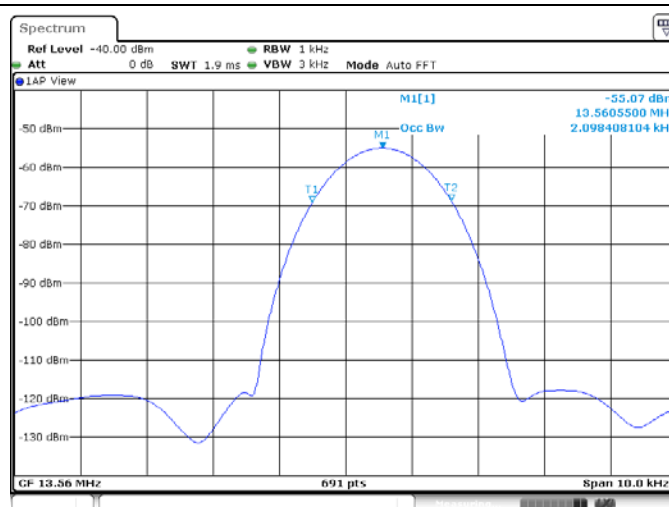

3.3 Field Strength of Fundamental Emissions and Spectrum Mask

3.3.1 Field Strength of Fundamental Emissions and Spectrum Mask Limit

Field Strength of Fundamental Emissions For FCC					
Emissions	(uV/m)@30m	(dBuV/m)@30m	(dBuV/m)@10m	(dBuV/m)@3m	(dBuV/m)@1m
fundamental	15848	84.0	103.1	124.0	143.1
Quasi peak measurement of the fundamental.					

Spectrum Mask For FCC					
Freq. of Emission (MHz)	(uV/m)@30m	(dBuV/m)@30m	(dBuV/m)@10m	(dBuV/m)@3m	(dBuV/m)@1m
1.705~13.110	30	29.5	48.6	69.5	88.6
13.110~13.410	106	40.5	59.6	80.5	99.6
13.410~13.553	334	50.5	69.6	90.5	109.6
13.553~13.567	15848	84.0	103.1	124.0	143.1
13.567~13.710	334	50.5	69.6	90.5	109.6
13.710~14.010	106	40.5	59.6	80.5	99.6
14.010~30.000	30	29.5	48.6	69.5	88.6


3.3.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.3.3 Test Procedures


Test Method	
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 6.4 for radiated emissions from below 30 MHz and test distance is 3m.
<input checked="" type="checkbox"/>	At frequencies below 30 MHz, measurements may be performed at a distance closer than that specified in the requirements; however, an attempt should be made to avoid making measurements in the near field. Pending the development of an appropriate measurement procedure for measurements performed below 30 MHz, when performing measurements at a closer distance than specified, the results shall be following below methods.
<input type="checkbox"/>	The results shall be extrapolated to the specified distance by making measurements at a minimum of two distances on at least one radial to determine the proper extrapolation factor.
<input checked="" type="checkbox"/>	The results shall be by using the square of an inverse linear distance extrapolation factor (40 dB/decade).
<input checked="" type="checkbox"/>	For radiated measurement. Loop antenna was rotated about the horizontal and vertical axis and the equipment to be measured and the test antenna shall be oriented to obtain the maximum emitted field strength level.

3.3.4 Test Setup

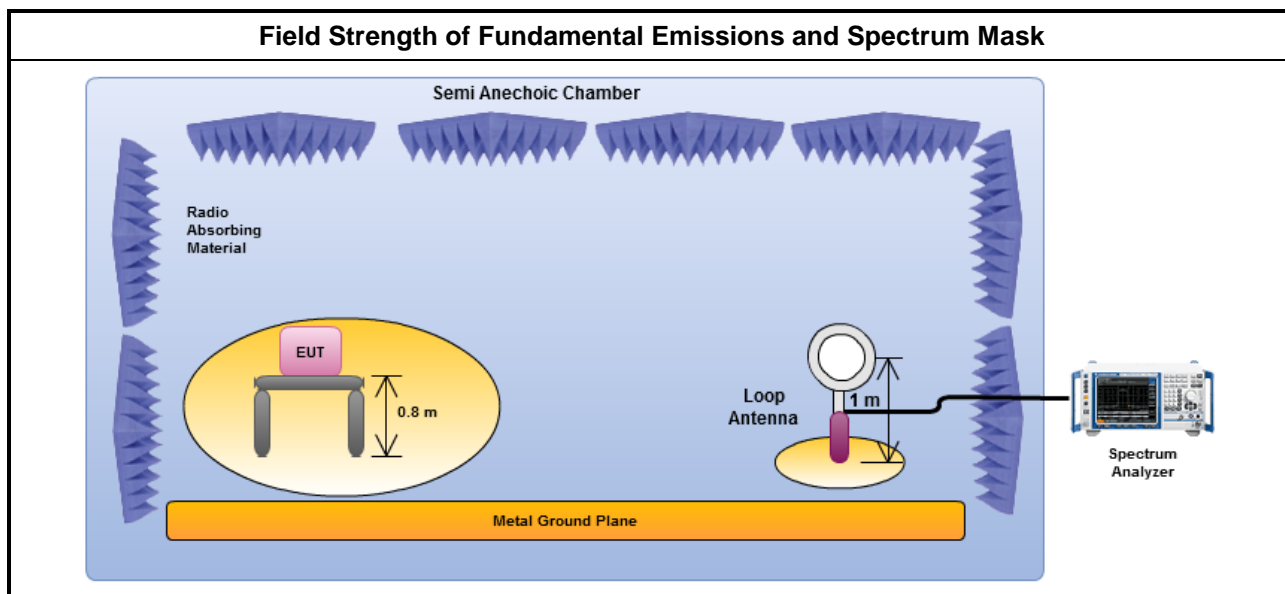

3.3.5 Test Result of Field Strength of Fundamental Emissions and Spectrum Mask

Field Strength of Fundamental Emissions Result					
Modulation Mode	Frequency (MHz)	Fundamental (dBuV/m)@3m	Polarization	Margin (dB)	Limit (dBuV/m)@3m
NFC	13.56	59.23	H	64.77	124.00
Result		Complied			
Note 1: Measurement worst emissions of receive antenna polarization: H(Horizontal).					

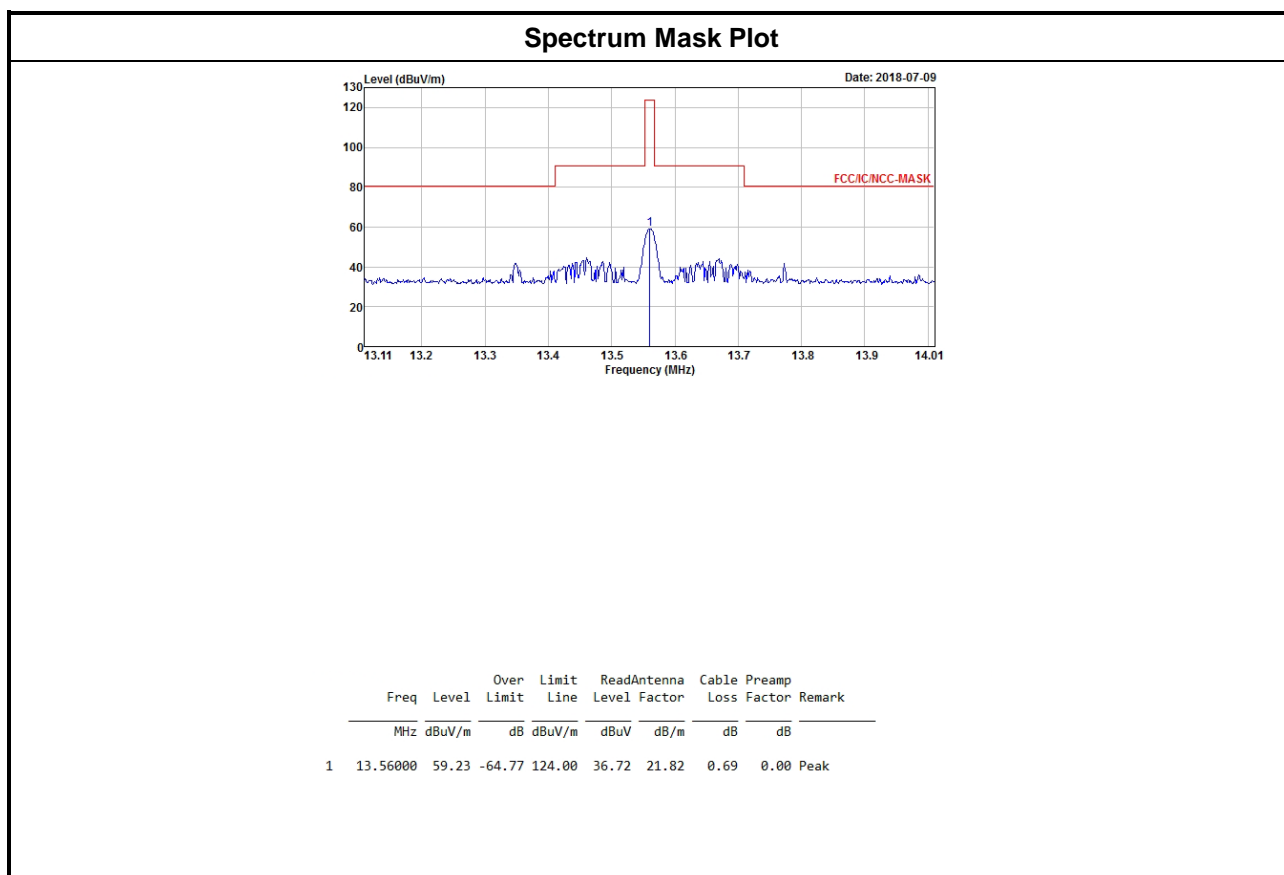

3.4 Transmitter Radiated Unwanted Emissions

3.4.1 Transmitter Radiated Unwanted Emissions Limit

Transmitter Radiated Unwanted Emissions Limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

Note 1: Test distance for frequencies at or above 30 MHz, measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

Note 2: Test distance for frequencies at below 30 MHz, measurements may be performed at a distance closer than the EUT limit distance; however, an attempt should be made to avoid making measurements in the near field. When performing measurements below 30 MHz at a closer distance than the limit distance, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two or more distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). The test report shall specify the extrapolation method used to determine compliance of the EUT.



3.4.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.


3.4.3 Test Procedures


Test Method	
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 6.5 for radiated emissions from 30 MHz to 1 GHz and test distance is 3m.
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 6.4 for radiated emissions from below 30 MHz and test distance is 3m.
<input checked="" type="checkbox"/>	At frequencies below 30 MHz, measurements may be performed at a distance closer than that specified in the requirements; however, an attempt should be made to avoid making measurements in the near field. Pending the development of an appropriate measurement procedure for measurements performed below 30 MHz, when performing measurements at a closer distance than specified, the results shall be following below methods.
<input type="checkbox"/>	The results shall be extrapolated to the specified distance by making measurements at a minimum of two distances on at least one radial to determine the proper extrapolation factor.
<input checked="" type="checkbox"/>	The results shall be by using the square of an inverse linear distance extrapolation factor (40 dB/decade).
<input checked="" type="checkbox"/>	For radiated measurement. Loop antenna was rotated about the horizontal and vertical axis and the equipment to be measured and the test antenna shall be oriented to obtain the maximum emitted field strength level.
<input checked="" type="checkbox"/>	The any unwanted emissions level shall not exceed the fundamental emission level.
<input checked="" type="checkbox"/>	All amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.

3.4.4 Test Setup

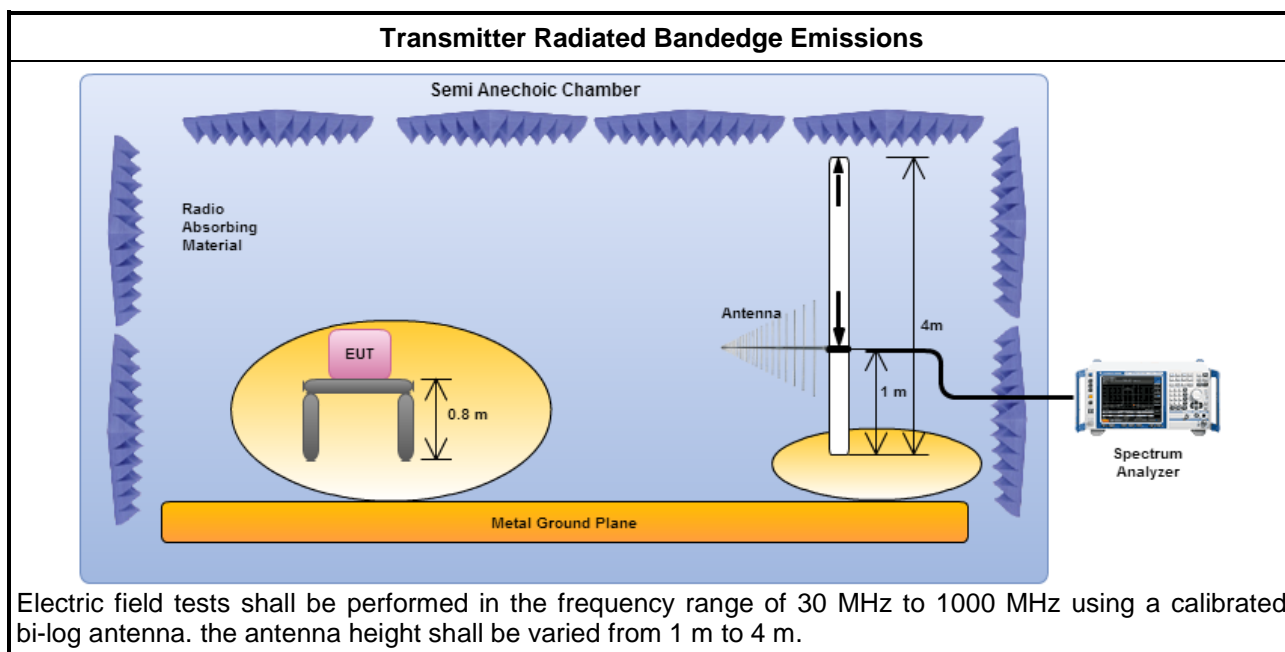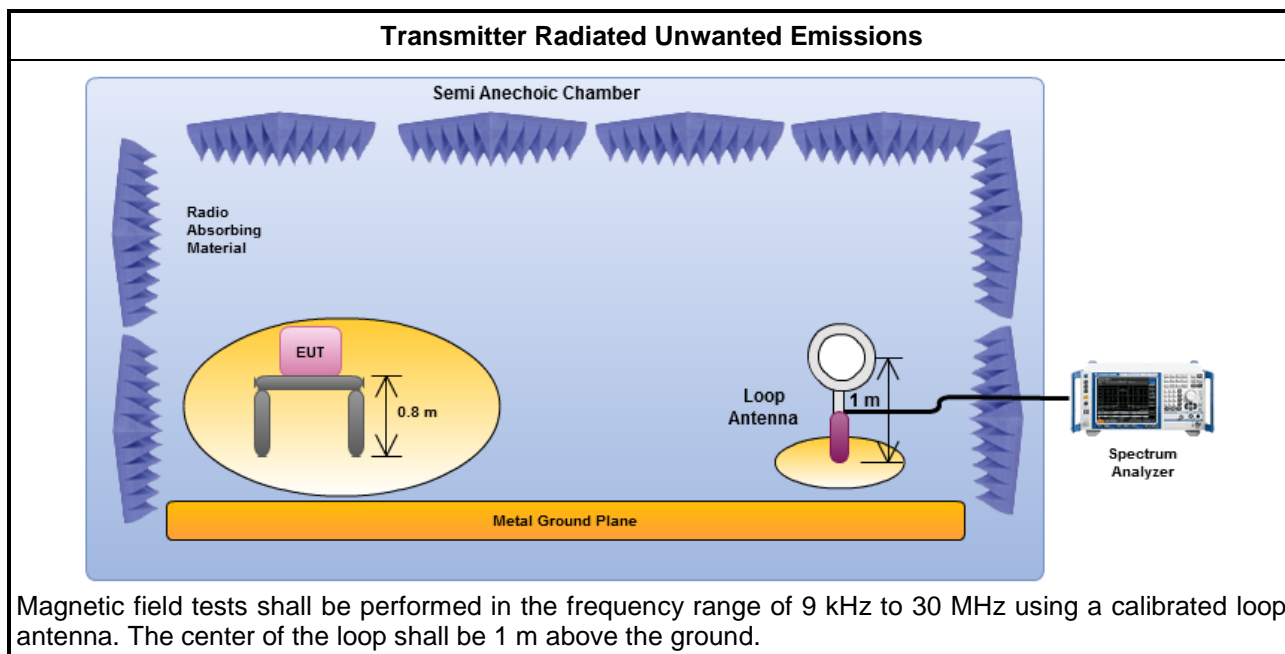



3.4.5 Transmitter Radiated Unwanted Emissions (Below 30MHz)

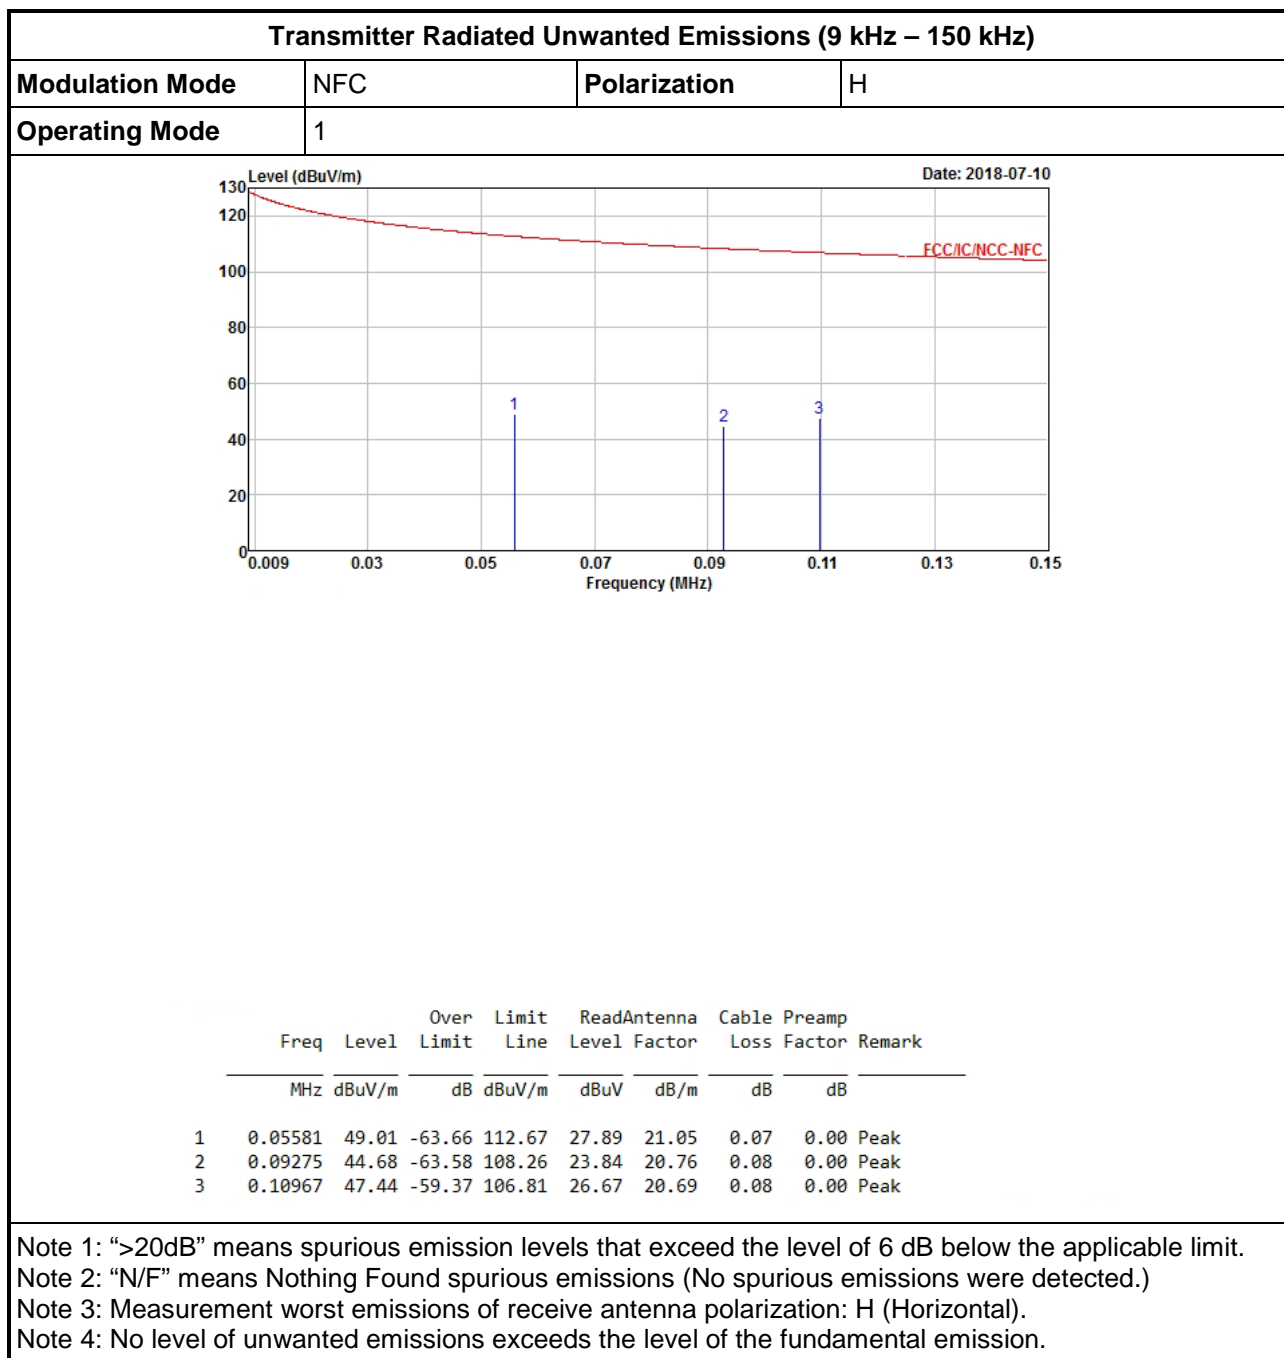

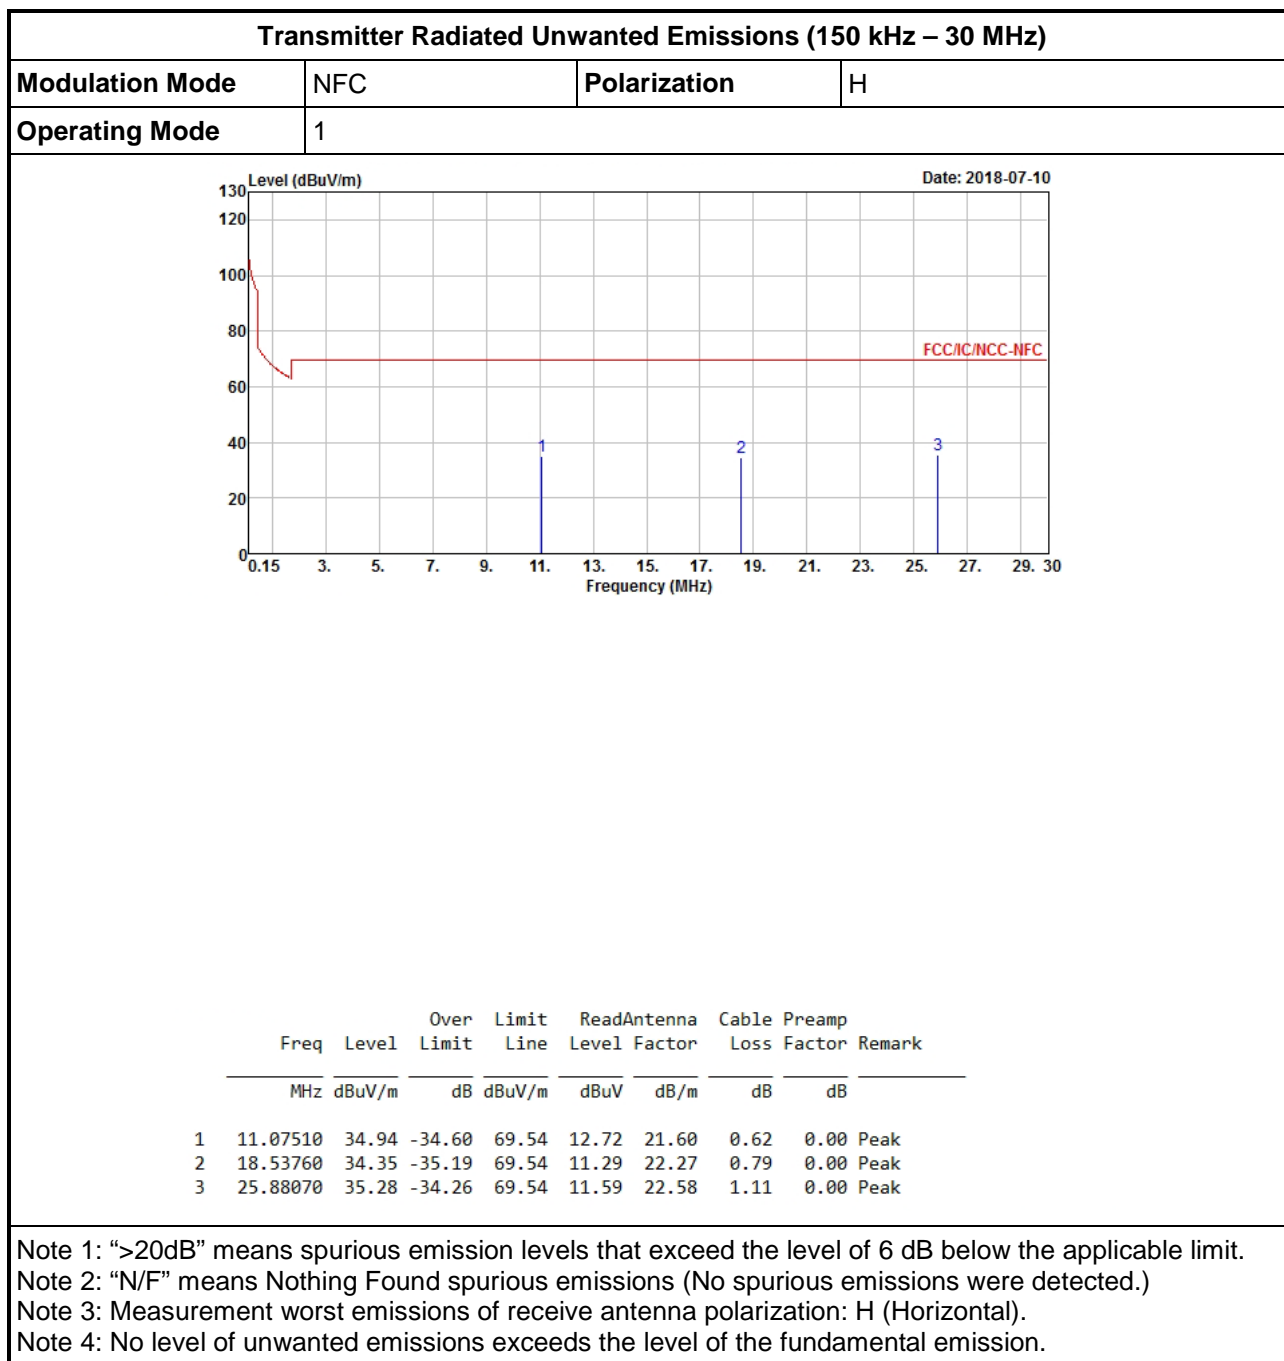

3.4.6 Transmitter Radiated Unwanted Emissions (Above 30MHz)

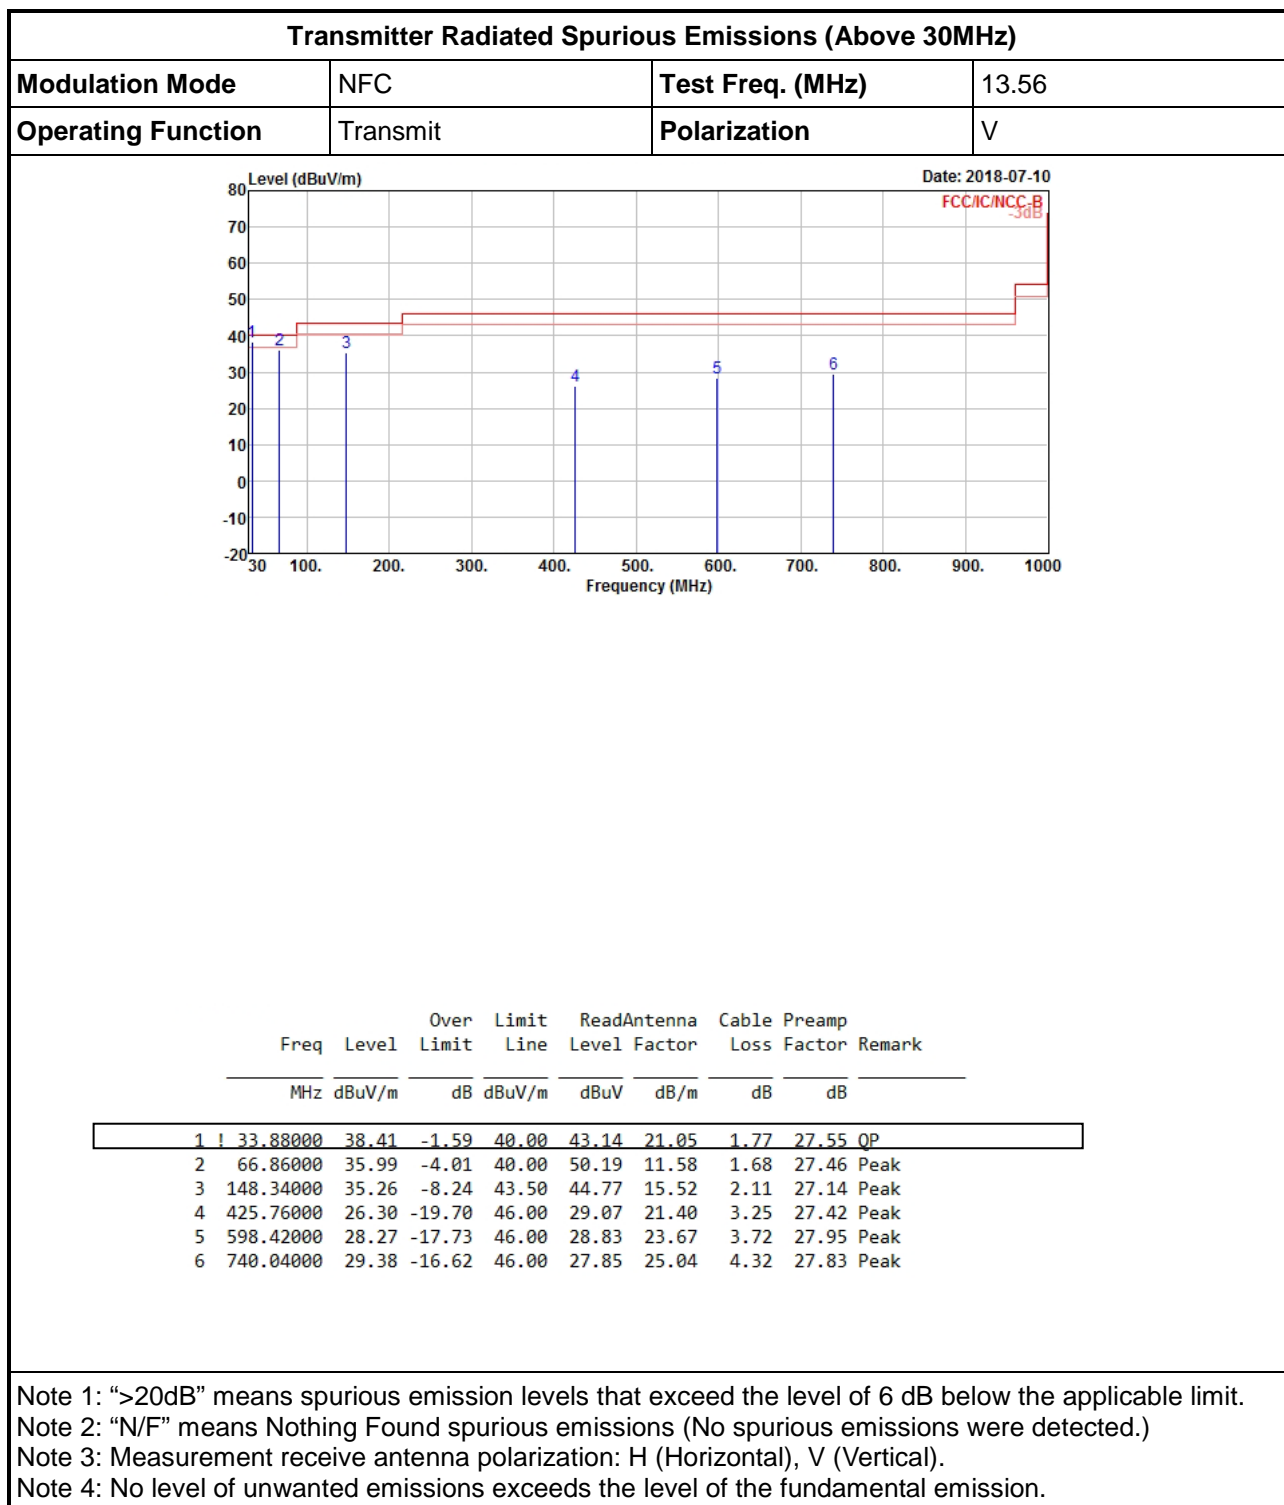

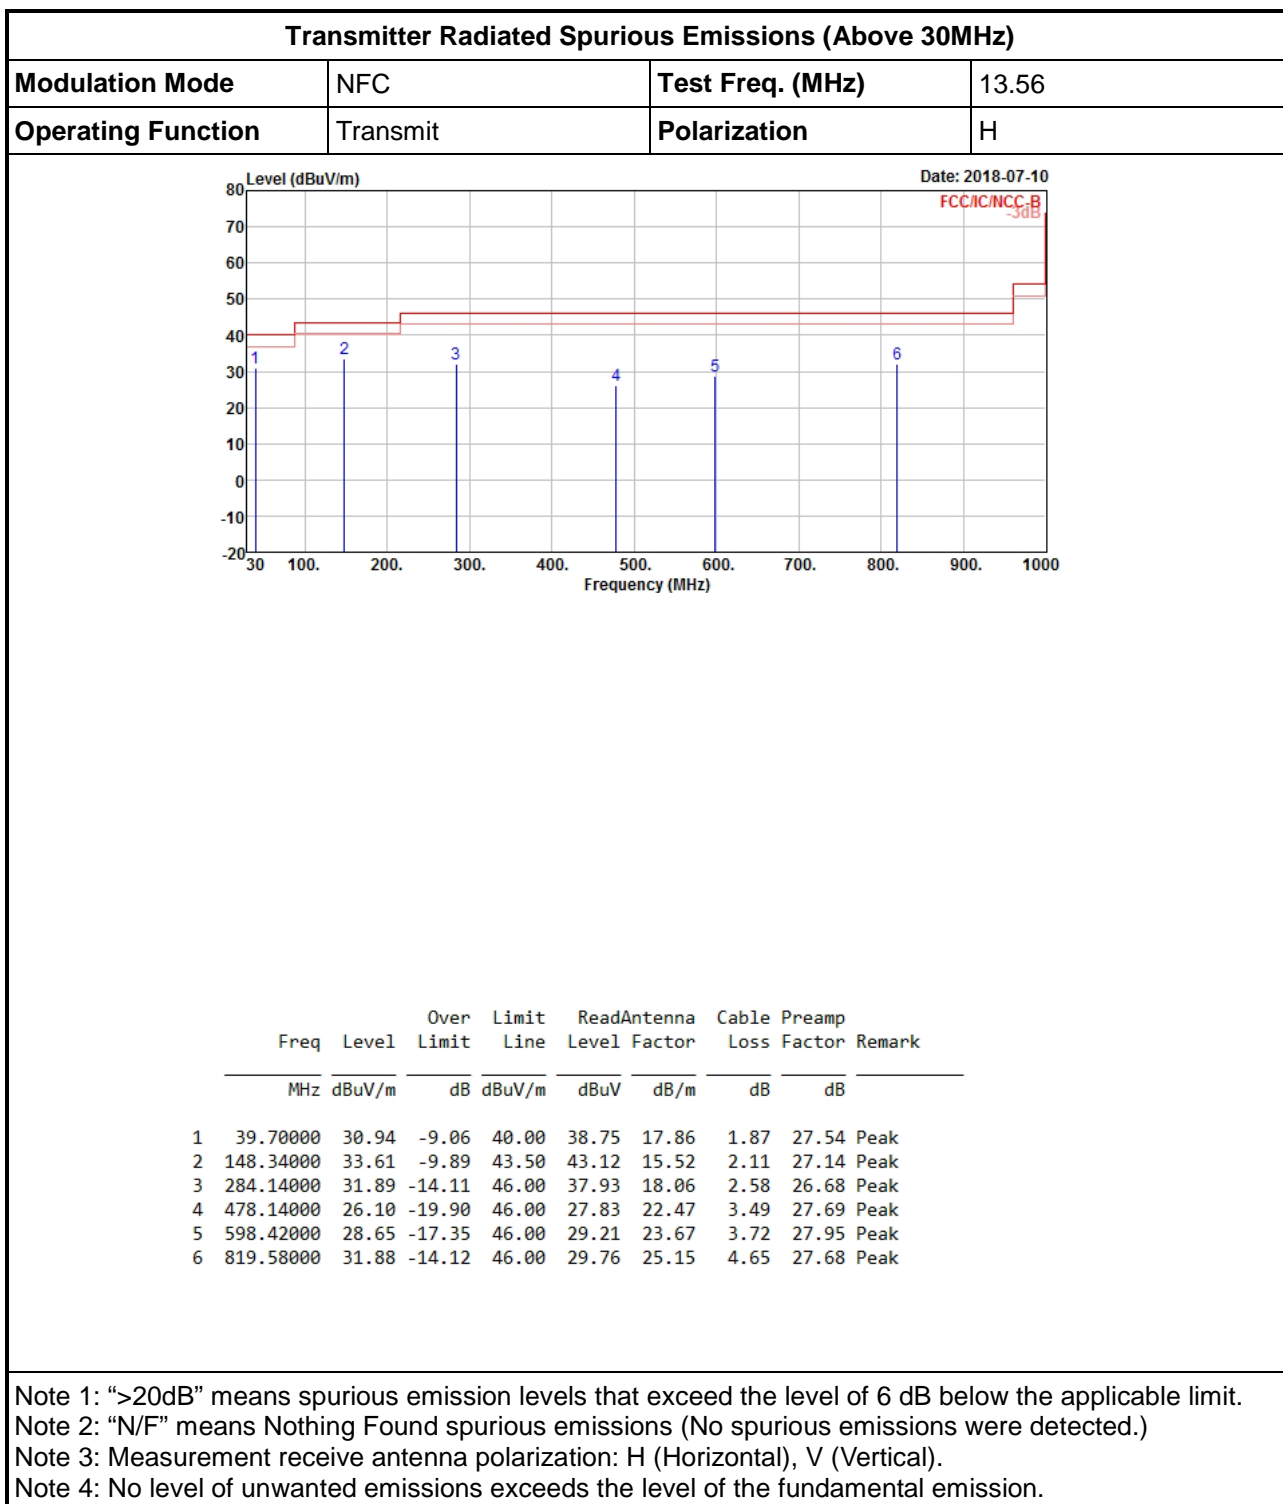

3.5 Frequency Stability

3.5.1 Frequency Stability Limit

Frequency Stability Limit	
<input checked="" type="checkbox"/>	Carrier frequency stability shall be maintained to $\pm 0.01\%$ (± 100 ppm).


3.5.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.5.3 Test Procedures

Test Method	
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 6.8 for frequency stability tests
<input checked="" type="checkbox"/>	Frequency stability with respect to ambient temperature
<input checked="" type="checkbox"/>	Frequency stability when varying supply voltage
<input type="checkbox"/>	For conducted measurement.
<input checked="" type="checkbox"/>	For radiated measurement. The equipment to be measured and the test antenna shall be oriented to obtain the maximum emitted power level.

3.5.4 Test Setup

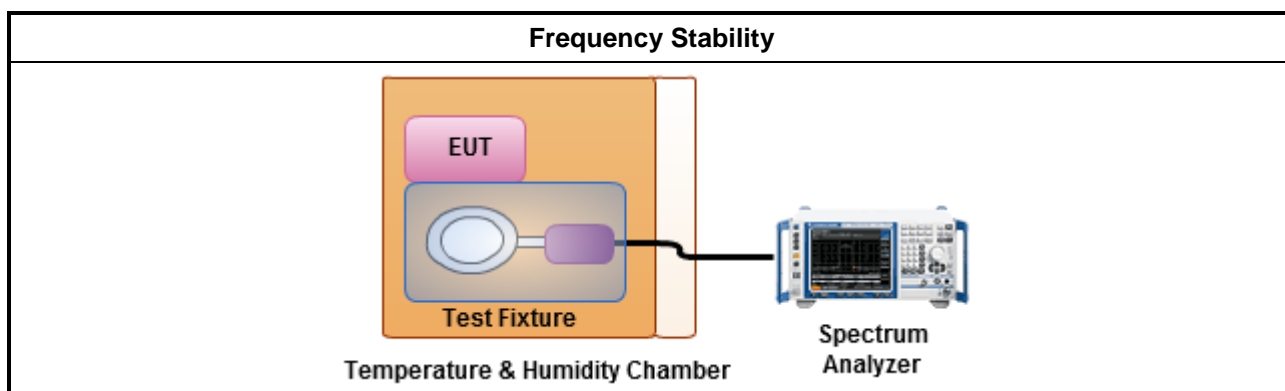

3.5.5 Test Result of Frequency Stability

Frequency Stability Result									
Condition	Ch. Freq. (MHz)	Frequency Stability (ppm)							
		Test Frequency (MHz)				Frequency Stability (ppm)			
		0 min	2 min	5 min	10 min	0 min	2 min	5 min	10 min
T _{20°C} V _{max}	13.56	13.56000	13.55999	13.55999	13.56024	-0.22	-0.74	-0.81	17.92
T _{20°C} V _{min}	13.56	13.56000	13.55999	13.56011	13.56054	-0.22	-0.81	8.41	39.82
T _{50°C} V _{nom}	13.56	13.55983	13.56048	13.56062	13.55979	-12.54	35.69	45.43	-15.19
T _{40°C} V _{nom}	13.56	13.55999	13.56005	13.56047	13.56053	-1.03	3.32	34.96	38.94
T _{30°C} V _{nom}	13.56	13.56007	13.56015	13.56042	13.55933	5.01	10.99	30.90	-49.78
T _{20°C} V _{nom}	13.56	13.55986	13.55989	13.55999	13.56009	-10.69	-8.26	-1.11	6.93
T _{10°C} V _{nom}	13.56	13.56000	13.55999	13.55998	13.55985	-0.07	-0.44	-1.25	-11.43
T _{0°C} V _{nom}	13.56	13.55999	13.55994	13.55965	13.56048	-0.52	-4.20	-25.52	35.32
T _{-10°C} V _{nom}	13.56	13.55993	13.56050	13.56042	13.56074	-5.46	36.95	31.19	54.28
T _{-20°C} V _{nom}	13.56	13.55998	13.56028	13.56003	13.55995	-1.47	20.35	2.51	-4.06
Limit (ppm)		100							
Result		Complied							
Note 1: Measure at 85 % [Vmin] and 115 % [Vmax] of the nominal voltage [Vnom]. The nominal voltage refer test report clause 1.1.4 for EUT operational condition.									
Note 2: Measure maximum deviation frequency at operating frequency at startup and two, five, and ten min.									

4 Test Equipment and Calibration Data

Instrument for AC Conduction

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Calibration Due Date
EMC Receiver	R&S	ESR3	102051	9KHz ~ 3.6GHz	03/May/2018	02/May/2019
LISN	R&S	ENV216	101295	9kHz ~ 30MHz	17/Nov/2017	16/Nov/2018
RF Cable-CON	HUBER+SUHNER	RG213/U	07611832020001	9kHz ~ 30MHz	06/Oct/2017	05/Oct/2018
AC POWER	APC	AFC-11005G	F310050055	47Hz~63Hz 5~300V	NCR	NCR
Impuls Begrenzer Pulse Limiter	SCHWARZBECK	VTSD 9561-F	9561-F041	9 kHz ~ 30 MHz	12/Oct/2017	11/Oct/2018

NCR: No Calibration Require.

Instrument for Conducted Test

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Calibration Due Date
Spectrum Analyzer	R&S	FSV 40	101013	9kHz~40GHz	05/Feb/2018	04/Feb/2019
Loop Antenna	TESEQ	HLA 6120	31244	9 kHz~30 MHz	29/Mar/2018	28/May/2019
Temp. and Humidity Chamber	Giant Force	GTH-225-20-SP-SD	MAA1112-007	-20 ~ 100℃	22/May/2018	21/May/2019

Instrument for Radiated Test

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Calibration Due Date
3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH03-HY	30MHz ~ 1GHz 3m	31/Oct/2017	30/Oct/2018
Amplifier	HP	8447D	2944A08033	10kHz ~ 1.3GHz	23/Apr/2018	22/Apr/2019
Spectrum	R&S	FSP40	100593	9kHz ~ 40GHz	12/Dec/2017	13/Dec/2018
Receiver	R&S	ESCS 30	100354	9kHz ~ 2.75GHz	08/Dec/2017	07/Dec/2018
RF Cable-R03m	Jye Bao	RG142	CB021	9kHz ~ 1GHz	26/Jan/2018	25/Jan/2019
RF Cable-high	SUHNER	SUCOFLEX106	CB222	1GHz ~ 40GHz	26/Jan/2018	25/Jan/2019
Bilog Antenna	SCHAFFNER	CBL 6112B	2723	30MHz ~ 1GHz	09/Sep/2017	08/Sep/2018
Loop Antenna	TESEQ	HLA 6120	31244	9 kHz~30 MHz	16/Mar/2018	15/Mar/2019