

# **FCC Test Report**

FCC ID : PRDMU65

Equipment : 2.4G BlueTrace Mouse

Model No. : GM5

Brand Name : ACROX

Applicant : ACROX Technologies Co., Ltd.

Address : 4F., No.89, Minshan St., Neihu Dist., Taipei City

114, Taiwan, R.O.C.

Standard : 47 CFR FCC Part 15.249

Received Date : Jan. 13, 2018 Tested Date : Feb. 02, 2018

We, International Certification Corp., would like to declare that the tested sample has been evaluated and in compliance with the requirement of the above standards. The test results contained in this report refer exclusively to the product. It may be duplicated completely for legal use with the approval of the applicant. It shall not be reproduced except in full without the written approval of our laboratory.

Reviewed by: Approved by:

Along Chen / Assistant Manager Gary Chang / Manager

Te

Page: 1 of 24

Testing Laboratory 2732

Report No.: FR813102 Report Version: Rev. 02



## **Table of Contents**

1	GENERAL DESCRIPTION	5
1.1	Information	
1.2	Local Support Equipment List	
1.3	Test Setup Chart	
	The Equipment List	
1.4	Test Standards	3
1.5		
1.6	Measurement Uncertainty	g
2	TEST CONFIGURATION	10
2.1	Testing Condition	10
2.2	The Worst Test Modes and Channel Details	10
3	TRANSMITTER TEST RESULTS	11
3.1	Radiated Emission	
3.2	20dB and Occupied Bandwidth	23
4	TEST I ABORATORY INFORMATION	24



## **Release Record**

Report No.	Version	Description	Issued Date
FR813102	Rev. 01	Initial issue	Feb. 22, 2018
FR813102	Rev. 02	Updating equipment information	Mar. 15, 2018

Report No.: FR813102 Page: 3 of 24



## **Summary of Test Results**

FCC Rules	Test Items	Measured	Result
15.249(a)	Field Strength of Fundamental	Meet the requirement of limit	Pass
15.249(a)(d)	Field Strength of Harmonics and Emissions Radiated outside of the Specified Frequency Bands	Meet the requirement of limit	Pass
15.215(c)	20dB bandwidth	Meet the requirement of limit	Pass
15.203	Antenna Requirement	Meet the requirement of limit	Pass

Report No.: FR813102 Page: 4 of 24

Report Version: Rev. 02



## 1 General Description

### 1.1 Information

### 1.1.1 Specification of the Equipment under Test (EUT)

RF General Information							
Frequency Range (MHz) Channel Number Data Rate							
2408-2474	FSK	2408-2474	1-34 [34]	1 Mbps			

#### 1.1.2 Antenna Details

Ant. No.	Туре	Gain (dBi)	Connector	Remark
1	Printed	-1.55		

### 1.1.3 Power Supply Type of Equipment under Test (EUT)

Power Supply Type	1.5Vdc from battery

Report No.: FR813102

Page: 5 of 24



### 1.1.4 Channel List


Frequenc	y band (MHz)	2408	3~2474
Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2408	18	2442
2	2410	19	2444
3	2412	20	2446
4	2414	21	2448
5	2416	22	2450
6	2418	23	2452
7	2420	24	2454
8	2422	25	2456
9	2424	26	2458
10	2426	27	2460
11	2428	28	2462
12	2430	29	2464
13	2432	30	2466
14	2434	31	2468
15	2436	32	2470
16	2438	33	2472
17	2440	34	2474



## 1.2 Local Support Equipment List

	Support Equipment List						
No.	No. Equipment Brand Model S/N FCC ID Signal cable / Length (m)						
1							

## 1.3 Test Setup Chart

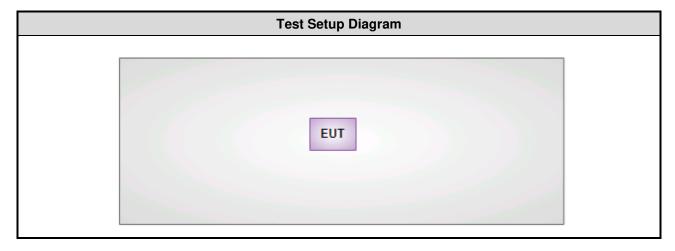

Report No.: FR813102 Page: 7 of 24



## 1.4 The Equipment List

Test Item	Radiated Emission						
Test Site	966 chamber 3 / (03CH03-WS)						
Instrument	Manufacturer	Model No.	Serial No.	<b>Calibration Date</b>	Calibration Until		
Spectrum Analyzer	R&S	FSV40	101499	Jan. 03, 2018	Jan. 02, 2019		
Receiver	R&S	ESR3	101658	Nov. 20, 2017	Nov. 19, 2018		
Bilog Antenna	SCHWARZBECK	VULB9168	VULB9168-685	Apr. 28, 2017	Apr. 27, 2018		
Horn Antenna 1G-18G	SCHWARZBECK	BBHA 9120 D	BBHA 9120 D 1206	Jan. 18, 2018	Jan. 17, 2019		
Horn Antenna 18G-40G	SCHWARZBECK	BBHA 9170	BBHA 9170517	Nov. 23, 2017	Nov. 22, 2018		
Loop Antenna	R&S	HFH2-Z2	100330	Nov. 13, 2017	Nov. 12, 2018		
Loop Antenna Cable	KOAX KABEL	101354-BW	101354-BW	Dec. 07, 2017	Dec. 06, 2018		
Preamplifier	EMC	EMC02325	980187	Sep. 04, 2017	Sep. 03, 2018		
Preamplifier	Agilent	83017A	MY53270014	Aug. 21, 2017	Aug. 20, 2018		
Preamplifier	EMC	EMC184045B	980192	Aug. 22, 2017	Aug. 21, 2018		
RF cable-3M	HUBER+SUHNER	SUCOFLEX104	MY22620/4	Nov. 27, 2017	Nov. 26, 2018		
RF cable-8M	HUBER+SUHNER	SUCOFLEX104	MY32487/4	Nov. 27, 2017	Nov. 26, 2018		
RF cable-1M	HUBER+SUHNER	SUCOFLEX104	MY22624/4	Nov. 27, 2017	Nov. 26, 2018		
LF cable-0.8M	EMC	EMC8D-NM-NM-800	EMC8D-NM-NM-800-001	Nov. 27, 2017	Nov. 26, 2018		
LF cable-3M	EMC	EMC8D-NM-NM-3000	131103	Nov. 27, 2017	Nov. 26, 2018		
LF cable-13M	EMC	EMC8D-NM-NM-13000	131104	Nov. 27, 2017	Nov. 26, 2018		
Measurement Software	AUDIX	e3	6.120210g	NA	NA		
Note: Calibration Int	Note: Calibration Interval of instruments listed above is one year.						

Test Item	RF Conducted								
Test Site	(TH01-WS)	(TH01-WS)							
Instrument	Manufacturer	Manufacturer Model No. Serial No. Calibration Date Calibration Until							
Spectrum Analyzer	R&S	FSV40	101063	Mar. 15, 2017	Mar. 14, 2018				
Power Meter	Anritsu	ML2495A	1241002	Oct. 16, 2017	Oct. 15, 2018				
Power Sensor	Anritsu	MA2411B	1207366	Oct. 16, 2017	Oct. 15, 2018				
DC POWER SOURCE	GW INSTEK	GPC-6030D	EM892433	Oct. 26, 2017	Oct. 25, 2018				
Measurement Software     Sporton     Sporton_1     1.3.30     NA     NA									
Note: Calibration Inte	Note: Calibration Interval of instruments listed above is one year.								

Report No.: FR813102 Page: 8 of 24

Report Version: Rev. 02



#### 1.5 Test Standards

According to the specification of EUT, the EUT must comply with following standards and KDB documents.

47 CFR FCC Part 15.249

ANSI C63.10-2013

### 1.6 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2)

Measurement Uncertainty					
Parameters Und					
Bandwidth	±34.134 Hz				
Radiated emission ≤ 1GHz	±3.87 dB				
Radiated emission > 1GHz	±5.60 dB				

Report No.: FR813102 Page: 9 of 24



## 2 Test Configuration

## 2.1 Testing Condition

Test Item	Test Site	Ambient Condition	Tested By
Radiated Emissions	03CH03-WS	19°C / 63%	Vincent Yeh
RF Conducted	TH01-WS	19°C / 63%	Vincent Yeh

FCC Designation No.: TW0009
 FCC site registration No.: 207696
 IC site registration No.: 10807C-1

### 2.2 The Worst Test Modes and Channel Details

Test item	Mode	Test Frequency (MHz)	Data Rate	Test Configuration
Field Strength of Fundamental	FSK	2408, 2440, 2474	1 Mbps	
Radiated Emissions ≤ 1GHz	FSK	2474	1 Mbps	
Radiated Emissions > 1GHz	FSK	2408, 2440, 2474	1 Mbps	
20dB bandwidth	FSK	2408, 2440, 2474	1 Mbps	

Report No.: FR813102 Page: 10 of 24



## 3 Transmitter Test Results

#### 3.1 Radiated Emission

This section includes field strength of fundamental, field strength of harmonics and emissions radiated outside of the operating frequency bands.

#### 3.1.1 Limit of field strength of fundamental and field strength of harmonics

Fundamental Frequency	Field strength of fundamental (millivolts/meter)	Field strength of harmonics (microvolts/meter)
2400-2483.5 MHz	50	500

#### 3.1.2 Limit of Unwanted Emissions

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in below table, whichever is the lesser attenuation.

Radiated emission limits									
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)						
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300						
0.490~1.705	24000/F(kHz)	33.8 - 23	30						
1.705~30.0	30	29	30						
30~88	100	40	3						
88~216	150	43.5	3						
216~960	200	46	3						
Above 960	500	54	3						

#### Note 1:

Qusai-Peak value is measured for frequency below 1GHz except for 9–90 kHz, 110–490 kHz frequency band. Peak and average value are measured for frequency above 1GHz. The limit on average radio frequency emission is as above table. The limit on peak radio frequency emissions is 20 dB above the maximum permitted average emission limit **Note 2:** 

Measurements may be performed at a distance other than what is specified provided. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor as below, Frequency at or above 30 MHz: 20 dB/decade Frequency below 30 MHz: 40 dB/decade.

Report No.: FR813102 Page: 11 of 24

Report Version: Rev. 02



#### 3.1.3 Test Procedures

- 1. Measurement is made at a semi-anechoic chamber that incorporates a turntable allowing a EUT rotation of 360°. A continuously-rotating, remotely-controlled turntable is installed at the test site to support the EUT and facilitate determination of the direction of maximum radiation for each EUT emission frequency. The EUT is placed at test table. For emissions testing at or below 1 GHz, the table height is 80 cm above the reference ground plane. For emission measurements above 1 GHz, the table height is 1.5 m
- 2. Measurement is made with the antenna positioned in both the horizontal and vertical planes of polarization. The measurement antenna is varied in height (1m ~ 4m) above the reference ground plane to obtain the maximum signal strength. Distance between EUT and antenna is 3 m.
- 3. This investigation is performed with the EUT rotated 360°, the antenna height scanned between 1 m and 4 m, and the antenna rotated to repeat the measurements for both the horizontal and vertical antenna polarizations.

#### Note:

- Radiated emission below 1GHz
- 1. 120kHz measurement bandwidth of test receiver and Quasi-peak detector is for radiated emission
- Radiated emission above 1GHz / Peak value except fundamental

RBW=1MHz, VBW=3MHz and Peak detector

Radiated emission above 1GHz / Average value for field strength of fundamental and harmonics The average value is: Average = Peak value + 20log(Duty cycle) Where the duty factor is calculated from following formula:

3. 
$$20\log \text{ (Duty cycle)} = 20\log \frac{7* 0.15797 \text{ ms}}{100 \text{ ms}} = -39.13 \text{dB}$$

Please see page 22 for plotted duty


- 4. Radiated emission above 1GHz / Average value for other emissions RBW=1MHz, VBW=10Hz and Peak detector
- 5. Radiated emission Peak value for fundamental RBW=3MHz, VBW=10MHz and Peak detector

Report No.: FR813102

Page: 12 of 24



### 3.1.4 Test Setup

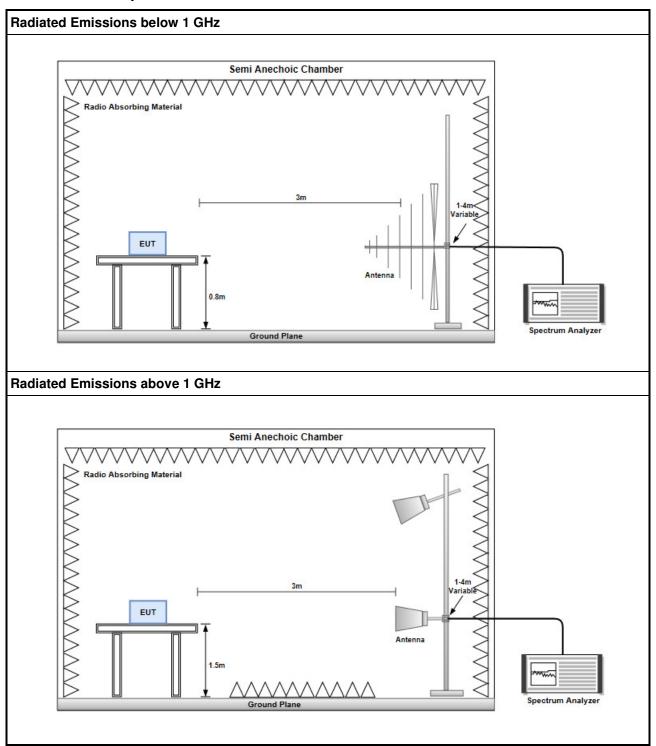


Report No.: FR813102

Page: 13 of 24

Report Version: Rev. 02



#### 3.1.5 Transmitter Radiated Unwanted Emissions (Below 1GHz)

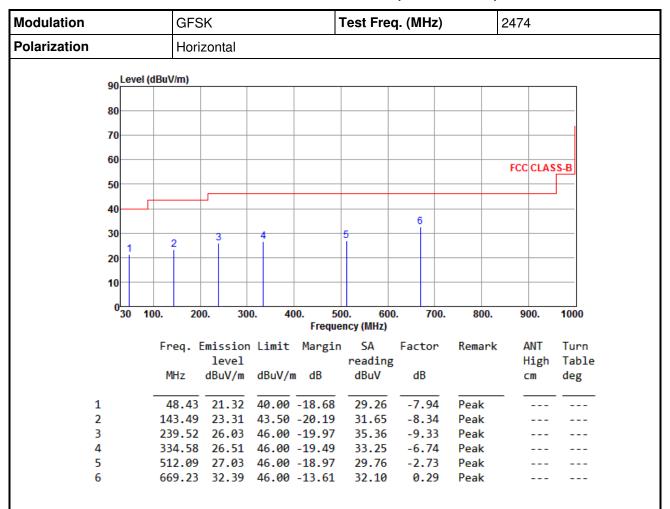

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) - Limit (dBuV/m).


Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

Report No.: FR813102

Page: 14 of 24

Report Version: Rev. 02



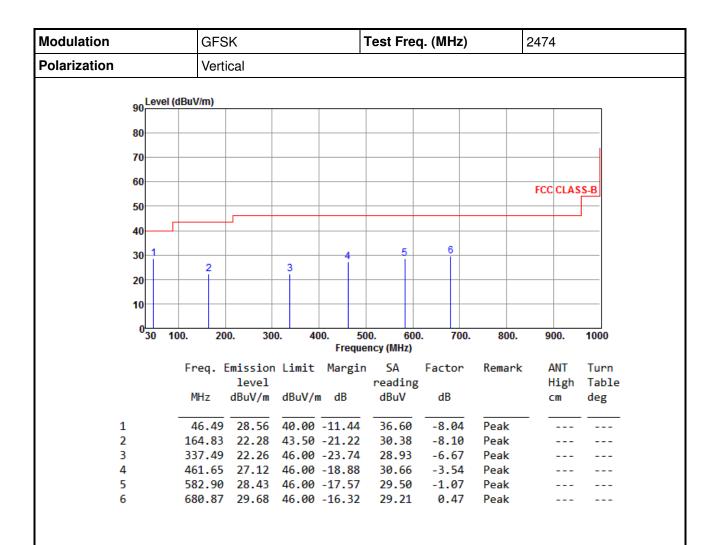

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) - Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.


Report No.: FR813102

Page: 15 of 24

Report Version: Rev. 02



#### 3.1.6 Transmitter Radiated Unwanted Emissions (Above 1GHz)

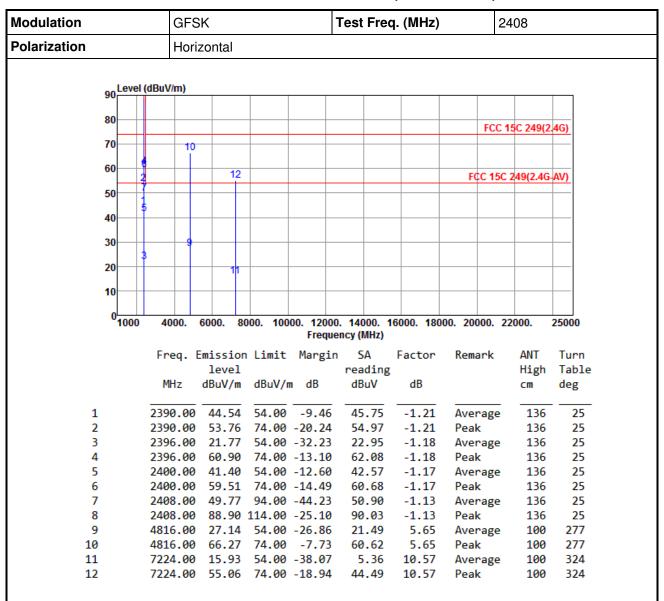

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	GFS	SK			Test Fred	ą. (MHz)		2408	
Polarization Vertical									
90 Leve	el (dBuV/m)								
	8								
80							FCC	15C 249(2	4G)
70								100210(2	1.5,
	10								
60	i i	12					FCC 15	C 249(2.4G	AV)
50	2	12					. 00 10	(2.170	
30									
40	5								_
30									
30									
20	3	11							
		- 1 1							
10									
10									
	0 4000.	6000. 80	000. 100	00. 12000	). 14000. 1	6000. 180	00. 20000.	22000.	25000
10 0 1000	0 4000.	6000. 80	000. 100		). 14000. 1 ency (MHz)	6000. 180	00. 20000.	22000.	25000
				Freque	ency (MHz)	6000. 1800 Factor	00. 20000. Remark	22000. ANT	25000 Turn
		6000. 80		Freque	ency (MHz)			ANT	
		Emission	Limit	Freque Margin	ency (MHz) s SA				Turn
01000	Freq. MHz	Emission level dBuV/m	dBuV/r	Freque Margin n dB	ency (MHz)  SA  reading  dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
0 <mark>100</mark> 0	Freq. 6 MHz 	Emission level dBuV/m 38.47	dBuV/r	Frequent Margin dB	ency (MHz) SA reading dBuV 39.68	Factor  dB  -1.21	Remark Average	ANT High cm	Turn Table deg
0 1000 1 2	Freq. I MHz 2390.00 2390.00	Emission level dBuV/m 38.47 50.51	dBuV/r 54.00	Margin dB -15.53 -23.49	ency (MHz)  SA  reading dBuV  39.68 51.72	Factor dB -1.21 -1.21	Remark  Average Peak	ANT High cm 331 331	Turn Table deg 100
0 1000 1 2 3	Freq. I MHz 2390.00 2390.00 2396.00	Emission level dBuV/m 38.47 50.51 15.37	dBuV/r 54.00 74.00 54.00	Margin dB -15.53 -23.49 -38.63	reading dBuV 39.68 51.72 16.55	Factor dB -1.21 -1.21 -1.18	Average Peak Average	ANT High cm 331 331 331	Turn Table deg 100 100
0 1000 1 2 3 4	Freq. I MHz 2390.00 2390.00 2396.00 2396.00	Emission level dBuV/m 38.47 50.51 15.37 54.50	dBuV/r 54.00 74.00 54.00 74.00	Margin  1 dB  -15.53 -23.49 -38.63 -19.50	reading dBuV  39.68 51.72 16.55 55.68	Factor  dB  -1.21 -1.21 -1.18 -1.18	Average Peak Average Peak	ANT High cm 331 331 331 331	Turn Table deg 100 100 100
0 1000 1 2 3 4 5	Freq. I MHz 2390.00 2390.00 2396.00 2396.00 2400.00	Emission level dBuV/m 38.47 50.51 15.37 54.50 38.15	dBuV/r 54.00 74.00 54.00 74.00 54.00	Margin  dB  -15.53 -23.49 -38.63 -19.50 -15.85	reading dBuV 39.68 51.72 16.55 55.68 39.32	Factor  dB  -1.21 -1.21 -1.18 -1.18 -1.17	Average Peak Average Peak Average	ANT High cm 331 331 331 331 331	Turn Table deg 100 100 100 100
0 1000 1 2 3 4 5 6	Freq. II MHz 2390.00 2390.00 2396.00 2396.00 2400.00	Emission level dBuV/m 38.47 50.51 15.37 54.50 38.15 52.43	dBuV/r 54.00 74.00 54.00 74.00 54.00 74.00	Margin  dB  -15.53 -23.49 -38.63 -19.50 -15.85 -21.57	sency (MHz) SA reading dBuV 39.68 51.72 16.55 55.68 39.32 53.60	Factor  dB  -1.21 -1.21 -1.18 -1.18 -1.17 -1.17	Average Peak Average Peak Average Peak	ANT High cm 331 331 331 331 331	Turn Table deg 100 100 100 100 100
0 1000 1 2 3 4 5	MHz  2390.00 2390.00 2396.00 2396.00 2400.00 2400.00 2408.00	Emission level dBuV/m 38.47 50.51 15.37 54.50 38.15 52.43 45.26	DLimit dBuV/r 54.00 74.00 54.00 74.00 94.00 94.00	Margin  dB  -15.53 -23.49 -38.63 -19.50 -15.85 -21.57 -48.74	sency (MHz) SA reading dBuV 39.68 51.72 16.55 55.68 39.32 53.60 46.39	Factor  dB  -1.21 -1.21 -1.18 -1.18 -1.17	Average Peak Average Peak Average Peak Average	ANT High cm 331 331 331 331 331 331	Turn Table deg 100 100 100 100
0 1000 1 2 3 4 5 6 7	Freq. II MHz 2390.00 2390.00 2396.00 2396.00 2400.00	Emission level dBuV/m 38.47 50.51 15.37 54.50 38.15 52.43 45.26 84.39	dBuV/r 54.00 74.00 54.00 54.00 74.00 94.00 114.00	Margin  dB  -15.53 -23.49 -38.63 -19.50 -15.85 -21.57 -48.74 -29.61	sency (MHz) SA reading dBuV 39.68 51.72 16.55 55.68 39.32 53.60	Factor  dB  -1.21 -1.21 -1.18 -1.18 -1.17 -1.17 -1.13	Average Peak Average Peak Average Peak	ANT High cm 331 331 331 331 331 331 331 331	Turn Table deg 100 100 100 100 100 100
0 1000 1 2 3 4 5 6 7 8	MHz  2390.00 2390.00 2396.00 2396.00 2400.00 2400.00 2408.00 2408.00	Emission level dBuV/m 38.47 50.51 15.37 54.50 38.15 52.43 45.26 84.39 21.37	54.00 74.00 54.00 74.00 54.00 74.00 94.00 114.00 54.00	Margin  dB  -15.53 -23.49 -38.63 -19.50 -15.85 -21.57 -48.74 -29.61	SA reading dBuV 39.68 51.72 16.55 55.68 39.32 53.60 46.39 85.52	Factor  dB  -1.21 -1.21 -1.18 -1.18 -1.17 -1.17 -1.13 -1.13	Average Peak Average Peak Average Peak Average Peak	ANT High cm 331 331 331 331 331 331 331 331	Turn Table deg 100 100 100 100 100 100 100
0 1000 1 2 3 4 5 6 7 8 9	MHz  2390.00 2390.00 2396.00 2396.00 2400.00 2400.00 2408.00 2408.00 4816.00	Emission level dBuV/m 38.47 50.51 15.37 54.50 38.15 52.43 45.26 84.39 21.37 60.50	54.00 74.00 54.00 74.00 54.00 74.00 94.00 114.00 54.00 74.00	Margin  dB  -15.53 -23.49 -38.63 -19.50 -15.85 -21.57 -48.74 -29.61 -32.63	SA reading dBuV 39.68 51.72 16.55 55.68 39.32 53.60 46.39 85.52 15.72	Factor  dB  -1.21 -1.21 -1.18 -1.18 -1.17 -1.17 -1.13 -1.13 5.65	Average Peak Average Peak Average Peak Average Peak Average	ANT High cm 331 331 331 331 331 331 331 327 327	Turn Table deg  100 100 100 100 100 100 100 100 100 1


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB) \*Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR813102

Page: 17 of 24

Report Version: Rev. 02



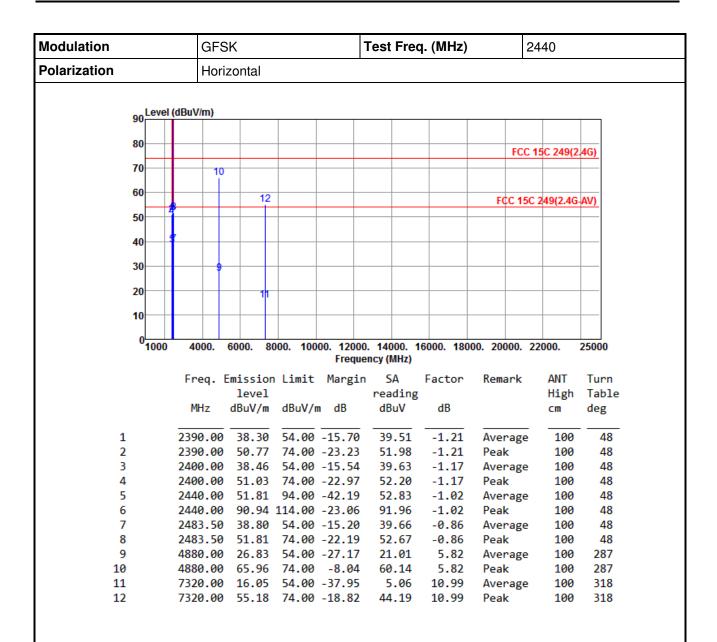

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) - Limit (dBuV/m).


Report No.: FR813102

Report Version: Rev. 02

The previous version of the test report has been cancelled and replaced by new version.

Page: 18 of 24



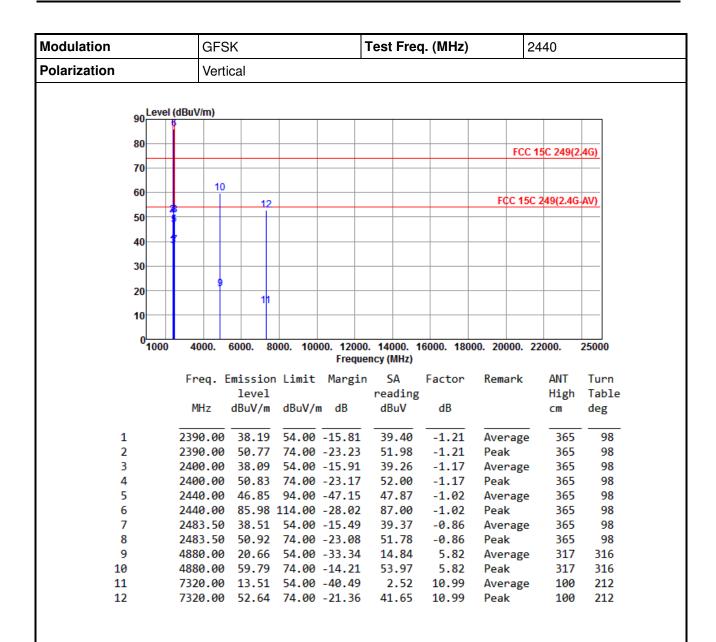

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) - Limit (dBuV/m).

Report No.: FR813102

Page: 19 of 24

Report Version: Rev. 02



Modulation				GF	GFSK			Test	Test Freq. (MHz)			24	74		
Polarization				Ho	rizo	ntal									
	90	Level	(dBu	V/m)											
	80												FCC 1	5C 249(2	.4G)
	70			-	5										
	60					8	3					FC	C 15C 2	249(2.4G	-AV)
	50		3												
	40						+								
	30			+			$\vdash$								
	20			-		-	+								-

	1000	4000.	0000.	. 1000		icy (MHz)	1000	. 20000. Z	2000.	23000
		Freq.	Emission	n Limit	Margin	SA	Factor	Remark	ANT	Turn
			level			reading			High	Table
		MHz	dBuV/m	dBuV/m	dB	dBuV	dB		cm	deg
1		2474.00	52.91	94.00	-41.09	53.80	-0.89	Average	100	46
2		2474.00	92.04	114.00	-21.96	92.93	-0.89	Peak	100	46
3		2483.50	43.29	54.00	-10.71	44.15	-0.86	Average	100	46
4		2483.50	56.02	74.00	-17.98	56.88	-0.86	Peak	100	46
5		4948.00	24.41	54.00	-29.59	18.38	6.03	Average	100	292
6		4948.00	63.54	74.00	-10.46	57.51	6.03	Peak	100	292
7		7422.00	16.84	54.00	-37.16	5.49	11.35	Average	100	334
8		7422.00	55.97	74.00	-18.03	44.62	11.35	Peak	100	334

10000. 12000. 14000. 16000. 18000. 20000. 22000.

Page: 20 of 24

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB) \*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) - Limit (dBuV/m).

Report No.: FR813102

Report Version: Rev. 02



Modulation	GFSK	Test Freq. (MHz)	2474
Polarization	Vertical		

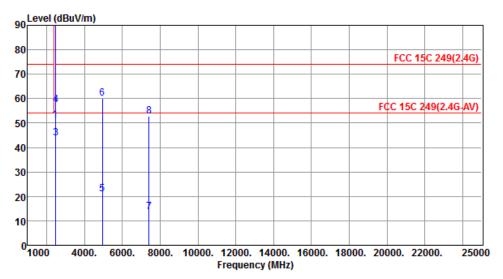

	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB		cm	deg
1	2474.00	51.25	94.00	-42.75	52.14	-0.89	Average	367	63
2	2474.00	90.38	114.00	-23.62	91.27	-0.89	Peak	367	63
3	2483.50	43.96	54.00	-10.04	44.82	-0.86	Average	367	63
4	2483.50	57.38	74.00	-16.62	58.24	-0.86	Peak	367	63
5	4948.00	20.92	54.00	-33.08	14.89	6.03	Average	312	320
6	4948.00	60.05	74.00	-13.95	54.02	6.03	Peak	312	320
7	7422.00	13.60	54.00	-40.40	2.25	11.35	Average	112	194
8	7422.00	52.73	74.00	-21.27	41.38	11.35	Peak	112	194

Page: 21 of 24

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)


\*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) - Limit (dBuV/m).

Report No.: FR813102

Report Version: Rev. 02



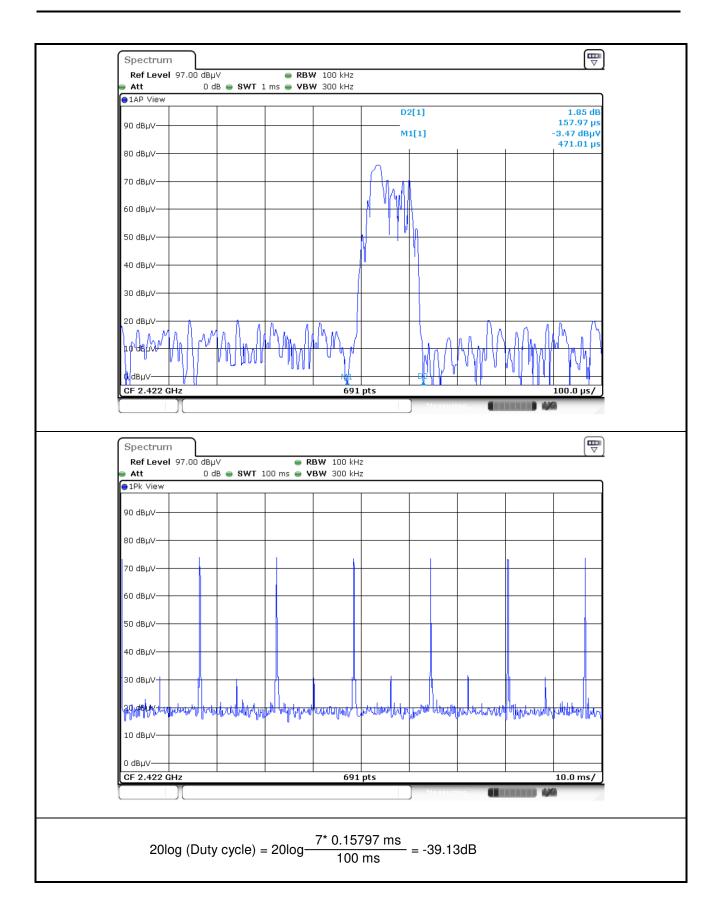

Report No.: FR813102 Page: 22 of 24

Report Version: Rev. 02




### 3.2 20dB and Occupied Bandwidth

#### 3.2.1 Test Procedures


- 1. Set resolution bandwidth (RBW) = 100 kHz, Video bandwidth = 300 kHz.
- 2. Detector = Peak(20 dB bandwidth) / Sample(Occupied bandwidth), Trace mode = max hold
- 3. Sweep = auto couple, Allow the trace to stabilize.
- 4. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 20dB relative to the maximum level measured in the fundamental emission.
- 5. Use the occupied measurement function of specturm analyzer to measure 99% occupied bandwidth

#### 3.2.2 Test Setup



#### 3.2.3 20dB and Occupied Bandwidth

Freq. (MHz)	20dB Bandwidth (MHz)	Occupied Bandwidth (MHz)		
2408	2.66	2.76		
2440	2.71	2.77		
2474	2.73	2.70		

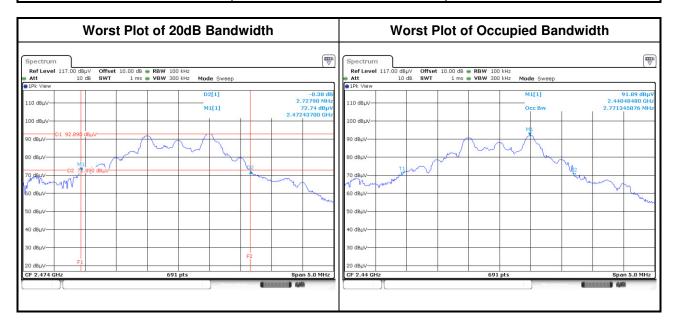

Report No.: FR813102 Page: 23 of 24



## 4 Test laboratory information

Established in 2012, ICC provides foremost EMC & RF Testing and advisory consultation services by our skilled engineers and technicians. Our services employ a wide variety of advanced edge test equipment and one of the widest certification extents in the business.

International Certification Corp (EMC and Wireless Communication Laboratory), it is our definitive objective is to institute long term, trust-based associations with our clients. The expectation we set up with our clients is based on outstanding service, practical expertise and devotion to a certified value structure. Our passion is to grant our clients with best EMC / RF services by oriented knowledgeable and accommodating staff.

Our Test sites are located at Linkou District and Kwei Shan District. Location map can be found on our website <a href="http://www.icertifi.com.tw">http://www.icertifi.com.tw</a>.

#### Linkou

Tel: 886-2-2601-1640 No. 30-2, Ding Fwu Tsuen, Lin Kou District, New Taipei City,

Taiwan, R.O.C.

#### Kwei Shan

Tel: 886-3-271-8666 No. 3-1, Lane 6, Wen San 3rd St., Kwei Shan District, Tao Yuan City 333, Taiwan, R.O.C.

#### Kwei Shan Site II

Tel: 886-3-271-8640

No. 14-1, Lane 19, Wen San 3rd St., Kwei Shan District, Tao Yuan City 333, Taiwan, R.O.C.

Page: 24 of 24

If you have any suggestion, please feel free to contact us as below information.

Tel: 886-3-271-8666 Fax: 886-3-318-0155

Email: ICC\_Service@icertifi.com.tw

==END==

Report No.: FR813102