

Appendix A

RF Test Data for 5.8G WLAN (Conducted Measurement)

Product Name: remote control

Trade Mark:  FUNSNAP

Test Model: DIVA-01

Environmental Conditions


Temperature:	24.6° C
Relative Humidity:	54.1%
ATM Pressure:	100.0 kPa
Test Engineer:	Carl Fu
Supervised by:	Li Huan

A.1 Duty Cycle


ANT0

Test Mode	Test Frequency (MHz)	Duty Cycle (%)	10log(1/x) Factor (dB)	1/B Minimum VBW(KHz)
11A	5785	96.75	0.14	0.01
11N20 SISO	5785	96.44	0.16	0.01

On Time and Duty Cycle

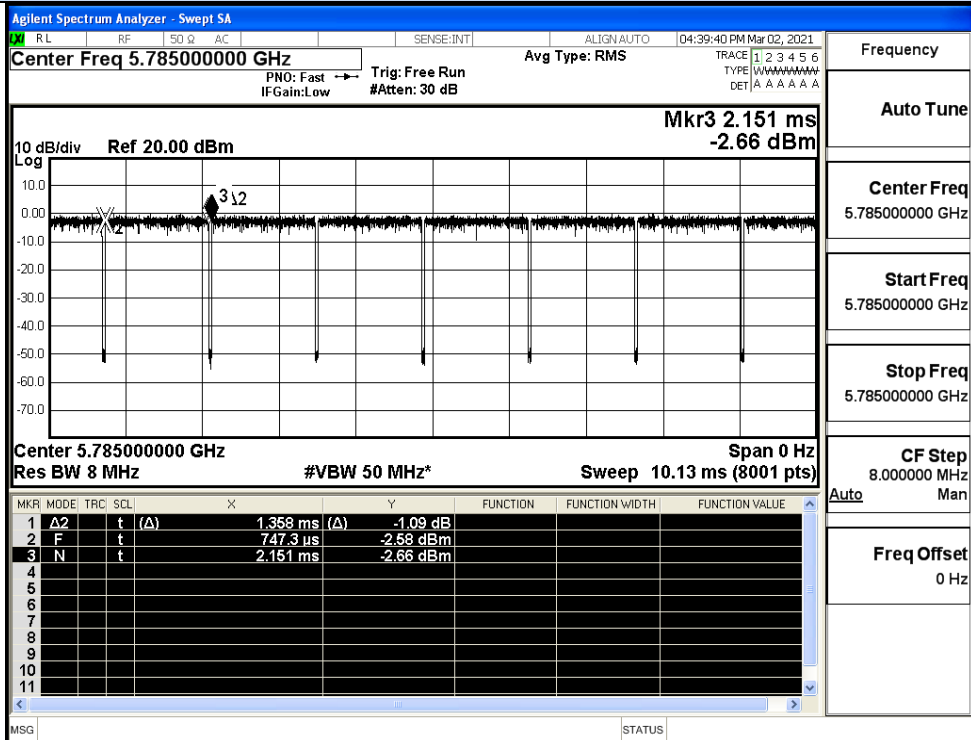

IEEE 802.11a

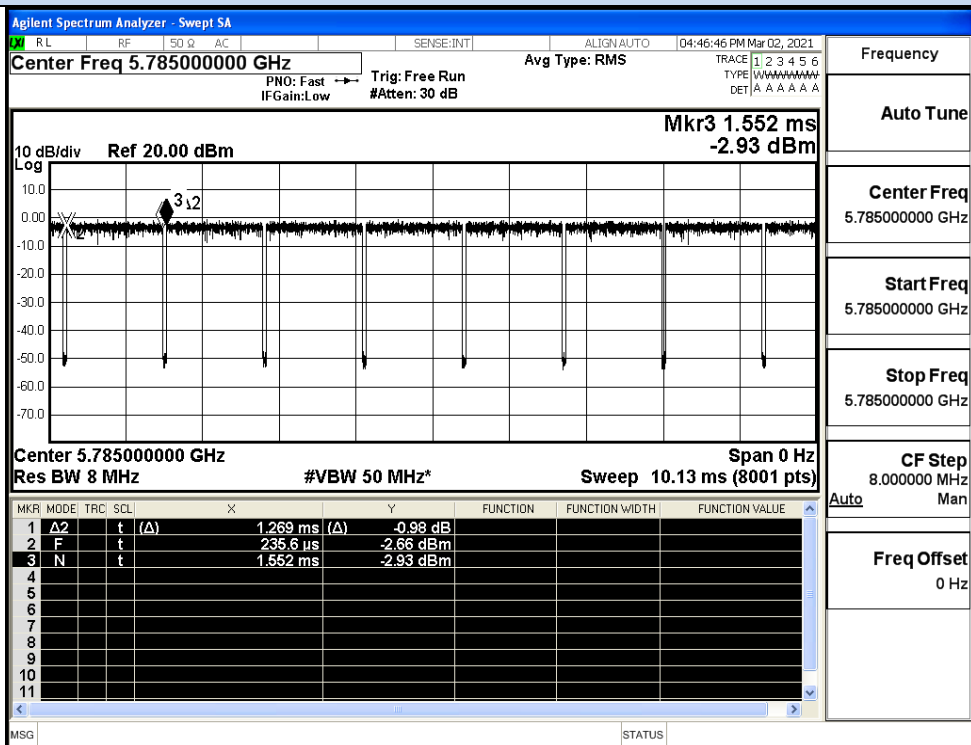


IEEE 802.11n HT20


ANT1

Test Mode	Test Frequency (MHz)	Duty Cycle (%)	10log(1/x) Factor (dB)	1/B Minimum VBW(KHz)
11A	5785	96.66	0.15	0.01
11N20 SISO	5785	96.44	0.16	0.01

On Time and Duty Cycle

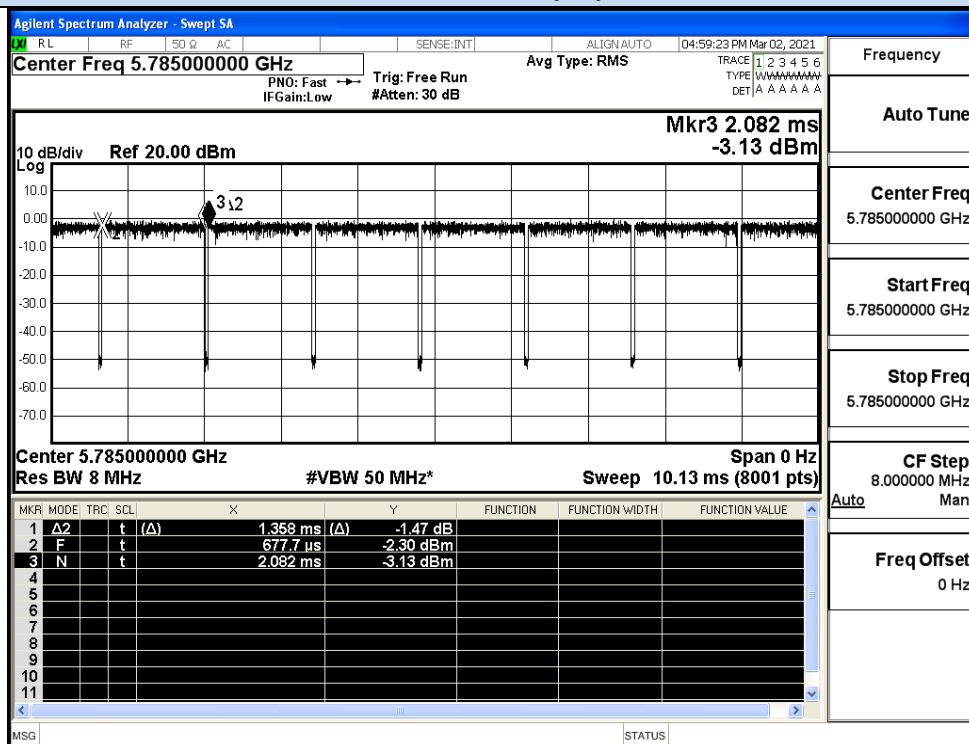

IEEE 802.11a

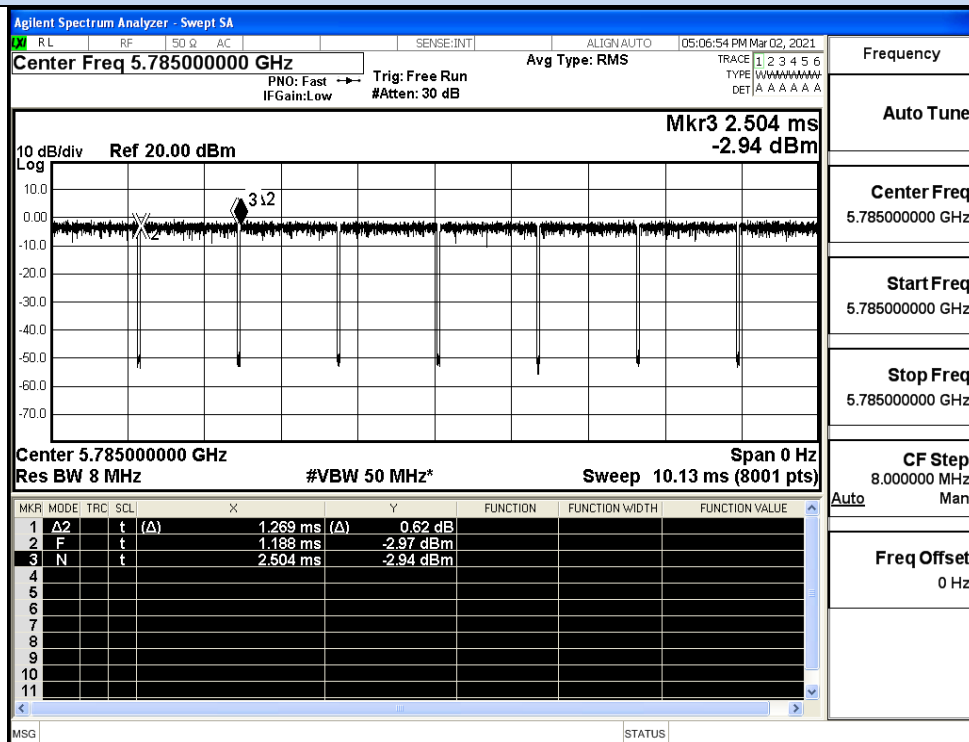

IEEE 802.11n HT20

A.2 Maximum Conduct Output Power**ANT0**


Test Mode	Channel	Frequency (MHz)	AVG Conducted Power (dBm)	Duty Cycle Factor(dB)	Report Conducted Power(dBm)	Limit (dBm)	Verdict
11A	149	5745	6.18	0.11	6.29	30	Pass
	157	5785	6.19	0.14	6.33		Pass
	161	5805	6.39	0.10	6.49		Pass
11N20 SISO	149	5745	4.03	0.08	4.11	30	Pass
	157	5785	4.10	0.16	4.26		Pass
	161	5805	4.05	0.12	4.17		Pass

ANT1


Test Mode	Channel	Frequency (MHz)	AVG Conducted Power (dBm)	Duty Cycle Factor(dB)	Report Conducted Power(dBm)	Limit (dBm)	Verdict
11A	149	5745	6.25	0.10	6.35	30	Pass
	157	5785	6.04	0.15	6.19		Pass
	161	5805	6.14	0.12	6.26		Pass
11N20 SISO	149	5745	4.16	0.13	4.29	30	Pass
	157	5785	4.04	0.16	4.20		Pass
	161	5805	4.07	0.09	4.16		Pass

MIMO

Test Mode	Channel	Frequency (MHz)	ANT 0 Report Conducted Power(dBm)	ANT 1 Report Conducted Power(dBm)	MIMO Report Conducted Power(dBm)	Limit (dBm)	Verdict
11N20	149	5745	4.11	4.29	7.21	30	Pass
	157	5785	4.26	4.20	7.24		Pass
	161	5805	4.17	4.16	7.18		Pass

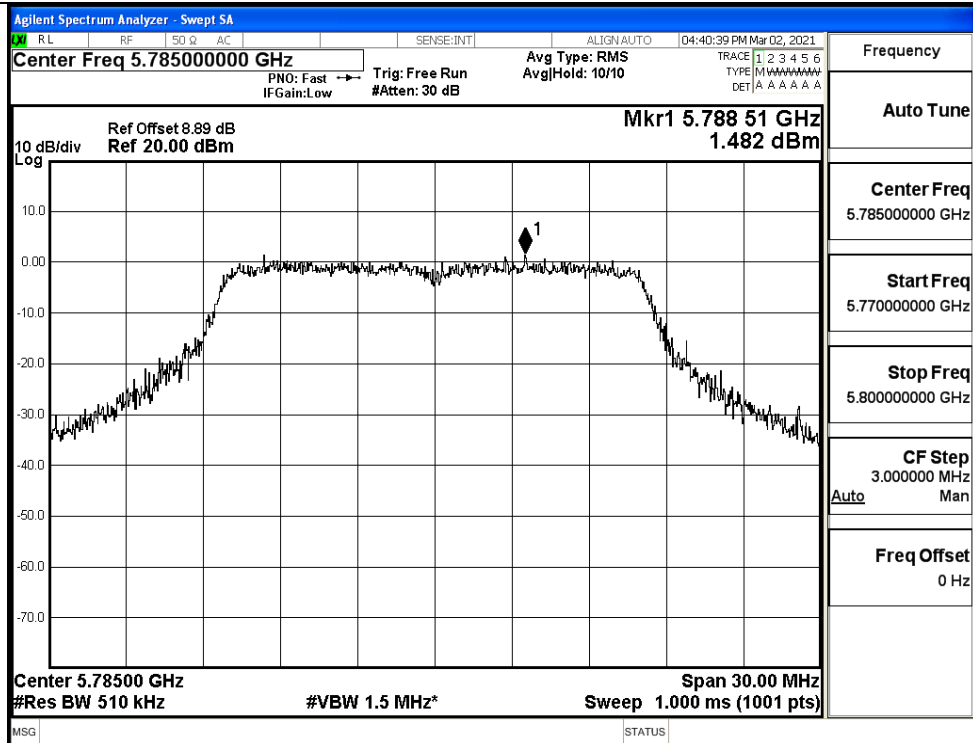


IEEE 802.11na / Channel 157 / 5785MHz

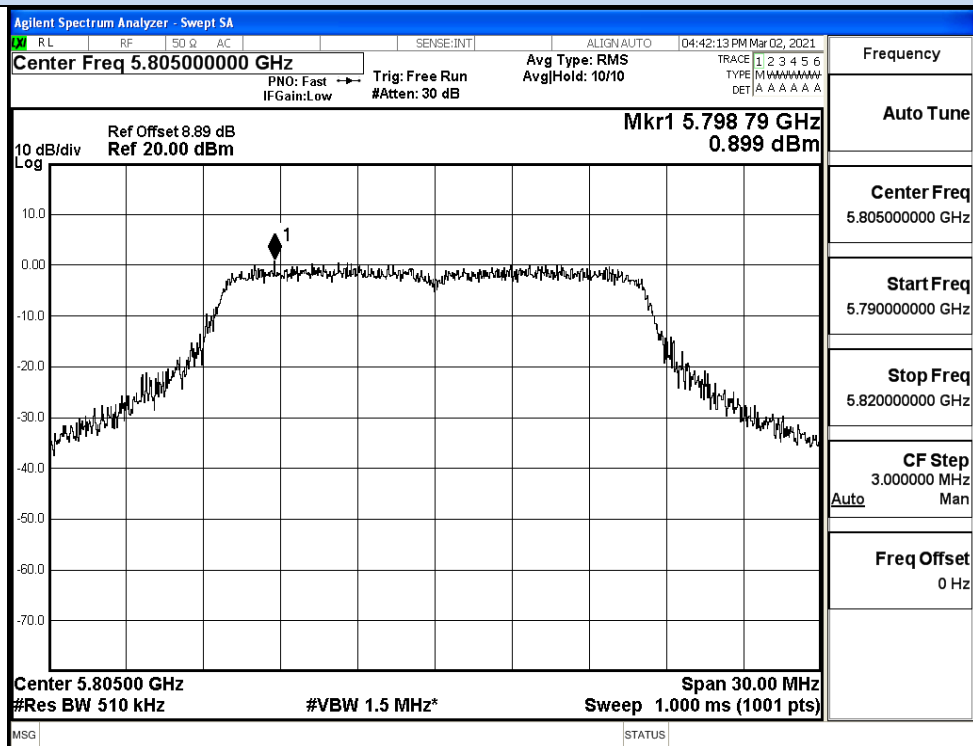


IEEE 802.11na / Channel 165 / 5805MHz


Power Spectral Density

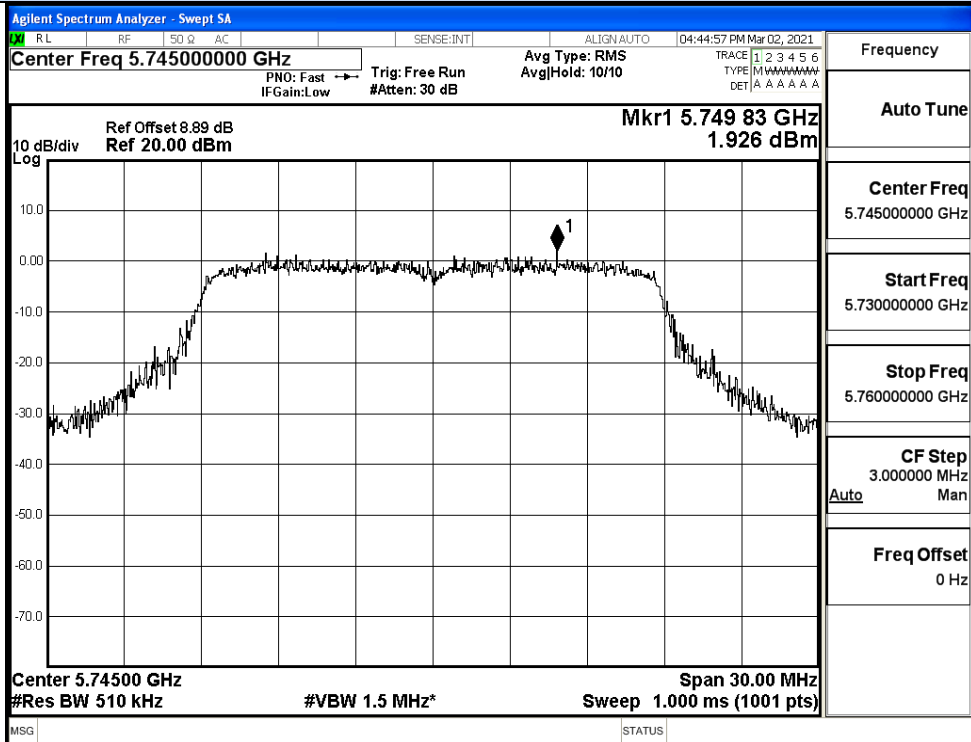

IEEE 802.11n20 / Channel 149 / 5745MHz

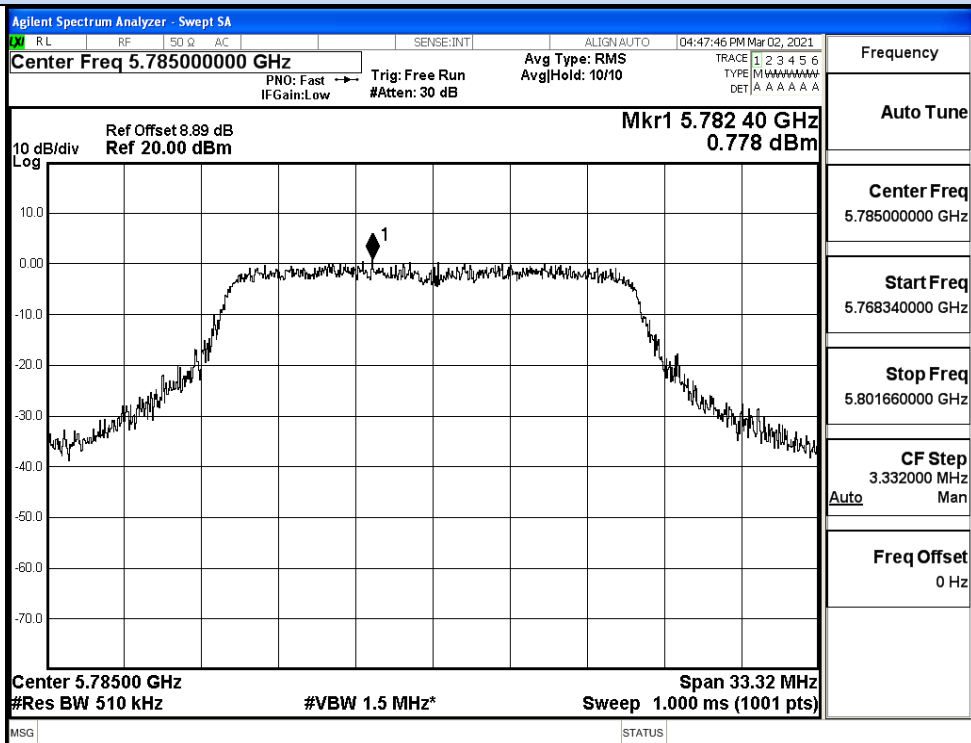

IEEE 802.11n20 / Channel 157 / 5785MHz

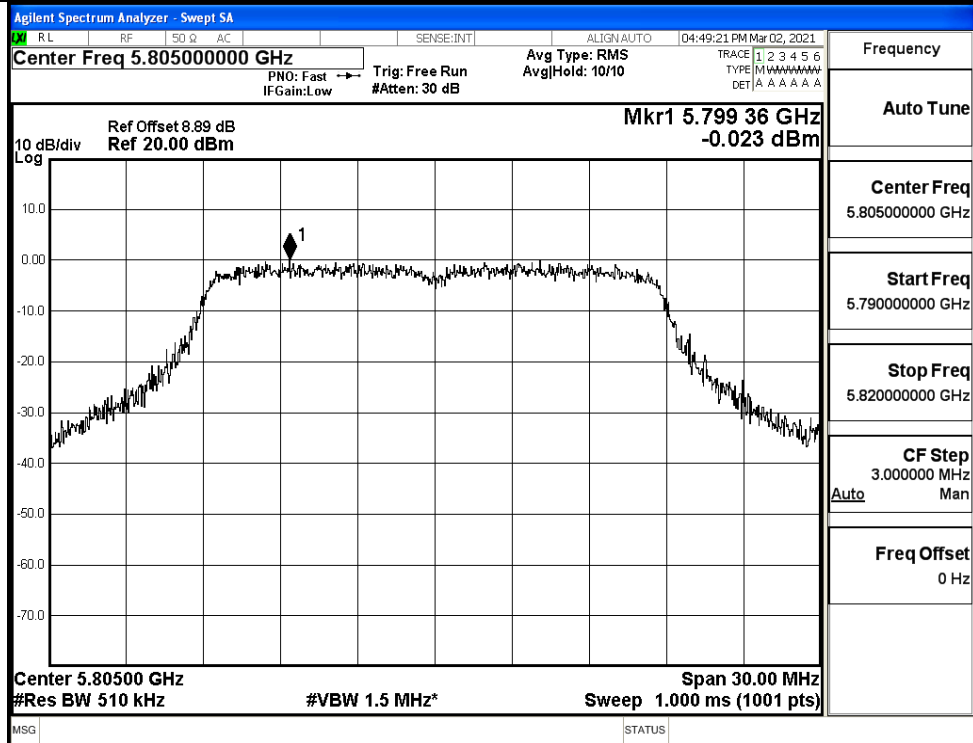


IEEE 802.11n20 / Channel 165 / 5805MHz


ANT1

Test Mode	Channel	Frequency (MHz)	Power Density (dBm/500KHz)	Duty Cycle Factor (dB)	RBW Factor (dB)	Report Power Density (dBm/500KHz)	Limit (dBm/500KHz)	Verdict
11A	149	5745	1.73	0.10	0	1.83	30	Pass
	157	5785	1.01	0.15	0	1.16		Pass
	161	5805	0.94	0.12	0	1.06		Pass
11N20 SISO	149	5745	1.34	0.13	0	1.47	30	Pass
	157	5785	0.48	0.16	0	0.64		Pass
	161	5805	0.54	0.09	0	0.63		Pass


Power Spectral Density

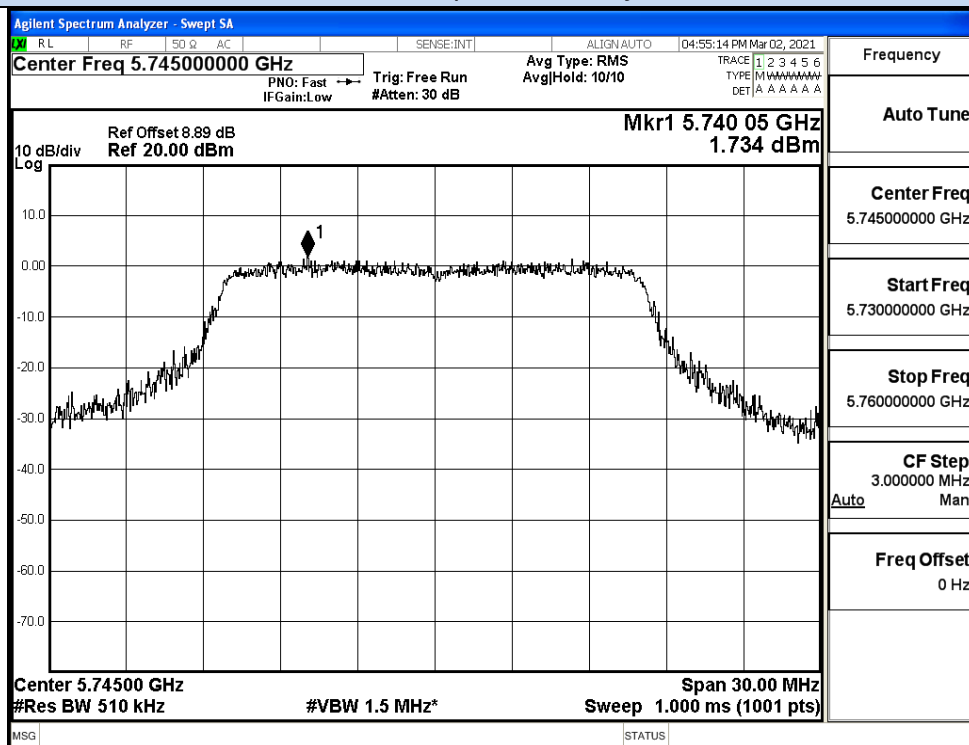

IEEE 802.11a / Channel 149 / 5745MHz

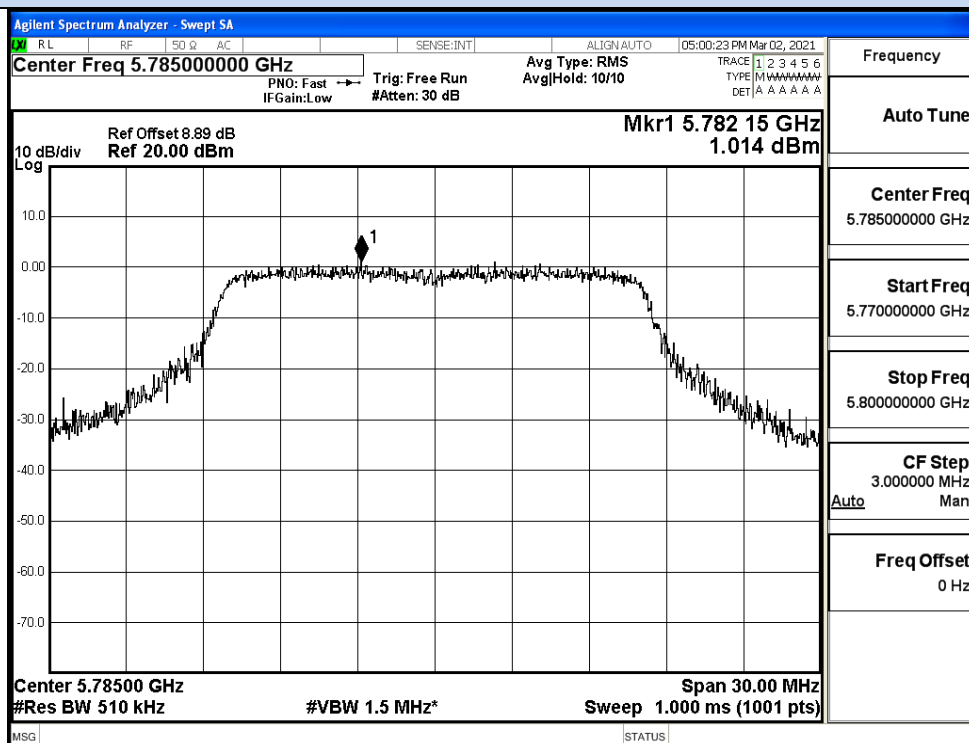


IEEE 802.11na / Channel 157 / 5785MHz

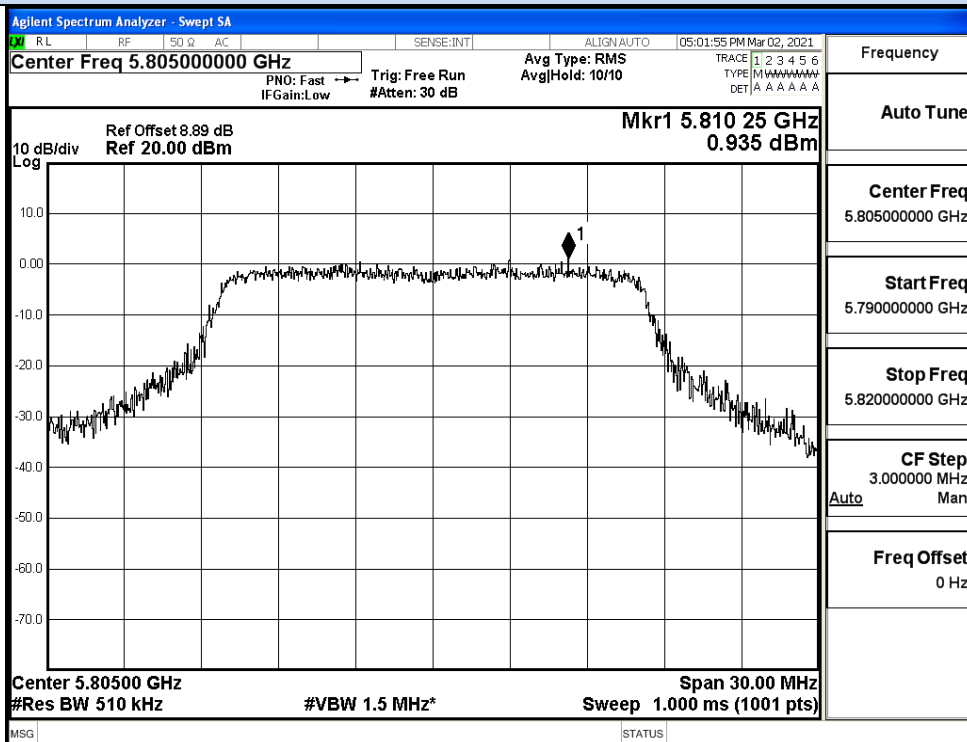


IEEE 802.11na / Channel 165 / 5805MHz


Power Spectral Density

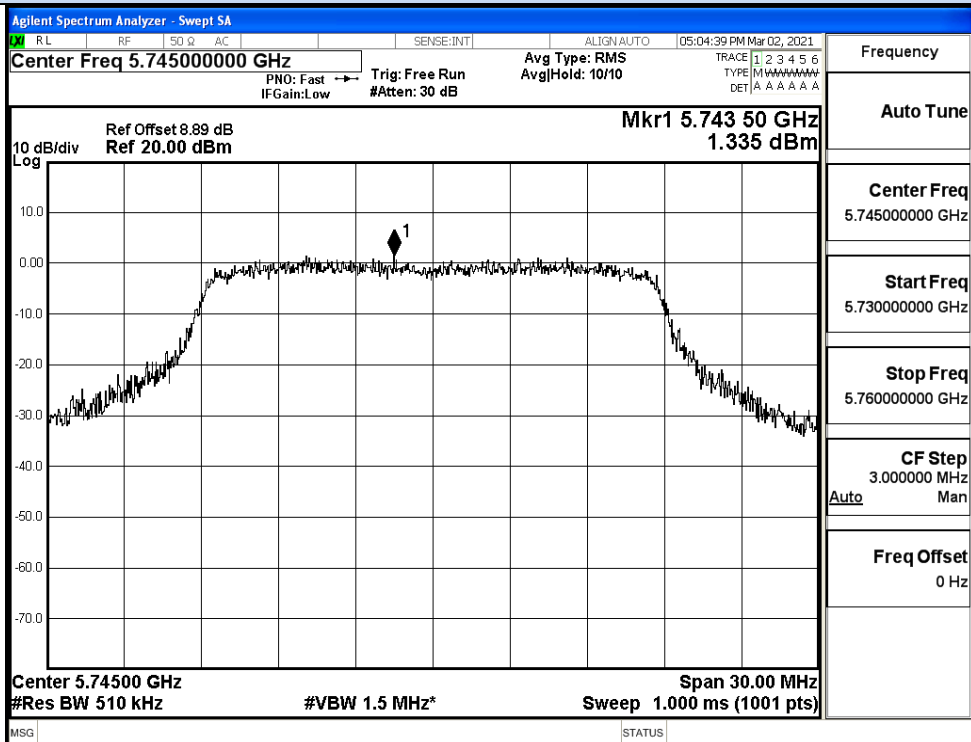

IEEE 802.11n20 / Channel 149 / 5745MHz

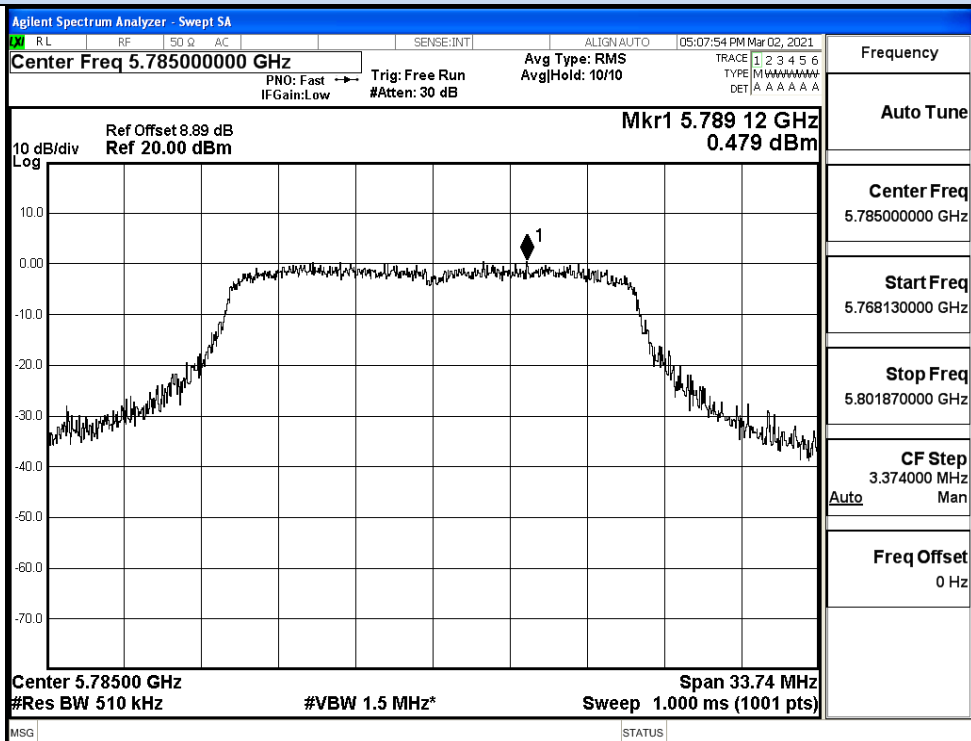

IEEE 802.11n20 / Channel 157 / 5785MHz

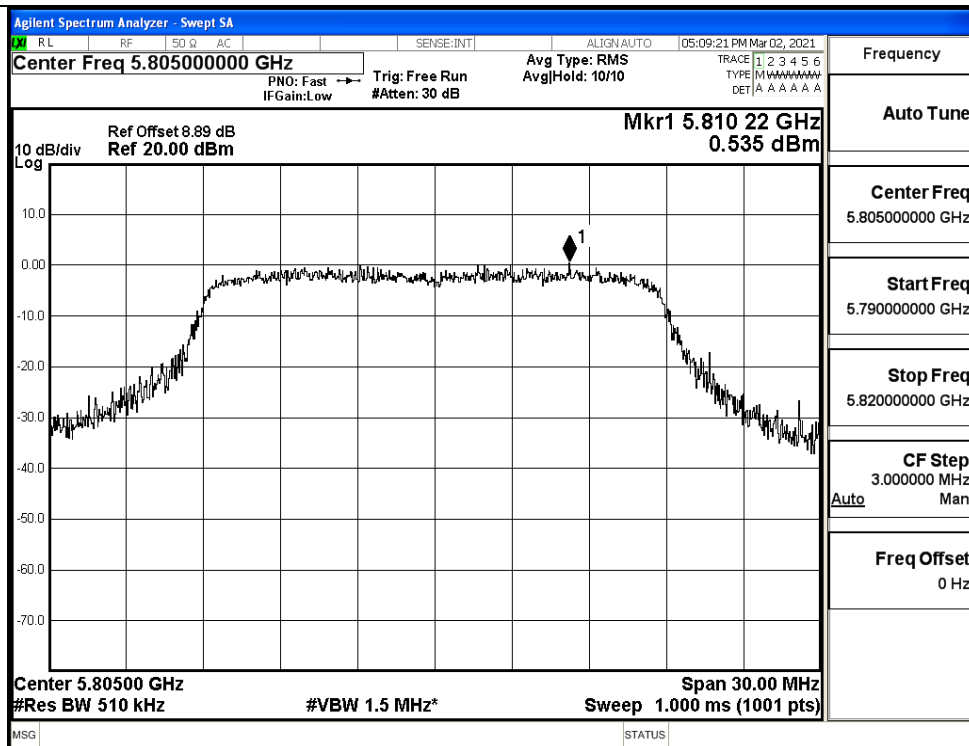

IEEE 802.11n20 / Channel 165 / 5805MHz


MIMO


Test Mode	Channel	Frequency (MHz)	ANT 0 Power Density (dBm/500K Hz)	ANT 1 Power Density (dBm/500K Hz)	MIMO Power Density (dBm/500K Hz)	Duty Cycle Factor (dB)	RBW Factor (dB)	Report Power Density (dBm/500K Hz)	Report Power Density (dBm/500K Hz)	Verdict
11N20	149	5745	1.93	1.34	4.66	0.11	0	4.77	30	Pass
	157	5785	0.78	0.48	3.64	0.09	0	3.73		Pass
	161	5805	-0.02	0.54	3.28	0.07	0	3.35		Pass

A.4 Emission Bandwidth


ANT0

Test Mode	Channel	Frequency (MHz)	6dB Bandwidth (MHz)	99% Bandwidth (MHz)	Limit (MHz)	Verdict
11A	149	5745	16.33	16.496	>=0.5	Pass
	157	5785	16.10	16.466		Pass
	161	5805	16.34	16.477		Pass
11N20 SISO	149	5745	16.96	17.652	>=0.5	Pass
	157	5785	16.66	17.630		Pass
	161	5805	16.71	17.635		Pass

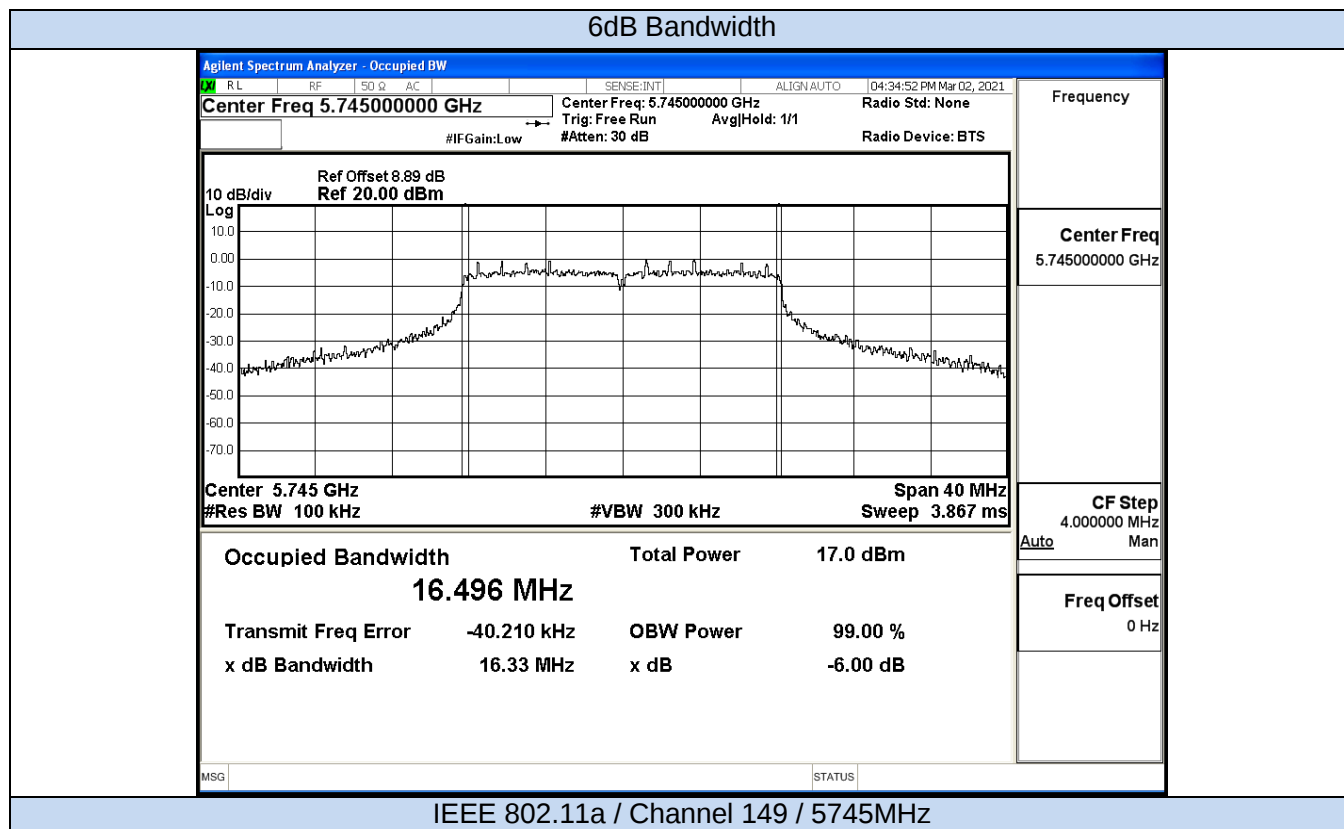

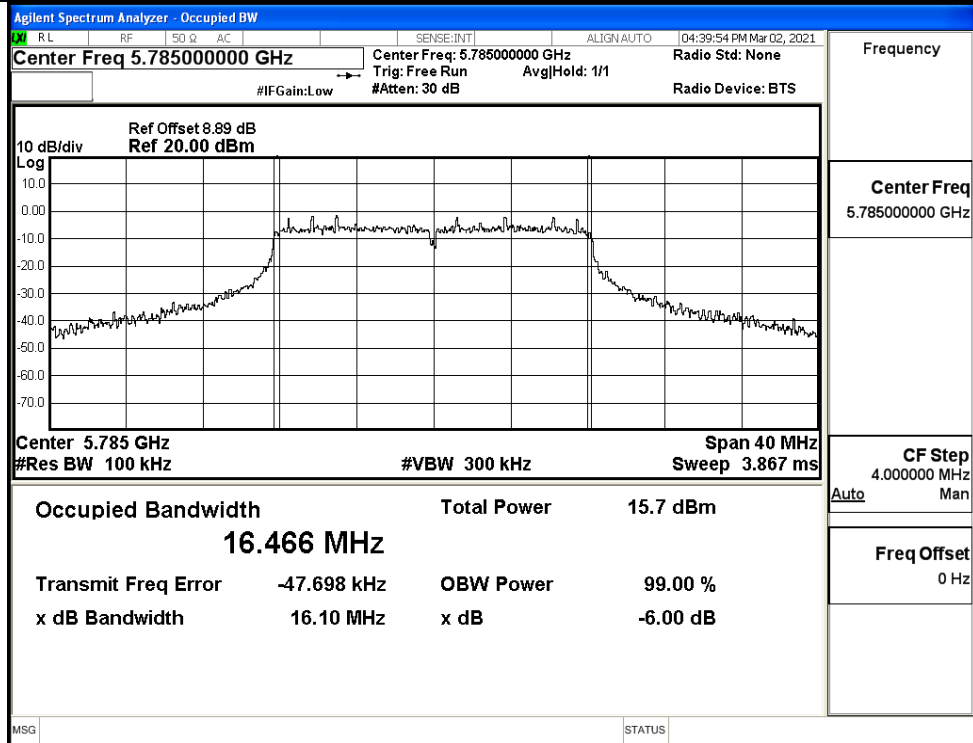


IEEE 802.11a / Channel 157 / 5785MHz

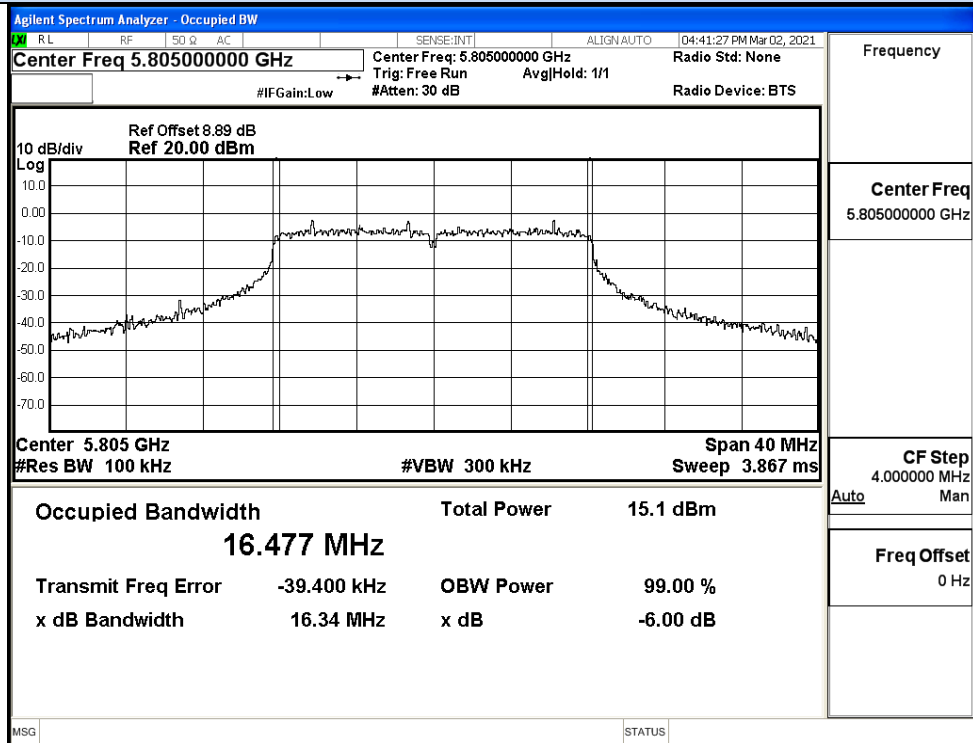


IEEE 802.11a / Channel 165 / 5805MHz


6dB Bandwidth

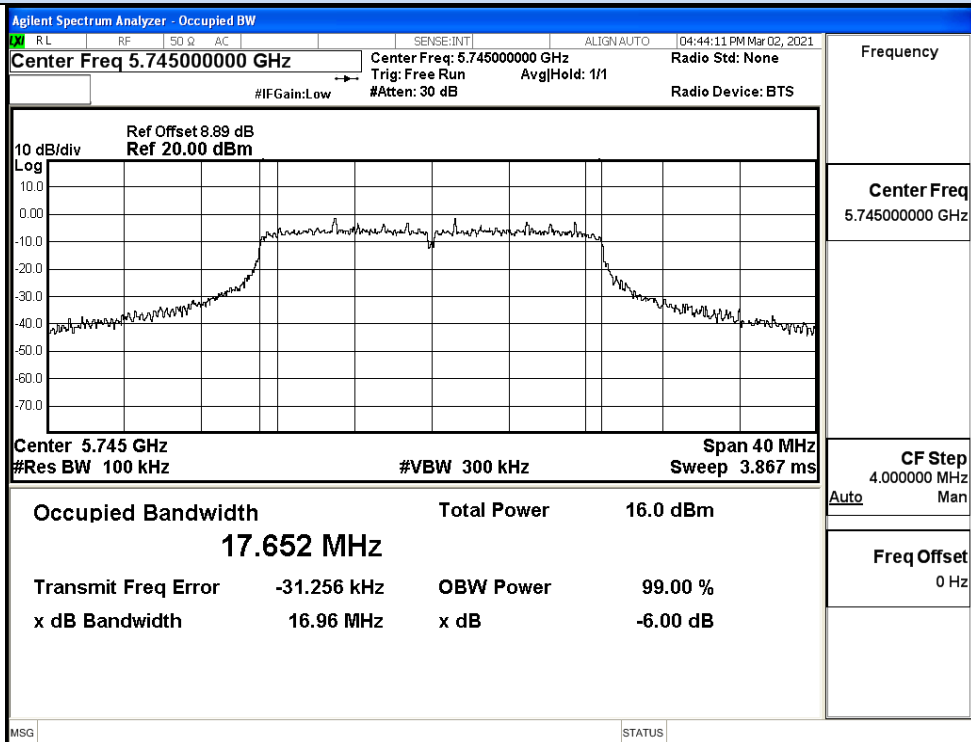

IEEE 802.11n20 / Channel 149 / 5745MHz

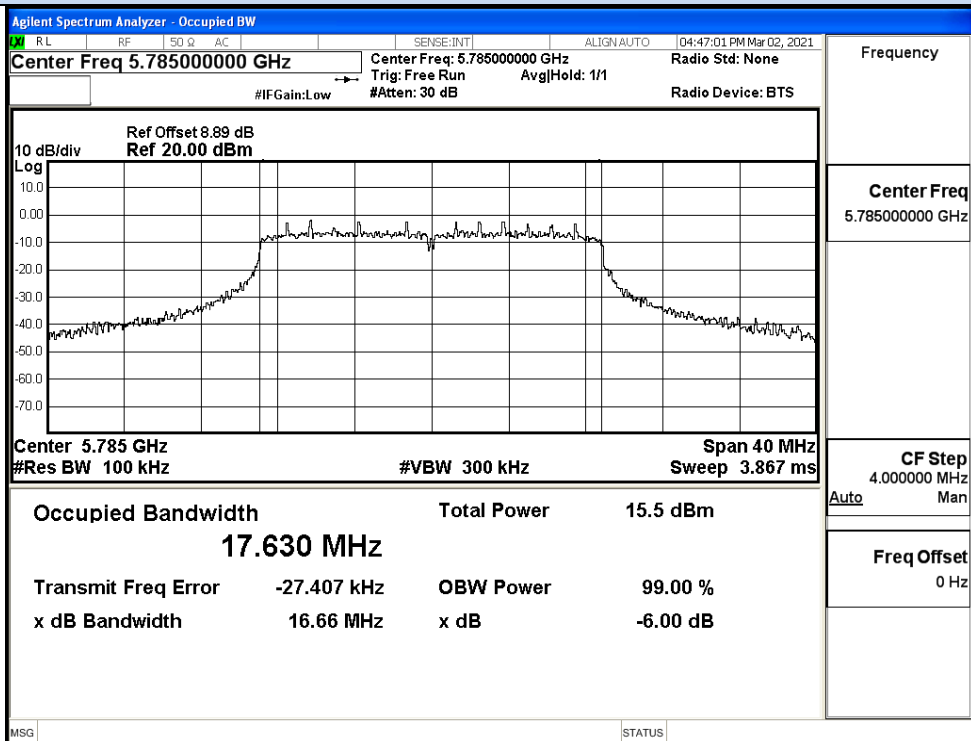

IEEE 802.11n20 / Channel 157 / 5785MHz

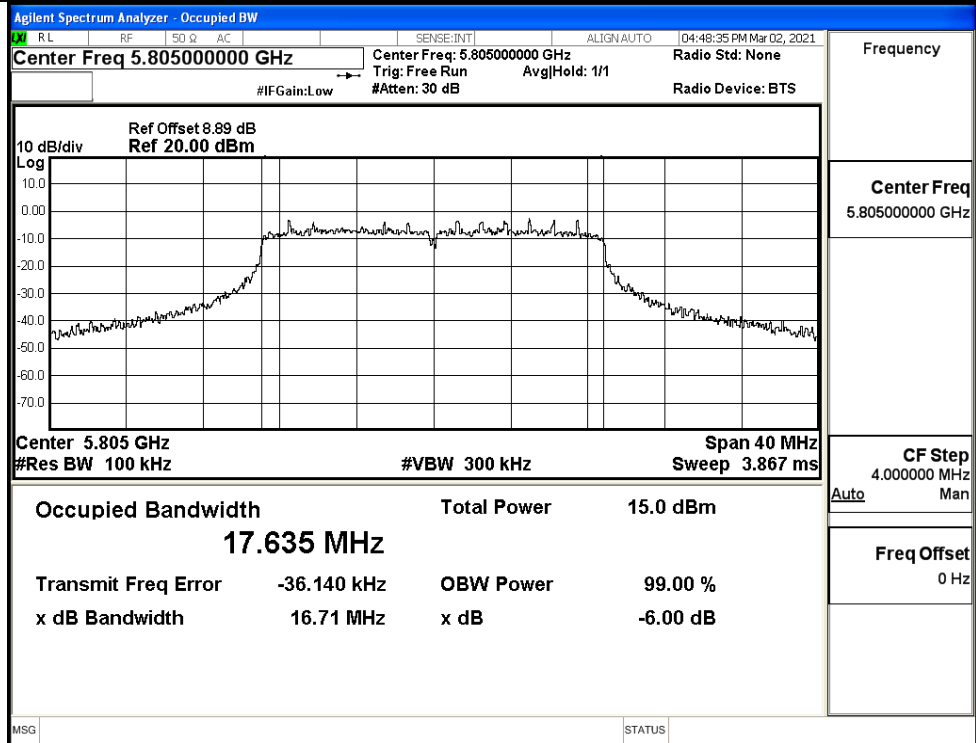


IEEE 802.11n20 / Channel 165 / 5805MHz


ANT1

Test Mode	Channel	Frequency (MHz)	6dB Bandwidth (MHz)	99% Bandwidth (MHz)	Limit (MHz)	Verdict
11A	149	5745	15.74	16.483	>=0.5	Pass
	157	5785	15.98	16.497		Pass
	161	5805	16.33	16.485		Pass
11N20 SISO	149	5745	16.98	17.655	>=0.5	Pass
	157	5785	16.87	17.642		Pass
	161	5805	16.46	17.633		Pass


6dB Bandwidth

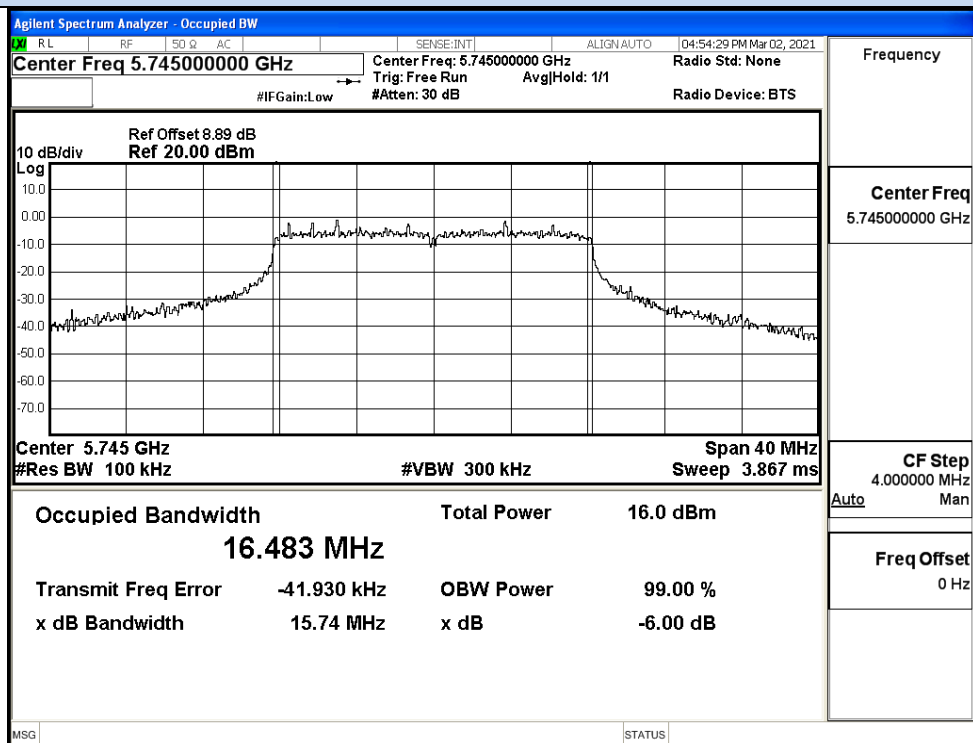

IEEE 802.11a / Channel 149 / 5745MHz

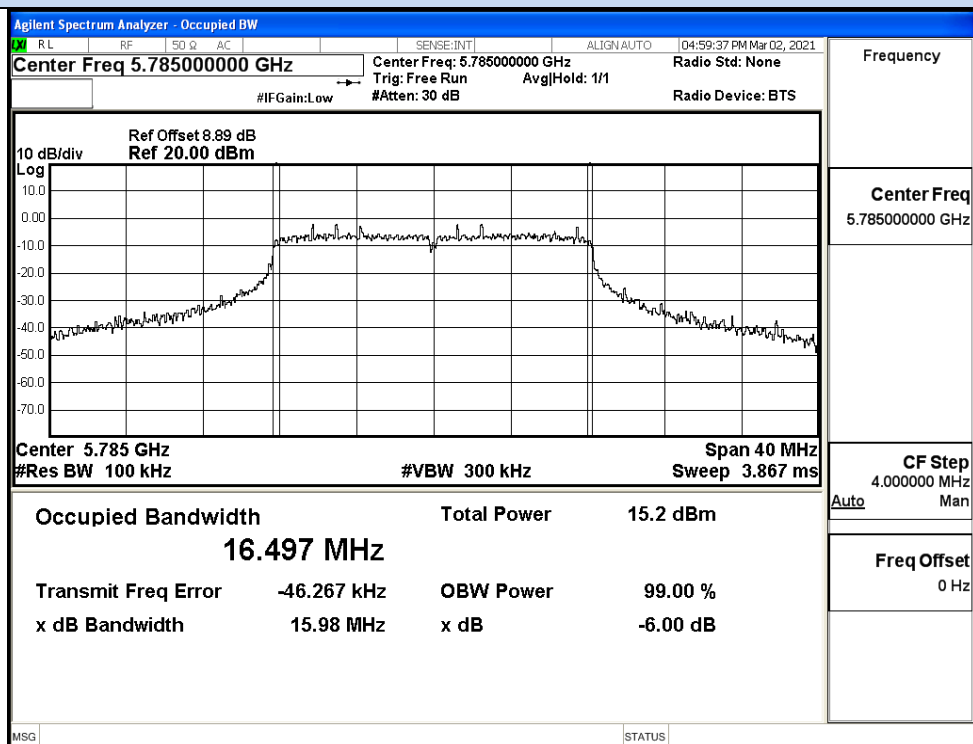


IEEE 802.11a / Channel 157 / 5785MHz

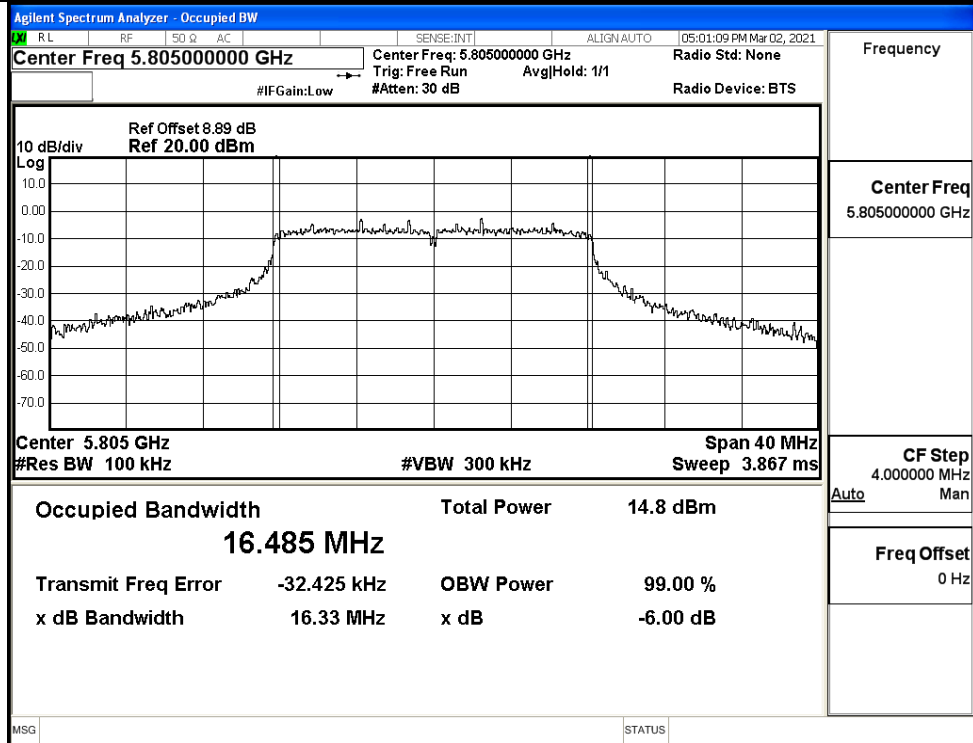


IEEE 802.11a / Channel 165 / 5805MHz


6dB Bandwidth

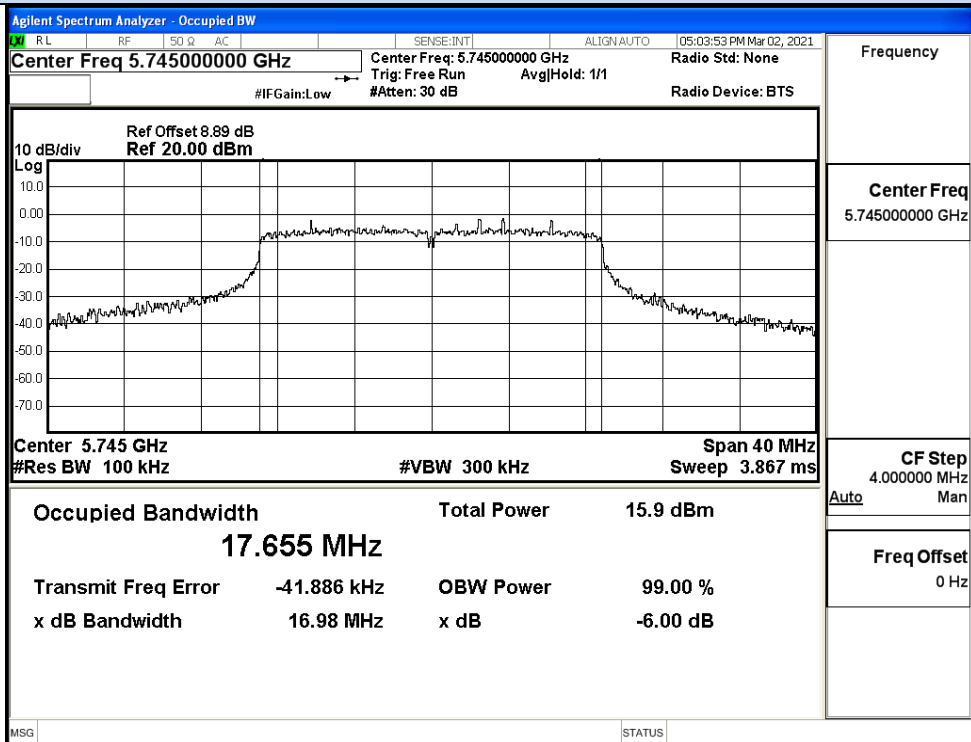

IEEE 802.11n20 / Channel 149 / 5745MHz

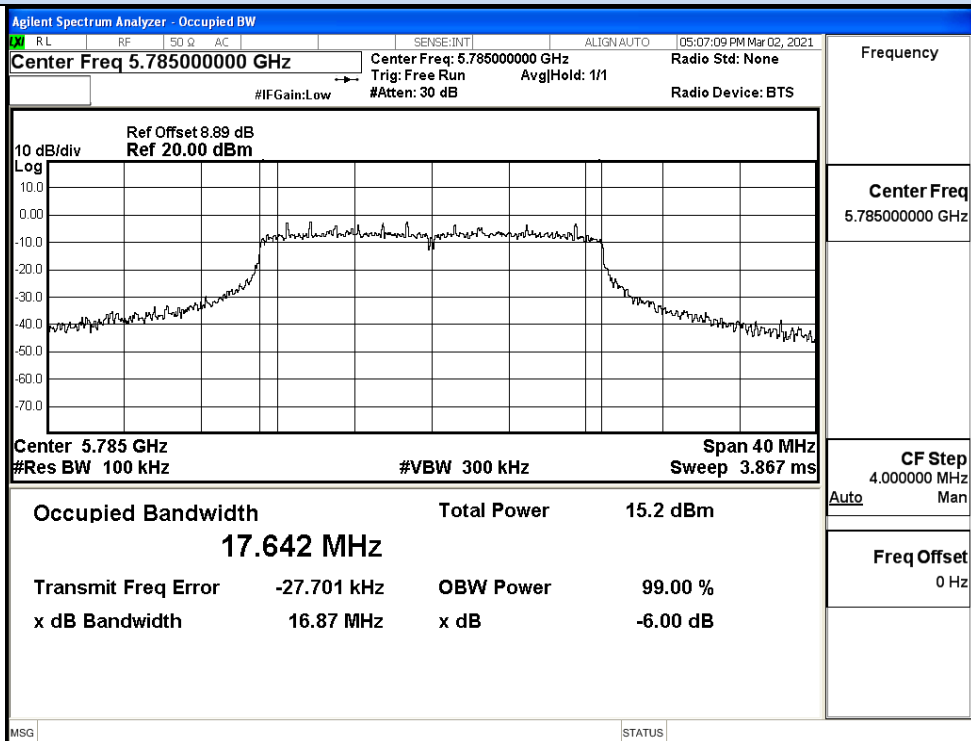

IEEE 802.11n20 / Channel 157 / 5785MHz

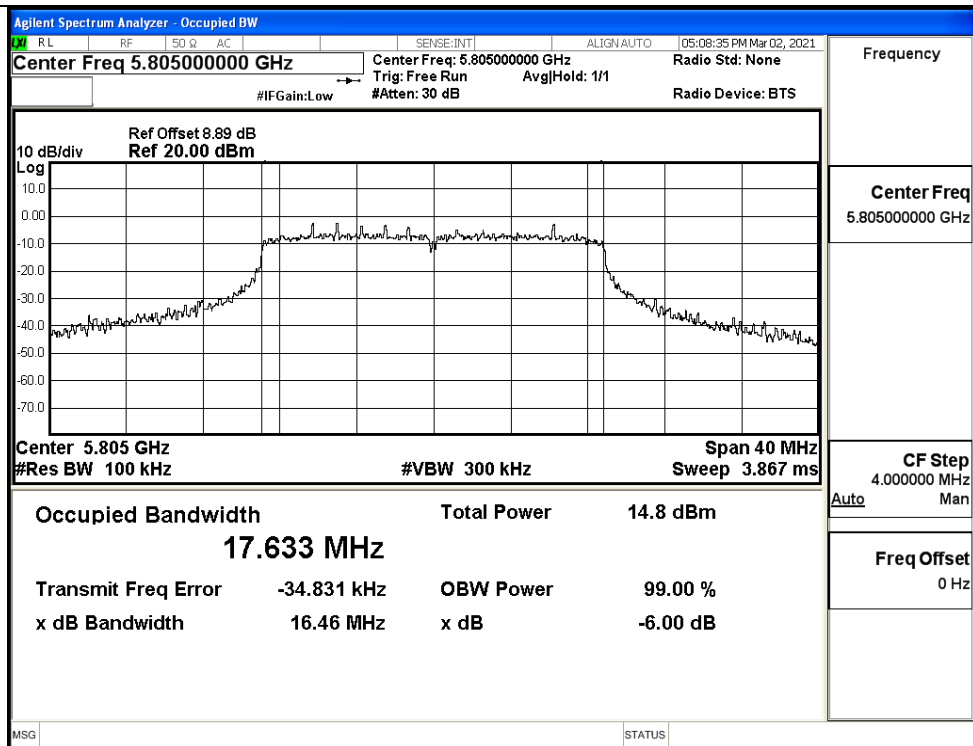


IEEE 802.11n20 / Channel 165 / 5805MHz

A.5 Undesirable Emissions Measurement


ANTO

Test Mode	Channel	Frequency (MHz)	Conducted Power (dBm)	Antenna Gain (dBi)	EIRP (dBm/MHz)	Detector	Limit (dBm/MHz)	Verdict
11A	149	5650.0	-42.36	3.27	-39.09	Peak	-27.0	Pass
		5650.0	-55.65	3.27	-52.38	Average	-27.0	Pass
		5700.0	-42.73	3.27	-39.46	Peak	10	Pass
		5700.0	-54.90	3.27	-51.63	Average	10	Pass
		5720.0	-39.16	3.27	-35.89	Peak	15.6	Pass
		5720.0	-47.77	3.27	-44.5	Average	15.6	Pass
		5725.0	-27.98	3.27	-24.71	Peak	27.0	Pass
		5725.0	-46.97	3.27	-43.7	Average	27.0	Pass
	161	5850.0	-44.37	3.27	-41.1	Peak	27.0	Pass
		5850.0	-56.14	3.27	-52.87	Average	27.0	Pass
		5855.0	-44.97	3.27	-41.7	Peak	15.6	Pass
		5855.0	-56.48	3.27	-53.21	Average	15.6	Pass
		5875.0	-45.63	3.27	-42.36	Peak	10	Pass
		5875.0	-57.26	3.27	-53.99	Average	10	Pass
		5925.0	-46.31	3.27	-43.04	Peak	-27.0	Pass
11N20 SISO	149	5925.0	-57.90	3.27	-54.63	Average	-27.0	Pass
		5650.0	-44.07	3.27	-40.8	Peak	-27.0	Pass
		5650.0	-55.89	3.27	-52.62	Average	-27.0	Pass
		5700.0	-42.21	3.27	-38.94	Peak	10	Pass
		5700.0	-49.74	3.27	-46.47	Average	10	Pass
		5720.0	-38.45	3.27	-35.18	Peak	15.6	Pass
		5720.0	-55.21	3.27	-51.94	Average	15.6	Pass
	161	5725.0	-29.95	3.27	-26.68	Peak	27.0	Pass
		5725.0	-46.80	3.27	-43.53	Average	27.0	Pass
		5850.0	-44.39	3.27	-41.12	Peak	27.0	Pass
		5850.0	-56.34	3.27	-53.07	Average	27.0	Pass
		5855.0	-43.58	3.27	-40.31	Peak	15.6	Pass
		5855.0	-56.59	3.27	-53.32	Average	15.6	Pass
		5875.0	-44.89	3.27	-41.62	Peak	10	Pass
	161	5875.0	-57.37	3.27	-54.1	Average	10	Pass
		5925.0	-46.32	3.27	-43.05	Peak	-27.0	Pass
		5925.0	-58.05	3.27	-54.78	Average	-27.0	Pass

Undesirable Emissions Measurement

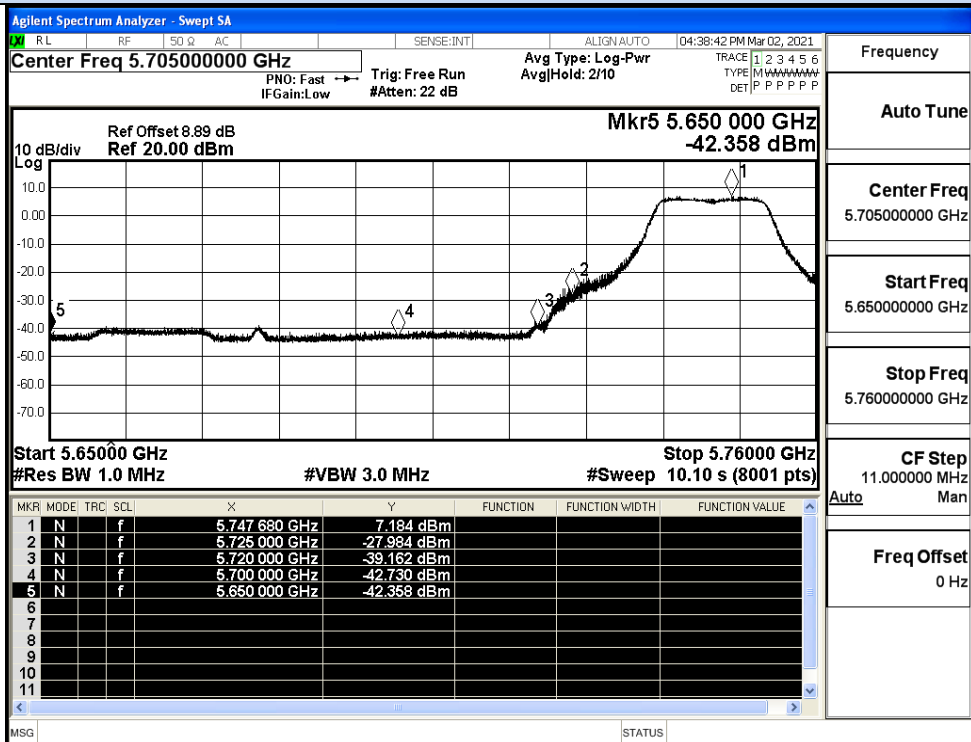


IEEE 802.11a / Channel 149 / 5745MHz / Peak

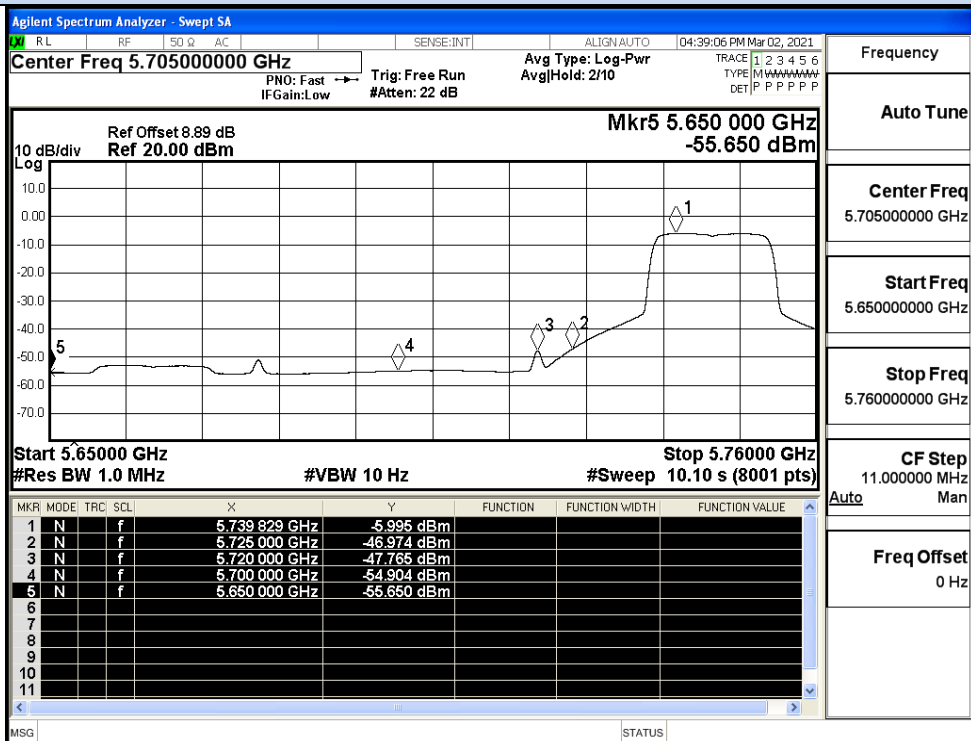


IEEE 802.11a / Channel 148 / 5745MHz / Average

Undesirable Emissions Measurement

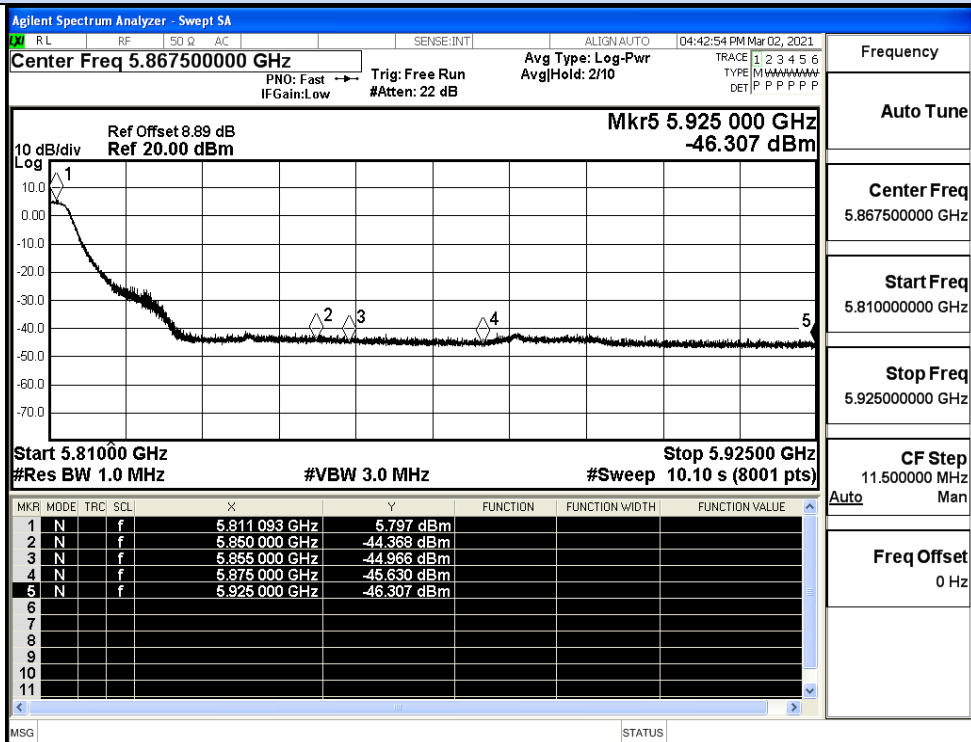


IEEE 802.11a / Channel 165 / 5805MHz / Peak

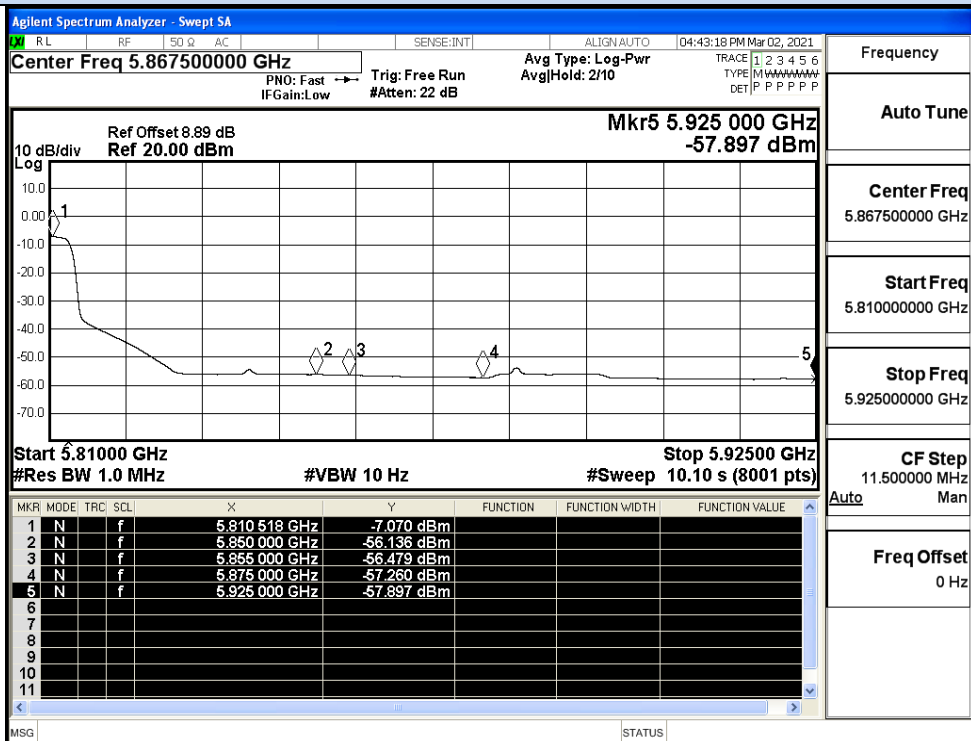


IEEE 802.11a / Channel 165 / 5805MHz / Average

Undesirable Emissions Measurement

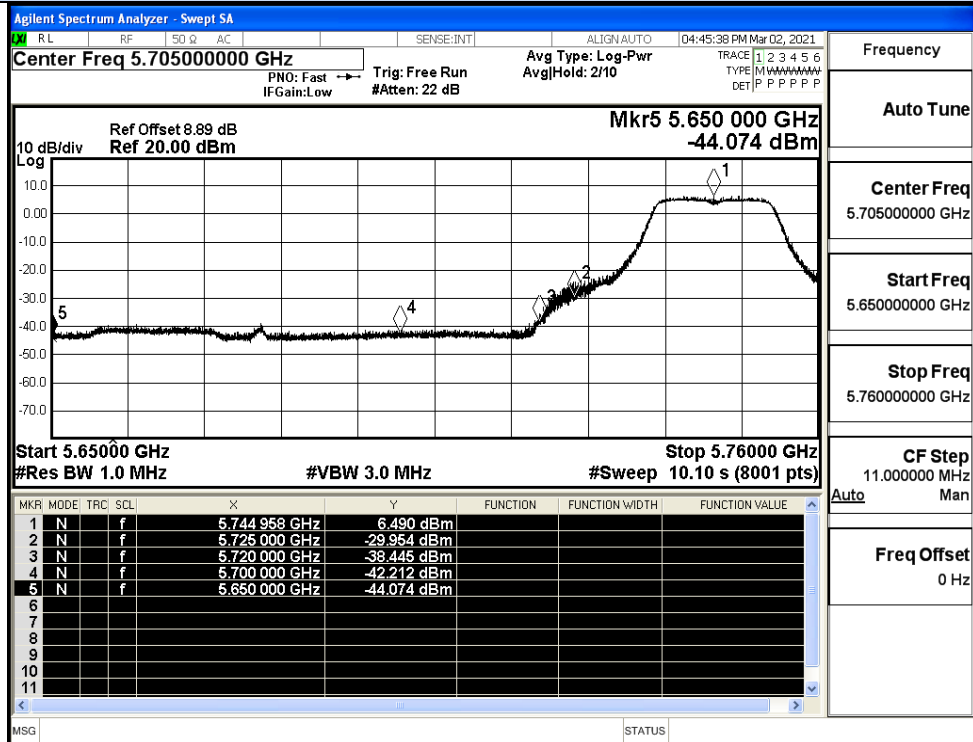


IEEE 802.11n20 / Channel 149 / 5745MHz / Peak

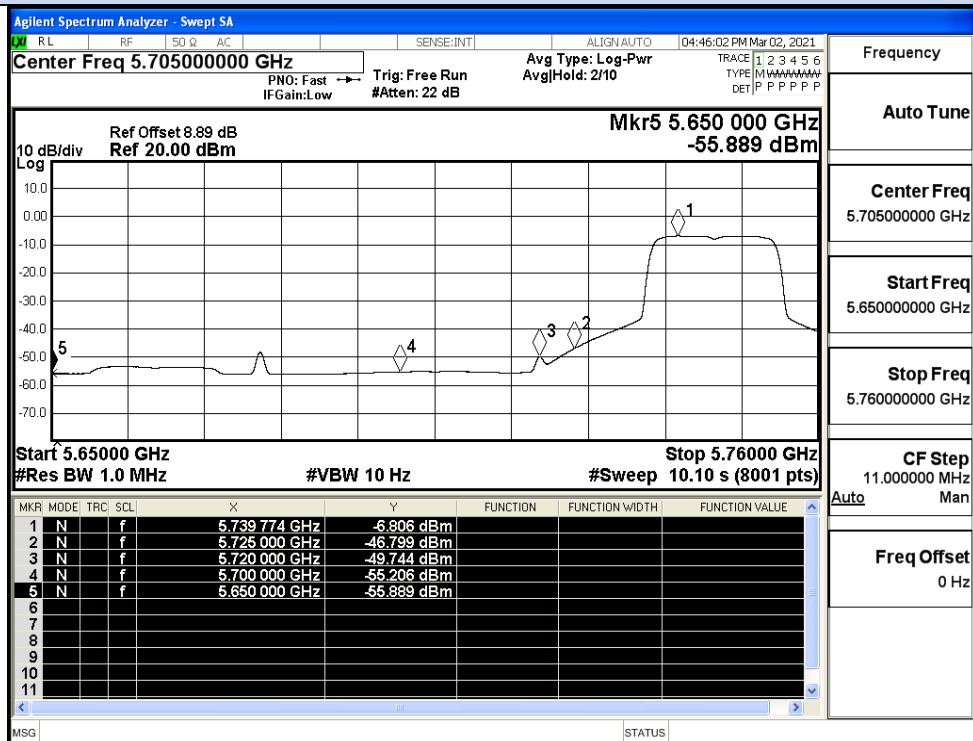


IEEE 802.11n20 / Channel 149 / 5745MHz / Average

Undesirable Emissions Measurement

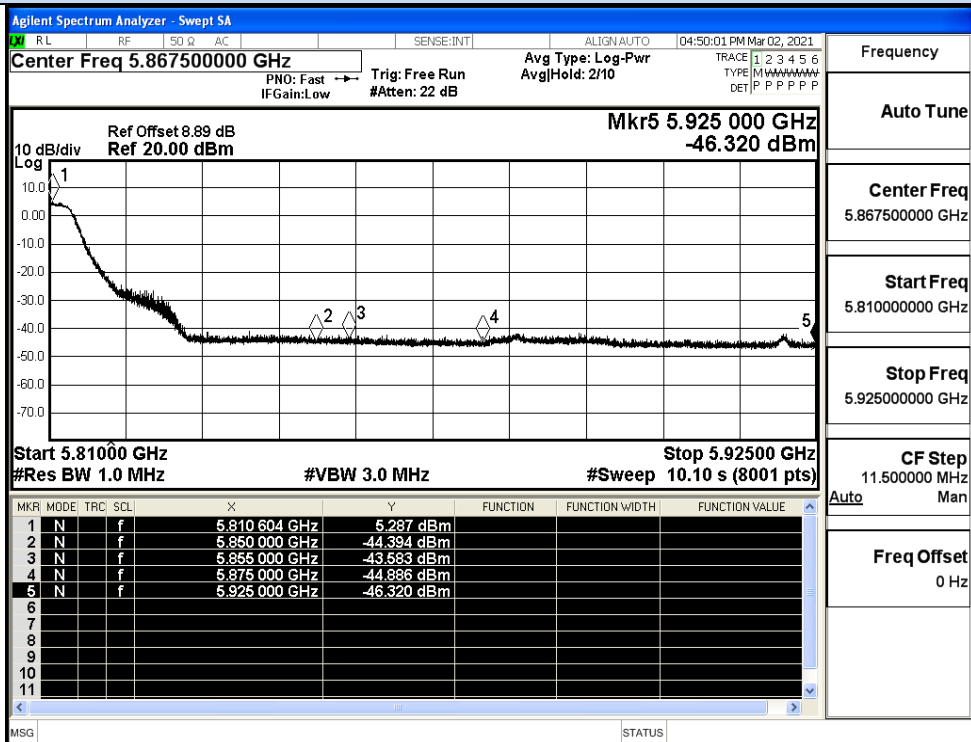

IEEE 802.11n20 / Channel 165 / 5805MHz / Peak

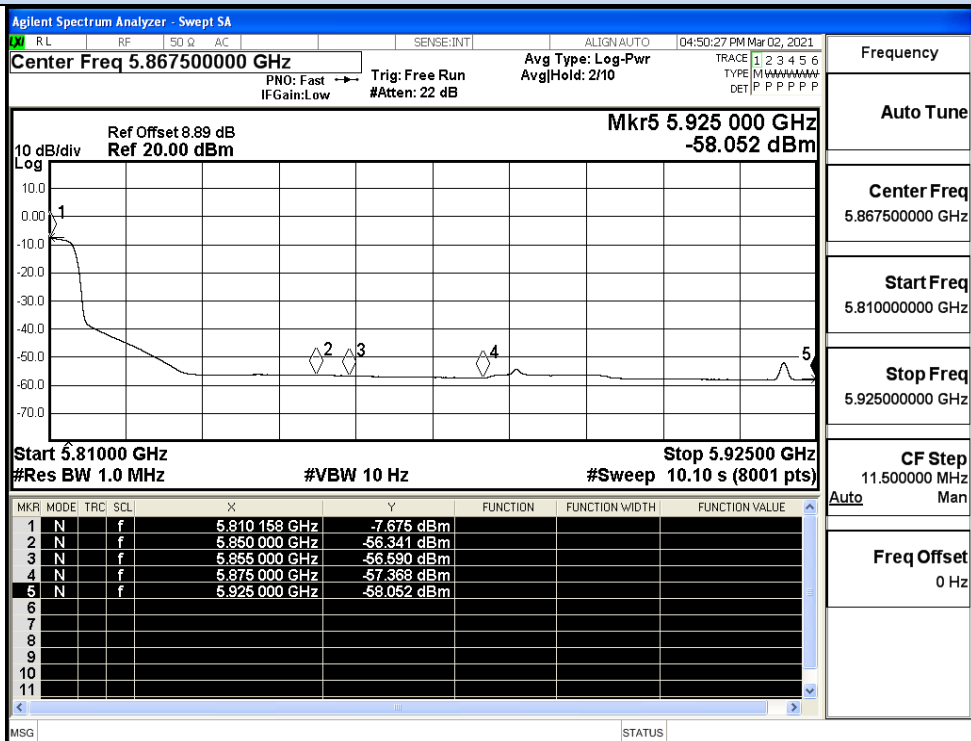


IEEE 802.11n20 / Channel 165 / 5805MHz / Average


ANT1

Test Mode	Channel	Frequency (MHz)	Conducted Power (dBm)	Antenna Gain (dBi)	EIRP (dBm/MHz)	Detector	Limit (dBm/MHz)	Verdict
11A	149	5650.0	-46.82	2.05	-44.77	Peak	-27.0	Pass
		5650.0	-59.65	2.05	-57.6	Average	-27.0	Pass
		5700.0	-46.42	2.05	-44.37	Peak	10	Pass
		5700.0	-58.42	2.05	-56.37	Average	10	Pass
		5720.0	-40.96	2.05	-38.91	Peak	15.6	Pass
		5720.0	-58.47	2.05	-56.42	Average	15.6	Pass
		5725.0	-31.27	2.05	-29.22	Peak	27.0	Pass
		5725.0	-49.10	2.05	-47.05	Average	27.0	Pass
	161	5850.0	-46.28	2.05	-44.23	Peak	27.0	Pass
		5850.0	-58.18	2.05	-56.13	Average	27.0	Pass
		5855.0	-45.61	2.05	-43.56	Peak	15.6	Pass
		5855.0	-58.64	2.05	-56.59	Average	15.6	Pass
		5875.0	-47.81	2.05	-45.76	Peak	10	Pass
		5875.0	-59.79	2.05	-57.74	Average	10	Pass
		5925.0	-48.98	2.05	-46.93	Peak	-27.0	Pass
		5925.0	-60.29	2.05	-58.24	Average	-27.0	Pass
11N20 SISO	149	5650.0	-46.95	2.05	-44.9	Peak	-27.0	Pass
		5650.0	-59.69	2.05	-57.64	Average	-27.0	Pass
		5700.0	-45.68	2.05	-43.63	Peak	10	Pass
		5700.0	-56.79	2.05	-54.74	Average	10	Pass
		5720.0	-39.77	2.05	-37.72	Peak	15.6	Pass
		5720.0	-58.57	2.05	-56.52	Average	15.6	Pass
		5725.0	-29.60	2.05	-27.55	Peak	27.0	Pass
		5725.0	-47.74	2.05	-45.69	Average	27.0	Pass
	161	5850.0	-43.59	2.05	-41.54	Peak	27.0	Pass
		5850.0	-58.34	2.05	-56.29	Average	27.0	Pass
		5855.0	-47.19	2.05	-45.14	Peak	15.6	Pass
		5855.0	-58.75	2.05	-56.7	Average	15.6	Pass
		5875.0	-48.73	2.05	-46.68	Peak	10	Pass
		5875.0	-59.81	2.05	-57.76	Average	10	Pass
		5925.0	-48.64	2.05	-46.59	Peak	-27.0	Pass
		5925.0	-60.32	2.05	-58.27	Average	-27.0	Pass

Undesirable Emissions Measurement

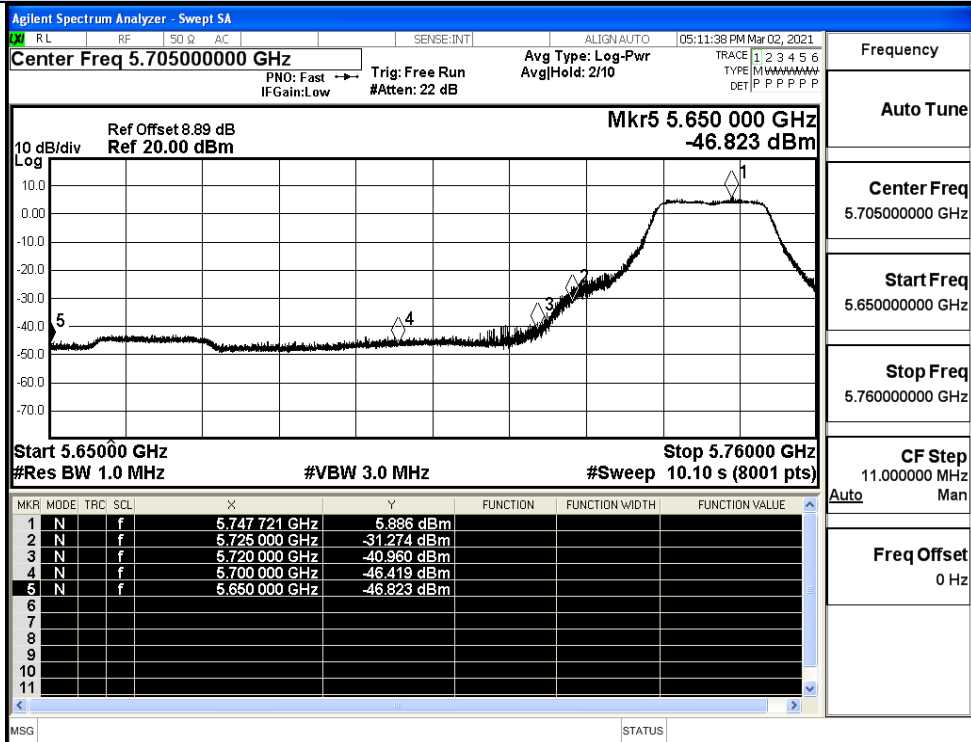


IEEE 802.11a / Channel 149 / 5745MHz / Peak

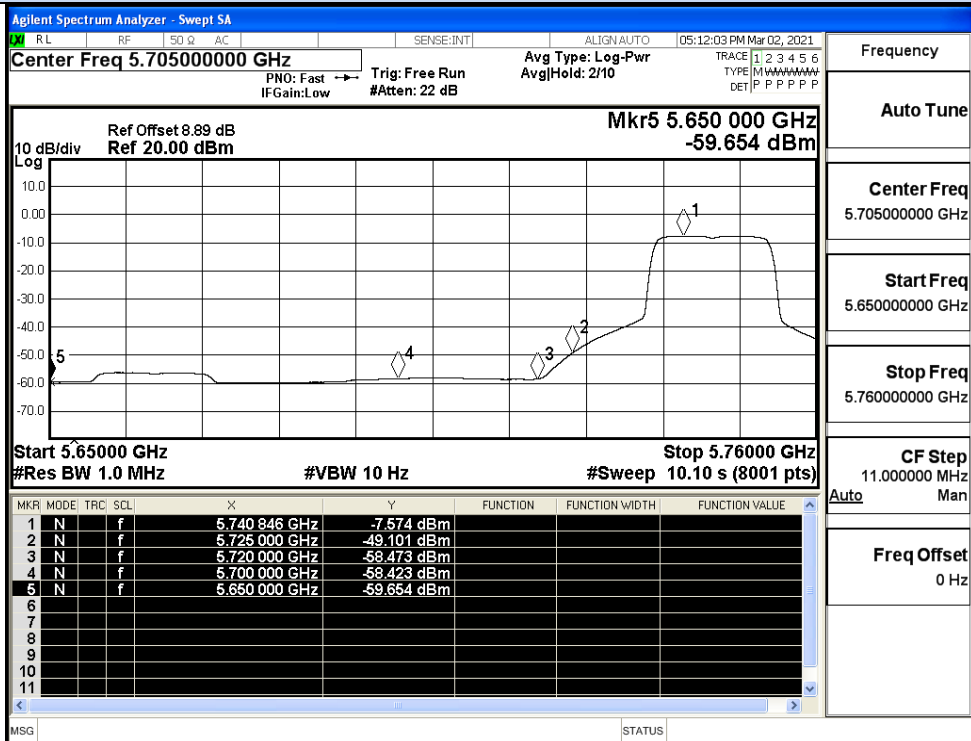


IEEE 802.11a / Channel 148 / 5745MHz / Average

Undesirable Emissions Measurement

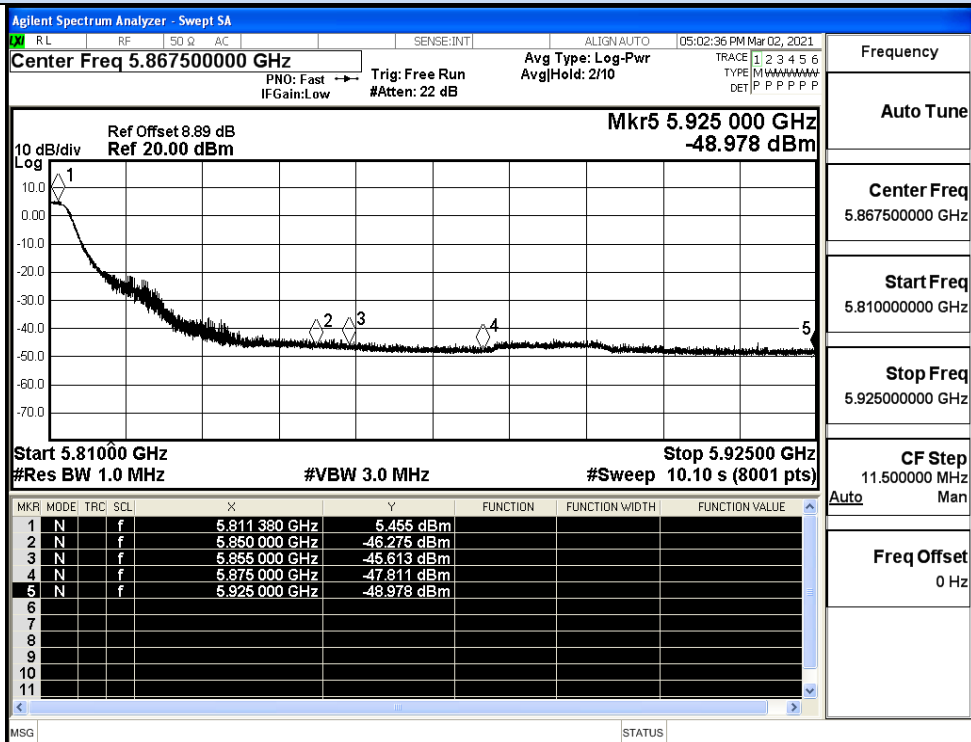


IEEE 802.11a / Channel 165 / 5805MHz / Peak

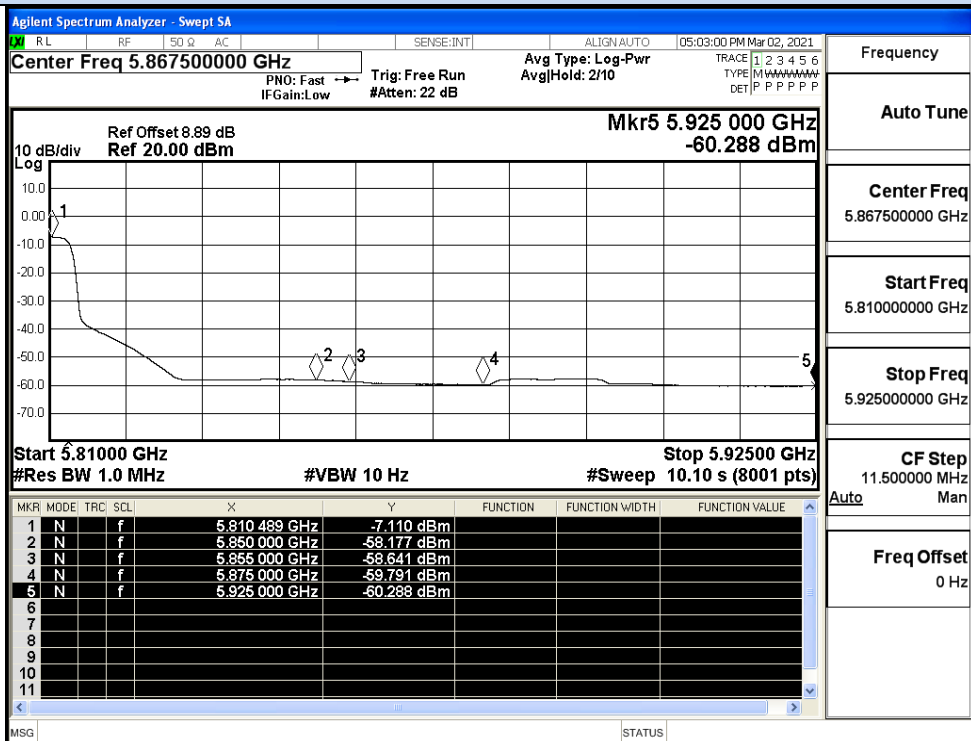


IEEE 802.11a / Channel 165 / 5805MHz / Average

Undesirable Emissions Measurement

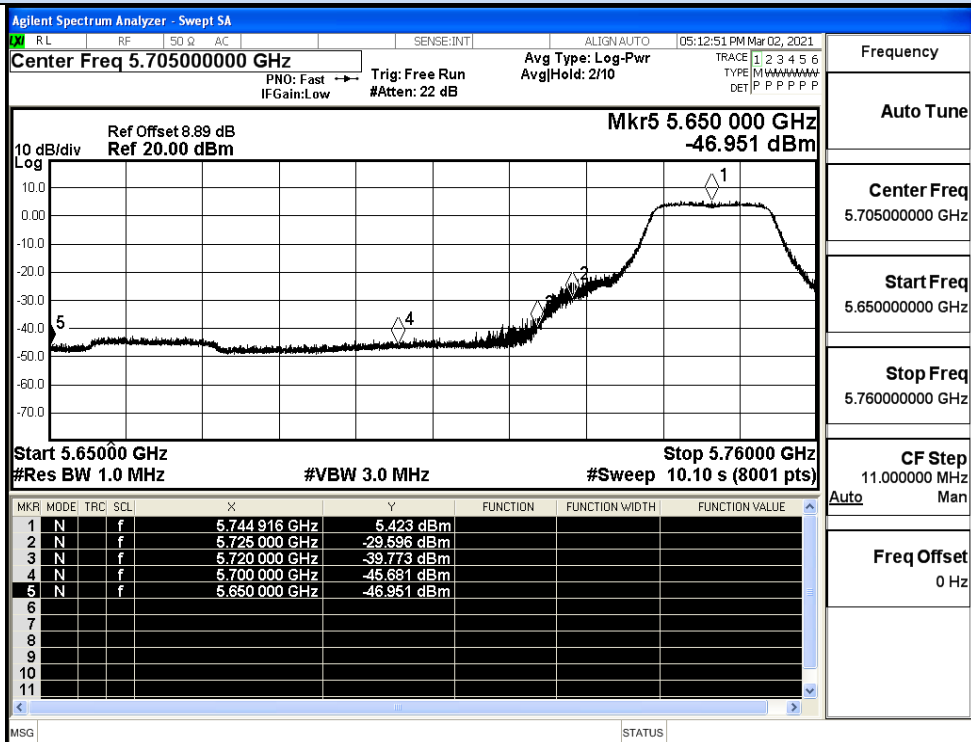


IEEE 802.11n20 / Channel 149 / 5745MHz / Peak

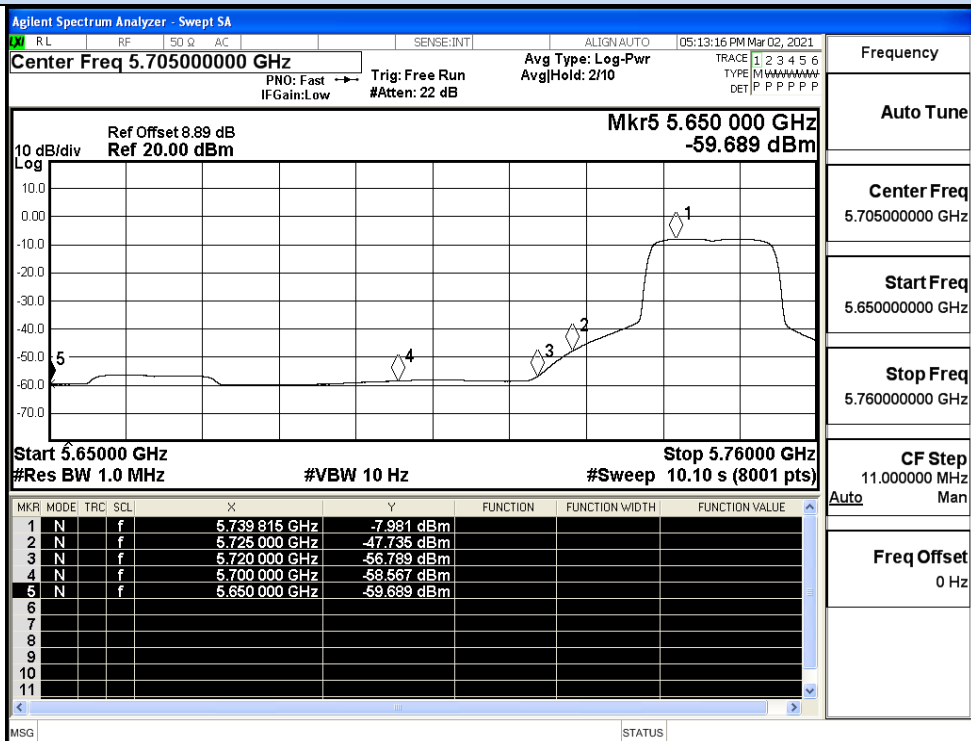


IEEE 802.11n20 / Channel 149 / 5745MHz / Average

Undesirable Emissions Measurement

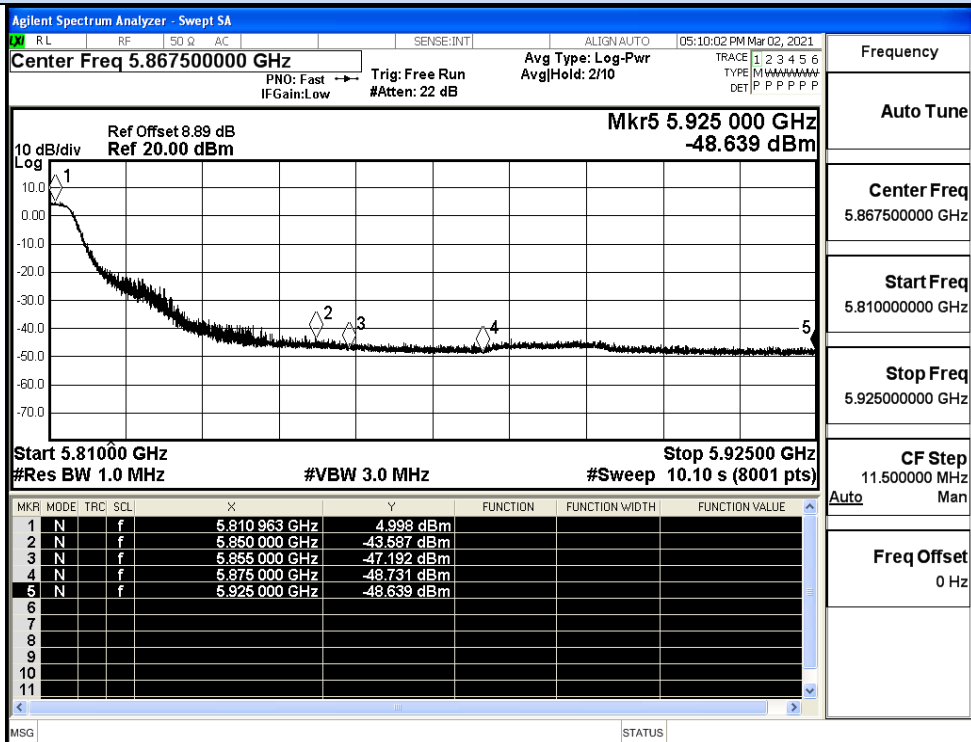

IEEE 802.11n20 / Channel 165 / 5805MHz / Peak

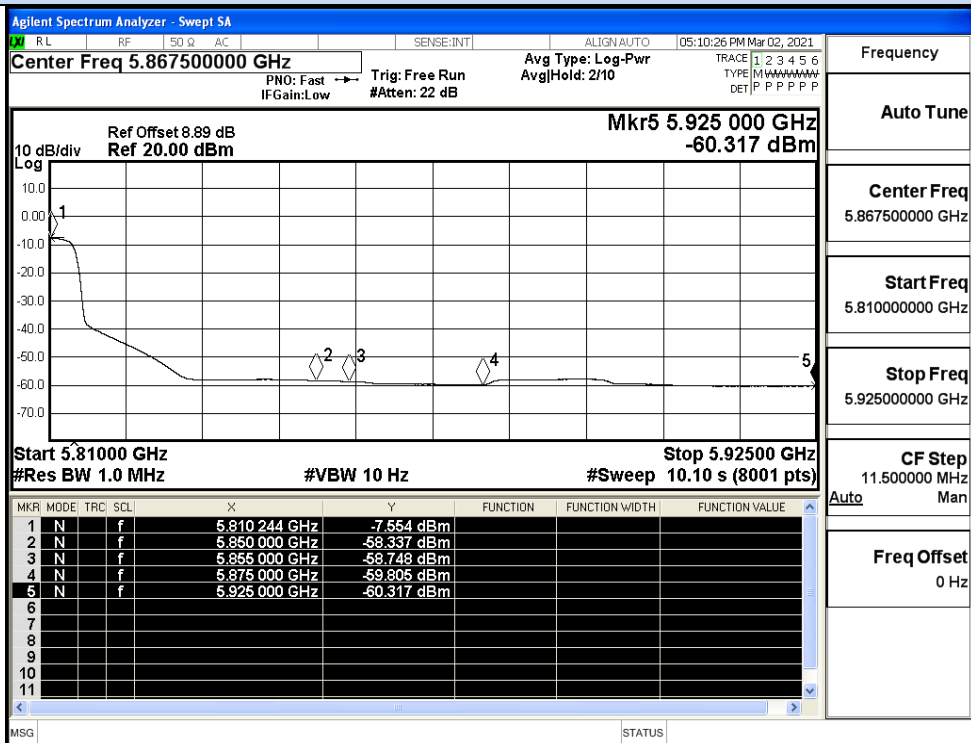

IEEE 802.11n20 / Channel 165 / 5805MHz / Average

MIMO

Test Mode	Channel	Frequency (MHz)	ANT 0 Conducted Power (dBm)	ANT 1 Conducted Power (dBm)	MIMO Conducted Power (dBm)	Antenna Gain (dBi)	EIRP (dBm/MHz)	Detector	Limit (dBm/MHz)	Verdict
11N20	149	5650.0	-44.07	-46.95	-42.27	5.71	-36.56	Peak	-27.0	Pass
		5650.0	-55.89	-59.69	-54.38	5.71	-48.67	Average	-27.0	Pass
		5700.0	-42.21	-45.68	-40.60	5.71	-34.89	Peak	10	Pass
		5700.0	-49.74	-56.79	-48.96	5.71	-43.25	Average	10	Pass
		5720.0	-38.45	-39.77	-36.05	5.71	-30.34	Peak	15.6	Pass
		5720.0	-55.21	-58.57	-53.56	5.71	-47.85	Average	15.6	Pass
		5725.0	-29.95	-29.60	-26.76	5.71	-21.05	Peak	27.0	Pass
		5725.0	-46.80	-47.74	-44.23	5.71	-38.52	Average	27.0	Pass
	161	5850.0	-44.39	-43.59	-40.96	5.71	-35.25	Peak	27.0	Pass
		5850.0	-56.34	-58.34	-54.22	5.71	-48.51	Average	27.0	Pass
		5855.0	-43.58	-47.19	-42.01	5.71	-36.3	Peak	15.6	Pass
		5855.0	-56.59	-58.75	-54.53	5.71	-48.82	Average	15.6	Pass
		5875.0	-44.89	-48.73	-43.39	5.71	-37.68	Peak	10	Pass
		5875.0	-57.37	-59.81	-55.41	5.71	-49.7	Average	10	Pass
		5925.0	-46.32	-48.64	-44.32	5.71	-38.61	Peak	-27.0	Pass
		5925.0	-58.05	-60.32	-56.03	5.71	-50.32	Average	-27.0	Pass

$EIRP(dBm/MHz) = \text{Conducted Power (dBm)} + \text{Antenna Gain (dBi)}$

The upper bound on antenna gain for a device with a single RF output shall be selected as the maximum in-band gain of the antenna across all operating bands or 2 dBi, whichever is greater