



SPECIFICATION FOR APPROVAL

1.MECHANICAL DIMENSION (UNIT:mm)

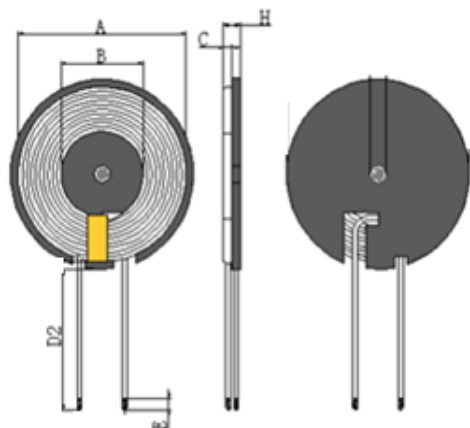

2. SCHEMATIC



1. 线圈贴磁片，
开L线槽。线圈中间需要加磁片
2. 线圈出线位置
缠胶纸 1-2Ts；
3. 隔磁片底部要贴胶

A	B	C	D2	E	H				
44±1.0	20.5±0.5	0.8±0.1	80±3	4±2	2.5MAX				

3.WINDING:

STEP	START-FINISH	WIRE TYPE	TURNS	TAPE	REMARK
N1	S-F	丝包线 $\phi 0.07 \times 100\text{mm}$ 2UEW	10TS (Ref)		

4. ELECTRICAL SPECIFICATION:

ITEM	L	DCR	L	Q值	HI-POT
TEST	线圈加磁片	S-F			
CON	100KHz, 0.25V	AT 25°C			
SPEC	6.8uH±10%	90m Ω Max			

5.BILF OF MATERIAL:

NO.	ITEM	MATERIAL SPECIFICATION	MANUFACTURER	SGS NO.
1	丝包线	丙酮丝包线0.07*100股	NANJINGJINNINGCO,LTD	
2	无铅锡条	无铅锡条	QIAODO	
3	磁片	$\phi 44$ 锰锌硬磁片开L槽	TAIYI CO.,LTD	

4	胶水	黄胶9999	LIANCHENG CO.,LTD	
5	高温胶纸	8mm宽高温胶纸	CUDAK CO.,LTD	
6	背胶	ø43.5*0.1	CUDAK CO.,LTD	
7				
HRSW ELECTRONICS CO.,LTD		PART NO		
		TITLE	G45开L槽+背胶引线长80mm	
DRAWN BY		CHECKED BY		APPROVED BY
何伟华		韦立红		韦立红