



Shenzhen CTA Testing Technology Co., Ltd.

Room 106, Building 1, Yibaolai Industrial Park, Qiaotou Community, Fuhai Street, Bao'an District, Shenzhen, China

TEST REPORT

Report Reference No.....: CTA24072501501

FCC ID: 2A7DX-BL8000

Compiled by

(position+printed name+signature)..: File administrators Zoey Cao

Supervised by

(position+printed name+signature)..: Project Engineer Amy Wen

Approved by

(position+printed name+signature)..: RF Manager Eric Wang

Date of issue.....: Aug. 28, 2024

Testing Laboratory Name: Shenzhen CTA Testing Technology Co., Ltd.

Address: Room 106, Building 1, Yibaolai Industrial Park, Qiaotou Community, Fuhai Street, Bao'an District, Shenzhen, China

Applicant's name.....: DOKE COMMUNICATION (HK) LIMITED

Address: 19H MAXGRAND PLAZA NO 3 TAI YAU STREET SAN PO KONG KL

Test specification

Standard: IEC 62209-2:2010; IEEE 1528:2013; FCC 47 CFR Part 2.1093;
ANSI/IEEE C95.1:2005; Reference FCC KDB 447498; KDB 248227;
KDB 616217; KDB 941225; KDB 865664

Shenzhen CTA Testing Technology Co., Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen CTA Testing Technology Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen CTA Testing Technology Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Test item description.....: Smart phone

Trade Mark: Blackview

Manufacturer: Shenzhen DOKE Electronic Co., Ltd

Model/Type reference.....: BL8000

Listed Models: N/A

Rating: DC 3.87V From battery

Result: PASS

Zoey Cao



Eric Wang

TEST REPORT

Equipment under Test : Smart phone

Model /Type : BL8000

Listed Models : N/A

Applicant : **DOKE COMMUNICATION (HK) LIMITED**

Address : 19H MAXGRAND PLAZA NO 3 TAI YAU STREET SAN PO KONG KL

Manufacturer : **Shenzhen DOKE Electronic Co., Ltd**

Address : 801, Building3, 7th Industrial Zone, Yulv Community, Yutang Road, Guangming District, Shenzhen, China

Test Result:	PASS
---------------------	-------------

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

Contents

1	Statement of Compliance	6
2	General Information	7
2.1	General Remarks	7
2.2	Description of Equipment Under Test (EUT)	7
2.3	Device Category and SAR Limits	8
2.4	Applied Standard	8
2.5	Test Facility	9
2.6	Environment of Test Site	9
2.7	Test Configuration	9
3	Specific Absorption Rate (SAR)	10
3.1	Introduction	10
3.2	SAR Definition	10
4	SAR Measurement System	11
4.1	E-Field Probe	11
4.2	Data Acquisition Electronics (DAE)	12
4.3	Robot	13
4.4	Measurement Server	13
4.5	Phantom	14
4.6	Device Holder	14
4.7	Data Storage and Evaluation	15
5	Test Equipment List	18
6	Tissue Simulating Liquids	20
7	System Verification Procedures	22
8	EUT Testing Position	24
8.1	Handset Reference Points	24
8.2	Positioning for Cheek / Touch	25
8.3	Positioning for Ear / 15° Tilt	25
8.4	Body Worn Accessory Configurations	26
8.5	Wireless Router (Hotspot) Configurations	26
9	Measurement Procedures	27
9.1	Spatial Peak SAR Evaluation	27
9.2	Power Reference Measurement	27
9.3	Area Scan Procedures	28
9.4	Zoom Scan Procedures	28
9.5	Volume Scan Procedures	30
9.6	Power Drift Monitoring	30
10	TEST CONDITIONS AND RESULTS	31
10.1	Conducted Power	31
10.2	Transmit Antennas and SAR Measurement Position	116
10.3	SAR Test Exclusion and Estimated SAR	117
10.4	SAR Test Results Summary	119

10.5	SAR Measurement Variability	132
10.6	Simultaneous Transmission Analysis.....	133
11	Measurement Uncertainty	135
Appendix A.	EUT Photos and Test Setup Photos	137
Appendix B.	Plots of SAR System Check.....	139
Appendix C.	Plots of SAR Test Data	152
Appendix D.	DASY System Calibration Certificate	190

Version

Version No.	Date	Description
R00	Aug. 28, 2024	Original

1 Statement of Compliance

<Highest SAR Summary>

This device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg) specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-2005, and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528-2013. The maximum results of Specific Absorption Rate (SAR) found during testing are as follows.

<Highest SAR Summary>

Frequency Band	Highest Reported 1g-SAR(W/Kg)			Simultaneous Reported SAR (W/Kg)
	Head	Body-Worn (10mm)	Host pot (10mm)	
GSM 850	0.366	0.229	0.229	Head: 1.165 Body:0.836
PCS1900	0.179	0.212	0.212	
WCDMA Band II	0.179	0.177	0.177	
WCDMA Band IV	0.197	0.163	0.163	
WCDMA Band V	0.210	0.136	0.136	
LTE Band 2	0.318	0.171	0.171	
LTE Band 4	0.334	0.183	0.183	
LTE Band 5	0.411	0.356	0.356	
LTE Band 7	0.424	0.390	0.390	
LTE Band 12/ LTE Band 17	0.312	0.298	0.298	
LTE Band 41	0.331	0.433	0.433	
5G NR band n5	0.553	0.136	0.136	
5G NR band n7	0.405	0.415	0.415	
5G NR band n38/n41	0.313	0.247	0.247	
5G NR band n77/n78	0.347	0.500	0.500	
WLAN2.4G	0.323	0.184	0.184	
WLAN5.2G	0.248	0.132	0.132	
WLAN5.8G	0.277	0.195	0.195	
SAR Test Limit (W/Kg)	1.60			
Test Result	PASS			

2 General Information

2.1 General Remarks

Date of receipt of test sample	:	Jul. 25, 2024
Testing commenced on	:	Jul. 26, 2024
Testing concluded on	:	Aug. 23, 2024

2.2 Description of Equipment Under Test (EUT)

Product Name:	Smart phone
Model/Type reference:	BL8000
Power supply:	DC 3.87V From battery 8800mAh
Testing sample ID:	CTA240725015-1# (Engineer sample) CTA240725015-2# (Normal sample)
Hardware version:	HCT-V930MB-A1
Software version:	BL8000_NEU_V1300_V1.0
Tx Frequency:	SRD: BT:2402~2480MHz 2.4G WIFI: 2412~2462MHz 5.2G WIFI:5180~5240MHz 5.8G WIFI:5745~5825MHz NFC:13.56MHz GSM: GSM850 TX: 824.2~848.8MHz PCS1900 TX: 1850.2~1909.8MHz WCDMA: Band 2: TX: 1852.4~1907.6MHz Band 4: TX: 1712.4~1752.6MHz Band 5: TX: 826.40~846.60MHz LTE: FDD Band 2: TX: 1850~1910MHz FDD Band 4: TX: 1710~1755MHz FDD Band 5: TX: 824~849MHz FDD Band 7: TX: 2500~2570MHz FDD Band 12: TX: 699~716MHz FDD Band 17: TX: 704~716MHz TDD Band 41: TX: 2496 ~2690MHz 5G NR SA: FDD Band n5:Tx: 824 - 849 MHz FDD Band n7: Tx: 2500 - 2570 MHz TDD Band n38: Tx: 2570 - 2620 MHz

	TDD Band n41: Tx: 2496 - 2690 MHz TDD Band n77 L: Tx: 3450 - 3550 MHz TDD Band n77 H: Tx: 3700 - 3980 MHz TDD Band n78 L: Tx: 3450 - 3550 MHz TDD Band n78 H: Tx: 3700 - 3800 MHz
Type of Modulation:	BT: GFSK, $\pi/4$ DQPSK, 8DPSK 2.4G WIFI: BPSK, QPSK, 16QAM, 64QAM, 1024QAM 5G WIFI: BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM NFC: ASK GSM: GMSK, 8PSK WCDMA: QPSK, 16QAM LTE: QPSK, 16QAM 5G NR: DFT-s-OFDM: $\pi/2$ -BPSK, QPSK, 16-QAM, 64-QAM, 256-QAM CP-OFDM: QPSK, 16-QAM, 64-QAM, 256-QAM
Category of device:	Portable device
Remark: The above DUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.	

2.3 Device Category and SAR Limits

This device belongs to portable device category because its radiating structure is allowed to be used within 20 centimeters of the body of the user. Limit for General Population/Uncontrolled exposure should be applied for this device, it is 1.6 W/kg as averaged over any 1 gram of tissue.

2.4 Applied Standard

The Specific Absorption Rate (SAR) testing specification, method, and procedure for this device is in accordance with the following standards:

- FCC 47 CFR Part 2 (2.1093:2013)
- ANSI/IEEE C95.1:2005
- IEEE Std 1528:2013
- KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04
- KDB 865664 D02 RF Exposure Reporting v01r02
- KDB 447498 D01 General RF Exposure Guidance v06
- KDB 248227 D01 802.11 Wi-Fi SAR v02r02
- KDB 941225 D01 3G SAR Procedures v03r01
- KDB 941225 D06 Hotspot SAR v02r01
- KDB 648474 D04 Handset SAR v01r03
- KDB 941225 D05 SAR Evaluation Consideration for LTE Devices v02r05
-

2.5 Test Facility

FCC-Registration No.: 517856 Designation Number: CN1318

Shenzhen CTA Testing Technology Co., Ltd. has been listed on the US Federal Communications Commission list of test facilities recognized to perform electromagnetic emissions measurements.

A2LA-Lab Cert. No.: 6534.01

Shenzhen CTA Testing Technology Co., Ltd. has been listed by American Association for Laboratory Accreditation to perform electromagnetic emission measurement.

ISED#: 27890 CAB identifier: CN0127

Shenzhen CTA Testing Technology Co., Ltd. has been listed by Innovation, Science and Economic Development Canada to perform electromagnetic emission measurement.

The 3m-Semi anechoic test site fulfils CISPR 16-1-4 according to ANSI C63.10 and CISPR 16-1-4:2010.

2.6 Environment of Test Site

Items	Required	Actual
Temperature (°C)	18-25	22~23
Humidity (%RH)	30-70	55~65

2.7 Test Configuration

The device was controlled by using a base station emulator. Communication between the device and the emulator was established by air link. The distance between the EUT and the antenna of the emulator is larger than 50 cm and the output power radiated from the emulator antenna is at least 30 dB smaller than the output power of EUT. The EUT was set from the emulator to radiate maximum output power during all tests. For WLAN SAR testing, WLAN engineering testing software installed on the EUT can provide continuous transmitting RF signal.

3 Specific Absorption Rate (SAR)

3.1 Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

3.2 SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$\text{SAR} = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$

SAR is expressed in units of Watts per kilogram (W/kg)

SAR measurement can be either related to the temperature elevation in tissue by

$$\text{SAR} = C \left(\frac{\delta T}{\delta t} \right)$$


Where: C is the specific heat capacity, δT is the temperature rise and δt is the exposure duration, or related to the electrical field in the tissue by

$$\text{SAR} = \frac{\sigma |E|^2}{\rho}$$

Where: σ is the conductivity of the tissue, ρ is the mass density of the tissue and E is the RMS electrical field strength.

However, for evaluating SAR of low power transmitter, electrical field measurement is typically applied.

4 SAR Measurement System

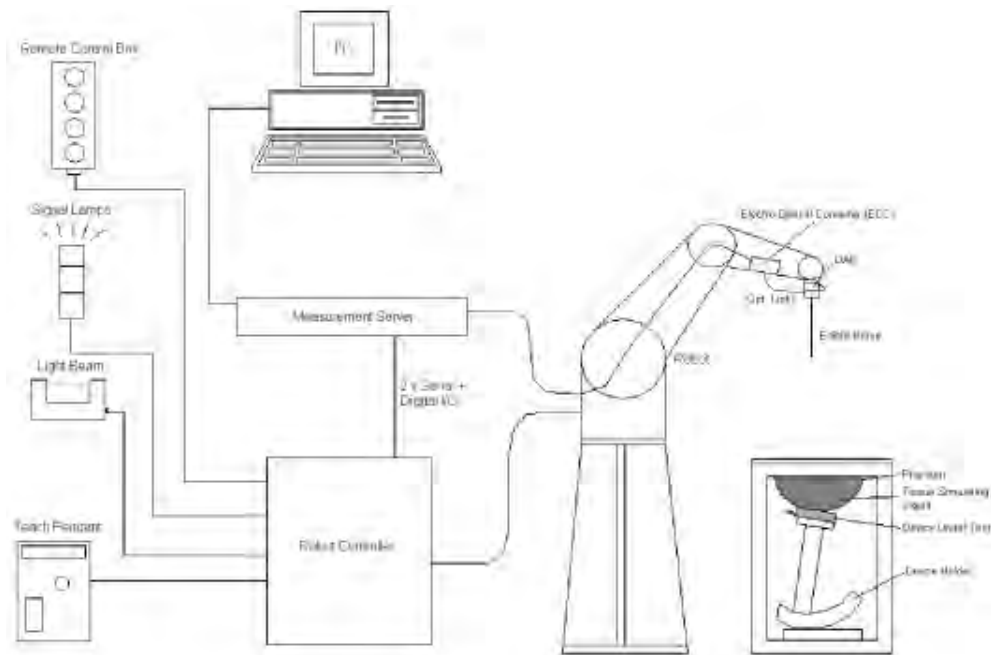

DASY System Configurations

The DASY system for performance compliance tests is illustrated above graphically. This system consists of the following items:

- A standard high precision 6-axis robot with controller, a teach pendant and software
- A data acquisition electronic (DAE) attached to the robot arm extension
- A dosimetric probe equipped with an optical surface detector system
- The electro-optical converter (EOC) performs the conversion between optical and electrical signals
- A measurement server performs the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- A probe alignment unit which improves the accuracy of the probe positioning
- A computer operating Windows XP
- DASY software
- Remote control with teach pendant and additional circuitry for robot safety such as warning lamps, etc.
- The SAM twin phantom
- A device holder
- Tissue simulating liquid
- Dipole for evaluating the proper functioning of the system

components are described in details in the following sub-sections.

4.1 E-Field Probe

The SAR measurement is conducted with the dosimetric probe (manufactured by SPEAG). The probe is specially designed and calibrated for use in liquid with high permittivity. The dosimetric probe has special calibration in liquid at different frequency. This probe has a built in optical surface

detection system to prevent from collision with phantom.

➤ E-Field Probe Specification

<EX3DV4 Probe>

Construction	Symmetrical design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	 Photo of EX3DV4
Frequency	10 MHz to 6 GHz; Linearity: ± 0.2 dB	
Directivity	± 0.3 dB in HSL (rotation around probe axis) ± 0.5 dB in tissue material (rotation normal to probe axis)	
Dynamic Range	10 μ W/g to 100 W/kg; Linearity: ± 0.2 dB (noise: typically < 1 μ W/g)	
Dimensions	Overall length: 330 mm (Tip: 20 mm) Tip diameter: 2.5 mm (Body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm	

➤ E-Field Probe Calibration

Each probe needs to be calibrated according to a dosimetric assessment procedure with accuracy better than $\pm 10\%$. The spherical isotropy shall be evaluated and within ± 0.25 dB. The sensitivity parameters (NormX, NormY, and NormZ), the diode compression parameter (DCP) and the conversion factor (ConvF) of the probe are tested. The calibration data can be referred to appendix C of this report.

4.2 Data Acquisition Electronics (DAE)

The data acquisition electronics (DAE) consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock.

The input impedance of the DAE is 200M Ω ; the inputs are symmetrical and floating. Common mode rejection is above 80dB.



Photo of DAE

4.3 Robot

The SPEAG DASY system uses the high precision robots (DASY5: TX60XL) type from Stäubli SA (France). For the 6-axis controllersystem, the robot controller version (DASY5: CS8c) from Stäubli is used. The Stäublirobot series have many features that are important for our application:

- High precision (repeatability ± 0.035 mm)
- High reliability (industrial design)
- Jerk-free straight movements
- Low ELF interference (the closed metallic construction shields against motor control fields)



Photo of DASY5

4.4 Measurement Server

The measurement server is based on a PC/104 CPU board with CPU (DASY5: 400 MHz, Intel Celeron), chipdisk (DASY5: 128 MB), RAM (DASY5: 128 MB). The necessary circuits for communication with the DAE electronic box, as well as the 16 bit AD converter system for optical detection and digital I/O interface are contained on the DASY I/O board, which is directly connected to the PC/104 bus of the CPU board.

The measurement server performs all the real-time data evaluation for field measurements and surface detection, controls robot movements and handles safety operations.



Photo of Server for DASY5


4.5 Phantom

<SAM Twin Phantom>

Shell Thickness	2 ± 0.2 mm; Center ear point: 6 ± 0.2 mm	 Photo of SAM Phantom
Filling Volume	Approx. 25 liters	
Dimensions	Length: 1000 mm; Width: 500 mm; Height: adjustable feet	
Measurement Areas	Left Hand, Right Hand, Flat Phantom	

The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. A white cover is provided to tap the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. On the phantom top, three reference markers are provided to identify the phantom position with respect to the robot.

<ELI4 Phantom>

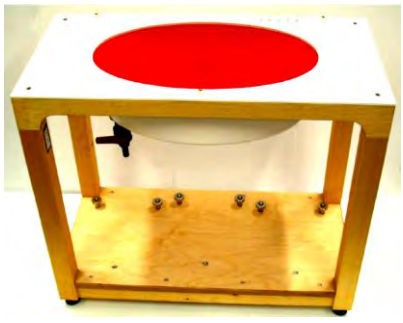Shell Thickness	2 ± 0.2 mm (sagging: <1%)	 Photo of ELI4 Phantom
Filling Volume	Approx. 30 liters	
Dimensions	Major ellipse axis: 600 mm Minor axis: 400 mm	

The ELI4 phantom is intended for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI4 is fully compatible with standard and all known tissue simulating liquids.

4.6 Device Holder

The SAR in the phantom is approximately inversely proportional to the square of the distance between the source and the liquid surface. For a source at 5 mm distance, a positioning uncertainty of ±0.5mm would produce a SAR uncertainty of ± 20%. Accurate device positioning is therefore crucial for accurate and repeatable measurements. The positions in which the devices must be measured are defined by the standards.

The DASY device holder is designed to cope with different positions given in the standard. It has two scales for the device rotation (with respect to the body axis) and the device inclination (with respect to the line between the ear reference points). The rotation center for both scales is the ear reference point

(ERP). Thus the device needs no repositioning when changing the angles.

The DASY device holder is constructed of low-loss POM material having the following dielectric parameters: relative permittivity $\epsilon = 3$ and loss tangent $\delta = 0.02$. The amount of dielectric material has been reduced in the closest vicinity of the device, since measurements have suggested that the influence of the clamp on the test results could thus be lowered.



Device Holder

4.7 Data Storage and Evaluation

➤ Data Storage

The DASY software stores the assessed data from the data acquisition electronics as raw data (in microvolt readings from the probe sensors), together with all the necessary software parameters for the data evaluation (probe calibration data, liquid parameters and device frequency and modulation data) in measurement files. The post-processing software evaluates the desired unit and format for output each time the data is visualized or exported. This allows verification of the complete software setup even after the measurement and allows correction of erroneous parameter settings. For example, if a measurement has been performed with an incorrect crest factor parameter in the device setup, the parameter can be corrected afterwards and the data can be reevaluated.

The measured data can be visualized or exported in different units or formats, depending on the selected probe type (e.g., [V/m], [A/m], [W/kg]). Some of these units are not available in certain situations or give meaningless results, e.g., a SAR-output in a non-lose media, will always be zero. Raw data can also be exported to perform the evaluation with other software packages.

➤ Data Evaluation

The DASY post-processing software (SEMCAD) automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The parameters used in the evaluation are stored in the configuration modules of the software:

Probe parameters:	- Sensitivity	Norm _i , a _{i0} , a _{i1} , a _{i2}
	- Conversion factor	ConvF _i
	- Diode compression point	dcp _i
Device parameters:	- Frequency	f
	- Crest factor	cf
Media parameters:	- Conductivity	σ
	- Density	ρ

These parameters must be set correctly in the software. They can be found in the component documents or they can be imported into the software from the configuration files issued for the DASY components. In the direct measuring mode of the multi-meter option, the parameters of the actual system setup are used. In the scan visualization and export modes, the parameters stored in the corresponding document files are used.

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics. If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power.

The formula for each channel can be given as:

$$V_i = U_i + U_i^2 \cdot \frac{cf}{dcp_i}$$

with V_i = compensated signal of channel i, (i = x, y, z)

U_i = input signal of channel i, (i = x, y, z)

cf = crest factor of exciting field (DASY parameter)

dcp_i = diode compression point (DASY parameter)

From the compensated input signals, the primary field data for each channel can be evaluated:

$$\text{E-field Probes: } E_i = \sqrt{\frac{V_i}{\text{Norm}_i \cdot \text{ConvF}}}$$

$$\text{H-field Probes: } H_i = \sqrt{V_i} \cdot \frac{a_{i0} + a_{i1}f + a_{i2}f^2}{f}$$

with V_i = compensated signal of channel i, (i = x, y, z)

Norm_i = sensor sensitivity of channel i, (i = x, y, z), $\mu V/(V/m)^2$ for E-field Probes

ConvF = sensitivity enhancement in solution

a_{ij} = sensor sensitivity factors for H-field probes

f = carrier frequency [GHz]

E_i = electric field strength of channel i in V/m

H_i = magnetic field strength of channel i in A/m

The RSS value of the field components gives the total field strength (Hermitian magnitude):

$$E_{\text{tot}} = \sqrt{E_x^2 + E_y^2 + E_z^2}$$

The primary field data are used to calculate the derived field units.

$$SAR = E_{\text{tot}}^2 \cdot \frac{\sigma}{\rho \cdot 1000}$$

with SAR = local specific absorption rate in W/kg

E_{tot} = total field strength in V/m

σ = conductivity in [mho/m] or [Siemens/m]

ρ = equivalent tissue density in g/cm³

Note that the density is set to 1, to account for actual head tissue density rather than the density of the tissue simulating liquid.

5 Test Equipment List

Manufacturer	Name of Equipment	Type/Model	Serial Number	Calibration	
				Last Cal.	Due Date
SPEAG	750MHz System Validation Kit	D750V3	1194	Feb. 17,2023	Feb. 16,2026
SPEAG	835MHz System Validation Kit	D835V2	484	Aug. 25,2023	Aug. 24,2026
SPEAG	1800MHz System Validation Kit	D1800V2	2d158	Dec. 17,2021	Dec. 16,2024
SPEAG	1900MHz System Validation Kit	D1900V2	5d002	Aug. 25,2023	Aug. 24,2026
SPEAG	2450MHz System Validation Kit	D2450V2	745	Aug. 28,2023	Aug. 27,2026
SPEAG	2600MHz System Validation Kit	D2600V2	1073	Feb. 17,2023	Feb. 16,2026
SPEAG	3500MHz System Validation Kit	D3500V2	1104	June 03,2023	June 02,2026
SPEAG	3700MHz System Validation Kit	D3700V2	1076	June 03,2023	June 02,2026
SPEAG	3900MHz System Validation Kit	D3900V2	1046	June 03,2023	June 02,2026
SPEAG	5GHz System Validation Kit	D5GHzV2	1301	Feb.16, 2023	Feb.15, 2026
Rohde & Schwarz	UNIVERSAL RADIO COMMUNICATION TESTER	CMW500	1201.0002K50-104209-JC	Nov.05, 2023	Nov.04, 2024
Keysight	UXM 5G Wireless Test Platform	E7515B	MY59321499	Sep.08,2023	Sep.07,2024
SPEAG	Data Acquisition Electronics	DAE3	428	Aug.30,2023	Aug.29,2024
SPEAG	Dosimetric E-Field Probe	EX3DV4	7624	Sep. 06,2023	Sep. 05,2024
Agilent	ENA Series Network Analyzer	E5071C	MY46317418	Oct.25, 2023	Oct.24, 2024
SPEAG	DAK	DAK-3.5	1226	Aug.30,2023	Aug.29,2024
SPEAG	SAM Twin Phantom	QD000P40CD	1802	NCR	NCR
SPEAG	ELI Phantom	QDOVA004AA	2058	NCR	NCR
AR	Amplifier	ZHL-42W	QA1118004	NCR	NCR
Agilent	Power Meter	N1914A	MY50001102	Oct.25, 2023	Oct.24, 2024
Agilent	Power Sensor	N8481H	MY51240001	Oct.25, 2023	Oct.24, 2024
R&S	Spectrum Analyzer	N9020A	MY51170037	Oct.25, 2023	Oct.24, 2024
Agilent	Signal Generation	N5182A	MY48180656	Oct.25, 2023	Oct.24, 2024
Worken	Directional Coupler	0110A05601O-10	COM5BNW1A2	Oct.25, 2023	Oct.24, 2024

Note:

1. The calibration certificate of DASY can be referred to appendix D of this report.
2. The dipole calibration interval can be extended to 3 years with justification. The dipoles are also not physically damaged, or repaired during the interval.
3. The Insertion Loss calibration of Dual Directional Coupler and Attenuator were characterized via the network analyzer and compensated during system check.
4. The dielectric probe kit was calibrated via the network analyzer, with the specified procedure (calibrated in pure water) and calibration kit (standard) short circuit, before the dielectric measurement. The specific procedure and calibration kit are provided by Agilent.
5. In system check we need to monitor the level on the power meter, and adjust the power amplifier level to have precise power level to the dipole; the measured SAR will be normalized to 1W input power according to the ratio of 1W to the input power to the dipole. For system check, the calibration of the power amplifier is deemed not critically required

for correct measurement; the power meter is critical and we do have calibration for it

6 Tissue Simulating Liquids

For the measurement of the field distribution inside the SAM phantom with DASY, the phantom must be filled with around 25 liters of homogeneous body tissue simulating liquid. For head SAR testing, the liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 6.1. For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15 cm, which is shown as followed:



Photo of Liquid Height for Head SAR

Photo of Liquid Height for Body SAR

The following table gives the recipes for tissue simulating liquid.

Frequency (MHz)	Water (%)	Sugar (%)	Cellulose (%)	Salt (%)	Preventol (%)	DGBE (%)	Conductivity (σ)	Permittivity (ϵ_r)
For Head								
835	40.3	57.9	0.2	1.4	0.2	0	0.90	41.5
1800,1900,2000	55.2	0	0	0.3	0	44.5	1.40	40.0
2450	55.0	0	0	0	0	45.0	1.80	39.2
2600	54.8	0	0	0.1	0	45.1	1.96	39.0
For Body								
835	50.8	48.2	0	0.9	0.1	0	0.97	55.2
1800,1900,2000	70.2	0	0	0.4	0	29.4	1.52	53.3
2450	68.6	0	0	0	0	31.4	1.95	52.7
2600	65.5	0	0	0	0	31.5	2.16	52.5

The following table shows the measuring results for simulating liquid.

Measured Frequency (MHz)	Target Tissue		Measured Tissue				Liquid Temp.	Test Data
	ϵ_r	σ	ϵ_r	Dev. (%)	σ	Dev. (%)		
750	41.9	0.89	43.651	4.18%	0.923	3.67%	22.7	07/26/2024
835	41.5	0.90	43.135	3.94%	0.927	2.95%	22.3	07/30/2024
1750	40.1	1.37	39.859	-0.60%	1.348	-1.59%	22.4	07/31/2024
1900	40.0	1.40	39.136	-2.16%	1.348	-3.70%	22.4	08/01/2024
2450	39.2	1.80	38.788	-1.05%	1.824	1.33%	22.2	08/05/2024
2600	39.0	1.96	40.342	3.44%	1.892	-3.49%	22.8	08/03/2024
3500	37.9	2.91	37.983	0.22%	2.989	2.71%	22.8	08/22/2024
3700	37.7	3.12	38.386	1.82%	3.173	1.69%	22.6	08/23/2024
3900	37.5	3.32	36.698	-2.14%	3.233	-2.61%	22.8	08/23/2024
5250	35.9	4.71	34.503	-3.89%	4.536	-3.70%	22.4	08/06/2024
5750	35.4	5.22	36.020	1.75%	5.073	-2.81%	22.6	08/07/2024
835	41.5	0.90	43.475	4.76%	0.858	-4.62%	22.5	08/19/2024
2600	39.0	1.96	40.404	3.60%	1.920	-2.06%	22.5	08/20/2024

7 System Verification Procedures


Each DASY system is equipped with one or more system validation kits. These units, together with the predefined measurement procedures within the DASY software, enable the user to conduct the system performance check and system validation. System validation kit includes a dipole, tripod holder to fix it underneath the flat phantom and a corresponding distance holder.

➤ Purpose of System Performance check

The system performance check verifies that the system operates within its specifications. System and operator errors can be detected and corrected. It is recommended that the system performance check be performed prior to any usage of the system in order to guarantee reproducible results. The system performance check uses normal SAR measurements in a simplified setup with a well characterized source. This setup was selected to give a high sensitivity to all parameters that might fail or vary over time. The system check does not intend to replace the calibration of the components, but indicates situations where the system uncertainty is exceeded due to drift or failure.

➤ System Setup

In the simplified setup for system evaluation, the EUT is replaced by a calibrated dipole and the power source is replaced by a continuous wave that comes from a signal generator. The calibrated dipole must be placed beneath the flat phantom section of the SAM twin phantom with the correct distance holder. The distance holder should touch the phantom surface with a light pressure at the reference marking and be oriented parallel to the long side of the phantom. The equipment setup is shown below:

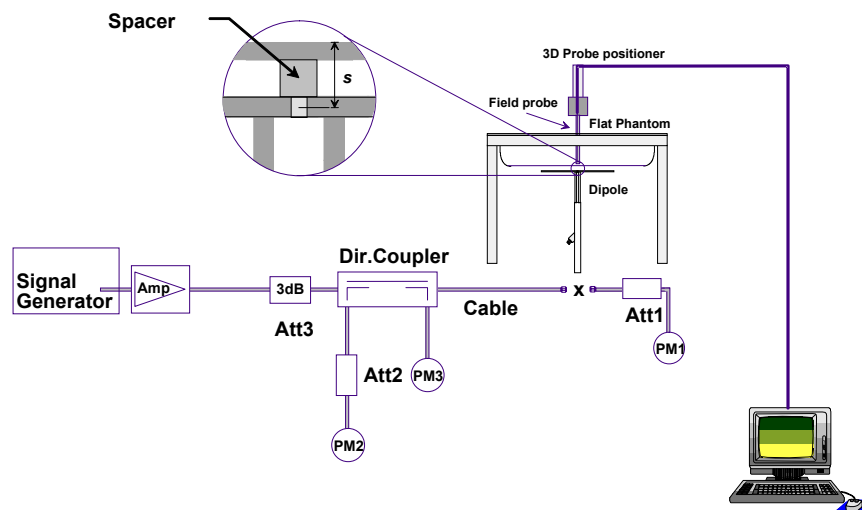

System Setup for System Evaluation

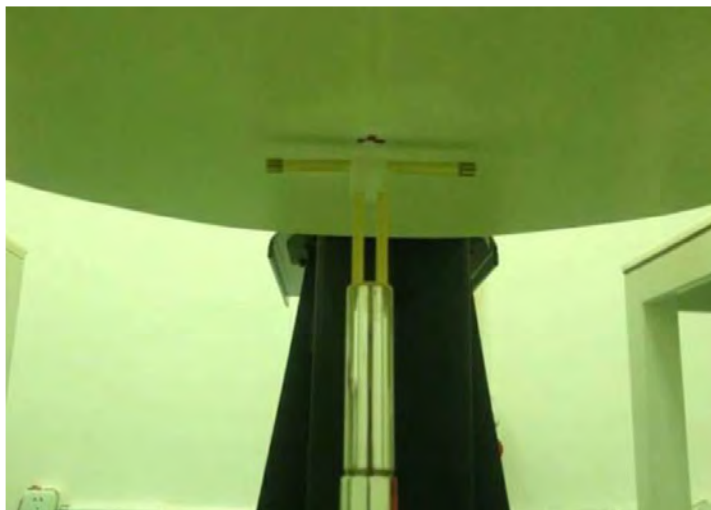


Photo of Dipole Setup

➤ **Validation Results**

Comparing to the original SAR value provided by SPEAG, the verification data should be within its specification of 10%. The table below shows the target SAR and measured SAR after normalized to 1W input power. It indicates that the system performance check can meet the variation criterion and the plots can be referred to Appendix B of this report.

Date	Frequency (MHz)	Power fed onto reference dipole (mW)	Targeted SAR 1g (W/kg)	Measured SAR1g (W/kg)	Normalized SAR (W/kg)	Deviation (%)
07/26/2024	750	250	8.57	2.22	8.88	3.45%
07/30/2024	835	250	9.68	2.35	9.40	-2.71%
07/31/2024	1750	250	39.2	9.74	38.96	-0.62%
08/01/2024	1900	250	40.1	10.46	41.84	4.36%
08/05/2024	2450	250	52.7	13.04	52.16	-1.03%
08/03/2024	2600	250	56.8	13.72	54.88	-3.39%
08/22/2024	3500	100	67.2	6.42	64.20	-4.43%
08/23/2024	3700	100	67.5	6.52	65.20	-3.46%
08/23/2024	3900	100	69.9	7.12	71.20	1.81%
08/06/2024	5250	100	77.7	7.64	76.40	-1.67%
08/07/2024	5750	100	78.0	7.61	76.10	-2.44%
08/19/2024	835	250	9.68	2.49	9.96	2.94%
08/20/2024	2600	250	56.8	13.55	54.20	-4.61%

8 EUT Testing Position

8.1 Handset Reference Points

- The vertical centreline passes through two points on the front side of the handset – the midpoint of the width w_t of the handset at the level of the acoustic output, and the midpoint of the width w_b of the bottom of the handset.
- The horizontal line is perpendicular to the vertical centreline and passes the center of the acoustic output.
- The horizontal line is also tangential to the handset at point A.
- The two lines intersect at point A. Note that for many handsets, point A coincides with the center of the acoustic output; however, the acoustic output may be located elsewhere on the horizontal line. Also note that the vertical centreline is not necessarily parallel to the front face of the handset, especially for clamshell handsets, handsets with flip covers, and other irregularly shaped handsets.



Fig.8-1 Illustration for Front, Back and Side of SAM Phantom

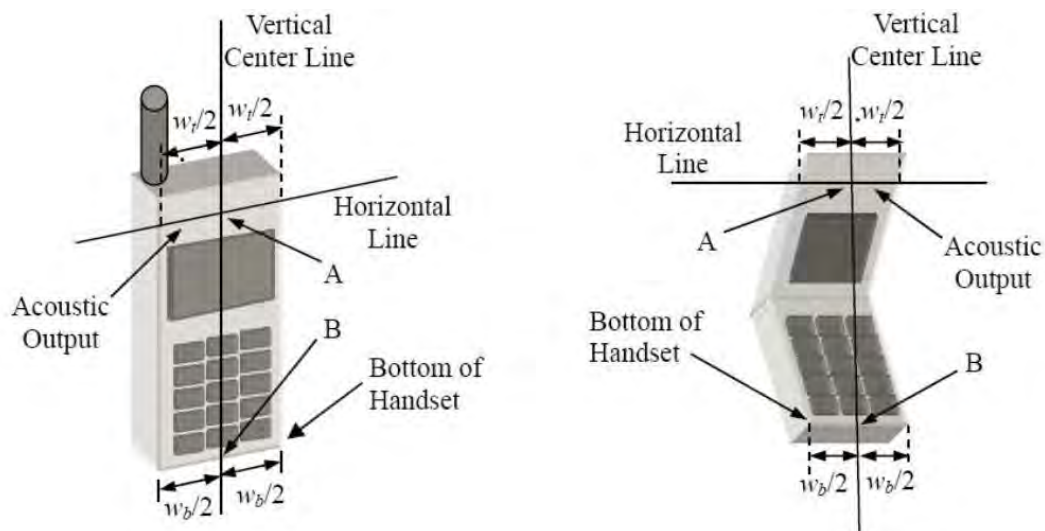


Fig.8-2 Illustration for Handset Vertical and Horizontal Reference Lines

8.2 Positioning for Cheek / Touch

- To position the device with the vertical center line of the body of the device and the horizontal line crossing the center piece in a plane parallel to the sagittal plane of the phantom. While maintaining the device in this plane, align the vertical center line with the reference plane containing the three ear and mouth reference point (M: Mouth, RE: Right Ear and LE: Left Ear) and align the center of the ear piece with the line RE-LE.
- To move the device towards the phantom with the ear piece aligned with the line LE-RE until the phone touched the ear. While maintaining the device in the reference plane and maintaining the phone contact with the ear, move the bottom of the phone until any point on the front side is in contact with the cheek of the phantom or until contact with the ear is lost (see below figure)



Fig.8-3 Illustration for Cheek Position

8.3 Positioning for Ear / 15° Tilt

- To position the device in the “cheek” position described above.
- While maintaining the device the reference plane described above and pivoting against the ear, moves it outward away from the mouth by an angle of 15 degrees or until contact with the ear is lost (see figure below).



Fig.8-4 Illustration for Tilted Position

8.4 Body Worn Accessory Configurations

- To position the device parallel to the phantom surface with either keypad up or down.
- To adjust the device parallel to the flat phantom
- To adjust the distance between the device surface and the flat phantom to 10 mm or holster surface and the flat phantom to 0 mm.

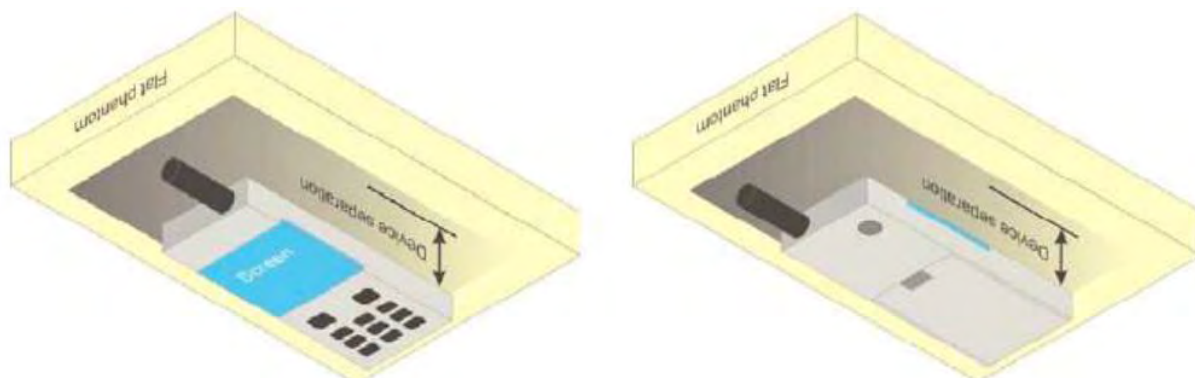


Fig.8-5 Illustration for Body Worn Position

8.5 Wireless Router (Hotspot) Configurations

Wireless Router (Hotspot) Configurations Some battery-operated handsets have the capability to transmit and receive internet connectivity through simultaneous transmission of WIFI in conjunction with a separate licensed transmitter. The FCC has provided guidance in KDB Publication 941225 D06 where SAR test considerations for handsets ($L \times W \geq 9 \text{ cm} \times 5 \text{ cm}$) are based on a composite test separation distance of 10 mm from the front, back and edges of the device with antennas 2.5 cm or closer to the edge of the device, determined from general mixed use conditions for this type of devices. Since the hotspot SAR results may overlap with the body-worn accessory SAR requirements, the more conservative configurations can be considered, thus excluding some body-worn accessory SAR tests.

When the user enables the personal wireless router functions for the handset, actual operations include simultaneous transmission of both the WIFI transmitter and another licensed transmitter. Both transmitters often do not transmit at the same transmitting frequency and thus cannot be evaluated for SAR under actual use conditions. Therefore, SAR must be evaluated for each frequency transmission and mode separately and summed with the WIFI transmitter according to KDB 648474 publication procedures. The “Portable Hotspot” feature on the handset was NOT activated, to ensure the SAR measurements were evaluated for a single transmission frequency RF signal.

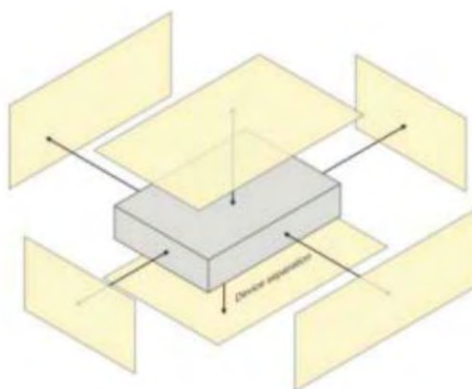


Fig.8-6 Illustration for Hotspot Position

9 Measurement Procedures

The measurement procedures are as follows:

- (a) Use base station simulator (if applicable) or engineering software to transmit RF power continuously (continuous Tx) in the middle channel.
- (b) Keep EUT to radiate maximum output power or 100% duty factor (if applicable)
- (c) Measure output power through RF cable and power meter.
- (d) Place the EUT in the positions as setup photos demonstrates.
- (e) Set scan area, grid size and other setting on the DASY software.
- (f) Measure SAR transmitting at the middle channel for all applicable exposure positions.
- (g) Identify the exposure position and device configuration resulting the highest SAR
- (h) Measure SAR at the lowest and highest channels at the worst exposure position and device configuration if applicable.

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

9.1 Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The DASY software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- (a) Extraction of the measured data (grid and values) from the Zoom Scan
- (b) Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
- (c) Generation of a high-resolution mesh within the measured volume
- (d) Interpolation of all measured values from the measurement grid to the high-resolution grid
- (e) Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- (f) Calculation of the averaged SAR within masses of 1g and 10g

9.2 Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. This distance cannot be smaller

than the distance of sensor calibration points to probe tip as defined in the probe properties.

9.3 Area Scan Procedures

The area scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum found in the scanned area, within a range of the global maximum. The range (in dB) is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan), if only one zoom scan follows the area scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of zoom scans has to be increased accordingly.

Area scan parameters extracted from FCC KDB 865664 D01 SAR measurement 100 MHz to 6 GHz.

	≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
Maximum area scan spatial resolution: $\Delta x_{\text{Area}}, \Delta y_{\text{Area}}$	≤ 2 GHz: ≤ 15 mm $2 - 3$ GHz: ≤ 12 mm	$3 - 4$ GHz: ≤ 12 mm $4 - 6$ GHz: ≤ 10 mm
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be $\leq$ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	

9.4 Zoom Scan Procedures

Zoom scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 gram and 10gram of simulated tissue. The zoom scan measures points (refer to table below) within a cube whose base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the zoom scan evaluates the averaged SAR for 1 gram and 10 gram and displays these values next to the job's label.

Zoom scan parameters extracted from FCC KDB 865664 D01 SAR measurement 100 MHz to 6 GHz.

			$\leq 3 \text{ GHz}$	$> 3 \text{ GHz}$
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface			$5 \text{ mm} \pm 1 \text{ mm}$	$\frac{1}{2} \cdot \delta \cdot \ln(2) \text{ mm} \pm 0.5 \text{ mm}$
Maximum probe angle from probe axis to phantom surface normal at the measurement location			$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
Maximum area scan spatial resolution: $\Delta x_{\text{Area}}, \Delta y_{\text{Area}}$			$\leq 2 \text{ GHz}: \leq 15 \text{ mm}$ $2 - 3 \text{ GHz}: \leq 12 \text{ mm}$	$3 - 4 \text{ GHz}: \leq 12 \text{ mm}$ $4 - 6 \text{ GHz}: \leq 10 \text{ mm}$
			When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be $\leq$ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	
Maximum zoom scan spatial resolution: $\Delta x_{\text{Zoom}}, \Delta y_{\text{Zoom}}$			$\leq 2 \text{ GHz}: \leq 8 \text{ mm}$ $2 - 3 \text{ GHz}: \leq 5 \text{ mm}^*$	$3 - 4 \text{ GHz}: \leq 5 \text{ mm}^*$ $4 - 6 \text{ GHz}: \leq 4 \text{ mm}^*$
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{\text{Zoom}}(n)$		$\leq 5 \text{ mm}$	$3 - 4 \text{ GHz}: \leq 4 \text{ mm}$ $4 - 5 \text{ GHz}: \leq 3 \text{ mm}$ $5 - 6 \text{ GHz}: \leq 2 \text{ mm}$
	graded grid	$\Delta z_{\text{Zoom}}(1)$: between 1 st two points closest to phantom surface	$\leq 4 \text{ mm}$	$3 - 4 \text{ GHz}: \leq 3 \text{ mm}$ $4 - 5 \text{ GHz}: \leq 2.5 \text{ mm}$ $5 - 6 \text{ GHz}: \leq 2 \text{ mm}$
		$\Delta z_{\text{Zoom}}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{\text{Zoom}}(n-1) \text{ mm}$	
Minimum zoom scan volume	x, y, z		$\geq 30 \text{ mm}$	$3 - 4 \text{ GHz}: \geq 28 \text{ mm}$ $4 - 5 \text{ GHz}: \geq 25 \text{ mm}$ $5 - 6 \text{ GHz}: \geq 22 \text{ mm}$
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see IEEE Std 1528-2013 for details.				
* When zoom scan is required and the <i>reported</i> SAR from the <i>area scan based 1-g SAR estimation</i> procedures of KDB Publication 447498 is $\leq 1.4 \text{ W/kg}$, $\leq 8 \text{ mm}$, $\leq 7 \text{ mm}$ and $\leq 5 \text{ mm}$ zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

9.5 Volume Scan Procedures

The volume scan is used for assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing. When all volume scan were completed, the software, SEMCAD postprocessor can combine and subsequently superpose these measurement data to calculating the multiband SAR.

9.6 Power Drift Monitoring

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In DASY measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drift more than 5%, the SAR will be retested.

10 TEST CONDITIONS AND RESULTS

10.1 Conducted Power

<GSM Conducted power>

Band GSM850		Burst Average Power (dBm)			Frame-Average Power (dBm)		
TX Channel	Tune-up limit (dBm)	128	190	251	128	190	251
Frequency (MHz)		824.2	836.6	848.8	824.2	836.6	848.6
GSM	34.00	33.07	33.16	33.13	24.04	24.13	24.10
GPRS (GMSK, 1 Tx slot)	34.00	33.06	33.11	33.05	24.03	24.08	24.02
GPRS (GMSK, 2 Tx slots)	33.00	32.31	32.38	32.33	26.29	26.36	26.31
GPRS (GMSK, 3 Tx slots)	31.00	30.53	30.59	30.57	26.27	26.33	26.31
GPRS (GMSK, 4 Tx slots)	30.00	29.33	29.44	29.41	26.32	26.43	26.40
EGPRS (8PSK, 1 Tx slot)	27.00	26.13	26.14	25.80	17.10	17.11	16.77
EGPRS (8PSK, 2 Tx slot)	25.00	24.95	24.78	24.58	18.93	18.76	18.56
EGPRS (8PSK, 3 Tx slot)	23.00	22.56	22.36	22.20	18.30	18.10	17.94
EGPRS (8PSK, 1 Tx slot)	22.00	21.29	21.03	20.85	18.28	18.02	17.84
Band PCS1900		Burst Average Power (dBm)			Frame-Average Power (dBm)		
TX Channel	Tune-up limit (dBm)	512	661	810	512	661	810
Frequency (MHz)		1850.2	1880.0	1909.8	1850.2	1880.0	1909.8
GSM	31.00	30.64	30.19	30.11	21.61	21.16	21.08
GPRS (GMSK, 1 Tx slot)	31.00	30.66	30.16	30.09	21.63	21.13	21.06
GPRS (GMSK, 2 Tx slots)	30.00	29.70	29.24	29.19	23.68	23.22	23.17
GPRS (GMSK, 3 Tx slots)	28.00	27.60	27.20	27.22	23.34	22.94	22.96
GPRS (GMSK, 4 Tx slots)	27.00	26.48	26.14	26.15	23.47	23.13	23.14
EGPRS (8PSK, 1 Tx slot)	26.00	25.82	25.41	24.97	16.79	16.38	15.94
EGPRS (8PSK, 2 Tx slot)	25.00	24.70	24.32	23.91	18.68	18.30	17.89
EGPRS (8PSK, 3 Tx slot)	23.00	22.40	22.17	21.85	18.14	17.91	17.59
EGPRS (8PSK, 1 Tx slot)	22.00	21.01	20.68	20.28	18.00	17.67	17.27

Remark: The frame-averaged power is linearly scaled the maximum burst averaged power over 8 time slots.

The calculated method are shown as below:

Frame-averaged power = Maximum burst averaged power (1 Tx Slot) – 9.03 dB

Frame-averaged power = Maximum burst averaged power (2 Tx Slots) – 6.02 dB

Frame-averaged power = Maximum burst averaged power (3 Tx Slots) - 4.26 dB

Frame-averaged power = Maximum burst averaged power (4 Tx Slots) – 3.01 dB

Note:

1. Per KDB 447498 D01, the maximum output power channel is used for SAR testing and for further SAR test reduction
2. For Data mode SAR testing, GPRS and EDGE should be evaluated, therefore the EUT was set in corresponding TX slots due to its highest frame-average power.

<WCDMA Conducted Power>

The following tests were conducted according to the test requirements outlines in 3GPP TS 34.121 specification. A summary of these settings is illustrated below:

HSDPA Setup Configuration:

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting:
 - i. Set Gain Factors (β_c and β_d) and parameters were set according to each
 - ii. Specific sub-test in the following table, C10.1.4, quoted from the TS 34.121
 - iii. Set RMC 12.2Kbps + HSDPA mode.
 - iv. Set Cell Power = -86 dBm
 - v. Set HS-DSCH Configuration Type to FRC (H-set 1, QPSK)
 - vi. Select HSDPA Uplink Parameters
 - vii. Set Delta ACK, Delta NACK and Delta CQI = 8
 - viii. Set Ack-Nack Repetition Factor to 3
 - ix. Set CQI Feedback Cycle (k) to 4 ms
 - x. Set CQI Repetition Factor to 2
 - xi. Power Ctrl Mode = All Up bits
- d. The transmitted maximum output power was recorded.

Table C.10.1.4: β values for transmitter characteristics tests with HS-DPCCH

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{hs} (Note 1, Note 2)	CM (dB) (Note 3)	MPR (dB) (Note 3)
1	2/15	15/15	64	2/15	4/15	0.0	0.0
2	12/15 (Note 4)	15/15 (Note 4)	64	12/15 (Note 4)	24/15	1.0	0.0
3	15/15	8/15	64	15/8	30/15	1.5	0.5
4	15/15	4/15	64	15/4	30/15	1.5	0.5
Note 1: Δ_{ACK}, Δ_{NACK} and $\Delta_{CQI} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$. Note 2: For the HS-DPCCH power mask requirement test in clause 5.2C, 5.7A, and the Error Vector Magnitude (EVM) with HS-DPCCH test in clause 5.13.1A, and HSDPA EVM with phase discontinuity in clause 5.13.1AA, Δ_{ACK} and $\Delta_{NACK} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$, and $\Delta_{CQI} = 24/15$ with $\beta_{hs} = 24/15 * \beta_c$. Note 3: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases. Note 4: For subtest 2 the β_c/β_d ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 11/15$ and $\beta_d = 15/15$.							

Setup Configuration

HSUPA Setup Configuration:

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting * :
 - i. Call Configs = 5.2B, 5.9B, 5.10B, and 5.13.2B with QPSK
 - ii. Set the Gain Factors (β_c and β_d) and parameters (AG Index) were set according to each specific sub-test in the following table, C11.1.3, quoted from the TS 34.121
 - iii. Set Cell Power = -86 dBm
 - iv. Set Channel Type = 12.2k + HSPA
 - v. Set UE Target Power
 - vi. Power Ctrl Mode= Alternating bits
 - vii. Set and observe the E-TFCI
 - viii. Confirm that E-TFCI is equal to the target E-TFCI of 75 for sub-test 1, and other subtest's E-TFCI
- d. The transmitted maximum output power was recorded.

Table C.11.1.3: β values for transmitter characteristics tests with HS-DPCCH and E-DCH

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{HS} (Note 1)	β_{ec}	β_{ed} (Note 5) (Note 6)	β_{ed} (SF)	β_{ed} (Codes)	CM (dB) (Note 2)	MPR (dB) (Note 2)	AG Index (Note 6)	E-TFCI
1	11/15 (Note 3)	15/15 (Note 3)	64	11/15 (Note 3)	22/15	209/225	1309/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	β_{ed1} : 47/15 β_{ed2} : 47/15	4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15 (Note 4)	15/15 (Note 4)	64	15/15 (Note 4)	30/15	24/15	134/15	4	1	1.0	0.0	21	81
Note 1: Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$. Note 2: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference. Note 3: For subtest 1 the β_c/β_d ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 10/15$ and $\beta_d = 15/15$. Note 4: For subtest 5 the β_c/β_d ratio of 15/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 14/15$ and $\beta_d = 15/15$. Note 5: In case of testing by UE using E-DPDCH Physical Layer category 1, Sub-test 3 is omitted according to TS25.306 Table 5.1g. Note 6: β_{ed} can not be set directly, it is set by Absolute Grant Value.													

Setup Configuration

<WCDMA Conducted Power>

WCDMA	Band II (dBm)				Band IV (dBm)				Band V (dBm)			
TX Channel	Tune-up	9262	9400	9538	Tune-up	1312	1412	1513	Tune-up	4132	4183	4233
Frequency (MHz)	limit (dBm)	1852.4	1880.0	1907.6	limit (dBm)	1712.4	1732.6	1752.6	limit (dBm)	826.4	836.6	846.6
RMC 12.2Kbps	24.50	24.00	24.02	24.04	24.00	23.44	23.36	23.56	24.50	24.04	24.00	24.14
RMC AMR	24.00	23.62	23.74	23.22	23.50	23.16	23.04	23.33	24.00	23.70	23.95	23.35
HSDPA Subtest-1	22.00	21.96	21.97	21.93	22.00	21.44	21.36	21.59	22.00	21.97	21.97	22.10
HSDPA Subtest-2	22.00	21.95	21.99	21.93	22.00	21.43	21.35	21.59	22.00	22.00	22.00	22.12
HSDPA Subtest-3	22.00	21.95	21.96	21.95	22.00	21.45	21.34	21.61	22.00	21.99	22.01	22.12
HSDPA Subtest-4	22.00	21.93	21.96	21.95	22.00	21.44	21.34	21.56	22.00	22.02	21.99	22.10
HSUPA Subtest-1	20.00	19.76	19.24	19.49	20.00	19.22	18.88	19.36	20.00	19.74	19.72	19.64
HSUPA Subtest-2	20.00	19.74	19.27	19.75	20.00	19.03	19.18	18.81	20.00	19.72	19.55	19.62
HSUPA Subtest-3	20.00	19.25	19.77	19.54	20.00	18.98	18.64	19.33	20.00	19.25	19.48	19.28
HSUPA Subtest-4	20.00	19.48	19.79	19.57	20.00	19.18	18.55	19.36	20.00	19.18	19.73	19.29
HSUPA Subtest-5	20.00	19.73	19.75	19.75	20.00	19.26	18.99	19.31	20.00	19.23	19.53	19.80

General Note

- Per KDB 941225 D01 v02, RMC 12.2kbps setting is used to evaluate SAR as primary mode. When the maximum output power and tune-up tolerance specified for production units in a secondary mode is $\leq \frac{1}{4}$ dB higher than the primary mode or when the highest reported SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for the secondary mode.
- It is expected by the manufacturer that MPR for some HSDPA/HSUPA subtests may differ from the specification of 3GPP, according to the chipset implementation in this model. The implementation and expected deviation are detailed in tune-up procedure exhibit.

<LTE Conducted Power>

LTE Band 2							
BW (MHz)	Modulation	RB Size	RB Offset	Channel/Frequency(MHz)			Tune-up limit (dBm)
				18700	18900	19100	
				1860	1880	1900	
20	QPSK	1	0	23.36	23.28	23.41	24
20	QPSK	1	49	23.57	23.26	23.83	
20	QPSK	1	99	23.09	23.40	23.34	
20	QPSK	50	0	22.18	22.22	22.40	23
20	QPSK	50	24	22.20	22.30	22.18	
20	QPSK	50	50	22.21	22.07	22.23	
20	QPSK	100	0	22.04	22.11	22.36	23
20	16QAM	1	0	22.15	22.13	22.12	23
20	16QAM	1	49	22.09	22.40	22.18	
20	16QAM	1	99	22.28	22.10	22.28	
20	16QAM	50	0	21.52	21.52	21.32	22
20	16QAM	50	24	21.16	21.40	21.33	
20	16QAM	50	50	21.49	21.46	21.21	
20	16QAM	100	0	21.34	21.35	21.51	22
BW (MHz)	Modulation	RB Size	RB Offset	Channel/Frequency(MHz)			Tune-up limit (dBm)
				18675	18900	19125	
				1857.5	1880	1902.5	
15	QPSK	1	0	23.75	23.60	23.37	24
15	QPSK	1	37	23.30	23.01	23.61	
15	QPSK	1	74	23.52	23.29	23.22	
15	QPSK	36	0	22.28	22.34	22.23	23
15	QPSK	36	20	22.36	22.23	22.38	
15	QPSK	36	39	22.31	22.16	22.21	
15	QPSK	75	0	22.25	22.42	22.19	23
15	16QAM	1	0	22.16	22.30	22.36	23
15	16QAM	1	37	22.08	22.20	22.06	
15	16QAM	1	74	22.32	22.27	22.34	
15	16QAM	36	0	21.49	21.17	21.44	22
15	16QAM	36	20	21.38	21.36	21.16	
15	16QAM	36	39	21.50	21.33	21.43	
15	16QAM	75	0	21.49	21.38	21.16	22

BW (MHz)	Modulation	RB Size	RB Offset	Channel/Frequency(MHz)			Tune-up limit (dBm)
				18650	18900	19150	
				1855	1880	1905	
10	QPSK	1	0	23.01	23.11	23.38	24
10	QPSK	1	25	23.24	23.61	23.84	
10	QPSK	1	49	23.18	23.79	23.11	
10	QPSK	25	0	22.18	22.12	22.04	23
10	QPSK	25	12	22.27	22.03	22.31	
10	QPSK	25	25	22.35	22.45	22.06	
10	QPSK	50	0	22.17	22.12	22.16	23
10	16QAM	1	0	22.19	22.10	22.10	23
10	16QAM	1	25	22.10	22.42	22.40	
10	16QAM	1	49	22.37	22.06	22.12	
10	16QAM	25	0	21.54	21.15	21.21	22
10	16QAM	25	12	21.34	21.49	21.53	
10	16QAM	25	25	21.16	21.29	21.43	
10	16QAM	50	0	21.29	21.37	21.25	22
BW (MHz)	Modulation	RB Size	RB Offset	Channel/Frequency(MHz)			Tune-up limit (dBm)
				18625	18900	19175	
				1852.5	1880	1907.5	
5	QPSK	1	0	23.64	23.62	23.06	24
5	QPSK	1	12	23.49	23.47	23.94	
5	QPSK	1	24	23.19	23.85	23.50	
5	QPSK	12	0	22.16	22.35	22.16	23
5	QPSK	12	7	22.35	22.20	22.30	
5	QPSK	12	13	22.12	22.08	22.06	
5	QPSK	25	0	22.18	22.28	22.11	23
5	16QAM	1	0	22.14	22.18	22.15	23
5	16QAM	1	12	22.27	22.42	22.38	
5	16QAM	1	24	22.10	22.24	22.20	
5	16QAM	12	0	21.29	21.46	21.50	22
5	16QAM	12	7	21.16	21.34	21.45	
5	16QAM	12	13	21.53	21.54	21.32	
5	16QAM	25	0	21.22	21.44	21.55	22

BW (MHz)	Modulation	RB Size	RB Offset	Channel/Frequency(MHz)			Tune-up limit (dBm)
				18615	18900	19185	
				1851.5	1880	1908.5	
3	QPSK	1	0	23.17	23.35	23.58	24
3	QPSK	1	8	23.84	23.17	23.45	
3	QPSK	1	14	23.50	23.22	23.10	
3	QPSK	8	0	22.05	22.31	22.41	23
3	QPSK	8	4	22.11	22.30	22.19	23
3	QPSK	8	7	22.25	22.06	22.36	
3	QPSK	15	0	22.31	22.18	22.12	
3	16QAM	1	0	22.41	22.04	22.11	23
3	16QAM	1	8	22.09	22.09	22.43	
3	16QAM	1	14	22.02	22.44	22.02	
3	16QAM	8	0	21.36	21.22	21.45	22
3	16QAM	8	4	21.51	21.27	21.21	
3	16QAM	8	7	21.19	21.21	21.46	
3	16QAM	15	0	21.15	21.34	21.18	22
BW (MHz)	Modulation	RB Size	RB Offset	Channel/Frequency(MHz)			Tune-up limit (dBm)
				18607	18900	19193	
				1850.7	1880	1909.3	
1.4	QPSK	1	0	23.60	23.17	23.78	24
1.4	QPSK	1	3	23.47	23.17	23.38	
1.4	QPSK	1	5	23.41	23.19	23.61	
1.4	QPSK	3	0	22.01	22.27	22.05	23
1.4	QPSK	3	1	22.31	22.29	22.35	
1.4	QPSK	3	3	22.20	22.17	22.27	
1.4	QPSK	6	0	22.13	22.09	22.28	23
1.4	16QAM	1	0	22.09	22.05	22.34	23
1.4	16QAM	1	3	22.11	22.27	22.15	
1.4	16QAM	1	5	22.21	22.18	22.12	
1.4	16QAM	3	0	21.42	21.44	21.18	22
1.4	16QAM	3	1	21.42	21.22	21.49	
1.4	16QAM	3	3	21.48	21.42	21.30	
1.4	16QAM	6	0	21.42	21.25	21.41	22

LTE Band 4							
BW (MHz)	Modulation	RB Size	RB Offset	Channel/Frequency(MHz)			Tune-up limit (dBm)
				20050	20175	20300	
				1720	1747.5	1775	
20	QPSK	1	0	23.57	23.91	23.17	24
20	QPSK	1	49	23.79	23.28	23.38	
20	QPSK	1	99	23.37	23.54	23.45	
20	QPSK	50	0	22.06	22.17	22.11	23
20	QPSK	50	24	22.14	22.10	22.45	
20	QPSK	50	50	22.17	22.06	22.28	
20	QPSK	100	0	22.22	22.13	22.41	23
20	16QAM	1	0	22.25	22.22	22.40	23
20	16QAM	1	49	22.10	22.03	22.38	
20	16QAM	1	99	22.27	22.10	22.17	
20	16QAM	50	0	21.35	21.31	21.16	22
20	16QAM	50	24	21.19	21.27	21.53	
20	16QAM	50	50	21.28	21.40	21.36	
20	16QAM	100	0	21.24	21.42	21.20	22
BW (MHz)	Modulation	RB Size	RB Offset	Channel/Frequency(MHz)			Tune-up limit (dBm)
				20025	20175	20325	
				1717.5	1747.5	1777.5	
15	QPSK	1	0	23.62	23.43	23.14	24
15	QPSK	1	37	23.89	23.73	23.57	
15	QPSK	1	74	23.34	23.91	23.55	
15	QPSK	36	0	22.38	22.11	22.18	23
15	QPSK	36	20	22.10	22.14	22.36	
15	QPSK	36	39	22.43	22.19	22.38	
15	QPSK	75	0	22.32	22.06	22.31	23
15	16QAM	1	0	22.44	22.03	22.39	23
15	16QAM	1	37	22.22	22.40	22.37	
15	16QAM	1	74	22.42	22.19	22.04	
15	16QAM	36	0	21.42	21.41	21.40	22
15	16QAM	36	20	21.42	21.25	21.19	
15	16QAM	36	39	21.37	21.24	21.25	
15	16QAM	75	0	21.48	21.34	21.36	22

BW (MHz)	Modulation	RB Size	RB Offset	Channel/Frequency(MHz)			Tune-up limit (dBm)
				20000	20175	20350	
				1715	1747.5	1780	
10	QPSK	1	0	23.82	23.64	23.17	24
10	QPSK	1	25	23.27	23.32	23.05	
10	QPSK	1	49	23.30	23.28	23.04	
10	QPSK	25	0	22.11	22.14	22.28	23
10	QPSK	25	12	22.45	22.11	22.05	
10	QPSK	25	25	22.23	22.02	22.34	
10	QPSK	50	0	22.22	22.30	22.13	23
10	16QAM	1	0	22.06	22.06	22.37	23
10	16QAM	1	25	22.23	22.27	22.14	
10	16QAM	1	49	22.18	22.27	22.07	
10	16QAM	25	0	21.21	21.31	21.25	22
10	16QAM	25	12	21.30	21.19	21.48	
10	16QAM	25	25	21.50	21.32	21.38	
10	16QAM	50	0	21.15	21.38	21.44	22
BW (MHz)	Modulation	RB Size	RB Offset	Channel/Frequency(MHz)			Tune-up limit (dBm)
				19975	20175	20375	
				1712.5	1747.5	1782.5	
5	QPSK	1	0	23.25	23.24	23.84	24
5	QPSK	1	12	23.46	23.61	23.20	
5	QPSK	1	24	23.39	23.84	23.91	
5	QPSK	12	0	22.03	22.09	22.32	23
5	QPSK	12	7	22.44	22.09	22.28	
5	QPSK	12	13	22.21	22.27	22.16	
5	QPSK	25	0	22.44	22.23	22.16	23
5	16QAM	1	0	22.37	22.28	22.23	23
5	16QAM	1	12	22.41	22.23	22.09	
5	16QAM	1	24	22.40	22.19	22.16	
5	16QAM	12	0	21.26	21.27	21.50	22
5	16QAM	12	7	21.26	21.31	21.26	
5	16QAM	12	13	21.31	21.39	21.17	
5	16QAM	25	0	21.41	21.34	21.34	22

BW (MHz)	Modulation	RB Size	RB Offset	Channel/Frequency(MHz)			Tune-up limit (dBm)
				19665	20175	20385	
				1711.5	1747.5	1783.5	
3	QPSK	1	0	23.21	23.77	23.16	24
3	QPSK	1	8	23.38	23.91	23.71	
3	QPSK	1	14	23.16	23.62	23.61	
3	QPSK	8	0	22.08	22.13	22.38	23
3	QPSK	8	4	22.29	22.04	22.30	
3	QPSK	8	7	22.05	22.26	22.42	
3	QPSK	15	0	22.30	22.04	22.33	23
3	16QAM	1	0	22.21	22.36	22.09	23
3	16QAM	1	8	22.24	22.22	22.33	
3	16QAM	1	14	22.13	22.38	22.13	
3	16QAM	8	0	21.37	21.46	21.40	22
3	16QAM	8	4	21.51	21.39	21.53	
3	16QAM	8	7	21.29	21.19	21.37	
3	16QAM	15	0	21.46	21.47	21.26	22
BW (MHz)	Modulation	RB Size	RB Offset	Channel/Frequency(MHz)			Tune-up limit (dBm)
				19957	20175	20393	
				1710.7	1747.5	1784.3	
1.4	QPSK	1	0	23.36	23.43	23.13	24
1.4	QPSK	1	3	23.51	23.20	23.97	
1.4	QPSK	1	5	23.83	23.49	23.92	
1.4	QPSK	3	0	22.34	22.19	22.44	23
1.4	QPSK	3	1	22.12	22.31	22.13	
1.4	QPSK	3	3	22.07	22.32	22.04	
1.4	QPSK	6	0	22.16	22.16	22.35	23
1.4	16QAM	1	0	22.21	22.27	22.01	23
1.4	16QAM	1	3	22.25	22.39	22.38	
1.4	16QAM	1	5	22.11	22.28	22.30	
1.4	16QAM	3	0	21.20	21.42	21.18	22
1.4	16QAM	3	1	21.18	21.25	21.22	
1.4	16QAM	3	3	21.32	21.55	21.45	
1.4	16QAM	6	0	21.44	21.37	21.43	22

LTE Band 5							
BW (MHz)	Modulation	RB Size	RB Offset	Channel/Frequency(MHz)			Tune-up limit (dBm)
				20450	20525	20600	
				829	836.5	844	
10	QPSK	1	0	23.83	23.75	23.54	24
10	QPSK	1	25	23.19	23.73	23.59	
10	QPSK	1	49	23.74	23.75	23.19	
10	QPSK	25	0	22.38	22.24	22.11	23
10	QPSK	25	12	22.18	22.33	22.07	
10	QPSK	25	25	22.35	22.10	22.45	
10	QPSK	50	0	22.29	22.41	22.42	23
10	16QAM	1	0	22.44	22.26	22.22	23
10	16QAM	1	25	22.33	22.01	22.41	
10	16QAM	1	49	22.12	22.28	22.39	
10	16QAM	25	0	21.46	21.48	21.38	22
10	16QAM	25	12	21.41	21.36	21.53	
10	16QAM	25	25	21.23	21.21	21.37	
10	16QAM	50	0	21.27	21.52	21.54	22
BW (MHz)	Modulation	RB Size	RB Offset	Channel/Frequency(MHz)			Tune-up limit (dBm)
				20425	20525	20625	
				826.5	836.5	846.5	
5	QPSK	1	0	23.57	23.20	23.67	24
5	QPSK	1	12	23.15	23.53	23.59	
5	QPSK	1	24	23.13	23.40	23.62	
5	QPSK	12	0	22.06	22.12	22.17	23
5	QPSK	12	7	22.01	22.39	22.37	
5	QPSK	12	13	22.35	22.26	22.23	
5	QPSK	25	0	22.23	22.08	22.22	23
5	16QAM	1	0	22.04	22.12	22.27	23
5	16QAM	1	12	22.03	22.04	22.29	
5	16QAM	1	24	22.22	22.37	22.29	
5	16QAM	12	0	21.16	21.39	21.33	22
5	16QAM	12	7	21.15	21.19	21.24	
5	16QAM	12	13	21.26	21.21	21.45	
5	16QAM	25	0	21.48	21.46	21.21	22

BW (MHz)	Modulation	RB Size	RB Offset	Channel/Frequency(MHz)			Tune-up limit (dBm)
				20415	20525	20635	
				825.5	836.5	844	
3	QPSK	1	0	23.03	23.47	23.24	24
3	QPSK	1	8	23.62	23.66	23.39	
3	QPSK	1	14	23.09	23.16	23.75	
3	QPSK	8	0	22.32	22.26	22.23	23
3	QPSK	8	4	22.36	22.35	22.41	
3	QPSK	8	7	22.37	22.07	22.14	
3	QPSK	15	0	22.35	22.31	22.31	23
3	16QAM	1	0	22.06	22.25	22.06	23
3	16QAM	1	8	22.34	22.42	22.24	
3	16QAM	1	14	22.41	22.27	22.36	
3	16QAM	8	0	21.18	21.41	21.27	22
3	16QAM	8	4	21.35	21.29	21.42	
3	16QAM	8	7	21.17	21.16	21.51	
3	16QAM	15	0	21.26	21.27	21.41	22
BW (MHz)	Modulation	RB Size	RB Offset	Channel/Frequency(MHz)			Tune-up limit (dBm)
				20407	20525	20643	
				824.7	836.5	848.3	
1.4	QPSK	1	0	23.04	23.35	23.84	24
1.4	QPSK	1	3	23.34	23.38	23.85	
1.4	QPSK	1	5	23.76	23.69	23.53	
1.4	QPSK	3	0	22.17	22.13	22.43	23
1.4	QPSK	3	1	22.11	22.34	22.39	
1.4	QPSK	3	3	22.10	22.09	22.36	
1.4	QPSK	6	0	22.11	22.01	22.26	23
1.4	16QAM	1	0	22.25	22.34	22.25	23
1.4	16QAM	1	3	22.30	22.40	22.26	
1.4	16QAM	1	5	22.25	22.09	22.08	
1.4	16QAM	3	0	21.55	21.54	21.53	22
1.4	16QAM	3	1	21.33	21.51	21.45	
1.4	16QAM	3	3	21.43	21.55	21.50	
1.4	16QAM	6	0	21.54	21.43	21.19	22

LTE Band 7							
BW (MHz)	Modulation	RB Size	RB Offset	Channel/Frequency(MHz)			Tune-up limit (dBm)
				20850	21100	21350	
				2510	2535	2560	
20	QPSK	1	0	23.60	23.34	23.74	24
20	QPSK	1	49	23.49	23.77	23.07	
20	QPSK	1	99	23.85	23.26	23.50	
20	QPSK	50	0	22.21	22.21	22.18	23
20	QPSK	50	24	22.08	22.17	22.11	
20	QPSK	50	50	22.35	22.28	22.23	
20	QPSK	100	0	22.45	22.39	22.03	23
20	16QAM	1	0	22.23	22.38	22.02	23
20	16QAM	1	49	22.28	22.09	22.14	
20	16QAM	1	99	22.36	22.20	22.02	
20	16QAM	50	0	21.20	21.17	21.26	22
20	16QAM	50	24	21.32	21.34	21.49	
20	16QAM	50	50	21.49	21.43	21.45	
20	16QAM	100	0	21.48	21.55	21.15	22
BW (MHz)	Modulation	RB Size	RB Offset	Channel/Frequency(MHz)			Tune-up limit (dBm)
				20825	21100	21375	
				2507.5	2535	2562.5	
15	QPSK	1	0	23.74	23.84	23.49	24
15	QPSK	1	37	23.08	23.26	23.19	
15	QPSK	1	74	23.28	23.38	23.08	
15	QPSK	36	0	22.24	22.44	22.33	23
15	QPSK	36	20	22.31	22.43	22.08	
15	QPSK	36	39	22.26	22.38	22.18	
15	QPSK	75	0	22.05	22.28	22.45	23
15	16QAM	1	0	22.01	22.40	22.43	23
15	16QAM	1	37	22.42	22.02	22.09	
15	16QAM	1	74	22.05	22.08	22.26	
15	16QAM	36	0	21.18	21.53	21.15	22
15	16QAM	36	20	21.51	21.54	21.39	
15	16QAM	36	39	21.41	21.50	21.52	
15	16QAM	75	0	21.36	21.22	21.42	22

BW (MHz)	Modulation	RB Size	RB Offset	Channel/Frequency(MHz)			Tune-up limit (dBm)
				20800	21100	21400	
				2505	2535	2565	
10	QPSK	1	0	23.84	23.38	23.50	24
10	QPSK	1	25	23.28	23.42	23.98	
10	QPSK	1	49	23.48	23.56	23.37	
10	QPSK	25	0	22.25	22.06	22.07	23
10	QPSK	25	12	22.06	22.29	22.08	
10	QPSK	25	25	22.05	22.08	22.44	
10	QPSK	50	0	22.31	22.38	22.09	23
10	16QAM	1	0	22.37	22.37	22.28	23
10	16QAM	1	25	22.41	22.40	22.04	
10	16QAM	1	49	22.02	22.45	22.44	
10	16QAM	25	0	21.37	21.15	21.26	22
10	16QAM	25	12	21.48	21.53	21.28	
10	16QAM	25	25	21.40	21.45	21.32	
10	16QAM	50	0	21.39	21.42	21.15	22
BW (MHz)	Modulation	RB Size	RB Offset	Channel/Frequency(MHz)			Tune-up limit (dBm)
				20775	21100	21425	
				2502.5	2535	2567.5	
5	QPSK	1	0	23.89	23.14	23.38	24
5	QPSK	1	12	23.57	23.44	23.73	
5	QPSK	1	24	23.01	23.07	23.25	
5	QPSK	12	0	22.10	22.41	22.21	23
5	QPSK	12	7	22.05	22.37	22.23	
5	QPSK	12	13	22.17	22.05	22.30	
5	QPSK	25	0	22.28	22.28	22.10	23
5	16QAM	1	0	22.13	22.32	22.42	23
5	16QAM	1	12	22.35	22.35	22.21	
5	16QAM	1	24	22.44	22.34	22.23	
5	16QAM	12	0	21.19	21.42	21.32	22
5	16QAM	12	7	21.42	21.40	21.27	
5	16QAM	12	13	21.32	21.45	21.44	
5	16QAM	25	0	21.30	21.37	21.40	22

LTE Band 12							
BW (MHz)	Modulation	RB Size	RB Offset	Channel/Frequency(MHz)			Tune-up limit (dBm)
				23060	23095	23130	
				704	707.5	711	
10	QPSK	1	0	23.80	23.38	23.74	24
10	QPSK	1	25	23.83	23.10	23.86	
10	QPSK	1	49	23.65	23.82	23.58	
10	QPSK	25	0	22.38	22.14	22.26	23
10	QPSK	25	12	22.35	22.43	22.14	
10	QPSK	25	25	22.27	22.15	22.18	
10	QPSK	50	0	22.11	22.39	22.12	23
10	16QAM	1	0	22.02	22.44	22.45	23
10	16QAM	1	25	22.43	22.24	22.22	
10	16QAM	1	49	22.31	22.36	22.38	
10	16QAM	25	0	21.44	21.39	21.31	22
10	16QAM	25	12	21.19	21.16	21.27	
10	16QAM	25	25	21.31	21.22	21.30	
10	16QAM	50	0	21.19	21.47	21.17	22
BW (MHz)	Modulation	RB Size	RB Offset	Channel/Frequency(MHz)			Tune-up limit (dBm)
				23035	23095	23155	
				701.5	707.5	713.5	
5	QPSK	1	0	23.86	23.94	23.49	24
5	QPSK	1	12	23.00	23.62	23.13	
5	QPSK	1	24	23.72	23.92	23.82	
5	QPSK	12	0	22.31	22.34	22.21	23
5	QPSK	12	7	22.22	22.29	22.45	
5	QPSK	12	13	22.25	22.22	22.02	
5	QPSK	25	0	22.12	22.33	22.12	23
5	16QAM	1	0	22.10	22.45	22.32	23
5	16QAM	1	12	22.20	22.41	22.39	
5	16QAM	1	24	22.08	22.45	22.22	
5	16QAM	12	0	21.21	21.15	21.51	22
5	16QAM	12	7	21.53	21.26	21.30	
5	16QAM	12	13	21.47	21.32	21.44	
5	16QAM	25	0	21.27	21.34	21.52	22

BW (MHz)	Modulation	RB Size	RB Offset	Channel/Frequency(MHz)			Tune-up limit (dBm)
				23025	23095	23165	
				700.5	707.5	714.5	
3	QPSK	1	0	23.22	23.22	23.21	24
3	QPSK	1	8	23.80	23.25	23.91	
3	QPSK	1	14	23.13	23.84	23.29	
3	QPSK	8	0	22.39	22.13	22.15	23
3	QPSK	8	4	22.03	22.38	22.25	
3	QPSK	8	7	22.19	22.14	22.15	
3	QPSK	15	0	22.03	22.08	22.29	23
3	16QAM	1	0	22.43	22.13	22.36	23
3	16QAM	1	8	22.04	22.02	22.18	
3	16QAM	1	14	22.13	22.23	22.17	
3	16QAM	8	0	21.24	21.49	21.34	22
3	16QAM	8	4	21.21	21.52	21.53	
3	16QAM	8	7	21.17	21.52	21.20	
3	16QAM	15	0	21.19	21.27	21.24	22
BW (MHz)	Modulation	RB Size	RB Offset	Channel/Frequency(MHz)			Tune-up limit (dBm)
				23017	23095	23173	
				699.7	707.5	715.3	
1.4	QPSK	1	0	23.95	23.45	23.25	24
1.4	QPSK	1	3	23.79	23.01	23.00	
1.4	QPSK	1	5	23.48	23.95	23.66	
1.4	QPSK	3	0	22.19	22.17	22.43	23
1.4	QPSK	3	1	22.31	22.07	22.17	
1.4	QPSK	3	3	22.31	22.30	22.44	
1.4	QPSK	6	0	22.17	22.28	22.45	23
1.4	16QAM	1	0	22.37	22.25	22.29	23
1.4	16QAM	1	3	22.37	22.21	22.34	
1.4	16QAM	1	5	22.29	22.44	22.29	
1.4	16QAM	3	0	21.42	21.26	21.21	22
1.4	16QAM	3	1	21.40	21.40	21.20	
1.4	16QAM	3	3	21.52	21.17	21.28	
1.4	16QAM	6	0	21.27	21.43	21.37	22

LTE Band 17							
BW (MHz)	Modulation	RB Size	RB Offset	Channel/Frequency(MHz)			Tune-up limit (dBm)
				23780	23790	23800	
				709	710	711	
10	QPSK	1	0	23.86	23.08	23.15	24
10	QPSK	1	25	23.12	23.02	23.63	
10	QPSK	1	49	23.43	23.25	23.20	
10	QPSK	25	0	22.28	22.25	22.21	23
10	QPSK	25	12	22.45	22.34	22.14	
10	QPSK	25	25	22.41	22.22	22.04	
10	QPSK	50	0	22.23	22.02	22.25	23
10	16QAM	1	0	22.25	22.07	22.07	23
10	16QAM	1	25	22.32	22.27	22.11	
10	16QAM	1	49	22.09	22.05	22.33	
10	16QAM	25	0	21.40	21.35	21.41	22
10	16QAM	25	12	21.19	21.47	21.22	
10	16QAM	25	25	21.32	21.21	21.15	
10	16QAM	50	0	21.39	21.42	21.23	22
BW (MHz)	Modulation	RB Size	RB Offset	Channel/Frequency(MHz)			Tune-up limit (dBm)
				23755	23790	23825	
				706.5	710	713.5	
5	QPSK	1	0	23.07	23.71	23.54	24
5	QPSK	1	12	23.12	23.73	23.26	
5	QPSK	1	24	23.85	23.40	23.30	
5	QPSK	12	0	22.03	22.09	22.13	23
5	QPSK	12	7	22.07	22.01	22.38	
5	QPSK	12	13	22.15	22.09	22.02	
5	QPSK	25	0	22.20	22.25	22.22	23
5	16QAM	1	0	22.36	22.02	22.07	23
5	16QAM	1	12	22.23	22.39	22.01	
5	16QAM	1	24	22.38	22.16	22.27	
5	16QAM	12	0	21.44	21.20	21.28	22
5	16QAM	12	7	21.49	21.19	21.24	
5	16QAM	12	13	21.17	21.32	21.18	
5	16QAM	25	0	21.33	21.23	21.23	22

LTE Band 41									
BW (MHz)	Modulation	RB Size	RB Offset	Channel/Frequency(MHz)					Tune-up limit (dBm)
				40140	40365	40590	40865	41140	
				2545	2567.5	2590	2617.5	2645	
20	QPSK	1	0	23.57	23.36	23.24	23.29	23.35	24
20	QPSK	1	49	23.48	23.19	23.05	22.99	23.07	
20	QPSK	1	99	23.77	23.37	23.12	23.41	23.74	
20	QPSK	50	0	22.10	22.08	22.17	22.18	22.20	23
20	QPSK	50	24	22.43	22.17	22.01	22.01	22.11	
20	QPSK	50	50	22.40	22.27	22.24	22.20	22.17	
20	QPSK	100	0	22.28	22.32	22.40	22.15	22.07	23
20	16QAM	1	0	22.01	22.16	22.44	22.41	22.45	23
20	16QAM	1	49	22.36	22.36	22.44	22.26	22.09	
20	16QAM	1	99	22.18	22.08	22.08	22.20	22.32	
20	16QAM	50	0	21.16	21.12	21.18	21.20	21.41	22
20	16QAM	50	24	21.42	21.34	21.45	21.39	21.37	
20	16QAM	50	50	21.33	21.26	21.29	21.27	21.37	
20	16QAM	100	0	21.35	21.21	21.20	21.31	21.49	22
BW (MHz)	Modulation	RB Size	RB Offset	Channel/Frequency(MHz)					Tune-up limit (dBm)
				40115	40350	40590	40875	41165	
				2542.5	2566	2590	2618.5	2647.5	
15	QPSK	1	0	23.65	23.34	23.16	23.40	23.68	24
15	QPSK	1	37	23.23	23.31	23.56	23.61	23.82	
15	QPSK	1	74	23.71	23.35	23.16	23.21	23.27	
15	QPSK	36	0	22.18	22.17	22.24	22.19	22.33	23
15	QPSK	36	20	22.34	22.21	22.10	22.16	22.37	
15	QPSK	36	39	22.02	21.93	22.04	22.01	22.04	
15	QPSK	75	0	22.32	22.13	22.09	22.21	22.40	23
15	16QAM	1	0	22.20	22.08	22.05	22.04	22.14	23
15	16QAM	1	37	22.42	22.25	22.21	22.22	22.34	
15	16QAM	1	74	22.08	22.01	22.03	22.05	22.20	
15	16QAM	36	0	21.40	21.35	21.49	21.40	21.46	22
15	16QAM	36	20	21.29	21.26	21.33	21.30	21.44	
15	16QAM	36	39	21.50	21.39	21.31	21.25	21.26	
15	16QAM	75	0	21.27	21.23	21.25	21.16	21.21	22

BW (MHz)	Modulation	RB Size	RB Offset	Channel/Frequency(MHz)					Tune-up limit (dBm)
				40090	40340	40590	40890	41190	
				2540	2565	2590	2620	2650	
10	QPSK	1	0	23.32	23.57	23.91	23.70	23.49	24
10	QPSK	1	25	23.63	23.38	23.27	23.50	23.75	
10	QPSK	1	49	23.18	23.27	23.48	23.27	23.23	
10	QPSK	25	0	22.12	22.22	22.40	22.26	22.29	23
10	QPSK	25	12	22.28	22.28	22.35	22.16	22.05	
10	QPSK	25	25	22.11	21.99	22.07	22.15	22.36	
10	QPSK	50	0	22.30	22.22	22.20	22.20	22.24	23
10	16QAM	1	0	22.04	22.03	22.08	22.00	22.03	23
10	16QAM	1	25	22.29	22.22	22.26	22.07	22.06	
10	16QAM	1	49	22.05	21.98	22.08	22.10	22.19	
10	16QAM	25	0	21.39	21.30	21.24	21.24	21.37	22
10	16QAM	25	12	21.30	21.23	21.20	21.36	21.53	
10	16QAM	25	25	21.23	21.31	21.52	21.33	21.24	
10	16QAM	50	0	21.47	21.31	21.29	21.19	21.17	22
BW (MHz)	Modulation	RB Size	RB Offset	Channel/Frequency(MHz)					Tune-up limit (dBm)
				40065	40325	40590	40900	41215	
				2537.5	2563.5	2590	2621	2652.5	
5	QPSK	1	0	23.08	23.00	23.07	23.16	23.43	24
5	QPSK	1	12	23.16	23.15	23.23	23.16	23.16	
5	QPSK	1	24	23.14	23.43	23.89	23.81	23.77	
5	QPSK	12	0	22.39	22.32	22.40	22.16	22.06	23
5	QPSK	12	7	22.31	22.31	22.41	22.28	22.32	
5	QPSK	12	13	22.45	22.34	22.35	22.27	22.31	
5	QPSK	25	0	22.24	22.14	22.20	22.11	22.19	23
5	16QAM	1	0	22.37	22.38	22.44	22.28	22.20	23
5	16QAM	1	12	22.22	22.09	22.12	22.20	22.38	
5	16QAM	1	24	22.23	22.22	22.28	22.32	22.38	
5	16QAM	12	0	21.20	21.27	21.54	21.39	21.41	22
5	16QAM	12	7	21.25	21.30	21.50	21.31	21.23	
5	16QAM	12	13	21.49	21.44	21.55	21.39	21.40	
5	16QAM	25	0	21.20	21.23	21.26	21.14	21.21	22

<5G NR Conducted Power>

Band n5 SCS 15KHz						
BW (MHz)	Modulation	RB Allocation	Channel/Frequency(MHz)			Tune-up limit (dBm)
			166800	167300	167800	
			834.0	836.5	839.0	
20	DFT_BPSK	50@25	23.21	23.40	23.02	24
20	DFT_BPSK	1@1	23.39	23.25	23.08	
20	DFT_BPSK	1@104	23.31	23.73	23.01	
20	DFT_QPSK	50@25	23.44	23.23	22.79	24
20	DFT_QPSK	1@1	23.10	22.94	22.86	
20	DFT_QPSK	1@104	22.83	23.25	23.54	
20	DFT_QAM16	50@25	22.12	22.37	22.31	23
20	DFT_QAM16	1@1	22.18	22.20	22.06	
20	DFT_QAM16	1@104	22.28	22.17	22.34	
20	DFT_QAM64	50@25	21.39	21.05	21.45	22
20	DFT_QAM64	1@1	21.40	21.39	21.03	
20	DFT_QAM64	1@104	21.03	21.06	21.41	
20	DFT_QAM256	50@25	19.11	19.20	19.17	20
20	DFT_QAM256	1@1	19.39	19.14	19.24	
20	DFT_QAM256	1@104	19.17	19.13	19.16	
20	CP_QPSK	53@26	21.06	21.40	21.28	22
20	CP_QPSK	1@1	21.17	21.13	21.06	
20	CP_QPSK	1@104	21.35	21.13	21.28	
20	CP_QAM16	53@26	21.33	21.22	21.24	22
20	CP_QAM16	1@1	21.42	21.17	21.30	
20	CP_QAM16	1@104	21.33	21.30	21.43	
20	CP_QAM64	53@26	19.31	19.18	19.01	20
20	CP_QAM64	1@1	19.15	19.23	19.36	
20	CP_QAM64	1@104	19.15	19.16	19.28	
20	CP_QAM256	53@26	17.28	17.26	17.24	18
20	CP_QAM256	1@1	17.10	17.03	17.11	
20	CP_QAM256	1@104	17.19	17.34	17.37	

Band n5 SCS 15KHz						
BW (MHz)	Modulation	RB Allocation	Channel/Frequency(MHz)			Tune-up limit (dBm)
			166300	167300	168300	
			831.5	836.5	841.5	
15	DFT_BPSK	36@18	23.77	23.21	23.61	24
15	DFT_BPSK	1@1	23.51	23.16	23.34	
15	DFT_BPSK	1@77	23.12	23.07	23.46	
15	DFT_QPSK	36@18	23.45	23.50	23.50	24
15	DFT_QPSK	1@1	23.93	23.83	23.77	
15	DFT_QPSK	1@77	23.12	23.42	23.32	
15	DFT_QAM16	36@18	22.04	22.14	22.28	23
15	DFT_QAM16	1@1	22.07	22.16	22.36	
15	DFT_QAM16	1@77	22.43	22.16	22.10	
15	DFT_QAM64	36@18	21.15	21.41	21.44	22
15	DFT_QAM64	1@1	21.39	21.43	21.22	
15	DFT_QAM64	1@77	21.03	21.08	21.20	
15	DFT_QAM256	36@18	19.35	19.09	19.28	20
15	DFT_QAM256	1@1	19.34	19.03	19.13	
15	DFT_QAM256	1@77	19.14	19.08	19.35	
15	CP_QPSK	39@19	21.09	21.37	21.20	22
15	CP_QPSK	1@1	21.04	21.35	21.44	
15	CP_QPSK	1@77	21.19	21.32	21.09	
15	CP_QAM16	39@19	21.33	21.09	21.39	22
15	CP_QAM16	1@1	21.33	21.35	21.40	
15	CP_QAM16	1@77	21.12	21.39	21.17	
15	CP_QAM64	39@19	19.22	19.33	19.28	20
15	CP_QAM64	1@1	19.42	19.13	19.27	
15	CP_QAM64	1@77	19.39	19.27	19.15	
15	CP_QAM256	39@19	17.23	17.28	17.28	18
15	CP_QAM256	1@1	17.30	17.07	17.15	
15	CP_QAM256	1@77	17.15	17.32	17.14	

Band n5 SCS 15KHz						
BW (MHz)	Modulation	RB Allocation	Channel/Frequency(MHz)			Tune-up limit (dBm)
			165800	167300	168800	
			829.0	836.5	844.0	
10	DFT_BPSK	25@12	23.61	23.41	23.38	24
10	DFT_BPSK	1@1	23.25	23.87	23.29	
10	DFT_BPSK	1@50	23.58	23.16	23.01	
10	DFT_QPSK	25@12	23.08	23.87	23.81	24
10	DFT_QPSK	1@1	23.59	23.89	23.37	
10	DFT_QPSK	1@50	23.30	23.06	23.26	
10	DFT_QAM16	25@12	22.30	22.30	22.18	23
10	DFT_QAM16	1@1	22.27	22.29	22.13	
10	DFT_QAM16	1@50	22.13	22.03	22.27	
10	DFT_QAM64	25@12	21.05	21.36	21.07	22
10	DFT_QAM64	1@1	21.39	21.16	21.35	
10	DFT_QAM64	1@50	21.15	21.37	21.23	
10	DFT_QAM256	25@12	19.22	19.16	19.30	20
10	DFT_QAM256	1@1	19.40	19.23	19.12	
10	DFT_QAM256	1@50	19.27	19.21	19.45	
10	CP_QPSK	26@13	21.05	21.45	21.08	22
10	CP_QPSK	1@1	21.05	21.29	21.18	
10	CP_QPSK	1@50	21.13	21.13	21.45	
10	CP_QAM16	26@13	21.29	21.19	21.35	22
10	CP_QAM16	1@1	21.04	21.24	21.36	
10	CP_QAM16	1@50	21.12	21.05	21.06	
10	CP_QAM64	26@13	19.36	19.02	19.26	20
10	CP_QAM64	1@1	19.33	19.13	19.37	
10	CP_QAM64	1@50	19.05	19.38	19.30	
10	CP_QAM256	26@13	17.28	17.25	17.22	18
10	CP_QAM256	1@1	17.26	17.35	17.05	
10	CP_QAM256	1@50	17.43	17.40	17.02	

Band n5 SCS 15KHz						
BW (MHz)	Modulation	RB Allocation	Channel/Frequency(MHz)			Tune-up limit (dBm)
			165300	167300	169300	
			826.5	836.5	846.5	
5	DFT_BPSK	12@6	23.01	23.12	23.93	24
5	DFT_BPSK	1@1	23.16	23.76	23.52	
5	DFT_BPSK	1@23	23.67	23.03	23.21	
5	DFT_QPSK	12@6	23.71	23.11	23.53	24
5	DFT_QPSK	1@1	23.59	23.16	23.87	
5	DFT_QPSK	1@23	23.28	23.73	23.24	
5	DFT_QAM16	12@6	22.19	22.18	22.02	23
5	DFT_QAM16	1@1	22.15	22.35	22.27	
5	DFT_QAM16	1@23	22.06	22.39	22.17	
5	DFT_QAM64	12@6	21.45	21.32	21.12	22
5	DFT_QAM64	1@1	21.21	21.28	21.02	
5	DFT_QAM64	1@23	21.36	21.40	21.41	
5	DFT_QAM256	12@6	19.10	19.22	19.34	20
5	DFT_QAM256	1@1	19.31	19.37	19.11	
5	DFT_QAM256	1@23	19.17	19.17	19.25	
5	CP_QPSK	13@6	21.20	21.40	21.30	22
5	CP_QPSK	1@1	21.09	21.28	21.36	
5	CP_QPSK	1@23	21.39	21.33	21.39	
5	CP_QAM16	13@6	21.22	21.22	21.24	22
5	CP_QAM16	1@1	21.45	21.13	21.45	
5	CP_QAM16	1@23	21.35	21.44	21.22	
5	CP_QAM64	13@6	19.37	19.08	19.34	20
5	CP_QAM64	1@1	19.09	19.10	19.20	
5	CP_QAM64	1@23	19.23	19.13	19.08	
5	CP_QAM256	13@6	17.35	17.39	17.44	18
5	CP_QAM256	1@1	17.01	17.09	17.10	
5	CP_QAM256	1@23	17.21	17.40	17.31	

Band n5 SCS 30KHz						
BW (MHz)	Modulation	RB Allocation	Channel/Frequency(MHz)			Tune-up limit (dBm)
			166800	167300	167800	
			834.0	836.5	839.0	
20	DFT_BPSK	25@12	23.25	23.56	23.30	24
20	DFT_BPSK	1@1	23.85	23.24	23.34	
20	DFT_BPSK	1@49	23.11	23.91	23.74	
20	DFT_QPSK	25@12	23.69	23.78	23.26	24
20	DFT_QPSK	1@1	23.96	23.34	23.02	
20	DFT_QPSK	1@49	23.38	23.80	23.03	
20	DFT_QAM16	25@12	22.05	22.33	22.10	23
20	DFT_QAM16	1@1	22.13	22.06	22.16	
20	DFT_QAM16	1@49	22.27	22.10	22.13	
20	DFT_QAM64	25@12	21.09	21.16	21.38	22
20	DFT_QAM64	1@1	21.12	21.12	21.03	
20	DFT_QAM64	1@49	21.02	21.37	21.36	
20	DFT_QAM256	25@12	19.27	19.04	19.33	20
20	DFT_QAM256	1@1	19.19	19.34	19.31	
20	DFT_QAM256	1@49	19.24	19.27	19.13	
20	CP_QPSK	25@12	21.38	21.05	21.03	22
20	CP_QPSK	1@1	21.29	21.16	21.19	
20	CP_QPSK	1@49	21.27	21.45	21.22	
20	CP_QAM16	25@12	21.07	21.09	21.14	22
20	CP_QAM16	1@1	21.24	21.21	21.11	
20	CP_QAM16	1@49	21.45	21.14	21.35	
20	CP_QAM64	25@12	19.22	19.40	19.26	20
20	CP_QAM64	1@1	19.28	19.10	19.15	
20	CP_QAM64	1@49	19.02	19.22	19.31	
20	CP_QAM256	25@12	17.42	17.39	17.37	18
20	CP_QAM256	1@1	17.18	17.10	17.24	
20	CP_QAM256	1@49	17.08	17.09	17.08	

Band n5 SCS 30KHz						
BW (MHz)	Modulation	RB Allocation	Channel/Frequency(MHz)			Tune-up limit (dBm)
			166300	167300	168300	
			831.5	836.5	841.5	
15	DFT_BPSK	18@9	23.72	23.84	23.54	24
15	DFT_BPSK	1@1	23.36	23.04	23.19	
15	DFT_BPSK	1@36	23.70	23.79	23.74	
15	DFT_QPSK	18@9	23.79	23.38	23.19	24
15	DFT_QPSK	1@1	23.29	23.15	23.80	
15	DFT_QPSK	1@36	23.53	23.74	23.14	
15	DFT_QAM16	18@9	22.39	22.14	22.20	23
15	DFT_QAM16	1@1	22.20	22.41	22.19	
15	DFT_QAM16	1@36	22.24	22.14	22.04	
15	DFT_QAM64	18@9	21.07	21.05	21.16	22
15	DFT_QAM64	1@1	21.30	21.01	21.37	
15	DFT_QAM64	1@36	21.05	21.03	21.11	
15	DFT_QAM256	18@9	19.09	19.36	19.40	20
15	DFT_QAM256	1@1	19.08	19.04	19.25	
15	DFT_QAM256	1@36	19.14	19.13	19.32	
15	CP_QPSK	19@9	21.25	21.20	21.03	22
15	CP_QPSK	1@1	21.26	21.17	21.37	
15	CP_QPSK	1@36	21.03	21.04	21.03	
15	CP_QAM16	19@9	21.19	21.03	21.39	22
15	CP_QAM16	1@1	21.37	21.02	21.23	
15	CP_QAM16	1@36	21.35	21.42	21.31	
15	CP_QAM64	19@9	19.43	19.25	19.25	20
15	CP_QAM64	1@1	19.35	19.45	19.14	
15	CP_QAM64	1@36	19.06	19.35	19.26	
15	CP_QAM256	19@9	17.26	17.39	17.18	18
15	CP_QAM256	1@1	17.18	17.45	17.43	
15	CP_QAM256	1@36	17.11	17.44	17.40	

Band n5 SCS 30KHz						
BW (MHz)	Modulation	RB Allocation	Channel/Frequency(MHz)			Tune-up limit (dBm)
			165800	167300	168800	
			829.0	836.5	844.0	
10	DFT_BPSK	12@6	23.24	23.53	23.93	24
10	DFT_BPSK	1@1	23.02	23.29	23.43	
10	DFT_BPSK	1@22	23.28	23.60	23.75	
10	DFT_QPSK	12@6	23.74	23.87	23.76	24
10	DFT_QPSK	1@1	23.98	23.57	23.48	
10	DFT_QPSK	1@22	23.96	23.57	23.96	
10	DFT_QAM16	12@6	22.27	22.30	22.04	23
10	DFT_QAM16	1@1	22.39	22.24	22.27	
10	DFT_QAM16	1@22	22.33	22.35	22.15	
10	DFT_QAM64	12@6	21.35	21.10	21.22	22
10	DFT_QAM64	1@1	21.44	21.31	21.17	
10	DFT_QAM64	1@22	21.33	21.08	21.44	
10	DFT_QAM256	12@6	19.37	19.16	19.26	20
10	DFT_QAM256	1@1	19.25	19.29	19.22	
10	DFT_QAM256	1@22	19.40	19.09	19.18	
10	CP_QPSK	12@6	21.13	21.24	21.11	22
10	CP_QPSK	1@1	21.20	21.14	21.23	
10	CP_QPSK	1@22	21.15	21.06	21.39	
10	CP_QAM16	12@6	21.11	21.28	21.09	22
10	CP_QAM16	1@1	21.37	21.20	21.17	
10	CP_QAM16	1@22	21.11	21.24	21.11	
10	CP_QAM64	12@6	19.16	19.13	19.23	20
10	CP_QAM64	1@1	19.16	19.24	19.21	
10	CP_QAM64	1@22	19.41	19.33	19.41	
10	CP_QAM256	12@6	17.20	17.41	17.28	18
10	CP_QAM256	1@1	17.36	17.21	17.36	
10	CP_QAM256	1@22	17.21	17.27	17.29	

Band n7 SCS 15KHz						
BW (MHz)	Modulation	RB Allocation	Channel/Frequency(MHz)			Tune-up limit (dBm)
			502000	507000	512000	
			2510	2535	2560	
20	DFT_BPSK	50@25	23.22	22.96	22.80	24
20	DFT_BPSK	1@1	23.51	22.82	22.87	
20	DFT_BPSK	1@104	22.75	22.93	23.58	
20	DFT_QPSK	50@25	23.30	23.67	23.04	24
20	DFT_QPSK	1@1	23.63	23.41	22.77	
20	DFT_QPSK	1@104	23.17	22.97	23.50	
20	DFT_QAM16	50@25	22.37	22.38	22.36	23
20	DFT_QAM16	1@1	22.02	22.38	22.19	
20	DFT_QAM16	1@104	22.14	22.37	22.15	
20	DFT_QAM64	50@25	21.25	21.24	21.38	22
20	DFT_QAM64	1@1	21.37	21.07	21.24	
20	DFT_QAM64	1@104	21.09	21.37	21.21	
20	DFT_QAM256	50@25	19.35	19.35	19.01	20
20	DFT_QAM256	1@1	19.11	19.09	19.20	
20	DFT_QAM256	1@104	19.28	19.12	19.10	
20	CP_QPSK	53@26	21.13	21.25	21.15	22
20	CP_QPSK	1@1	21.06	21.20	21.30	
20	CP_QPSK	1@104	21.40	21.24	21.13	
20	CP_QAM16	53@26	21.31	21.45	21.12	22
20	CP_QAM16	1@1	21.19	21.33	21.19	
20	CP_QAM16	1@104	21.29	21.17	21.09	
20	CP_QAM64	53@26	19.29	19.41	19.05	20
20	CP_QAM64	1@1	19.26	19.03	19.40	
20	CP_QAM64	1@104	19.27	19.02	19.44	
20	CP_QAM256	53@26	17.12	17.12	17.12	18
20	CP_QAM256	1@1	17.02	17.07	17.38	
20	CP_QAM256	1@104	17.18	17.36	17.20	

Band n7 SCS 15KHz						
BW (MHz)	Modulation	RB Allocation	Channel/Frequency(MHz)			Tune-up limit (dBm)
			501500	507000	512500	
			2507.5	2535	2562.5	
15	DFT_BPSK	36@18	23.55	23.21	23.81	24
15	DFT_BPSK	1@1	23.25	23.20	23.83	
15	DFT_BPSK	1@77	23.41	23.97	23.77	
15	DFT_QPSK	36@18	23.36	23.73	23.65	24
15	DFT_QPSK	1@1	23.49	23.55	23.26	
15	DFT_QPSK	1@77	23.29	23.12	23.97	
15	DFT_QAM16	36@18	22.17	22.35	22.28	23
15	DFT_QAM16	1@1	22.33	22.41	22.37	
15	DFT_QAM16	1@77	22.27	22.23	22.03	
15	DFT_QAM64	36@18	21.33	21.27	21.06	22
15	DFT_QAM64	1@1	21.39	21.04	21.07	
15	DFT_QAM64	1@77	21.40	21.18	21.13	
15	DFT_QAM256	36@18	19.34	19.28	19.29	20
15	DFT_QAM256	1@1	19.18	19.34	19.03	
15	DFT_QAM256	1@77	19.09	19.09	19.26	
15	CP_QPSK	39@19	21.02	21.15	21.22	22
15	CP_QPSK	1@1	21.40	21.36	21.04	
15	CP_QPSK	1@77	21.08	21.26	21.21	
15	CP_QAM16	39@19	21.07	21.28	21.40	22
15	CP_QAM16	1@1	21.31	21.39	21.42	
15	CP_QAM16	1@77	21.28	21.39	21.03	
15	CP_QAM64	39@19	19.24	19.02	19.41	20
15	CP_QAM64	1@1	19.04	19.05	19.23	
15	CP_QAM64	1@77	19.36	19.41	19.18	
15	CP_QAM256	39@19	17.40	17.18	17.30	18
15	CP_QAM256	1@1	17.34	17.15	17.13	
15	CP_QAM256	1@77	17.25	17.35	17.18	

Band n7 SCS 15KHz						
BW (MHz)	Modulation	RB Allocation	Channel/Frequency(MHz)			Tune-up limit (dBm)
			501000	507000	513000	
			2505	2535	2565	
10	DFT_BPSK	25@12	23.39	23.27	23.74	24
10	DFT_BPSK	1@1	23.92	23.76	23.74	
10	DFT_BPSK	1@50	23.58	23.58	23.85	
10	DFT_QPSK	25@12	23.37	23.05	23.87	24
10	DFT_QPSK	1@1	23.90	23.65	23.68	
10	DFT_QPSK	1@50	23.20	23.34	23.61	
10	DFT_QAM16	25@12	22.13	22.12	22.01	23
10	DFT_QAM16	1@1	22.16	22.12	22.41	
10	DFT_QAM16	1@50	22.37	22.31	22.04	
10	DFT_QAM64	25@12	21.24	21.40	21.06	22
10	DFT_QAM64	1@1	21.02	21.08	21.28	
10	DFT_QAM64	1@50	21.43	21.30	21.25	
10	DFT_QAM256	25@12	19.25	19.35	19.37	20
10	DFT_QAM256	1@1	19.02	19.39	19.01	
10	DFT_QAM256	1@50	19.43	19.40	19.30	
10	CP_QPSK	26@13	21.19	21.07	21.44	22
10	CP_QPSK	1@1	21.33	21.07	21.16	
10	CP_QPSK	1@50	21.27	21.18	21.40	
10	CP_QAM16	26@13	21.01	21.33	21.25	22
10	CP_QAM16	1@1	21.30	21.35	21.18	
10	CP_QAM16	1@50	21.20	21.21	21.30	
10	CP_QAM64	26@13	19.13	19.24	19.19	20
10	CP_QAM64	1@1	19.09	19.19	19.11	
10	CP_QAM64	1@50	19.34	19.03	19.31	
10	CP_QAM256	26@13	17.40	17.45	17.12	18
10	CP_QAM256	1@1	17.20	17.25	17.36	
10	CP_QAM256	1@50	17.42	17.17	17.16	

Band n7 SCS 15KHz						
BW (MHz)	Modulation	RB Allocation	Channel/Frequency(MHz)			Tune-up limit (dBm)
			500500	507000	513500	
			2502.5	2535	2567.5	
5	DFT_BPSK	12@6	23.21	23.59	23.47	24
5	DFT_BPSK	1@1	23.35	23.73	23.92	
5	DFT_BPSK	1@23	23.58	23.86	23.76	
5	DFT_QPSK	12@6	23.19	23.32	23.87	24
5	DFT_QPSK	1@1	23.83	23.22	23.49	
5	DFT_QPSK	1@23	23.89	23.79	23.70	
5	DFT_QAM16	12@6	22.45	22.44	22.23	23
5	DFT_QAM16	1@1	22.42	22.04	22.12	
5	DFT_QAM16	1@23	22.15	22.27	22.39	
5	DFT_QAM64	12@6	21.24	21.10	21.10	22
5	DFT_QAM64	1@1	21.23	21.25	21.28	
5	DFT_QAM64	1@23	21.05	21.04	21.23	
5	DFT_QAM256	12@6	19.37	19.03	19.33	20
5	DFT_QAM256	1@1	19.22	19.07	19.06	
5	DFT_QAM256	1@23	19.26	19.45	19.01	
5	CP_QPSK	13@6	21.19	21.39	21.24	22
5	CP_QPSK	1@1	21.14	21.39	21.07	
5	CP_QPSK	1@23	21.32	21.24	21.02	
5	CP_QAM16	13@6	21.09	21.04	21.42	22
5	CP_QAM16	1@1	21.03	21.41	21.19	
5	CP_QAM16	1@23	21.38	21.42	21.23	
5	CP_QAM64	13@6	19.29	19.42	19.11	20
5	CP_QAM64	1@1	19.26	19.20	19.12	
5	CP_QAM64	1@23	19.41	19.02	19.08	
5	CP_QAM256	13@6	17.31	17.23	17.19	18
5	CP_QAM256	1@1	17.12	17.24	17.43	
5	CP_QAM256	1@23	17.21	17.17	17.13	

Band n7 SCS 30KHz						
BW (MHz)	Modulation	RB Allocation	Channel/Frequency(MHz)			Tune-up limit (dBm)
			502000	507000	512000	
			2510	2535	2560	
20	DFT_BPSK	25@12	23.24	23.56	23.84	24
20	DFT_BPSK	1@1	23.18	23.93	23.55	
20	DFT_BPSK	1@49	23.01	23.96	23.48	
20	DFT_QPSK	25@12	23.37	23.35	23.37	24
20	DFT_QPSK	1@1	23.18	23.55	23.62	
20	DFT_QPSK	1@49	23.97	23.47	23.33	
20	DFT_QAM16	25@12	22.23	22.16	22.40	23
20	DFT_QAM16	1@1	22.22	22.22	22.25	
20	DFT_QAM16	1@49	22.11	22.08	22.02	
20	DFT_QAM64	25@12	21.26	21.27	21.28	22
20	DFT_QAM64	1@1	21.04	21.01	21.24	
20	DFT_QAM64	1@49	21.17	21.02	21.39	
20	DFT_QAM256	25@12	19.19	19.17	19.10	20
20	DFT_QAM256	1@1	19.32	19.26	19.41	
20	DFT_QAM256	1@49	19.25	19.05	19.29	
20	CP_QPSK	25@12	21.36	21.36	21.04	22
20	CP_QPSK	1@1	21.34	21.17	21.13	
20	CP_QPSK	1@49	21.13	21.19	21.03	
20	CP_QAM16	25@12	21.36	21.31	21.39	22
20	CP_QAM16	1@1	21.01	21.16	21.23	
20	CP_QAM16	1@49	21.20	21.28	21.44	
20	CP_QAM64	25@12	19.43	19.13	19.36	20
20	CP_QAM64	1@1	19.09	19.05	19.06	
20	CP_QAM64	1@49	19.07	19.32	19.14	
20	CP_QAM256	25@12	17.24	17.21	17.20	18
20	CP_QAM256	1@1	17.13	17.38	17.23	
20	CP_QAM256	1@49	17.29	17.16	17.19	

Band n7 SCS 30KHz						
BW (MHz)	Modulation	RB Allocation	Channel/Frequency(MHz)			Tune-up limit (dBm)
			501500	507000	512500	
			2507.5	2535	2562.5	
15	DFT_BPSK	18@9	23.53	23.86	23.63	24
15	DFT_BPSK	1@1	23.89	23.82	23.96	
15	DFT_BPSK	1@36	23.96	23.35	23.72	
15	DFT_QPSK	18@9	23.59	23.51	23.39	24
15	DFT_QPSK	1@1	23.42	23.14	23.25	
15	DFT_QPSK	1@36	23.03	23.13	23.21	
15	DFT_QAM16	18@9	22.44	22.19	22.02	23
15	DFT_QAM16	1@1	22.42	22.31	22.04	
15	DFT_QAM16	1@36	22.03	22.06	22.37	
15	DFT_QAM64	18@9	21.37	21.39	21.21	22
15	DFT_QAM64	1@1	21.17	21.36	21.04	
15	DFT_QAM64	1@36	21.15	21.41	21.38	
15	DFT_QAM256	18@9	19.09	19.04	19.32	20
15	DFT_QAM256	1@1	19.15	19.41	19.09	
15	DFT_QAM256	1@36	19.32	19.04	19.35	
15	CP_QPSK	19@9	21.42	21.32	21.12	22
15	CP_QPSK	1@1	21.25	21.35	21.32	
15	CP_QPSK	1@36	21.06	21.04	21.34	
15	CP_QAM16	19@9	21.15	21.44	21.20	22
15	CP_QAM16	1@1	21.30	21.40	21.14	
15	CP_QAM16	1@36	21.43	21.13	21.32	
15	CP_QAM64	19@9	19.04	19.22	19.40	20
15	CP_QAM64	1@1	19.04	19.34	19.08	
15	CP_QAM64	1@36	19.29	19.37	19.21	
15	CP_QAM256	19@9	17.05	17.18	17.40	18
15	CP_QAM256	1@1	17.08	17.38	17.17	
15	CP_QAM256	1@36	17.01	17.12	17.45	

Band n7 SCS 30KHz						
BW (MHz)	Modulation	RB Allocation	Channel/Frequency(MHz)			Tune-up limit (dBm)
			501000	507000	513000	
			2507.5	2535	2565	
10	DFT_BPSK	12@6	23.08	23.78	23.05	24
10	DFT_BPSK	1@1	23.13	23.93	23.63	
10	DFT_BPSK	1@22	23.46	23.43	23.04	
10	DFT_QPSK	12@6	23.93	23.68	23.66	24
10	DFT_QPSK	1@1	23.71	23.03	23.85	
10	DFT_QPSK	1@22	23.01	23.26	23.85	
10	DFT_QAM16	12@6	22.43	22.10	22.21	23
10	DFT_QAM16	1@1	22.32	22.21	22.11	
10	DFT_QAM16	1@22	22.07	22.30	22.07	
10	DFT_QAM64	12@6	21.41	21.35	21.08	22
10	DFT_QAM64	1@1	21.19	21.31	21.32	
10	DFT_QAM64	1@22	21.44	21.05	21.02	
10	DFT_QAM256	12@6	19.39	19.28	19.17	20
10	DFT_QAM256	1@1	19.16	19.10	19.41	
10	DFT_QAM256	1@22	19.15	19.05	19.24	
10	CP_QPSK	12@6	21.20	21.44	21.06	22
10	CP_QPSK	1@1	21.16	21.35	21.19	
10	CP_QPSK	1@22	21.15	21.30	21.33	
10	CP_QAM16	12@6	21.45	21.27	21.01	22
10	CP_QAM16	1@1	21.34	21.09	21.13	
10	CP_QAM16	1@22	21.01	21.28	21.27	
10	CP_QAM64	12@6	19.04	19.21	19.02	20
10	CP_QAM64	1@1	19.36	19.16	19.34	
10	CP_QAM64	1@22	19.21	19.36	19.26	
10	CP_QAM256	12@6	17.28	17.29	17.09	18
10	CP_QAM256	1@1	17.24	17.02	17.24	
10	CP_QAM256	1@22	17.45	17.15	17.16	

Band n41 include n38 SCS 15KHz						
BW (MHz)	Modulation	RB Allocation	Channel/Frequency(MHz)			Tune-up limit (dBm)
			504201	518601	532998	
			2521.005	2593.005	2664.990	
50	DFT_BPSK	135@67	23.21	23.68	23.36	24
50	DFT_BPSK	1@1	23.08	23.71	23.54	
50	DFT_BPSK	1@268	23.06	23.29	23.07	
50	DFT_QPSK	135@67	23.98	23.65	23.95	24
50	DFT_QPSK	1@1	23.01	23.87	23.82	
50	DFT_QPSK	1@268	23.57	23.38	23.09	
50	DFT_QAM16	135@67	22.01	22.09	22.43	23
50	DFT_QAM16	1@1	22.01	22.35	22.23	
50	DFT_QAM16	1@268	22.05	22.04	22.01	
50	DFT_QAM64	135@67	21.36	21.34	21.40	22
50	DFT_QAM64	1@1	21.34	21.41	21.25	
50	DFT_QAM64	1@268	21.11	21.37	21.33	
50	DFT_QAM256	135@67	19.07	19.28	19.39	20
50	DFT_QAM256	1@1	19.45	19.03	19.13	
50	DFT_QAM256	1@268	19.43	19.04	19.28	
50	CP_QPSK	135@67	21.01	21.37	21.23	22
50	CP_QPSK	1@1	21.18	21.34	21.03	
50	CP_QPSK	1@268	21.34	21.18	21.15	
50	CP_QAM16	135@67	21.15	21.02	21.41	22
50	CP_QAM16	1@1	21.04	21.29	21.19	
50	CP_QAM16	1@268	21.32	21.42	21.25	
50	CP_QAM64	135@67	19.35	19.34	19.45	20
50	CP_QAM64	1@1	19.32	19.22	19.07	
50	CP_QAM64	1@268	19.17	19.30	19.10	
50	CP_QAM256	135@67	17.23	17.28	17.18	18
50	CP_QAM256	1@1	17.09	17.11	17.14	
50	CP_QAM256	1@268	17.21	17.20	17.25	

Band n41 include n38 SCS 15KHz						
BW (MHz)	Modulation	RB Allocation	Channel/Frequency(MHz)			Tune-up limit (dBm)
			503202	518601	534000	
			2516.010	2593.005	2670.000	
40	DFT_BPSK	108@54	23.89	23.47	23.83	24
40	DFT_BPSK	1@1	23.45	23.13	23.46	
40	DFT_BPSK	1@214	23.54	23.87	23.64	
40	DFT_QPSK	108@54	23.93	23.77	23.90	24
40	DFT_QPSK	1@1	23.17	23.64	23.39	
40	DFT_QPSK	1@214	23.10	23.43	23.32	
40	DFT_QAM16	108@54	22.39	22.30	22.01	23
40	DFT_QAM16	1@1	22.25	22.39	22.31	
40	DFT_QAM16	1@214	22.33	22.40	22.01	
40	DFT_QAM64	108@54	21.22	21.04	21.11	22
40	DFT_QAM64	1@1	21.16	21.40	21.30	
40	DFT_QAM64	1@214	21.31	21.38	21.37	
40	DFT_QAM256	108@54	19.12	19.29	19.04	20
40	DFT_QAM256	1@1	19.03	19.16	19.40	
40	DFT_QAM256	1@214	19.41	19.06	19.44	
40	CP_QPSK	108@54	21.02	21.40	21.37	22
40	CP_QPSK	1@1	21.18	21.01	21.28	
40	CP_QPSK	1@214	21.23	21.38	21.20	
40	CP_QAM16	108@54	21.03	21.06	21.30	22
40	CP_QAM16	1@1	21.40	21.39	21.41	
40	CP_QAM16	1@214	21.33	21.32	21.07	
40	CP_QAM64	108@54	19.04	19.37	19.26	20
40	CP_QAM64	1@1	19.43	19.02	19.31	
40	CP_QAM64	1@214	19.34	19.13	19.35	
40	CP_QAM256	108@54	17.21	17.41	17.05	18
40	CP_QAM256	1@1	17.20	17.34	17.35	
40	CP_QAM256	1@214	17.43	17.09	17.06	

Band n41 include n38 SCS 15KHz						
BW (MHz)	Modulation	RB Allocation	Channel/Frequency(MHz)			Tune-up limit (dBm)
			502200	518601	534999	
			2511.000	2593.005	2674.995	
30	DFT_BPSK	80@40	23.23	23.95	23.85	24
30	DFT_BPSK	1@1	23.18	23.19	23.17	
30	DFT_BPSK	1@158	23.61	23.92	23.62	
30	DFT_QPSK	80@40	23.80	23.64	23.95	24
30	DFT_QPSK	1@1	23.87	23.59	23.83	
30	DFT_QPSK	1@158	23.98	23.82	23.63	
30	DFT_QAM16	80@40	22.04	22.18	22.26	23
30	DFT_QAM16	1@1	22.33	22.29	22.04	
30	DFT_QAM16	1@158	22.22	22.08	22.36	
30	DFT_QAM64	80@40	21.32	21.03	21.37	22
30	DFT_QAM64	1@1	21.08	21.37	21.35	
30	DFT_QAM64	1@158	21.04	21.34	21.38	
30	DFT_QAM256	80@40	19.15	19.13	19.12	20
30	DFT_QAM256	1@1	19.41	19.04	19.23	
30	DFT_QAM256	1@158	19.23	19.30	19.19	
30	CP_QPSK	80@40	21.04	21.10	21.06	22
30	CP_QPSK	1@1	21.24	21.28	21.33	
30	CP_QPSK	1@158	21.33	21.43	21.37	
30	CP_QAM16	80@40	21.19	21.39	21.08	22
30	CP_QAM16	1@1	21.02	21.15	21.27	
30	CP_QAM16	1@158	21.14	21.11	21.09	
30	CP_QAM64	80@40	19.24	19.11	19.05	20
30	CP_QAM64	1@1	19.33	19.06	19.04	
30	CP_QAM64	1@158	19.19	19.04	19.45	
30	CP_QAM256	80@40	17.01	17.24	17.17	18
30	CP_QAM256	1@1	17.45	17.41	17.23	
30	CP_QAM256	1@158	17.45	17.02	17.41	

Band n41 include n38 SCS 15KHz						
BW (MHz)	Modulation	RB Allocation	Channel/Frequency(MHz)			Tune-up limit (dBm)
			501201	518601	535998	
			2506.005	2593.005	2679.990	
20	DFT_BPSK	50@25	23.08	23.43	23.72	24
20	DFT_BPSK	1@1	23.82	23.18	23.36	
20	DFT_BPSK	1@104	23.56	23.30	23.22	
20	DFT_QPSK	50@25	23.83	23.17	23.89	24
20	DFT_QPSK	1@1	23.85	23.45	23.73	
20	DFT_QPSK	1@104	23.25	23.37	23.42	
20	DFT_QAM16	50@25	22.35	22.04	22.02	23
20	DFT_QAM16	1@1	22.45	22.17	22.21	
20	DFT_QAM16	1@104	22.12	22.36	22.40	
20	DFT_QAM64	50@25	21.19	21.06	21.34	22
20	DFT_QAM64	1@1	21.34	21.42	21.36	
20	DFT_QAM64	1@104	21.14	21.39	21.40	
20	DFT_QAM256	50@25	19.41	19.14	19.07	20
20	DFT_QAM256	1@1	19.17	19.02	19.31	
20	DFT_QAM256	1@104	19.10	19.04	19.45	
20	CP_QPSK	53@26	21.03	21.04	21.25	22
20	CP_QPSK	1@1	21.27	21.25	21.22	
20	CP_QPSK	1@104	21.20	21.28	21.11	
20	CP_QAM16	53@26	21.11	21.37	21.03	22
20	CP_QAM16	1@1	21.15	21.05	21.02	
20	CP_QAM16	1@104	21.20	21.37	21.33	
20	CP_QAM64	53@26	19.33	19.16	19.32	20
20	CP_QAM64	1@1	19.23	19.27	19.44	
20	CP_QAM64	1@104	19.35	19.01	19.02	
20	CP_QAM256	53@26	17.19	17.09	17.28	18
20	CP_QAM256	1@1	17.22	17.37	17.35	
20	CP_QAM256	1@104	17.36	17.04	17.34	

Band n41 include n38 SCS 15KHz						
BW (MHz)	Modulation	RB Allocation	Channel/Frequency(MHz)			Tune-up limit (dBm)
			500700	518601	536499	
			2503.500	2593.005	2682.495	
15	DFT_BPSK	36@18	23.57	23.63	23.20	24
15	DFT_BPSK	1@1	23.27	23.05	23.77	
15	DFT_BPSK	1@77	23.88	23.19	23.39	
15	DFT_QPSK	36@18	23.21	23.41	23.53	24
15	DFT_QPSK	1@1	23.42	23.86	23.07	
15	DFT_QPSK	1@77	23.14	23.36	23.01	
15	DFT_QAM16	36@18	22.26	22.27	22.41	23
15	DFT_QAM16	1@1	22.18	22.40	22.34	
15	DFT_QAM16	1@77	22.38	22.32	22.14	
15	DFT_QAM64	36@18	21.26	21.11	21.03	22
15	DFT_QAM64	1@1	21.43	21.08	21.02	
15	DFT_QAM64	1@77	21.23	21.07	21.19	
15	DFT_QAM256	36@18	19.10	19.34	19.32	20
15	DFT_QAM256	1@1	19.40	19.20	19.01	
15	DFT_QAM256	1@77	19.19	19.32	19.25	
15	CP_QPSK	39@19	21.31	21.29	21.43	22
15	CP_QPSK	1@1	21.13	21.26	21.04	
15	CP_QPSK	1@77	21.02	21.18	21.16	
15	CP_QAM16	39@19	21.29	21.35	21.41	22
15	CP_QAM16	1@1	21.31	21.18	21.31	
15	CP_QAM16	1@77	21.07	21.23	21.15	
15	CP_QAM64	39@19	19.02	19.06	19.45	20
15	CP_QAM64	1@1	19.20	19.16	19.15	
15	CP_QAM64	1@77	19.01	19.19	19.27	
15	CP_QAM256	39@19	17.24	17.36	17.18	18
15	CP_QAM256	1@1	17.18	17.44	17.18	
15	CP_QAM256	1@77	17.13	17.38	17.08	

Band n41 include n38 SCS 15KHz						
BW (MHz)	Modulation	RB Allocation	Channel/Frequency(MHz)			Tune-up limit (dBm)
			500700	518601	537000	
			2501.010	2593.005	2685.000	
10	DFT_BPSK	25@12	23.18	23.16	23.43	24
10	DFT_BPSK	1@1	23.19	23.16	23.32	
10	DFT_BPSK	1@50	23.69	23.20	23.03	
10	DFT_QPSK	25@12	23.02	23.72	23.93	24
10	DFT_QPSK	1@1	23.62	23.23	23.87	
10	DFT_QPSK	1@50	23.23	23.66	23.54	
10	DFT_QAM16	25@12	22.31	22.42	22.16	23
10	DFT_QAM16	1@1	22.39	22.44	22.28	
10	DFT_QAM16	1@50	22.08	22.23	22.12	
10	DFT_QAM64	25@12	21.27	21.09	21.33	22
10	DFT_QAM64	1@1	21.18	21.23	21.22	
10	DFT_QAM64	1@50	21.43	21.40	21.41	
10	DFT_QAM256	25@12	19.26	19.10	19.08	20
10	DFT_QAM256	1@1	19.34	19.42	19.43	
10	DFT_QAM256	1@50	19.42	19.42	19.39	
10	CP_QPSK	26@13	21.02	21.14	21.11	22
10	CP_QPSK	1@1	21.36	21.35	21.34	
10	CP_QPSK	1@50	21.21	21.22	21.45	
10	CP_QAM16	26@13	21.43	21.19	21.21	22
10	CP_QAM16	1@1	21.29	21.36	21.16	
10	CP_QAM16	1@50	21.37	21.12	21.03	
10	CP_QAM64	26@13	19.41	19.11	19.06	20
10	CP_QAM64	1@1	19.11	19.41	19.02	
10	CP_QAM64	1@50	19.18	19.24	19.30	
10	CP_QAM256	26@13	17.06	17.19	17.28	18
10	CP_QAM256	1@1	17.08	17.13	17.03	
10	CP_QAM256	1@50	17.25	17.30	17.28	

Band n41 include n38 SCS 30KHz						
BW (MHz)	Modulation	RB Allocation	Channel/Frequency(MHz)			Tune-up limit (dBm)
			509202	518598	528000	
			2546.010	2592.990	2640.000	
100	DFT_BPSK	135@67	23.09	23.09	23.81	24
100	DFT_BPSK	1@1	23.89	23.17	23.07	
100	DFT_BPSK	1@271	23.64	23.65	23.14	
100	DFT_QPSK	135@67	23.66	23.24	23.18	24
100	DFT_QPSK	1@1	23.20	23.14	23.71	
100	DFT_QPSK	1@271	23.12	23.42	23.58	
100	DFT_QAM16	135@67	22.14	22.26	22.14	23
100	DFT_QAM16	1@1	22.07	22.05	22.06	
100	DFT_QAM16	1@271	22.08	22.39	22.09	
100	DFT_QAM64	135@67	21.13	21.29	21.38	22
100	DFT_QAM64	1@1	21.36	21.44	21.02	
100	DFT_QAM64	1@271	21.12	21.14	21.01	
100	DFT_QAM256	135@67	19.06	19.40	19.30	20
100	DFT_QAM256	1@1	19.19	19.30	19.06	
100	DFT_QAM256	1@271	19.42	19.18	19.25	
100	CP_QPSK	137@68	21.43	21.20	21.21	22
100	CP_QPSK	1@1	21.04	21.12	21.14	
100	CP_QPSK	1@271	21.44	21.38	21.36	
100	CP_QAM16	137@68	21.02	21.45	21.42	22
100	CP_QAM16	1@1	21.16	21.13	21.38	
100	CP_QAM16	1@271	21.15	21.08	21.02	
100	CP_QAM64	137@68	19.43	19.13	19.41	20
100	CP_QAM64	1@1	19.18	19.45	19.01	
100	CP_QAM64	1@271	19.01	19.11	19.42	
100	CP_QAM256	137@68	17.28	17.20	17.22	18
100	CP_QAM256	1@1	17.08	17.02	17.28	
100	CP_QAM256	1@271	17.17	17.31	17.43	

Band n41 include n38 SCS 30KHz						
BW (MHz)	Modulation	RB Allocation	Channel/Frequency(MHz)			Tune-up limit (dBm)
			508200	518598	528996	
			2541.000	2592.990	2644.980	
90	DFT_BPSK	120@60	23.14	23.68	23.83	24
90	DFT_BPSK	1@1	23.60	23.06	23.01	
90	DFT_BPSK	1@243	23.13	23.26	23.40	
90	DFT_QPSK	120@60	23.86	23.81	23.05	24
90	DFT_QPSK	1@1	23.89	23.19	23.82	
90	DFT_QPSK	1@243	23.63	23.41	23.11	
90	DFT_QAM16	120@60	22.45	22.34	22.01	23
90	DFT_QAM16	1@1	22.23	22.20	22.43	
90	DFT_QAM16	1@243	22.05	22.45	22.44	
90	DFT_QAM64	120@60	21.09	21.44	21.15	22
90	DFT_QAM64	1@1	21.21	21.14	21.02	
90	DFT_QAM64	1@243	21.07	21.15	21.32	
90	DFT_QAM256	120@60	19.44	19.02	19.24	20
90	DFT_QAM256	1@1	19.19	19.10	19.23	
90	DFT_QAM256	1@243	19.44	19.13	19.06	
90	CP_QPSK	123@61	21.38	21.41	21.32	22
90	CP_QPSK	1@1	21.38	21.30	21.05	
90	CP_QPSK	1@243	21.02	21.24	21.13	
90	CP_QAM16	123@61	21.30	21.06	21.04	22
90	CP_QAM16	1@1	21.23	21.31	21.33	
90	CP_QAM16	1@243	21.38	21.18	21.09	
90	CP_QAM64	123@61	19.43	19.44	19.45	20
90	CP_QAM64	1@1	19.19	19.45	19.36	
90	CP_QAM64	1@243	19.29	19.36	19.02	
90	CP_QAM256	123@61	17.27	17.01	17.18	18
90	CP_QAM256	1@1	17.08	17.10	17.01	
90	CP_QAM256	1@243	17.04	17.21	17.13	

Band n41 include n38 SCS 30KHz						
BW (MHz)	Modulation	RB Allocation	Channel/Frequency(MHz)			Tune-up limit (dBm)
			507204	518598	529998	
			2536.020	2592.990	2649.990	
80	DFT_BPSK	108@54	23.86	23.74	23.88	24
80	DFT_BPSK	1@1	23.21	23.44	23.46	
80	DFT_BPSK	1@215	23.43	23.12	23.84	
80	DFT_QPSK	108@54	23.69	23.88	23.90	24
80	DFT_QPSK	1@1	23.57	23.84	23.46	
80	DFT_QPSK	1@215	23.51	23.82	23.07	
80	DFT_QAM16	108@54	22.35	22.37	22.35	23
80	DFT_QAM16	1@1	22.17	22.36	22.04	
80	DFT_QAM16	1@215	22.14	22.20	22.43	
80	DFT_QAM64	108@54	21.09	21.43	21.01	22
80	DFT_QAM64	1@1	21.15	21.39	21.19	
80	DFT_QAM64	1@215	21.09	21.12	21.29	
80	DFT_QAM256	108@54	19.03	19.24	19.19	20
80	DFT_QAM256	1@1	19.16	19.04	19.14	
80	DFT_QAM256	1@215	19.22	19.44	19.16	
80	CP_QPSK	109@54	21.41	21.13	21.33	22
80	CP_QPSK	1@1	21.29	21.45	21.26	
80	CP_QPSK	1@215	21.16	21.07	21.11	
80	CP_QAM16	109@54	21.17	21.04	21.34	22
80	CP_QAM16	1@1	21.14	21.43	21.45	
80	CP_QAM16	1@215	21.14	21.35	21.01	
80	CP_QAM64	109@54	19.29	19.06	19.39	20
80	CP_QAM64	1@1	19.18	19.20	19.30	
80	CP_QAM64	1@215	19.01	19.26	19.37	
80	CP_QAM256	109@54	17.43	17.18	17.27	18
80	CP_QAM256	1@1	17.27	17.34	17.24	
80	CP_QAM256	1@215	17.26	17.10	17.22	

Band n41 include n38 SCS 30KHz						
BW (MHz)	Modulation	RB Allocation	Channel/Frequency(MHz)			Tune-up limit (dBm)
			505200	518598	531996	
			2526.000	2592.990	2659.980	
60	DFT_BPSK	81@40	23.59	23.85	23.72	24
60	DFT_BPSK	1@1	23.87	23.08	23.29	
60	DFT_BPSK	1@160	23.51	23.48	23.16	
60	DFT_QPSK	81@40	23.13	23.69	23.88	24
60	DFT_QPSK	1@1	23.91	23.05	23.75	
60	DFT_QPSK	1@160	23.77	23.47	23.44	
60	DFT_QAM16	81@40	22.44	22.02	22.28	23
60	DFT_QAM16	1@1	22.37	22.19	22.19	
60	DFT_QAM16	1@160	22.34	22.01	22.17	
60	DFT_QAM64	81@40	21.05	21.35	21.35	22
60	DFT_QAM64	1@1	21.22	21.42	21.37	
60	DFT_QAM64	1@160	21.43	21.03	21.15	
60	DFT_QAM256	81@40	19.40	19.34	19.38	20
60	DFT_QAM256	1@1	19.23	19.14	19.28	
60	DFT_QAM256	1@160	19.14	19.28	19.39	
60	CP_QPSK	81@40	21.27	21.33	21.30	22
60	CP_QPSK	1@1	21.11	21.37	21.01	
60	CP_QPSK	1@160	21.10	21.21	21.07	
60	CP_QAM16	81@40	21.09	21.39	21.41	22
60	CP_QAM16	1@1	21.36	21.13	21.20	
60	CP_QAM16	1@160	21.39	21.18	21.27	
60	CP_QAM64	81@40	19.19	19.13	19.35	20
60	CP_QAM64	1@1	19.37	19.02	19.07	
60	CP_QAM64	1@160	19.08	19.22	19.09	
60	CP_QAM256	81@40	17.32	17.45	17.23	18
60	CP_QAM256	1@1	17.11	17.17	17.15	
60	CP_QAM256	1@160	17.09	17.21	17.22	

Band n41 include n38 SCS 30KHz						
BW (MHz)	Modulation	RB Allocation	Channel/Frequency(MHz)			Tune-up limit (dBm)
			504204	518598	532998	
			2521.020	2592.990	2664.990	
50	DFT_BPSK	64@32	23.63	23.49	23.06	24
50	DFT_BPSK	1@1	23.16	23.41	23.70	
50	DFT_BPSK	1@131	23.80	23.39	23.04	
50	DFT_QPSK	64@32	23.92	23.91	23.86	24
50	DFT_QPSK	1@1	23.63	23.90	23.37	
50	DFT_QPSK	1@131	23.45	23.89	23.52	
50	DFT_QAM16	64@32	22.20	22.23	22.40	23
50	DFT_QAM16	1@1	22.22	22.08	22.14	
50	DFT_QAM16	1@131	22.40	22.03	22.33	
50	DFT_QAM64	64@32	21.08	21.41	21.22	22
50	DFT_QAM64	1@1	21.26	21.35	21.03	
50	DFT_QAM64	1@131	21.36	21.11	21.23	
50	DFT_QAM256	64@32	19.10	19.38	19.05	20
50	DFT_QAM256	1@1	19.43	19.32	19.26	
50	DFT_QAM256	1@131	19.19	19.01	19.44	
50	CP_QPSK	67@33	21.17	21.03	21.02	22
50	CP_QPSK	1@1	21.44	21.29	21.10	
50	CP_QPSK	1@131	21.25	21.33	21.08	
50	CP_QAM16	67@33	21.19	21.25	21.14	22
50	CP_QAM16	1@1	21.26	21.37	21.37	
50	CP_QAM16	1@131	21.08	21.15	21.05	
50	CP_QAM64	67@33	19.30	19.04	19.43	20
50	CP_QAM64	1@1	19.15	19.44	19.22	
50	CP_QAM64	1@131	19.20	19.07	19.28	
50	CP_QAM256	67@33	17.33	17.18	17.05	18
50	CP_QAM256	1@1	17.08	17.23	17.37	
50	CP_QAM256	1@131	17.08	17.33	17.42	

Band n41 include n38 SCS 30KHz						
BW (MHz)	Modulation	RB Allocation	Channel/Frequency(MHz)			Tune-up limit (dBm)
			503202	518598	534000	
			2516.010	2592.990	2670.000	
40	DFT_BPSK	50@25	23.59	23.43	23.83	24
40	DFT_BPSK	1@1	23.73	23.29	23.85	
40	DFT_BPSK	1@104	23.83	23.37	23.61	
40	DFT_QPSK	50@25	23.37	23.75	23.28	24
40	DFT_QPSK	1@1	23.75	23.88	23.48	
40	DFT_QPSK	1@104	23.26	23.65	23.41	
40	DFT_QAM16	50@25	22.10	22.17	22.45	23
40	DFT_QAM16	1@1	22.06	22.22	22.45	
40	DFT_QAM16	1@104	22.33	22.20	22.16	
40	DFT_QAM64	50@25	21.07	21.08	21.45	22
40	DFT_QAM64	1@1	21.17	21.38	21.21	
40	DFT_QAM64	1@104	21.37	21.41	21.44	
40	DFT_QAM256	50@25	19.28	19.42	19.15	20
40	DFT_QAM256	1@1	19.33	19.40	19.26	
40	DFT_QAM256	1@104	19.14	19.20	19.30	
40	CP_QPSK	53@26	21.15	21.20	21.27	22
40	CP_QPSK	1@1	21.28	21.14	21.44	
40	CP_QPSK	1@104	21.40	21.33	21.06	
40	CP_QAM16	53@26	21.19	21.17	21.36	22
40	CP_QAM16	1@1	21.23	21.43	21.18	
40	CP_QAM16	1@104	21.07	21.38	21.44	
40	CP_QAM64	53@26	19.11	19.36	19.35	20
40	CP_QAM64	1@1	19.24	19.12	19.44	
40	CP_QAM64	1@104	19.13	19.09	19.15	
40	CP_QAM256	53@26	17.32	17.01	17.14	18
40	CP_QAM256	1@1	17.23	17.36	17.01	
40	CP_QAM256	1@104	17.45	17.14	17.06	

Band n41 include n38 SCS 30KHz						
BW (MHz)	Modulation	RB Allocation	Channel/Frequency(MHz)			Tune-up limit (dBm)
			502200	518598	534996	
			2511.000	2592.990	2674.980	
30	DFT_BPSK	36@18	23.36	23.08	23.49	24
30	DFT_BPSK	1@1	23.59	23.73	23.47	
30	DFT_BPSK	1@76	23.28	23.82	23.27	
30	DFT_QPSK	36@18	23.24	23.26	23.41	24
30	DFT_QPSK	1@1	23.31	23.16	23.05	
30	DFT_QPSK	1@76	23.25	23.10	23.15	
30	DFT_QAM16	36@18	22.31	22.42	22.26	23
30	DFT_QAM16	1@1	22.40	22.20	22.07	
30	DFT_QAM16	1@76	22.35	22.31	22.28	
30	DFT_QAM64	36@18	21.26	21.30	21.37	22
30	DFT_QAM64	1@1	21.07	21.21	21.36	
30	DFT_QAM64	1@76	21.43	21.23	21.20	
30	DFT_QAM256	36@18	19.06	19.33	19.02	20
30	DFT_QAM256	1@1	19.27	19.38	19.42	
30	DFT_QAM256	1@76	19.38	19.24	19.01	
30	CP_QPSK	39@19	21.24	21.44	21.33	22
30	CP_QPSK	1@1	21.15	21.10	21.04	
30	CP_QPSK	1@76	21.45	21.42	21.37	
30	CP_QAM16	39@19	21.08	21.41	21.14	22
30	CP_QAM16	1@1	21.27	21.23	21.08	
30	CP_QAM16	1@76	21.43	21.19	21.38	
30	CP_QAM64	39@19	19.05	19.01	19.16	20
30	CP_QAM64	1@1	19.38	19.03	19.03	
30	CP_QAM64	1@76	19.23	19.29	19.19	
30	CP_QAM256	39@19	17.35	17.14	17.40	18
30	CP_QAM256	1@1	17.22	17.44	17.24	
30	CP_QAM256	1@76	17.43	17.38	17.42	

Band n41 include n38 SCS 30KHz						
BW (MHz)	Modulation	RB Allocation	Channel/Frequency(MHz)			Tune-up limit (dBm)
			501204	518598	535998	
			2506.020	2592.990	2679.990	
20	DFT_BPSK	25@12	23.78	23.13	23.31	24
20	DFT_BPSK	1@1	23.76	23.44	23.68	
20	DFT_BPSK	1@49	23.10	23.65	23.70	
20	DFT_QPSK	25@12	23.69	23.88	23.45	24
20	DFT_QPSK	1@1	23.58	23.88	23.04	
20	DFT_QPSK	1@49	23.91	23.49	23.45	
20	DFT_QAM16	25@12	22.37	22.23	22.45	23
20	DFT_QAM16	1@1	22.22	22.27	22.19	
20	DFT_QAM16	1@49	22.13	22.11	22.35	
20	DFT_QAM64	25@12	21.06	21.37	21.24	22
20	DFT_QAM64	1@1	21.38	21.37	21.09	
20	DFT_QAM64	1@49	21.26	21.25	21.42	
20	DFT_QAM256	25@12	19.40	19.04	19.14	20
20	DFT_QAM256	1@1	19.33	19.23	19.30	
20	DFT_QAM256	1@49	19.20	19.33	19.32	
20	CP_QPSK	25@12	21.05	21.18	21.04	22
20	CP_QPSK	1@1	21.14	21.39	21.26	
20	CP_QPSK	1@49	21.04	21.37	21.22	
20	CP_QAM16	25@12	21.37	21.33	21.32	22
20	CP_QAM16	1@1	21.05	21.34	21.30	
20	CP_QAM16	1@49	21.24	21.09	21.03	
20	CP_QAM64	25@12	19.06	19.33	19.13	20
20	CP_QAM64	1@1	19.13	19.25	19.29	
20	CP_QAM64	1@49	19.09	19.44	19.41	
20	CP_QAM256	25@12	17.31	17.29	17.45	18
20	CP_QAM256	1@1	17.27	17.06	17.17	
20	CP_QAM256	1@49	17.29	17.29	17.39	

Band n41 include n38 SCS 30KHz						
BW (MHz)	Modulation	RB Allocation	Channel/Frequency(MHz)			Tune-up limit (dBm)
			500700	518598	536496	
			2503.500	2592.990	2682.480	
15	DFT_BPSK	18@9	23.76	23.75	23.23	24
15	DFT_BPSK	1@1	23.81	23.64	23.68	
15	DFT_BPSK	1@36	23.24	23.41	23.85	
15	DFT_QPSK	18@9	23.89	23.28	23.37	24
15	DFT_QPSK	1@1	23.90	23.38	23.62	
15	DFT_QPSK	1@36	23.87	23.73	23.33	
15	DFT_QAM16	18@9	22.17	22.33	22.36	23
15	DFT_QAM16	1@1	22.06	22.04	22.05	
15	DFT_QAM16	1@36	22.39	22.28	22.44	
15	DFT_QAM64	18@9	21.23	21.29	21.25	22
15	DFT_QAM64	1@1	21.42	21.20	21.29	
15	DFT_QAM64	1@36	21.33	21.11	21.40	
15	DFT_QAM256	18@9	19.33	19.17	19.19	20
15	DFT_QAM256	1@1	19.32	19.07	19.30	
15	DFT_QAM256	1@36	19.33	19.26	19.17	
15	CP_QPSK	19@9	21.36	21.43	21.45	22
15	CP_QPSK	1@1	21.38	21.27	21.29	
15	CP_QPSK	1@36	21.01	21.34	21.02	
15	CP_QAM16	19@9	21.22	21.45	21.43	22
15	CP_QAM16	1@1	21.19	21.12	21.07	
15	CP_QAM16	1@36	21.16	21.01	21.41	
15	CP_QAM64	19@9	19.21	19.35	19.10	20
15	CP_QAM64	1@1	19.22	19.40	19.02	
15	CP_QAM64	1@36	19.03	19.24	19.03	
15	CP_QAM256	19@9	17.32	17.30	17.12	18
15	CP_QAM256	1@1	17.30	17.44	17.15	
15	CP_QAM256	1@36	17.10	17.44	17.20	

Band n41 include n38 SCS 30KHz						
BW (MHz)	Modulation	RB Allocation	Channel/Frequency(MHz)			Tune-up limit (dBm)
			500202	518598	537000	
			2501.010	2592.990	2685.000	
10	DFT_BPSK	12@6	23.78	23.70	23.71	24
10	DFT_BPSK	1@1	23.29	23.61	23.47	
10	DFT_BPSK	1@22	23.95	23.67	23.66	
10	DFT_QPSK	12@6	23.49	23.22	23.36	24
10	DFT_QPSK	1@1	23.97	23.45	23.45	
10	DFT_QPSK	1@22	23.73	23.89	23.49	
10	DFT_QAM16	12@6	22.26	22.01	22.37	23
10	DFT_QAM16	1@1	22.13	22.10	22.42	
10	DFT_QAM16	1@22	22.34	22.42	22.21	
10	DFT_QAM64	12@6	21.26	21.25	21.09	22
10	DFT_QAM64	1@1	21.29	21.11	21.44	
10	DFT_QAM64	1@22	21.14	21.37	21.34	
10	DFT_QAM256	12@6	19.26	19.22	19.33	20
10	DFT_QAM256	1@1	19.45	19.38	19.17	
10	DFT_QAM256	1@22	19.05	19.35	19.34	
10	CP_QPSK	12@6	21.29	21.03	21.45	22
10	CP_QPSK	1@1	21.22	21.08	21.36	
10	CP_QPSK	1@22	21.11	21.43	21.33	
10	CP_QAM16	12@6	21.30	21.36	21.26	22
10	CP_QAM16	1@1	21.13	21.45	21.11	
10	CP_QAM16	1@22	21.31	21.08	21.45	
10	CP_QAM64	12@6	19.18	19.07	19.17	20
10	CP_QAM64	1@1	19.24	19.44	19.06	
10	CP_QAM64	1@22	19.37	19.38	19.32	
10	CP_QAM256	12@6	17.14	17.41	17.18	18
10	CP_QAM256	1@1	17.28	17.20	17.01	
10	CP_QAM256	1@22	17.09	17.04	17.31	

Band n77(3450-3550) include n78 SCS 15KHz						
BW (MHz)	Modulation	RB Allocation	Channel/Frequency(MHz)			Tune-up limit (dBm)
			631668	633334	635000	
			3475.020	3500.010	3525.000	
50	DFT_BPSK	135@67	23.36	23.54	23.72	24
50	DFT_BPSK	1@1	23.84	23.06	23.01	
50	DFT_BPSK	1@268	23.53	23.32	23.38	
50	DFT_QPSK	135@67	23.15	23.13	23.93	24
50	DFT_QPSK	1@1	23.83	23.17	23.13	
50	DFT_QPSK	1@268	23.85	23.09	23.14	
50	DFT_QAM16	135@67	22.10	22.44	22.29	23
50	DFT_QAM16	1@1	22.09	22.02	22.41	
50	DFT_QAM16	1@268	22.26	22.29	22.44	
50	DFT_QAM64	135@67	21.36	21.35	21.11	22
50	DFT_QAM64	1@1	21.41	21.39	21.22	
50	DFT_QAM64	1@268	21.31	21.43	21.30	
50	DFT_QAM256	135@67	19.29	19.01	19.01	20
50	DFT_QAM256	1@1	19.28	19.20	19.20	
50	DFT_QAM256	1@268	19.33	19.29	19.06	
50	CP_QPSK	135@67	21.10	21.10	21.38	22
50	CP_QPSK	1@1	21.30	21.02	21.45	
50	CP_QPSK	1@268	21.42	21.43	21.15	
50	CP_QAM16	135@67	21.13	21.15	21.19	22
50	CP_QAM16	1@1	21.45	21.41	21.18	
50	CP_QAM16	1@268	21.20	21.12	21.29	
50	CP_QAM64	135@67	19.08	19.11	19.39	20
50	CP_QAM64	1@1	19.15	19.14	19.24	
50	CP_QAM64	1@268	19.08	19.08	19.35	
50	CP_QAM256	135@67	17.34	17.13	17.18	18
50	CP_QAM256	1@1	17.11	17.40	17.21	
50	CP_QAM256	1@268	17.10	17.42	17.20	

Band n77(3450-3550) include n78 SCS 15KHz						
BW (MHz)	Modulation	RB Allocation	Channel/Frequency(MHz)			Tune-up limit (dBm)
			631334	633334	635332	
			3470.010	3500.010	3529.980	
40	DFT_BPSK	108@54	23.88	23.13	23.34	24
40	DFT_BPSK	1@1	23.13	23.91	23.27	
40	DFT_BPSK	1@214	23.02	23.08	23.04	
40	DFT_QPSK	108@54	23.11	23.28	23.75	24
40	DFT_QPSK	1@1	23.46	23.57	23.19	
40	DFT_QPSK	1@214	23.93	23.62	23.42	
40	DFT_QAM16	108@54	22.37	22.32	22.39	23
40	DFT_QAM16	1@1	22.08	22.37	22.05	
40	DFT_QAM16	1@214	22.35	22.02	22.09	
40	DFT_QAM64	108@54	21.29	21.13	21.25	22
40	DFT_QAM64	1@1	21.14	21.04	21.06	
40	DFT_QAM64	1@214	21.10	21.28	21.09	
40	DFT_QAM256	108@54	19.14	19.17	19.43	20
40	DFT_QAM256	1@1	19.25	19.16	19.02	
40	DFT_QAM256	1@214	19.05	19.42	19.30	
40	CP_QPSK	108@54	21.28	21.17	21.25	22
40	CP_QPSK	1@1	21.17	21.21	21.03	
40	CP_QPSK	1@214	21.16	21.15	21.45	
40	CP_QAM16	108@54	21.35	21.45	21.24	22
40	CP_QAM16	1@1	21.30	21.14	21.33	
40	CP_QAM16	1@214	21.19	21.03	21.36	
40	CP_QAM64	108@54	19.04	19.05	19.38	20
40	CP_QAM64	1@1	19.25	19.12	19.03	
40	CP_QAM64	1@214	19.45	19.10	19.15	
40	CP_QAM256	108@54	17.42	17.21	17.19	18
40	CP_QAM256	1@1	17.29	17.30	17.10	
40	CP_QAM256	1@214	17.14	17.42	17.10	

Band n77(3450-3550) include n78 SCS 15KHz						
BW (MHz)	Modulation	RB Allocation	Channel/Frequency(MHz)			Tune-up limit (dBm)
			631000	633334	635666	
			3465.000	3500.010	3534.990	
30	DFT_BPSK	80@40	23.35	23.90	23.72	24
30	DFT_BPSK	1@1	23.79	23.43	23.14	
30	DFT_BPSK	1@158	23.98	23.61	23.27	
30	DFT_QPSK	80@40	23.76	23.00	23.74	24
30	DFT_QPSK	1@1	23.90	23.43	23.15	
30	DFT_QPSK	1@158	23.39	23.40	23.70	
30	DFT_QAM16	80@40	22.20	22.23	22.23	23
30	DFT_QAM16	1@1	22.09	22.24	22.16	
30	DFT_QAM16	1@158	22.11	22.21	22.08	
30	DFT_QAM64	80@40	21.34	21.18	21.40	22
30	DFT_QAM64	1@1	21.11	21.28	21.09	
30	DFT_QAM64	1@158	21.27	21.36	21.08	
30	DFT_QAM256	80@40	19.32	19.42	19.35	20
30	DFT_QAM256	1@1	19.05	19.40	19.40	
30	DFT_QAM256	1@158	19.14	19.17	19.39	
30	CP_QPSK	80@40	21.15	21.37	21.22	22
30	CP_QPSK	1@1	21.28	21.40	21.17	
30	CP_QPSK	1@158	21.04	21.40	21.15	
30	CP_QAM16	80@40	21.42	21.45	21.43	22
30	CP_QAM16	1@1	21.02	21.25	21.10	
30	CP_QAM16	1@158	21.35	21.25	21.28	
30	CP_QAM64	80@40	19.27	19.42	19.11	20
30	CP_QAM64	1@1	19.23	19.04	19.22	
30	CP_QAM64	1@158	19.10	19.07	19.34	
30	CP_QAM256	80@40	17.42	17.41	17.32	18
30	CP_QAM256	1@1	17.06	17.05	17.33	
30	CP_QAM256	1@158	17.23	17.16	17.16	

Band n77(3450-3550) include n78 SCS 15KHz						
BW (MHz)	Modulation	RB Allocation	Channel/Frequency(MHz)			Tune-up limit (dBm)
			630668	633334	636000	
			3460.020	3500.010	3540.000	
20	DFT_BPSK	50@25	23.61	23.00	23.67	24
20	DFT_BPSK	1@1	23.79	23.66	23.02	
20	DFT_BPSK	1@104	23.27	23.82	23.98	
20	DFT_QPSK	50@25	23.93	23.14	23.66	24
20	DFT_QPSK	1@1	23.89	23.55	23.35	
20	DFT_QPSK	1@104	23.30	23.30	23.55	
20	DFT_QAM16	50@25	22.23	22.15	22.14	23
20	DFT_QAM16	1@1	22.28	22.04	22.21	
20	DFT_QAM16	1@104	22.26	22.25	22.23	
20	DFT_QAM64	50@25	21.41	21.06	21.04	22
20	DFT_QAM64	1@1	21.27	21.20	21.41	
20	DFT_QAM64	1@104	21.30	21.20	21.44	
20	DFT_QAM256	50@25	19.18	19.42	19.45	20
20	DFT_QAM256	1@1	19.34	19.11	19.24	
20	DFT_QAM256	1@104	19.21	19.41	19.18	
20	CP_QPSK	53@26	21.23	21.01	21.34	22
20	CP_QPSK	1@1	21.16	21.10	21.31	
20	CP_QPSK	1@104	21.40	21.19	21.38	
20	CP_QAM16	53@26	21.29	21.45	21.08	22
20	CP_QAM16	1@1	21.15	21.43	21.08	
20	CP_QAM16	1@104	21.30	21.32	21.16	
20	CP_QAM64	53@26	19.06	19.07	19.36	20
20	CP_QAM64	1@1	19.21	19.16	19.45	
20	CP_QAM64	1@104	19.29	19.11	19.09	
20	CP_QAM256	53@26	17.30	17.12	17.27	18
20	CP_QAM256	1@1	17.26	17.32	17.02	
20	CP_QAM256	1@104	17.16	17.28	17.18	

Band n77(3450-3550) include n78 SCS 15KHz						
BW (MHz)	Modulation	RB Allocation	Channel/Frequency(MHz)			Tune-up limit (dBm)
			630500	633334	636166	
			3457.500	3500.010	3542.490	
15	DFT_BPSK	36@18	23.43	23.84	23.07	24
15	DFT_BPSK	1@1	23.73	23.43	23.60	
15	DFT_BPSK	1@77	23.75	23.76	23.15	
15	DFT_QPSK	36@18	23.15	23.45	23.42	24
15	DFT_QPSK	1@1	23.22	23.00	23.36	
15	DFT_QPSK	1@77	23.74	23.89	23.81	
15	DFT_QAM16	36@18	22.27	22.20	22.22	23
15	DFT_QAM16	1@1	22.38	22.28	22.08	
15	DFT_QAM16	1@77	22.12	22.41	22.38	
15	DFT_QAM64	36@18	21.09	21.14	21.43	22
15	DFT_QAM64	1@1	21.25	21.37	21.08	
15	DFT_QAM64	1@77	21.22	21.04	21.27	
15	DFT_QAM256	36@18	19.25	19.24	19.40	20
15	DFT_QAM256	1@1	19.09	19.42	19.36	
15	DFT_QAM256	1@77	19.44	19.29	19.32	
15	CP_QPSK	39@19	21.18	21.04	21.42	22
15	CP_QPSK	1@1	21.18	21.45	21.18	
15	CP_QPSK	1@77	21.41	21.12	21.27	
15	CP_QAM16	39@19	21.13	21.11	21.15	22
15	CP_QAM16	1@1	21.33	21.42	21.35	
15	CP_QAM16	1@77	21.17	21.12	21.45	
15	CP_QAM64	39@19	19.03	19.45	19.44	20
15	CP_QAM64	1@1	19.38	19.37	19.33	
15	CP_QAM64	1@77	19.16	19.26	19.02	
15	CP_QAM256	39@19	17.13	17.45	17.43	18
15	CP_QAM256	1@1	17.11	17.10	17.05	
15	CP_QAM256	1@77	17.34	17.34	17.17	

Band n77(3450-3550) include n78 SCS 15KHz						
BW (MHz)	Modulation	RB Allocation	Channel/Frequency(MHz)			Tune-up limit (dBm)
			630334	633334	636332	
			3455.010	3500.010	3544.980	
10	DFT_BPSK	25@12	23.88	23.96	23.94	24
10	DFT_BPSK	1@1	23.46	23.32	23.24	
10	DFT_BPSK	1@50	23.39	23.36	23.35	
10	DFT_QPSK	25@12	23.26	23.06	23.64	24
10	DFT_QPSK	1@1	23.10	23.26	23.91	
10	DFT_QPSK	1@50	23.47	23.77	23.09	
10	DFT_QAM16	25@12	22.19	22.36	22.28	23
10	DFT_QAM16	1@1	22.12	22.12	22.23	
10	DFT_QAM16	1@50	22.05	22.30	22.28	
10	DFT_QAM64	25@12	21.39	21.40	21.09	22
10	DFT_QAM64	1@1	21.32	21.16	21.23	
10	DFT_QAM64	1@50	21.43	21.24	21.42	
10	DFT_QAM256	25@12	19.09	19.12	19.22	20
10	DFT_QAM256	1@1	19.33	19.41	19.37	
10	DFT_QAM256	1@50	19.24	19.34	19.04	
10	CP_QPSK	26@13	21.34	21.08	21.20	22
10	CP_QPSK	1@1	21.25	21.18	21.11	
10	CP_QPSK	1@50	21.10	21.18	21.06	
10	CP_QAM16	26@13	21.38	21.22	21.40	22
10	CP_QAM16	1@1	21.27	21.45	21.17	
10	CP_QAM16	1@50	21.05	21.06	21.40	
10	CP_QAM64	26@13	19.41	19.25	19.36	20
10	CP_QAM64	1@1	19.32	19.38	19.25	
10	CP_QAM64	1@50	19.03	19.13	19.43	
10	CP_QAM256	26@13	17.27	17.37	17.19	18
10	CP_QAM256	1@1	17.04	17.32	17.43	
10	CP_QAM256	1@50	17.44	17.35	17.25	

Band n77(3450-3550) include n78 SCS 30KHz						
BW (MHz)	Modulation	RB Allocation	Channel/Frequency(MHz)			Tune-up limit (dBm)
				633334		
				3500.010		
100	DFT_BPSK	135@67		23.62		24
100	DFT_BPSK	1@1		23.67		
100	DFT_BPSK	1@271		23.87		
100	DFT_QPSK	135@67		23.52		24
100	DFT_QPSK	1@1		23.78		
100	DFT_QPSK	1@271		23.92		
100	DFT_QAM16	135@67		22.12		23
100	DFT_QAM16	1@1		22.43		
100	DFT_QAM16	1@271		22.16		
100	DFT_QAM64	135@67		21.31		22
100	DFT_QAM64	1@1		21.05		
100	DFT_QAM64	1@271		21.09		
100	DFT_QAM256	135@67		19.40		20
100	DFT_QAM256	1@1		19.34		
100	DFT_QAM256	1@271		19.03		
100	CP_QPSK	137@68		21.33		22
100	CP_QPSK	1@1		21.24		
100	CP_QPSK	1@271		21.07		
100	CP_QAM16	137@68		21.28		22
100	CP_QAM16	1@1		21.32		
100	CP_QAM16	1@271		21.06		
100	CP_QAM64	137@68		19.29		20
100	CP_QAM64	1@1		19.33		
100	CP_QAM64	1@271		19.13		
100	CP_QAM256	137@68		17.39		18
100	CP_QAM256	1@1		17.31		
100	CP_QAM256	1@271		17.44		

Band n77(3450-3550) include n78 SCS 30KHz						
BW (MHz)	Modulation	RB Allocation	Channel/Frequency(MHz)			Tune-up limit (dBm)
			633000	633334	633666	
			3495.000	3500.010	3504.990	
90	DFT_BPSK	120@60	23.36	23.38	23.32	24
90	DFT_BPSK	1@1	23.16	23.56	23.46	
90	DFT_BPSK	1@243	23.67	23.07	23.51	
90	DFT_QPSK	120@60	23.62	23.35	23.46	24
90	DFT_QPSK	1@1	23.09	23.38	23.06	
90	DFT_QPSK	1@243	23.49	23.97	23.54	
90	DFT_QAM16	120@60	22.20	22.29	22.45	23
90	DFT_QAM16	1@1	22.15	22.18	22.14	
90	DFT_QAM16	1@243	22.05	22.01	22.39	
90	DFT_QAM64	120@60	21.42	21.44	21.03	22
90	DFT_QAM64	1@1	21.32	21.09	21.44	
90	DFT_QAM64	1@243	21.05	21.42	21.24	
90	DFT_QAM256	120@60	19.45	19.21	19.31	20
90	DFT_QAM256	1@1	19.36	19.35	19.37	
90	DFT_QAM256	1@243	19.23	19.42	19.21	
90	CP_QPSK	123@61	21.21	21.34	21.41	22
90	CP_QPSK	1@1	21.13	21.40	21.26	
90	CP_QPSK	1@243	21.40	21.35	21.21	
90	CP_QAM16	123@61	21.13	21.15	21.17	22
90	CP_QAM16	1@1	21.34	21.06	21.28	
90	CP_QAM16	1@243	21.29	21.10	21.18	
90	CP_QAM64	123@61	19.05	19.28	19.06	20
90	CP_QAM64	1@1	19.25	19.21	19.26	
90	CP_QAM64	1@243	19.34	19.27	19.04	
90	CP_QAM256	123@61	17.02	17.12	17.26	18
90	CP_QAM256	1@1	17.05	17.05	17.35	
90	CP_QAM256	1@243	17.25	17.30	17.27	

Band n77(3450-3550) include n78 SCS 30KHz						
BW (MHz)	Modulation	RB Allocation	Channel/Frequency(MHz)			Tune-up limit (dBm)
			632668	633334	634000	
			3490.020	3500.010	3510.000	
80	DFT_BPSK	108@54	23.56	23.52	23.77	24
80	DFT_BPSK	1@1	23.76	23.70	23.19	
80	DFT_BPSK	1@215	23.45	23.36	23.30	
80	DFT_QPSK	108@54	23.60	23.84	23.52	24
80	DFT_QPSK	1@1	23.57	23.01	23.32	
80	DFT_QPSK	1@215	23.01	23.02	23.78	
80	DFT_QAM16	108@54	22.23	22.01	22.24	23
80	DFT_QAM16	1@1	22.19	22.04	22.01	
80	DFT_QAM16	1@215	22.40	22.15	22.07	
80	DFT_QAM64	108@54	21.39	21.35	21.04	22
80	DFT_QAM64	1@1	21.11	21.45	21.30	
80	DFT_QAM64	1@215	21.19	21.07	21.16	
80	DFT_QAM256	108@54	19.15	19.22	19.40	20
80	DFT_QAM256	1@1	19.15	19.13	19.33	
80	DFT_QAM256	1@215	19.30	19.12	19.30	
80	CP_QPSK	109@54	21.23	21.18	21.19	22
80	CP_QPSK	1@1	21.38	21.42	21.14	
80	CP_QPSK	1@215	21.10	21.10	21.36	
80	CP_QAM16	109@54	21.41	21.31	21.37	22
80	CP_QAM16	1@1	21.37	21.43	21.36	
80	CP_QAM16	1@215	21.02	21.05	21.21	
80	CP_QAM64	109@54	19.13	19.38	19.25	20
80	CP_QAM64	1@1	19.10	19.13	19.29	
80	CP_QAM64	1@215	19.33	19.38	19.41	
80	CP_QAM256	109@54	17.03	17.03	17.17	18
80	CP_QAM256	1@1	17.23	17.31	17.19	
80	CP_QAM256	1@215	17.13	17.07	17.42	

Band n77(3450-3550) include n78 SCS 30KHz						
BW (MHz)	Modulation	RB Allocation	Channel/Frequency(MHz)			Tune-up limit (dBm)
			632000	633334	634666	
			3480.000	3500.010	3519.990	
60	DFT_BPSK	81@40	23.08	23.34	23.68	24
60	DFT_BPSK	1@1	23.86	23.07	23.14	
60	DFT_BPSK	1@160	23.06	23.43	23.47	
60	DFT_QPSK	81@40	23.31	23.54	23.70	24
60	DFT_QPSK	1@1	23.72	23.19	23.58	
60	DFT_QPSK	1@160	23.58	23.12	23.36	
60	DFT_QAM16	81@40	22.06	22.21	22.28	23
60	DFT_QAM16	1@1	22.41	22.45	22.15	
60	DFT_QAM16	1@160	22.27	22.29	22.43	
60	DFT_QAM64	81@40	21.25	21.25	21.26	22
60	DFT_QAM64	1@1	21.42	21.10	21.40	
60	DFT_QAM64	1@160	21.16	21.40	21.25	
60	DFT_QAM256	81@40	19.10	19.23	19.11	20
60	DFT_QAM256	1@1	19.11	19.02	19.26	
60	DFT_QAM256	1@160	19.18	19.08	19.25	
60	CP_QPSK	81@40	21.28	21.03	21.25	22
60	CP_QPSK	1@1	21.06	21.28	21.06	
60	CP_QPSK	1@160	21.15	21.42	21.33	
60	CP_QAM16	81@40	21.03	21.08	21.20	22
60	CP_QAM16	1@1	21.37	21.15	21.07	
60	CP_QAM16	1@160	21.08	21.30	21.33	
60	CP_QAM64	81@40	19.05	19.09	19.17	20
60	CP_QAM64	1@1	19.03	19.36	19.42	
60	CP_QAM64	1@160	19.20	19.43	19.45	
60	CP_QAM256	81@40	17.38	17.07	17.28	18
60	CP_QAM256	1@1	17.05	17.35	17.45	
60	CP_QAM256	1@160	17.13	17.14	17.44	

Band n77(3450-3550) include n78 SCS 30KHz						
BW (MHz)	Modulation	RB Allocation	Channel/Frequency(MHz)			Tune-up limit (dBm)
			631668	633334	635000	
			3475.020	3500.010	3525.000	
50	DFT_BPSK	64@32	23.87	23.60	23.37	24
50	DFT_BPSK	1@1	23.36	23.64	23.82	
50	DFT_BPSK	1@131	23.52	23.96	23.89	
50	DFT_QPSK	64@32	23.60	23.95	23.01	24
50	DFT_QPSK	1@1	23.52	23.75	23.62	
50	DFT_QPSK	1@131	23.34	23.34	23.25	
50	DFT_QAM16	64@32	22.28	22.35	22.40	23
50	DFT_QAM16	1@1	22.45	22.24	22.29	
50	DFT_QAM16	1@131	22.15	22.45	22.22	
50	DFT_QAM64	64@32	21.27	21.41	21.03	22
50	DFT_QAM64	1@1	21.42	21.03	21.42	
50	DFT_QAM64	1@131	21.12	21.40	21.37	
50	DFT_QAM256	64@32	19.27	19.21	19.03	20
50	DFT_QAM256	1@1	19.37	19.20	19.25	
50	DFT_QAM256	1@131	19.29	19.28	19.35	
50	CP_QPSK	67@33	21.14	21.29	21.17	22
50	CP_QPSK	1@1	21.32	21.18	21.14	
50	CP_QPSK	1@131	21.36	21.08	21.01	
50	CP_QAM16	67@33	21.14	21.45	21.08	22
50	CP_QAM16	1@1	21.14	21.09	21.37	
50	CP_QAM16	1@131	21.08	21.01	21.42	
50	CP_QAM64	67@33	19.25	19.42	19.01	20
50	CP_QAM64	1@1	19.32	19.37	19.24	
50	CP_QAM64	1@131	19.07	19.12	19.22	
50	CP_QAM256	67@33	17.29	17.45	17.41	18
50	CP_QAM256	1@1	17.14	17.23	17.45	
50	CP_QAM256	1@131	17.08	17.33	17.26	

Band n77(3450-3550) include n78 SCS 30KHz						
BW (MHz)	Modulation	RB Allocation	Channel/Frequency(MHz)			Tune-up limit (dBm)
			631334	633334	635332	
			3470.010	3500.010	3529.980	
40	DFT_BPSK	50@25	23.41	23.78	23.58	24
40	DFT_BPSK	1@1	23.95	23.01	23.28	
40	DFT_BPSK	1@104	23.87	23.97	23.70	
40	DFT_QPSK	50@25	23.57	23.48	23.24	24
40	DFT_QPSK	1@1	23.33	23.94	23.04	
40	DFT_QPSK	1@104	23.84	23.05	23.74	
40	DFT_QAM16	50@25	22.18	22.06	22.17	23
40	DFT_QAM16	1@1	22.35	22.26	22.44	
40	DFT_QAM16	1@104	22.02	22.21	22.36	
40	DFT_QAM64	50@25	21.20	21.11	21.02	22
40	DFT_QAM64	1@1	21.23	21.11	21.41	
40	DFT_QAM64	1@104	21.29	21.19	21.29	
40	DFT_QAM256	50@25	19.06	19.28	19.05	20
40	DFT_QAM256	1@1	19.41	19.20	19.09	
40	DFT_QAM256	1@104	19.08	19.06	19.37	
40	CP_QPSK	53@26	21.05	21.15	21.20	22
40	CP_QPSK	1@1	21.04	21.03	21.06	
40	CP_QPSK	1@104	21.08	21.40	21.25	
40	CP_QAM16	53@26	21.39	21.43	21.07	22
40	CP_QAM16	1@1	21.30	21.07	21.13	
40	CP_QAM16	1@104	21.17	21.10	21.27	
40	CP_QAM64	53@26	19.10	19.39	19.16	20
40	CP_QAM64	1@1	19.29	19.40	19.28	
40	CP_QAM64	1@104	19.33	19.11	19.07	
40	CP_QAM256	53@26	17.16	17.37	17.06	18
40	CP_QAM256	1@1	17.09	17.27	17.41	
40	CP_QAM256	1@104	17.04	17.04	17.25	

Band n77(3450-3550) include n78 SCS 30KHz						
BW (MHz)	Modulation	RB Allocation	Channel/Frequency(MHz)			Tune-up limit (dBm)
			631000	633334	635666	
			3465.000	3500.010	3534.990	
30	DFT_BPSK	36@18	23.55	23.60	23.10	24
30	DFT_BPSK	1@1	23.89	23.60	23.43	
30	DFT_BPSK	1@76	23.82	23.04	23.04	
30	DFT_QPSK	36@18	23.75	23.29	23.66	24
30	DFT_QPSK	1@1	23.22	23.11	23.14	
30	DFT_QPSK	1@76	23.39	23.79	23.79	
30	DFT_QAM16	36@18	22.43	22.01	22.03	23
30	DFT_QAM16	1@1	22.01	22.45	22.01	
30	DFT_QAM16	1@76	22.14	22.08	22.24	
30	DFT_QAM64	36@18	21.39	21.07	21.33	22
30	DFT_QAM64	1@1	21.03	21.34	21.21	
30	DFT_QAM64	1@76	21.02	21.39	21.15	
30	DFT_QAM256	36@18	19.24	19.39	19.15	20
30	DFT_QAM256	1@1	19.29	19.39	19.08	
30	DFT_QAM256	1@76	19.33	19.29	19.26	
30	CP_QPSK	39@19	21.35	21.12	21.07	22
30	CP_QPSK	1@1	21.08	21.26	21.42	
30	CP_QPSK	1@76	21.33	21.30	21.36	
30	CP_QAM16	39@19	21.12	21.09	21.23	22
30	CP_QAM16	1@1	21.37	21.06	21.31	
30	CP_QAM16	1@76	21.32	21.22	21.20	
30	CP_QAM64	39@19	19.37	19.20	19.45	20
30	CP_QAM64	1@1	19.36	19.11	19.34	
30	CP_QAM64	1@76	19.30	19.35	19.23	
30	CP_QAM256	39@19	17.32	17.17	17.15	18
30	CP_QAM256	1@1	17.28	17.04	17.14	
30	CP_QAM256	1@76	17.33	17.08	17.14	

Band n77(3450-3550) include n78 SCS 30KHz						
BW (MHz)	Modulation	RB Allocation	Channel/Frequency(MHz)			Tune-up limit (dBm)
			630668	633334	636000	
			3460.020	3500.010	3540.000	
20	DFT_BPSK	25@12	23.49	23.32	23.22	24
20	DFT_BPSK	1@1	23.37	23.35	23.72	
20	DFT_BPSK	1@49	23.84	23.31	23.31	
20	DFT_QPSK	25@12	23.15	23.95	23.12	24
20	DFT_QPSK	1@1	23.28	23.24	23.65	
20	DFT_QPSK	1@49	23.01	23.68	23.58	
20	DFT_QAM16	25@12	22.44	22.05	22.03	23
20	DFT_QAM16	1@1	22.32	22.10	22.04	
20	DFT_QAM16	1@49	22.44	22.38	22.38	
20	DFT_QAM64	25@12	21.09	21.28	21.26	22
20	DFT_QAM64	1@1	21.23	21.42	21.22	
20	DFT_QAM64	1@49	21.27	21.39	21.07	
20	DFT_QAM256	25@12	19.01	19.32	19.45	20
20	DFT_QAM256	1@1	19.35	19.30	19.05	
20	DFT_QAM256	1@49	19.14	19.12	19.40	
20	CP_QPSK	25@12	21.28	21.23	21.39	22
20	CP_QPSK	1@1	21.44	21.29	21.03	
20	CP_QPSK	1@49	21.27	21.19	21.24	
20	CP_QAM16	25@12	21.23	21.12	21.15	22
20	CP_QAM16	1@1	21.13	21.14	21.29	
20	CP_QAM16	1@49	21.15	21.12	21.40	
20	CP_QAM64	25@12	19.45	19.15	19.02	20
20	CP_QAM64	1@1	19.12	19.38	19.08	
20	CP_QAM64	1@49	19.31	19.42	19.21	
20	CP_QAM256	25@12	17.17	17.01	17.35	18
20	CP_QAM256	1@1	17.01	17.43	17.23	
20	CP_QAM256	1@49	17.43	17.36	17.27	

Band n77(3450-3550) include n78 SCS 30KHz						
BW (MHz)	Modulation	RB Allocation	Channel/Frequency(MHz)			Tune-up limit (dBm)
			630500	633334	636166	
			3457.500	3500.010	3542.490	
15	DFT_BPSK	18@9	23.47	23.18	23.61	24
15	DFT_BPSK	1@1	23.41	23.35	23.90	
15	DFT_BPSK	1@36	23.13	23.65	23.35	
15	DFT_QPSK	18@9	23.78	23.07	23.09	24
15	DFT_QPSK	1@1	23.79	23.56	23.71	
15	DFT_QPSK	1@36	23.13	23.27	23.74	
15	DFT_QAM16	18@9	22.26	22.20	22.24	23
15	DFT_QAM16	1@1	22.10	22.19	22.20	
15	DFT_QAM16	1@36	22.23	22.14	22.37	
15	DFT_QAM64	18@9	21.09	21.29	21.30	22
15	DFT_QAM64	1@1	21.03	21.28	21.24	
15	DFT_QAM64	1@36	21.32	21.35	21.30	
15	DFT_QAM256	18@9	19.23	19.40	19.13	20
15	DFT_QAM256	1@1	19.08	19.13	19.35	
15	DFT_QAM256	1@36	19.03	19.04	19.16	
15	CP_QPSK	19@9	21.31	21.39	21.24	22
15	CP_QPSK	1@1	21.30	21.31	21.07	
15	CP_QPSK	1@36	21.03	21.28	21.31	
15	CP_QAM16	19@9	21.44	21.33	21.32	22
15	CP_QAM16	1@1	21.07	21.16	21.19	
15	CP_QAM16	1@36	21.40	21.10	21.05	
15	CP_QAM64	19@9	19.07	19.19	19.23	20
15	CP_QAM64	1@1	19.37	19.13	19.15	
15	CP_QAM64	1@36	19.45	19.34	19.07	
15	CP_QAM256	19@9	17.13	17.07	17.24	18
15	CP_QAM256	1@1	17.13	17.17	17.35	
15	CP_QAM256	1@36	17.14	17.05	17.17	

Band n77(3450-3550) include n78 SCS 30KHz						
BW (MHz)	Modulation	RB Allocation	Channel/Frequency(MHz)			Tune-up limit (dBm)
			630334	633334	636332	
			3455.010	3500.010	3544.980	
10	DFT_BPSK	12@6	23.58	23.30	23.30	24
10	DFT_BPSK	1@1	23.91	23.91	23.09	
10	DFT_BPSK	1@22	23.15	23.57	23.03	
10	DFT_QPSK	12@6	23.86	23.31	23.90	24
10	DFT_QPSK	1@1	23.02	23.82	23.85	
10	DFT_QPSK	1@22	23.34	23.06	23.51	
10	DFT_QAM16	12@6	22.22	22.23	22.04	23
10	DFT_QAM16	1@1	22.19	22.01	22.02	
10	DFT_QAM16	1@22	22.20	22.05	22.08	
10	DFT_QAM64	12@6	21.40	21.28	21.17	22
10	DFT_QAM64	1@1	21.34	21.13	21.42	
10	DFT_QAM64	1@22	21.39	21.41	21.31	
10	DFT_QAM256	12@6	19.21	19.27	19.31	20
10	DFT_QAM256	1@1	19.28	19.42	19.30	
10	DFT_QAM256	1@22	19.44	19.09	19.43	
10	CP_QPSK	12@6	21.27	21.42	21.24	22
10	CP_QPSK	1@1	21.30	21.14	21.12	
10	CP_QPSK	1@22	21.38	21.08	21.05	
10	CP_QAM16	12@6	21.16	21.39	21.32	22
10	CP_QAM16	1@1	21.40	21.28	21.29	
10	CP_QAM16	1@22	21.02	21.32	21.32	
10	CP_QAM64	12@6	19.18	19.45	19.31	20
10	CP_QAM64	1@1	19.27	19.07	19.33	
10	CP_QAM64	1@22	19.22	19.14	19.34	
10	CP_QAM256	12@6	17.31	17.23	17.14	18
10	CP_QAM256	1@1	17.12	17.18	17.39	
10	CP_QAM256	1@22	17.33	17.07	17.28	

Band n77(3700-3980) include n78 SCS 15KHz						
BW (MHz)	Modulation	RB Allocation	Channel/Frequency(MHz)			Tune-up limit (dBm)
			648334	656000	663666	
			3725.010	3840.000	3954.990	
50	DFT_BPSK	135@67	23.32	23.80	23.76	24
50	DFT_BPSK	1@1	23.73	23.19	23.74	
50	DFT_BPSK	1@268	23.34	23.23	23.67	
50	DFT_QPSK	135@67	23.29	23.49	23.78	24
50	DFT_QPSK	1@1	23.78	23.09	23.67	
50	DFT_QPSK	1@268	23.60	23.11	23.19	
50	DFT_QAM16	135@67	22.22	22.38	22.23	23
50	DFT_QAM16	1@1	22.23	22.30	22.03	
50	DFT_QAM16	1@268	22.14	22.37	22.34	
50	DFT_QAM64	135@67	21.37	21.03	21.26	22
50	DFT_QAM64	1@1	21.43	21.32	21.37	
50	DFT_QAM64	1@268	21.39	21.27	21.33	
50	DFT_QAM256	135@67	19.01	19.19	19.06	20
50	DFT_QAM256	1@1	19.45	19.36	19.21	
50	DFT_QAM256	1@268	19.41	19.12	19.45	
50	CP_QPSK	135@67	21.22	21.21	21.38	22
50	CP_QPSK	1@1	21.21	21.29	21.38	
50	CP_QPSK	1@268	21.23	21.30	21.20	
50	CP_QAM16	135@67	21.17	21.42	21.09	22
50	CP_QAM16	1@1	21.16	21.42	21.14	
50	CP_QAM16	1@268	21.23	21.18	21.13	
50	CP_QAM64	135@67	19.29	19.19	19.19	20
50	CP_QAM64	1@1	19.07	19.05	19.39	
50	CP_QAM64	1@268	19.09	19.36	19.44	
50	CP_QAM256	135@67	17.38	17.12	17.16	18
50	CP_QAM256	1@1	17.21	17.04	17.24	
50	CP_QAM256	1@268	17.05	17.03	17.43	

Band n77(3700-3980) include n78 SCS 15KHz						
BW (MHz)	Modulation	RB Allocation	Channel/Frequency(MHz)			Tune-up limit (dBm)
			648000	656000	664000	
			3720.000	3840.000	3960.000	
40	DFT_BPSK	108@54	23.10	23.47	23.32	24
40	DFT_BPSK	1@1	23.00	23.92	23.68	
40	DFT_BPSK	1@214	23.50	23.21	23.92	
40	DFT_QPSK	108@54	23.32	23.33	23.09	24
40	DFT_QPSK	1@1	23.46	23.73	23.76	
40	DFT_QPSK	1@214	23.56	23.59	23.02	
40	DFT_QAM16	108@54	22.14	22.26	22.20	23
40	DFT_QAM16	1@1	22.34	22.12	22.10	
40	DFT_QAM16	1@214	22.04	22.13	22.27	
40	DFT_QAM64	108@54	21.12	21.28	21.24	22
40	DFT_QAM64	1@1	21.21	21.38	21.27	
40	DFT_QAM64	1@214	21.12	21.21	21.23	
40	DFT_QAM256	108@54	19.01	19.33	19.03	20
40	DFT_QAM256	1@1	19.04	19.30	19.32	
40	DFT_QAM256	1@214	19.41	19.24	19.19	
40	CP_QPSK	108@54	21.02	21.02	21.07	22
40	CP_QPSK	1@1	21.09	21.08	21.31	
40	CP_QPSK	1@214	21.25	21.15	21.01	
40	CP_QAM16	108@54	21.39	21.16	21.27	22
40	CP_QAM16	1@1	21.42	21.23	21.28	
40	CP_QAM16	1@214	21.16	21.02	21.05	
40	CP_QAM64	108@54	19.29	19.45	19.26	20
40	CP_QAM64	1@1	19.37	19.10	19.29	
40	CP_QAM64	1@214	19.43	19.03	19.26	
40	CP_QAM256	108@54	17.30	17.23	17.41	18
40	CP_QAM256	1@1	17.27	17.40	17.16	
40	CP_QAM256	1@214	17.15	17.37	17.23	

Band n77(3700-3980) include n78 SCS 15KHz						
BW (MHz)	Modulation	RB Allocation	Channel/Frequency(MHz)			Tune-up limit (dBm)
			647668	656000	664332	
			3715.020	3840.000	3964.980	
30	DFT_BPSK	80@40	23.61	23.52	23.58	24
30	DFT_BPSK	1@1	23.11	23.65	23.63	
30	DFT_BPSK	1@158	23.17	23.32	23.25	
30	DFT_QPSK	80@40	23.81	23.35	23.96	24
30	DFT_QPSK	1@1	23.03	23.18	23.03	
30	DFT_QPSK	1@158	23.04	23.98	23.17	
30	DFT_QAM16	80@40	22.42	22.18	22.06	23
30	DFT_QAM16	1@1	22.17	22.13	22.09	
30	DFT_QAM16	1@158	22.30	22.24	22.18	
30	DFT_QAM64	80@40	21.39	21.35	21.37	22
30	DFT_QAM64	1@1	21.34	21.18	21.11	
30	DFT_QAM64	1@158	21.17	21.34	21.42	
30	DFT_QAM256	80@40	19.13	19.03	19.45	20
30	DFT_QAM256	1@1	19.21	19.34	19.31	
30	DFT_QAM256	1@158	19.35	19.26	19.14	
30	CP_QPSK	80@40	21.20	21.38	21.05	22
30	CP_QPSK	1@1	21.21	21.16	21.25	
30	CP_QPSK	1@158	21.34	21.32	21.07	
30	CP_QAM16	80@40	21.01	21.16	21.28	22
30	CP_QAM16	1@1	21.45	21.06	21.29	
30	CP_QAM16	1@158	21.38	21.32	21.06	
30	CP_QAM64	80@40	19.27	19.08	19.01	20
30	CP_QAM64	1@1	19.11	19.41	19.04	
30	CP_QAM64	1@158	19.16	19.01	19.13	
30	CP_QAM256	80@40	17.37	17.21	17.18	18
30	CP_QAM256	1@1	17.22	17.04	17.36	
30	CP_QAM256	1@158	17.31	17.22	17.16	

Band n77(3700-3980) include n78 SCS 15KHz						
BW (MHz)	Modulation	RB Allocation	Channel/Frequency(MHz)			Tune-up limit (dBm)
			647334	656000	664666	
			3710.010	3840.000	3969.990	
20	DFT_BPSK	50@25	23.56	23.64	23.80	24
20	DFT_BPSK	1@1	23.71	23.09	23.98	
20	DFT_BPSK	1@104	23.73	23.42	23.74	
20	DFT_QPSK	50@25	23.37	23.45	23.61	24
20	DFT_QPSK	1@1	23.74	23.30	23.53	
20	DFT_QPSK	1@104	23.03	23.08	23.20	
20	DFT_QAM16	50@25	22.32	22.08	22.13	23
20	DFT_QAM16	1@1	22.09	22.16	22.35	
20	DFT_QAM16	1@104	22.41	22.04	22.01	
20	DFT_QAM64	50@25	21.44	21.43	21.10	22
20	DFT_QAM64	1@1	21.26	21.03	21.24	
20	DFT_QAM64	1@104	21.28	21.17	21.02	
20	DFT_QAM256	50@25	19.36	19.34	19.04	20
20	DFT_QAM256	1@1	19.32	19.36	19.20	
20	DFT_QAM256	1@104	19.07	19.37	19.24	
20	CP_QPSK	53@26	21.17	21.13	21.19	22
20	CP_QPSK	1@1	21.41	21.24	21.18	
20	CP_QPSK	1@104	21.40	21.18	21.17	
20	CP_QAM16	53@26	21.28	21.15	21.16	22
20	CP_QAM16	1@1	21.14	21.37	21.33	
20	CP_QAM16	1@104	21.14	21.26	21.22	
20	CP_QAM64	53@26	19.22	19.36	19.05	20
20	CP_QAM64	1@1	19.30	19.01	19.36	
20	CP_QAM64	1@104	19.30	19.40	19.25	
20	CP_QAM256	53@26	17.26	17.03	17.34	18
20	CP_QAM256	1@1	17.44	17.40	17.01	
20	CP_QAM256	1@104	17.11	17.25	17.07	

Band n77(3700-3980) include n78 SCS 15KHz						
BW (MHz)	Modulation	RB Allocation	Channel/Frequency(MHz)			Tune-up limit (dBm)
			647168	656000	664832	
			3707.520	3840.000	3972.480	
15	DFT_BPSK	36@18	23.88	23.50	23.71	24
15	DFT_BPSK	1@1	23.71	23.56	23.09	
15	DFT_BPSK	1@77	23.09	23.32	23.61	
15	DFT_QPSK	36@18	23.08	23.38	23.21	24
15	DFT_QPSK	1@1	23.33	23.53	23.45	
15	DFT_QPSK	1@77	23.53	23.03	23.11	
15	DFT_QAM16	36@18	22.10	22.43	22.39	23
15	DFT_QAM16	1@1	22.40	22.41	22.15	
15	DFT_QAM16	1@77	22.40	22.40	22.17	
15	DFT_QAM64	36@18	21.26	21.20	21.25	22
15	DFT_QAM64	1@1	21.27	21.32	21.45	
15	DFT_QAM64	1@77	21.33	21.29	21.30	
15	DFT_QAM256	36@18	19.12	19.40	19.30	20
15	DFT_QAM256	1@1	19.07	19.15	19.29	
15	DFT_QAM256	1@77	19.41	19.45	19.12	
15	CP_QPSK	39@19	21.05	21.44	21.04	22
15	CP_QPSK	1@1	21.41	21.31	21.40	
15	CP_QPSK	1@77	21.34	21.29	21.04	
15	CP_QAM16	39@19	21.11	21.35	21.25	22
15	CP_QAM16	1@1	21.17	21.13	21.24	
15	CP_QAM16	1@77	21.14	21.19	21.29	
15	CP_QAM64	39@19	19.20	19.26	19.02	20
15	CP_QAM64	1@1	19.13	19.16	19.26	
15	CP_QAM64	1@77	19.03	19.40	19.23	
15	CP_QAM256	39@19	17.40	17.20	17.10	18
15	CP_QAM256	1@1	17.32	17.25	17.15	
15	CP_QAM256	1@77	17.22	17.29	17.39	

Band n77(3700-3980) include n78 SCS 15KHz						
BW (MHz)	Modulation	RB Allocation	Channel/Frequency(MHz)			Tune-up limit (dBm)
			647000	656000	665000	
			3705.000	3840.000	3975.000	
10	DFT_BPSK	25@12	23.47	23.74	23.44	24
10	DFT_BPSK	1@1	23.26	23.67	23.83	
10	DFT_BPSK	1@50	23.35	23.85	23.53	
10	DFT_QPSK	25@12	23.70	23.40	23.17	24
10	DFT_QPSK	1@1	23.92	23.77	23.10	
10	DFT_QPSK	1@50	23.72	23.62	23.76	
10	DFT_QAM16	25@12	22.21	22.22	22.21	23
10	DFT_QAM16	1@1	22.28	22.24	22.20	
10	DFT_QAM16	1@50	22.25	22.41	22.20	
10	DFT_QAM64	25@12	21.34	21.03	21.18	22
10	DFT_QAM64	1@1	21.12	21.23	21.33	
10	DFT_QAM64	1@50	21.28	21.35	21.24	
10	DFT_QAM256	25@12	19.11	19.33	19.01	20
10	DFT_QAM256	1@1	19.40	19.05	19.23	
10	DFT_QAM256	1@50	19.08	19.04	19.32	
10	CP_QPSK	26@13	21.10	21.36	21.08	22
10	CP_QPSK	1@1	21.26	21.07	21.32	
10	CP_QPSK	1@50	21.07	21.30	21.44	
10	CP_QAM16	26@13	21.20	21.26	21.10	22
10	CP_QAM16	1@1	21.45	21.44	21.27	
10	CP_QAM16	1@50	21.42	21.44	21.16	
10	CP_QAM64	26@13	19.22	19.26	19.38	20
10	CP_QAM64	1@1	19.38	19.16	19.20	
10	CP_QAM64	1@50	19.23	19.03	19.28	
10	CP_QAM256	26@13	17.33	17.23	17.26	18
10	CP_QAM256	1@1	17.13	17.12	17.25	
10	CP_QAM256	1@50	17.13	17.21	17.17	

Band n77(3700-3980) include n78 SCS 30KHz						
BW (MHz)	Modulation	RB Allocation	Channel/Frequency(MHz)			Tune-up limit (dBm)
			650000	656000	662000	
			3750.000	3840.000	3930.000	
100	DFT_BPSK	135@67	23.18	23.08	23.23	24
100	DFT_BPSK	1@1	23.37	23.31	23.36	
100	DFT_BPSK	1@271	23.01	23.00	23.27	
100	DFT_QPSK	135@67	23.01	23.74	23.61	24
100	DFT_QPSK	1@1	23.01	23.98	23.06	
100	DFT_QPSK	1@271	23.38	23.53	23.27	
100	DFT_QAM16	135@67	22.15	22.19	22.09	23
100	DFT_QAM16	1@1	22.10	22.36	22.21	
100	DFT_QAM16	1@271	22.42	22.10	22.45	
100	DFT_QAM64	135@67	21.17	21.43	21.03	22
100	DFT_QAM64	1@1	21.32	21.01	21.44	
100	DFT_QAM64	1@271	21.25	21.04	21.12	
100	DFT_QAM256	135@67	19.38	19.45	19.21	20
100	DFT_QAM256	1@1	19.40	19.24	19.27	
100	DFT_QAM256	1@271	19.32	19.39	19.02	
100	CP_QPSK	137@68	21.10	21.20	21.16	22
100	CP_QPSK	1@1	21.03	21.03	21.37	
100	CP_QPSK	1@271	21.09	21.07	21.14	
100	CP_QAM16	137@68	21.19	21.19	21.34	22
100	CP_QAM16	1@1	21.33	21.28	21.04	
100	CP_QAM16	1@271	21.14	21.38	21.23	
100	CP_QAM64	137@68	19.18	19.43	19.31	20
100	CP_QAM64	1@1	19.38	19.19	19.24	
100	CP_QAM64	1@271	19.09	19.21	19.23	
100	CP_QAM256	137@68	17.42	17.07	17.31	18
100	CP_QAM256	1@1	17.27	17.37	17.07	
100	CP_QAM256	1@271	17.28	17.18	17.31	

Band n77(3700-3980) include n78 SCS 30KHz						
BW (MHz)	Modulation	RB Allocation	Channel/Frequency(MHz)			Tune-up limit (dBm)
			649668	656000	662332	
			3745.020	3840.000	3934.980	
90	DFT_BPSK	120@60	23.03	23.58	23.81	24
90	DFT_BPSK	1@1	23.44	23.70	23.68	
90	DFT_BPSK	1@243	23.26	23.56	23.19	
90	DFT_QPSK	120@60	23.76	23.79	23.33	24
90	DFT_QPSK	1@1	23.79	23.37	23.84	
90	DFT_QPSK	1@243	23.03	23.12	23.71	
90	DFT_QAM16	120@60	22.40	22.02	22.25	23
90	DFT_QAM16	1@1	22.04	22.21	22.32	
90	DFT_QAM16	1@243	22.21	22.45	22.43	
90	DFT_QAM64	120@60	21.41	21.24	21.26	22
90	DFT_QAM64	1@1	21.33	21.22	21.29	
90	DFT_QAM64	1@243	21.04	21.43	21.12	
90	DFT_QAM256	120@60	19.02	19.01	19.05	20
90	DFT_QAM256	1@1	19.32	19.41	19.18	
90	DFT_QAM256	1@243	19.12	19.43	19.19	
90	CP_QPSK	123@61	21.28	21.29	21.18	22
90	CP_QPSK	1@1	21.14	21.07	21.09	
90	CP_QPSK	1@243	21.26	21.14	21.43	
90	CP_QAM16	123@61	21.08	21.23	21.33	22
90	CP_QAM16	1@1	21.15	21.07	21.17	
90	CP_QAM16	1@243	21.20	21.25	21.17	
90	CP_QAM64	123@61	19.21	19.24	19.15	20
90	CP_QAM64	1@1	19.13	19.06	19.32	
90	CP_QAM64	1@243	19.17	19.32	19.11	
90	CP_QAM256	123@61	17.29	17.08	17.04	18
90	CP_QAM256	1@1	17.11	17.19	17.13	
90	CP_QAM256	1@243	17.14	17.43	17.14	

Band n77(3700-3980) include n78 SCS 30KHz						
BW (MHz)	Modulation	RB Allocation	Channel/Frequency(MHz)			Tune-up limit (dBm)
			649334	656000	662666	
			3740.010	3840.000	3939.990	
80	DFT_BPSK	108@54	23.71	23.87	23.80	24
80	DFT_BPSK	1@1	23.26	23.13	23.33	
80	DFT_BPSK	1@215	23.69	23.56	23.27	
80	DFT_QPSK	108@54	23.32	23.88	23.89	24
80	DFT_QPSK	1@1	23.94	23.93	23.65	
80	DFT_QPSK	1@215	23.34	23.29	23.54	
80	DFT_QAM16	108@54	22.06	22.15	22.40	23
80	DFT_QAM16	1@1	22.42	22.12	22.28	
80	DFT_QAM16	1@215	22.34	22.44	22.44	
80	DFT_QAM64	108@54	21.30	21.06	21.18	22
80	DFT_QAM64	1@1	21.18	21.01	21.26	
80	DFT_QAM64	1@215	21.41	21.40	21.31	
80	DFT_QAM256	108@54	19.18	19.35	19.07	20
80	DFT_QAM256	1@1	19.25	19.25	19.27	
80	DFT_QAM256	1@215	19.26	19.38	19.02	
80	CP_QPSK	109@54	21.23	21.06	21.42	22
80	CP_QPSK	1@1	21.45	21.43	21.32	
80	CP_QPSK	1@215	21.32	21.44	21.03	
80	CP_QAM16	109@54	21.20	21.15	21.39	22
80	CP_QAM16	1@1	21.09	21.37	21.06	
80	CP_QAM16	1@215	21.28	21.11	21.15	
80	CP_QAM64	109@54	19.05	19.39	19.10	20
80	CP_QAM64	1@1	19.40	19.15	19.42	
80	CP_QAM64	1@215	19.27	19.45	19.24	
80	CP_QAM256	109@54	17.20	17.36	17.27	18
80	CP_QAM256	1@1	17.24	17.11	17.02	
80	CP_QAM256	1@215	17.21	17.17	17.43	

Band n77(3700-3980) include n78 SCS 30KHz						
BW (MHz)	Modulation	RB Allocation	Channel/Frequency(MHz)			Tune-up limit (dBm)
			648668	656000	663332	
			3730.020	3840.000	3949.980	
60	DFT_BPSK	81@40	23.97	23.48	23.66	24
60	DFT_BPSK	1@1	23.07	23.36	23.48	
60	DFT_BPSK	1@160	23.91	23.95	23.05	
60	DFT_QPSK	81@40	23.00	23.37	23.29	24
60	DFT_QPSK	1@1	23.76	23.75	23.67	
60	DFT_QPSK	1@160	23.24	23.29	23.26	
60	DFT_QAM16	81@40	22.05	22.41	22.25	23
60	DFT_QAM16	1@1	22.11	22.24	22.04	
60	DFT_QAM16	1@160	22.05	22.32	22.24	
60	DFT_QAM64	81@40	21.10	21.10	21.05	22
60	DFT_QAM64	1@1	21.26	21.12	21.24	
60	DFT_QAM64	1@160	21.23	21.09	21.29	
60	DFT_QAM256	81@40	19.22	19.09	19.36	20
60	DFT_QAM256	1@1	19.35	19.27	19.09	
60	DFT_QAM256	1@160	19.30	19.07	19.30	
60	CP_QPSK	81@40	21.26	21.39	21.36	22
60	CP_QPSK	1@1	21.05	21.36	21.15	
60	CP_QPSK	1@160	21.02	21.24	21.27	
60	CP_QAM16	81@40	21.06	21.25	21.01	22
60	CP_QAM16	1@1	21.44	21.17	21.22	
60	CP_QAM16	1@160	21.21	21.35	21.24	
60	CP_QAM64	81@40	19.29	19.34	19.13	20
60	CP_QAM64	1@1	19.27	19.21	19.22	
60	CP_QAM64	1@160	19.05	19.18	19.10	
60	CP_QAM256	81@40	17.20	17.37	17.03	18
60	CP_QAM256	1@1	17.33	17.19	17.05	
60	CP_QAM256	1@160	17.14	17.06	17.27	

Band n77(3700-3980) include n78 SCS 30KHz						
BW (MHz)	Modulation	RB Allocation	Channel/Frequency(MHz)			Tune-up limit (dBm)
			648334	656000	663666	
			3725.010	3840.000	3954.990	
50	DFT_BPSK	64@32	23.56	23.47	23.01	24
50	DFT_BPSK	1@1	23.00	23.33	23.07	
50	DFT_BPSK	1@131	23.29	23.76	23.31	
50	DFT_QPSK	64@32	23.62	23.18	23.41	24
50	DFT_QPSK	1@1	23.58	23.97	23.50	
50	DFT_QPSK	1@131	23.38	23.12	23.10	
50	DFT_QAM16	64@32	22.03	22.38	22.28	23
50	DFT_QAM16	1@1	22.24	22.09	22.23	
50	DFT_QAM16	1@131	22.35	22.38	22.26	
50	DFT_QAM64	64@32	21.30	21.38	21.01	22
50	DFT_QAM64	1@1	21.14	21.26	21.45	
50	DFT_QAM64	1@131	21.06	21.24	21.41	
50	DFT_QAM256	64@32	19.13	19.17	19.38	20
50	DFT_QAM256	1@1	19.39	19.43	19.44	
50	DFT_QAM256	1@131	19.23	19.04	19.13	
50	CP_QPSK	67@33	21.40	21.28	21.22	22
50	CP_QPSK	1@1	21.22	21.13	21.16	
50	CP_QPSK	1@131	21.42	21.19	21.45	
50	CP_QAM16	67@33	21.20	21.44	21.11	22
50	CP_QAM16	1@1	21.31	21.33	21.38	
50	CP_QAM16	1@131	21.22	21.24	21.25	
50	CP_QAM64	67@33	19.25	19.32	19.32	20
50	CP_QAM64	1@1	19.13	19.18	19.17	
50	CP_QAM64	1@131	19.44	19.02	19.02	
50	CP_QAM256	67@33	17.26	17.10	17.44	18
50	CP_QAM256	1@1	17.27	17.12	17.10	
50	CP_QAM256	1@131	17.09	17.44	17.10	

Band n77(3700-3980) include n78 SCS 30KHz						
BW (MHz)	Modulation	RB Allocation	Channel/Frequency(MHz)			Tune-up limit (dBm)
			648000	656000	664000	
			3720.000	3840.000	3960.000	
40	DFT_BPSK	50@25	23.60	23.64	23.49	24
40	DFT_BPSK	1@1	23.27	23.35	23.20	
40	DFT_BPSK	1@104	23.78	23.79	23.19	
40	DFT_QPSK	50@25	23.45	23.39	23.71	24
40	DFT_QPSK	1@1	23.27	23.35	23.98	
40	DFT_QPSK	1@104	23.76	23.97	23.56	
40	DFT_QAM16	50@25	22.30	22.44	22.29	23
40	DFT_QAM16	1@1	22.38	22.40	22.02	
40	DFT_QAM16	1@104	22.01	22.43	22.36	
40	DFT_QAM64	50@25	21.20	21.09	21.08	22
40	DFT_QAM64	1@1	21.18	21.41	21.14	
40	DFT_QAM64	1@104	21.41	21.07	21.39	
40	DFT_QAM256	50@25	19.20	19.26	19.22	20
40	DFT_QAM256	1@1	19.25	19.11	19.43	
40	DFT_QAM256	1@104	19.27	19.31	19.29	
40	CP_QPSK	53@26	21.21	21.15	21.16	22
40	CP_QPSK	1@1	21.05	21.26	21.19	
40	CP_QPSK	1@104	21.39	21.12	21.31	
40	CP_QAM16	53@26	21.26	21.08	21.37	22
40	CP_QAM16	1@1	21.03	21.16	21.15	
40	CP_QAM16	1@104	21.29	21.32	21.38	
40	CP_QAM64	53@26	19.15	19.36	19.39	20
40	CP_QAM64	1@1	19.44	19.34	19.01	
40	CP_QAM64	1@104	19.14	19.32	19.42	
40	CP_QAM256	53@26	17.15	17.09	17.36	18
40	CP_QAM256	1@1	17.39	17.36	17.13	
40	CP_QAM256	1@104	17.10	17.11	17.31	

Band n77(3700-3980) include n78 SCS 30KHz						
BW (MHz)	Modulation	RB Allocation	Channel/Frequency(MHz)			Tune-up limit (dBm)
			647668	656000	664332	
			3715.020	3840.000	3964.980	
30	DFT_BPSK	36@18	23.08	23.03	23.41	24
30	DFT_BPSK	1@1	23.03	23.31	23.22	
30	DFT_BPSK	1@76	23.78	23.50	23.01	
30	DFT_QPSK	36@18	23.77	23.53	23.11	24
30	DFT_QPSK	1@1	23.50	23.67	23.42	
30	DFT_QPSK	1@76	23.96	23.87	23.68	
30	DFT_QAM16	36@18	22.04	22.41	22.09	23
30	DFT_QAM16	1@1	22.35	22.20	22.45	
30	DFT_QAM16	1@76	22.25	22.43	22.10	
30	DFT_QAM64	36@18	21.21	21.10	21.18	22
30	DFT_QAM64	1@1	21.01	21.34	21.34	
30	DFT_QAM64	1@76	21.12	21.14	21.30	
30	DFT_QAM256	36@18	19.17	19.20	19.40	20
30	DFT_QAM256	1@1	19.24	19.34	19.30	
30	DFT_QAM256	1@76	19.01	19.41	19.21	
30	CP_QPSK	39@19	21.29	21.39	21.02	22
30	CP_QPSK	1@1	21.31	21.18	21.11	
30	CP_QPSK	1@76	21.32	21.38	21.44	
30	CP_QAM16	39@19	21.30	21.25	21.01	22
30	CP_QAM16	1@1	21.13	21.15	21.24	
30	CP_QAM16	1@76	21.32	21.08	21.41	
30	CP_QAM64	39@19	19.22	19.40	19.23	20
30	CP_QAM64	1@1	19.21	19.30	19.29	
30	CP_QAM64	1@76	19.13	19.06	19.26	
30	CP_QAM256	39@19	17.37	17.33	17.05	18
30	CP_QAM256	1@1	17.09	17.43	17.08	
30	CP_QAM256	1@76	17.30	17.18	17.02	

Band n77(3700-3980) include n78 SCS 30KHz						
BW (MHz)	Modulation	RB Allocation	Channel/Frequency(MHz)			Tune-up limit (dBm)
			647334	656000	664666	
			3710.010	3840.000	3969.990	
20	DFT_BPSK	25@12	23.70	23.06	23.88	24
20	DFT_BPSK	1@1	23.35	23.13	23.28	
20	DFT_BPSK	1@49	23.82	23.33	23.75	
20	DFT_QPSK	25@12	23.22	23.26	23.98	24
20	DFT_QPSK	1@1	23.62	23.17	23.22	
20	DFT_QPSK	1@49	23.93	23.57	23.56	
20	DFT_QAM16	25@12	22.14	22.27	22.42	23
20	DFT_QAM16	1@1	22.37	22.20	22.16	
20	DFT_QAM16	1@49	22.35	22.07	22.39	
20	DFT_QAM64	25@12	21.26	21.40	21.36	22
20	DFT_QAM64	1@1	21.26	21.21	21.11	
20	DFT_QAM64	1@49	21.03	21.32	21.26	
20	DFT_QAM256	25@12	19.30	19.37	19.27	20
20	DFT_QAM256	1@1	19.28	19.45	19.25	
20	DFT_QAM256	1@49	19.32	19.15	19.23	
20	CP_QPSK	25@12	21.14	21.18	21.36	22
20	CP_QPSK	1@1	21.07	21.33	21.38	
20	CP_QPSK	1@49	21.15	21.40	21.15	
20	CP_QAM16	25@12	21.32	21.03	21.19	22
20	CP_QAM16	1@1	21.08	21.37	21.41	
20	CP_QAM16	1@49	21.24	21.43	21.17	
20	CP_QAM64	25@12	19.14	19.25	19.30	20
20	CP_QAM64	1@1	19.12	19.36	19.30	
20	CP_QAM64	1@49	19.08	19.12	19.36	
20	CP_QAM256	25@12	17.41	17.20	17.18	18
20	CP_QAM256	1@1	17.36	17.15	17.39	
20	CP_QAM256	1@49	17.11	17.18	17.42	

Band n77(3700-3980) include n78 SCS 30KHz						
BW (MHz)	Modulation	RB Allocation	Channel/Frequency(MHz)			Tune-up limit (dBm)
			647168	656000	664832	
			3707.520	3840.000	3972.480	
15	DFT_BPSK	18@9	23.64	23.29	23.93	24
15	DFT_BPSK	1@1	23.18	23.94	23.40	
15	DFT_BPSK	1@36	23.63	23.59	23.73	
15	DFT_QPSK	18@9	23.64	23.93	23.95	24
15	DFT_QPSK	1@1	23.46	23.48	23.81	
15	DFT_QPSK	1@36	23.26	23.81	23.75	
15	DFT_QAM16	18@9	22.15	22.44	22.37	23
15	DFT_QAM16	1@1	22.40	22.11	22.06	
15	DFT_QAM16	1@36	22.13	22.02	22.40	
15	DFT_QAM64	18@9	21.14	21.33	21.31	22
15	DFT_QAM64	1@1	21.02	21.12	21.25	
15	DFT_QAM64	1@36	21.35	21.04	21.42	
15	DFT_QAM256	18@9	19.23	19.24	19.20	20
15	DFT_QAM256	1@1	19.14	19.06	19.37	
15	DFT_QAM256	1@36	19.08	19.15	19.26	
15	CP_QPSK	19@9	21.37	21.10	21.27	22
15	CP_QPSK	1@1	21.32	21.15	21.22	
15	CP_QPSK	1@36	21.16	21.41	21.42	
15	CP_QAM16	19@9	21.35	21.09	21.04	22
15	CP_QAM16	1@1	21.09	21.39	21.34	
15	CP_QAM16	1@36	21.10	21.14	21.17	
15	CP_QAM64	19@9	19.39	19.04	19.16	20
15	CP_QAM64	1@1	19.13	19.24	19.25	
15	CP_QAM64	1@36	19.29	19.24	19.40	
15	CP_QAM256	19@9	17.12	17.04	17.20	18
15	CP_QAM256	1@1	17.29	17.05	17.18	
15	CP_QAM256	1@36	17.09	17.11	17.24	

Band n77(3700-3980) include n78 SCS 30KHz						
BW (MHz)	Modulation	RB Allocation	Channel/Frequency(MHz)			Tune-up limit (dBm)
			647000	656000	665000	
			3705.000	3840.000	3975.000	
10	DFT_BPSK	12@6	23.03	23.50	23.13	24
10	DFT_BPSK	1@1	23.15	23.45	23.95	
10	DFT_BPSK	1@22	23.41	23.17	23.83	
10	DFT_QPSK	12@6	23.82	23.37	23.96	24
10	DFT_QPSK	1@1	23.01	23.87	23.21	
10	DFT_QPSK	1@22	23.31	23.10	23.35	
10	DFT_QAM16	12@6	22.33	22.36	22.13	23
10	DFT_QAM16	1@1	22.10	22.19	22.30	
10	DFT_QAM16	1@22	22.13	22.31	22.04	
10	DFT_QAM64	12@6	21.45	21.02	21.18	22
10	DFT_QAM64	1@1	21.42	21.36	21.23	
10	DFT_QAM64	1@22	21.39	21.01	21.21	
10	DFT_QAM256	12@6	19.18	19.26	19.08	20
10	DFT_QAM256	1@1	19.18	19.07	19.06	
10	DFT_QAM256	1@22	19.08	19.35	19.19	
10	CP_QPSK	12@6	21.23	21.01	21.20	22
10	CP_QPSK	1@1	21.23	21.45	21.08	
10	CP_QPSK	1@22	21.17	21.17	21.32	
10	CP_QAM16	12@6	21.36	21.40	21.28	22
10	CP_QAM16	1@1	21.05	21.39	21.28	
10	CP_QAM16	1@22	21.07	21.29	21.30	
10	CP_QAM64	12@6	19.18	19.42	19.38	20
10	CP_QAM64	1@1	19.18	19.40	19.37	
10	CP_QAM64	1@22	19.01	19.38	19.16	
10	CP_QAM256	12@6	17.10	17.10	17.08	18
10	CP_QAM256	1@1	17.18	17.34	17.31	
10	CP_QAM256	1@22	17.19	17.20	17.15	

<WLAN 2.4GHz Conducted Power>

Ant1

Mode	Channel	Frequency (MHz)	Conducted Peak Output Power(dBm)	Conducted Average Output Power(dBm)	Tune-up limit (dBm)
802.11b	1	2412	15.15	13.63	14.0
	6	2437	16.22	14.60	15.0
	11	2462	14.99	13.39	14.0
802.11g	1	2412	15.96	12.59	13.0
	6	2437	15.70	12.13	13.0
	11	2462	16.05	12.57	13.0
802.11n(HT20)	1	2412	15.73	11.84	12.0
	6	2437	15.41	11.73	12.0
	11	2462	15.61	11.98	12.0
802.11n(HT40)	3	2412	15.56	11.96	12.0
	6	2437	15.98	12.00	13.0
	9	2462	16.40	12.52	13.0
802.11ax(HE20)	1	2412	17.10	13.09	14.0
	6	2437	16.98	12.11	13.0
	11	2462	17.82	13.10	14.0
802.11ax(HE40)	3	2412	16.71	12.12	13.0
	6	2437	17.17	12.49	13.0
	9	2462	17.28	12.64	13.0

Ant2

Mode	Channel	Frequency (MHz)	Conducted Peak Output Power(dBm)	Conducted Average Output Power(dBm)	Tune-up limit (dBm)
802.11b	1	2412	14.57	13.06	14.0
	6	2437	11.64	10.11	11.0
	11	2462	14.20	12.61	13.0
802.11g	1	2412	14.41	10.95	11.0
	6	2437	13.98	10.48	11.0
	11	2462	14.18	10.77	11.0
802.11n(HT20)	1	2412	14.65	10.81	11.0
	6	2437	14.42	10.73	11.0
	11	2462	14.29	10.66	11.0
802.11n(HT40)	3	2412	15.02	11.41	12.0
	6	2437	14.75	10.75	11.0
	9	2462	14.64	10.80	11.0
802.11ax(HE20)	1	2412	15.20	11.18	12.0
	6	2437	15.43	10.54	11.0
	11	2462	14.92	10.20	11.0
802.11ax(HE40)	3	2412	15.73	11.13	12.0
	6	2437	15.74	11.11	12.0
	9	2462	15.62	10.93	11.0

<WLAN 5.2GHz Conducted Power>

Ant1

Type	Channel	Frequency (MHz)	Conducted Average Output Power(dBm)	Tune-up limit (dBm)
802.11a	36	5180	14.84	15.0
	40	5200	17.87	18.0
	48	5240	14.78	15.0
802.11n(HT20)	36	5180	16.95	17.0
	40	5200	16.88	17.0
	48	5240	12.68	13.0
802.11n(HT40)	38	5190	15.96	16.0
	46	5230	16.14	17.0
802.11ac(HT20)	36	5180	16.84	17.0
	40	5200	17.39	18.0
	48	5240	17.15	18.0
802.11ac(HT40)	38	5190	15.54	16.0
	46	5230	15.65	16.0
802.11ac(HT80)	42	5210	15.37	16.0
802.11ax(HE20)	36	5180	17.22	18.0
	40	5200	16.96	17.0
	48	5240	17.64	18.0
802.11ax(HE40)	38	5190	16.38	17.0
	46	5230	15.97	16.0
802.11ax(HE80)	42	5210	16.30	17.0

Ant2

Type	Channel	Frequency (MHz)	Conducted Average Output Power(dBm)	Tune-up limit (dBm)
802.11a	36	5180	10.30	11.0
	40	5200	12.50	13.0
	48	5240	9.53	10.0
802.11n(HT20)	36	5180	11.77	12.0
	40	5200	11.12	12.0
	48	5240	7.42	8.0
802.11n(HT40)	38	5190	10.71	11.0
	46	5230	10.24	11.0
802.11ac(HT20)	36	5180	11.50	12.0
	40	5200	11.69	12.0
	48	5240	11.65	12.0
802.11ac(HT40)	38	5190	10.90	11.0
	46	5230	10.27	11.0
802.11ac(HT80)	42	5210	10.64	11.0
802.11ax(HE20)	36	5180	12.09	13.0
	40	5200	11.80	12.0
	48	5240	11.86	12.0
802.11ax(HE40)	38	5190	10.88	11.0
	46	5230	10.84	11.0
802.11ax(HE80)	42	5210	10.68	11.0

<WLAN 5.8GHz Conducted Power>

Ant1

Type	Channel	Frequency (MHz)	Conducted Average Output Power(dBm)	Tune-up limit (dBm)
802.11a	149	5745	15.76	16.0
	157	5785	15.41	16.0
	165	5825	14.59	15.0
802.11n(HT20)	149	5745	15.99	16.0
	157	5785	16.68	17.0
	165	5825	15.75	16.0
802.11n(HT40)	151	5755	15.64	16.0
	159	5795	15.55	16.0
802.11ac(HT20)	149	5745	16.12	17.0
	157	5785	16.37	17.0
	165	5825	15.62	16.0
802.11ac(HT40)	151	5755	15.74	16.0
	159	5795	15.89	16.0
802.11ac(HT80)	155	5775	15.38	16.0
802.11ax(HE20)	149	5745	16.65	17.0
	157	5785	16.95	17.0
	165	5825	16.26	17.0
802.11ax(HE40)	151	5755	15.83	16.0
	159	5795	15.49	16.0
802.11ax(HE80)	155	5775	15.91	16.0


Ant2

Type	Channel	Frequency (MHz)	Conducted Average Output Power(dBm)	Tune-up limit (dBm)
802.11a	149	5745	8.15	9.0
	157	5785	8.78	9.0
	165	5825	8.14	9.0
802.11n(HT20)	149	5745	10.46	11.0
	157	5785	10.92	11.0
	165	5825	9.26	10.0
802.11n(HT40)	151	5755	9.91	10.0
	159	5795	10.17	11.0
802.11ac(HT20)	149	5745	10.87	11.0
	157	5785	10.88	11.0
	165	5825	9.45	10.0
802.11ac(HT40)	151	5755	10.31	11.0
	159	5795	9.97	10.0
802.11ac(HT80)	155	5775	9.72	10.0
802.11ax(HE20)	149	5745	11.23	12.0
	157	5785	11.27	12.0
	165	5825	9.79	10.0
802.11ax(HE40)	151	5755	10.54	11.0
	159	5795	10.06	11.0
802.11ax(HE80)	155	5775	10.14	11.0

<Bluetooth Conducted Power>

Mode	Channel	Frequency (MHz)	Conducted Peak Output Power(dBm)	Tune-up limit (dBm)
GFSK	0	2402	2.36	3.0
	39	2441	2.48	3.0
	78	2480	1.77	2.0
$\pi/4$ DQPSK	0	2402	1.93	2.0
	39	2441	2.04	3.0
	78	2480	1.60	2.0
8DPSK	0	2402	2.52	3.0
	39	2441	2.60	3.0
	78	2480	1.91	2.0
BLE 1M	0	2402	2.36	3.0
	19	2440	2.48	3.0
	39	2480	1.77	2.0

10.2 Transmit Antennas and SAR Measurement Position

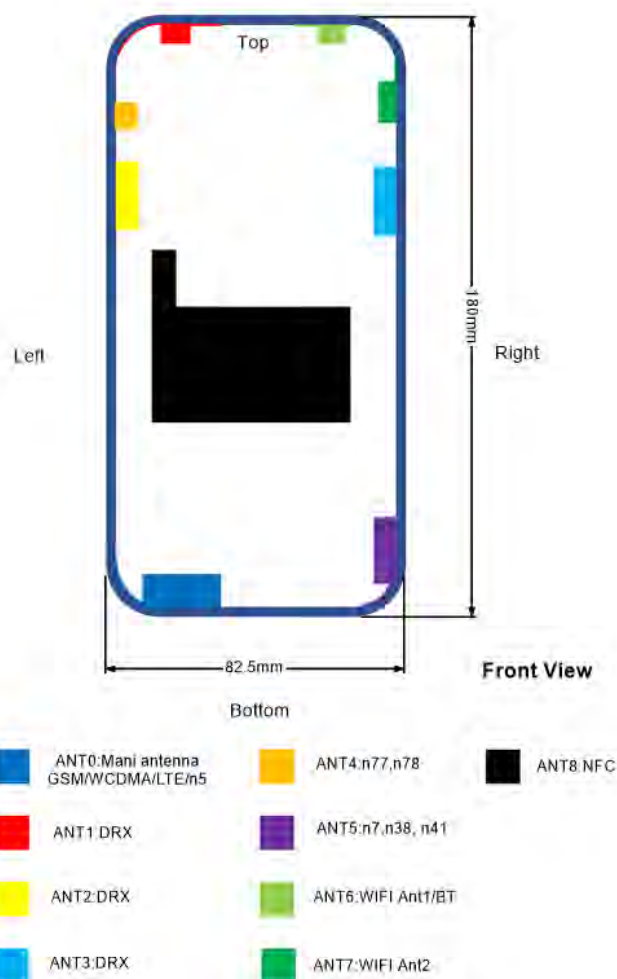

Distance of The Antenna to the EUT surface and edge						
Antennas	Front	Back	Top Side	Bottom Side	Left Side	Right Side
ANT0	<25mm	<25mm	160mm	<25mm	<25mm	45mm
ANT4	<25mm	<25mm	<25mm	155mm	<25mm	70mm
ANT5	<25mm	<25mm	155mm	<25mm	70mm	<25mm
ANT6	<25mm	<25mm	<25mm	165mm	50mm	<25mm
ANT7	<25mm	<25mm	<25mm	155mm	70mm	<25mm

Positions for SAR tests; Hotspot mode						
Antennas	Front	Back	Top Side	Bottom Side	Left Side	Right Side
ANT0	Yes	Yes	No	Yes	Yes	No
ANT4	Yes	Yes	Yes	No	Yes	No
ANT5	Yes	Yes	No	Yes	No	Yes
ANT6	Yes	Yes	Yes	No	No	Yes
ANT7	Yes	Yes	Yes	No	No	Yes

Note: 1). According to the KDB941225 D06 Hot Spot SAR v02, the edges with less than 2.5 cm distance to the antennas need to be tested for SAR.

10.3 SAR Test Exclusion and Estimated SAR

SAR Test Exclusion Considerations

Per KDB 447498 D01v06, the 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$[(\text{max. power of channel, including tune-up tolerance, mW})/(\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$ for 1-g SAR and ≤ 7.5 for 10-g extremity SAR

- $f(\text{GHz})$ is the RF channel transmit frequency in GHz.
- Power and distance are rounded to the nearest mW and mm before calculation.
- The result is rounded to one decimal place for comparison.

Per KDB 447498 D01v06, at 100 MHz to 6 GHz and for test separation distances > 50 mm, the SAR test exclusion threshold is determined according to the following:

- $[\text{Threshold at 50mm}) + (\text{test separation distance} - 50\text{mm}) \cdot (f(\text{MHz})/150)]\text{mW}$, at 100MHz to 1500MHz
- $[\text{Threshold at 50mm}) + (\text{test separation distance} - 50\text{mm}) \cdot 10]\text{mW}$ at $> 1500\text{MHz}$ and $\leq 6\text{GHz}$

Per KDB 447498 D01v06, At frequencies below 100 MHz, the following may be considered for SAR test exclusion.

- The power threshold at the corresponding test separation distance at 100 MHz in step 2) is multiplied by $[1 + \log(100/f(\text{MHz}))]$ for test separation distances > 50 mm and < 200 mm
- The power threshold determined by the equation in a) for 50 mm and 100 MHz is multiplied by $\frac{1}{2}$ for test separation distances ≤ 50 mm

Estimated SAR

Per KDB447498 requires when the standalone SAR test exclusion of section 4.3.1 is applied to an antenna that transmits simultaneously with other antennas, the standalone SAR must be estimated according to the following to determine simultaneous transmission SAR test exclusion;

- $(\text{max. power of channel, including tune-up tolerance, mW})/(\text{min. test separation distance, mm}) \cdot [\sqrt{f(\text{GHz})/x}] \text{ W/kg}$ for test separation distances ≤ 50 mm;

where $x = 7.5$ for 1-g SAR, and $x = 18.75$ for 10-g SAR.

- 0.4 W/kg for 1-g SAR and 1.0 W/kg for 10-g SAR, when the test separation distances is > 50 mm

The below table, exemption limits for routine evaluation based on frequency and separation distance was according to SAR-based Exemption – §1.1307(b)(3)(i)(B).

For BT

Standalone SAR Test Exclusion and Estimated SAR									
Wireless Interface	Frequency (MHz)	Configuration	Max. Power With tune-up		Distance (mm)	Calculation Result	SAR Exclusion Thresholds	Standalone SAR Exclusion	Estimated SAR (W/Kg)
			dBm	mW					
Bluetooth	2450	Head	3	1.995	5	0.6	3	Yes	0.083
Bluetooth	2450	Body& Hotspot	3	1.995	10	0.3	3	Yes	0.042

Remark:

- Maximum average power including tune-up tolerance;
- When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test exclusion
- when the distance is < 50 mm exclusion threshold is "Ratio", when the distance is > 50 mm exclusion

threshold is "mW".

For NFC

Standalone SAR Test Exclusion and Estimated SAR							
Mode	Frequency (MHz)	Field Strength (dBuV/m@3m)	Max Output Power(dBm)	Max Output Power(mW)	Threshold Value (mW)	Standalone SAR Exclusion	Estimated SAR (W/Kg)
NFC	13.56	63.53	-31.70	0.0007	443	Yes	0

10.4 SAR Test Results Summary

General Note:

- 1 Per KDB 447498 D01v06, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.
 - a) Tune-up scaling Factor = tune-up limit power (mW) / EUT RF power (mW), where tune-up limit is the maximum rated power among all production units.
 - b) For SAR testing of WLAN signal with non-100% duty cycle, the measured SAR is scaled-up by the duty cycle scaling factor which is equal to "1/(duty cycle)"
 - c) For WLAN/Bluetooth: Reported SAR(W/kg)= Measured SAR(W/kg)* Duty Cycle scaling factor * Tune-up scaling factor
- 2 Per KDB 447498 D01v06, for each exposure position, testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
 - ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
 - ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz
- 3 Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is ≥ 0.8 W/kg.

SAR Results

<Head SAR>

SAR Values GSM

Plot No.	Mode	Test Position	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR _{1g} (W/kg)	Reported SAR _{1g} (W/kg)
GSM 850										
	GSM Voice	Left Cheek	190	836.6	33.16	34.00	1.213	0.09	0.295	0.358
	GSM Voice	Left Tilt	190	836.6	33.16	34.00	1.213	-0.08	0.223	0.271
#1	GSM Voice	Right Cheek	190	836.6	33.16	34.00	1.213	0.03	0.302	0.366
	GSM Voice	Right Tilt	190	836.6	33.16	34.00	1.213	0.03	0.249	0.302
	GSM Voice	Left Cheek	512	1850.2	30.64	31.00	1.086	-0.13	0.153	0.166
	GSM Voice	Left Tilt	512	1850.2	30.64	31.00	1.086	-0.13	0.080	0.087
#2	GSM Voice	Right Cheek	512	1850.2	30.64	31.00	1.086	-0.07	0.165	0.179
	GSM Voice	Right Tilt	512	1850.2	30.64	31.00	1.086	-0.10	0.103	0.112

SAR Values for WCDMA

Plot No.	Mode	Test Position	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR _{1g} (W/kg)	Reported SAR _{1g} (W/kg)
WCDMA Band II										
	RMC 12.2Kbps	Left Cheek	9538	1907.6	24.04	24.50	1.112	-0.08	0.146	0.162
	RMC 12.2Kbps	Left Tilt	9538	1907.6	24.04	24.50	1.112	-0.02	0.076	0.084
#3	RMC 12.2Kbps	Right Cheek	9538	1907.6	24.04	24.50	1.112	-0.03	0.161	0.179
	RMC 12.2Kbps	Right Tilt	9538	1907.6	24.04	24.50	1.112	-0.02	0.105	0.117
WCDMA Band IV										
	RMC 12.2Kbps	Left Cheek	1513	1752.6	23.56	24.00	1.107	-0.06	0.165	0.183
	RMC 12.2Kbps	Left Tilt	1513	1752.6	23.56	24.00	1.107	0.12	0.093	0.103
#4	RMC 12.2Kbps	Right Cheek	1513	1752.6	23.56	24.00	1.107	0.03	0.178	0.197
	RMC 12.2Kbps	Right Tilt	1513	1752.6	23.56	24.00	1.107	0.10	0.118	0.131
WCDMA Band V										
	RMC 12.2Kbps	Left Cheek	4233	846.6	24.14	24.50	1.086	-0.09	0.175	0.190
	RMC 12.2Kbps	Left Tilt	4233	846.6	24.14	24.50	1.086	0.04	0.113	0.123
#5	RMC 12.2Kbps	Right Cheek	4233	846.6	24.14	24.50	1.086	0.07	0.193	0.210
	RMC 12.2Kbps	Right Tilt	4233	846.6	24.14	24.50	1.086	-0.02	0.133	0.144

SAR Values for LTE

Plot No.	Mode	Test Position	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR _{1g} (W/kg)	Reported SAR _{1g} (W/kg)
LTE Band 2										
	20MHz/1RB#49	Left Cheek	19100	1900	23.83	24	1.040	-0.11	0.289	0.301
	20MHz/1RB#49	Left Tilt	19100	1900	23.83	24	1.040	0.05	0.219	0.228
#6	20MHz/1RB#49	Right Cheek	19100	1900	23.83	24	1.040	-0.07	0.305	0.317
	20MHz/1RB#49	Right Tilt	19100	1900	23.83	24	1.040	-0.03	0.249	0.259
	20MHz/50RB#0	Left Cheek	20600	844	22.40	23	1.148	-0.09	0.269	0.309
	20MHz/50RB#0	Left Tilt	20600	844	22.40	23	1.148	-0.05	0.190	0.218
	20MHz/50RB#0	Right Cheek	20600	844	22.40	23	1.148	-0.05	0.277	0.318
	20MHz/50RB#0	Right Tilt	20600	844	22.40	23	1.148	0.03	0.213	0.245
LTE Band 4										
	20MHz/1RB#0	Left Cheek	20175	1747.5	23.91	24	1.021	-0.08	0.301	0.307
	20MHz/1RB#0	Left Tilt	20175	1747.5	23.91	24	1.021	0.02	0.222	0.227
#7	20MHz/1RB#0	Right Cheek	20175	1747.5	23.91	24	1.021	-0.04	0.311	0.318
	20MHz/1RB#0	Right Tilt	20175	1747.5	23.91	24	1.021	0.11	0.248	0.253
	20MHz/50RB#24	Left Cheek	20300	1775	22.45	23	1.135	-0.09	0.284	0.322
	20MHz/50RB#24	Left Tilt	20300	1775	22.45	23	1.135	-0.08	0.213	0.242
	20MHz/50RB#24	Right Cheek	20300	1775	22.45	23	1.135	-0.10	0.294	0.334
	20MHz/50RB#24	Right Tilt	20300	1775	22.45	23	1.135	0.09	0.239	0.271
LTE Band 5										
	10MHz/1RB#0	Left Cheek	20450	829	23.83	24	1.040	-0.02	0.370	0.385
	10MHz/1RB#0	Left Tilt	20450	829	23.83	24	1.040	0.01	0.290	0.302
#8	10MHz/1RB#0	Right Cheek	20450	829	23.83	24	1.040	-0.05	0.378	0.393
	10MHz/1RB#0	Right Tilt	20450	829	23.83	24	1.040	-0.13	0.317	0.330
	10MHz/25RB#25	Left Cheek	20600	844	22.45	23	1.135	-0.12	0.350	0.397
	10MHz/25RB#25	Left Tilt	20600	844	22.45	23	1.135	0.12	0.283	0.321
	10MHz/25RB#25	Right Cheek	20600	844	22.45	23	1.135	0.11	0.362	0.411
	10MHz/25RB#25	Right Tilt	20600	844	22.45	23	1.135	0.07	0.307	0.348
LTE Band 7										
#9	20MHz/1RB#99	Left Cheek	20850	2510	23.85	24	1.035	-0.03	0.401	0.415
	20MHz/1RB#99	Left Tilt	20850	2510	23.85	24	1.035	0.01	0.346	0.358
	20MHz/1RB#99	Right Cheek	20850	2510	23.85	24	1.035	0.12	0.396	0.410
	20MHz/1RB#99	Right Tilt	20850	2510	23.85	24	1.035	0.05	0.322	0.333
	20MHz/50RB#50	Left Cheek	20850	2510	22.35	23	1.161	-0.10	0.365	0.424
	20MHz/50RB#50	Left Tilt	20850	2510	22.35	23	1.161	0.10	0.283	0.329
	20MHz/50RB#50	Right Cheek	20850	2510	22.35	23	1.161	0.13	0.360	0.418
	20MHz/50RB#50	Right Tilt	20850	2510	22.35	23	1.161	-0.01	0.274	0.318

LTE Band 12										
	10MHz/1RB#25	Left Cheek	23130	711	23.86	24	1.033	-0.04	0.294	0.304
	10MHz/1RB#25	Left Tilt	23130	711	23.86	24	1.033	0.09	0.219	0.226
#10	10MHz/1RB#25	Right Cheek	23130	711	23.86	24	1.033	0.10	0.302	0.312
	10MHz/1RB#25	Right Tilt	23130	711	23.86	24	1.033	0.03	0.239	0.247
	10MHz/25RB#0	Left Cheek	23095	707.5	22.43	23	1.140	-0.01	0.255	0.291
	10MHz/25RB#0	Left Tilt	23095	707.5	22.43	23	1.140	-0.13	0.180	0.205
	10MHz/25RB#0	Right Cheek	23095	707.5	22.43	23	1.140	0.03	0.269	0.307
	10MHz/25RB#0	Right Tilt	23095	707.5	22.43	23	1.140	-0.06	0.210	0.239
LTE Band 41										
#11	20MHz/1RB#49	Left Cheek	40140	2545	23.77	24	1.054	-0.11	0.314	0.331
	20MHz/1RB#49	Left Tilt	40140	2545	23.77	24	1.054	-0.06	0.243	0.256
	20MHz/1RB#49	Right Cheek	40140	2545	23.77	24	1.054	0.11	0.311	0.328
	20MHz/1RB#49	Right Tilt	40140	2545	23.77	24	1.054	-0.04	0.233	0.246
	20MHz/50RB#24	Left Cheek	40140	2545	22.43	23	1.140	0.01	0.253	0.288
	20MHz/50RB#24	Left Tilt	40140	2545	22.43	23	1.140	-0.10	0.184	0.210
	20MHz/50RB#24	Right Cheek	40140	2545	22.43	23	1.140	-0.05	0.252	0.287
	20MHz/50RB#24	Right Tilt	40140	2545	22.43	23	1.140	0.11	0.178	0.203

Note: LTE band 17 was covered by LTE band 12, according to April 2015 TCB workshop, SAR test for overlapping LTE bands can be reduced if a. the maximum output power, including tolerance, for the smaller band is $\leq$ the larger band to qualify for the SAR test exclusion

b. the channel bandwidth and other operating parameters for the smaller band are fully supported by the larger band.

Plot No.	Mode	Test Position	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR _{1g} (W/kg)	Reported SAR _{1g} (W/kg)
5G NR Band n5										
	20MHz/1RB#1	Left Cheek	167300	836.5	23.96	24.0	1.009	0.02	0.540	0.545
	20MHz/1RB#1	Left Tilt	167300	836.5	23.96	24.0	1.009	0.06	0.464	0.468
#12	20MHz/1RB#1	Right Cheek	167300	836.5	23.96	24.0	1.009	-0.03	0.548	0.553
	20MHz/1RB#1	Right Tilt	167300	836.5	23.96	24.0	1.009	-0.13	0.487	0.492
	20MHz/25RB#12	Left Cheek	166800	834.0	23.78	24.0	1.052	0.10	0.466	0.490
	20MHz/25RB#12	Left Tilt	166800	834.0	23.78	24.0	1.052	0.10	0.392	0.412
	20MHz/25RB#12	Right Cheek	166800	834.0	23.78	24.0	1.052	-0.03	0.473	0.498
	20MHz/25RB#12	Right Tilt	166800	834.0	23.78	24.0	1.052	-0.03	0.411	0.432
5G NR Band n7										
	20MHz/1RB#49	Left Cheek	502000	2510	23.97	24.0	1.007	-0.07	0.394	0.397
	20MHz/1RB#49	Left Tilt	502000	2510	23.97	24.0	1.007	0.01	0.320	0.322
#13	20MHz/1RB#49	Right Cheek	502000	2510	23.97	24.0	1.007	-0.11	0.402	0.405
	20MHz/1RB#49	Right Tilt	502000	2510	23.97	24.0	1.007	0.09	0.341	0.343
	20MHz/50RB#25	Left Cheek	512000	2560	23.84	24.0	1.038	0.02	0.366	0.380
	20MHz/50RB#25	Left Tilt	512000	2560	23.84	24.0	1.038	0.08	0.297	0.308
	20MHz/50RB#25	Right Cheek	512000	2560	23.84	24.0	1.038	0.04	0.378	0.392
	20MHz/50RB#25	Right Tilt	512000	2560	23.84	24.0	1.038	0.11	0.323	0.335
5G NR Band n41										
#14	100MHz/1RB#1	Left Cheek	509202	2546.01	23.89	24.0	1.026	0.13	0.305	0.313
	100MHz/1RB#1	Left Tilt	509202	2546.01	23.89	24.0	1.026	0.01	0.249	0.255
	100MHz/1RB#1	Right Cheek	509202	2546.01	23.89	24.0	1.026	-0.09	0.298	0.306
	100MHz/1RB#1	Right Tilt	509202	2546.01	23.89	24.0	1.026	0.07	0.234	0.240
	100MHz/135RB#67	Left Cheek	528000	2640	23.81	24.0	1.045	0.13	0.257	0.268
	100MHz/135RB#67	Left Tilt	528000	2640	23.81	24.0	1.045	0.02	0.203	0.212
	100MHz/135RB#67	Right Cheek	528000	2640	23.81	24.0	1.045	-0.12	0.252	0.263
	100MHz/135RB#67	Right Tilt	528000	2640	23.81	24.0	1.045	0.12	0.187	0.195
5G NR Band n77 L										
#15	100MHz/1RB#217	Left Cheek	633334	3500.01	23.92	24.0	1.019	-0.08	0.312	0.318
	100MHz/1RB#217	Left Tilt	633334	3500.01	23.92	24.0	1.019	0.11	0.238	0.242
	100MHz/1RB#217	Right Cheek	633334	3500.01	23.92	24.0	1.019	-0.11	0.303	0.309
	100MHz/1RB#217	Right Tilt	633334	3500.01	23.92	24.0	1.019	0.03	0.225	0.229
	100MHz/135RB#67	Left Cheek	633334	3500.01	23.62	24.0	1.091	0.05	0.242	0.264
	100MHz/135RB#67	Left Tilt	633334	3500.01	23.62	24.0	1.091	0.01	0.154	0.168
	100MHz/135RB#67	Right Cheek	633334	3500.01	23.62	24.0	1.091	-0.07	0.241	0.263
	100MHz/135RB#67	Right Tilt	633334	3500.01	23.62	24.0	1.091	-0.06	0.182	0.199

5G NR Band n77 H										
#16	100MHz/1RB#1	Left Cheek	656000	3840	23.98	24.0	1.005	-0.05	0.345	0.347
	100MHz/1RB#1	Left Tilt	656000	3840	23.98	24.0	1.005	-0.05	0.287	0.288
	100MHz/1RB#1	Right Cheek	656000	3840	23.98	24.0	1.005	0.12	0.343	0.345
	100MHz/1RB#1	Right Tilt	656000	3840	23.98	24.0	1.005	0.01	0.255	0.256
	100MHz/135RB#67	Left Cheek	650000	3840	23.74	24.0	1.062	-0.05	0.266	0.282
	100MHz/135RB#67	Left Tilt	650000	3840	23.74	24.0	1.062	-0.07	0.192	0.204
	100MHz/135RB#67	Right Cheek	650000	3840	23.74	24.0	1.062	-0.09	0.262	0.278
	100MHz/135RB#67	Right Tilt	650000	3840	23.74	24.0	1.062	-0.13	0.286	0.304

Note: Band n38, Band n78 was covered by Band n41, Band n77, according to April 2015 TCB workshop, SAR test for overlapping LTE bands can be reduced if a. the maximum output power, including tolerance, for the smaller band is $\leq$ the larger band to qualify for the SAR test exclusion

b. the channel bandwidth and other operating parameters for the smaller band are fully supported by the larger band.

SAR Values for WIFI 2.4G

Plot No.	Mode	Test Position	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR _{1g} (W/kg)	Reported SAR _{1g} (W/kg)
ANT0										
#17	802.11b	Left Cheek	06	2437	14.60	15.0	1.096	0.05	0.295	0.323
	802.11b	Left Tilt	06	2437	14.60	15.0	1.096	-0.13	0.285	0.312
	802.11b	Right Cheek	06	2437	14.60	15.0	1.096	0.05	0.291	0.319
	802.11b	Right Tilt	06	2437	14.60	15.0	1.096	0.13	0.277	0.304
ANT1										
	802.11b	Left Cheek	01	2412	13.06	14.0	1.242	-0.13	0.239	0.297
	802.11b	Left Tilt	01	2412	13.06	14.0	1.242	-0.01	0.221	0.274
	802.11b	Right Cheek	01	2412	13.06	14.0	1.242	0.04	0.235	0.292
	802.11b	Right Tilt	01	2412	13.06	14.0	1.242	0.11	0.219	0.272

Note: Per KDB 248227 D01v02r02, for 2.4GHz 802.11g/n SAR testing is not required when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is $\leq$ 1.2 W/kg.

SAR Values for WIFI 5G

Plot No.	Mode	Test Position	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR _{1g} (W/kg)	Reported SAR _{1g} (W/kg)
WIFI 5.2G ANT0										
#18	802.11a	Left Cheek	40	5200	17.87	18.0	1.030	-0.07	0.241	0.248
	802.11a	Left Tilt	40	5200	17.87	18.0	1.030	-0.04	0.223	0.230
	802.11a	Right Cheek	40	5200	17.87	18.0	1.030	-0.05	0.226	0.233
	802.11a	Right Tilt	40	5200	17.87	18.0	1.030	-0.04	0.223	0.230
WIFI 5.2G ANT1										
	802.11a	Left Cheek	40	5200	12.50	13.0	1.122	-0.08	0.142	0.159
	802.11a	Left Tilt	40	5200	12.50	13.0	1.122	-0.12	0.131	0.147
	802.11a	Right Cheek	40	5200	12.50	13.0	1.122	0.11	0.127	0.142
	802.11a	Right Tilt	40	5200	12.50	13.0	1.122	0.08	0.121	0.136
WIFI 5.8G ANT 0										
#19	802.11ax(HE20)	Left Cheek	157	5785	16.95	17.0	1.012	0.09	0.274	0.277
	802.11ax(HE20)	Left Tilt	157	5785	16.95	17.0	1.012	0.06	0.258	0.261
	802.11ax(HE20)	Right Cheek	157	5785	16.95	17.0	1.012	-0.01	0.270	0.273
	802.11ax(HE20)	Right Tilt	157	5785	16.95	17.0	1.012	0.10	0.255	0.258
WIFI 5.8G ANT 1										
	802.11ax(HE20)	Left Cheek	157	5785	11.27	12.0	1.183	0.04	0.114	0.135
	802.11ax(HE20)	Left Tilt	157	5785	11.27	12.0	1.183	0.07	0.101	0.119
	802.11ax(HE20)	Right Cheek	157	5785	11.27	12.0	1.183	-0.03	0.107	0.127
	802.11ax(HE20)	Right Tilt	157	5785	11.27	12.0	1.183	-0.11	0.094	0.111

<Body & Hotspot SAR>

SAR Values [GSM 850]

Plot No.	Mode	Test Position	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR _{1g} (W/kg)	Reported SAR _{1g} (W/kg)
Measured / Reported SAR numbers-Body& hotspot open distance 10mm										
	GPRS 4Tx slots	Front Side	190	836.6	29.44	30.00	1.138	0.07	0.159	0.181
#20	GPRS 4Tx slots	Back Side	190	836.6	29.44	30.00	1.138	0.15	0.201	0.229
	GPRS 4Tx slots	Left Edge	190	836.6	29.44	30.00	1.138	0.05	0.195	0.222
	GPRS 4Tx slots	Bottom Edge	190	836.6	29.44	30.00	1.138	0.05	0.198	0.225
	EGPRS 2Tx slots	Back Side	128	824.2	24.95	25.00	1.012	0.09	0.155	0.157

SAR Values [PCS 1900]

Plot No.	Mode	Test Position	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR _{1g} (W/kg)	Reported SAR _{1g} (W/kg)
Measured / Reported SAR numbers-Body& hotspot open distance 10mm										
	GPRS 2Tx slots	Front Side	512	1850.2	29.70	30.00	1.072	-0.11	0.152	0.163
#21	GPRS 2Tx slots	Back Side	512	1850.2	29.70	30.00	1.072	0.08	0.198	0.212
	GPRS 2Tx slots	Left Edge	512	1850.2	29.70	30.00	1.072	0.09	0.187	0.200
	GPRS 2Tx slots	Bottom Edge	512	1850.2	29.70	30.00	1.072	-0.04	0.189	0.203
	EGPRS 2Tx slots	Back Side	512	1850.2	24.70	25.00	1.072	-0.10	0.146	0.156

SAR Values [WCDMA II]

Plot No.	Mode	Test Position	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR _{1g} (W/kg)	Reported SAR _{1g} (W/kg)
Measured / Reported SAR numbers-Body& hotspot open distance 10mm										
	RMC 12.2Kbps	Front Side	9538	1907.6	24.04	24.50	1.112	-0.08	0.108	0.120
#22	RMC 12.2Kbps	Back Side	9538	1907.6	24.04	24.50	1.112	-0.11	0.159	0.177
	RMC 12.2Kbps	Left Edge	9538	1907.6	24.04	24.50	1.112	-0.05	0.147	0.163
	RMC 12.2Kbps	Bottom Edge	9538	1907.6	24.04	24.50	1.112	-0.03	0.148	0.165

SAR Values [WCDMA IV]

Plot No.	Mode	Test Position	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR _{1g} (W/kg)	Reported SAR _{1g} (W/kg)
Measured / Reported SAR numbers-Body& hotspot open distance 10mm										
	RMC 12.2Kbps	Front Side	1513	1752.6	23.56	24.00	1.107	-0.01	0.095	0.105
#23	RMC 12.2Kbps	Back Side	1513	1752.6	23.56	24.00	1.107	0.07	0.147	0.163
	RMC 12.2Kbps	Left Edge	1513	1752.6	23.56	24.00	1.107	0.13	0.138	0.153
	RMC 12.2Kbps	Bottom Edge	1513	1752.6	23.56	24.00	1.107	0.02	0.135	0.149

SAR Values [WCDMA V]

Plot No.	Mode	Test Position	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR _{1g} (W/kg)	Reported SAR _{1g} (W/kg)
Measured / Reported SAR numbers-Body& hotspot open distance 10mm										
	RMC 12.2Kbps	Front Side	4233	846.6	24.14	24.50	1.086	0.12	0.079	0.086
#24	RMC 12.2Kbps	Back Side	4233	846.6	24.14	24.50	1.086	-0.03	0.125	0.136
	RMC 12.2Kbps	Left Edge	4233	846.6	24.14	24.50	1.086	-0.01	0.113	0.123
	RMC 12.2Kbps	Bottom Edge	4233	846.6	24.14	24.50	1.086	0.01	0.114	0.124

SAR Values [LTE Band 2]

Plot No.	Mode	Test Position	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR _{1g} (W/kg)	Reported SAR _{1g} (W/kg)
Measured / Reported SAR numbers-Body& hotspot open distance 10mm										
	20MHz/1RB#49	Front Side	19100	1900	23.83	24	1.040	0.07	0.110	0.114
#25	20MHz/1RB#49	Back Side	19100	1900	23.83	24	1.040	0.09	0.162	0.168
	20MHz/1RB#49	Left Edge	19100	1900	23.83	24	1.040	-0.01	0.152	0.158
	20MHz/1RB#49	Bottom Edge	19100	1900	23.83	24	1.040	-0.09	0.159	0.165
	20MHz/50RB#0	Front Side	20600	844	22.40	23	1.148	0.01	0.098	0.113
	20MHz/50RB#0	Back Side	20600	844	22.40	23	1.148	0.06	0.149	0.171
	20MHz/50RB#0	Left Edge	20600	844	22.40	23	1.148	-0.11	0.136	0.156
	20MHz/50RB#0	Bottom Edge	20600	844	22.40	23	1.148	-0.06	0.144	0.165

SAR Values [LTE Band 4]

Plot No.	Mode	Test Position	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR _{1g} (W/kg)	Reported SAR _{1g} (W/kg)
Measured / Reported SAR numbers-Body& hotspot open distance 10mm										
	20MHz/1RB#0	Front Side	20175	1747.5	23.91	24	1.021	-0.02	0.125	0.128
#26	20MHz/1RB#0	Back Side	20175	1747.5	23.91	24	1.021	0.06	0.178	0.182
	20MHz/1RB#0	Left Edge	20175	1747.5	23.91	24	1.021	-0.04	0.164	0.167
	20MHz/1RB#0	Bottom Edge	20175	1747.5	23.91	24	1.021	-0.09	0.174	0.178
	20MHz/50RB#24	Front Side	20300	1775	22.45	23	1.135	0.08	0.111	0.126
	20MHz/50RB#24	Back Side	20300	1775	22.45	23	1.135	0.06	0.161	0.183
	20MHz/50RB#24	Left Edge	20300	1775	22.45	23	1.135	-0.08	0.144	0.163
	20MHz/50RB#24	Bottom Edge	20300	1775	22.45	23	1.135	-0.09	0.156	0.177

SAR Values [LTE Band 5]

Plot No.	Mode	Test Position	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR _{1g} (W/kg)	Reported SAR _{1g} (W/kg)
Measured / Reported SAR numbers-Body& hotspot open distance 10mm										
	10MHz/1RB#0	Front Side	20450	829	23.83	24	1.040	-0.03	0.290	0.302
#27	10MHz/1RB#0	Back Side	20450	829	23.83	24	1.040	0.03	0.342	0.356
	10MHz/1RB#0	Left Edge	20450	829	23.83	24	1.040	0.02	0.325	0.338
	10MHz/1RB#0	Bottom Edge	20450	829	23.83	24	1.040	0.00	0.339	0.353
	10MHz/25RB#25	Front Side	20600	844	22.45	23	1.135	-0.07	0.251	0.285
	10MHz/25RB#25	Back Side	20600	844	22.45	23	1.135	0.06	0.303	0.344
	10MHz/25RB#25	Left Edge	20600	844	22.45	23	1.135	0.04	0.287	0.326
	10MHz/25RB#25	Bottom Edge	20600	844	22.45	23	1.135	0.01	0.298	0.338

SAR Values [LTE Band 7]

Plot No.	Mode	Test Position	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR _{1g} (W/kg)	Reported SAR _{1g} (W/kg)
Measured / Reported SAR numbers-Body& hotspot open distance 10mm										
	20MHz/1RB#99	Front Side	20850	2510	23.85	24	1.035	-0.12	0.329	0.341
#28	20MHz/1RB#99	Back Side	20850	2510	23.85	24	1.035	-0.03	0.377	0.390
	20MHz/1RB#99	Left Edge	20850	2510	23.85	24	1.035	0.06	0.362	0.375
	20MHz/1RB#99	Bottom Edge	20850	2510	23.85	24	1.035	0.11	0.369	0.382
	20MHz/50RB#50	Front Side	20850	2510	22.35	23	1.161	0.08	0.261	0.303
	20MHz/50RB#50	Back Side	20850	2510	22.35	23	1.161	0.11	0.309	0.359
	20MHz/50RB#50	Left Edge	20850	2510	22.35	23	1.161	-0.10	0.298	0.346
	20MHz/50RB#50	Bottom Edge	20850	2510	22.35	23	1.161	0.02	0.299	0.347

SAR Values [LTE Band 12]

Plot No.	Mode	Test Position	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR _{1g} (W/kg)	Reported SAR _{1g} (W/kg)
Measured / Reported SAR numbers-Body& hotspot open distance 10mm										
	10MHz/1RB#25	Front Side	23130	711	23.86	24	1.079	0.03	0.223	0.213
#29	10MHz/1RB#25	Back Side	23130	711	23.86	24	1.079	-0.05	0.268	0.298
	10MHz/1RB#25	Left Edge	23130	711	23.86	24	1.079	0.10	0.256	0.186
	10MHz/1RB#25	Bottom Edge	23130	711	23.86	24	1.079	-0.10	0.254	0.282
	10MHz/25RB#0	Front Side	23095	707.5	22.43	23	1.109	0.10	0.179	0.205
	10MHz/25RB#0	Back Side	23095	707.5	22.43	23	1.109	-0.11	0.227	0.294
	10MHz/25RB#0	Left Edge	23095	707.5	22.43	23	1.109	-0.01	0.219	0.175
	10MHz/25RB#0	Bottom Edge	23095	707.5	22.43	23	1.109	-0.12	0.222	0.285

SAR Values [LTE Band 41]

Plot No.	Mode	Test Position	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR _{1g} (W/kg)	Reported SAR _{1g} (W/kg)
Measured / Reported SAR numbers-Body& hotspot open distance 10mm										
	20MHz/1RB#49	Front Side	40140	2545	23.77	24	1.054	-0.03	0.365	0.385
#30	20MHz/1RB#49	Back Side	40140	2545	23.77	24	1.054	0.06	0.411	0.433
	20MHz/1RB#49	Left Edge	40140	2545	23.77	24	1.054	-0.03	0.396	0.418
	20MHz/1RB#49	Bottom Edge	40140	2545	23.77	24	1.054	0.11	0.207	0.218
	20MHz/50RB#24	Front Side	40140	2545	22.43	23	1.140	-0.02	0.307	0.350
	20MHz/50RB#24	Back Side	40140	2545	22.43	23	1.140	-0.06	0.358	0.408
	20MHz/50RB#24	Left Edge	40140	2545	22.43	23	1.140	0.09	0.348	0.397
	20MHz/50RB#24	Bottom Edge	40140	2545	22.43	23	1.140	-0.13	0.344	0.392

SAR Values [5G NR Band n5]

Plot No.	Mode	Test Position	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR _{1g} (W/kg)	Reported SAR _{1g} (W/kg)
Measured / Reported SAR numbers-Body& hotspot open distance 10mm										
	20MHz/1RB#1	Front Side	167300	836.5	23.96	24.0	1.009	0.10	0.082	0.083
#31	20MHz/1RB#1	Back Side	167300	836.5	23.96	24.0	1.009	-0.03	0.135	0.136
	20MHz/1RB#1	Left Edge	167300	836.5	23.96	24.0	1.009	0.03	0.121	0.122
	20MHz/1RB#1	Bottom Edge	167300	836.5	23.96	24.0	1.009	0.07	0.125	0.126
	20MHz/25RB#12	Front Side	166800	834.0	23.78	24.0	1.052	-0.12	0.073	0.077
	20MHz/25RB#12	Back Side	166800	834.0	23.78	24.0	1.052	-0.03	0.119	0.125
	20MHz/25RB#12	Left Edge	166800	834.0	23.78	24.0	1.052	-0.04	0.109	0.115
	20MHz/25RB#12	Bottom Edge	166800	834.0	23.78	24.0	1.052	-0.13	0.116	0.122

SAR Values [5G NR Band n7]

Plot No.	Mode	Test Position	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR _{1g} (W/kg)	Reported SAR _{1g} (W/kg)
Measured / Reported SAR numbers-Body& hotspot open distance 10mm										
	20MHz/1RB#49	Front Side	502000	2510	23.97	24.0	1.007	0.03	0.370	0.373
#32	20MHz/1RB#49	Back Side	502000	2510	23.97	24.0	1.007	-0.11	0.412	0.415
	20MHz/1RB#49	Right Edge	502000	2510	23.97	24.0	1.007	-0.10	0.404	0.407
	20MHz/1RB#49	Bottom Edge	502000	2510	23.97	24.0	1.007	-0.12	0.408	0.411
	20MHz/50RB#25	Front Side	512000	2560	23.84	24.0	1.038	-0.06	0.327	0.339
	20MHz/50RB#25	Back Side	512000	2560	23.84	24.0	1.038	-0.08	0.377	0.391
	20MHz/50RB#25	Right Edge	512000	2560	23.84	24.0	1.038	-0.12	0.361	0.375
	20MHz/50RB#25	Bottom Edge	512000	2560	23.84	24.0	1.038	0.06	0.367	0.381

SAR Values [5G NR Band n41]

Plot No.	Mode	Test Position	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR _{1g} (W/kg)	Reported SAR _{1g} (W/kg)
Measured / Reported SAR numbers-Body& hotspot open distance 10mm										
	100MHz/1RB#1	Front Side	509202	2546.01	23.89	24.0	1.026	0.01	0.189	0.194
#33	100MHz/1RB#1	Back Side	509202	2546.01	23.89	24.0	1.026	0.09	0.241	0.247
	100MHz/1RB#1	Right Edge	509202	2546.01	23.89	24.0	1.026	0.09	0.231	0.237
	100MHz/1RB#1	Bottom Edge	509202	2546.01	23.89	24.0	1.026	-0.10	0.230	0.236
	100MHz/135RB#67	Front Side	528000	2640	23.81	24.0	1.045	0.13	0.148	0.155
	100MHz/135RB#67	Back Side	528000	2640	23.81	24.0	1.045	-0.10	0.228	0.238
	100MHz/135RB#67	Right Edge	528000	2640	23.81	24.0	1.045	0.08	0.130	0.136
	100MHz/135RB#67	Bottom Edge	528000	2640	23.81	24.0	1.045	0.02	0.210	0.219

SAR Values [5G NR Band n77 L]

Plot No.	Mode	Test Position	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR _{1g} (W/kg)	Reported SAR _{1g} (W/kg)
Measured / Reported SAR numbers-Body& hotspot open distance 10mm										
	100MHz/1RB#217	Front Side	633334	3500.01	23.92	24.0	1.019	-0.03	0.325	0.331
	100MHz/1RB#217	Back Side	633334	3500.01	23.92	24.0	1.019	0.04	0.462	0.471
#34	100MHz/1RB#217	Left Edge	633334	3500.01	23.92	24.0	1.019	0.08	0.478	0.487
	100MHz/1RB#217	Top Edge	633334	3500.01	23.92	24.0	1.019	-0.08	0.333	0.339
	100MHz/135RB#67	Front Side	633334	3500.01	23.62	24.0	1.091	0.02	0.304	0.332
	100MHz/135RB#67	Back Side	633334	3500.01	23.62	24.0	1.091	-0.05	0.431	0.470
	100MHz/135RB#67	Left Edge	633334	3500.01	23.62	24.0	1.091	0.08	0.458	0.500
	100MHz/135RB#67	Top Edge	633334	3500.01	23.62	24.0	1.091	0.13	0.305	0.333

SAR Values [5G NR Band n77 H]

Plot No.	Mode	Test Position	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR _{1g} (W/kg)	Reported SAR _{1g} (W/kg)
Measured / Reported SAR numbers-Body& hotspot open distance 10mm										
	100MHz/1RB#1	Front Side	656000	3840	23.98	24.0	1.005	-0.04	0.252	0.253
#35	100MHz/1RB#1	Back Side	656000	3840	23.98	24.0	1.005	-0.05	0.405	0.407
	100MHz/1RB#1	Left Edge	656000	3840	23.98	24.0	1.005	0.11	0.380	0.382
	100MHz/1RB#1	Top Edge	656000	3840	23.98	24.0	1.005	-0.03	0.249	0.250
	100MHz/135RB#67	Front Side	650000	3840	23.74	24.0	1.062	-0.10	0.226	0.240
	100MHz/135RB#67	Back Side	650000	3840	23.74	24.0	1.062	-0.03	0.385	0.409
	100MHz/135RB#67	Left Edge	650000	3840	23.74	24.0	1.062	0.11	0.364	0.386
	100MHz/135RB#67	Top Edge	650000	3840	23.74	24.0	1.062	-0.05	0.235	0.249

SAR Values [WIFI 2.4G]

Plot No.	Mode	Test Position	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR _{1g} (W/kg)	Reported SAR _{1g} (W/kg)
Measured / Reported SAR numbers-Body& hotspot open distance 10mm Ant0										
	802.11b	Front Side	06	2437	14.60	15.0	1.096	-0.07	0.142	0.156
#36	802.11b	Back Side	06	2437	14.60	15.0	1.096	0.04	0.165	0.181
	802.11b	Right Edge	06	2437	14.60	15.0	1.096	0.10	0.089	0.098
	802.11b	Top Edge	06	2437	14.60	15.0	1.096	0.10	0.153	0.168
Measured / Reported SAR numbers-Body& hotspot open distance 10mm Ant1										
	802.11b	Front Side	01	2412	13.06	14.0	1.242	-0.07	0.109	0.135
	802.11b	Back Side	01	2412	13.06	14.0	1.242	0.05	0.148	0.184
	802.11b	Right Edge	01	2412	13.06	14.0	1.242	0.10	0.144	0.179
	802.11b	Top Edge	01	2412	13.06	14.0	1.242	0.10	0.094	0.117

SAR Values [WIFI 5.2G]

Plot No.	Mode	Test Position	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR _{1g} (W/kg)	Reported SAR _{1g} (W/kg)
Measured / Reported SAR numbers-Body& hotspot open distance 10mm Ant0										
	802.11a	Front Side	40	5200	17.87	18.0	1.030	0.07	0.089	0.092
#37	802.11a	Back Side	40	5200	17.87	18.0	1.030	0.05	0.121	0.125
	802.11a	Right Edge	40	5200	17.87	18.0	1.030	-0.10	0.036	0.037
	802.11a	Top Edge	40	5200	17.87	18.0	1.030	-0.13	0.101	0.104
Measured / Reported SAR numbers-Body& hotspot open distance 10mm Ant1										
	802.11a	Front Side	40	5200	12.50	13.0	1.122	-0.09	0.071	0.080
	802.11a	Back Side	40	5200	12.50	13.0	1.122	-0.02	0.118	0.132
	802.11a	Right Edge	40	5200	12.50	13.0	1.122	0.08	0.109	0.122
	802.11a	Top Edge	40	5200	12.50	13.0	1.122	0.06	0.057	0.064

SAR Values [WIFI 5.8G]

Plot No.	Mode	Test Position	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR _{1g} (W/kg)	Reported SAR _{1g} (W/kg)
Measured / Reported SAR numbers-Body& hotspot open distance 10mm Ant0										
	802.11ax(HE20)	Front Side	157	5785	16.95	17.0	1.159	0.04	0.106	0.181
#38	802.11ax(HE20)	Back Side	157	5785	16.95	17.0	1.159	0.05	0.132	0.195
	802.11ax(HE20)	Right Edge	157	5785	16.95	17.0	1.159	0.11	0.051	0.188
	802.11ax(HE20)	Top Edge	157	5785	16.95	17.0	1.159	-0.09	0.118	0.163
Measured / Reported SAR numbers-Body& hotspot open distance 10mm Ant1										
	802.11ax(HE20)	Front Side	157	5785	11.27	12.0	1.183	0.05	0.079	0.093
	802.11ax(HE20)	Back Side	157	5785	11.27	12.0	1.183	0.10	0.123	0.146
	802.11ax(HE20)	Right Edge	157	5785	11.27	12.0	1.183	0.09	0.110	0.130
	802.11ax(HE20)	Top Edge	157	5785	11.27	12.0	1.183	-0.02	0.067	0.079

10.6 Simultaneous Transmission Analysis

Per FCC KD B447498 D01, simultaneous transmission SAR test exclusion may be applied when the sum of the 1-g SAR for all the transmitting antenna in a specific a physical test configuration is ≤ 1.6 W/Kg. When the sum is greater than the SAR limit, SAR test exclusion is determined by the SAR to peak location separation ratio.

$$\text{Ratio} = \frac{(\text{SAR}_1 + \text{SAR}_2)^{1.5}}{(\text{peak location separation, mm})} < 0.04$$

The following procedures adopted from “FCC SAR Considerations for Cell Phones with Multiple Transmitters” are applicable to handsets with built-in unlicensed transmitters such as 802.11 a/b/g/n and Bluetooth devices which may simultaneously transmit with the licensed transmitter.

Application Simultaneous Transmission information:

No.	Simultaneous Transmission Configurations	Portable Handset		
		Head	Body-worn	Hotspot
1	WWAN (2/3/4G/5G) + WLAN 2.4GHz SISO	Yes	Yes	Yes
2	WWAN (2/3/4G/5G) + WLAN 2.4GHz MIMO	Yes	Yes	Yes
3	WWAN (2/3/4G/5G) + WLAN 5GHz SISO	Yes	Yes	Yes
4	WWAN (2/3/4G/5G) + WLAN 5GHz MIMO	Yes	Yes	Yes
5	WWAN (2/3/4G/5G) + WLAN 2.4GHz SISO ANT1+ Bluetooth	Yes	Yes	Yes
7	WWAN (2/3/4G/5G) + WLAN 5GHz SISO ANT1 + Bluetooth	Yes	Yes	Yes

10.8.2 Evaluation of Simultaneous SAR

Head Simultaneous transmission SAR for WLAN and GSM/WCDMA/LTE/5G NR

Exposure Position	1	2	3	4	5	6	1+2 Summed 1g SAR (W/kg)	1+3 Summed 1g SAR (W/kg)	SPLSR
	MAX. WWAN Reported SAR	MAX. WLAN2.4G Reported SAR ANT0	MAX. WLAN2.4G Reported SAR ANT1	MAX. WLAN 5G Reported SAR ANT0	MAX. WLAN 5G Reported SAR ANT1	MAX. Bluetooth Reported SAR			
	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)			
Left Cheek	0.545	0.323	0.297	0.277	0.159	0.083	0.868	0.842	N/A
Left Tilt	0.468	0.312	0.274	0.261	0.147	0.083	0.78	0.742	N/A
Right Cheek	0.553	0.319	0.292	0.273	0.142	0.083	0.872	0.845	N/A
Right Tilt	0.492	0.304	0.272	0.258	0.136	0.083	0.796	0.764	N/A

Head Simultaneous transmission SAR for WLAN and GSM/WCDMA/LTE/5G NR -continue

Exposure Position	1+2+3 Summed 1g SAR (W/kg)	1+4 Summed 1g SAR (W/kg)	1+5 Summed 1g SAR (W/kg)	1+4+5 Summed 1g SAR (W/kg)	1+3+6 Summed 1g SAR (W/kg)	1+5+6 Summed 1g SAR (W/kg)	SPLSR
Left Cheek	1.165	0.822	0.704	0.981	0.925	0.787	N/A
Left Tilt	1.054	0.729	0.615	0.876	0.825	0.698	N/A
Right Cheek	1.164	0.826	0.695	0.968	0.928	0.778	N/A
Right Tilt	1.068	0.750	0.628	0.886	0.847	0.711	N/A

MAX. $\Sigma SAR_{1g} = 1.165$ W/kg < 1.6 W/kg, so the Simultaneous transmission SAR with volume scan are not required.

Body-worn and hotspot Simultaneous transmission SAR for WLAN/BT and GSM/WCDMA/LTE/5G NR

Exposure Position	1	2	3	4	5	6	1+2 Summed 1g SAR (W/kg)	1+3 Summed 1g SAR (W/kg)	SPLSR
	MAX. WWAN Reported SAR	MAX. WLAN2.4G Reported SAR ANT0	MAX. WLAN2.4G Reported SAR ANT1	MAX. WLAN 5G Reported SAR ANT0	MAX. WLAN 5G Reported SAR ANT1	MAX. Bluetooth Reported SAR			
	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)			
Front Side	0.385	0.156	0.135	0.181	0.093	0.042	0.541	0.520	N/A
Back Side	0.471	0.181	0.184	0.195	0.146	0.042	0.652	0.655	N/A
Left Edge	0.500	N/A	N/A	N/A	N/A	0.042	0.500	0.500	N/A
Right Edge	0.471	0.098	0.179	0.188	0.13	0.042	0.569	0.650	N/A
Top Side	0.339	0.168	0.117	0.163	0.079	0.042	0.507	0.456	N/A
Bottom Edge	0.411	N/A	N/A	N/A	N/A	0.042	0.411	0.411	N/A

Body-worn and hotspot Simultaneous transmission SAR for WLAN/BT and GSM/WCDMA/LTE/5G NR-continue

Exposure Position	1+2+3 Summed 1g SAR (W/kg)	1+4 Summed 1g SAR (W/kg)	1+5 Summed 1g SAR (W/kg)	1+4+5 Summed 1g SAR (W/kg)	1+3+6 Summed 1g SAR (W/kg)	1+5+6 Summed 1g SAR (W/kg)	SPLSR
Left Cheek	0.676	0.566	0.478	0.562	0.520	0.676	N/A
Front Side	0.836	0.666	0.617	0.697	0.659	0.836	N/A
Back Side	0.500	0.500	0.500	0.542	0.542	0.500	N/A
Left Edge	0.748	0.659	0.601	0.692	0.643	0.748	N/A
Right Edge	0.624	0.502	0.418	0.498	0.460	0.624	N/A
Top Side	0.411	0.411	0.411	0.453	0.453	0.411	N/A


MAX. $\Sigma SAR_{1g} = 0.836$ W/kg < 1.6 W/kg, so the Simultaneous transmission SAR with volume scan are not required.

11 Measurement Uncertainty


NO	Source	Uncert. ai (%)	Prob. Dist.	Div. k	ci (1g)	ci (10g)	Stand.U ncert. ui (1g)	Stand.U ncert. ui (10g)	Veff
1	Repeat	0.4	N	1	1	1	0.4	0.4	9
Instrument									
2	Probe calibration	7	N	2	1	1	3.5	3.5	∞
3	Axial isotropy	4.7	R	$\frac{1}{\sqrt{3}}$	0.7	0.7	1.9	1.9	∞
4	Hemispherical isotropy	9.4	R	$\frac{1}{\sqrt{3}}$	0.7	0.7	3.9	3.9	∞
5	Boundary effect	1.0	R	$\frac{1}{\sqrt{3}}$	1	1	0.6	0.6	∞
6	Linearity	4.7	R	$\frac{1}{\sqrt{3}}$	1	1	2.7	2.7	∞
7	Detection limits	1.0	R	$\frac{1}{\sqrt{3}}$	1	1	0.6	0.6	∞
8	Readout electronics	0.3	N	1	1	1	0.3	0.3	∞
9	Response time	0.8	R	$\frac{1}{\sqrt{3}}$	1	1	0.5	0.5	∞
10	Integration time	2.6	R	$\frac{1}{\sqrt{3}}$	1	1	1.5	1.5	∞
11	Ambient noise	3.0	R	$\frac{1}{\sqrt{3}}$	1	1	1.7	1.7	∞
12	Ambient reflections	3.0	R	$\frac{1}{\sqrt{3}}$	1	1	1.7	1.7	∞
13	Probe positioner mech. restrictions	0.4	R	$\frac{1}{\sqrt{3}}$	1	1	0.2	0.2	∞
14	Probe positioning with respect to phantom shell	2.9	R	$\frac{1}{\sqrt{3}}$	1	1	1.7	1.7	∞
15	Max.SAR evaluation	1.0	R	$\frac{1}{\sqrt{3}}$	1	1	0.6	0.6	∞

Test sample related									
16	Device positioning	3.8	N	1	1	1	3.8	3.8	99
17	Device holder	5.1	N	1	1	1	5.1	5.1	5
18	Drift of output power	5.0	R	$\frac{1}{\sqrt{3}}$	1	1	2.9	2.9	∞
Phantom and set-up									
19	Phantom uncertainty	4.0	R	$\frac{1}{\sqrt{3}}$	1	1	2.3	2.3	∞
20	Liquid conductivity (target)	5.0	R	$\frac{1}{\sqrt{3}}$	0.64	0.43	1.8	1.2	∞
21	Liquid conductivity (meas)	2.5	N	1	0.64	0.43	1.6	1.2	∞
22	Liquid Permittivity (target)	5.0	R	$\frac{1}{\sqrt{3}}$	0.6	0.49	1.7	1.5	∞
23	Liquid Permittivity (meas)	2.5	N	1	0.6	0.49	1.5	1.2	∞
Combined standard			RSS	$U_c = \sqrt{\sum_{i=1}^n C_i^2 U_i^2}$			11.4%	11.3%	236
Expanded uncertainty(P=95%)		$U = k U_c$					22.8%	22.6%	

Appendix A. EUT Photos and Test Setup Photos

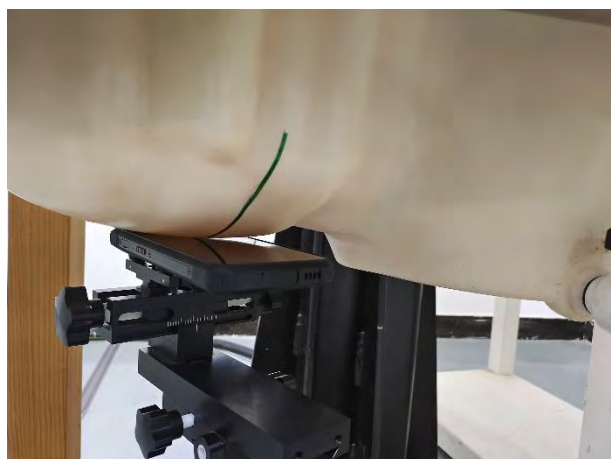


Right Head Cheek

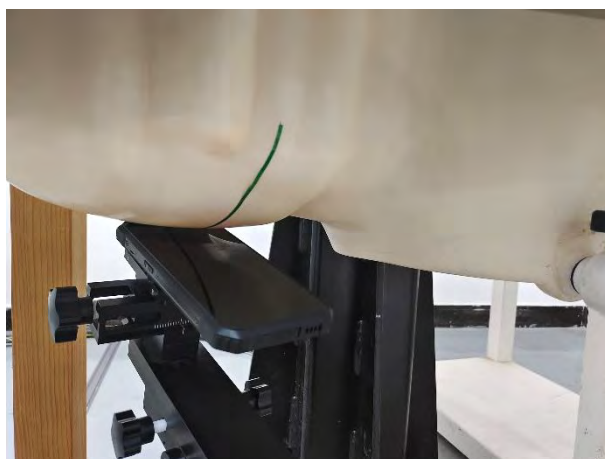

Right Head Tilted



Left Head Cheek

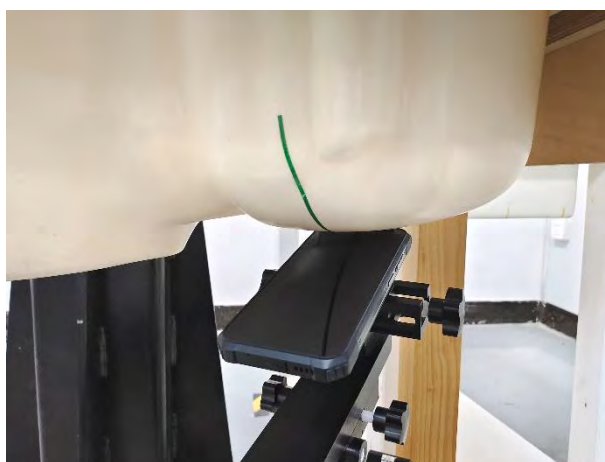

Left Head Tilted



Front Side (10mm)




Back Side (10mm)



Right Side (10mm)



Left Side (10mm)

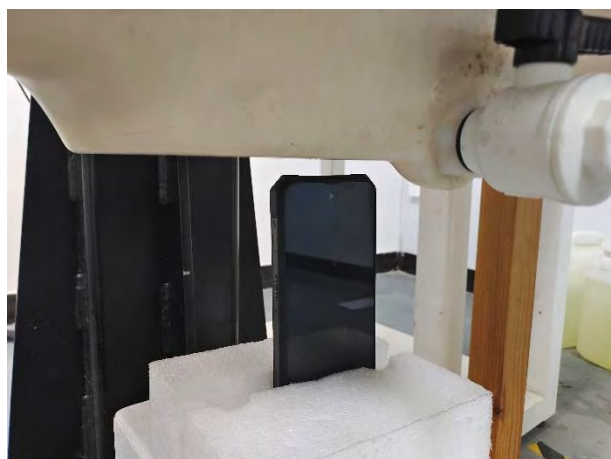

Top Side (10mm)



Bottom Side (10mm)

Appendix B. Plots of SAR System Check

750MHz System Check

Date: 07/26/2024

DUT: Dipole 750 MHz; Type: D750V3; Serial: 1194

Communication System: CW; Frequency: 750 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 750$ MHz; $\sigma = 0.923$ S/m; $\epsilon_r = 43.651$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 – SN7624; ConvF(10.58, 10.58, 10.58); Calibrated: Sep. 06, 2023;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn428; Calibrated: Aug.30,2023;
- Phantom: Twin-SAM V8.0 ; Type: QD000P40CD; Serial: 1802;
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Area Scan (61x61x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 3.61 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 59.96 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 4.15 W/kg

SAR(1 g) = 2.22 W/kg; SAR(10 g) = 1.47 W/kg

Maximum value of SAR (measured) = 3.47 W/kg

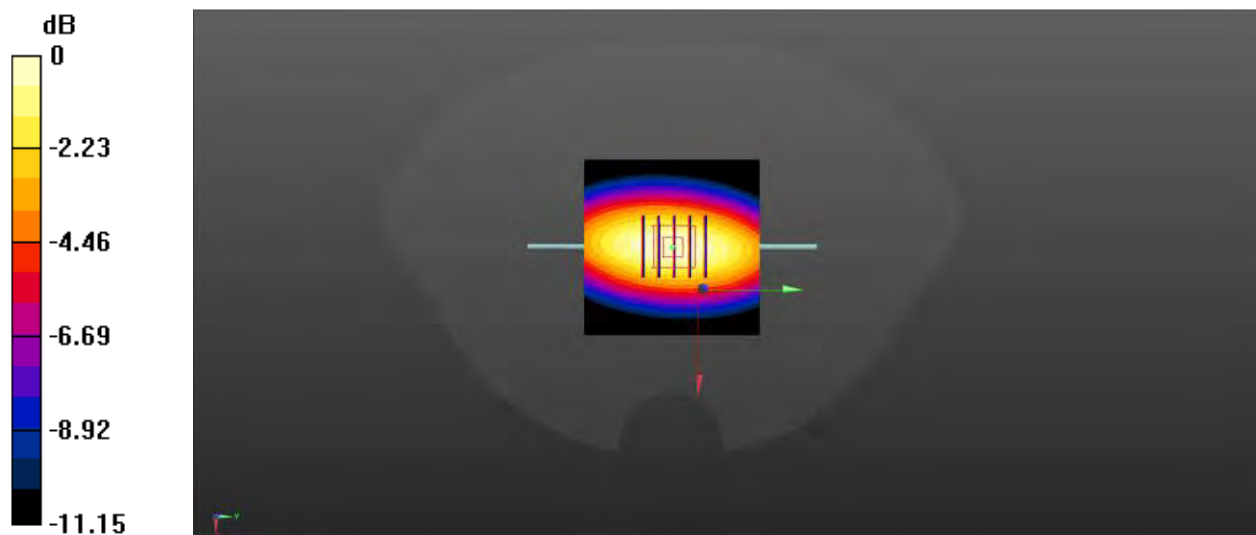

0 dB = 3.47 W/kg

System Performance Check 750MHz 250mW

835MHz System Check

Date: 07/30/2024

DUT: Dipole 835 MHz; Type: D835V2; Serial: 484

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 835$ MHz; $\sigma = 0.927$ S/m; $\epsilon_r = 43.135$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 – SN7624; ConvF(10.19, 10.19, 10.19); Calibrated: Sep. 06, 2023;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn428; Calibrated: Aug.30,2023;
- Phantom: Twin-SAM V8.0 ; Type: QD000P40CD; Serial: 1802;
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Area Scan (61x61x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 3.47 W/kg



Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 61.03 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 5.12 W/kg

SAR(1 g) = 2.35 W/kg; SAR(10 g) = 1.56 W/kg

Maximum value of SAR (measured) = 4.32 W/kg

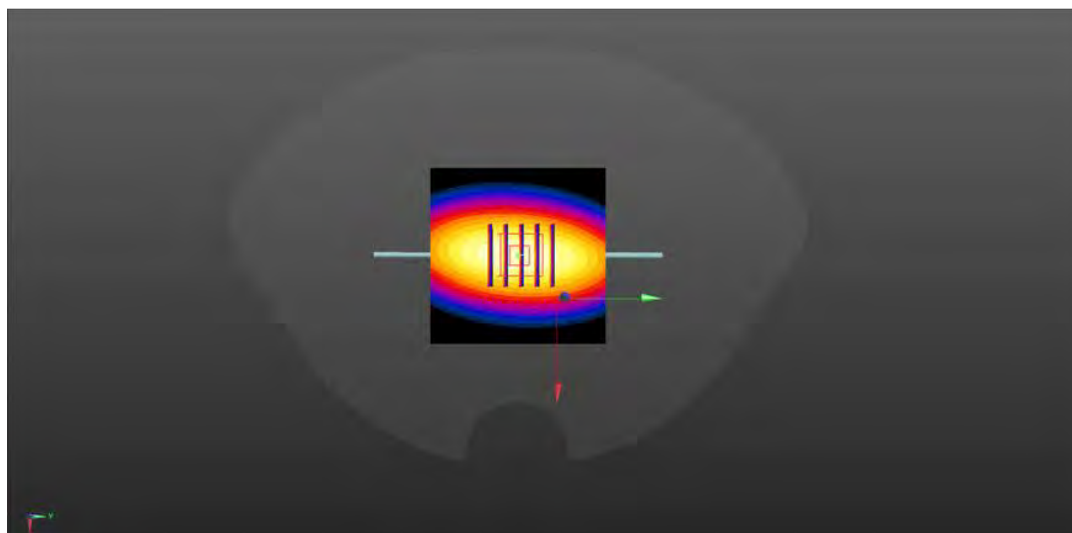

0 dB = 4.32 W/kg

System Performance Check 835MHz 250mW

835MHz System Check

Date: 08/19/2024

DUT: Dipole 835 MHz; Type: D835V2; Serial: 484

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 835$ MHz; $\sigma = 0.858$ S/m; $\epsilon_r = 43.475$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 – SN7624; ConvF(10.19, 10.19, 10.19); Calibrated: Sep. 06, 2023;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn428; Calibrated: Aug.30,2023;
- Phantom: Twin-SAM V8.0 ; Type: QD000P40CD; Serial: 1802;
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Area Scan (71x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 3.97 W/kg



Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 57.32 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 4.48 W/kg

SAR(1 g) = 2.49 W/kg; SAR(10 g) = 1.68 W/kg

Maximum value of SAR (measured) = 3.84 W/kg

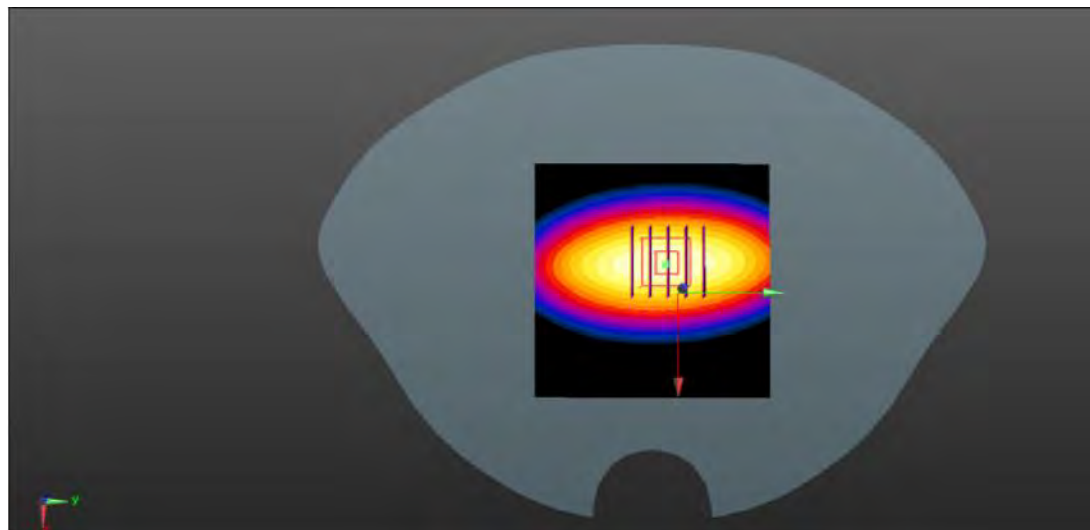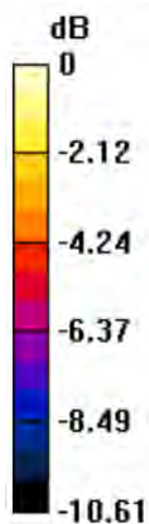

0 dB = 4.31 W/kg

System Performance Check 835MHz 250mW

1750 MHz System Check

Date: 07/31/2024

DUT: Dipole 1800 MHz; Type: D1800V2; Serial: 2d158

Communication System: CW; Frequency: 1750 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1750$ MHz; $\sigma = 1.348$ S/m; $\epsilon_r = 39.859$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 – SN7624; ConvF(8.66, 8.66, 8.66); Calibrated: Sep. 06, 2023;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn428; Calibrated: Aug.30,2023;
- Phantom: Twin-SAM V8.0 ; Type: QD000P40CD; Serial: 1802;
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 14.5 W/kg



Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 90.77 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 17.7 W/kg

SAR(1 g) = 9.74 W/kg; SAR(10 g) = 4.85 W/kg

Maximum value of SAR (measured) = 13.81 W/kg

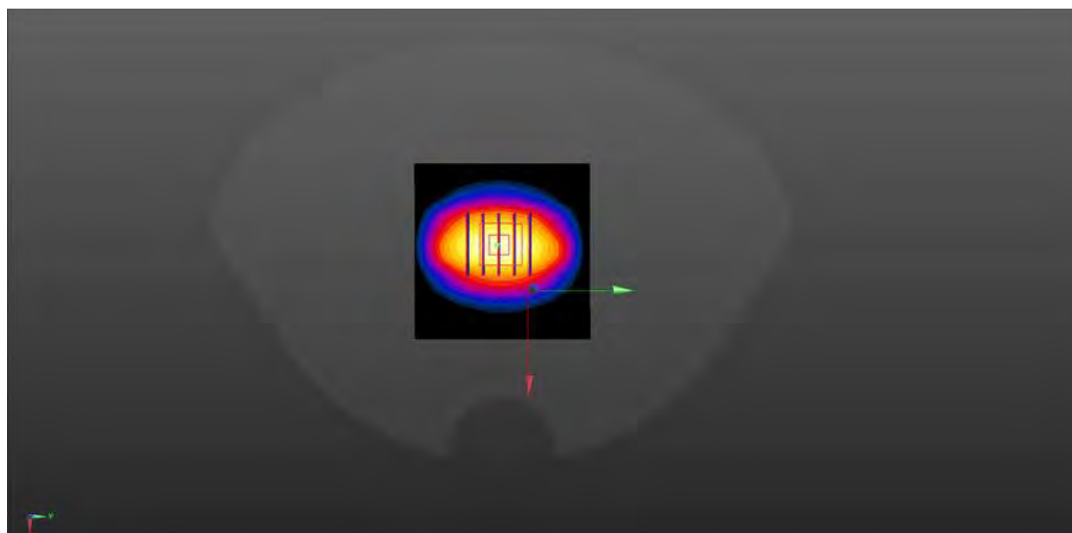

0 dB = 13.81 W/kg

System Performance Check 1750MHz 250mW

1900MHz System Check

Date: 08/01/2024

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: 5d002

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1900$ MHz; $\sigma = 1.348$ S/m; $\epsilon_r = 39.136$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 – SN7624; ConvF(8.35, 8.35, 8.35); Calibrated: Sep. 06, 2023;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn428; Calibrated: Aug.30,2023;
- Phantom: Twin-SAM V8.0 ; Type: QD000P40CD; Serial: 1802;
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Area Scan (61x61x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 18.6 W/kg



Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 100.5 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 23.0 W/kg

SAR(1 g) = 10.46 W/kg; SAR(10 g) = 5.48 W/kg

Maximum value of SAR (measured) = 17.9 W/kg

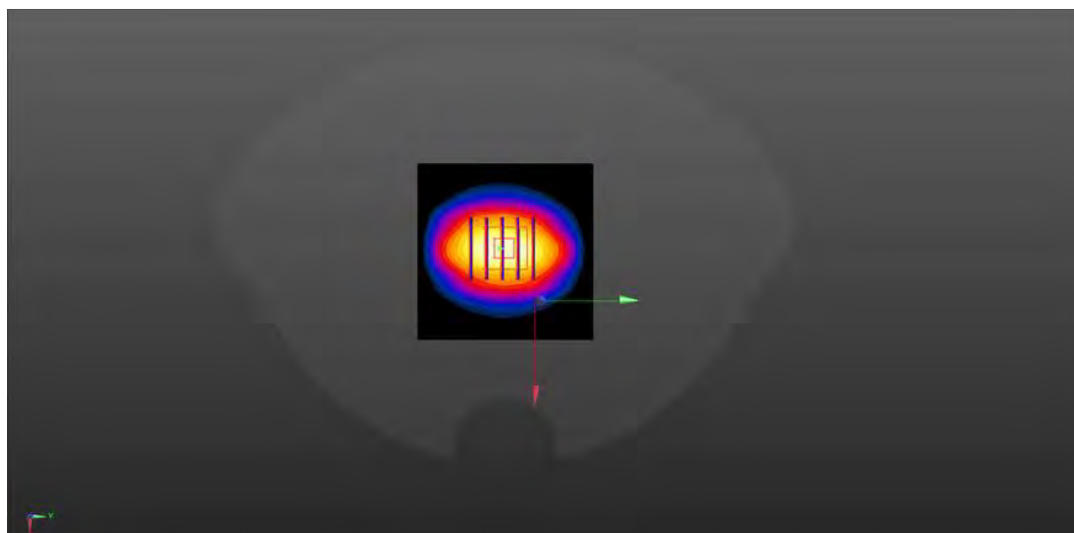

0 dB = 17.9 W/kg

System Performance Check 1900MHz 250mW

2450MHz System Check

Date: 08/05/2024

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: 745

Communication System: CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2450$ MHz; $\sigma = 1.824$ S/m; $\epsilon_r = 38.788$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 – SN7624; ConvF(7.85, 7.85, 7.85); Calibrated: Sep. 06, 2023;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn428; Calibrated: Aug.30,2023;
- Phantom: Twin-SAM V8.0 ; Type: QD000P40CD; Serial: 1802;
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Area Scan (61x61x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 19.1 W/kg



Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 101.24 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 30.02 W/kg

SAR(1 g) = 13.04 W/kg; SAR(10 g) = 6.15 W/kg

Maximum value of SAR (measured) = 22.5 W/kg

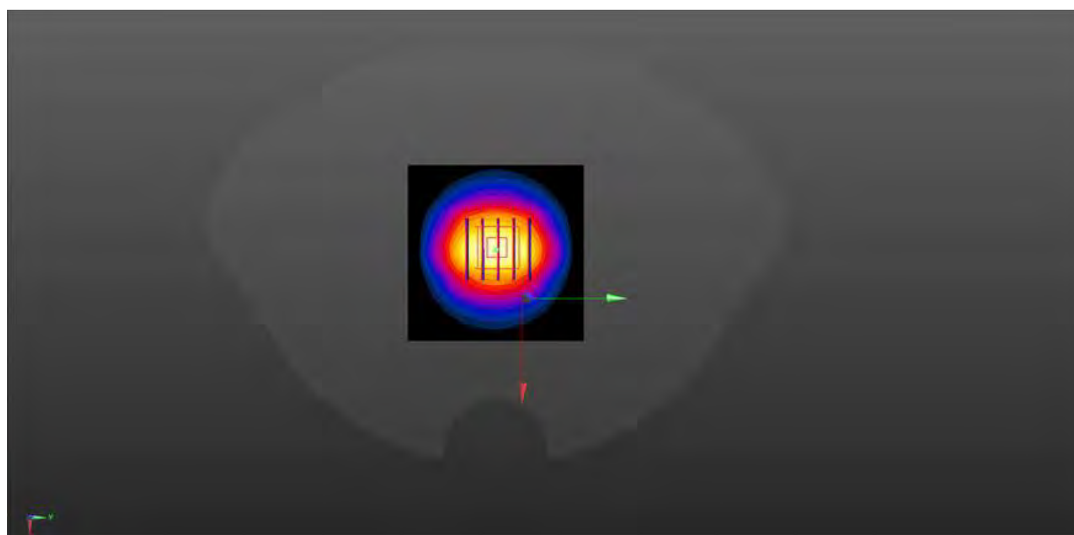

0 dB = 22.5 W/kg

System Performance Check 2450MHz 250mW

2600MHz System Check

Date: 08/03/2024

DUT: Dipole 2600 MHz; Type: D2600V2; Serial: 1073

Communication System: CW; Frequency: 2600 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2600$ MHz; $\sigma = 1.892$ S/m; $\epsilon_r = 40.342$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 – SN7624; ConvF(7.66, 7.66, 7.66); Calibrated: Sep. 06, 2023;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn428; Calibrated: Aug.30,2023;
- Phantom: Twin-SAM V8.0 ; Type: QD000P40CD; Serial: 1802;
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Area Scan (81x101x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 16.9 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 89.05 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 32.4 W/kg

SAR(1 g) = 13.72 W/kg; SAR(10 g) = 6.06 W/kg

Maximum value of SAR (measured) = 10.5 W/kg

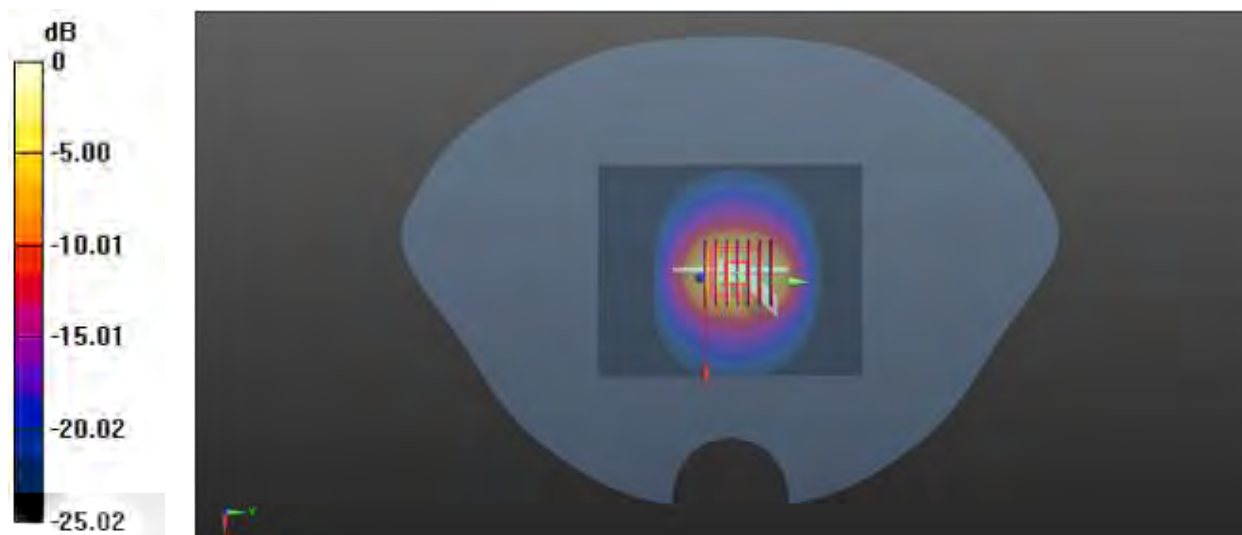

System Performance Check 2600MHz 250mW

2600MHz System Check

Date: 08/20/2024

DUT: Dipole 2600 MHz; Type: D2600V2; Serial: 1073

Communication System: CW; Frequency: 2600 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2600$ MHz; $\sigma = 1.920$ S/m; $\epsilon_r = 40.404$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 – SN7624; ConvF(7.66, 7.66, 7.66); Calibrated: Sep. 06, 2023;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn428; Calibrated: Aug.30,2023;
- Phantom: Twin-SAM V8.0 ; Type: QD000P40CD; Serial: 1802;
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Area Scan (101x101x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 17.7 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 82.94 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 32.2 W/kg

SAR(1 g) = 13.55 W/kg; SAR(10 g) = 6.10 W/kg

Maximum value of SAR (measured) = 17.2 W/kg

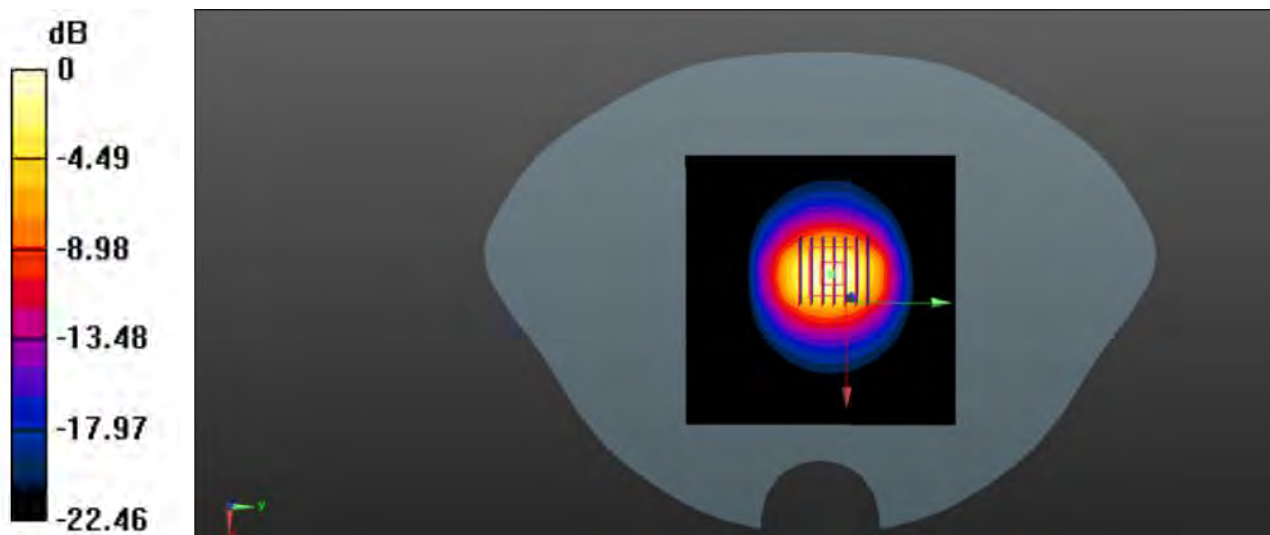

0 dB = 17.2W/kg

System Performance Check 2600MHz 250mW

3500MHz System Check

Date: 08/22/2024

DUT: Dipole 3500 MHz; Type: D3500V2; Serial: 1104

Communication System: CW; Frequency: 3500 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 3500$ MHz; $\sigma = 2.989$ S/m; $\epsilon_r = 37.983$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 – SN7624; ConvF(7.20, 7.20, 7.20); Calibrated: Sep. 06, 2023;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn428; Calibrated: Aug.30,2023;
- Phantom: Twin-SAM V8.0 ; Type: QD000P40CD; Serial: 1802;
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Area Scan (81x101x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 12.6 W/kg



Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 55.77 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 17.7 W/kg

SAR(1 g) = 6.42 W/kg; SAR(10 g) = 2.74 W/kg

Maximum value of SAR (measured) = 11.9 W/kg

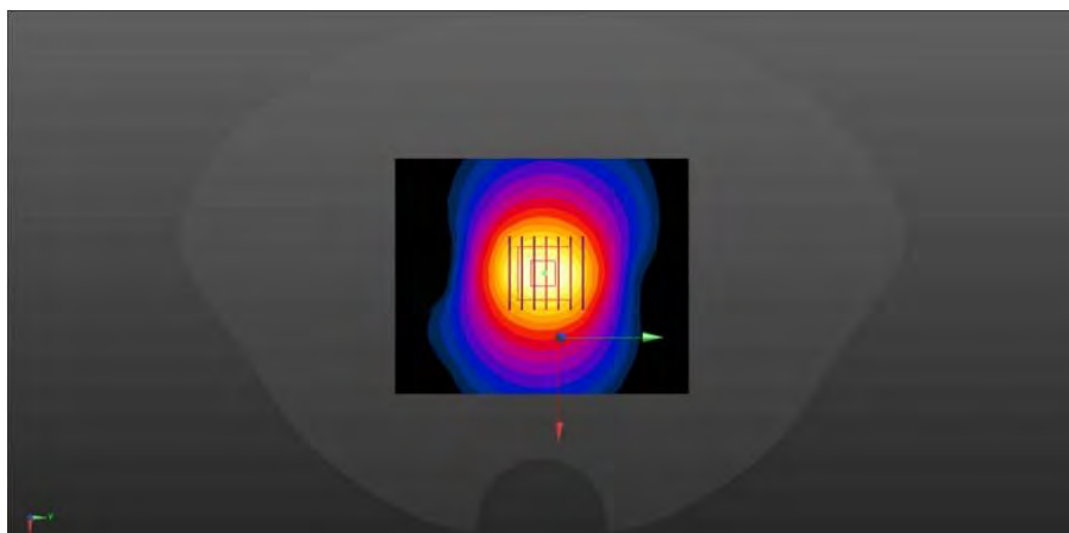

0 dB = 11.9 W/kg

System Performance Check 3500MHz 100mW

3700MHz System Check

Date: 08/23/2024

DUT: Dipole 3700 MHz; Type: D3700V2; Serial: 1076

Communication System: CW; Frequency: 3700 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 3700$ MHz; $\sigma = 3.173$ S/m; $\epsilon_r = 38.386$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 – SN7624; ConvF(7.00, 7.00, 7.00); Calibrated: Sep. 06, 2023;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn428; Calibrated: Aug.30,2023;
- Phantom: Twin-SAM V8.0 ; Type: QD000P40CD; Serial: 1802;
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Area Scan (101x101x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 9.67 W/kg



Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 41.78 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 22.5 W/kg

SAR(1 g) = 6.52 W/kg; SAR(10 g) = 2.52 W/kg

Maximum value of SAR (measured) = 9.52 W/kg

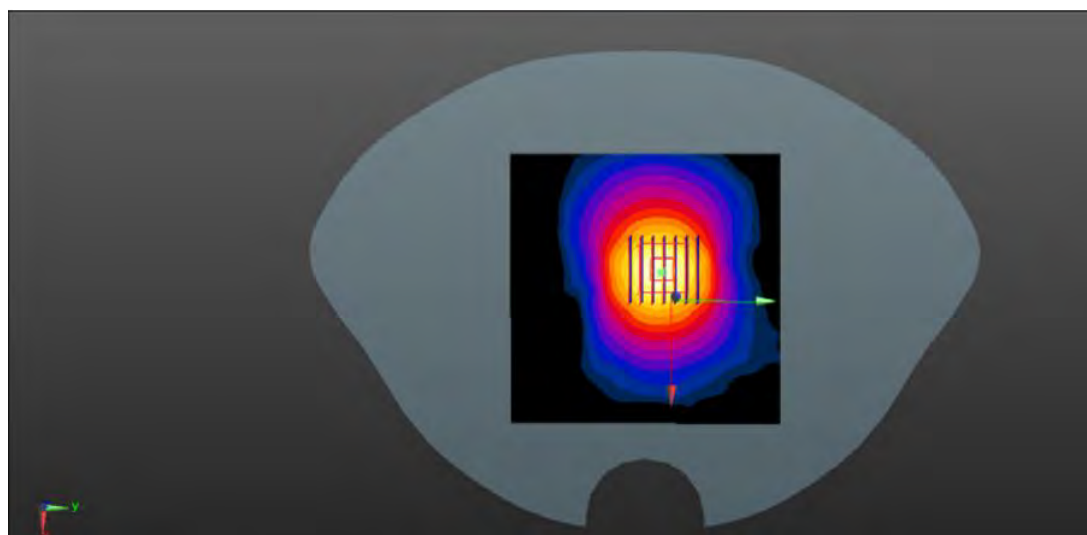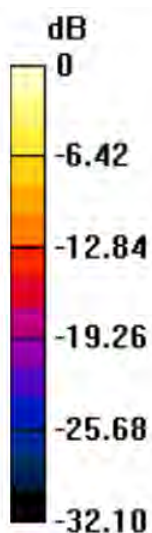

0 dB = 9.52 W/kg

System Performance Check 3500MHz 100mW

3900MHz System Check

Date: 08/23/2024

DUT: Dipole 3900 MHz; Type: D3900V2; Serial: 1046

Communication System: CW; Frequency: 3900 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 3900$ MHz; $\sigma = 3.233$ S/m; $\epsilon_r = 36.698$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 – SN7624; ConvF(6.85, 6.85, 6.85); Calibrated: Sep. 06, 2023;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn428; Calibrated: Aug.30,2023;
- Phantom: Twin-SAM V8.0 ; Type: QD000P40CD; Serial: 1802;
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Area Scan (81x101x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 14.5 W/kg



Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 54.58 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 21.0 W/kg

SAR(1 g) = 7.12 W/kg; SAR(10 g) = 2.65 W/kg

Maximum value of SAR (measured) = 13.7 W/kg

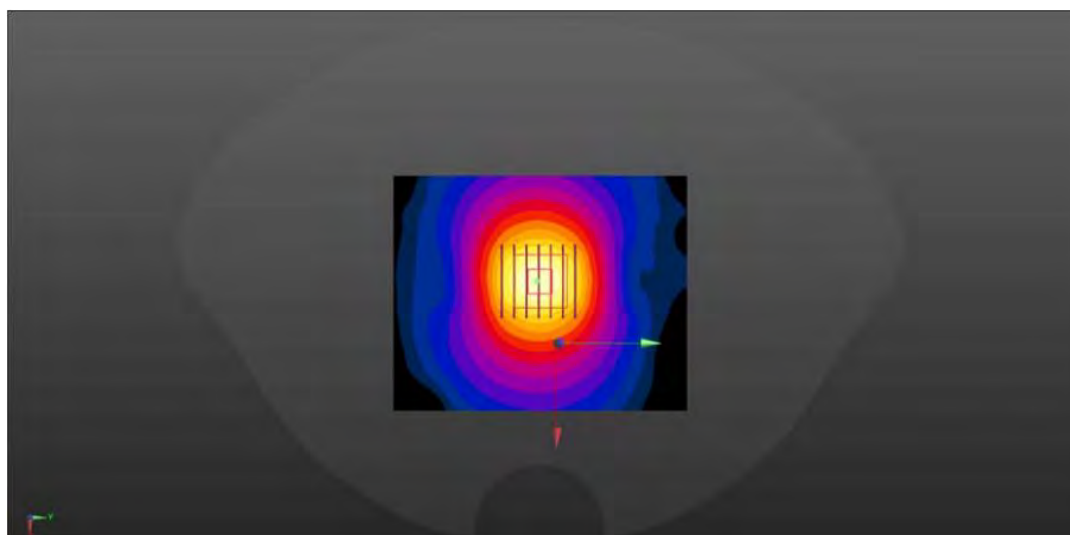

0 dB = 13.7W/kg

System Performance Check 3900MHz 100mW

5250MHz System Check

Date: 08/06/2024

DUT: Dipole 5GHz; Type: D5GHzV2; Serial: 1301

Communication System: CW; Frequency: 5250 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 5250$ MHz; $\sigma = 4.536$ S/m; $\epsilon_r = 34.503$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 – SN7624; ConvF(5.55, 5.55, 5.55); Calibrated: Sep. 06, 2023;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn428; Calibrated: Aug.30,2023;
- Phantom: Twin-SAM V8.0 ; Type: QD000P40CD; Serial: 1802;
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Area Scan (101x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 7.85 W/kg


Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 25.65 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 17.23 W/kg

SAR(1 g) = 7.64 W/kg; SAR(10 g) = 2.15 W/kg

Maximum value of SAR (measured) = 8.45 W/kg

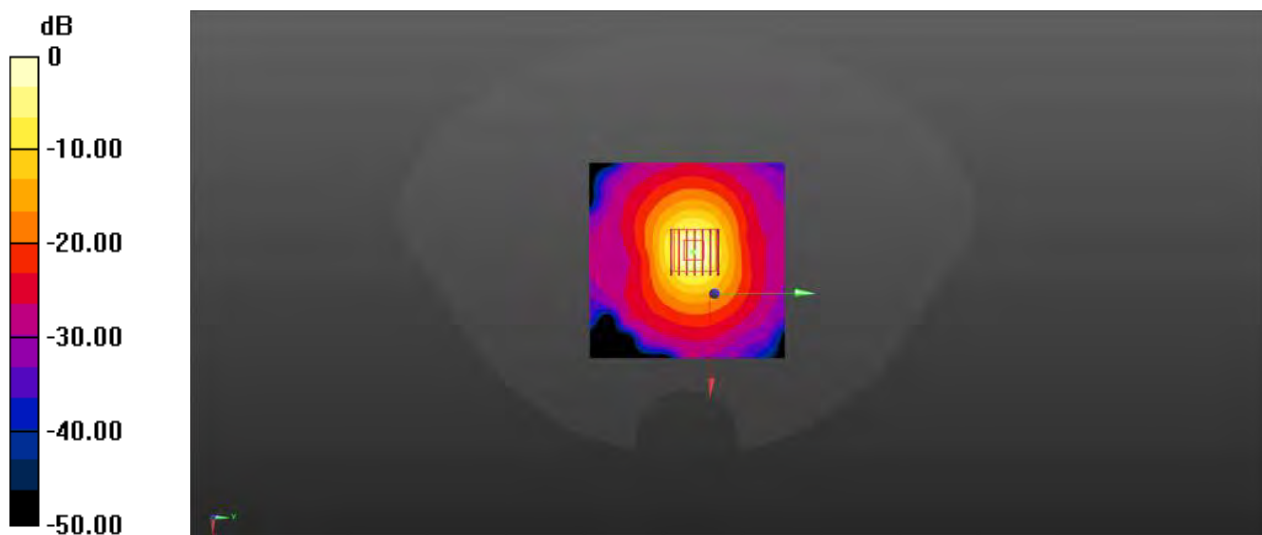

0 dB = 8.45 W/kg

System Performance Check 5250MHz 100mW

5750MHz System Check

Date: 08/07/2024

DUT: Dipole 5GHz; Type: D5GHzV2; Serial: 1301

Communication System: CW; Frequency: 5750 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 5750$ MHz; $\sigma = 5.073$ S/m; $\epsilon_r = 36.020$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 – SN7624; ConvF(4.98, 4.98, 4.98); Calibrated: Sep. 06, 2023;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn428; Calibrated: Aug.30,2023;
- Phantom: Twin-SAM V8.0 ; Type: QD000P40CD; Serial: 1802;
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Area Scan (101x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 11.1W/kg



Zoom Scan (7x7x13)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 23.41 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 24.54 W/kg

SAR(1 g) = 7.61 W/kg; SAR(10 g) = 2.12 W/kg

Maximum value of SAR (measured) = 12.5 W/kg

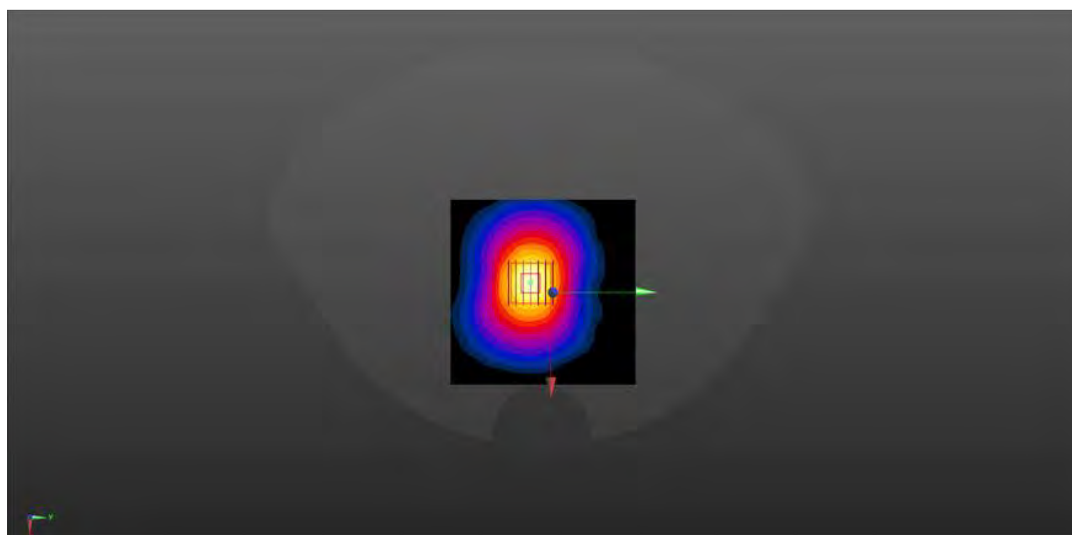

0 dB = 12.5 W/kg

System Performance Check 5750MHz 100mW

Appendix C. Plots of SAR Test Data

#1.

Date: 07/30/2024

GSM850_GSM Voice_Right Cheek_0mm_Ch190

Communication System: UID 0, GSM (0); Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.933$ S/m; $\epsilon_r = 42.040$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 – SN7624; ConvF(10.19, 10.19, 10.19); Calibrated: Sep. 06, 2023;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn428; Calibrated: Aug.30,2023;
- Phantom: Twin-SAM V8.0 ; Type: QD000P40CD; Serial: 1802;
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Area Scan (71x91x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.326 W/kg



Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.254 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.469 W/kg

SAR(1 g) = 0.302 W/kg; SAR(10 g) = 0.251 W/kg

Maximum value of SAR (measured) = 0.378 W/Kg

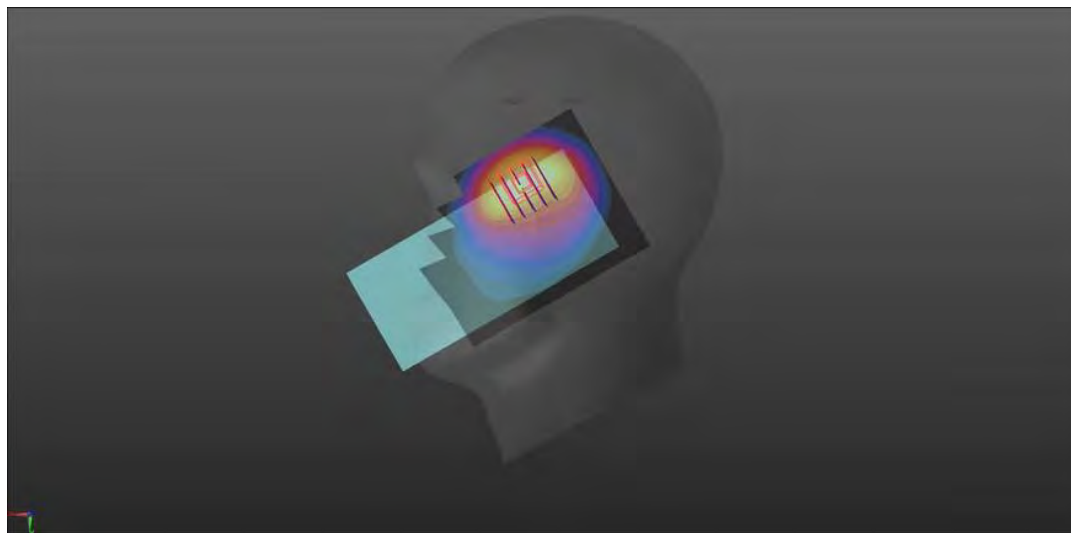

#2.

Date: 08/01/2024

GSM1900_GSM Voice_Right Cheek_0mm_Ch512

Communication System: UID 0, GSM (0); Frequency: 1850.2 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.450$ S/m; $\epsilon_r = 40.948$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 – SN7624; ConvF(8.35, 8.35, 8.35); Calibrated: Sep. 06, 2023;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn428; Calibrated: Aug.30,2023;
- Phantom: Twin-SAM V8.0 ; Type: QD000P40CD; Serial: 1802;
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Area Scan (71x91x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.225 W/kg



Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.798 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.375 W/kg

SAR(1 g) = 0.165 W/kg; SAR(10 g) = 0.111 W/kg

Maximum value of SAR (measured) = 0.220 W/Kg

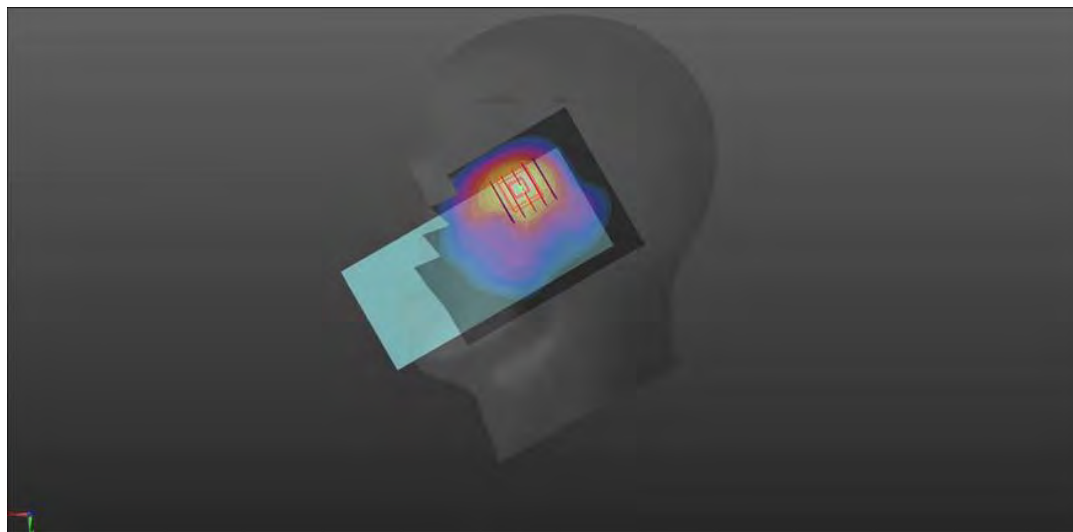

#3.

Date: 08/01/2024

WCDMA II_RMC 12.2Kbps_Right Cheek_0mm_Ch9538

Communication System: UID 0, WCDMA (0); Frequency: 1907.6 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1907.6$ MHz; $\sigma = 1.403$ S/m; $\epsilon_r = 41.028$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 – SN7624; ConvF(8.35, 8.35, 8.35); Calibrated: Sep. 06, 2023;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn428; Calibrated: Aug.30,2023;
- Phantom: Twin-SAM V8.0 ; Type: QD000P40CD; Serial: 1802;
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Area Scan (71x91x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.205 W/kg



Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.163 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.289 W/kg

SAR(1 g) = 0.161 W/kg; SAR(10 g) = 0.105 W/kg

Maximum value of SAR (measured) = 0.197 W/Kg

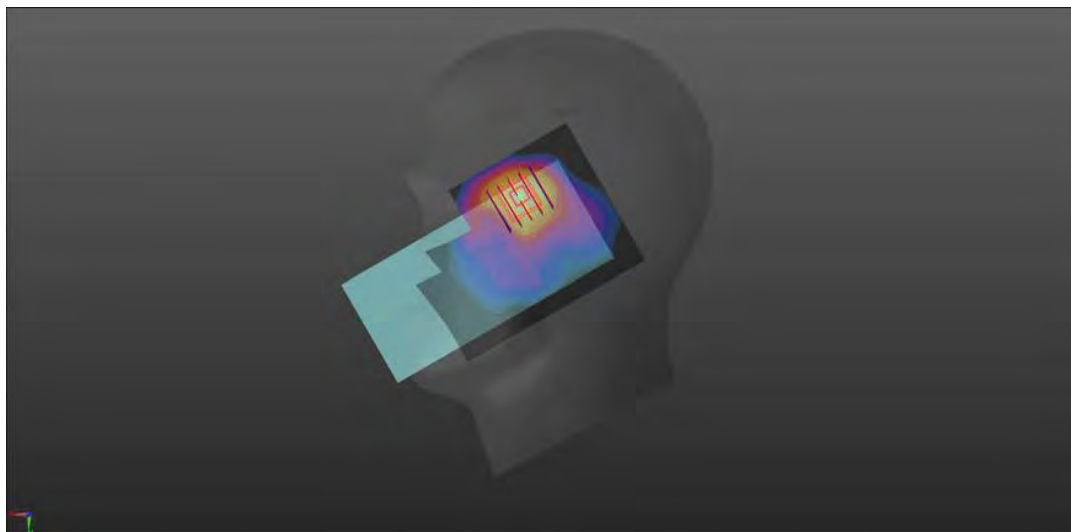

#4.

Date: 07/31/2024

WCDMA IV_RMC 12.2Kbps_Right Cheek_0mm_Ch1513

Communication System: UID 0, WCDMA (0); Frequency: 1752.6 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1752.6$ MHz; $\sigma = 1.342$ S/m; $\epsilon_r = 40.509$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 – SN7624; ConvF(8.66, 8.66, 8.66); Calibrated: Sep. 06, 2023;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn428; Calibrated: Aug.30,2023;
- Phantom: Twin-SAM V8.0 ; Type: QD000P40CD; Serial: 1802;
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Area Scan (71x91x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.225 W/kg



Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.522 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.236 W/kg

SAR(1 g) = 0.178 W/kg; SAR(10 g) = 0.126 W/kg

Maximum value of SAR (measured) = 0.214 W/Kg

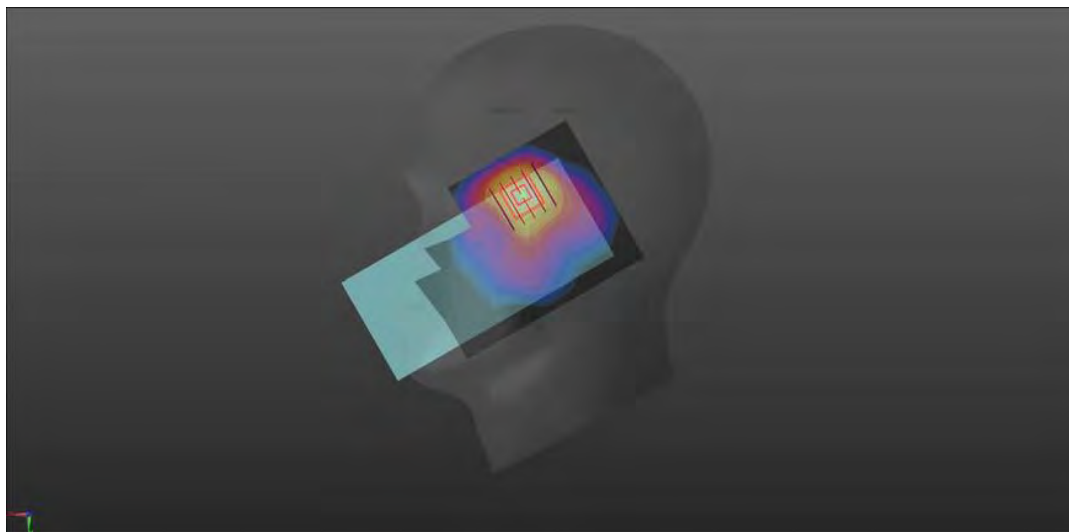

#5.

Date: 08/19/2024

WCDMA V_RMC 12.2Kbps_Right Cheek_0mm_Ch4233

Communication System: UID 0, WCDMA (0); Frequency: 846.6 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 846.6$ MHz; $\sigma = 0.885$ S/m; $\epsilon_r = 39.691$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 – SN7624; ConvF(10.19, 10.19, 10.19); Calibrated: Sep. 06, 2023;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn428; Calibrated: Aug.30,2023;
- Phantom: Twin-SAM V8.0 ; Type: QD000P40CD; Serial: 1802;
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Area Scan (71x91x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.236 W/kg



Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.898 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.236 W/kg

SAR(1 g) = 0.193 W/kg; SAR(10 g) = 0.155 W/kg

Maximum value of SAR (measured) = 0.215 W/Kg

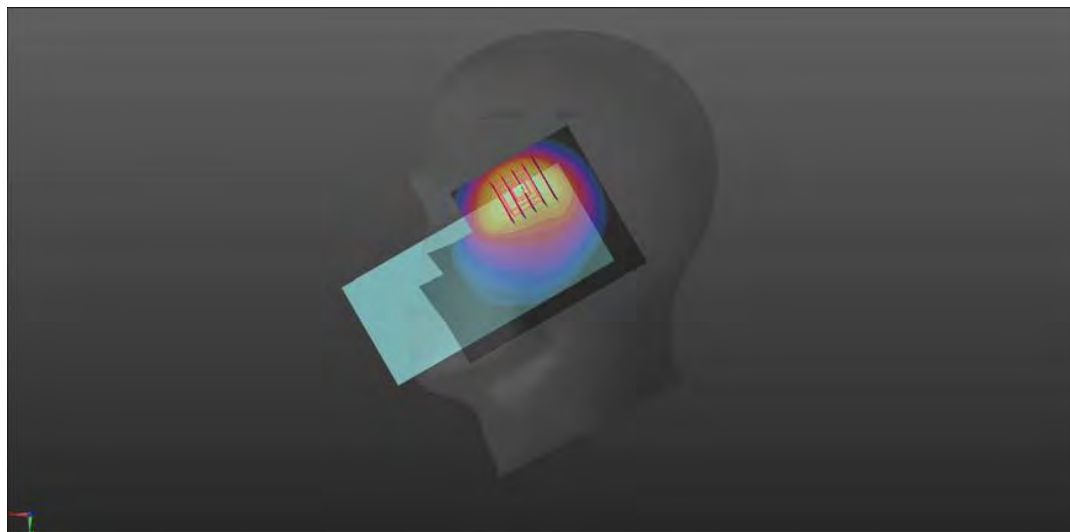

#6.

Date: 08/01/2024

LTE Band 2_20M_QPSK_1RB#49_Right Cheek_0mm_Ch19100

Communication System: UID 0, LTE (0); Frequency: 1900.0 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1900.0$ MHz; $\sigma = 1.448$ S/m; $\epsilon_r = 41.292$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 – SN7624; ConvF(8.35, 8.35, 8.35); Calibrated: Sep. 06, 2023;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn428; Calibrated: Aug.30,2023;
- Phantom: Twin-SAM V8.0 ; Type: QD000P40CD; Serial: 1802;
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Area Scan (71x91x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.542 W/kg



Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.474 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.241 W/kg

SAR(1 g) = 0.305 W/kg; SAR(10 g) = 0.144 W/kg

Maximum value of SAR (measured) = 0.514 W/Kg

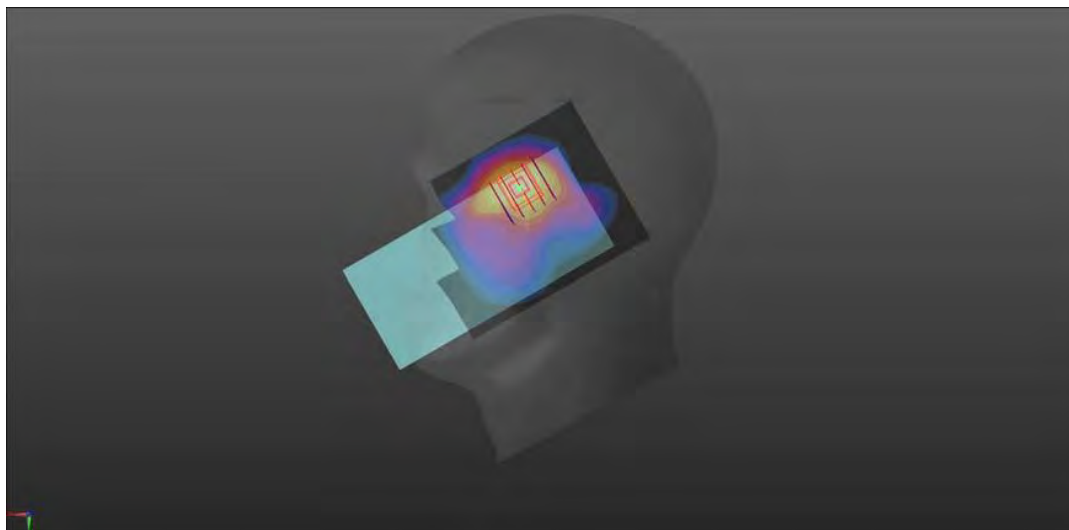

#7.

Date: 07/31/2024

LTE Band 4_20M_QPSK_1RB#0_Right Cheek_0mm_Ch20175

Communication System: UID 0, LTE (0); Frequency: 1747.5 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1747.5$ MHz; $\sigma = 1.436$ S/m; $\epsilon_r = 39.334$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 – SN7624; ConvF(8.66, 8.66, 8.66); Calibrated: Sep. 06, 2023;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn428; Calibrated: Aug.30,2023;
- Phantom: Twin-SAM V8.0 ; Type: QD000P40CD; Serial: 1802;
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Area Scan (71x91x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.542 W/kg



Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.629 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.705 W/kg

SAR(1 g) = 0.311 W/kg; SAR(10 g) = 0.205 W/kg

Maximum value of SAR (measured) = 0.559 W/Kg

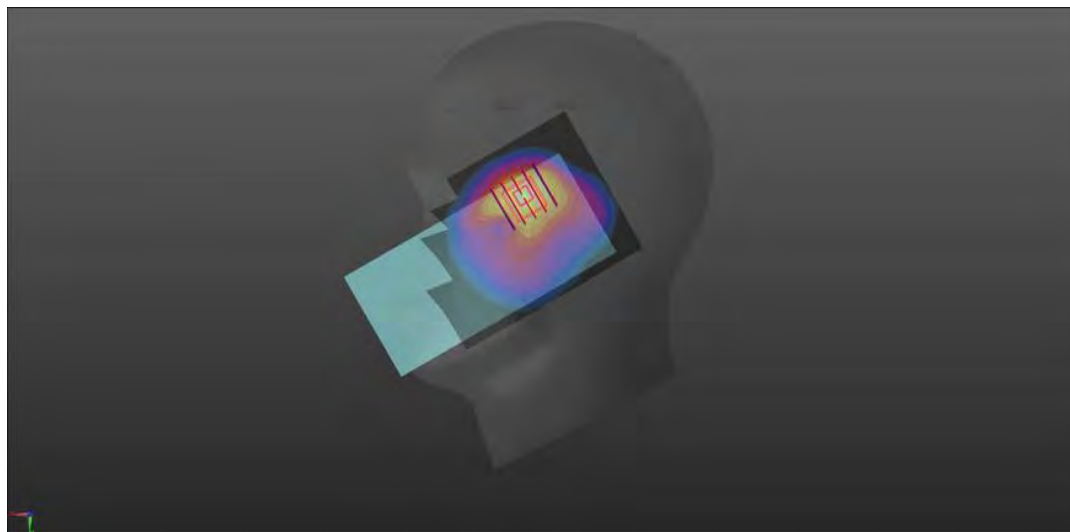

#8.

Date: 08/19/2024

LTE Band 5_10M_QPSK_1RB#0_Right Cheek_0mm_Ch20450

Communication System: UID 0, LTE (0); Frequency: 829.0 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 829.0$ MHz; $\sigma = 0.930$ S/m; $\epsilon_r = 41.131$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 – SN7624; ConvF(10.19, 10.19, 10.19); Calibrated: Sep. 06, 2023;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn428; Calibrated: Aug.30,2023;
- Phantom: Twin-SAM V8.0 ; Type: QD000P40CD; Serial: 1802;
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Area Scan (71x91x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.733 W/kg



Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 7.333 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.914 W/kg

SAR(1 g) = 0.378 W/kg; SAR(10 g) = 0.264 W/kg

Maximum value of SAR (measured) = 0.672 W/Kg

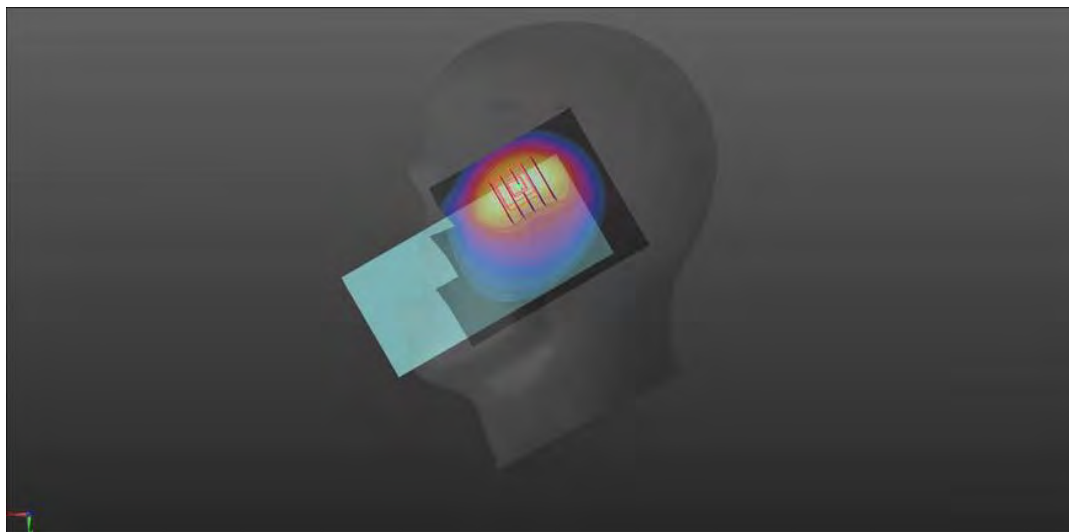

#9.

Date: 08/03/2024

LTE Band 7_20M_QPSK_1RB#99_Left Cheek_0mm_Ch20850

Communication System: UID 0, LTE (0); Frequency: 2510.0 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2510.0$ MHz; $\sigma = 2.046$ S/m; $\epsilon_r = 38.914$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 – SN7624; ConvF(7.66, 7.66, 7.66); Calibrated: Sep. 06, 2023;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn428; Calibrated: Aug.30,2023;
- Phantom: Twin-SAM V8.0 ; Type: QD000P40CD; Serial: 1802;
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Area Scan (81x111x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.608 W/kg



Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.569 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 1.05 W/kg

SAR(1 g) = 0.401 W/kg; SAR(10 g) = 0.254 W/kg

Maximum value of SAR (measured) = 0.705 W/Kg

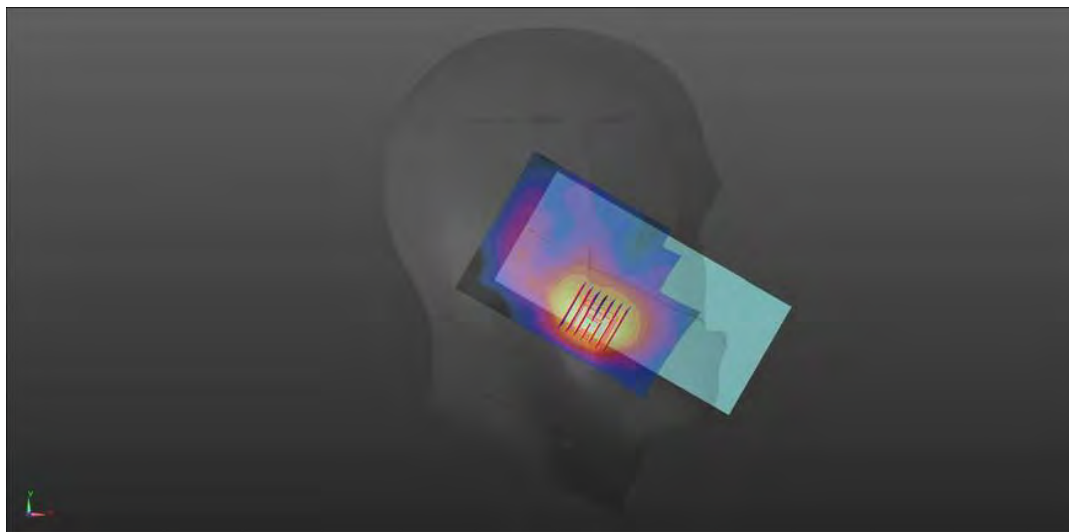

#10.

Date: 07/26/2024

LTE Band 12_10M_QPSK_1RB#25_Right Cheek_0mm_Ch23130

Communication System: UID 0, LTE (0); Frequency: 711.0 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 711.0$ MHz; $\sigma = 0.858$ S/m; $\epsilon_r = 43.643$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 – SN7624; ConvF(10.58, 10.58, 10.58); Calibrated: Sep. 06, 2023;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn428; Calibrated: Aug.30,2023;
- Phantom: Twin-SAM V8.0 ; Type: QD000P40CD; Serial: 1802;
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Area Scan (71x91x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.404 W/kg



Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 8.261 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.625W/kg

SAR(1 g) = 0.302 W/kg; SAR(10 g) = 0.174 W/kg

Maximum value of SAR (measured) = 0.398 W/Kg

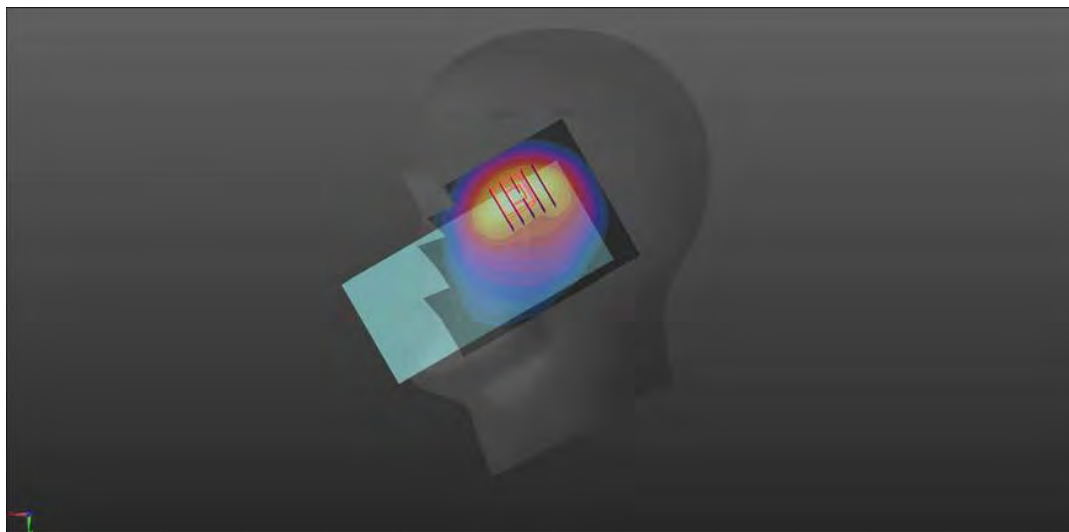

#11.

Date: 08/03/2024

LTE Band 41_20M_QPSK_1RB#49_Left Cheek_0mm_Ch40140

Communication System: UID 0, LTE (0); Frequency: 2545.0 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): = 2545.0 MHz; $\sigma = 1.900$ S/m; $\epsilon_r = 40.307$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 – SN7624; ConvF(7.66, 7.66, 7.66); Calibrated: Sep. 06, 2023;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn428; Calibrated: Aug.30,2023;
- Phantom: Twin-SAM V8.0 ; Type: QD000P40CD; Serial: 1802;
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Area Scan (91x111x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.583 W/kg



Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.547 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.758 W/kg

SAR(1 g) = 0.314 W/kg; SAR(10 g) = 0.145 W/kg

Maximum value of SAR (measured) = 0.545 W/Kg

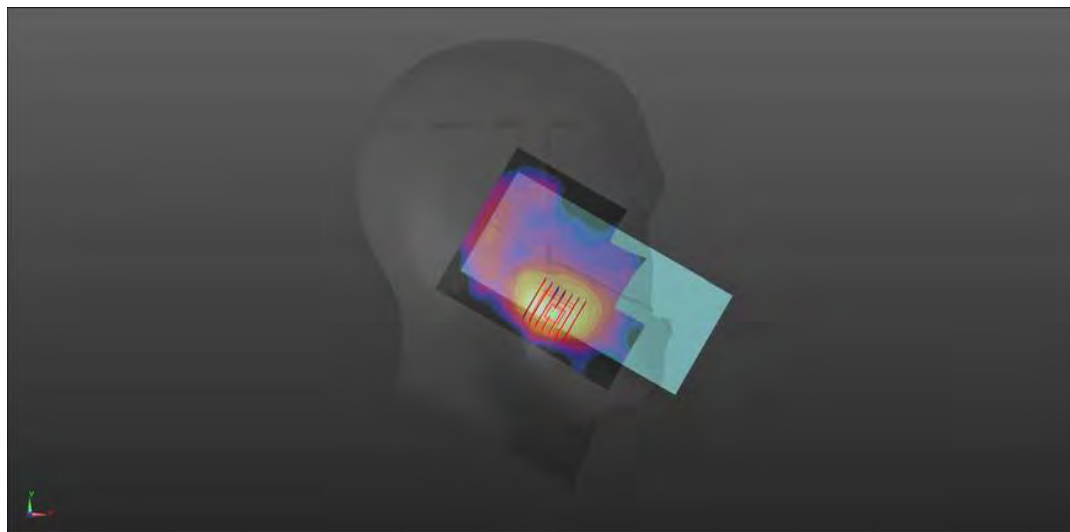

#12.

Date: 08/19/2024

5G NR n5_20Mhz_DFT-S-QPSK_1RB_1 Offset_Right Cheek_0mm_Ch167300

Communication System: UID 0, 5G NR (0); Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 836.5$ MHz; $\sigma = 0.927$ S/m; $\epsilon_r = 41.820$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 – SN7624; ConvF(10.19, 10.19, 10.19); Calibrated: Sep. 06, 2023;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn428; Calibrated: Aug.30,2023;
- Phantom: Twin-SAM V8.0 ; Type: QD000P40CD; Serial: 1802;
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Area Scan (71x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.01 W/kg



Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.25 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 1.25 W/kg

SAR(1 g) = 0.548 W/kg; SAR(10 g) = 0.332 W/kg

Maximum value of SAR (measured) = 1.05 W/Kg

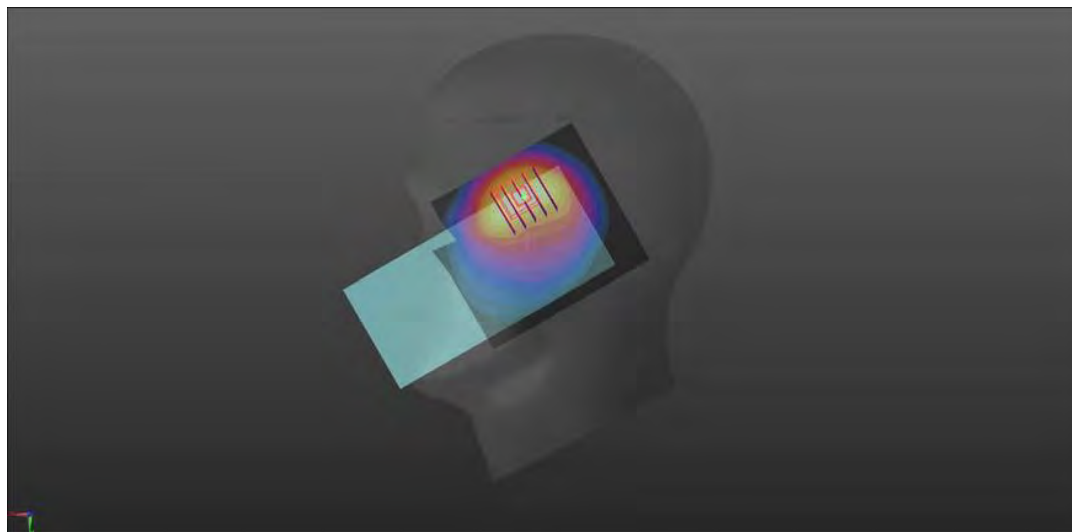

#13.

Date: 08/20/2024

5G NR n7_20Mhz_DFT-S-QPSK_1RB_49Offset_Right Cheek_0mm_Ch502000

Communication System: UID 0, 5G NR (0); Frequency: 2510.0 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2510.0$ MHz; $\sigma = 1.924$ S/m; $\epsilon_r = 38.953$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 – SN7624; ConvF(7.66, 7.66, 7.66); Calibrated: Sep. 06, 2023;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn428; Calibrated: Aug.30,2023;
- Phantom: Twin-SAM V8.0 ; Type: QD000P40CD; Serial: 1802;
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Area Scan (91x101x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.561 W/kg



Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.35 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.886 W/kg

SAR(1 g) = 0.402 W/kg; SAR(10 g) = 0.218 W/kg

Maximum value of SAR (measured) = 1.05 W/Kg

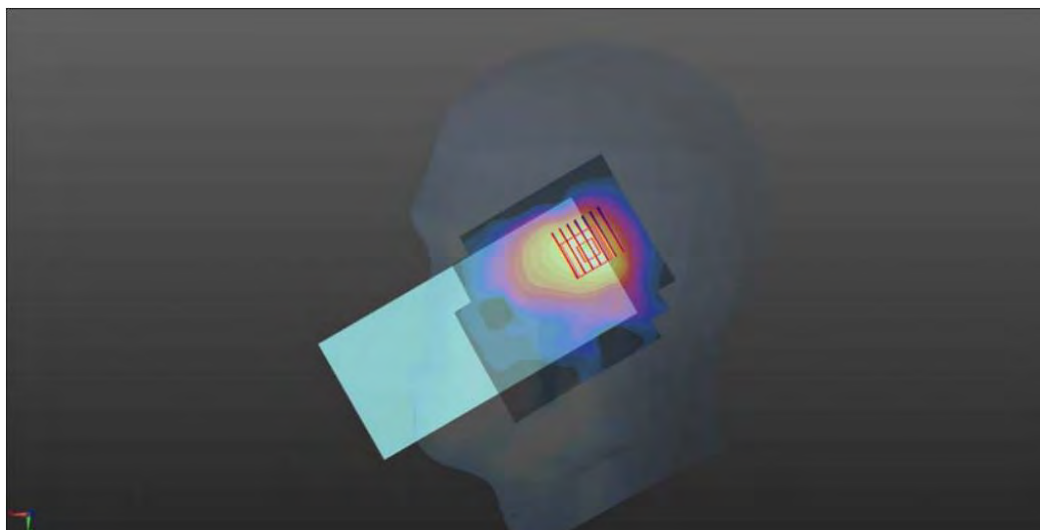

#14.

Date: 08/20/2024

5G NR n41_100Mhz_DFT-S-BPSK_1RB_1Offset_Left Cheek_0mm_Ch509202

Communication System: UID 0, 5G NR (0); Frequency: 2546.01 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2546.01$ MHz; $\sigma = 1.902$ S/m; $\epsilon_r = 37.869$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 – SN7624; ConvF(7.66, 7.66, 7.66); Calibrated: Sep. 06, 2023;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn428; Calibrated: Aug.30,2023;
- Phantom: Twin-SAM V8.0 ; Type: QD000P40CD; Serial: 1802;
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Area Scan (91x111x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.441 W/kg



Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.698 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.711 W/kg

SAR(1 g) = 0.305 W/kg; SAR(10 g) = 0.196 W/kg

Maximum value of SAR (measured) = 1.05 W/Kg

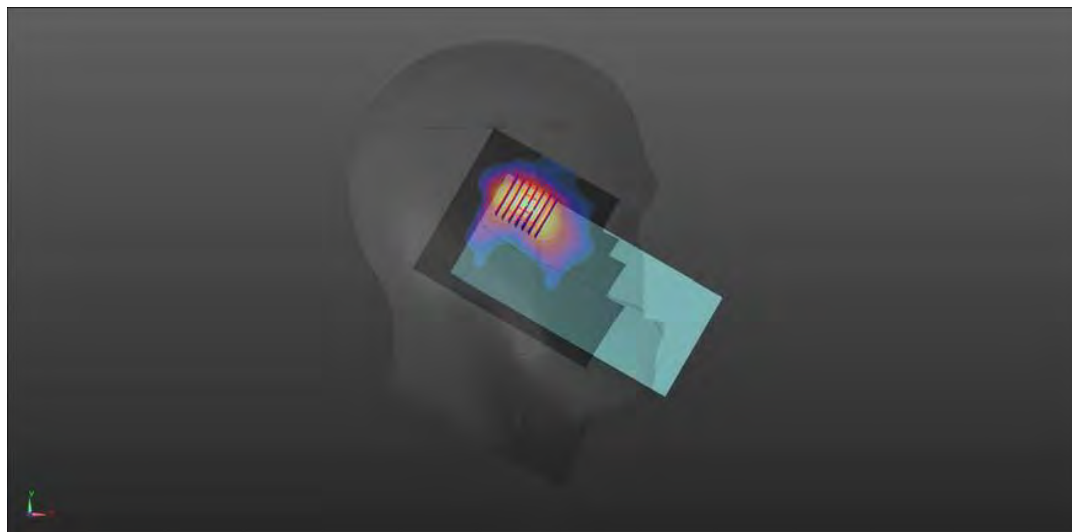

#15.

Date: 08/22/2024

5G NR n77L_100Mhz_DFT-S-QPSK_1RB_217Offset_Left Cheek_0mm_Ch633334

Communication System: UID 0, 5G NR (0); Frequency: 3500.01 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 3500.01$ MHz; $\sigma = 2.795$ S/m; $\epsilon_r = 37.373$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 – SN7624; ConvF(7.20, 7.20, 7.20); Calibrated: Sep. 06, 2023;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn428; Calibrated: Aug.30,2023;
- Phantom: Twin-SAM V8.0 ; Type: QD000P40CD; Serial: 1802;
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Area Scan (91x111x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.585 W/kg



Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.365 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.663 W/kg

SAR(1 g) = 0.312 W/kg; SAR(10 g) = 0.201 W/kg

Maximum value of SAR (measured) = 0.641 W/Kg

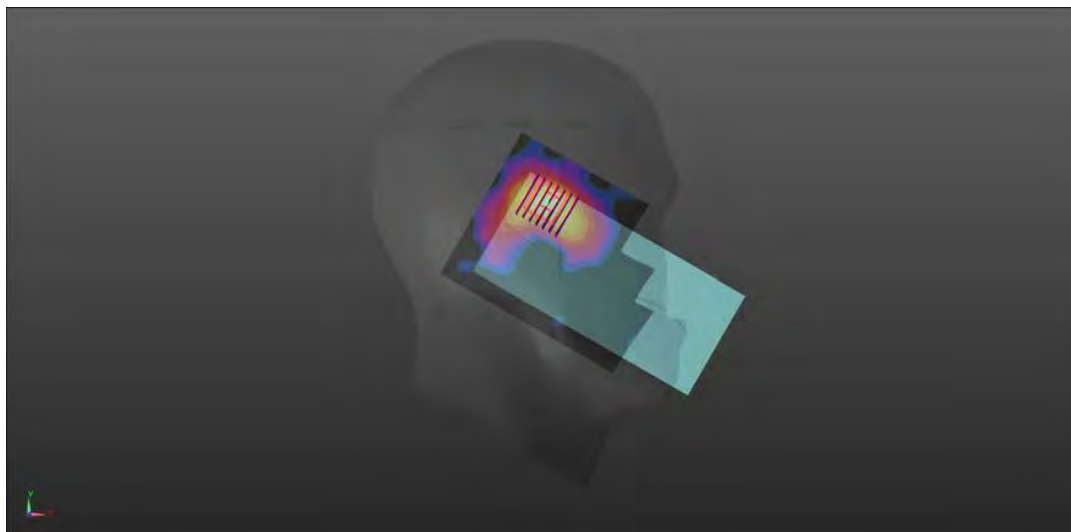

#16.

Date: 08/23/2024

5G NR n77H_100Mhz_DFT-S-QPSK_1RB_1Offset_Left Cheek_0mm_Ch656000

Communication System: UID 0, 5G NR (0); Frequency: 3840.0 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 3840.0$ MHz; $\sigma = 3.445$ S/m; $\epsilon_r = 37.909$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 – SN7624; ConvF(6.85, 6.85, 6.85); Calibrated: Sep. 06, 2023;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn428; Calibrated: Aug.30,2023;
- Phantom: Twin-SAM V8.0 ; Type: QD000P40CD; Serial: 1802;
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Area Scan (91x111x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.625 W/kg



Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.541V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.663 W/kg

SAR(1 g) = 0.345 W/kg; SAR(10 g) = 0.217 W/kg

Maximum value of SAR (measured) = 0.621 W/Kg

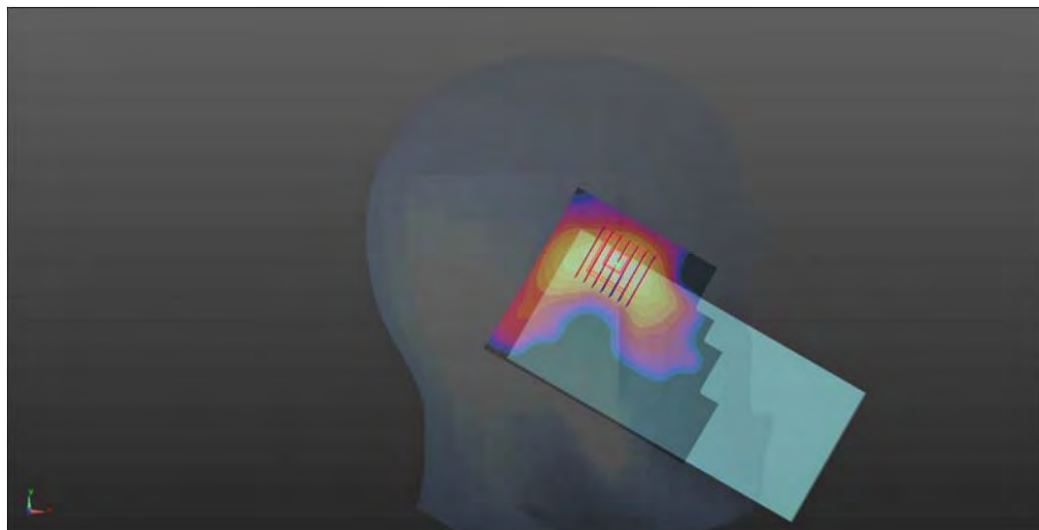

#17.

Date: 08/05/2024

WLAN2.4GHz_802.11b 1Mbps_Left Cheek_0mm_Ch06-ANT0

Communication System: UID 0, WIFI (0); Frequency: 2437.0 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2437.0$ MHz; $\sigma = 1.744$ S/m; $\epsilon_r = 39.588$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 – SN7624; ConvF(7.85, 7.85, 7.85); Calibrated: Sep. 06, 2023;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn428; Calibrated: Aug.30,2023;
- Phantom: Twin-SAM V8.0 ; Type: QD000P40CD; Serial: 1802;
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Area Scan (91x101x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.425 W/kg



Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.635 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.641 W/kg

SAR(1 g) = 0.295 W/kg; SAR(10 g) = 0.134 W/kg

Maximum value of SAR (measured) = 0.411 W/Kg

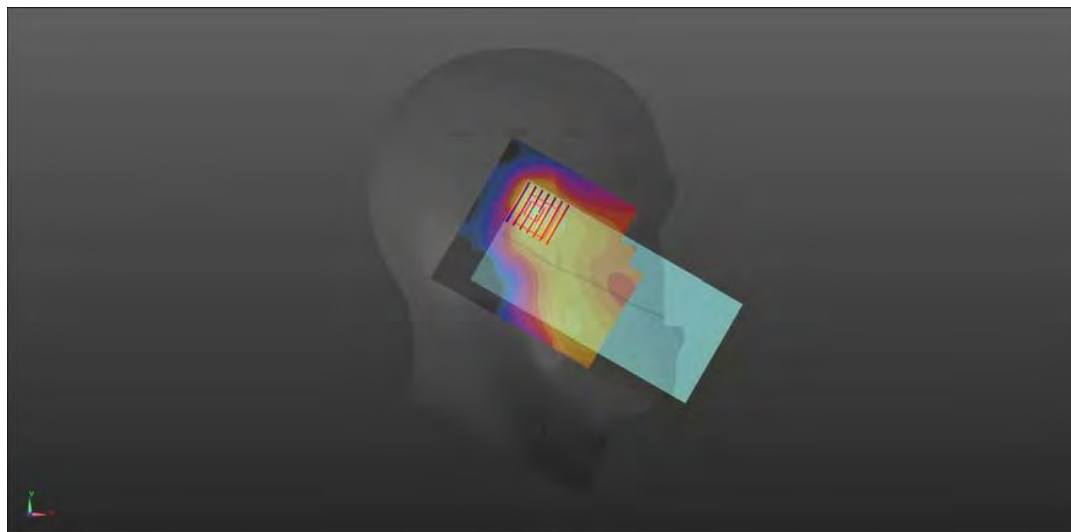

#18.

Date: 08/06/2024

WLAN5.2GHz_802.11a MCS0_Left Cheek_0mm_Ch40 Ant0

Communication System: UID 0, WIFI (0); Frequency: 5200 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 5200$ MHz; $\sigma = 4.622$ S/m; $\epsilon_r = 36.391$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 – SN7624; ConvF(5.55, 5.55, 5.55); Calibrated: Sep. 06, 2023;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn428; Calibrated: Aug.30,2023;
- Phantom: Twin-SAM V8.0 ; Type: QD000P40CD; Serial: 1802;
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Area Scan (101x111x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.574 W/kg



Zoom Scan (8x8x15)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 1.023 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.886 W/kg

SAR(1 g) = 0.241 W/kg; SAR(10 g) = 0.103 W/kg

Maximum value of SAR (measured) = 0.561 W/Kg

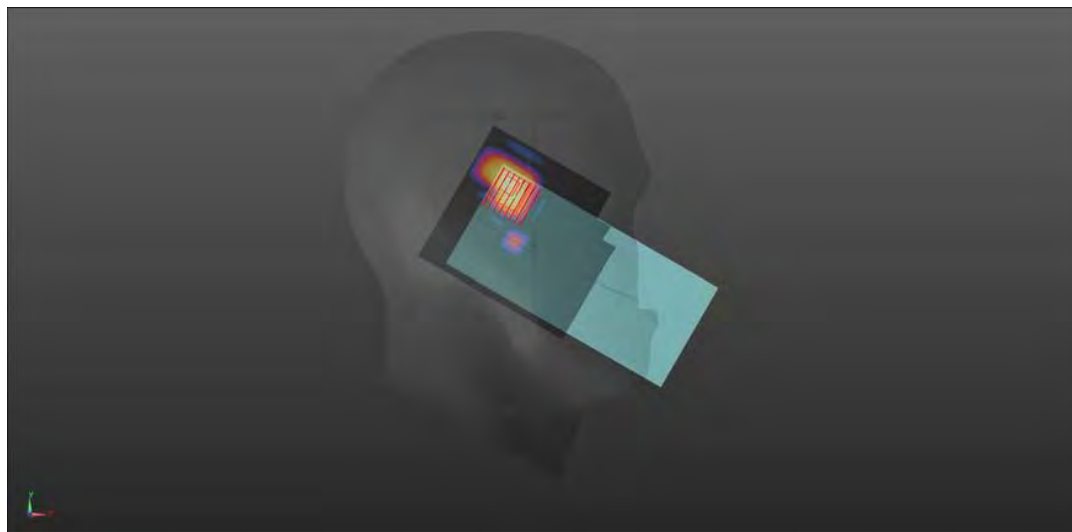

#19.

Date: 08/07/2024

WLAN5.8GHz_802.11ax(HE20) MCS0_Left Cheek_0mm_Ch157 Ant0

Communication System: UID 0, WIFI (0); Frequency: 5785 MHz;Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 5785$ MHz; $\sigma = 5.199$ S/m; $\epsilon_r = 35.548$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 – SN7624; ConvF(4.98, 4.98, 4.98); Calibrated: Sep. 06, 2023;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn428; Calibrated: Aug.30,2023;
- Phantom: Twin-SAM V8.0 ; Type: QD000P40CD; Serial: 1802;
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Area Scan (101x111x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.622 W/kg



Zoom Scan (8x8x15)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 1.278 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 3.02 W/kg

SAR(1 g) = 0.274 W/kg; SAR(10 g) = 0.111 W/kg

Maximum value of SAR (measured) = 0.725 W/Kg

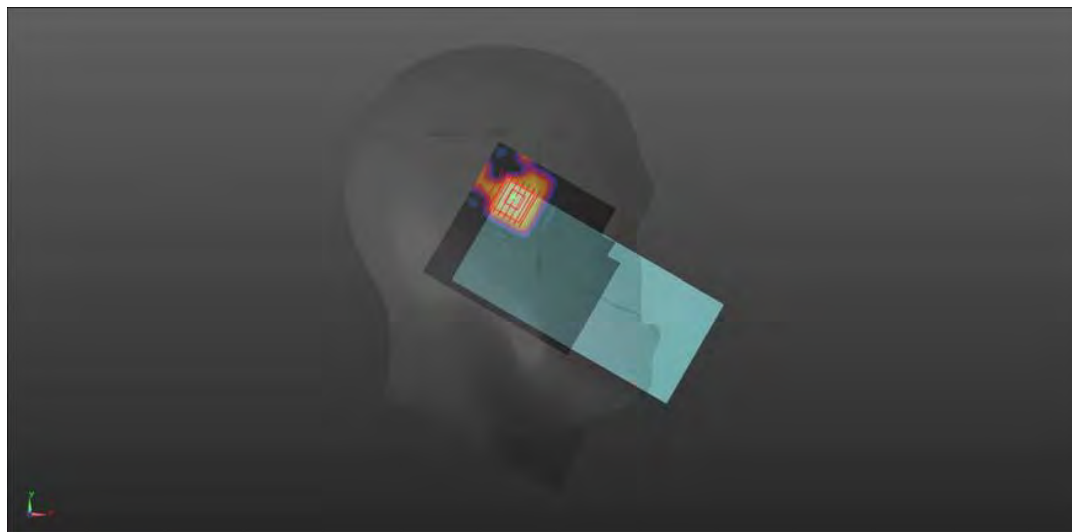

#20.

Date: 07/30/2024

GPRS850_4Tx slots _Back Side_CH190_10mm

Communication System: UID 0, GSM (0); Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.939$ S/m; $\epsilon_r = 40.052$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7624; ConvF(10.19, 10.19, 10.19); Calibrated: Sep. 06, 2023;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn428; Calibrated: Aug.30,2023;
- Phantom: Twin-SAM V8.0 ; Type: QD000P40CD; Serial: 1802;
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Area Scan (71x121x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.274 W/Kg



Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.752 V/m; Power Drift =0.15 dB

Peak SAR (extrapolated) = 0.377 W/kg

SAR(1 g) = 0.201 W/Kg; SAR(10 g) = 0.109 W/Kg

Maximum value of SAR (measured) = 0.273 W/Kg

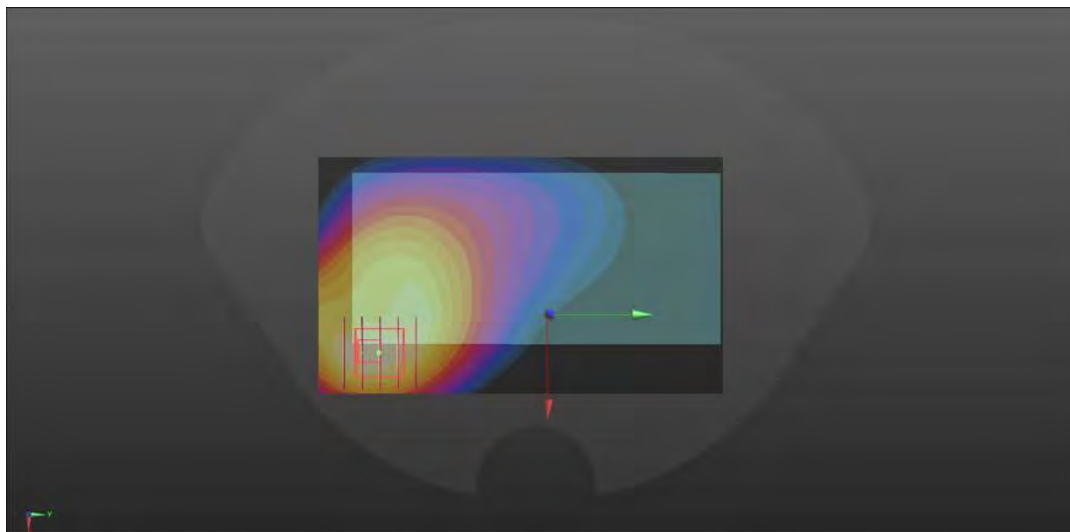

#21.

Date: 08/01/2024

GPRS 1900_4Tx slots_Back Side_10mm_CH512

Communication System: UID 0, GSM (0); Frequency: 1850.2 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1850.2$ MHz; $\sigma = 1.411$ S/m; $\epsilon_r = 40.788$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7624; ConvF(8.35, 8.35, 8.35); Calibrated: Sep. 06, 2023;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn428; Calibrated: Aug.30,2023;
- Phantom: Twin-SAM V8.0 ; Type: QD000P40CD; Serial: 1802;
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Area Scan (71x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.264 W/Kg



Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.552 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.369 W/kg

SAR(1 g) = 0.198 W/Kg; SAR(10 g) = 0.110 W/Kg

Maximum value of SAR (measured) = 0.268 W/Kg

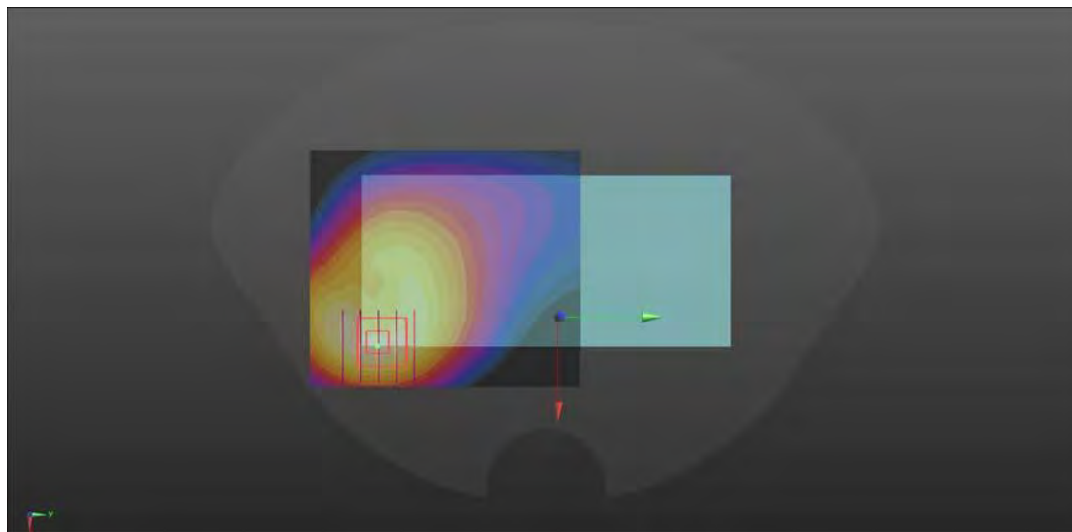

#22.

Date: 08/01/2024

WCDMA II_RMC 12.2Kbps_Back Side_10mm_Ch9538

Communication System: UID 0, Generic WCDMA (0); Frequency: 1907.6 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1907.6$ MHz; $\sigma = 1.429$ S/m; $\epsilon_r = 39.444$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7624; ConvF(8.35, 8.35, 8.35); Calibrated: Sep. 06, 2023;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn428; Calibrated: Aug.30,2023;
- Phantom: Twin-SAM V8.0 ; Type: QD000P40CD; Serial: 1802;
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Area Scan (71x91x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.218 W/Kg



Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.36 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.265 W/kg

SAR(1 g) = 0.159 W/Kg; SAR(10 g) = 0.095 W/Kg

Maximum value of SAR (measured) = 0.211 W/Kg

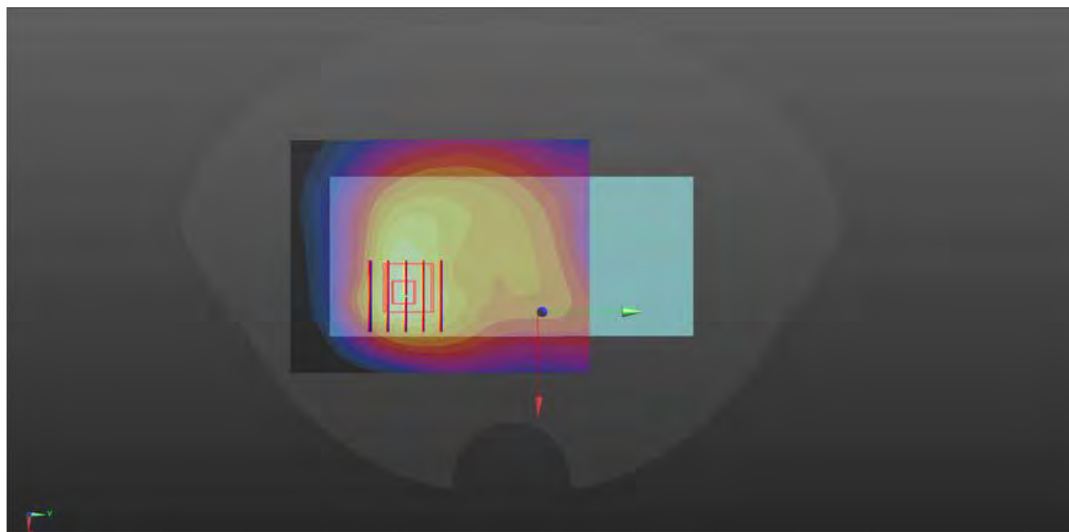

#23.

Date: 07/31/2024

WCDMA IV_RMC 12.2Kbps_Back Side_10mm_Ch1513

Communication System: UID 0, Generic WCDMA (0); Frequency: 1752.6 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1752.6$ MHz; $\sigma = 1.363$ S/m; $\epsilon_r = 39.306$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7624; ConvF(8.66, 8.66, 8.66); Calibrated: Sep. 06, 2023;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn428; Calibrated: Aug.30,2023;
- Phantom: Twin-SAM V8.0 ; Type: QD000P40CD; Serial: 1802;
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Area Scan (71x91x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.230 W/Kg



Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.936 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.289 W/Kg

SAR(1 g) = 0.147 W/Kg; SAR(10 g) = 0.088 W/Kg

Maximum value of SAR (measured) = 0.221 W/Kg

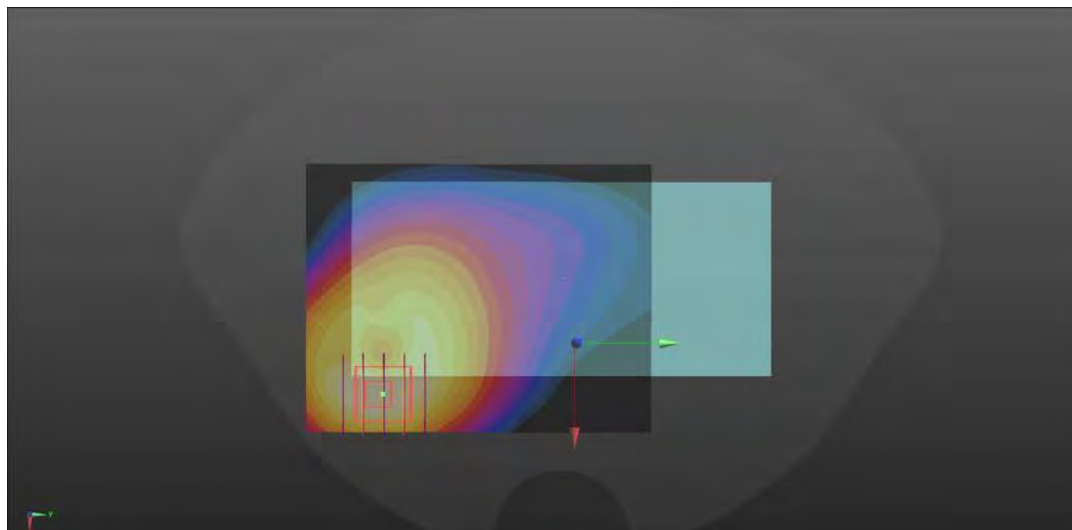

#24.

Date: 07/30/2024

WCDMA V_RMC 12.2Kbps_Back Side_10mm_Ch4233

Communication System: UID 0, Generic WCDMA (0); Frequency: 846.6 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 846.6$ MHz; $\sigma = 0.898$ S/m; $\epsilon_r = 40.674$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 – SN7624; ConvF(10.19, 10.19, 10.19); Calibrated: Sep. 06, 2023;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn428; Calibrated: Aug.30,2023;
- Phantom: Twin-SAM V8.0 ; Type: QD000P40CD; Serial: 1802;
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Area Scan (71x91x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.173 W/Kg



Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.666 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.199 W/Kg

SAR(1 g) = 0.125 W/Kg; SAR(10 g) = 0.081 W/Kg

Maximum value of SAR (measured) = 0.164 W/Kg

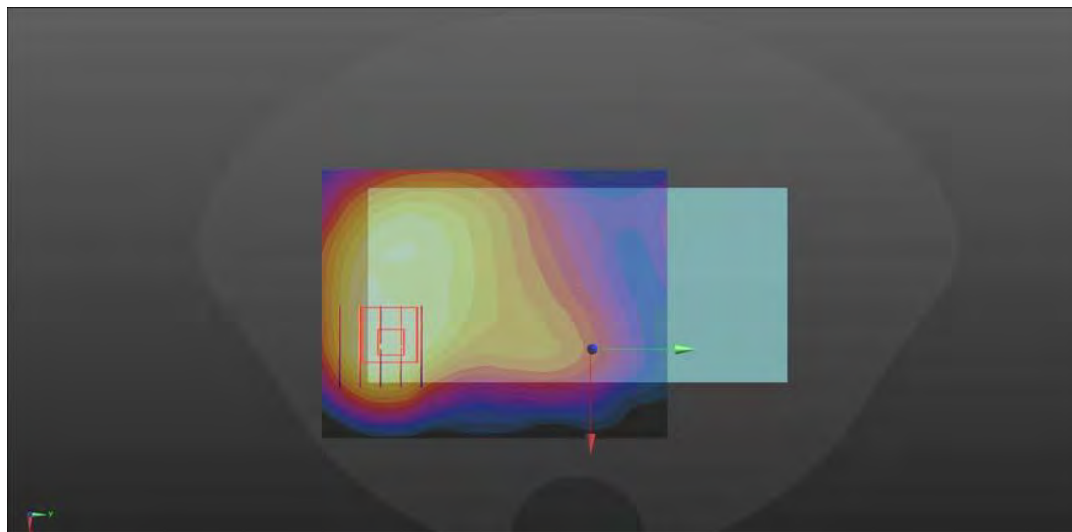

#25.

Date: 08/01/2024

LTE Band 2_10M_QPSK_1RB#49_Back Side_10mm_Ch19100

Communication System: UID 0, Generic LTE (0); Frequency: 1900.0 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1900.0$ MHz; $\sigma = 1.452$ S/m; $\epsilon_r = 38.544$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7624; ConvF(8.35, 8.35, 8.35); Calibrated: Sep. 06, 2023;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn428; Calibrated: Aug.30,2023;
- Phantom: Twin-SAM V8.0 ; Type: QD000P40CD; Serial: 1802;
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Area Scan (71x91x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.253 W/Kg



Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.015 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.305 W/kg

SAR(1 g) = 0.162 W/Kg; SAR(10 g) = 0.091 W/Kg

Maximum value of SAR (measured) = 0.231 W/Kg

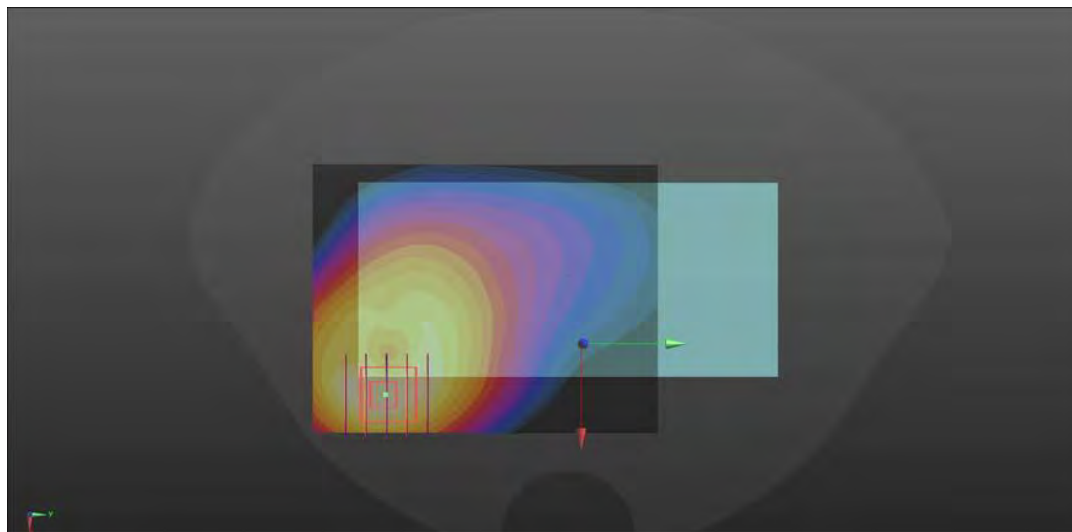

#26.

Date: 07/31/2024

LTE Band 4_10M_QPSK_1RB#0_Back Side_10mm_Ch20600

Communication System: UID 0, Generic LTE (0); Frequency: 1747.5 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1747.5$ MHz; $\sigma = 1.318$ S/m; $\epsilon_r = 40.220$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7624; ConvF(8.66, 8.66, 8.66); Calibrated: Sep. 06, 2023;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn428; Calibrated: Aug.30,2023;
- Phantom: Twin-SAM V8.0 ; Type: QD000P40CD; Serial: 1802;
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Area Scan (71x121x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.246 W/Kg



Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.255 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.310 W/kg

SAR(1 g) = 0.178 W/Kg; SAR(10 g) = 0.095 W/Kg

Maximum value of SAR (measured) = 0.231 W/Kg

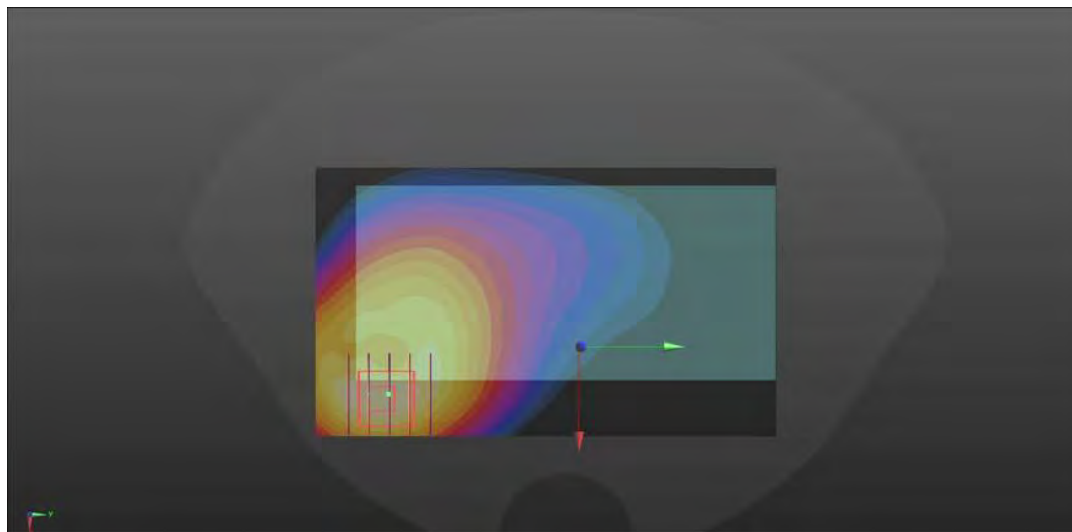

#27.

Date: 07/30/2024

LTE Band 5_10M_QPSK_1RB#0_Back Side_10mm_Ch20450

Communication System: UID 0, Generic LTE (0); Frequency: 829.0 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 829.0$ MHz; $\sigma = 0.867$ S/m; $\epsilon_r = 40.525$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7624; ConvF(10.19, 10.19, 10.19); Calibrated: Sep. 06, 2023;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn428; Calibrated: Aug.30,2023;
- Phantom: Twin-SAM V8.0 ; Type: QD000P40CD; Serial: 1802;
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Area Scan (71x121x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.563 W/Kg



Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 9.523 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.725 W/kg

SAR(1 g) = 0.342 W/Kg; SAR(10 g) = 0.235 W/Kg

Maximum value of SAR (measured) = 0.485 W/Kg

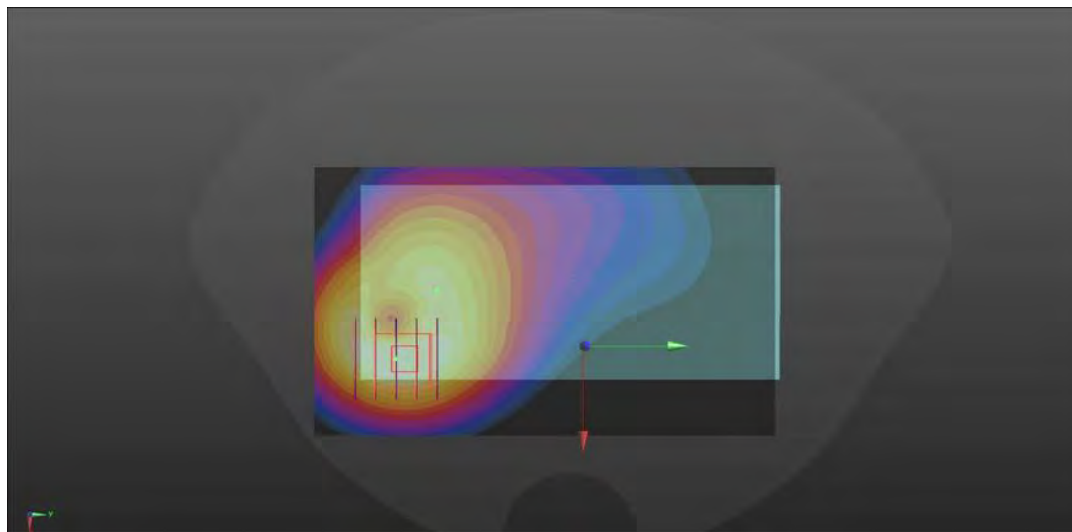

#28.

Date: 08/03/2024

LTE Band 7_20M_QPSK_1RB#99_Back Side_10mm_Ch20850

Communication System: UID 0, Generic LTE (0); Frequency: 2510.0 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2510.0$ MHz; $\sigma = 1.915$ S/m; $\epsilon_r = 40.139$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 – SN7624; ConvF(7.66, 7.66, 7.66); Calibrated: Sep. 06, 2023;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn428; Calibrated: Aug.30,2023;
- Phantom: Twin-SAM V8.0 ; Type: QD000P40CD; Serial: 1802;
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Area Scan (91x101x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.534 W/Kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.256 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.685 W/kg

SAR(1 g) = 0.377 W/kg; SAR(10 g) = 0.198 W/kg

Maximum value of SAR (measured) = 0.530 W/Kg

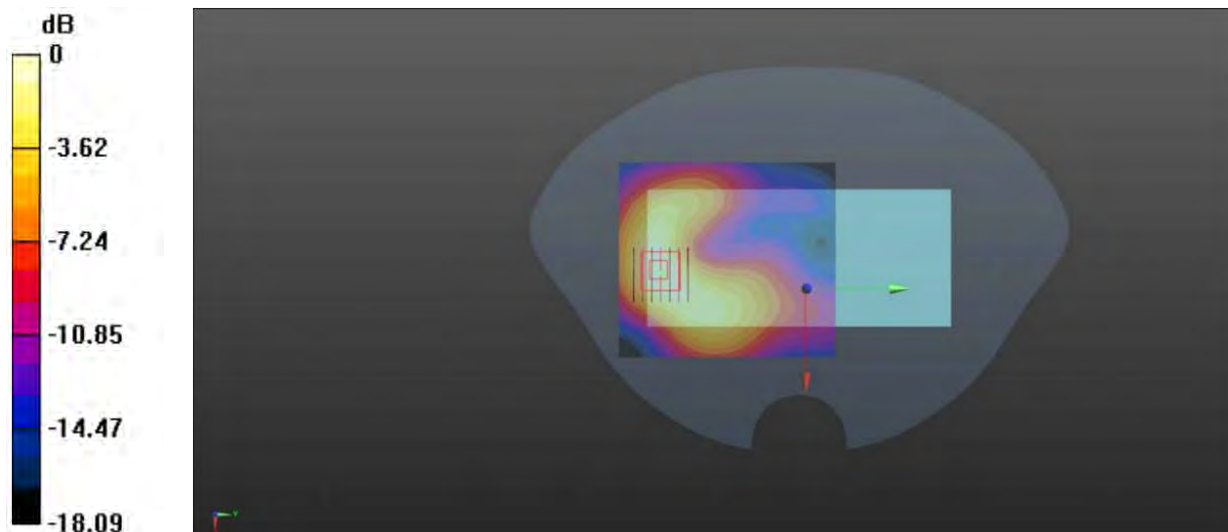

#29.

Date: 07/26/2024

LTE Band 12_20M_QPSK_1RB#25_Back Side_10mm_Ch23130

Communication System: UID 0, Generic LTE (0); Frequency: 711.0 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 711.0$ MHz; $\sigma = 0.825$ S/m; $\epsilon_r = 41.693$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7624; ConvF(10.19, 10.19, 10.19); Calibrated: Sep. 06, 2023;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn428; Calibrated: Aug.30,2023;
- Phantom: Twin-SAM V8.0 ; Type: QD000P40CD; Serial: 1802;
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Area Scan (71x121x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.378 W/kg



Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 9.425 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 1.09 W/kg

SAR(1 g) = 0.268 W/kg; SAR(10 g) = 0.163 W/kg

Maximum value of SAR (measured) = 0.369 W/Kg

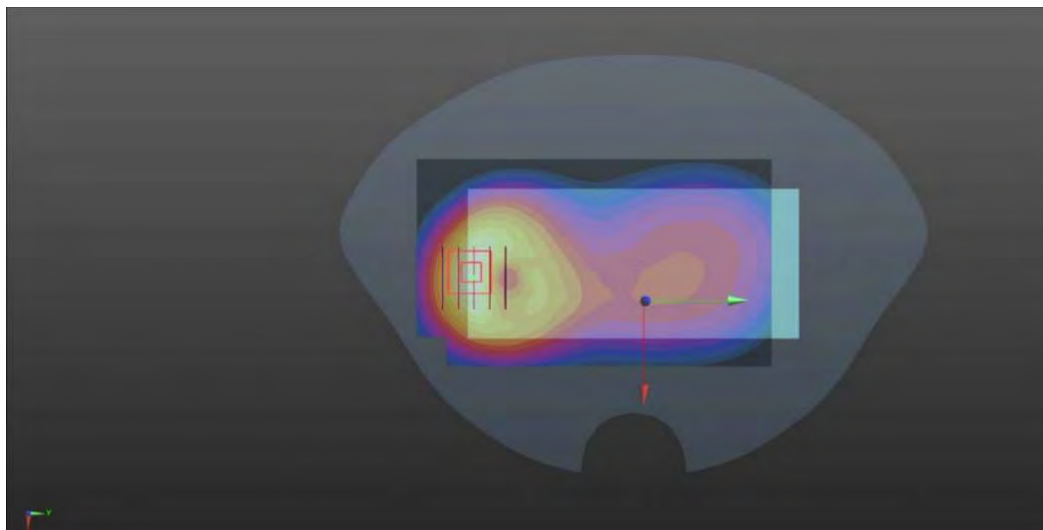

#30.

Date: 08/03/2024

LTE Band 41_20M_QPSK_1RB#49_Back Side_10mm_Ch40140

Communication System: UID 0, Generic LTE (0); Frequency: 2545.0 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2545.0$ MHz; $\sigma = 1.947$ S/m; $\epsilon_r = 39.714$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7624; ConvF(7.66, 7.66, 7.66); Calibrated: Sep. 06, 2023;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn428; Calibrated: Aug.30,2023;
- Phantom: Twin-SAM V8.0 ; Type: QD000P40CD; Serial: 1802;
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Area Scan (81x91x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.535 W/Kg



Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.478 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.874 W/kg

SAR(1 g) = 0.411 W/Kg; SAR(10 g) = 0.274 W/Kg

Maximum value of SAR (measured) = 0.531 W/Kg

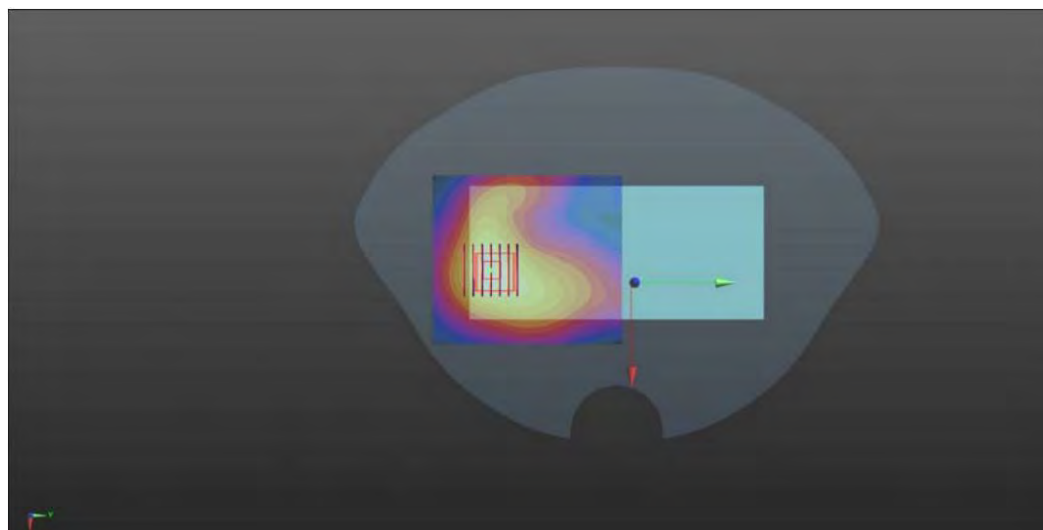

#31.

Date: 08/19/2024

5G NR n5_20Mhz_DFT-S-QPSK_1RB_1Offset_Back Side_10mm_ Ch167300

Communication System: UID 0, 5G NR (0); Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 836.5$ MHz; $\sigma = 0.896$ S/m; $\epsilon_r = 41.255$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 – SN7624; ConvF(10.19, 10.19, 10.19); Calibrated: Sep. 06, 2023;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn428; Calibrated: Aug.30,2023;
- Phantom: Twin-SAM V8.0 ; Type: QD000P40CD; Serial: 1802;
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Area Scan (71x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.171 W/kg



Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.236 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.285 W/kg

SAR(1 g) = 0.135 W/kg; SAR(10 g) = 0.079 W/kg

Maximum value of SAR (measured) = 0.164 W/Kg

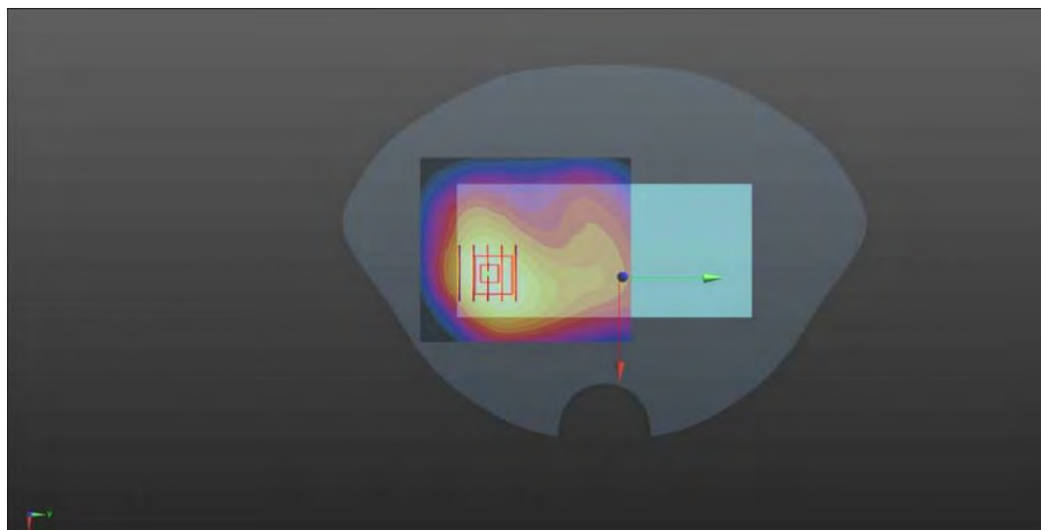

#32.

Date: 08/20/2024

5G NR n7_20Mhz_DFT-S-QPSK_1RB_49Offset_Back Side_10mm_ Ch502000

Communication System: UID 0, 5G NR (0); Frequency: 2510.0 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2510.0$ MHz; $\sigma = 1.880$ S/m; $\epsilon_r = 40.548$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 – SN7624; ConvF(7.66, 7.66, 7.66); Calibrated: Sep. 06, 2023;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn428; Calibrated: Aug.30,2023;
- Phantom: Twin-SAM V8.0 ; Type: QD000P40CD; Serial: 1802;
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Area Scan (81x81x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.621 W/Kg



Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.236 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.725 W/kg

SAR(1 g) = 0.412 W/kg; SAR(10 g) = 0.253 W/kg

Maximum value of SAR (measured) = 0.611 W/Kg

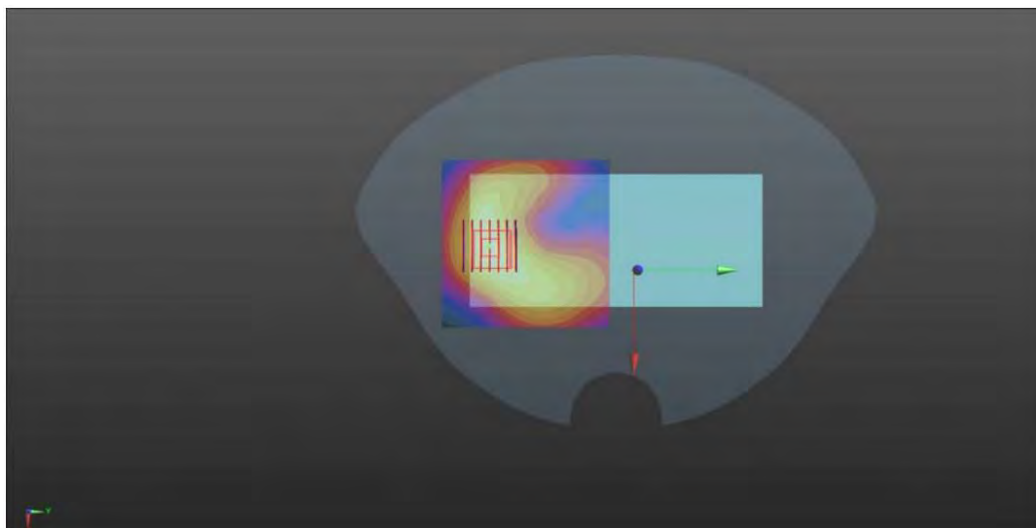

#33.

Date: 08/20/2024

5G NR n41_100Mhz_DFT-S-BPSK_1RB_1Offset_Back Side_10mm_ Ch509202

Communication System: UID 0, 5G NR (0); Frequency: 2546.01 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2546.01$ MHz; $\sigma = 1.932$ S/m; $\epsilon_r = 39.417$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 – SN7624; ConvF(7.66, 7.66, 7.66); Calibrated: Sep. 06, 2023;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn428; Calibrated: Aug.30,2023;
- Phantom: Twin-SAM V8.0 ; Type: QD000P40CD; Serial: 1802;
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Area Scan (81x111x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.325 W/Kg



Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.351 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.523 W/kg

SAR(1 g) = 0.241 W/Kg; SAR(10 g) = 0.133 W/Kg

Maximum value of SAR (measured) = 0.314 W/Kg

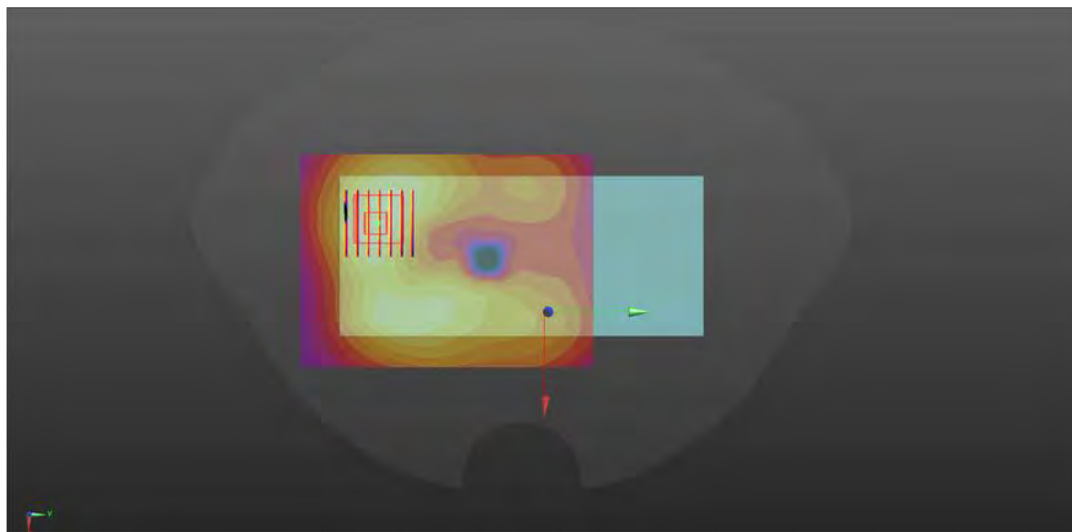

#34.

Date: 08/22/2024

5G NR n77L_20Mhz_DFT-S-QPSK_1RB_217Offset_Left Side_10mm_ Ch633334

Communication System: UID 0, 5G NR (0); Frequency: 3500.01 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 3500.01$ MHz; $\sigma = 2.886$ S/m; $\epsilon_r = 37.434$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7624; ConvF(7.20, 7.20, 7.20); Calibrated: Sep. 06, 2023;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn428; Calibrated: Aug.30,2023;
- Phantom: Twin-SAM V8.0 ; Type: QD000P40CD; Serial: 1802;
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Area Scan (41x111x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.733 W/Kg



Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 5.628 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 1.14 W/kg

SAR(1 g) = 0.478 W/Kg; SAR(10 g) = 0.236 W/Kg

Maximum value of SAR (measured) = 0.745 W/Kg

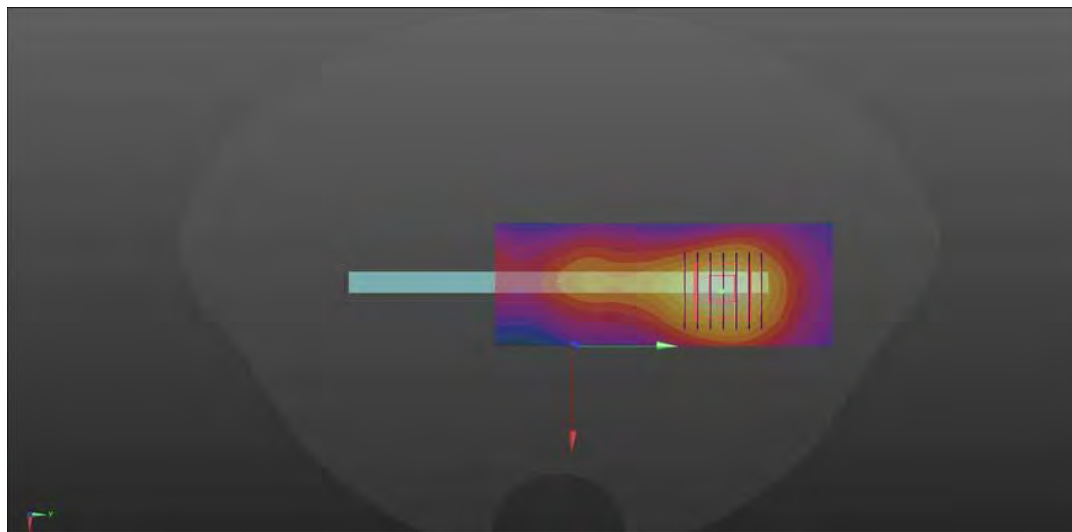

#35.

Date: 08/23/2024

5G NR n77H_100Mhz_DFT-S-QPSK_1RB_1Offset_Back Side_10mm_ Ch656000

Communication System: UID 0, 5G NR (0); Frequency: 3840.0 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 3840.0$ MHz; $\sigma = 3.373$ S/m; $\epsilon_r = 36.270$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7624; ConvF(6.85, 6.85, 6.85); Calibrated: Sep. 06, 2023;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn428; Calibrated: Aug.30,2023;
- Phantom: Twin-SAM V8.0 ; Type: QD000P40CD; Serial: 1802;
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Area Scan (91x101x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.548 W/Kg



Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.251 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.615 W/kg

SAR(1 g) = 0.405 W/Kg; SAR(10 g) = 0.229 W/Kg

Maximum value of SAR (measured) = 0.511 W/Kg

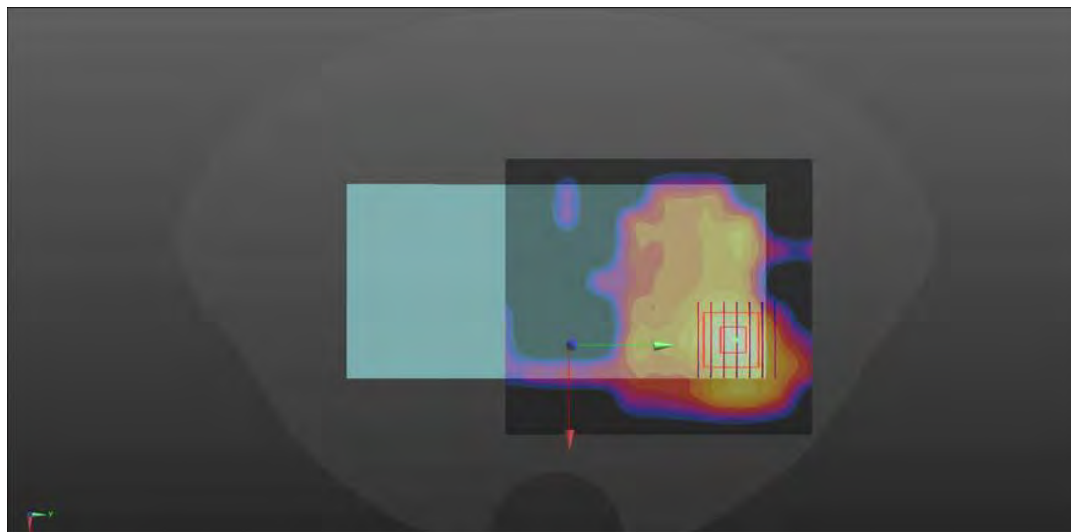

#36.

Date: 08/05/2024

WLAN2.4GHz_802.11b 1Mbps_Back Side_10mm_Ch06 Ant0

Communication System: UID 0, Generic WIFI(0); Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.715$ S/m; $\epsilon_r = 40.207$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7624; ConvF(7.85, 7.85, 7.85); Calibrated: Sep. 06, 2023;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn428; Calibrated: Aug.30,2023;
- Phantom: Twin-SAM V8.0 ; Type: QD000P40CD; Serial: 1802;
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Area Scan (81x91x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.274 W/Kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 1.236 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.431 W/kg

SAR(1 g) = 0.165 W/Kg; SAR(10 g) = 0.078 W/Kg

Maximum value of SAR (measured) = 0.271 W/Kg

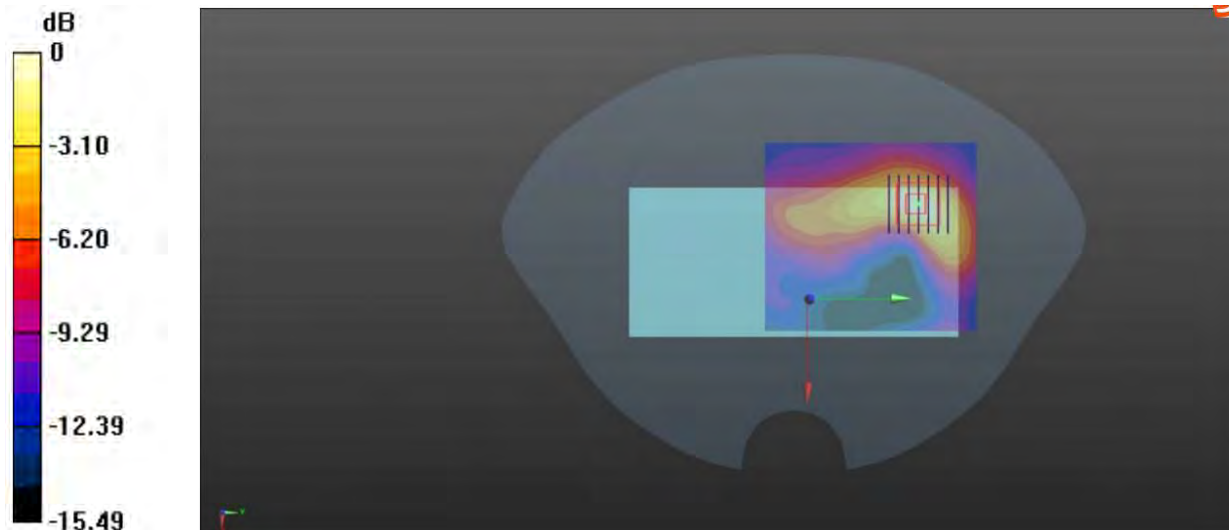

#37.

Date: 08/06/2024

WLAN5.2GHz_802.11a MCS0_Back Side_10mm_Ch40 ANT0

Communication System: UID 0, Generic WIFI(0); Frequency: 5200 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 5200$ MHz; $\sigma = 4.569$ S/m; $\epsilon_r = 36.45$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 – SN7624; ConvF(5.55, 5.55, 5.55); Calibrated: Sep. 06, 2023;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn428; Calibrated: Aug.30,2023;
- Phantom: Twin-SAM V8.0 ; Type: QD000P40CD; Serial: 1802;
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Area Scan (101x121x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.117 W/Kg


Zoom Scan (8x8x15)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 0.251 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.234 W/kg

SAR(1 g) = 0.121 W/Kg; SAR(10 g) = 0.063 W/Kg

Maximum value of SAR (measured) = 0.115 W/Kg

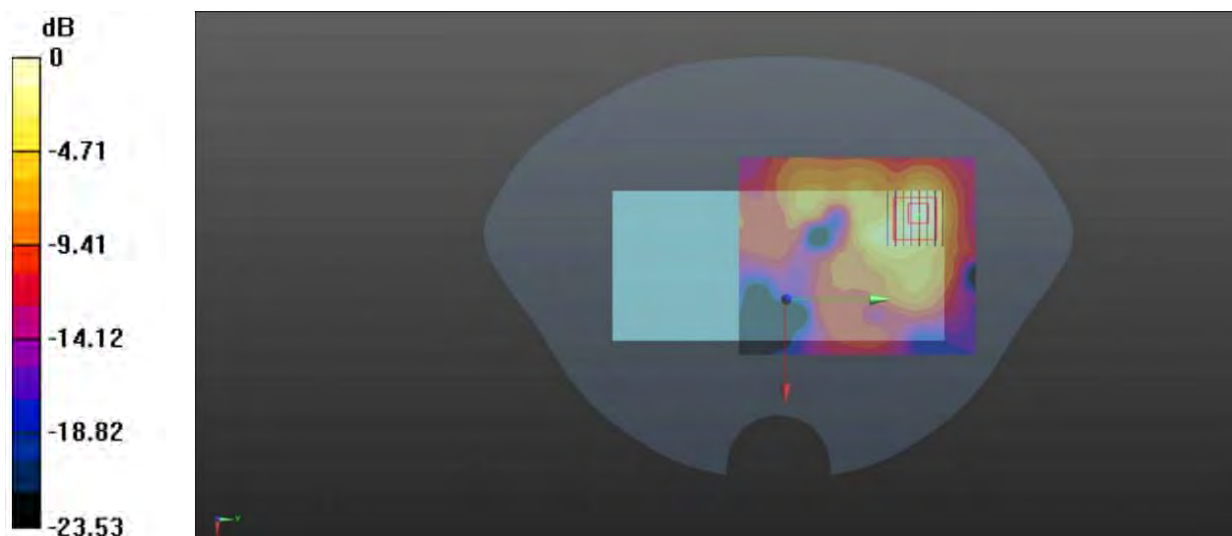

#38.

Date: 08/07/2024

WLAN5.8GHz_802.11ax(HE20) MCS0_Back Side_10mm_Ch157

Communication System: UID 0, Generic WIFI(0); Frequency: 5785 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 5785$ MHz; $\sigma = 5.985$ S/m; $\epsilon_r = 48.710$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 – SN7624; ConvF(4.98, 4.98, 4.98); Calibrated: Sep. 06, 2023;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn428; Calibrated: Aug.30,2023;
- Phantom: Twin-SAM V8.0 ; Type: QD000P40CD; Serial: 1802;
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Area Scan (101x121x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.159 W/Kg


Zoom Scan (8x8x15)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 1.215 V/m; Power Drift = 0.05 dB


Peak SAR (extrapolated) = 0.302 W/kg

SAR(1 g) = 0.132 W/Kg; SAR(10 g) = 0.085 W/Kg

Maximum value of SAR (measured) = 0.164 W/Kg

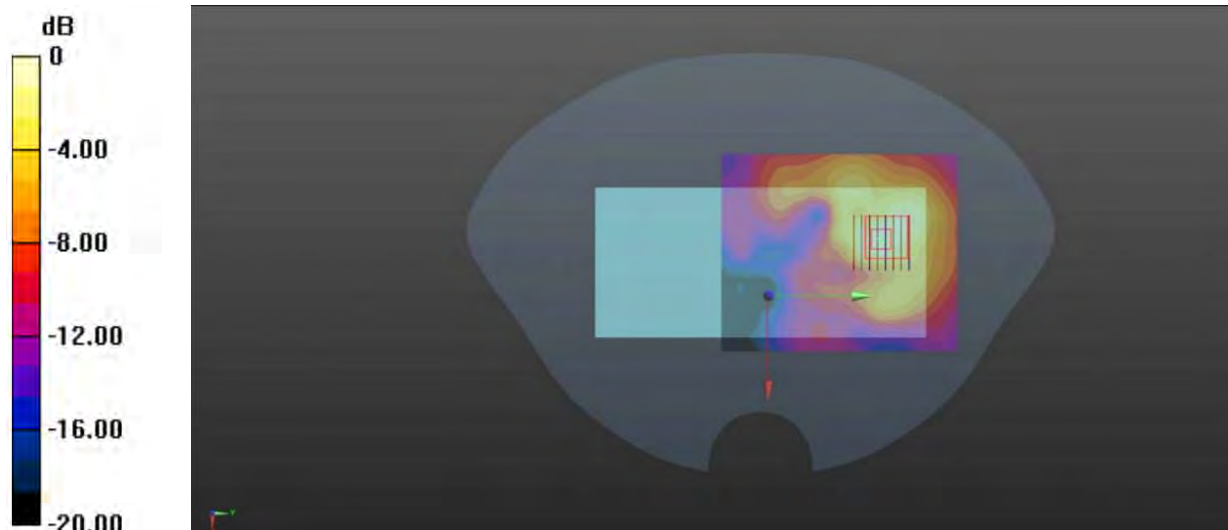

Appendix D. DASY System Calibration Certificate



Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2117
E-mail: emf@caict.ac.cn http://www.caict.ac.cn



中国认可
国际互认
校准
CALIBRATION
CNAS L0570

Client **INNOWAVE**

Certificate No: **J23Z60222**

CALIBRATION CERTIFICATE

Object **EX3DV4 - SN : 7624**

Calibration Procedure(s) **FF-Z11-004-02**
Calibration Procedures for Dosimetric E-field Probes

Calibration date: **September 06, 2023**

This calibration Certificate documents the traceability to national standards, which realize the physical units of measurements(SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature(22±3)°C and humidity<70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date(Calibrated by, Certificate No.)	Scheduled Calibration
Power Meter NRP2	101919	12-Jun-23(CTTL, No.J23X05435)	Jun-24
Power sensor NRP-Z91	101547	12-Jun-23(CTTL, No.J23X05435)	Jun-24
Power sensor NRP-Z91	101548	12-Jun-23(CTTL, No.J23X05435)	Jun-24
Reference 10dBAttenuator	18N50W-10dB	19-Jan-23(CTTL, No.J23X00212)	Jan-25
Reference 20dBAttenuator	18N50W-20dB	19-Jan-23(CTTL, No.J23X00211)	Jan-25
Reference Probe EX3DV4	SN 3846	31-May-23(SPEAG, No.EX-3846_May23)	May-24
DAE4	SN 549	24-Jan-23(SPEAG, No.DAE4-549_Jan23)	Jan-24
DAE4	SN 1744	30-Aug-22(SPEAG, No.DAE4-1744_Aug22)	Aug-23
Secondary Standards	ID #	Cal Date(Calibrated by, Certificate No.)	Scheduled Calibration
SignalGenerator MG3700A	6201052605	12-Jun-23(CTTL, No.J23X05434)	Jun-24
Network Analyzer E5071C	MY46110673	10-Jan-23(CTTL, No.J23X00104)	Jan-24
Reference 10dBAttenuator	BT0520	11-May-23(CTTL, No.J23X04061)	May-25
Reference 20dBAttenuator	BT0267	11-May-23(CTTL, No.J23X04062)	May-25
OCP DAK-3.5	SN 1040	18-Jan-23(SPEAG, No.OCP-DAK3.5-1040_Jan23)	Jan-24

	Name	Function	Signature
Calibrated by:	Yu Zongying	SAR Test Engineer	
Reviewed by:	Lin Hao	SAR Test Engineer	
Approved by:	Qi Dianyuan	SAR Project Leader	

Issued: September 12, 2023

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Certificate No: J23Z60222

Page 1 of 9



Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China
 Tel: +86-10-62304633-2117
 E-mail: emf@caict.ac.cn http://www.caict.ac.cn

Glossary:


TSL	tissue simulating liquid
NORM _{x,y,z}	sensitivity in free space
ConvF	sensitivity in TSL / NORM _{x,y,z}
DCP	diode compression point
CF	crest factor (1/duty_cycle) of the RF signal
A,B,C,D	modulation dependent linearization parameters
Polarization Φ	Φ rotation around probe axis
Polarization θ	θ rotation around an axis that is in the plane normal to probe axis (at measurement center), i $\theta=0$ is normal to probe axis
Connector Angle	information used in DASY system to align probe sensor X to the robot coordinate system

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Measurement procedure for the assessment of Specific Absorption Rate (SAR) from hand-held and body-mounted devices used next to the ear (frequency range of 300 MHz to 6 GHz)", July 2016
- IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Methods Applied and Interpretation of Parameters:

- NORM_{x,y,z}: Assessed for E-field polarization $\theta=0$ ($f \leq 900$ MHz in TEM-cell; $f > 1800$ MHz: waveguide). NORM_{x,y,z} are only intermediate values, i.e., the uncertainties of NORM_{x,y,z} does not effect the E^2 -field uncertainty inside TSL (see below ConvF).
- NORM(f)_{x,y,z} = NORM_{x,y,z} * frequency_response (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of ConvF.
- DCP_{x,y,z}: DCP are numerical linearization parameters assessed based on the data of power sweep (no uncertainty required). DCP does not depend on frequency nor media.
- PAR: PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics.
- A_{x,y,z}; B_{x,y,z}; C_{x,y,z}; VR_{x,y,z}; A,B,C are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- ConvF and Boundary Effect Parameters: Assessed in flat phantom using E-field (or Temperature Transfer Standard for $f \leq 800$ MHz) and inside waveguide using analytical field distributions based on power measurements for $f > 800$ MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty valued are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM_{x,y,z} * ConvF whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from ± 50 MHz to ± 100 MHz.
- Spherical isotropy (3D deviation from isotropy): in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.
- Connector Angle: The angle is assessed using the information gained by determining the NORM_x (no uncertainty required).



Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China
 Tel: +86-10-62304633-2117
 E-mail: emf@caict.ac.cn http://www.caict.ac.cn

DASY/EASY – Parameters of Probe: EX3DV4 – SN:7624

Basic Calibration Parameters

	Sensor X	Sensor Y	Sensor Z	Unc ($k=2$)
Norm($\mu\text{V}/(\text{V}/\text{m})^2$) ^A	0.57	0.59	0.58	$\pm 10.0\%$
DCP(mV) ^B	112.6	113.4	119.4	

Modulation Calibration Parameters

UID	Communication System Name		A dB	B dB· μV	C	D dB	VR mV	Unc ^E ($k=2$)
0	CW	X	0.0	0.0	1.0	0.00	200.3	$\pm 4.7\%$
		Y	0.0	0.0	1.0		212.4	
		Z	0.0	0.0	1.0		202.8	

The reported uncertainty of measurement is stated as the standard uncertainty of Measurement multiplied by the coverage factor $k=2$, which for a normal distribution Corresponds to a coverage probability of approximately 95%.

^A The uncertainties of Norm X, Y, Z do not affect the E^2 -field uncertainty inside TSL (see Page 4).

^B Numerical linearization parameter: uncertainty not required.

^E Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.



Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2117
E-mail: emf@caict.ac.cn <http://www.caict.ac.cn>

DASY/EASY – Parameters of Probe: EX3DV4 – SN:7624


Calibration Parameter Determined in Head Tissue Simulating Media

f [MHz] ^C	Relative Permittivity ^F	Conductivity (S/m) ^F	ConvF X	ConvF Y	ConvF Z	Alpha ^G	Depth ^G (mm)	Unct. (k=2)
750	41.9	0.89	10.58	10.58	10.58	0.20	1.06	± 12.7%
835	41.5	0.90	10.19	10.19	10.19	0.19	1.20	± 12.7%
1750	40.1	1.37	8.66	8.66	8.66	0.21	1.13	± 12.7%
1900	40.0	1.40	8.35	8.35	8.35	0.33	0.91	± 12.7%
2100	39.8	1.49	8.27	8.27	8.27	0.23	1.08	± 12.7%
2300	39.5	1.67	8.13	8.13	8.13	0.58	0.67	± 12.7%
2450	39.2	1.80	7.85	7.85	7.85	0.63	0.66	± 12.7%
2600	39.0	1.96	7.66	7.66	7.66	0.65	0.66	± 12.7%
3500	37.9	2.91	7.20	7.20	7.20	0.34	1.00	± 13.9%
3700	37.7	3.12	7.00	7.00	7.00	0.36	1.07	± 13.9%
3900	37.5	3.32	6.85	6.85	6.85	0.30	1.50	± 13.9%
4100	37.2	3.53	6.78	6.78	6.78	0.30	1.35	± 13.9%
4200	37.1	3.63	6.68	6.68	6.68	0.30	1.45	± 13.9%
4400	36.9	3.84	6.61	6.61	6.61	0.30	1.45	± 13.9%
4600	36.7	4.04	6.47	6.47	6.47	0.40	1.30	± 13.9%
4800	36.4	4.25	6.37	6.37	6.37	0.40	1.40	± 13.9%
4950	36.3	4.40	6.08	6.08	6.08	0.40	1.40	± 13.9%
5250	35.9	4.71	5.55	5.55	5.55	0.40	1.50	± 13.9%
5600	35.5	5.07	4.96	4.96	4.96	0.35	1.70	± 13.9%
5750	35.4	5.22	4.98	4.98	4.98	0.35	1.80	± 13.9%

^C Frequency validity above 300 MHz of ±100MHz only applies for DASY v4.4 and higher (Page 2), else it is restricted to ±50MHz. The uncertainty is the RSS of ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to ± 110 MHz.

^F At frequency up to 6 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ±10% if liquid compensation formula is applied to measured SAR values. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.


^G Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for the frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.




Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2117
E-mail: emf@caict.ac.cn <http://www.caict.ac.cn>



Frequency Response of E-Field (TEM-Cell: ifi110 EXX, Waveguide: R22)

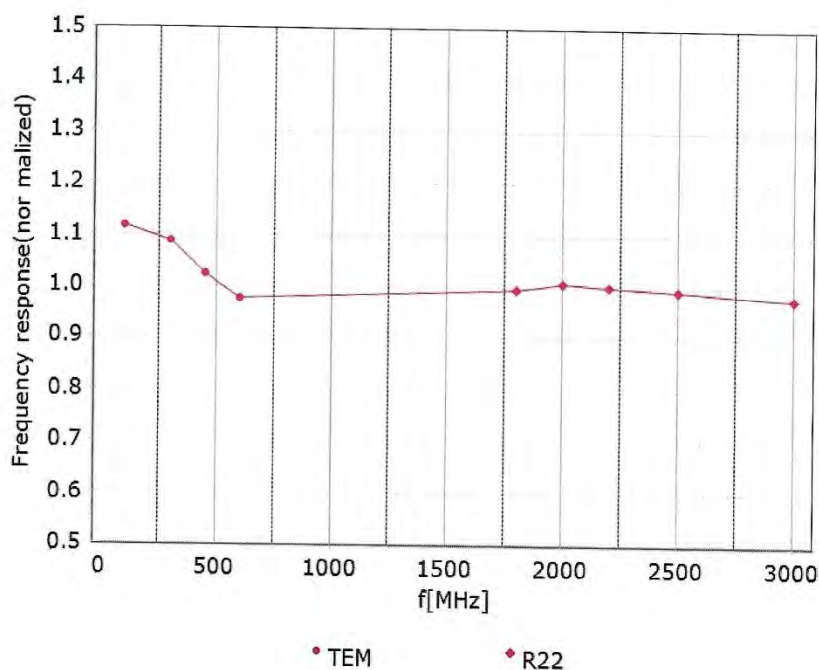

Uncertainty of Frequency Response of E-field: $\pm 7.4\%$ ($k=2$)






Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China
 Tel: +86-10-62304633-2117
 E-mail: emf@caict.ac.cn <http://www.caict.ac.cn>


Receiving Pattern (Φ), $\theta=0^\circ$

f=600 MHz, TEM

f=1800 MHz, R22

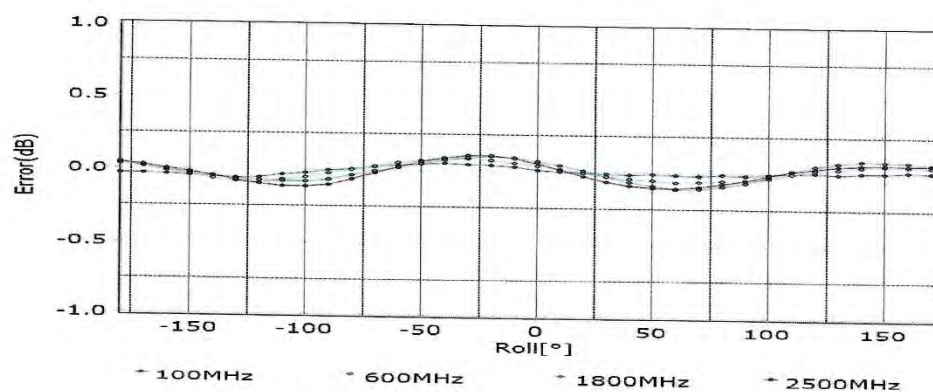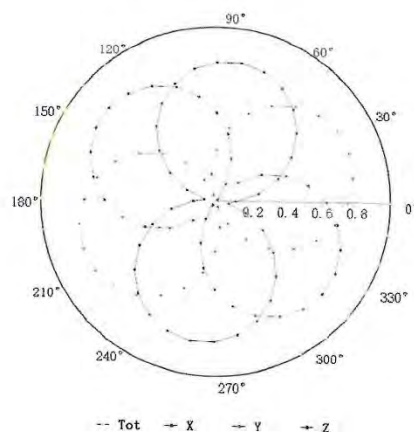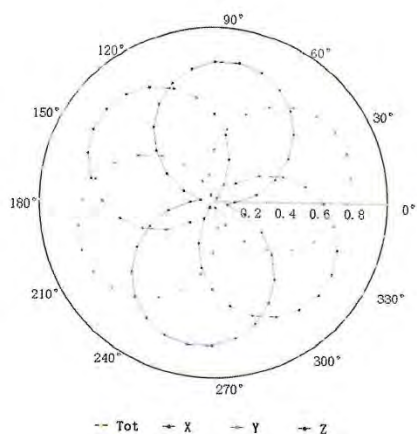



Uncertainty of Axial Isotropy Assessment: $\pm 1.2\%$ ($k=2$)




Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China
 Tel: +86-10-62304633-2117
 E-mail: cmf@caict.ac.cn <http://www.caict.ac.cn>



Dynamic Range $f(\text{SAR}_{\text{head}})$ (TEM cell, $f = 900 \text{ MHz}$)

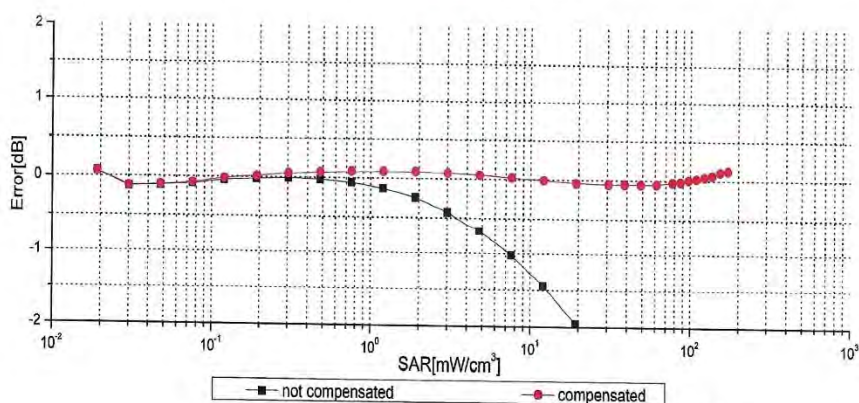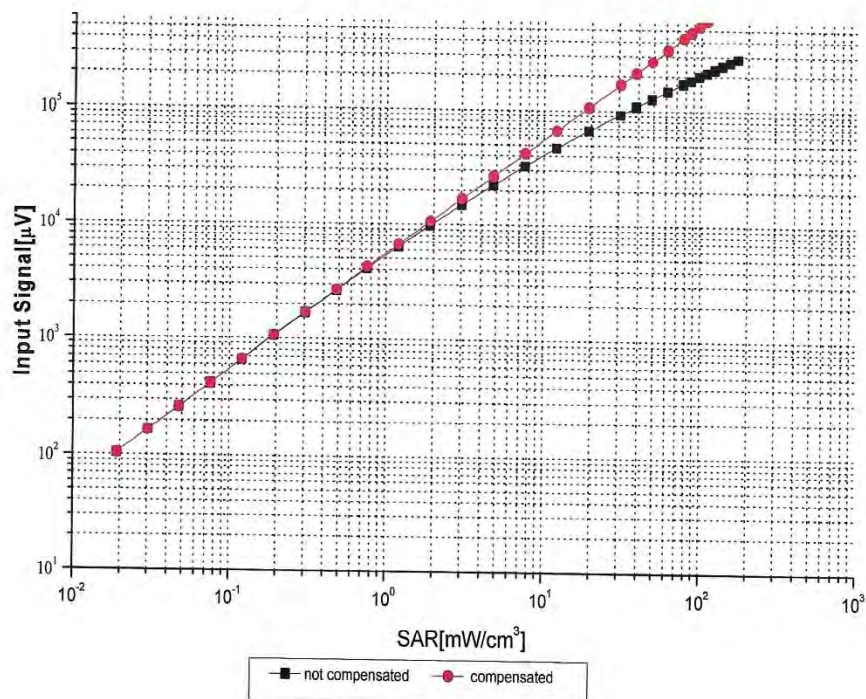

Uncertainty of Linearity Assessment: $\pm 0.9\%$ ($k=2$)





Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China
 Tel: +86-10-62304633-2117
 E-mail: emf@caict.ac.cn <http://www.caict.ac.cn>




Conversion Factor Assessment

$f=750\text{ MHz}$, WGLS R9(H_convF)


$f=1750\text{ MHz}$, WGLS R22(H_convF)

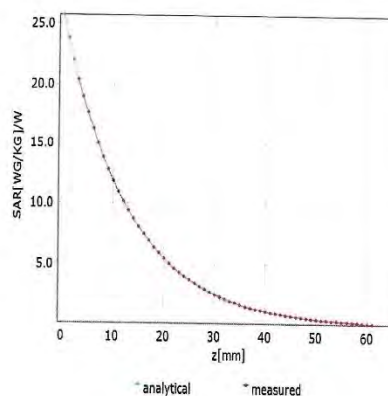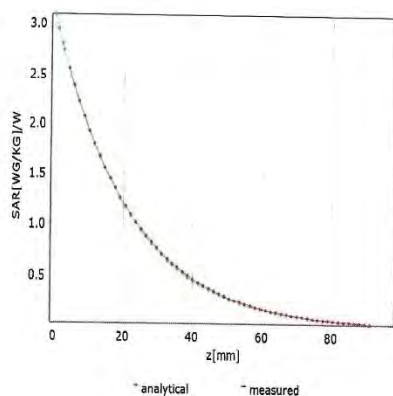

Deviation from Isotropy in Liquid

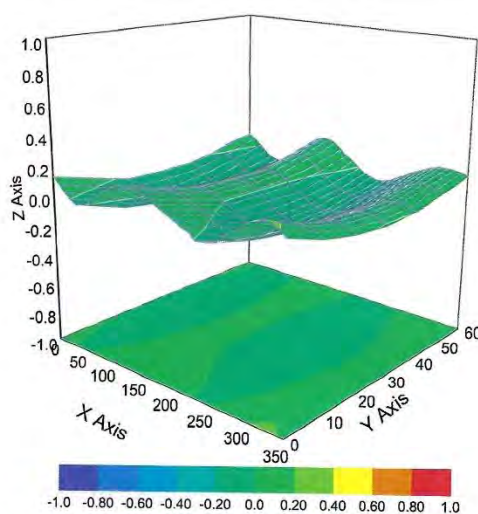

Uncertainty of Spherical Isotropy Assessment: $\pm 3.2\%$ ($k=2$)



Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China
 Tel: +86-10-62304633-2117
 E-mail: emf@caict.ac.cn <http://www.caict.ac.cn>

DASY/EASY – Parameters of Probe: EX3DV4 – SN:7624

Other Probe Parameters

Sensor Arrangement	Triangular
Connector Angle (°)	151.7
Mechanical Surface Detection Mode	enabled
Optical Surface Detection Mode	disable
Probe Overall Length	337mm
Probe Body Diameter	10mm
Tip Length	9mm
Tip Diameter	2.5mm
Probe Tip to Sensor X Calibration Point	1mm
Probe Tip to Sensor Y Calibration Point	1mm
Probe Tip to Sensor Z Calibration Point	1mm
Recommended Measurement Distance from Surface	1.4mm



Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2117
E-mail: cmf@caict.ac.cn <http://www.caict.ac.cn>



中国认可
国际互认
校准
CALIBRATION
CNAS L0570

Client : CTA

Certificate No: J23Z60391

CALIBRATION CERTIFICATE

Object DAE3 - SN: 428

Calibration Procedure(s) FF-Z11-002-01
Calibration Procedure for the Data Acquisition Electronics
(DAEx)

Calibration date: August 30, 2023

This calibration Certificate documents the traceability to national standards, which realize the physical units of measurements(SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature(22±3)°C and humidity<70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date(Calibrated by, Certificate No.)	Scheduled Calibration
Process Calibrator 753	1971018	12-Jun-23 (CTTL, No.J23X05436)	Jun-24

	Name	Function	Signature
Calibrated by:	Yu Zongying	SAR Test Engineer	
Reviewed by:	Lin Hao	SAR Test Engineer	
Approved by:	Qi Dianyuan	SAR Project Leader	

Issued: September 06, 2023

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Certificate No: J23Z60391

Page 1 of 3



In Collaboration with
s p e a g
CALIBRATION LABORATORY



Add: No. 52 HuaYuanBei Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2117
E-mail: cmf@caict.ac.cn <http://www.caict.ac.cn>

Glossary:

DAE data acquisition electronics
Connector angle information used in DASY system to align probe sensor X to the robot coordinate system.

Methods Applied and Interpretation of Parameters:

- *DC Voltage Measurement:* Calibration Factor assessed for use in DASY system by comparison with a calibrated instrument traceable to national standards. The figure given corresponds to the full scale range of the voltmeter in the respective range.
- *Connector angle:* The angle of the connector is assessed measuring the angle mechanically by a tool inserted. Uncertainty is not required.
- The report provide only calibration results for DAE, it does not contain other performance test results.



In Collaboration with

s p e a g
 CALIBRATION LABORATORY


Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China

Tel: +86-10-62304633-2117

E-mail: cmf@caict.ac.cn

<http://www.caict.ac.cn>**DC Voltage Measurement**

A/D - Converter Resolution nominal

High Range: 1LSB = 6.1 μ V, full range = -100...+300 mV

Low Range: 1LSB = 61nV, full range = -1.....+3mV

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

Calibration Factors	X	Y	Z
High Range	404.468 $\pm$ 0.15% (k=2)	404.804 $\pm$ 0.15% (k=2)	404.579 $\pm$ 0.15% (k=2)
Low Range	3.95934 $\pm$ 0.7% (k=2)	3.95437 $\pm$ 0.7% (k=2)	3.91875 $\pm$ 0.7% (k=2)

Connector Angle

Connector Angle to be used in DASY system	258.5° $\pm$ 1°
---	-----------------



Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191
Tel: +86-10-62304633-2117
E-mail: emf@caict.ac.cn <http://www.caict.ac.cn>



中国认可
国际互认
校准
CALIBRATION
CNAS L0570



Client

ATC

Certificate No: Z23-60083

CALIBRATION CERTIFICATE

Object D750V3 - SN: 1194

Calibration Procedure(s) FF-Z11-003-01
Calibration Procedures for dipole validation kits

Calibration date: February 17, 2023

This calibration Certificate documents the traceability to national standards, which realize the physical units of measurements (SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22±3)°C and humidity<70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration
Power Meter NRP2	106276	10-May-22 (CTTL, No.J22X03103)	May-23
Power sensor NRP6A	101369	10-May-22 (CTTL, No.J22X03103)	May-23
Reference Probe EX3DV4	SN 7464	19-Jan-23 (CTTL-SPEAG, No.Z22-60565)	Jan-24
DAE4	SN 1556	11-Jan-23(CTTL-SPEAG, No.Z23-60034)	Jan-24
Secondary Standards	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration
Signal Generator E4438C	MY49070393	17-May-23 (CTTL, No.J22X03157)	May-24
NetworkAnalyzer E5071C	MY46110673	10-Jan-23 (CTTL, No. J23X00104)	Jan-24

	Name	Function	Signature
Calibrated by:	Zhao Jing	SAR Test Engineer	
Reviewed by:	Lin Hao	SAR Test Engineer	
Approved by:	Qi Dianyuan	SAR Project Leader	

Issued: February 24, 2023

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Certificate No: Z23-60083

Page 1 of 6



Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2117
E-mail: emf@caict.ac.cn <http://www.caict.ac.cn>

**Glossary:**

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM _{x,y,z}
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

- a) IEC/IEEE 62209-1528, "Measurement Procedure for The Assessment of Specific Absorption Rate of Human Exposure to Radio Frequency Fields from Hand-held and Body-mounted Wireless Communication Devices- Part 1528: Human Models, Instrumentation and Procedures (Frequency range of 4 MHz to 10 GHz)", October 2020
- b) KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Additional Documentation:

- c) DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- *Measurement Conditions:* Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- *Antenna Parameters with TSL:* The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- *Feed Point Impedance and Return Loss:* These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- *Electrical Delay:* One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- *SAR measured:* SAR measured at the stated antenna input power.
- *SAR normalized:* SAR as measured, normalized to an input power of 1 W at the antenna connector.
- *SAR for nominal TSL parameters:* The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of Measurement multiplied by the coverage factor $k=2$, which for a normal distribution Corresponds to a coverage probability of approximately 95%.



Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China
 Tel: +86-10-62304633-2117
 E-mail: emf@caict.ac.cn <http://www.caict.ac.cn>



Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY52	V52.10.4
Extrapolation	Advanced Extrapolation	
Phantom	Triple Flat Phantom 5.1C	
Distance Dipole Center - TSL	15 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	750 MHz $\pm$ 1 MHz	


Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	42.0	0.90 mho/m
Measured Head TSL parameters	(22.0 $\pm$ 0.2) °C	41.2 $\pm$ 6 %	0.89 mho/m $\pm$ 6 %
Head TSL temperature change during test	<1.0 °C	----	----

SAR result with Head TSL

SAR averaged over 1 cm^3 (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	2.14 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	8.57 W/kg $\pm$ 18.8 % ($k=2$)
SAR averaged over 10 cm^3 (10 g) of Head TSL	Condition	
SAR measured	250 mW input power	1.40 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	5.61 W/kg $\pm$ 18.7 % ($k=2$)



Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2117
E-mail: emf@caict.ac.cn <http://www.caict.ac.cn>



Appendix (Additional assessments outside the scope of CNAS L0570)

Antenna Parameters with Head TSL

Impedance, transformed to feed point	50.8Ω- 3.54jΩ
Return Loss	- 28.9dB

General Antenna Parameters and Design

Electrical Delay (one direction)	0.979 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feed-point can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.
No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feed-point may be damaged.

Additional EUT Data

Manufactured by	SPEAG
-----------------	-------



Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China
 Tel: +86-10-62304633-2117
 E-mail: emf@caict.ac.cn http://www.caict.ac.cn



DASY5 Validation Report for Head TSL

Date: 2023-02-17

Test Laboratory: CTTL, Beijing, China

DUT: Dipole 750 MHz; Type: D750V3; Serial: D750V3 - SN: 1194

Communication System: UID 0, CW; Frequency: 750 MHz

Medium parameters used: $f = 750 \text{ MHz}$; $\sigma = 0.885 \text{ S/m}$; $\epsilon_r = 41.2$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN7464; ConvF(10.26, 10.26, 10.26) @ 750 MHz; Calibrated: 2023-01-19
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1556; Calibrated: 2023-01-11
- Phantom: MFP_V5.1C (20deg probe tilt); Type: QD 000 P51 Cx; Serial: 1062
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

Dipole Calibration/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 50.59 V/m; Power Drift = -0.04 dB


Peak SAR (extrapolated) = 3.42 W/kg

SAR(1 g) = 2.14 W/kg; SAR(10 g) = 1.4 W/kg

Smallest distance from peaks to all points 3 dB below = 20 mm

Ratio of SAR at M2 to SAR at M1 = 62.9%


Maximum value of SAR (measured) = 2.93 W/kg

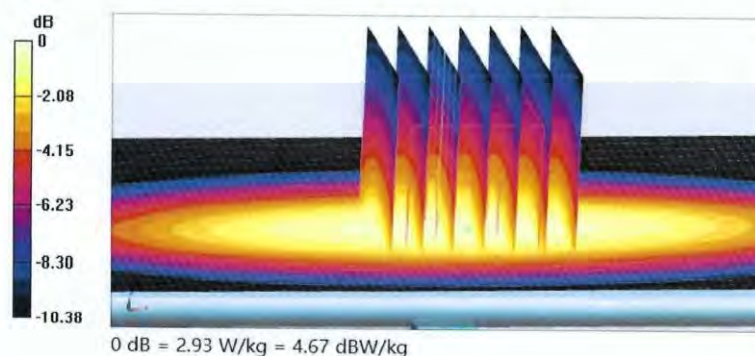



Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2117
E-mail: emf@caict.ac.cn <http://www.caict.ac.cn>

Impedance Measurement Plot for Head TSL

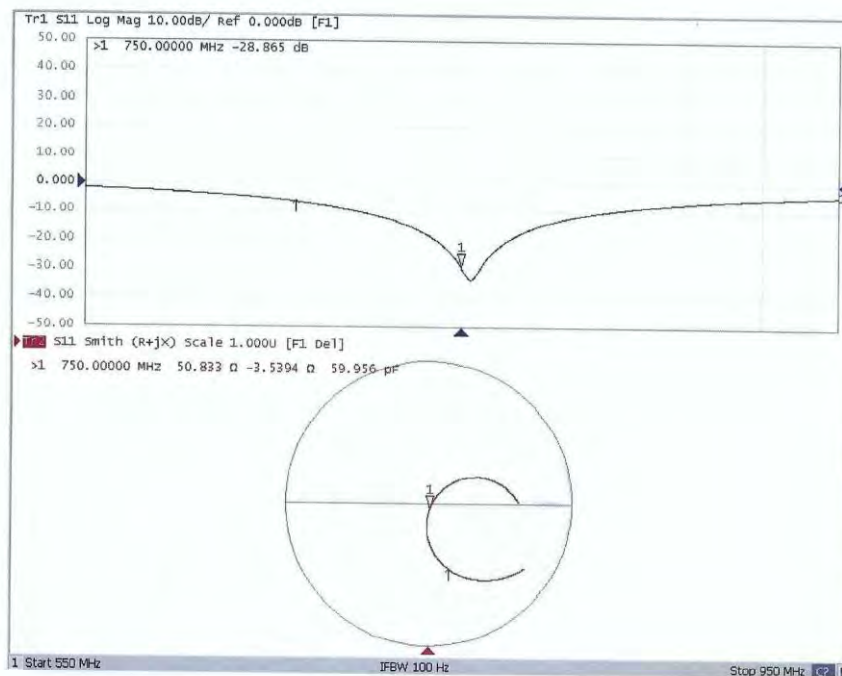



Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191
Tel: +86-10-62304633-2117
E-mail: emf@caict.ac.cn http://www.caict.ac.cn



中国认可
国际互认
校准
CALIBRATION
CNAS L0570



Client CTA

Certificate No: J23Z60387

CALIBRATION CERTIFICATE

Object D835V2 - SN: 484

Calibration Procedure(s) FF-Z11-003-01
Calibration Procedures for dipole validation kits

Calibration date: August 25, 2023

This calibration Certificate documents the traceability to national standards, which realize the physical units of measurements (SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature $(22\pm3)^{\circ}\text{C}$ and humidity $<70\%$.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration
Power Meter NRP2	106277	22-Sep-22 (CTTL, No.J22X09561)	Sep-23
Power sensor NRP8S	104291	22-Sep-22 (CTTL, No.J22X09561)	Sep-23
Reference Probe EX3DV4	SN 3617	31-Mar-23(CTTL-SPEAG,No.Z23-60161)	Mar-24
DAE4	SN 1556	11-Jan-23(CTTL-SPEAG,No.Z23-60034)	Jan-24
Secondary Standards	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration
Signal Generator E4438C	MY49071430	05-Jan-23 (CTTL, No. J23X00107)	Jan-24
NetworkAnalyzer E5071C	MY46110673	10-Jan-23 (CTTL, No. J23X00104)	Jan-24

	Name	Function	Signature
Calibrated by:	Zhao Jing	SAR Test Engineer	
Reviewed by:	Lin Hao	SAR Test Engineer	
Approved by:	Qi Dianyuan	SAR Project Leader	

Issued: September 1, 2023

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



In Collaboration with

s p e a g
 CALIBRATION LABORATORY


Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China

Tel: +86-10-62304633-2117

E-mail: emfi@caict.ac.cn

http://www.caict.ac.cn

Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM _{x,y,z}
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

- a) IEC/IEEE 62209-1528, "Measurement Procedure for The Assessment of Specific Absorption Rate of Human Exposure to Radio Frequency Fields from Hand-held and Body-mounted Wireless Communication Devices- Part 1528: Human Models, Instrumentation and Procedures (Frequency range of 4 MHz to 10 GHz)", October 2020
- b) KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Additional Documentation:

- c) DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- *Measurement Conditions:* Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- *Antenna Parameters with TSL:* The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- *Feed Point Impedance and Return Loss:* These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- *Electrical Delay:* One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- *SAR measured:* SAR measured at the stated antenna input power.
- *SAR normalized:* SAR as measured, normalized to an input power of 1 W at the antenna connector.
- *SAR for nominal TSL parameters:* The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of Measurement multiplied by the coverage factor $k=2$, which for a normal distribution Corresponds to a coverage probability of approximately 95%.



In Collaboration with
s p e a q
CALIBRATION LABORATORY



Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2117
E-mail: emf@caict.ac.cn <http://www.caict.ac.cn>

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY52	V52.10.4
Extrapolation	Advanced Extrapolation	
Phantom	Triple Flat Phantom 5.1C	
Distance Dipole Center - TSL	15 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	835 MHz $\pm$ 1 MHz	


Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	41.5	0.90 mho/m
Measured Head TSL parameters	(22.0 $\pm$ 0.2) °C	42.1 $\pm$ 6 %	0.90 mho/m $\pm$ 6 %
Head TSL temperature change during test	<1.0 °C	—	—

SAR result with Head TSL

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	2.42 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	9.68 W/kg $\pm$ 18.8 % (k=2)
SAR averaged over 10 cm ³ (10 g) of Head TSL	Condition	
SAR measured	250 mW input power	1.56 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	6.24 W/kg $\pm$ 18.7 % (k=2)



Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China
 Tel: +86-10-62304633-2117
 E-mail: emf@caict.ac.cn http://www.caict.ac.cn



Appendix (Additional assessments outside the scope of CNAS L0570)

Antenna Parameters with Head TSL

Impedance, transformed to feed point	49.8Ω- 2.74jΩ
Return Loss	- 31.2dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.299 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feed-point can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feed-point may be damaged.

Additional EUT Data

Manufactured by	SPEAG
-----------------	-------



In Collaboration with

s p e a g
CALIBRATION LABORATORY**CAICT**

Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2117
E-mail: emf@caict.ac.cn <http://www.caict.ac.cn>

DASY5 Validation Report for Head TSL

Date: 2023-08-25

Test Laboratory: CTTL, Beijing, China

DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN: 484

Communication System: UID 0, CW; Frequency: 835 MHz

Medium parameters used: $f = 835$ MHz; $\sigma = 0.904$ S/m; $\epsilon_r = 42.11$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3617; ConvF(10.1, 10.1, 10.1) @ 835 MHz; Calibrated: 2023-03-31
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1556; Calibrated: 2023-01-11
- Phantom: MFP_V5.1C (20deg probe tilt); Type: QD 000 P51 Cx; Serial: 1062
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

Dipole Calibration/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 57.93 V/m; Power Drift = -0.01 dB


Peak SAR (extrapolated) = 3.92 W/kg

SAR(1 g) = 2.42 W/kg; SAR(10 g) = 1.56 W/kg

Smallest distance from peaks to all points 3 dB below = 16.3 mm

Ratio of SAR at M2 to SAR at M1 = 62.1%

Maximum value of SAR (measured) = 3.36 W/kg

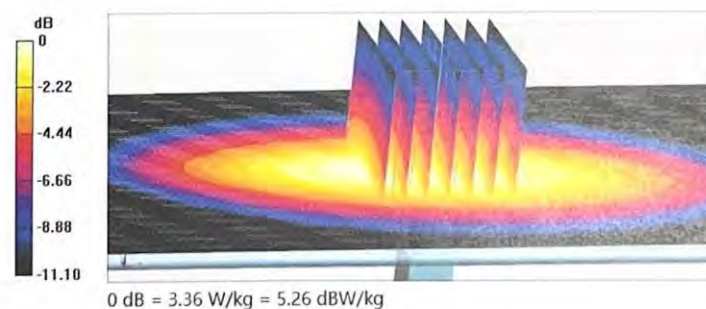




In Collaboration with
s p e a g
CALIBRATION LABORATORY



Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2117
E-mail: emf@caict.ac.cn <http://www.caict.ac.cn>

Impedance Measurement Plot for Head TSL

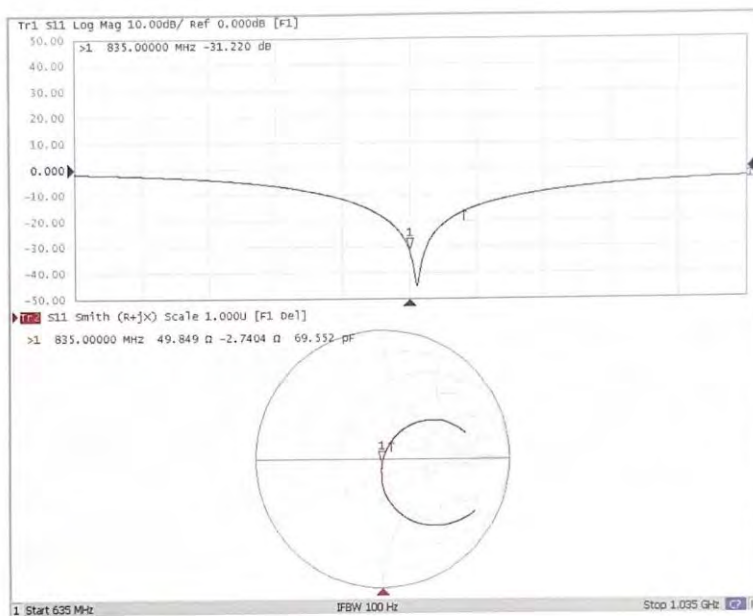



In Collaboration with
s p e a g
CALIBRATION LABORATORY



中国认可
国际互认
校准
CALIBRATION
CNAS L0570

Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, Chi
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504
E-mail: cttl@chinattl.com http://www.chinattl.cn

Client **Moriab**Certificate No: **Z21-60475****CALIBRATION CERTIFICATE**Object **D1800V2 - SN: 2d158**Calibration Procedure(s) **FF-Z11-003-01**
Calibration Procedures for dipole validation kitsCalibration date: **December 17, 2021**

This calibration Certificate documents the traceability to national standards, which realize the physical units of measurements (SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22±3)°C and humidity<70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date(Calibrated by, Certificate No.)	Scheduled Calibration
Power Meter NRP2	106277	24-Sep-21 (CTTL, No.J21X08326)	Sep-22
Power sensor NRP8S	104291	24-Sep-21 (CTTL, No.J21X08326)	Sep-22
ReferenceProbe EX3DV4	SN 7307	26-May-21(SPEAG,No.EX3-7307_May21)	May-22
DAE4	SN 1556	15-Jan-21(SPEAG,No.DAE4-1556_Jan21)	Jan-22
Secondary Standards	ID #	Cal Date(Calibrated by, Certificate No.)	Scheduled Calibration
Signal Generator E4438C	MY49071430	01-Feb-21 (CTTL, No.J21X00593)	Jan-22
NetworkAnalyzer E5071C	MY46110673	14-Jan-21 (CTTL, No.J21X00232)	Jan-22

	Name	Function	Signature
Calibrated by:	Zhao Jing	SAR Test Engineer	
Reviewed by:	Lin Hao	SAR Test Engineer	
Approved by:	Qi Dianyuan	SAR Project Leader	
Issued: December 27, 2021			

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Certificate No: Z21-60475

Page 1 of 6