

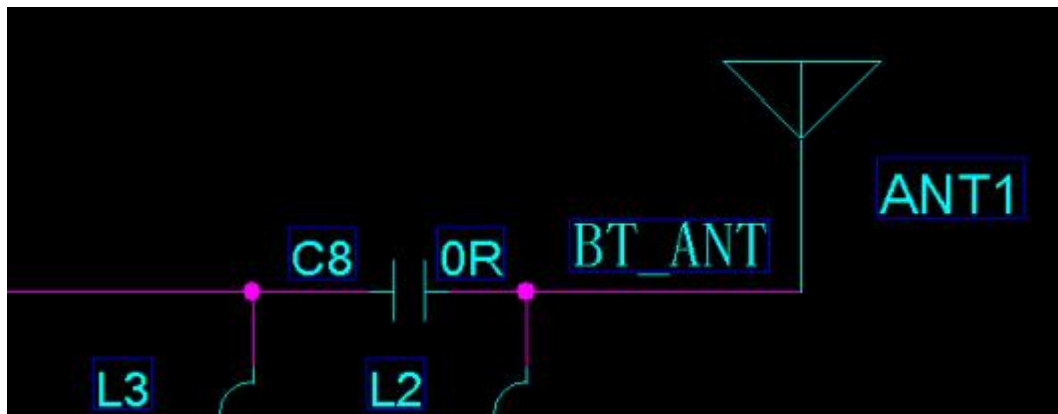



RF Antenna Specifications

主要技术指标		Main technical specifications	
频率 (MHz)	2400/2450/2500	Frequency (MHz)	2400/2450/2500
特性阻抗 (Ω)	50 ± 10	Impedance (Ω)	50 ± 10
极化方式	垂直极化	Polarization	Linear, Vertical
方向性	全向性	Radiation	Omni-directional
连接方式	SMA	Connector Type	SMA
物理性能		Physical properties	
天线材料	PCB	Antenna base	PCB
工作温度	$-20^{\circ}\text{C} \sim +60^{\circ}\text{C}$	Operating temp	$-20^{\circ}\text{C} \sim +60^{\circ}\text{C}$
保存温度	$-20^{\circ}\text{C} \sim +70^{\circ}\text{C}$	Storage temp	$-20^{\circ}\text{C} \sim +70^{\circ}\text{C}$
增益值	-0.65dbi	Gain	-0.65dbi

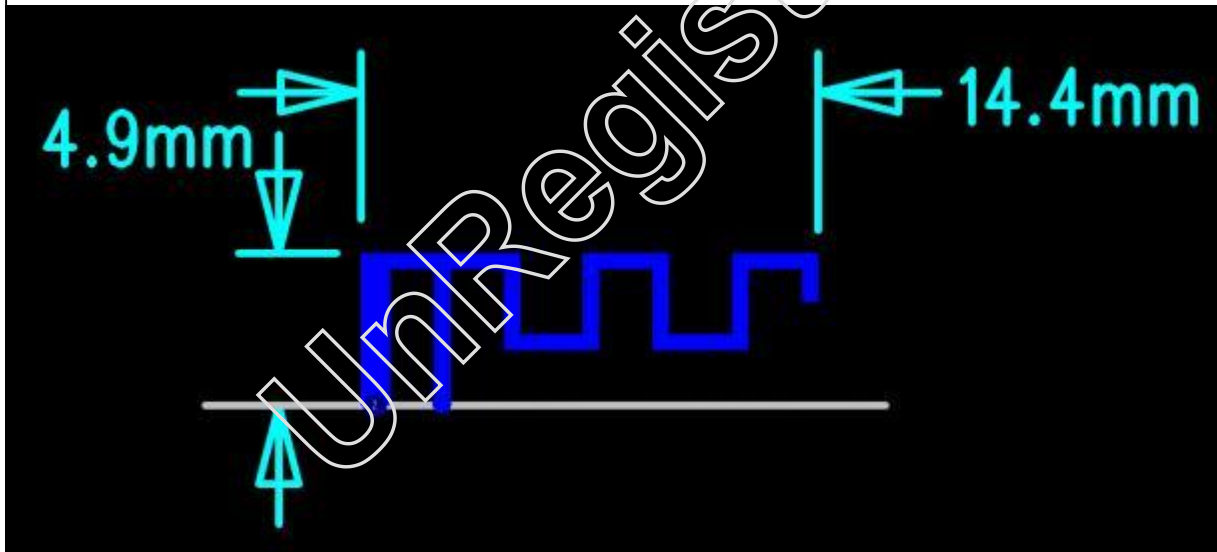

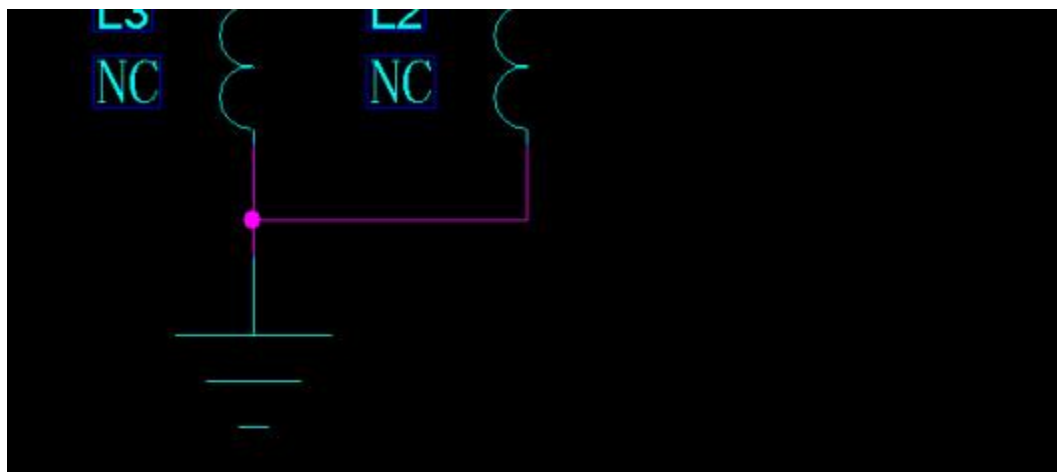

Antenna Pattern

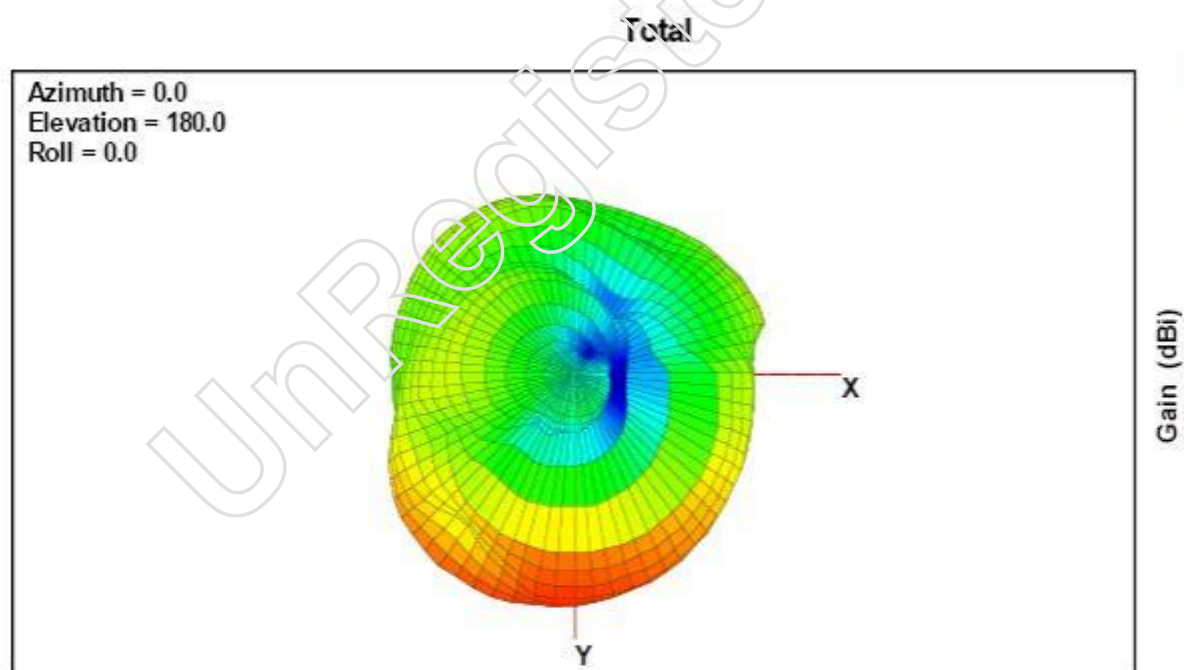


NEUTRON ENGINEERING INC.

No.3,Jinshagang 1st Road, ShiXia, Dalang Town, Dong Guan, China.523792

UnRegistered

UnRegistered

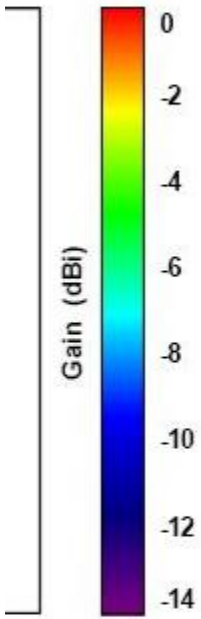

UnRegistered

