

Report No.: RF171024E05-1

FCC ID: KA2AP2680A1

Test Model: DAP-2680

Received Date: Oct. 24, 2017

Test Date: Nov. 13 to 28, 2017

Issued Date: Jan. 25, 2018

Applicant: D-Link Corporation

Address: No.289, Xinhua 3rd Rd., Neihu District, Taipei City 11494, Taiwan

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch
Hsin Chu Laboratory

Lab Address: E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300,
Taiwan R.O.C.

Test Location: E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300,
Taiwan R.O.C.

**FCC Registration /
Designation Number:** 723255 / TW2022



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification. The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies.

Table of Contents

Release Control Record	4
1 Certificate of Conformity	5
2 Summary of Test Results	6
2.1 Measurement Uncertainty	6
2.2 Modification Record	6
3 General Information	7
3.1 General Description of EUT	7
3.2 Description of Test Modes	10
3.2.1 Test Mode Applicability and Tested Channel Detail	11
3.3 Duty Cycle of Test Signal	13
3.4 Description of Support Units	14
3.4.1 Configuration of System under Test	15
3.5 General Description of Applied Standard	18
4 Test Types and Results	19
4.1 Radiated Emission and Bandedge Measurement	19
4.1.1 Limits of Radiated Emission and Bandedge Measurement	19
4.1.2 Test Instruments	20
4.1.3 Test Procedure	22
4.1.4 Deviation from Test Standard	22
4.1.5 Test Setup	23
4.1.6 EUT Operating Condition	24
4.1.7 Test Results	25
4.2 Conducted Emission Measurement	44
4.2.1 Limits of Conducted Emission Measurement	44
4.2.2 Test Instruments	44
4.2.3 Test Procedure	45
4.2.4 Deviation from Test Standard	45
4.2.5 Test Setup	45
4.2.6 EUT Operating Condition	45
4.2.7 Test Results (Mode 1)	46
4.2.8 Test Results (Mode 2)	48
4.2.9 Test Results (Mode 3)	50
4.3 Transmit Power Measurement	52
4.3.1 Limits of Transmit Power Measurement	52
4.3.2 Test Setup	52
4.3.3 Test Instruments	52
4.3.4 Test Procedure	52
4.3.5 Deviation from Test Standard	52
4.3.6 EUT Operating Condition	52
4.3.7 Test Result	53
4.4 Occupied Bandwidth Measurement	56
4.4.1 Test Setup	56
4.4.2 Test Instruments	56
4.4.3 Test Procedure	56
4.4.4 Test Results	57
4.5 Peak Power Spectral Density Measurement	63
4.5.1 Limits of Peak Power Spectral Density Measurement	63
4.5.2 Test Setup	63
4.5.3 Test Instruments	63
4.5.4 Test Procedure	64
4.5.5 Deviation from Test Standard	64
4.5.6 EUT Operating Condition	64
4.5.7 Test Results (Mode 1)	65

4.6	Frequency Stability Measurement.....	71
4.6.1	Limits of Frequency Stability Measurement	71
4.6.2	Test Setup.....	71
4.6.3	Test Instruments	71
4.6.4	Test Procedure	71
4.6.5	Deviation from Test Standard	71
4.6.6	EUT Operating Condition	71
4.6.7	Test Results	72
4.7	6dB Bandwidth Measurment.....	73
4.7.1	Limits of 6dB Bandwidth Measurement.....	73
4.7.2	Test Setup.....	73
4.7.3	Test Instruments	73
4.7.4	Test Procedure	73
4.7.5	Deviation from Test Standard	73
4.7.6	EUT Operating Condition	73
4.7.7	Test Results (Mode 1).....	74
5	Pictures of Test Arrangements.....	76
	Annex A- Radiated Out of Band Emission (OOBE) Measurement (For U-NII-3 band)	77
	Appendix – Information on the Testing Laboratories	80

Release Control Record

Issue No.	Description	Date Issued
RF171024E05-1	Original release.	Jan. 25, 2018

1 Certificate of Conformity

Product: Wireless AC1750 Wave 2 Dual-Band PoE Access Point

Brand: D-Link

Test Model: DAP-2680

Sample Status: ENGINEERING SAMPLE

Applicant: D-Link Corporation

Test Date: Nov. 13 to 28, 2017

Standard: 47 CFR FCC Part 15, Subpart E (Section 15.407)
ANSI C63.10: 2013

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

Prepared by : Wendy Wu , **Date:** Jan. 25, 2018
Wendy Wu / Specialist

Approved by : May Chen , **Date:** Jan. 25, 2018
May Chen / Manager

2 Summary of Test Results

47 CFR FCC Part 15, Subpart E (Section 15.407)			
FCC Clause	Test Item	Result	Remarks
15.407(b)(6)	AC Power Conducted Emissions	Pass	Meet the requirement of limit. Minimum passing margin is -14.31dB at 0.4000MHz.
15.407(b) (1/2/3/4(i/ii)/6)	Radiated Emissions & Band Edge Measurement*	Pass	Meet the requirement of limit. Minimum passing margin is -0.1dB at 5150.00MHz, 15720.00MHz, 17235.00MHz, 17355.00MHz, 15600.00MHz.
15.407(a)(1/2/3)	Max Average Transmit Power	Pass	Meet the requirement of limit.
---	Occupied Bandwidth Measurement	-	Reference only.
15.407(a)(1/2/3)	Peak Power Spectral Density	Pass	Meet the requirement of limit.
15.407(e)	6dB bandwidth	Pass	Meet the requirement of limit. (U-NII-3 Band only)
15.407(g)	Frequency Stability	Pass	Meet the requirement of limit.
15.203	Antenna Requirement	Pass	Antenna connector is i-pex(MHF) not a standard connector.

*For U-NII-3 band compliance with rule part 15.407(b)(4)(i), the OOB test plots were recorded in Annex A.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) ($\pm$)
Conducted Emissions at mains ports	150kHz ~ 30MHz	1.84 dB
Radiated Emissions up to 1 GHz	30MHz ~ 1GHz	5.30 dB
Radiated Emissions above 1 GHz	1GHz ~ 6GHz	5.16 dB
	6GHz ~ 18GHz	4.91 dB
	18GHz ~ 40GHz	5.30 dB

2.2 Modification Record

There were no modifications required for compliance.

3 General Information

3.1 General Description of EUT

Product	Wireless AC1750 Wave 2 Dual-Band PoE Access Point
Brand	D-Link
Test Model	DAP-2680
Status of EUT	ENGINEERING SAMPLE
Power Supply Rating	DC 12V from power adapter or DC 56V from PoE
Modulation Type	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM 256QAM for OFDM in 11ac mode only
Modulation Technology	DSSS, OFDM
Transfer Rate	802.11b: up to 11Mbps 802.11a/g: up to 54Mbps 802.11n: up to 450Mbps 802.11ac: up to 1300Mbps
Operating Frequency	2.4GHz: 2.412 ~ 2.462GHz 5GHz: 5.18~ 5.24GHz, 5.745 ~ 5.825GHz
Number of Channel	2.4GHz: 802.11b, 802.11g, 802.11n (HT20): 11 802.11n (HT40): 7 5GHz: 802.11a, 802.11n (HT20), 802.11ac (VHT20): 9 802.11n (HT40), 802.11ac (VHT40): 4 802.11ac (VHT80): 2
Output Power	2.4GHz: 779.921mW 5GHz: CDD Mode: 5.18 ~ 5.24GHz: 676.99mW 5.745 ~ 5.825GHz: 341.892mW Beamforming Mode: 5.18 ~ 5.24GHz: 504.877mW 5.745 ~ 5.825GHz: 275.89mW
Antenna Type	Refer to Note
Antenna Connector	Refer to Note
Accessory Device	Adapter x 1
Data Cable Supplied	NA

Note:

1. Simultaneously transmission condition.

Condition	Technology	
1	WLAN (2.4GHz)	WLAN (5GHz)

Note: The emission of the simultaneous operation has been evaluated and no non-compliance was found.

2. The EUT power needs to be supplied from power adapters or a PoE, the information is as below table:

Adapter			
No.	Brand	Model No.	Spec.
1	D-Link	WA-24Q12R	Input: 100-240Vac, 0.7A, 50-60Hz Output: 12V, 2.0A DC output cable: Unshielded 1.2m
2	D-Link	MU24-Y120200-A1	Input: 100-240Vac, 0.7A, 50/60Hz Output: 12V, 2.0A DC output cable: Unshielded 1.6m

PoE (Only for test not for sale)

No.	Brand	Model No.	Spec.
1	PHIHONG	POE29U-560	Input: 100-240Vac, 0.8A, 50-60Hz Output: 56V, 0.536A

Note:

1. From the above adapters, the radiated emissions worse case was found in **PoE**. Therefore only the test data of the mode was recorded in this report.

3. The antennas provided to the EUT, please refer to the following table:

Antenna No.	Model	Antenna Net Gain (dBi)	Frequency range (GHz)	Antenna Type	Connector Type	Cable Length (mm)
1	NYS3072	3.6	2.4~2.4835	PIFA	i-pex (MHF)	60
		4.2	5.15~5.85			
2	NYS3073	3.6	2.4~2.4835	PIFA	i-pex (MHF)	70
		4.2	5.15~5.85			
3	NYS3074	3.5	2.4~2.4835	PIFA	i-pex (MHF)	160
		4	5.15~5.85			

4. The EUT incorporates a MIMO function:

2.4GHz Band			
MODULATION MODE	DATA RATE (MCS)	TX & RX CONFIGURATION	
802.11b	1 ~ 11Mbps	3TX	3RX
802.11g	6 ~ 54Mbps	3TX	3RX
802.11n (HT20)	MCS 0~7	3TX	3RX
	MCS 8~15	3TX	3RX
	MCS 16~23	3TX	3RX
802.11n (HT40)	MCS 0~7	3TX	3RX
	MCS 8~15	3TX	3RX
	MCS 16~23	3TX	3RX
5GHz Band			
MODULATION MODE	DATA RATE (MCS)	TX & RX CONFIGURATION	
802.11a	6 ~ 54Mbps	3TX	3RX
802.11n (HT20)	MCS 0~7	3TX	3RX
	MCS 8~15	3TX	3RX
	MCS 16~23	3TX	3RX
802.11n (HT40)	MCS 0~7	3TX	3RX
	MCS 8~15	3TX	3RX
	MCS 16~23	3TX	3RX
802.11ac (VHT20)	MCS 0~8, Nss=1	3TX	3RX
	MCS 0~8, Nss=2	3TX	3RX
	MCS 0~9, Nss=3	3TX	3RX
802.11ac (VHT40)	MCS 0~9, Nss=1	3TX	3RX
	MCS 0~9, Nss=2	3TX	3RX
	MCS 0~9, Nss=3	3TX	3RX
802.11ac (VHT80)	MCS 0~9, Nss=1	3TX	3RX
	MCS 0~9, Nss=2	3TX	3RX
	MCS 0~9, Nss=3	3TX	3RX

Note:

1. All of modulation mode support beamforming function except 802.11a and 2.4GHz modulation mode.
2. The EUT support Beamforming and CDD mode, therefore both mode were investigated and the worst case scenario was identified. The worst case data were presented in test report.
3. The modulation and bandwidth are similar for 802.11n mode for 20MHz (40MHz) and 802.11ac mode for 20MHz (40MHz), therefore investigated worst case to representative mode in test report. (Final test mode refer section 3.2.1)

5. The above EUT information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.

3.2 Description of Test Modes

FOR 5180 ~ 5240MHz

4 channels are provided for 802.11a, 802.11n (HT20), 802.11ac (VHT20):

Channel	Frequency	Channel	Frequency
36	5180MHz	44	5220MHz
40	5200MHz	48	5240MHz

2 channels are provided for 802.11n (HT40), 802.11ac (VHT40):

Channel	Frequency	Channel	Frequency
38	5190MHz	46	5230MHz

1 channel is provided for 802.11ac (VHT80):

Channel	Frequency
42	5210MHz

FOR 5745 ~ 5825MHz:

5 channels are provided for 802.11a, 802.11n (HT20), 802.11ac (VHT20):

Channel	Frequency	Channel	Frequency
149	5745MHz	161	5805MHz
153	5765MHz	165	5825MHz
157	5785MHz		

2 channels are provided for 802.11n (HT40), 802.11ac (VHT40):

Channel	Frequency	Channel	Frequency
151	5755MHz	159	5795MHz

1 channel is provided for 802.11ac (VHT80):

Channel	Frequency
155	5775MHz

3.2.1 Test Mode Applicability and Tested Channel Detail

EUT Configure Mode	Applicable To				Description
	RE $\geq$ 1G	RE<1G	PLC	APCM	
1	√	√	√	√	Power from PoE
2	-	-	√	-	Power from adapter 1
3	-	-	√	-	Power from adapter 2

Where **RE $\geq$ 1G:** Radiated Emission above 1GHz

RE<1G: Radiated Emission below 1GHz

PLC: Power Line Conducted Emission

APCM: Antenna Port Conducted Measurement

NOTE: 1. The EUT had been pre-tested on the positioned of each 2 axis. The worst case was found when positioned on Y-plane.

2. "-" means no effect.

Radiated Emission Test (Above 1GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

CDD Mode						
Mode	FREQ. Band (MHz)	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
802.11a	5180-5240	36 to 48	36, 40, 48	OFDM	BPSK	6
802.11ac (VHT20)		36 to 48	36, 40, 48	OFDM	BPSK	6.5
802.11ac (VHT40)		38 to 46	38, 46	OFDM	BPSK	13.5
802.11ac (VHT80)		42	42	OFDM	BPSK	29.3
802.11a	5745-5825	149 to 165	149, 157, 165	OFDM	BPSK	6
802.11ac (VHT20)		149 to 165	149, 157, 165	OFDM	BPSK	6.5
802.11ac (VHT40)		151 to 159	151, 159	OFDM	BPSK	13.5
802.11ac (VHT80)		155	155	OFDM	BPSK	29.3

Radiated Emission Test (Below 1GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

CDD Mode						
Mode	FREQ. Band (MHz)	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
802.11ac (VHT40)	5180-5240 5745-5825	38 to 46 151 to 159	46	OFDM	BPSK	13.5

Power Line Conducted Emission Test:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

CDD Mode						
Mode	FREQ. Band (MHz)	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
802.11ac (VHT40)	5180-5240 5745-5825	38 to 46 151 to 159	46	OFDM	BPSK	13.5

Antenna Port Conducted Measurement:

- ☒ This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

CDD Mode						
Mode	FREQ. Band (MHz)	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
802.11a	5180-5240	36 to 48	36, 40, 48	OFDM	BPSK	6
802.11ac (VHT20)		36 to 48	36, 40, 48	OFDM	BPSK	6.5
802.11ac (VHT40)		38 to 46	38, 46	OFDM	BPSK	13.5
802.11ac (VHT80)		42	42	OFDM	BPSK	29.3
802.11a	5745-5825	149 to 165	149, 157, 165	OFDM	BPSK	6
802.11ac (VHT20)		149 to 165	149, 157, 165	OFDM	BPSK	6.5
802.11ac (VHT40)		151 to 159	151, 159	OFDM	BPSK	13.5
802.11ac (VHT80)		155	155	OFDM	BPSK	29.3
Beamforming Mode (output power only)						
Mode	FREQ. Band (MHz)	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
802.11ac (VHT20)	5180-5240	36 to 48	36, 40, 48	OFDM	BPSK	6.5
802.11ac (VHT40)		38 to 46	38, 46	OFDM	BPSK	13.5
802.11ac (VHT80)		42	42	OFDM	BPSK	29.3
802.11ac (VHT20)	5745-5825	149 to 165	149, 157, 165	OFDM	BPSK	6.5
802.11ac (VHT40)		151 to 159	151, 159	OFDM	BPSK	13.5
802.11ac (VHT80)		155	155	OFDM	BPSK	29.3

Test Condition:

Applicable To	ENVIRONMENTAL CONDITIONS	INPUT POWER	TESTED BY
RE _≥ 1G	23deg. C, 65%RH	120Vac, 60Hz	Rey Chen
RE _{<} 1G	23deg. C, 68%RH	120Vac, 60Hz	Rey Chen
PLC	25deg. C, 68%RH	120Vac, 60Hz	Weiwei Lo
APCM	24deg. C, 65%RH	120Vac, 60Hz	Robert Cheng

3.3 Duty Cycle of Test Signal

If duty cycle of test signal is $\geq 98\%$, duty factor is not required.

If duty cycle of test signal is $< 98\%$, duty factor shall be considered.


802.11a: Duty cycle = $2.027 \text{ ms} / 2.094 \text{ ms} = 0.968$, Duty factor = $10 * \log(1/0.968) = 0.14$

802.11ac (VHT20): Duty cycle = $4.961 \text{ ms} / 5.046 \text{ ms} = 0.983$


802.11ac (VHT40): Duty cycle = $2.407 \text{ ms} / 2.481 \text{ ms} = 0.97$, Duty factor = $10 * \log(1/0.97) = 0.13$

802.11ac (VHT80): Duty cycle = $1.134 \text{ ms} / 1.201 \text{ ms} = 0.944$, Duty factor = $10 * \log(1/0.944) = 0.25$


802.11a

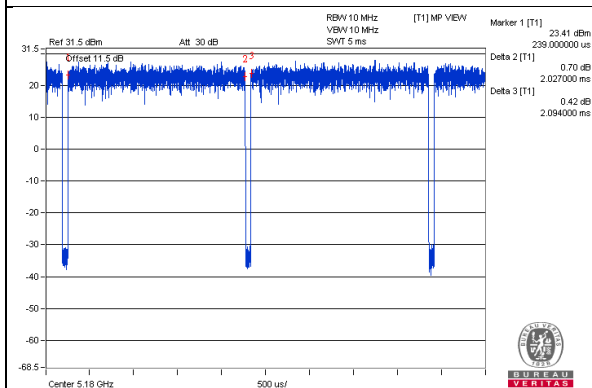


802.11ac (VHT20)

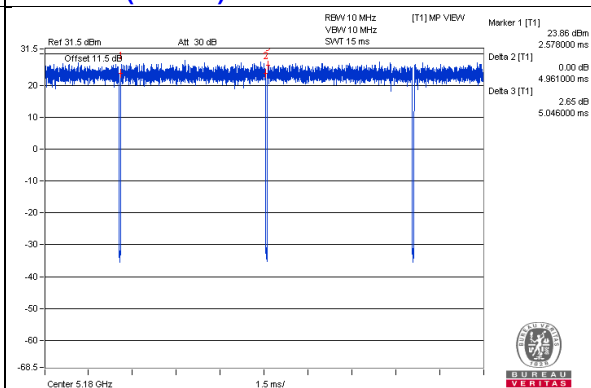

802.11ac (VHT40)

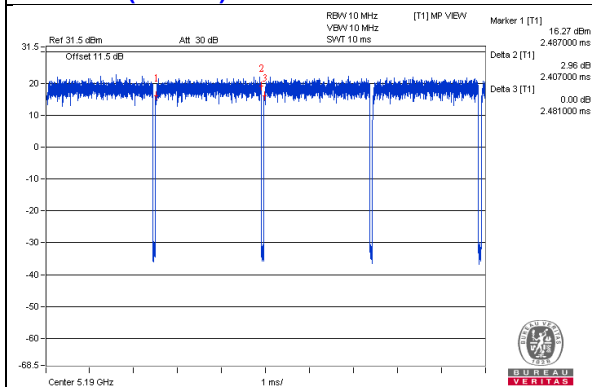

802.11ac (VHT80)

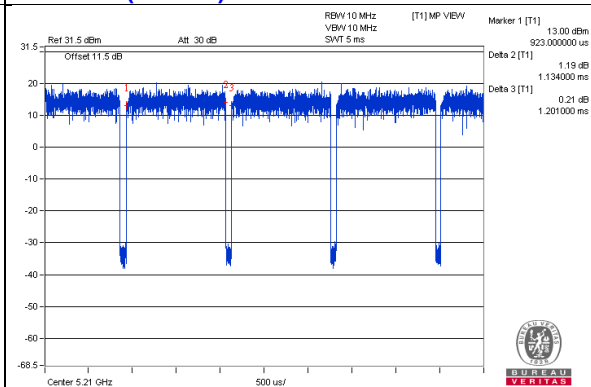

3.4 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A.	Laptop	DELL	E6420	482T3R1	FCC DoC	Provided by Lab
B.	PoE	PHIHONG	POE29U-560	NA	NA	Supplied by client


Note:

1. All power cords of the above support units are non-shielded (1.8m).


ID	Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1.	RJ-45 Cable	1	10	No	0	Provided by Lab
2.	RJ-45 Cable	1	3	No	0	Provided by Lab
3.	DC Cable	1	1.6	No	0	Supplied by client
	DC Cable	1	1.2	No	0	Supplied by client

3.4.1 Configuration of System under Test


For Conducted Emission (PoE):

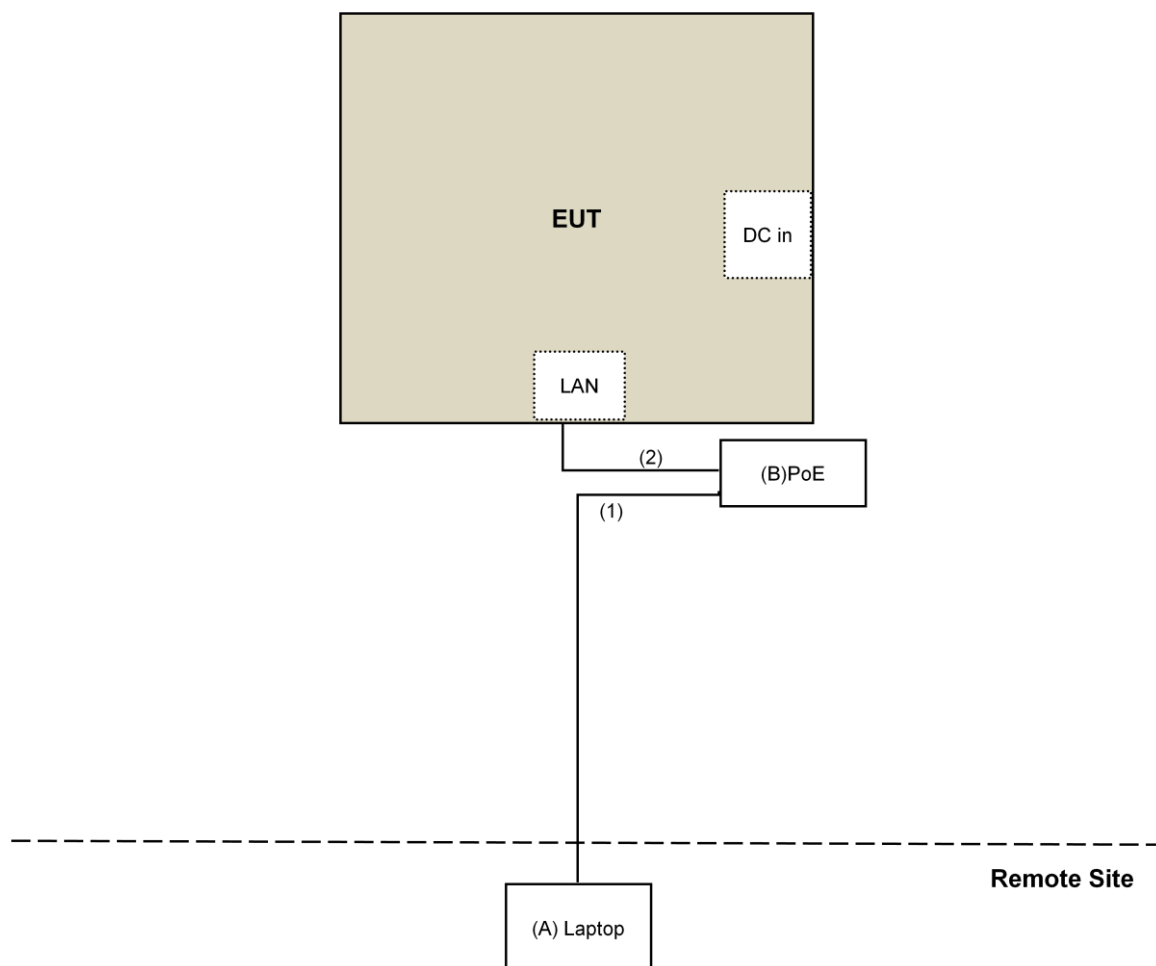

For Conducted Emission (Adapter):

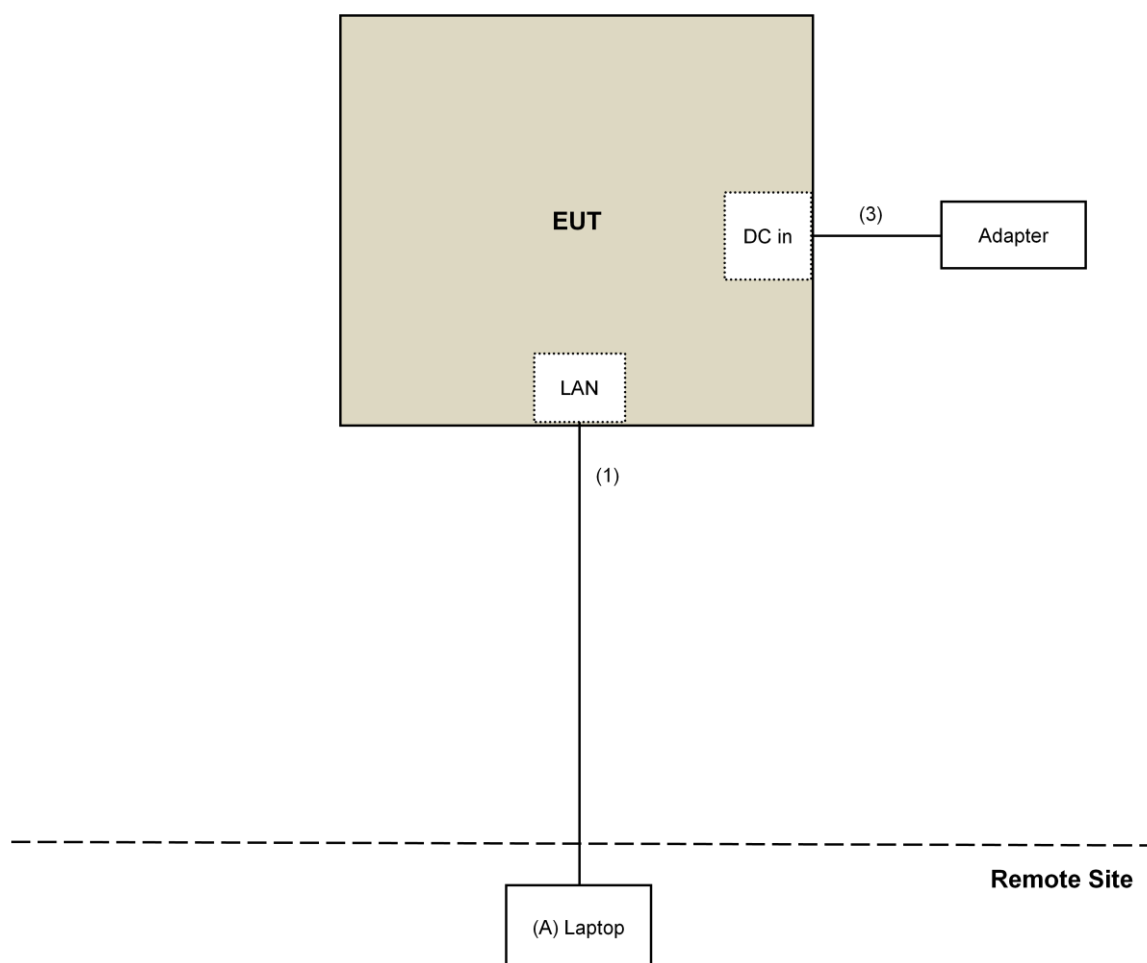

For other test:

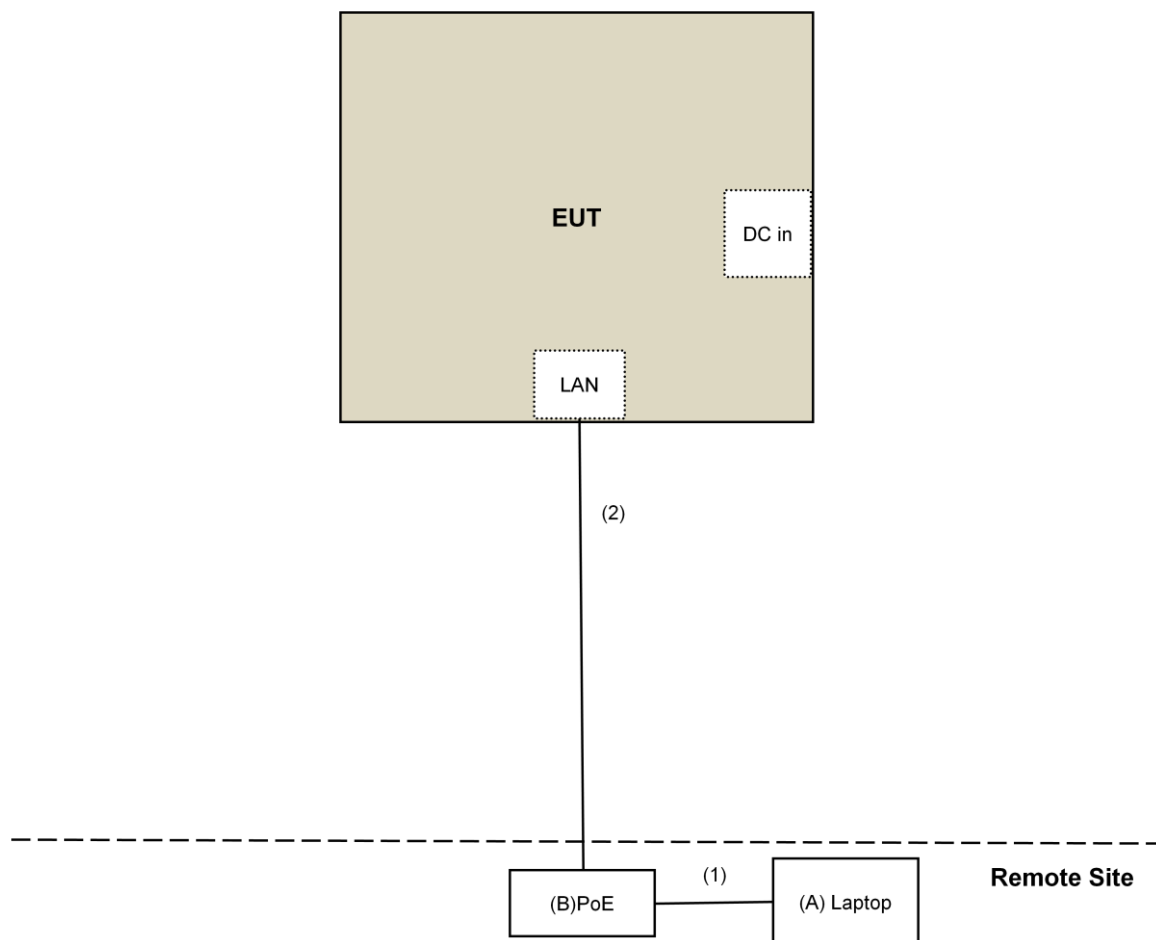

3.5 General Description of Applied Standard

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart E (15.407)

KDB 789033 D02 General UNII Test Procedure New Rules v01r04

KDB 662911 D01 Multiple Transmitter Output v02r01

ANSI C63.10-2013

All test items have been performed and recorded as per the above standards.

NOTE: The EUT has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.

4 Test Types and Results

4.1 Radiated Emission and Bandedge Measurement

4.1.1 Limits of Radiated Emission and Bandedge Measurement

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table.

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTE:

- The lower limit shall apply at the transition frequencies.
- Emission level (dBuV/m) = 20 log Emission level (uV/m).
- For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

Limits of unwanted emission out of the restricted bands

Applicable To			Limit	
789033 D02 General UNII Test Procedure New Rules v01r04			Field Strength at 3m	
			PK:74 (dBμV/m)	AV:54 (dBμV/m)
Frequency Band	Applicable To		EIRP Limit	Equivalent Field Strength at 3m
5150~5250 MHz	15.407(b)(1)		PK:-27 (dBm/MHz)	PK:68.2(dBμV/m)
5250~5350 MHz	15.407(b)(2)			
5470~5725 MHz	15.407(b)(3)			
5725~5850 MHz	☒	15.407(b)(4)(i)	PK:-27 (dBm/MHz) ^{*1} PK:10 (dBm/MHz) ^{*2} PK:15.6 (dBm/MHz) ^{*3} PK:27 (dBm/MHz) ^{*4}	PK: 68.2(dBμV/m) ^{*1} PK:105.2 (dBμV/m) ^{*2} PK: 110.8(dBμV/m) ^{*3} PK:122.2 (dBμV/m) ^{*4}
	☐	15.407(b)(4)(ii)	Emission limits in section 15.247(d)	
^{*1} beyond 75 MHz or more above of the band edge.			^{*2} below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above.	
^{*3} below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above.			^{*4} from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.	

Note:

The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength:

$$E = \frac{1000000\sqrt{30P}}{3} \mu\text{V/m, where P is the eirp (Watts).}$$

4.1.2 Test Instruments

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver Keysight	N9038A	MY54450088	July 08, 2017	July 07, 2018
Pre-Amplifier ^(*) EMCI	EMC001340	980142	Jan. 20, 2016	Jan. 19, 2018
Loop Antenna ^(*) Electro-Metrics	EM-6879	264	Dec. 16, 2016	Dec. 15, 2018
RF Cable	NA	LOOPCAB-001 LOOPCAB-002	Jan. 17, 2017	Jan. 16, 2018
Pre-Amplifier Mini-Circuits	ZFL-1000VH2B	AMP-ZFL-01	Nov. 09, 2017	Nov. 08, 2018
Trilog Broadband Antenna SCHWARZBECK	VULB 9168	9168-406	Dec. 13, 2016	Dec. 12, 2017
RF Cable	8D	966-4-1 966-4-2 966-4-3	Apr. 01, 2017	Mar. 31, 2018
Fixed attenuator Mini-Circuits	UNAT-5+	PAD-3m-4-01	Oct. 03, 2017	Oct. 02, 2018
Horn_Antenna SCHWARZBECK	BBHA 9120D	9120D-783	Dec. 27, 2016	Dec. 26, 2017
Pre-Amplifier EMCI	EMC12630SE	980385	Feb. 02, 2017	Feb. 01, 2018
RF Cable	EMC104-SM-SM-1200 EMC104-SM-SM-2000 EMC104-SM-SM-5000	160923 150318 150321	Feb. 02, 2017 Mar. 29, 2017 Mar. 29, 2017	Feb. 01, 2018 Mar. 28, 2018 Mar. 28, 2018
Pre-Amplifier EMCI	EMC184045SE	980387	Feb. 02, 2017	Feb. 01, 2018
Horn_Antenna SCHWARZBECK	BBHA 9170	BBHA9170608	Dec. 15, 2016	Dec. 14, 2017
RF Cable	SUCOFLEX 102	36432/2 36433/2	Jan. 15, 2017	Jan. 14, 2018
Software	ADT_Radiated_V8.7.08	NA	NA	NA
Antenna Tower & Turn Table Max-Full	MF-7802	MF780208410	NA	NA
Boresight Antenna Fixture	FBA-01	FBA-SIP02	NA	NA
Spectrum Analyzer R&S	FSv40	100964	July 1, 2017	June 30, 2018
Power meter Anritsu	ML2495A	1014008	May 11, 2017	May 10, 2018
Power sensor Anritsu	MA2411B	0917122	May 11, 2017	May 10, 2018
AC Power Source Extech Electronics	6205	1440452	NA	NA
Temperature & Humidity Chamber Giant Force	GTH-150-40-SP-AR	MAA0812-008	Jan. 11, 2017	Jan. 10, 2018
True RMS Clamp Meter FLUKE	325	31130711WS	May 29, 2017	May 28, 2018

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. *The calibration interval of the above test instruments is 24 months and the calibrations are traceable to NML/ROC and NIST/USA.
3. The test was performed in 966 Chamber No. 4.
4. The CANADA Site Registration No. is 20331-2
5. Loop antenna was used for all emissions below 30 MHz.
6. Tested Date: Nov. 13 to 20, 2017

4.1.3 Test Procedure

For Radiated emission below 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Both X and Y axes of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9kHz at frequency below 30MHz.

For Radiated emission above 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters (for 30MHz ~ 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Note:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is $\geq 1/T$ (Duty cycle < 98%) or 10Hz (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.

4.1.4 Deviation from Test Standard


No deviation.

4.1.5 Test Setup


For Radiated emission below 30MHz

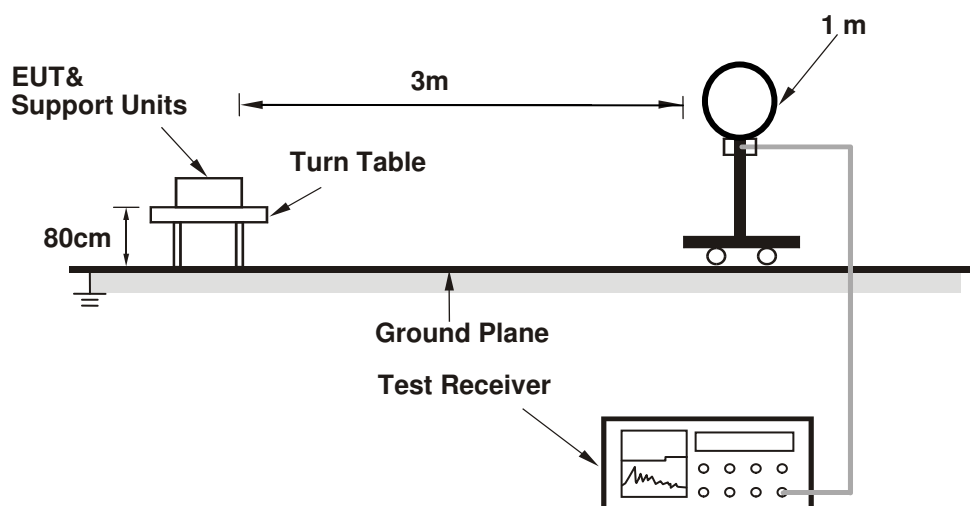

For Radiated emission 30MHz to 1GHz

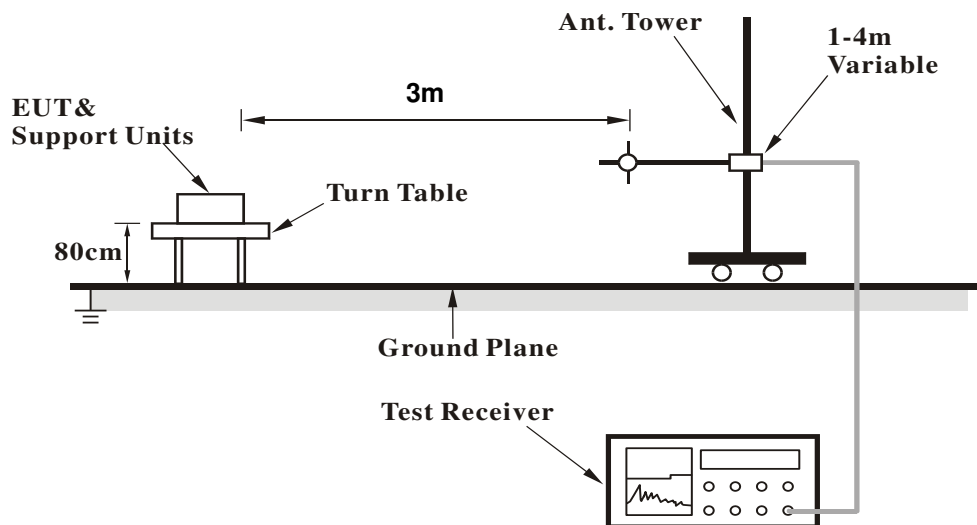

For Radiated emission above 1GHz

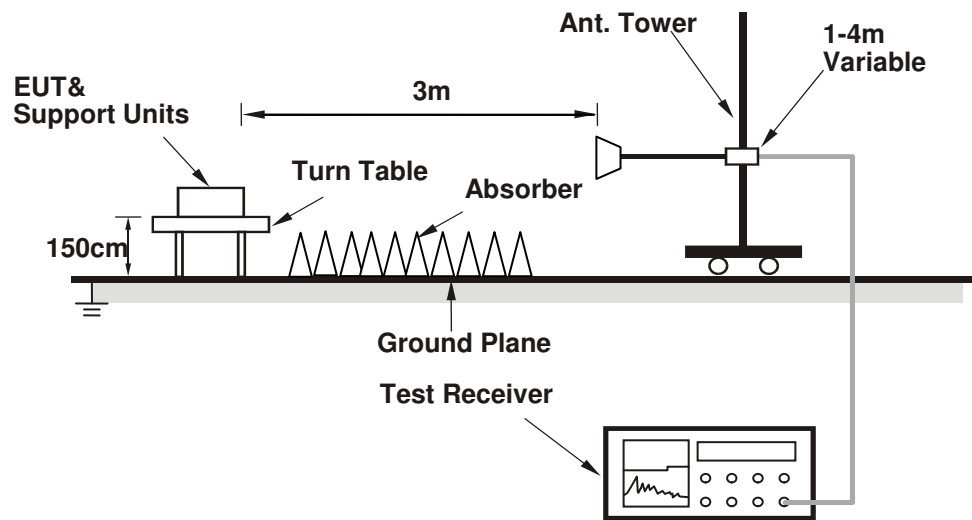

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.6 EUT Operating Condition

- Connected the EUT with the Laptop which is placed on remote site.
- Controlling software (DAP2680 QRCT Tool SOP.pptx) has been activated to set the EUT on specific status.

4.1.7 Test Results

Above 1GHz Data:

802.11a

CHANNEL	TX Channel 36	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	70.4 PK	74.0	-3.6	1.47 H	1	66.7	3.7
2	5150.00	53.9 AV	54.0	-0.1	1.47 H	1	50.2	3.7
3	*5180.00	117.3 PK			1.47 H	1	113.6	3.7
4	*5180.00	107.6 AV			1.47 H	1	103.9	3.7
5	#10360.00	51.9 PK	74.0	-22.1	1.42 H	187	38.9	13.0
6	#10360.00	38.8 AV	54.0	-15.2	1.42 H	187	25.8	13.0
7	15540.00	69.5 PK	74.0	-4.5	2.98 H	144	56.4	13.1
8	15540.00	53.3 AV	54.0	-0.7	2.98 H	144	40.2	13.1
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	66.9 PK	74.0	-7.1	1.40 V	19	63.2	3.7
2	5150.00	53.3 AV	54.0	-0.7	1.40 V	19	49.6	3.7
3	*5180.00	120.4 PK			1.40 V	19	116.7	3.7
4	*5180.00	109.6 AV			1.40 V	19	105.9	3.7
5	#10360.00	52.3 PK	74.0	-21.7	1.16 V	192	39.3	13.0
6	#10360.00	39.0 AV	54.0	-15.0	1.16 V	192	26.0	13.0
7	15540.00	68.5 PK	74.0	-5.5	1.32 V	220	55.4	13.1
8	15540.00	52.6 AV	54.0	-1.4	1.32 V	220	39.5	13.1

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 40	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	59.6 PK	74.0	-14.4	2.29 H	2	55.9	3.7
2	5150.00	45.7 AV	54.0	-8.3	2.29 H	2	42.0	3.7
3	*5200.00	117.5 PK			2.29 H	2	113.8	3.7
4	*5200.00	107.8 AV			2.29 H	2	104.1	3.7
5	#10400.00	49.3 PK	74.0	-24.7	1.45 H	174	36.3	13.0
6	#10400.00	37.5 AV	54.0	-16.5	1.45 H	174	24.5	13.0
7	15600.00	69.0 PK	74.0	-5.0	3.01 H	144	55.7	13.3
8	15600.00	53.2 AV	54.0	-0.8	3.01 H	144	39.9	13.3

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	56.2 PK	74.0	-17.8	1.40 V	18	52.5	3.7
2	5150.00	44.8 AV	54.0	-9.2	1.40 V	18	41.1	3.7
3	*5200.00	119.2 PK			1.40 V	18	115.5	3.7
4	*5200.00	109.2 AV			1.40 V	18	105.5	3.7
5	#10400.00	49.7 PK	74.0	-24.3	1.16 V	192	36.7	13.0
6	#10400.00	37.7 AV	54.0	-16.3	1.16 V	192	24.7	13.0
7	15600.00	67.5 PK	74.0	-6.5	1.32 V	220	54.2	13.3
8	15600.00	51.6 AV	54.0	-2.4	1.32 V	220	38.3	13.3

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 48	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5240.00	117.3 PK			1.48 H	35	113.5	3.8
2	*5240.00	107.4 AV			1.48 H	35	103.6	3.8
3	5350.00	52.3 PK	74.0	-21.7	1.48 H	35	48.2	4.1
4	5350.00	39.5 AV	54.0	-14.5	1.48 H	35	35.4	4.1
5	#10480.00	50.1 PK	74.0	-23.9	1.39 H	174	36.9	13.2
6	#10480.00	37.7 AV	54.0	-16.3	1.39 H	174	24.5	13.2
7	15720.00	69.8 PK	74.0	-4.2	3.01 H	145	56.2	13.6
8	15720.00	53.9 AV	54.0	-0.1	3.01 H	145	40.3	13.6

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5240.00	120.3 PK			1.40 V	19	116.5	3.8
2	*5240.00	109.6 AV			1.40 V	19	105.8	3.8
3	5350.00	53.2 PK	74.0	-20.8	1.40 V	19	49.1	4.1
4	5350.00	40.3 AV	54.0	-13.7	1.40 V	19	36.2	4.1
5	#10480.00	50.5 PK	74.0	-23.5	1.15 V	190	37.3	13.2
6	#10480.00	37.9 AV	54.0	-16.1	1.15 V	190	24.7	13.2
7	15720.00	69.3 PK	74.0	-4.7	1.27 V	220	55.7	13.6
8	15720.00	53.5 AV	54.0	-0.5	1.27 V	220	39.9	13.6

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 149	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5625.64	54.9 PK	68.2	-13.3	1.01 H	72	50.2	4.7
2	*5745.00	118.8 PK			1.01 H	72	114.4	4.4
3	*5745.00	105.8 AV			1.01 H	72	101.4	4.4
4	#5981.41	55.6 PK	68.2	-12.6	1.01 H	72	50.0	5.6
5	11490.00	64.7 PK	74.0	-9.3	1.67 H	61	51.2	13.5
6	11490.00	50.9 AV	54.0	-3.1	1.67 H	61	37.4	13.5
7	#17235.00	68.7 PK	74.0	-5.3	2.43 H	188	51.4	17.3
8	#17235.00	53.9 AV	54.0	-0.1	2.43 H	188	36.6	17.3

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5596.78	55.6 PK	68.2	-12.6	1.14 V	38	51.0	4.6
2	*5745.00	119.8 PK			1.14 V	38	115.4	4.4
3	*5745.00	109.4 AV			1.14 V	38	105.0	4.4
4	#5989.96	55.3 PK	68.2	-12.9	1.14 V	38	49.7	5.6
5	11490.00	61.0 PK	74.0	-13.0	1.05 V	152	47.5	13.5
6	11490.00	47.0 AV	54.0	-7.0	1.05 V	152	33.5	13.5
7	#17235.00	67.5 PK	74.0	-6.5	3.90 V	153	50.2	17.3
8	#17235.00	52.7 AV	54.0	-1.3	3.90 V	153	35.4	17.3

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 157	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5649.39	54.4 PK	68.2	-13.8	1.01 H	65	49.6	4.8
2	*5785.00	119.0 PK			1.01 H	65	114.6	4.4
3	*5785.00	106.0 AV			1.01 H	65	101.6	4.4
4	#5959.56	55.1 PK	68.2	-13.1	1.01 H	65	49.6	5.5
5	11570.00	64.7 PK	74.0	-9.3	1.65 H	74	51.2	13.5
6	11570.00	50.7 AV	54.0	-3.3	1.65 H	74	37.2	13.5
7	#17355.00	69.9 PK	74.0	-4.1	2.10 H	182	51.9	18.0
8	#17355.00	53.9 AV	54.0	-0.1	2.10 H	182	35.9	18.0

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5625.24	56.3 PK	68.2	-11.9	1.14 V	38	51.6	4.7
2	*5785.00	119.8 PK			1.14 V	36	115.4	4.4
3	*5785.00	109.4 AV			1.14 V	36	105.0	4.4
4	#5997.20	55.9 PK	68.2	-12.3	1.14 V	38	50.3	5.6
5	11570.00	60.8 PK	74.0	-13.2	1.08 V	136	47.3	13.5
6	11570.00	46.9 AV	54.0	-7.1	1.08 V	136	33.4	13.5
7	#17355.00	67.4 PK	74.0	-6.6	3.95 V	160	49.4	18.0
8	#17355.00	52.3 AV	54.0	-1.7	3.95 V	160	34.3	18.0

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 165	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5643.88	54.8 PK	68.2	-13.4	1.05 H	69	50.0	4.8
2	*5825.00	119.1 PK			1.05 H	69	114.7	4.4
3	*5825.00	106.1 AV			1.05 H	69	101.7	4.4
4	#5969.07	56.4 PK	68.2	-11.8	1.05 H	69	50.9	5.5
5	11650.00	64.8 PK	74.0	-9.2	1.69 H	65	51.1	13.7
6	11650.00	50.8 AV	54.0	-3.2	1.69 H	65	37.1	13.7
7	#17475.00	68.2 PK	74.0	-5.8	2.15 H	168	49.6	18.6
8	#17475.00	53.8 AV	54.0	-0.2	2.15 H	168	35.2	18.6

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5616.54	55.5 PK	68.2	-12.7	1.14 V	37	50.8	4.7
2	*5825.00	119.5 PK			1.14 V	37	115.1	4.4
3	*5825.00	109.0 AV			1.14 V	37	104.6	4.4
4	#6000.59	55.6 PK	68.2	-12.6	1.14 V	37	50.0	5.6
5	11650.00	61.5 PK	74.0	-12.5	1.03 V	157	47.8	13.7
6	11650.00	47.4 AV	54.0	-6.6	1.03 V	157	33.7	13.7
7	#17475.00	67.7 PK	74.0	-6.3	3.93 V	143	49.1	18.6
8	#17475.00	52.6 AV	54.0	-1.4	3.93 V	143	34.0	18.6

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

802.11ac (VHT20)

CHANNEL	TX Channel 36	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	67.1 PK	74.0	-6.9	1.03 H	29	63.4	3.7
2	5150.00	53.9 AV	54.0	-0.1	1.03 H	29	50.2	3.7
3	*5180.00	117.2 PK			1.03 H	29	113.5	3.7
4	*5180.00	106.1 AV			1.03 H	29	102.4	3.7
5	#10360.00	50.1 PK	74.0	-23.9	1.44 H	181	37.1	13.0
6	#10360.00	37.3 AV	54.0	-16.7	1.44 H	181	24.3	13.0
7	15540.00	67.5 PK	74.0	-6.5	3.07 H	139	54.4	13.1
8	15540.00	52.7 AV	54.0	-1.3	3.07 H	139	39.6	13.1
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	68.9 PK	74.0	-5.1	1.57 V	3	65.2	3.7
2	5150.00	52.8 AV	54.0	-1.2	1.57 V	3	49.1	3.7
3	*5180.00	119.1 PK			1.57 V	3	115.4	3.7
4	*5180.00	108.4 AV			1.57 V	3	104.7	3.7
5	#10360.00	50.0 PK	74.0	-24.0	3.62 V	195	37.0	13.0
6	#10360.00	38.3 AV	54.0	-15.7	3.62 V	195	25.3	13.0
7	15540.00	62.8 PK	74.0	-11.2	2.03 V	214	49.7	13.1
8	15540.00	48.4 AV	54.0	-5.6	2.03 V	214	35.3	13.1

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 40	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	65.6 PK	74.0	-8.4	1.05 H	58	61.9	3.7
2	5150.00	51.1 AV	54.0	-2.9	1.05 H	58	47.4	3.7
3	*5200.00	119.1 PK			1.05 H	58	115.4	3.7
4	*5200.00	108.9 AV			1.05 H	58	105.2	3.7
5	5350.00	54.0 PK	74.0	-20.0	1.05 H	58	49.9	4.1
6	5350.00	40.0 AV	54.0	-14.0	1.05 H	58	35.9	4.1
7	#10400.00	60.2 PK	74.0	-13.8	1.45 H	95	47.2	13.0
8	#10400.00	46.7 AV	54.0	-7.3	1.45 H	95	33.7	13.0
9	15600.00	68.7 PK	74.0	-5.3	2.98 H	141	55.4	13.3
10	15600.00	53.9 AV	54.0	-0.1	2.98 H	141	40.6	13.3

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	62.6 PK	74.0	-11.4	1.59 V	360	58.9	3.7
2	5150.00	49.2 AV	54.0	-4.8	1.59 V	360	45.5	3.7
3	*5200.00	120.7 PK			1.59 V	360	117.0	3.7
4	*5200.00	110.3 AV			1.59 V	360	106.6	3.7
5	5350.00	52.7 PK	74.0	-21.3	1.59 V	360	48.6	4.1
6	5350.00	38.7 AV	54.0	-15.3	1.59 V	360	34.6	4.1
7	#10400.00	61.1 PK	74.0	-12.9	3.81 V	329	48.1	13.0
8	#10400.00	46.7 AV	54.0	-7.3	3.81 V	329	33.7	13.0
9	15600.00	64.2 PK	74.0	-9.8	3.77 V	163	50.9	13.3
10	15600.00	49.3 AV	54.0	-4.7	3.77 V	163	36.0	13.3

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 48	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5240.00	117.7 PK			1.16 H	30	113.9	3.8
2	*5240.00	107.2 AV			1.16 H	30	103.4	3.8
3	5376.00	51.4 PK	74.0	-22.6	1.16 H	30	47.3	4.1
4	5376.00	40.4 AV	54.0	-13.6	1.16 H	30	36.3	4.1
5	#10480.00	60.3 PK	74.0	-13.7	1.54 H	99	47.1	13.2
6	#10480.00	46.6 AV	54.0	-7.4	1.54 H	99	33.4	13.2
7	15720.00	69.9 PK	74.0	-4.1	2.89 H	132	56.3	13.6
8	15720.00	53.8 AV	54.0	-0.2	2.89 H	132	40.2	13.6

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5240.00	119.6 PK			1.54 V	354	115.8	3.8
2	*5240.00	109.5 AV			1.54 V	354	105.7	3.8
3	5376.00	52.7 PK	74.0	-21.3	1.54 V	354	48.6	4.1
4	5376.00	38.5 AV	54.0	-15.5	1.54 V	354	34.4	4.1
5	#10480.00	60.6 PK	74.0	-13.4	3.79 V	319	47.4	13.2
6	#10480.00	46.3 AV	54.0	-7.7	3.79 V	319	33.1	13.2
7	15720.00	63.8 PK	74.0	-10.2	3.75 V	154	50.2	13.6
8	15720.00	49.0 AV	54.0	-5.0	3.75 V	154	35.4	13.6

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 149	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5627.00	54.7 PK	68.2	-13.5	1.01 H	71	50.0	4.7
2	*5745.00	118.8 PK			1.01 H	71	114.4	4.4
3	*5745.00	107.0 AV			1.01 H	71	102.6	4.4
4	#5989.83	54.5 PK	68.2	-13.7	1.01 H	71	48.9	5.6
5	11490.00	60.9 PK	74.0	-13.1	1.54 H	79	47.4	13.5
6	11490.00	47.6 AV	54.0	-6.4	1.54 H	79	34.1	13.5
7	#17235.00	69.1 PK	74.0	-4.9	2.00 H	176	51.8	17.3
8	#17235.00	53.8 AV	54.0	-0.2	2.00 H	176	36.5	17.3

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5646.44	56.8 PK	68.2	-11.4	1.51 V	360	52.0	4.8
2	*5745.00	118.5 PK			1.51 V	360	114.1	4.4
3	*5745.00	109.4 AV			1.51 V	360	105.0	4.4
4	#6004.60	56.2 PK	68.2	-12.0	1.51 V	360	50.5	5.7
5	11490.00	60.1 PK	74.0	-13.9	3.82 V	326	46.6	13.5
6	11490.00	45.9 AV	54.0	-8.1	3.82 V	326	32.4	13.5
7	#17235.00	63.5 PK	74.0	-10.5	3.79 V	147	46.2	17.3
8	#17235.00	48.9 AV	54.0	-5.1	3.79 V	147	31.6	17.3

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 157	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5621.68	55.3 PK	68.2	-12.9	1.05 H	56	50.6	4.7
2	*5785.00	118.6 PK			1.05 H	56	114.2	4.4
3	*5785.00	106.7 AV			1.05 H	56	102.3	4.4
4	#5929.36	54.9 PK	68.2	-13.3	1.05 H	56	49.5	5.4
5	11570.00	61.0 PK	74.0	-13.0	1.54 H	79	47.5	13.5
6	11570.00	47.7 AV	54.0	-6.3	1.54 H	79	34.2	13.5
7	#17355.00	69.0 PK	74.0	-5.0	1.83 H	160	51.0	18.0
8	#17355.00	53.7 AV	54.0	-0.3	1.83 H	160	35.7	18.0

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5591.42	58.0 PK	68.2	-10.2	1.64 V	360	53.4	4.6
2	*5785.00	118.6 PK			1.64 V	360	114.2	4.4
3	*5785.00	109.1 AV			1.64 V	360	104.7	4.4
4	#5983.48	59.1 PK	68.2	-9.1	1.64 V	360	53.5	5.6
5	11570.00	59.8 PK	74.0	-14.2	3.87 V	336	46.3	13.5
6	11570.00	45.7 AV	54.0	-8.3	3.87 V	336	32.2	13.5
7	#17355.00	63.4 PK	74.0	-10.6	3.83 V	142	45.4	18.0
8	#17355.00	48.7 AV	54.0	-5.3	3.83 V	142	30.7	18.0

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 165	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5603.30	54.2 PK	68.2	-14.0	1.06 H	64	49.6	4.6
2	*5825.00	118.5 PK			1.06 H	64	114.1	4.4
3	*5825.00	107.0 AV			1.06 H	64	102.6	4.4
4	#5979.38	54.8 PK	68.2	-13.4	1.06 H	64	49.3	5.5
5	11650.00	61.0 PK	74.0	-13.0	1.56 H	86	47.3	13.7
6	11650.00	47.7 AV	54.0	-6.3	1.56 H	86	34.0	13.7
7	#17475.00	68.9 PK	74.0	-5.1	1.86 H	152	50.3	18.6
8	#17475.00	53.7 AV	54.0	-0.3	1.86 H	152	35.1	18.6

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5590.81	57.1 PK	68.2	-11.1	1.64 V	360	52.5	4.6
2	*5825.00	118.1 PK			1.64 V	360	113.7	4.4
3	*5825.00	109.2 AV			1.64 V	360	104.8	4.4
4	#5951.56	58.9 PK	68.2	-9.3	1.68 V	360	53.5	5.4
5	11650.00	59.6 PK	74.0	-14.4	3.77 V	339	45.9	13.7
6	11650.00	45.6 AV	54.0	-8.4	3.77 V	339	31.9	13.7
7	#17475.00	63.8 PK	74.0	-10.2	3.77 V	134	45.2	18.6
8	#17475.00	49.0 AV	54.0	-5.0	3.77 V	134	30.4	18.6

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

802.11ac (VHT40)

CHANNEL	TX Channel 38	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	68.8 PK	74.0	-5.2	1.14 H	29	65.1	3.7
2	5150.00	53.8 AV	54.0	-0.2	1.14 H	29	50.1	3.7
3	*5190.00	112.2 PK			1.14 H	29	108.5	3.7
4	*5190.00	103.1 AV			1.14 H	29	99.4	3.7
5	5350.00	52.1 PK	74.0	-21.9	1.14 H	29	48.0	4.1
6	5350.00	39.9 AV	54.0	-14.1	1.14 H	29	35.8	4.1
7	#10380.00	50.9 PK	74.0	-23.1	1.58 H	159	37.8	13.1
8	#10380.00	38.6 AV	54.0	-15.4	1.58 H	159	25.5	13.1
9	15570.00	53.5 PK	74.0	-20.5	1.69 H	171	40.2	13.3
10	15570.00	42.5 AV	54.0	-11.5	1.69 H	171	29.2	13.3
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	64.7 PK	74.0	-9.3	1.52 V	360	61.0	3.7
2	5150.00	53.7 AV	54.0	-0.3	1.52 V	360	50.0	3.7
3	*5190.00	115.2 PK			1.52 V	360	111.5	3.7
4	*5190.00	105.9 AV			1.52 V	360	102.2	3.7
5	5350.00	51.3 PK	74.0	-22.7	1.52 V	360	47.2	4.1
6	5350.00	39.2 AV	54.0	-14.8	1.52 V	360	35.1	4.1
7	#10380.00	51.8 PK	74.0	-22.2	3.70 V	351	38.7	13.1
8	#10380.00	39.5 AV	54.0	-14.5	3.70 V	351	26.4	13.1
9	15570.00	55.4 PK	74.0	-18.6	3.77 V	155	42.1	13.3
10	15570.00	44.3 AV	54.0	-9.7	3.77 V	155	31.0	13.3

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 46	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5230.00	115.5 PK			1.08 H	31	111.7	3.8
2	*5230.00	105.9 AV			1.08 H	31	102.1	3.8
3	5350.00	64.0 PK	74.0	-10.0	1.08 H	31	59.9	4.1
4	5350.00	53.6 AV	54.0	-0.4	1.08 H	31	49.5	4.1
5	#10460.00	50.8 PK	74.0	-23.2	1.64 H	162	37.7	13.1
6	#10460.00	38.3 AV	54.0	-15.7	1.64 H	162	25.2	13.1
7	15690.00	53.8 PK	74.0	-20.2	1.65 H	165	40.0	13.8
8	15690.00	42.8 AV	54.0	-11.2	1.65 H	165	29.0	13.8

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5230.00	118.5 PK			1.08 V	334	114.7	3.8
2	*5230.00	108.2 AV			1.08 V	334	104.4	3.8
3	5350.00	63.9 PK	74.0	-10.1	1.08 V	334	59.8	4.1
4	5350.00	51.8 AV	54.0	-2.2	1.08 V	334	47.7	4.1
5	#10460.00	52.4 PK	74.0	-21.6	3.73 V	336	39.3	13.1
6	#10460.00	40.0 AV	54.0	-14.0	3.73 V	336	26.9	13.1
7	15690.00	55.8 PK	74.0	-18.2	3.86 V	156	42.0	13.8
8	15690.00	44.6 AV	54.0	-9.4	3.86 V	156	30.8	13.8

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 151	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5648.57	55.0 PK	68.2	-13.2	1.03 H	73	50.2	4.8
2	*5755.00	114.3 PK			1.03 H	73	109.9	4.4
3	*5755.00	104.7 AV			1.03 H	73	100.3	4.4
4	#5989.73	54.0 PK	68.2	-14.2	1.03 H	73	48.4	5.6
5	11510.00	61.4 PK	74.0	-12.6	1.56 H	95	47.8	13.6
6	11510.00	47.9 AV	54.0	-6.1	1.56 H	95	34.3	13.6
7	#17265.00	68.4 PK	74.0	-5.6	1.86 H	141	50.8	17.6
8	#17265.00	53.7 AV	54.0	-0.3	1.86 H	141	36.1	17.6

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5650.33	55.9 PK	68.4	-12.5	1.61 V	11	51.2	4.7
2	*5755.00	115.5 PK			1.61 V	11	111.1	4.4
3	*5755.00	105.3 AV			1.61 V	11	100.9	4.4
4	#5983.81	53.2 PK	68.2	-15.0	1.61 V	11	47.6	5.6
5	11510.00	59.2 PK	74.0	-14.8	3.72 V	336	45.6	13.6
6	11510.00	45.5 AV	54.0	-8.5	3.72 V	336	31.9	13.6
7	#17265.00	63.2 PK	74.0	-10.8	3.74 V	129	45.6	17.6
8	#17265.00	48.5 AV	54.0	-5.5	3.74 V	129	30.9	17.6

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 159	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5631.51	54.3 PK	68.2	-13.9	1.05 H	79	49.5	4.8
2	*5795.00	114.0 PK			1.05 H	79	109.6	4.4
3	*5795.00	104.4 AV			1.05 H	79	100.0	4.4
4	#5983.78	54.5 PK	68.2	-13.7	1.05 H	79	48.9	5.6
5	11590.00	61.4 PK	74.0	-12.6	1.51 H	83	47.9	13.5
6	11590.00	48.0 AV	54.0	-6.0	1.51 H	83	34.5	13.5
7	#17385.00	69.1 PK	74.0	-4.9	1.85 H	160	50.8	18.3
8	#17385.00	53.8 AV	54.0	-0.2	1.85 H	160	35.5	18.3

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5651.86	56.0 PK	69.6	-13.6	1.80 V	184	51.3	4.7
2	*5795.00	115.7 PK			1.58 V	9	111.3	4.4
3	*5795.00	105.3 AV			1.58 V	9	100.9	4.4
4	#5995.98	54.1 PK	68.2	-14.1	1.80 V	184	48.5	5.6
5	11590.00	60.0 PK	74.0	-14.0	3.83 V	345	46.5	13.5
6	11590.00	46.0 AV	54.0	-8.0	3.83 V	345	32.5	13.5
7	#17385.00	63.3 PK	74.0	-10.7	3.72 V	147	45.0	18.3
8	#17385.00	48.6 AV	54.0	-5.4	3.72 V	147	30.3	18.3

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

802.11ac (VHT80)

CHANNEL	TX Channel 42	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	65.0 PK	74.0	-9.0	1.05 H	51	61.3	3.7
2	5150.00	52.6 AV	54.0	-1.4	1.05 H	51	48.9	3.7
3	*5210.00	109.7 PK			1.05 H	51	106.0	3.7
4	*5210.00	99.5 AV			1.05 H	51	95.8	3.7
5	5350.00	61.3 PK	74.0	-12.7	1.05 H	51	57.2	4.1
6	5350.00	47.2 AV	54.0	-6.8	1.05 H	51	43.1	4.1
7	#10420.00	50.9 PK	74.0	-23.1	1.60 H	172	37.8	13.1
8	#10420.00	38.4 AV	54.0	-15.6	1.60 H	172	25.3	13.1
9	15630.00	54.4 PK	74.0	-19.6	1.64 H	152	40.8	13.6
10	15630.00	42.9 AV	54.0	-11.1	1.64 H	152	29.3	13.6
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	66.3 PK	74.0	-7.7	1.50 V	37	62.6	3.7
2	5150.00	53.9 AV	54.0	-0.1	1.50 V	37	50.2	3.7
3	*5210.00	111.6 PK			1.50 V	37	107.9	3.7
4	*5210.00	101.8 AV			1.50 V	37	98.1	3.7
5	5350.00	62.6 PK	74.0	-11.4	1.50 V	37	58.5	4.1
6	5350.00	48.5 AV	54.0	-5.5	1.50 V	37	44.4	4.1
7	#10420.00	52.5 PK	74.0	-21.5	3.74 V	327	39.4	13.1
8	#10420.00	40.2 AV	54.0	-13.8	3.74 V	327	27.1	13.1
9	15630.00	55.6 PK	74.0	-18.4	3.85 V	136	42.0	13.6
10	15630.00	44.3 AV	54.0	-9.7	3.85 V	136	30.7	13.6

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 155	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5647.58	61.3 PK	68.2	-6.9	1.15 H	69	56.5	4.8
2	*5775.00	108.9 PK			1.15 H	69	104.5	4.4
3	*5775.00	99.6 AV			1.15 H	69	95.2	4.4
4	#5933.21	58.8 PK	68.2	-9.4	1.15 H	69	53.4	5.4
5	11550.00	50.6 PK	74.0	-23.4	1.64 H	186	37.1	13.5
6	11550.00	38.3 AV	54.0	-15.7	1.64 H	186	24.8	13.5
7	#17325.00	54.1 PK	74.0	-19.9	1.60 H	146	36.3	17.8
8	#17325.00	42.9 AV	54.0	-11.1	1.60 H	146	25.1	17.8

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5635.05	67.9 PK	68.2	-0.3	1.48 V	342	63.1	4.8
2	*5775.00	111.0 PK			1.48 V	342	106.6	4.4
3	*5775.00	101.2 AV			1.48 V	342	96.8	4.4
4	#5928.09	63.2 PK	68.2	-5.0	1.48 V	342	57.8	5.4
5	11550.00	52.5 PK	74.0	-21.5	3.73 V	351	39.0	13.5
6	11550.00	39.8 AV	54.0	-14.2	3.73 V	351	26.3	13.5
7	#17325.00	54.9 PK	74.0	-19.1	3.81 V	134	37.1	17.8
8	#17325.00	43.7 AV	54.0	-10.3	3.81 V	134	25.9	17.8

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

Below 1GHz Data:

802.11ac (VHT40)

CHANNEL	TX Channel 46	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	9kHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	47.80	26.9 QP	40.0	-13.1	2.00 H	256	34.7	-7.8
2	81.51	27.7 QP	40.0	-12.3	2.00 H	273	40.7	-13.0
3	98.48	37.9 QP	43.5	-5.6	2.00 H	289	50.6	-12.7
4	141.19	31.2 QP	43.5	-12.3	2.00 H	297	39.3	-8.1
5	375.05	30.6 QP	46.0	-15.4	1.00 H	323	36.1	-5.5
6	425.01	35.1 QP	46.0	-10.9	2.00 H	334	39.2	-4.1
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	32.59	31.2 QP	40.0	-8.8	1.00 V	133	40.1	-8.9
2	69.02	30.4 QP	40.0	-9.6	2.00 V	355	40.1	-9.7
3	98.43	32.9 QP	43.5	-10.6	3.00 V	226	45.6	-12.7
4	138.40	27.9 QP	43.5	-15.6	2.00 V	224	36.0	-8.1
5	425.01	27.9 QP	46.0	-18.1	1.50 V	0	32.0	-4.1
6	475.04	26.2 QP	46.0	-19.8	1.00 V	357	29.2	-3.0

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

4.2 Conducted Emission Measurement

4.2.1 Limits of Conducted Emission Measurement

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

Note: 1. The lower limit shall apply at the transition frequencies.

2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

4.2.2 Test Instruments

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver R&S	ESCS 30	847124/029	Nov. 01, 2017	Oct. 31, 2018
Line-Impedance Stabilization Network (for EUT) R&S	ESH3-Z5	848773/004	Nov. 15, 2016	Nov. 14, 2018
Line-Impedance Stabilization Network (for Peripheral) R&S	ENV216	100072	June 03, 2017	June 02, 2018
50 ohms Terminator	N/A	EMC-02	Sep. 22, 2017	Sep. 21, 2018
RF Cable	5D-FB	COCCAB-001	Sep. 29, 2017	Sep. 28, 2018
10 dB PAD Mini-Circuits	HAT-10+	CONATT-004	June 18, 2017	June 17, 2018
Software BVADT	BVADT_Cond_ V7.3.7.4	NA	NA	NA

Note:

1. The calibration interval of the above test instruments are 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in Shielded Room No. 1.
3. Tested Date: Nov. 28, 2017

4.2.3 Test Procedure


- The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

NOTE: All modes of operation were investigated and the worst-case emissions are reported.

4.2.4 Deviation from Test Standard

No deviation.

4.2.5 Test Setup

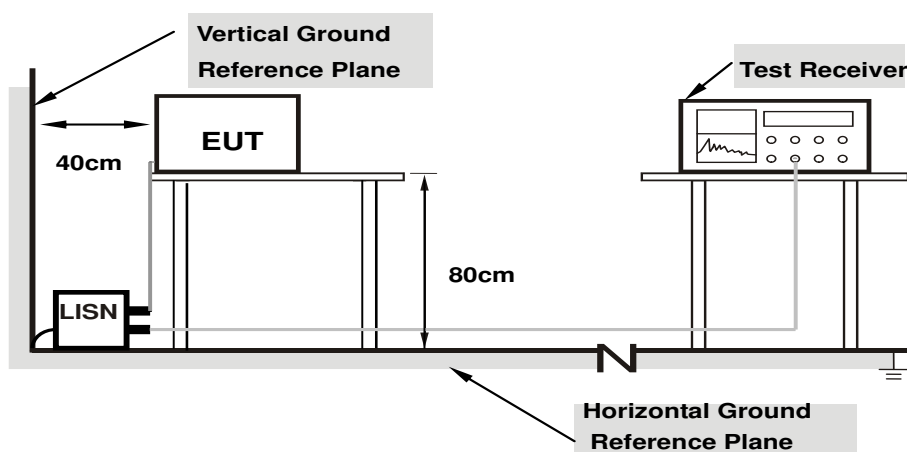

Note: 1.Support units were connected to second LISN.

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.2.6 EUT Operating Condition

Same as 4.1.6.


4.2.7 Test Results (Mode 1)

Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	----------	-------------------	-----------------------------------

No	Freq. [MHz]	Corr. Factor	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
		(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15000	0.14	46.62	30.92	46.76	31.06	66.00	56.00	-19.24	-24.94
2	0.18516	0.13	41.64	25.24	41.77	25.37	64.25	54.25	-22.48	-28.88
3	0.38438	0.18	34.60	26.53	34.78	26.71	58.18	48.18	-23.40	-21.47
4	1.70703	0.21	20.23	15.72	20.44	15.93	56.00	46.00	-35.56	-30.07
5	5.86719	0.44	20.78	15.54	21.22	15.98	60.00	50.00	-38.78	-34.02
6	25.80469	1.37	22.34	21.22	23.71	22.59	60.00	50.00	-36.29	-27.41

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

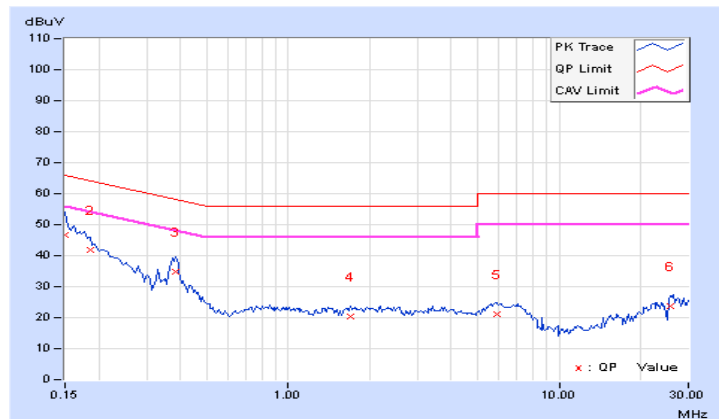


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	-------------	-------------------	--------------------------------

No	Freq. [MHz]	Corr.	Reading Value		Emission Level		Limit		Margin	
		Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
		(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.16172	0.12	45.07	28.75	45.19	28.87	65.38	55.38	-20.19	-26.51
2	0.27891	0.13	32.07	19.89	32.20	20.02	60.85	50.85	-28.65	-30.83
3	0.38047	0.16	32.13	23.21	32.29	23.37	58.27	48.27	-25.98	-24.90
4	1.10938	0.20	20.90	16.19	21.10	16.39	56.00	46.00	-34.90	-29.61
5	7.10938	0.44	20.60	15.26	21.04	15.70	60.00	50.00	-38.96	-34.30
6	16.26172	0.89	13.41	7.60	14.30	8.49	60.00	50.00	-45.70	-41.51

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

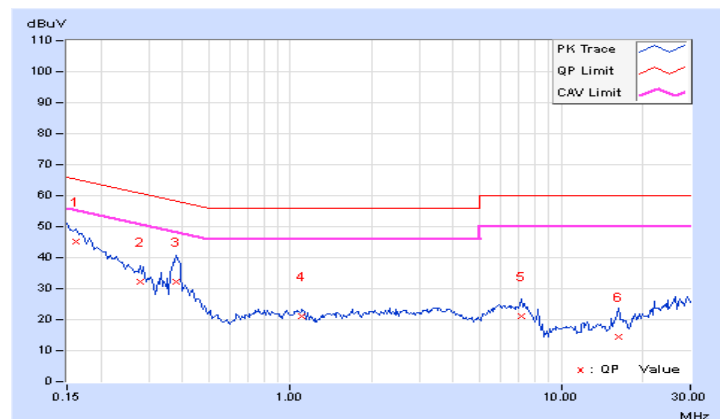


4.2.8 Test Results (Mode 2)

Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	----------	-------------------	--------------------------------

No	Freq. [MHz]	Corr. Factor	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
		(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15000	0.15	35.53	23.85	35.68	24.00	66.00	56.00	-30.32	-32.00
2	0.19687	0.14	30.36	21.56	30.50	21.70	63.74	53.74	-33.24	-32.04
3	0.37266	0.18	36.06	33.49	36.24	33.67	58.44	48.44	-22.20	-14.77
4	0.98203	0.24	8.03	3.15	8.27	3.39	56.00	46.00	-47.73	-42.61
5	4.88672	0.47	17.18	9.37	17.65	9.84	56.00	46.00	-38.35	-36.16
6	19.80469	1.61	27.43	20.58	29.04	22.19	60.00	50.00	-30.96	-27.81

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

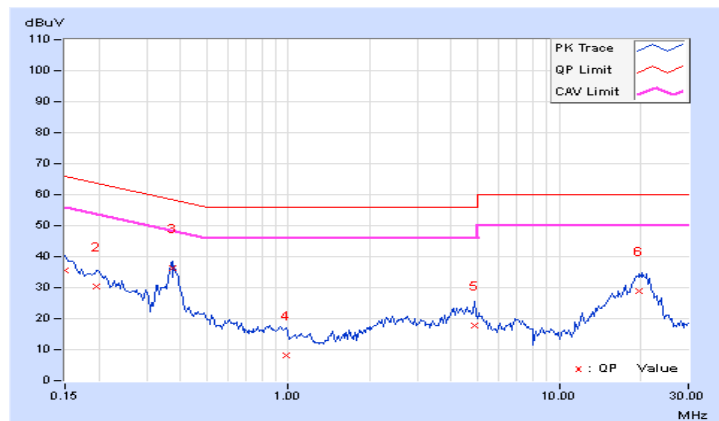


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	-------------	-------------------	--------------------------------

No	Freq. [MHz]	Corr.	Reading Value		Emission Level		Limit		Margin	
		Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
		(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15781	0.14	33.03	24.47	33.17	24.61	65.58	55.58	-32.41	-30.97
2	0.20078	0.11	28.96	20.65	29.07	20.76	63.58	53.58	-34.51	-32.82
3	0.36875	0.18	32.69	31.15	32.87	31.33	58.53	48.53	-25.66	-17.20
4	0.98203	0.20	9.70	2.78	9.90	2.98	56.00	46.00	-46.10	-43.02
5	4.28906	0.33	18.50	10.03	18.83	10.36	56.00	46.00	-37.17	-35.64
6	19.48047	1.29	27.07	19.92	28.36	21.21	60.00	50.00	-31.64	-28.79

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

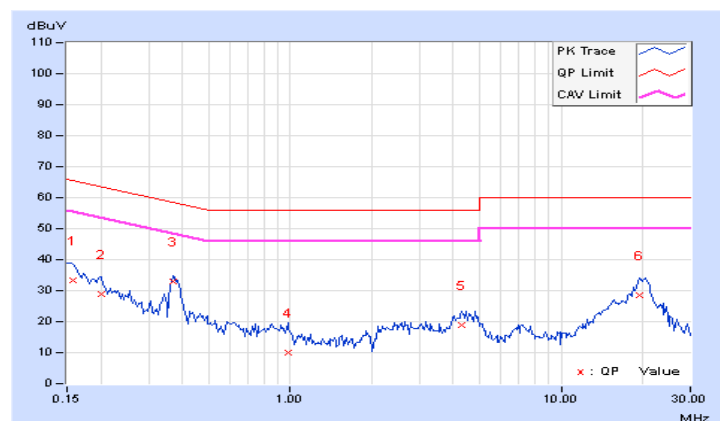


4.2.9 Test Results (Mode 3)

Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	----------	-------------------	--------------------------------

No	Freq. [MHz]	Corr. Factor	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
		(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15391	0.15	41.21	27.27	41.36	27.42	65.79	55.79	-24.43	-28.37
2	0.25156	0.15	27.58	16.27	27.73	16.42	61.71	51.71	-33.98	-35.29
3	0.40000	0.19	34.70	33.35	34.89	33.54	57.85	47.85	-22.96	-14.31
4	2.03516	0.24	12.16	7.63	12.40	7.87	56.00	46.00	-43.60	-38.13
5	7.23047	0.64	14.12	7.86	14.76	8.50	60.00	50.00	-45.24	-41.50
6	11.38281	0.95	27.52	22.16	28.47	23.11	60.00	50.00	-31.53	-26.89

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

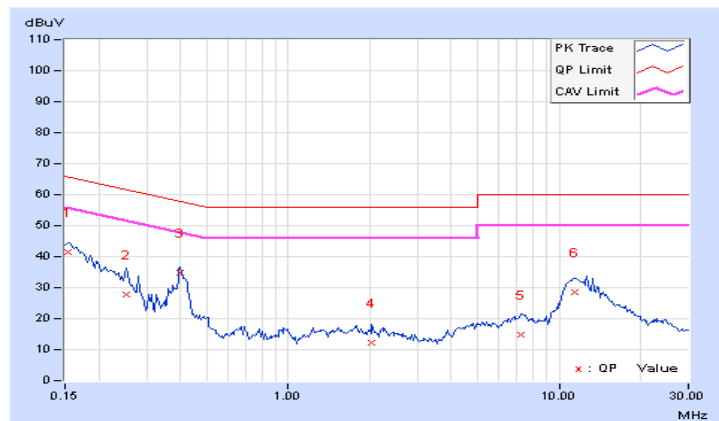


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	-------------	-------------------	--------------------------------

No	Freq. [MHz]	Corr.	Reading Value		Emission Level		Limit		Margin	
		Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
		(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.16562	0.13	39.03	24.71	39.16	24.84	65.18	55.18	-26.02	-30.34
2	0.23203	0.12	29.22	18.23	29.34	18.35	62.38	52.38	-33.04	-34.03
3	0.40391	0.19	26.56	20.55	26.75	20.74	57.77	47.77	-31.02	-27.03
4	1.67969	0.25	13.65	6.92	13.90	7.17	56.00	46.00	-42.10	-38.83
5	5.38672	0.41	12.33	5.95	12.74	6.36	60.00	50.00	-47.26	-43.64
6	11.20313	0.83	28.45	22.95	29.28	23.78	60.00	50.00	-30.72	-26.22

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

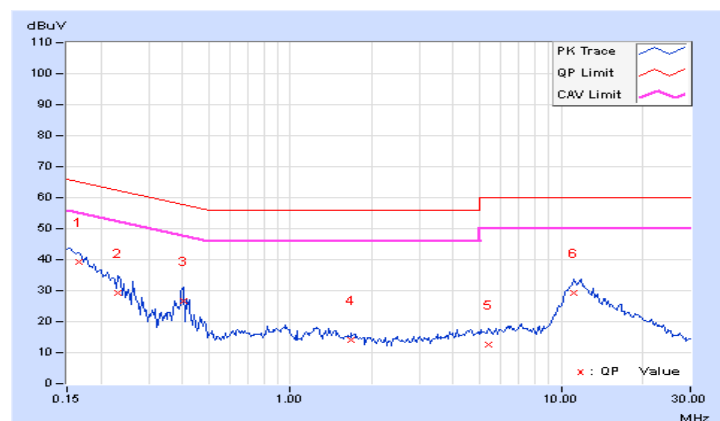

4.3 Transmit Power Measurement

4.3.1 Limits of Transmit Power Measurement

Operation Band	EUT Category		Limit
U-NII-1		Outdoor Access Point	1 Watt (30 dBm) (Max. e.i.r.p $\leq$ 125mW(21 dBm) at any elevation angle above 30 degrees as measured from the horizon)
		Fixed point-to-point Access Point	1 Watt (30 dBm)
	√	Indoor Access Point	1 Watt (30 dBm)
		Client device	250mW (24 dBm)
U-NII-2A			250mW (24 dBm) or 11 dBm+10 log B*
U-NII-2C			250mW (24 dBm) or 11 dBm+10 log B*
U-NII-3	√		1 Watt (30 dBm)

*B is the 26 dB emission bandwidth in megahertz

Per KDB 662911 Method of conducted output power measurement on IEEE 802.11 devices,


Array Gain = 0 dB (i.e., no array gain) for $N_{ANT} \leq 4$;

Array Gain = 0 dB (i.e., no array gain) for channel widths ≥ 40 MHz for any N_{ANT} ;

Array Gain = $5 \log(N_{ANT}/N_{SS})$ dB or 3 dB, whichever is less for 20-MHz channel widths with $N_{ANT} \geq 5$.

For power measurements on all other devices: Array Gain = $10 \log(N_{ANT}/N_{SS})$ dB.

4.3.2 Test Setup



4.3.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.3.4 Test Procedure

Method PM is used to perform output power measurement, trigger and gating function of wide band power meter is enabled to measure max output power of TX on burst. Duty factor is not added to measured value.

4.3.5 Deviation from Test Standard

No deviation.

4.3.6 EUT Operating Condition

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.3.7 Test Result

CDD Mode

802.11a

Chan.	Chan. Freq. (MHz)	Maximum Conducted Power (dBm)			Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2				
36	5180	21.53	21.49	21.43	422.157	26.25	30.00	Pass
40	5200	21.73	21.60	21.39	431.201	26.35	30.00	Pass
48	5240	21.88	21.55	21.45	436.696	26.40	30.00	Pass
149	5745	19.05	20.95	20.76	323.928	25.10	30.00	Pass
157	5785	19.47	21.17	20.88	341.892	25.34	30.00	Pass
165	5825	19.76	20.76	20.37	322.641	25.09	30.00	Pass

802.11ac (VHT20)

Chan.	Chan. Freq. (MHz)	Maximum Conducted Power (dBm)			Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2				
36	5180	21.15	21.35	20.93	390.655	25.92	30.00	Pass
40	5200	22.27	22.25	22.02	495.756	26.95	30.00	Pass
48	5240	22.30	22.20	21.94	492.098	26.92	30.00	Pass
149	5745	18.82	20.84	18.94	275.89	24.41	30.00	Pass
157	5785	18.61	20.44	18.72	257.746	24.11	30.00	Pass
165	5825	18.93	19.85	18.58	246.879	23.92	30.00	Pass

802.11ac (VHT40)

Chan.	Chan. Freq. (MHz)	Maximum Conducted Power (dBm)			Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2				
38	5190	20.16	20.52	19.99	316.243	25.00	30.00	Pass
46	5230	23.68	23.48	23.44	676.99	28.31	30.00	Pass
151	5755	18.73	20.69	18.87	268.955	24.30	30.00	Pass
159	5795	18.65	20.52	18.93	264.165	24.22	30.00	Pass

802.11ac (VHT80)

Chan.	Chan. Freq. (MHz)	Maximum Conducted Power (dBm)			Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2				
42	5210	19.64	19.69	19.61	276.567	24.42	30.00	Pass
155	5775	16.99	18.40	16.97	168.96	22.28	30.00	Pass

Beamforming Mode

802.11ac (VHT20)

Chan.	Chan. Freq. (MHz)	Maximum Conducted Power (dBm)			Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2				
36	5180	21.15	21.35	20.93	390.655	25.92	27.09	Pass
40	5200	22.27	22.25	22.02	495.756	26.95	27.09	Pass
48	5240	22.30	22.20	21.94	492.098	26.92	27.09	Pass
149	5745	18.82	20.84	18.94	275.89	24.41	27.09	Pass
157	5785	18.61	20.44	18.72	257.746	24.11	27.09	Pass
165	5825	18.93	19.85	18.58	246.879	23.92	27.09	Pass

Note: 1. Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + 10^{G3/20})^2 / 3] = 8.91\text{dBi} > 6\text{dBi}$, so the power limit shall be reduced to $30 - (8.91 - 6) = 27.09\text{dBm}$.

802.11ac (VHT40)

Chan.	Chan. Freq. (MHz)	Maximum Conducted Power (dBm)			Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2				
38	5190	20.16	20.52	19.99	316.243	25.00	27.09	Pass
46	5230	22.46	22.30	22.01	504.877	27.03	27.09	Pass
151	5755	18.73	20.69	18.87	268.955	24.30	27.09	Pass
159	5795	18.65	20.52	18.93	264.165	24.22	27.09	Pass

Note: 1. Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + 10^{G3/20})^2 / 3] = 8.91\text{dBi} > 6\text{dBi}$, so the power limit shall be reduced to $30 - (8.91 - 6) = 27.09\text{dBm}$.


802.11ac (VHT80)

Chan.	Chan. Freq. (MHz)	Maximum Conducted Power (dBm)			Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2				
42	5210	19.64	19.69	19.61	276.567	24.42	27.09	Pass
155	5775	16.99	18.40	16.97	168.96	22.28	27.09	Pass

Note: 1. Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + 10^{G3/20})^2 / 3] = 8.91\text{dBi} > 6\text{dBi}$, so the power limit shall be reduced to $30 - (8.91 - 6) = 27.09\text{dBm}$.

4.4 Occupied Bandwidth Measurement

4.4.1 Test Setup



4.4.2 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.4.3 Test Procedure

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with resolution bandwidth in the range of 1% to 5% of the anticipated emission bandwidth, and a video bandwidth at least 3x the resolution bandwidth and set the detector to SAMPLE. The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 %of the total mean power of a given emission.

4.4.4 Test Results

802.11a

Channel	Channel Frequency (MHz)	Occupied Bandwidth (MHz)		
		Chain 0	Chain 1	Chain 2
36	5180	16.56	16.56	16.68
40	5200	16.56	16.56	16.68
48	5240	16.44	16.44	16.56
149	5745	16.44	16.44	16.56
157	5785	16.44	16.44	16.44
165	5825	16.44	16.44	16.56

802.11ac (VHT20)

Channel	Channel Frequency (MHz)	Occupied Bandwidth (MHz)		
		Chain 0	Chain 1	Chain 2
36	5180	17.76	17.64	17.64
40	5200	17.76	17.76	17.88
48	5240	17.64	17.64	17.64
149	5745	17.64	17.64	17.64
157	5785	17.64	17.64	17.64
165	5825	17.76	17.76	17.64

802.11ac (VHT40)


Channel	Channel Frequency (MHz)	Occupied Bandwidth (MHz)		
		Chain 0	Chain 1	Chain 2
38	5190	36.24	36.24	36.24
46	5230	36.48	36.72	36.48
151	5755	36.24	36.24	36.24
159	5795	36.48	36.48	36.24

802.11ac (VHT80)


Channel	Channel Frequency (MHz)	Occupied Bandwidth (MHz)		
		Chain 0	Chain 1	Chain 2
42	5210	75.84	75.36	75.84
155	5775	76.32	75.36	75.84

Spectrum Plot of Worst Value


802.11a_Chain2 / CH36

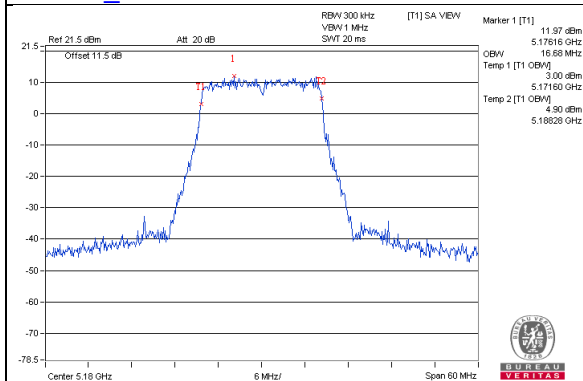


802.11ac (VHT20)_Chain2 / CH40

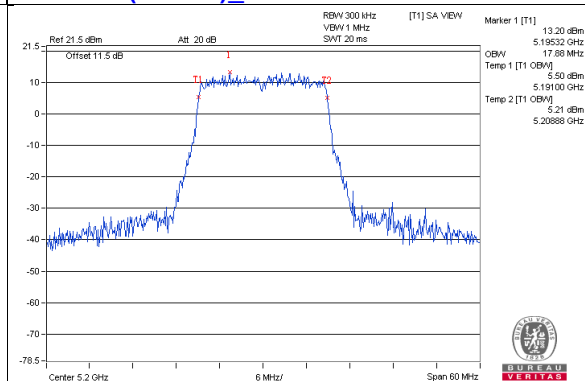

802.11ac (VHT40)_Chain1 / CH46

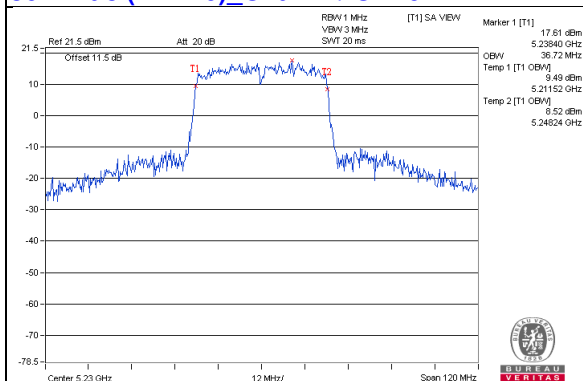


802.11ac (VHT80)_Chain0 / CH155

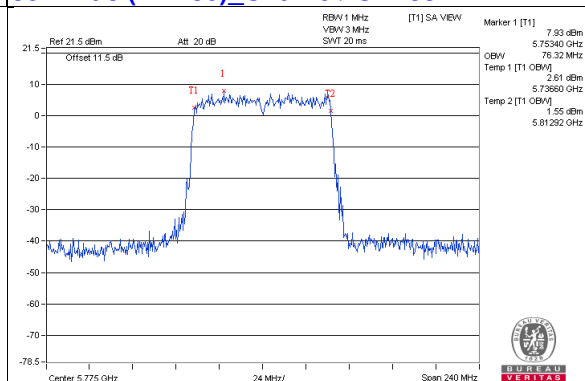


Spectrum Plot for near by DFS band (DFS is required, if 99% OCP straddle into U-NII-2A band)


802.11a_Chain0 / CH48

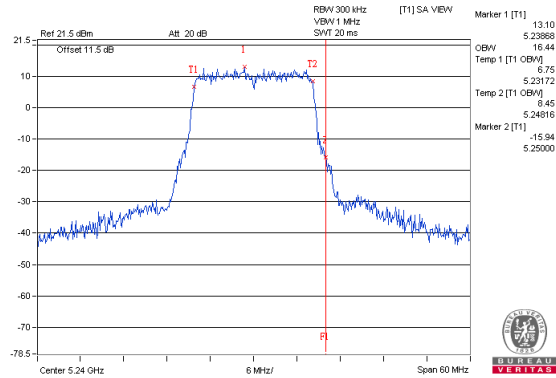


802.11a_Chain1 / CH48

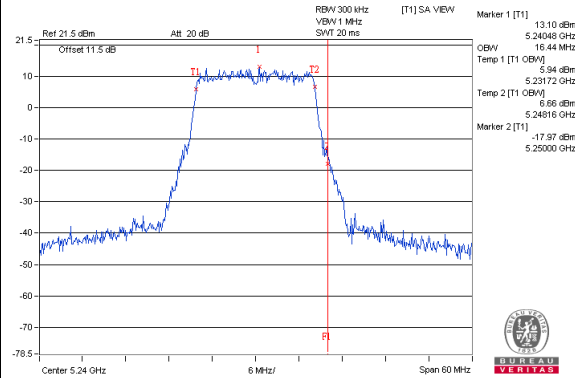


802.11a_Chain2 / CH48

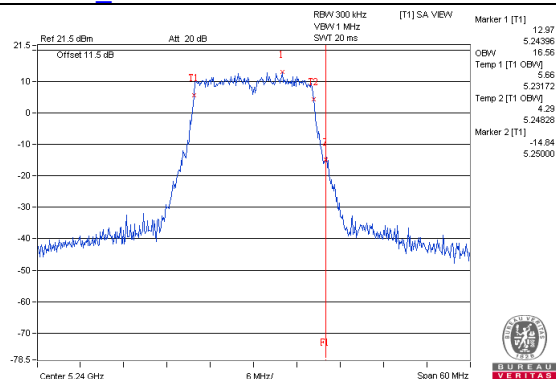


802.11ac(VHT20)_Chain0 / CH48

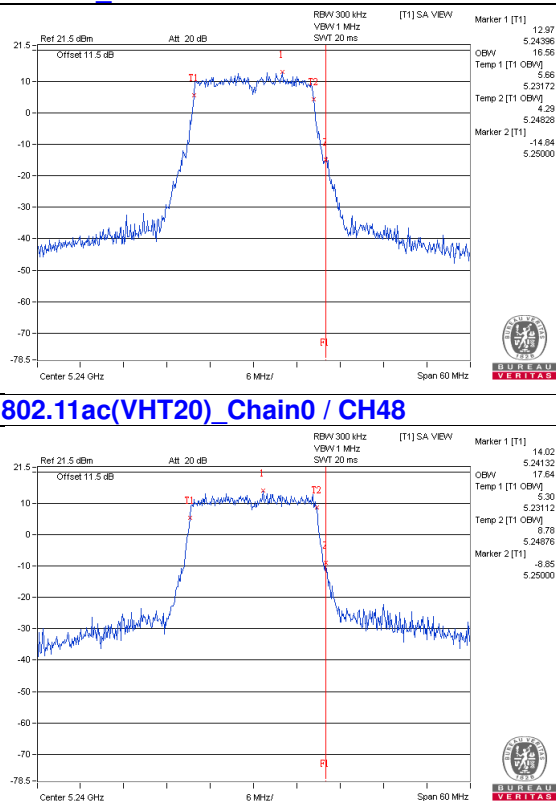


802.11ac(VHT20)_Chain1 / CH48

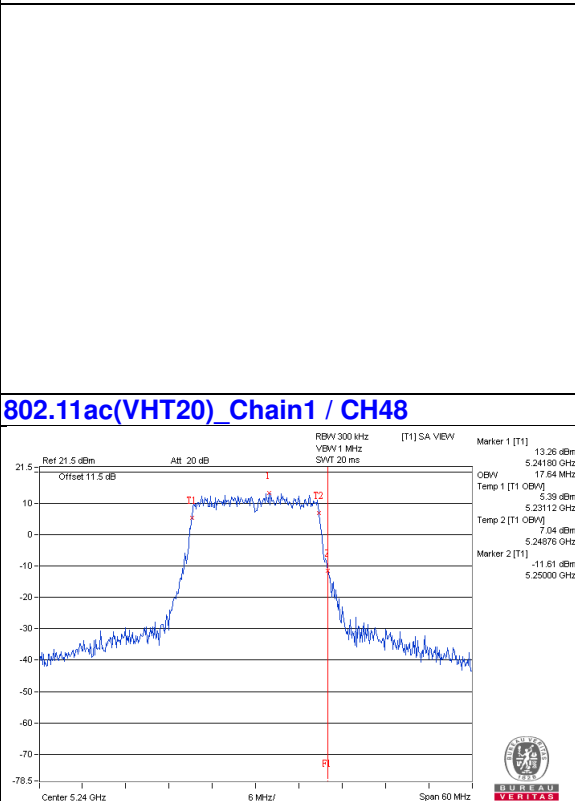

802.11ac(VHT20)_Chain2 / CH48

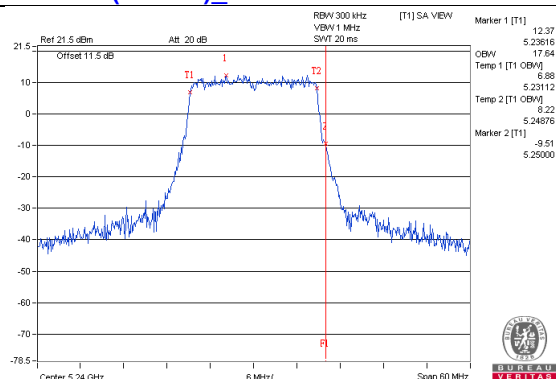


802.11ac(VHT20)_Chain3 / CH48




**Spectrum Plot for near by DFS band
(DFS is required, if 99% OCP straddle into U-NII-2A band)**


802.11ac(VHT40)_Chain0 / CH46

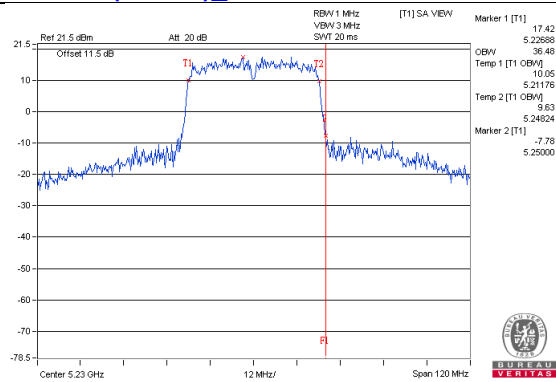


802.11ac(VHT40)_Chain1 / CH46

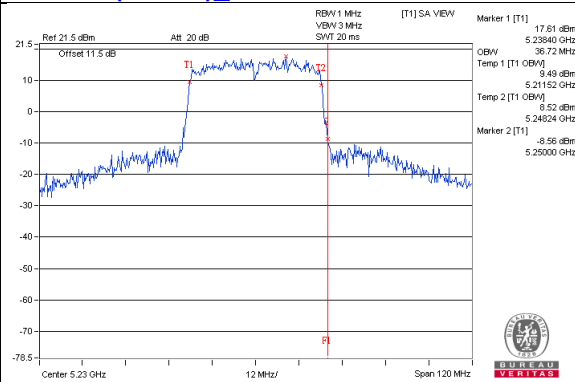


802.11ac(VHT40)_Chain2 / CH46

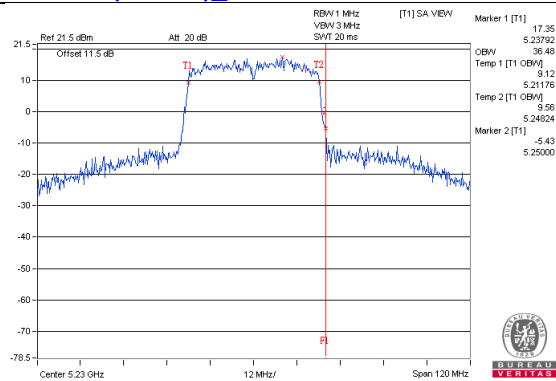


802.11ac(VHT80)_Chain0 / CH42

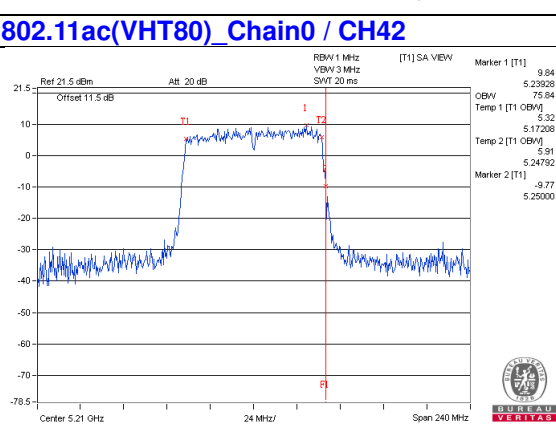


802.11ac(VHT80)_Chain1 / CH42

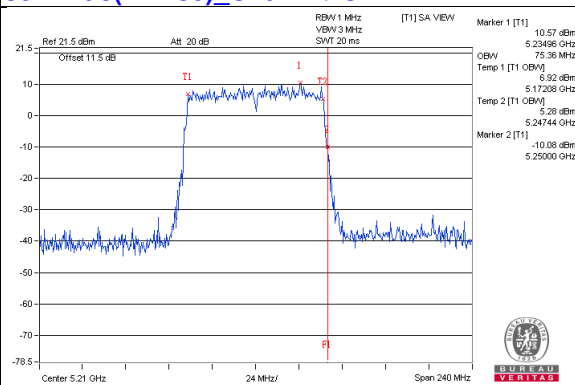

802.11ac(VHT80)_Chain2 / CH42

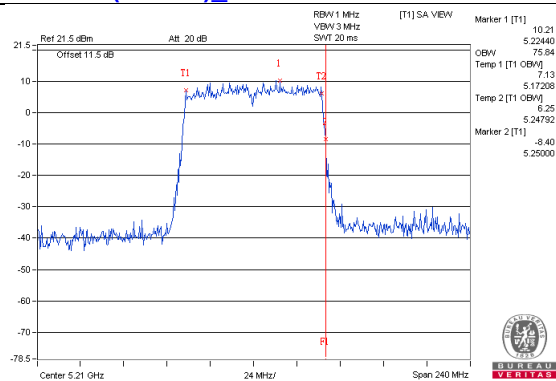


802.11ac(VHT80)_Chain3 / CH42




Spectrum Plot for near by DFS band (DFS is required, if 99% OCP straddle into U-NII-2C band)


802.11a_Chain0 / CH149

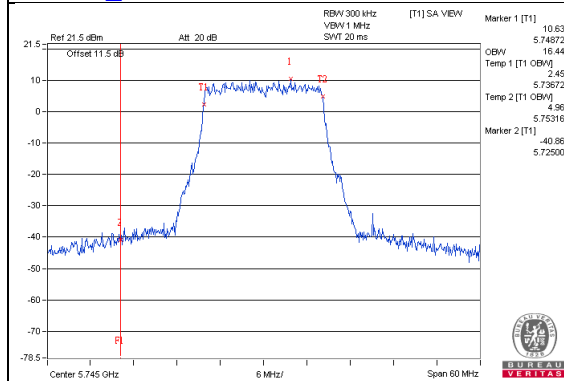


802.11a_Chain1 / CH149

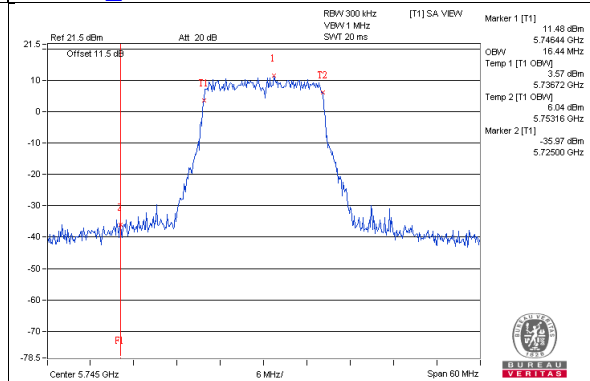


802.11a_Chain2 / CH149

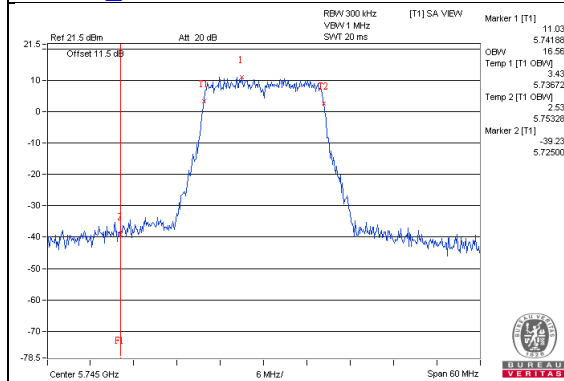


802.11ac(VHT20)_Chain0 / CH149

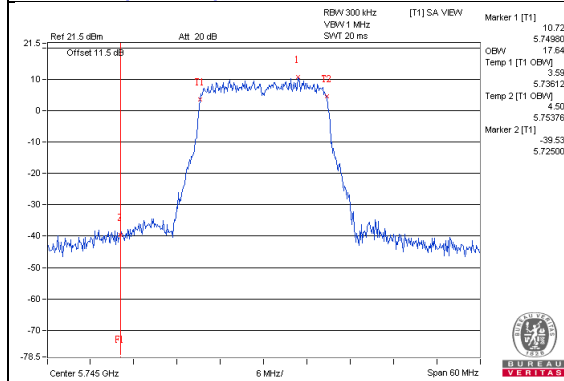

802.11ac(VHT20)_Chain1 / CH149

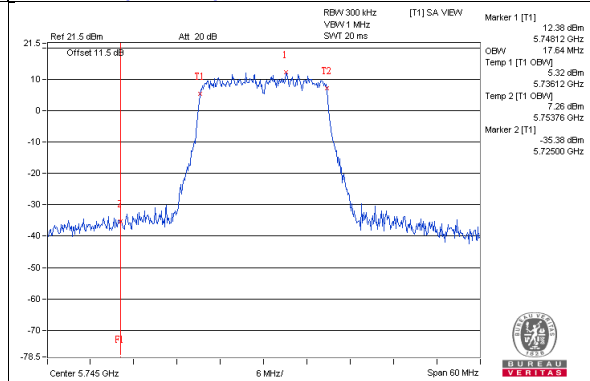


802.11ac(VHT20)_Chain2 / CH149

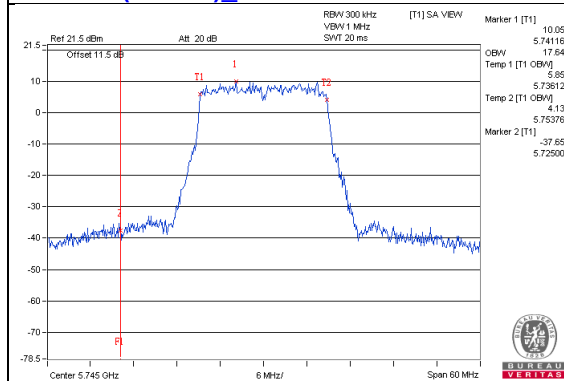


Spectrum Plot for near by DFS band (DFS is required, if 99% OCP straddle into U-NII-2C band)


802.11ac(VHT40)_Chain0 / CH151

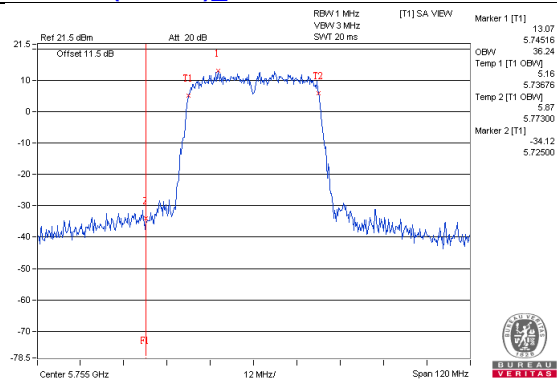


802.11ac(VHT40)_Chain1 / CH151

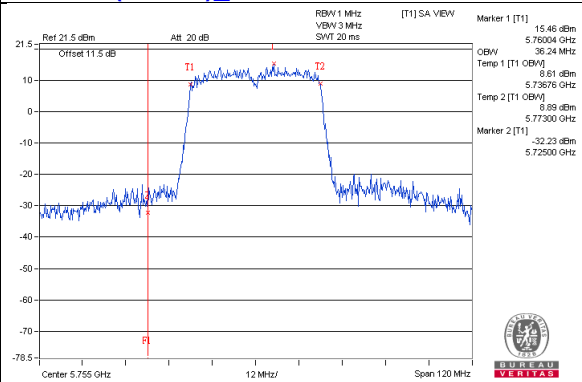


802.11ac(VHT40)_Chain2 / CH151

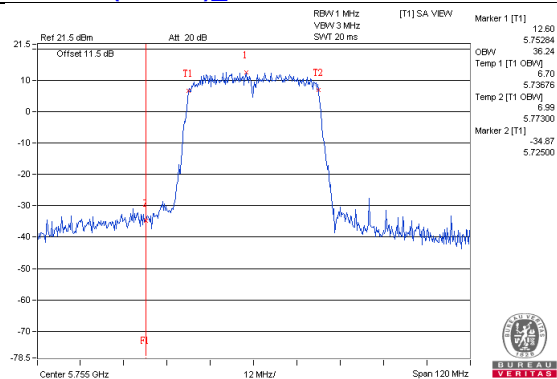


802.11ac(VHT80)_Chain0 / CH155

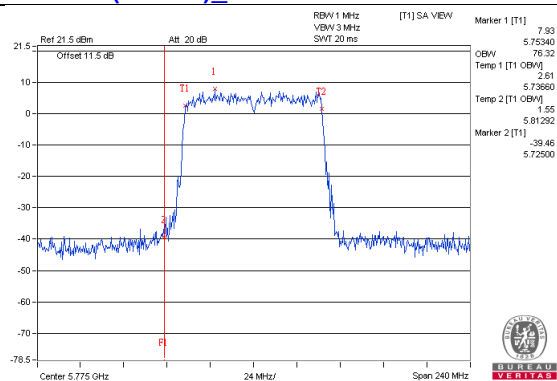


802.11ac(VHT80)_Chain1 / CH155

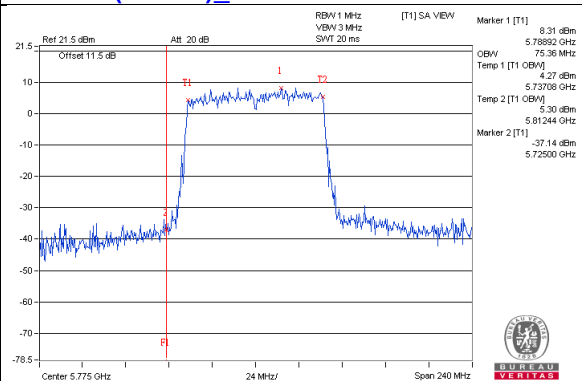

802.11ac(VHT80)_Chain2 / CH155

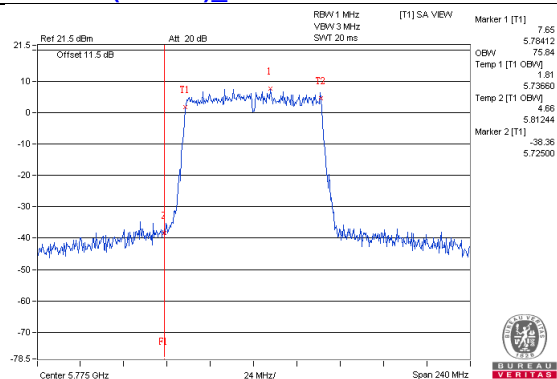

802.11ac(VHT80)_Chain1 / CH155




4.5 Peak Power Spectral Density Measurement

4.5.1 Limits of Peak Power Spectral Density Measurement

Operation Band	EUT Category		Limit
U-NII-1		Outdoor Access Point	17dBm/ MHz
		Fixed point-to-point Access Point	
	√	Indoor Access Point	
		Client device	11dBm/ MHz
U-NII-2A			11dBm/ MHz
U-NII-2C			11dBm/ MHz
U-NII-3	√		30dBm/ 500kHz

4.5.2 Test Setup



4.5.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.5.4 Test Procedure

802.11ac (VHT20)

For U-NII-1:

Using method SA-1

1. Set span to encompass the entire emission bandwidth (EBW) of the signal.
2. Set RBW = 1 MHz, Set VBW $\geq$ 3 MHz, Detector = RMS
3. Sweep time = auto, trigger set to "free run".
4. Trace average at least 100 traces in power averaging mode.
5. Record the max value

For U-NII-3:

1. Set span to encompass the entire emission bandwidth (EBW) of the signal.
2. Set RBW = 300 kHz, Set VBW $\geq$ 1 MHz, Detector = RMS
3. Use the peak marker function to determine the maximum power level in any 300 kHz band segment within the fundamental EBW.
4. Scale the observed power level to an equivalent value in 500 kHz by adjusting (reducing) the measured power by a bandwidth correction factor (BWCF) where $BWCF = 10\log(500 \text{ kHz}/300\text{kHz})$
5. Sweep time = auto, trigger set to "free run".
6. Trace average at least 100 traces in power averaging mode.
7. Record the max value

802.11a, 802.11ac (VHT40), 802.11ac (VHT80)

For U-NII-1:

Using method SA-2

1. Set span to encompass the entire emission bandwidth (EBW) of the signal.
2. Set RBW = 1 MHz, Set VBW $\geq$ 3 MHz, Detector = RMS
3. Sweep time = auto, trigger set to "free run".
4. Trace average at least 100 traces in power averaging mode.
5. Record the max value and add $10 \log (1/\text{duty cycle})$

For U-NII-3:

1. Set span to encompass the entire emission bandwidth (EBW) of the signal.
2. Set RBW = 300 kHz, Set VBW $\geq$ 1 MHz, Detector = RMS
3. Use the peak marker function to determine the maximum power level in any 300 kHz band segment within the fundamental EBW.
4. Scale the observed power level to an equivalent value in 500 kHz by adjusting (reducing) the measured power by a bandwidth correction factor (BWCF) where $BWCF = 10\log(500 \text{ kHz}/300\text{kHz})$
5. Sweep time = auto, trigger set to "free run".
6. Trace average at least 100 traces in power averaging mode.
7. Record the max value and add $10 \log (1/\text{duty cycle})$

4.5.5 Deviation from Test Standard

No deviation.

4.5.6 EUT Operating Condition

Same as Item 4.3.6.

4.5.7 Test Results (Mode 1)

For U-NII-1:

802.11a

Chan.	Chan. Freq. (MHz)	PSD W/O Duty Factor (dBm/MHz)			Duty Factor (dB)	Total PSD With Duty Factor (dBm/MHz)	MAX. Limit (dBm/MHz)	Pass / Fail
		Chain 0	Chain 1	Chain 2				
36	5180	7.94	7.79	7.78	0.14	12.75	14.09	Pass
40	5200	8.23	7.81	7.80	0.14	12.86	14.09	Pass
48	5240	8.20	8.07	8.04	0.14	13.02	14.09	Pass

- Note:** 1. Method a) of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
2. Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + 10^{G3/20})^2 / 3] = 8.91\text{dBi} > 6\text{dBi}$, so the power density limit shall be reduced to $17-(8.91-6) = 14.09\text{dBm}$.
3. Refer to section 3.3 for duty cycle spectrum plot.

802.11ac (VHT20)

Chan.	Chan. Freq. (MHz)	PSD (dBm/MHz)			Total Power Density (dBm/MHz)	MAX. Limit (dBm/MHz)	Pass / Fail
		Chain 0	Chain 1	Chain 2			
36	5180	7.54	7.20	7.18	12.08	14.09	Pass
40	5200	8.85	8.53	8.19	13.30	14.09	Pass
48	5240	8.84	8.74	8.46	13.45	14.09	Pass

- Note:** 1. Method a) of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
2. Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + 10^{G3/20})^2 / 3] = 8.91\text{dBi} > 6\text{dBi}$, so the power density limit shall be reduced to $17-(8.91-6) = 14.09\text{dBm}$.

802.11ac (VHT40)

Chan.	Chan. Freq. (MHz)	PSD W/O Duty Factor (dBm/MHz)			Duty Factor (dB)	Total PSD With Duty Factor (dBm/MHz)	MAX. Limit (dBm/MHz)	Pass / Fail
		Chain 0	Chain 1	Chain 2				
38	5190	3.42	3.61	3.83	0.13	8.53	14.09	Pass
46	5230	7.36	7.30	7.26	0.13	12.21	14.09	Pass

- Note:** 1. Method a) of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
2. Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + 10^{G3/20})^2 / 3] = 8.91\text{dBi} > 6\text{dBi}$, so the power density limit shall be reduced to $17 - (8.91 - 6) = 14.09\text{dBm}$.
3. Refer to section 3.3 for duty cycle spectrum plot.


802.11ac (VHT80)

Chan.	Chan. Freq. (MHz)	PSD W/O Duty Factor (dBm/MHz)			Duty Factor (dB)	Total PSD With Duty Factor (dBm/MHz)	MAX. Limit (dBm/MHz)	Pass / Fail
		Chain 0	Chain 1	Chain 2				
42	5210	-0.27	-0.45	-0.42	0.25	4.64	14.09	Pass


- Note:** 1. Method a) of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
2. Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + 10^{G3/20})^2 / 3] = 8.91\text{dBi} > 6\text{dBi}$, so the power density limit shall be reduced to $17 - (8.91 - 6) = 14.09\text{dBm}$.
3. Refer to section 3.3 for duty cycle spectrum plot.

Spectrum Plot of Worst Value


802.11a_Chain 0 / CH40

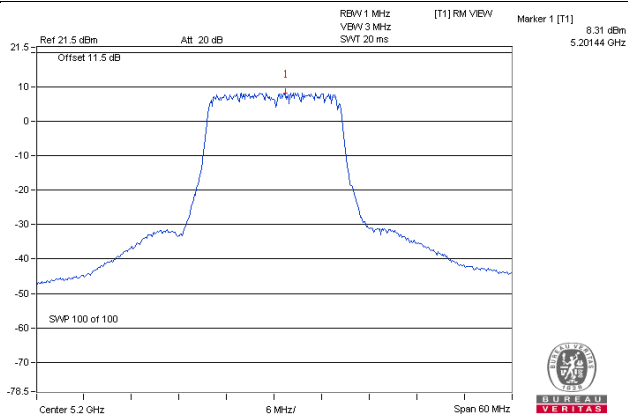


802.11ac (VHT20)_Chain 0 / CH40

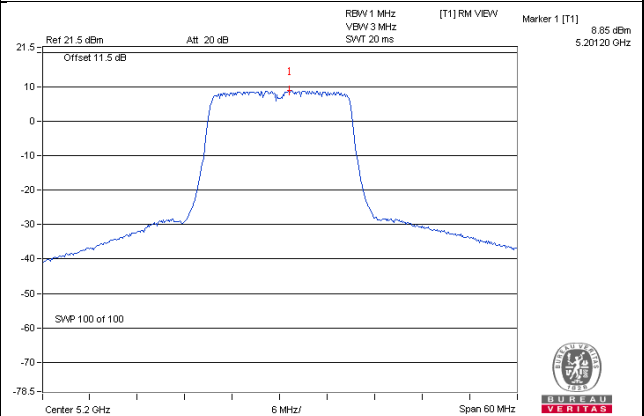

802.11ac (VHT40)_Chain 0 / CH46

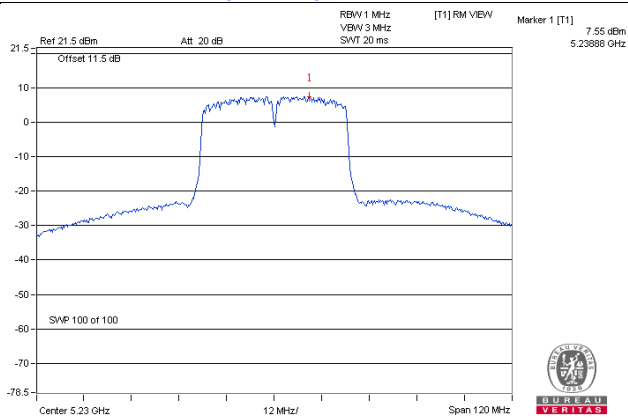

802.11ac (VHT80)_Chain 0 / CH42

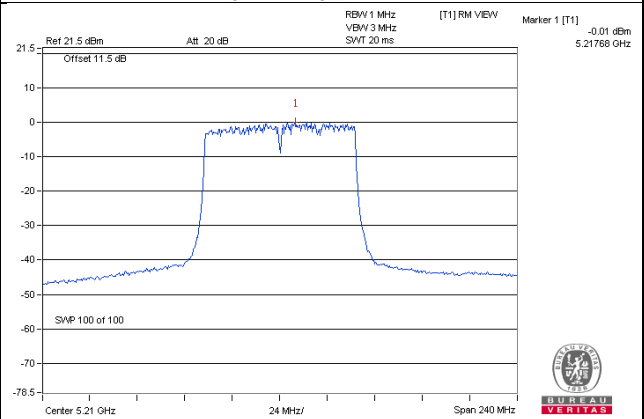

For U-NII-3:
802.11a

TX chain	Chan.	Chan. Freq. (MHz)	PSD W/O Duty Factor		10 log (N=3) dB	Duty Factor (dB)	Total PSD With Duty Factor (dBm/500kHz)	Limit (dBm/500kHz)	Pass /Fail
			(dBm/300kHz)	(dBm/500kHz)					
0	149	5745	-2.37	-0.15	4.77	0.14	4.76	27.09	Pass
	157	5785	-2.65	-0.43	4.77	0.14	4.48	27.09	Pass
	165	5825	-1.78	0.44	4.77	0.14	5.35	27.09	Pass
1	149	5745	-1.51	0.71	4.77	0.14	5.62	27.09	Pass
	157	5785	-1.79	0.43	4.77	0.14	5.34	27.09	Pass
	165	5825	-1.27	0.95	4.77	0.14	5.86	27.09	Pass
2	149	5745	-1.41	0.81	4.77	0.14	5.72	27.09	Pass
	157	5785	-1.33	0.89	4.77	0.14	5.80	27.09	Pass
	165	5825	-1.24	0.98	4.77	0.14	5.89	27.09	Pass

Note: 1. Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + 10^{G3/20})^2 / 3] = 8.91\text{dBi} > 6\text{dBi}$, so the power density limit shall be reduced to $30-(8.91-6) = 27.09\text{dBm}$.

2. Refer to section 3.3 for duty cycle spectrum plot.

802.11ac (VHT20)

TX chain	Channel	Freq. (MHz)	PSD (dBm/300kHz)	PSD (dBm/500kHz)	10 log (N=3) dB	Total PSD (dBm/500kHz)	Limit (dBm/500kHz)	Pass /Fail
0	149	5745	-2.15	0.07	4.77	4.84	27.09	Pass
	157	5785	-3.03	-0.81	4.77	3.96	27.09	Pass
	165	5825	-2.64	-0.42	4.77	4.35	27.09	Pass
1	149	5745	-0.83	1.39	4.77	6.16	27.09	Pass
	157	5785	-1.25	0.97	4.77	5.74	27.09	Pass
	165	5825	-1.99	0.23	4.77	5.00	27.09	Pass
2	149	5745	-2.43	-0.21	4.77	4.56	27.09	Pass
	157	5785	-2.71	-0.49	4.77	4.28	27.09	Pass
	165	5825	-2.81	-0.59	4.77	4.18	27.09	Pass

Note: 1. Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + 10^{G3/20})^2 / 3] = 8.91\text{dBi} > 6\text{dBi}$, so the power density limit shall be reduced to $30-(8.91-6) = 27.09\text{dBm}$.

2. Refer to section 3.3 for duty cycle spectrum plot.

802.11ac (VHT40)

TX chain	Chan.	Chan. Freq. (MHz)	PSD W/O Duty Factor		10 log (N=3) dB	Duty Factor (dB)	Total PSD With Duty Factor (dBm/500kHz)	Limit (dBm/500kHz)	Pass /Fail
			(dBm/300kHz)	(dBm/500kHz)					
0	151	5755	-5.41	-3.19	4.77	0.13	1.71	27.09	Pass
	159	5795	-5.67	-3.45	4.77	0.13	1.45	27.09	Pass
1	151	5755	-4.02	-1.80	4.77	0.13	3.10	27.09	Pass
	159	5795	-4.43	-2.21	4.77	0.13	2.69	27.09	Pass
2	151	5755	-5.42	-3.20	4.77	0.13	1.70	27.09	Pass
	159	5795	-6.00	-3.78	4.77	0.13	1.12	27.09	Pass

Note: 1. Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + 10^{G3/20})^2 / 3] = 8.91 \text{dBi} > 6 \text{dBi}$, so the power density limit shall be reduced to $30 - (8.91 - 6) = 27.09 \text{dBm}$.

2. Refer to section 3.3 for duty cycle spectrum plot.

802.11ac (VHT80)


TX chain	Chan.	Chan. Freq. (MHz)	PSD W/O Duty Factor		10 log (N=3) dB	Duty Factor (dB)	Total PSD With Duty Factor (dBm/500kHz)	Limit (dBm/500kHz)	Pass /Fail
			(dBm/300kHz)	(dBm/500kHz)					
0	155	5775	-10.90	-8.68	4.77	0.25	-3.66	27.09	Pass
1	155	5775	-9.79	-7.57	4.77	0.25	-2.55	27.09	Pass
2	155	5775	-11.25	-9.03	4.77	0.25	-4.01	27.09	Pass

Note: 1. Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + 10^{G3/20})^2 / 3] = 8.91 \text{dBi} > 6 \text{dBi}$, so the power density limit shall be reduced to $30 - (8.91 - 6) = 27.09 \text{dBm}$.


2. Refer to section 3.3 for duty cycle spectrum plot.

Spectrum Plot of Worst Value


802.11a – Chain 2: CH 165

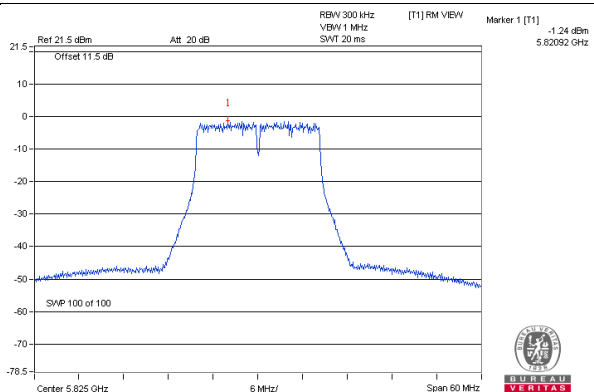


802.11ac (VHT20) – Chain 1: CH 149

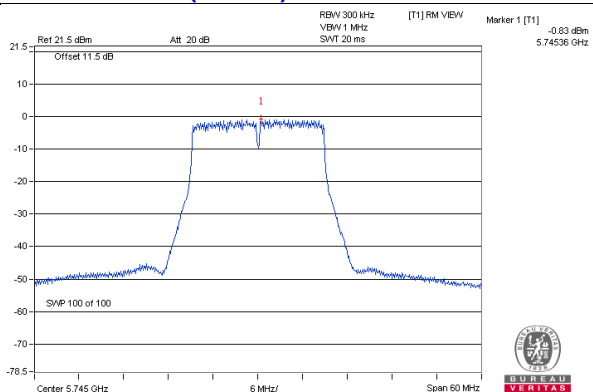

802.11ac (VHT40) – Chain 1: CH 151

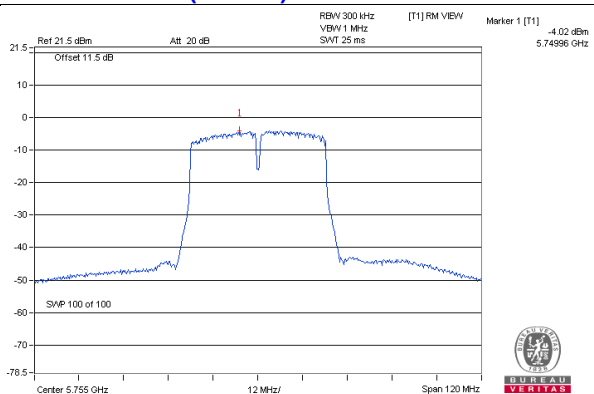

802.11ac (VHT80) – Chain 1: CH 155

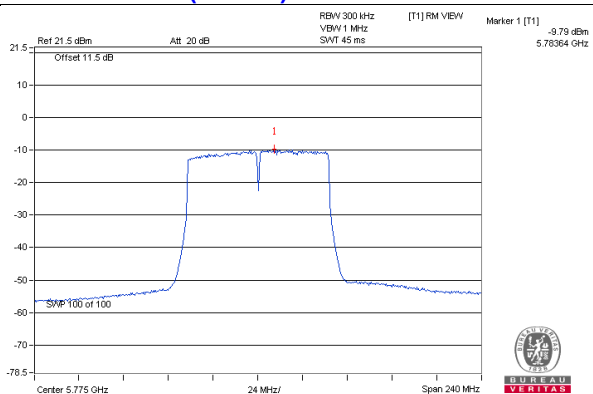


4.6 Frequency Stability Measurement

4.6.1 Limits of Frequency Stability Measurement

The frequency of the carrier signal shall be maintained within band of operation

4.6.2 Test Setup

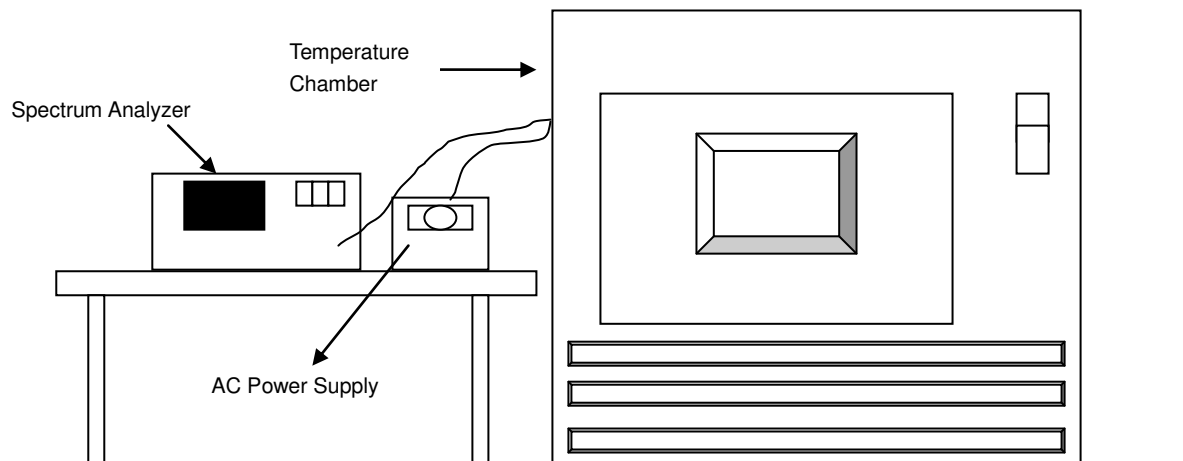

4.6.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.6.4 Test Procedure

- The EUT was placed inside the environmental test chamber and powered by nominal AC voltage.
- Turn the EUT on and couple its output to a spectrum analyzer.
- Turn the EUT off and set the chamber to the highest temperature specified.
- Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize, turn the EUT on and measure the operating frequency after 2, 5, and 10 Minutes.
- Repeat step 2 and 3 with the temperature chamber set to the lowest temperature.
- The test chamber was allowed to stabilize at +20 degree C for a minimum of 30 Minutes. The supply voltage was then adjusted on the EUT from 85% to 115% and the frequency record.

4.6.5 Deviation from Test Standard

No deviation.

4.6.6 EUT Operating Condition

Set the EUT transmit at un-modulation mode to test frequency stability.

4.6.7 Test Results

Frequency Stability Versus Temp.									
Operating Frequency: 5180 MHz									
TEMP. (°C)	Power Supply (Vac)	0 Minute		2 Minute		5 Minute		10 Minute	
		Measured Frequency (MHz)	Pass/Fail	Measured Frequency (MHz)	Pass/Fail	Measured Frequency (MHz)	Pass/Fail	Measured Frequency (MHz)	Pass/Fail
50	120	5180.0236	PASS	5180.0254	PASS	5180.0229	PASS	5180.0247	PASS
40	120	5180.0113	PASS	5180.0109	PASS	5180.0125	PASS	5180.0117	PASS
30	120	5180.0149	PASS	5180.0166	PASS	5180.0166	PASS	5180.0172	PASS
20	120	5179.9929	PASS	5179.9946	PASS	5179.9904	PASS	5179.9918	PASS
10	120	5180.0041	PASS	5180.0069	PASS	5180.0043	PASS	5180.0082	PASS
0	120	5180.0142	PASS	5180.0117	PASS	5180.0162	PASS	5180.0163	PASS
-10	120	5179.9868	PASS	5179.9872	PASS	5179.9884	PASS	5179.9843	PASS
-20	120	5179.998	PASS	5179.9973	PASS	5179.9935	PASS	5179.9937	PASS
-30	120	5179.9824	PASS	5179.9854	PASS	5179.9822	PASS	5179.9831	PASS


Frequency Stability Versus Voltage									
Operating Frequency: 5180 MHz									
TEMP. (°C)	Power Supply (Vac)	0 Minute		2 Minute		5 Minute		10 Minute	
		Measured Frequency (MHz)	Pass/Fail	Measured Frequency (MHz)	Pass/Fail	Measured Frequency (MHz)	Pass/Fail	Measured Frequency (MHz)	Pass/Fail
20	138	5179.9938	PASS	5179.9944	PASS	5179.9905	PASS	5179.991	PASS
	120	5179.9929	PASS	5179.9946	PASS	5179.9904	PASS	5179.9918	PASS
	102	5179.9938	PASS	5179.9942	PASS	5179.9895	PASS	5179.9927	PASS

4.7 6dB Bandwidth Measurement

4.7.1 Limits of 6dB Bandwidth Measurement

The minimum of 6dB Bandwidth Measurement is 0.5MHz.

4.7.2 Test Setup



4.7.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.7.4 Test Procedure

MEASUREMENT PROCEDURE REF

- Set resolution bandwidth (RBW) = 100kHz
- Set the video bandwidth (VBW) $\geq 3 \times$ RBW, Detector = Peak.
- Trace mode = max hold.
- Sweep = auto couple.
- Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission

4.7.5 Deviation from Test Standard

No deviation.

4.7.6 EUT Operating Condition

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.7.7 Test Results (Mode 1)

802.11a

Channel	Frequency (MHz)	6dB Bandwidth (MHz)			Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1	Chain 2		
149	5745	16.38	16.39	16.36	0.5	PASS
157	5785	16.40	16.39	16.38	0.5	PASS
165	5825	16.38	16.38	16.39	0.5	PASS

802.11ac (VHT20)

Channel	Frequency (MHz)	6dB Bandwidth (MHz)			Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1	Chain 2		
149	5745	17.62	17.31	17.61	0.5	PASS
157	5785	17.62	17.58	17.62	0.5	PASS
165	5825	17.58	17.61	17.61	0.5	PASS

802.11ac (VHT40)


Channel	Frequency (MHz)	6dB Bandwidth (MHz)			Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1	Chain 2		
151	5755	34.52	33.87	35.20	0.5	PASS
159	5795	35.24	35.11	35.28	0.5	PASS

802.11ac (VHT80)


Channel	Frequency (MHz)	6dB Bandwidth (MHz)			Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1	Chain 2		
155	5775	76.43	75.98	76.41	0.5	PASS

Spectrum Plot of Worst Value


802.11a_Chain 2 / CH149

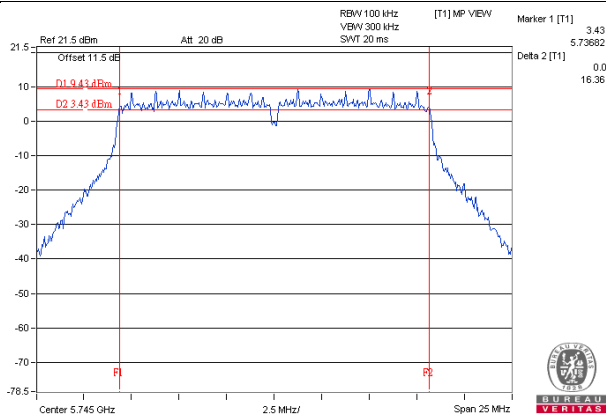


802.11ac (VHT20)_Chain 1 / CH149

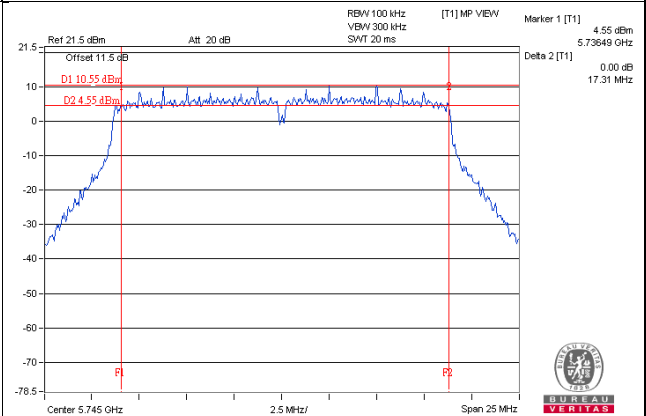

802.11ac (VHT40)_Chain 1 / CH151

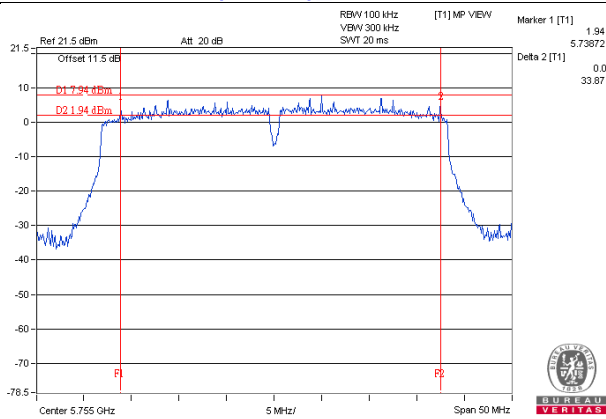

802.11ac (VHT80)_Chain 1 / CH155

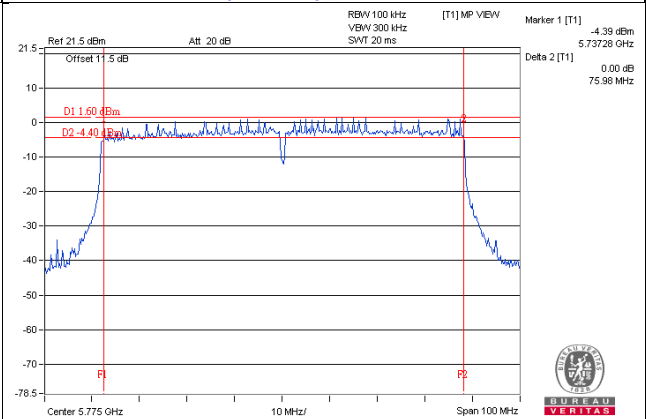

5 Pictures of Test Arrangements


Please refer to the attached file (Test Setup Photo).

Annex A- Radiated Out of Band Emission (OOBE) Measurement (For U-NII-3 band)


802.11a

CH 149 5745 MHz

Horizontal

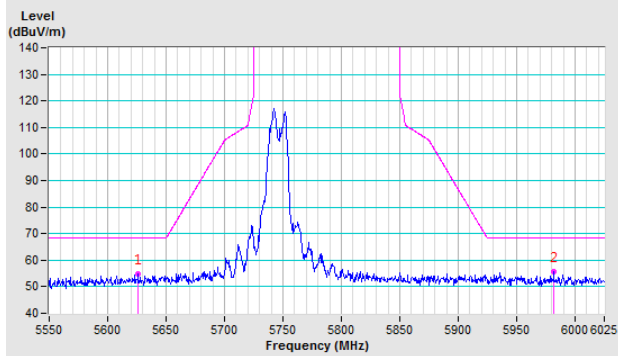


Vertical

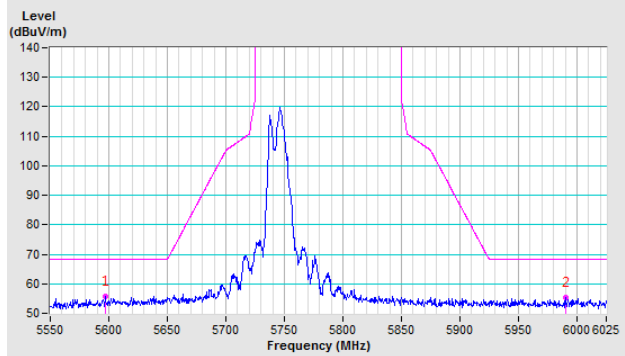


CH 157 5785 MHz

Horizontal

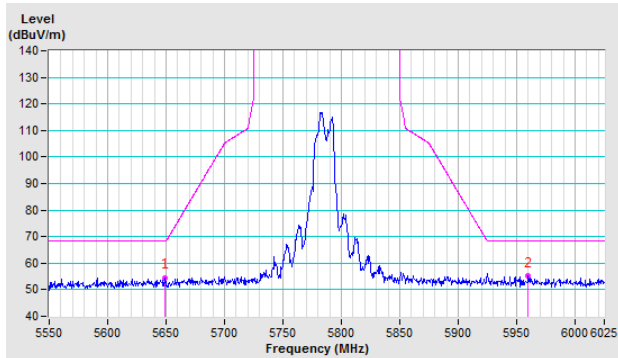


Vertical

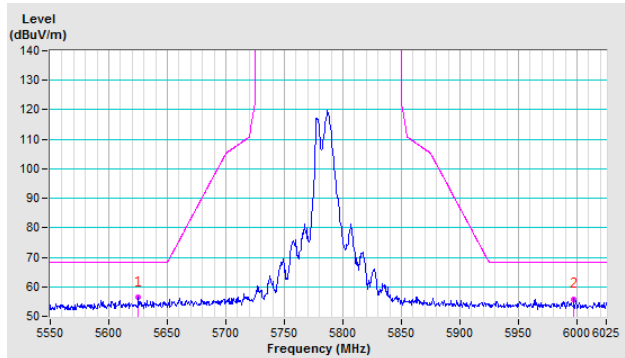


CH 165 5825 MHz

Horizontal

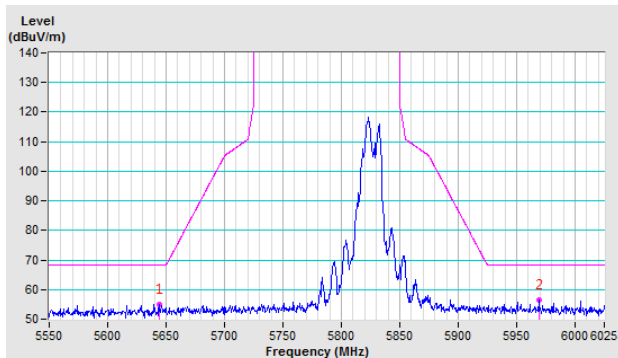


Vertical

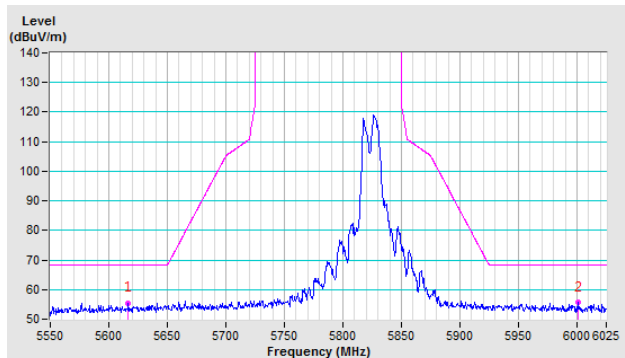


802.11ac (VHT20)

CH 149 5745 MHz

Horizontal

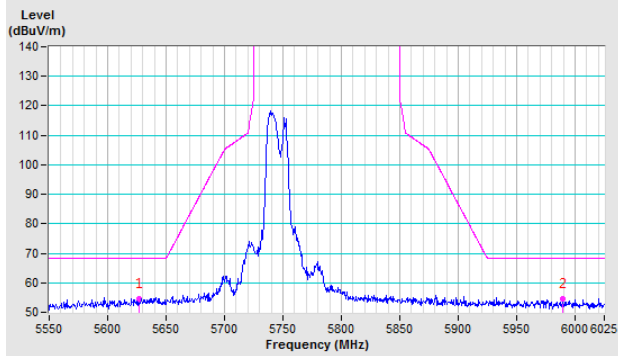


Vertical

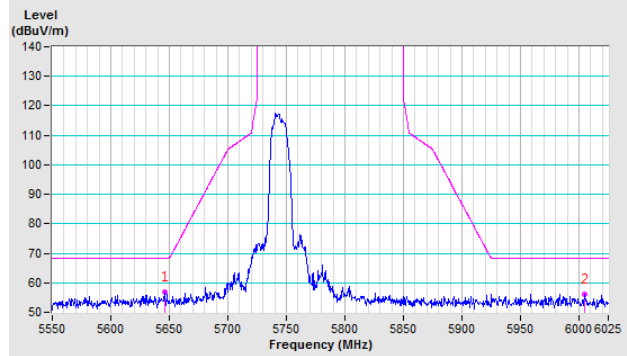


CH 157 5785 MHz

Horizontal

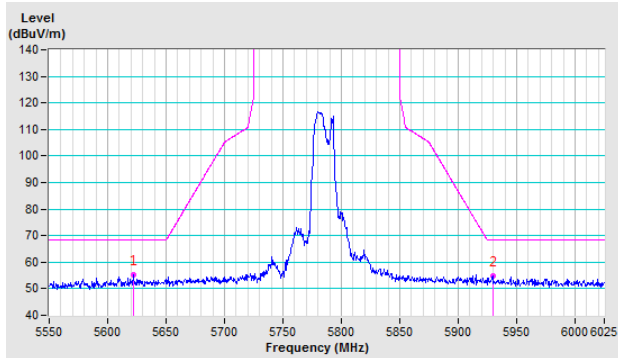


Vertical

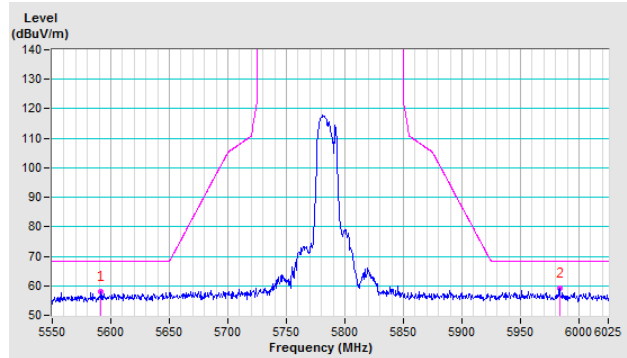


CH 165 5825 MHz

Horizontal

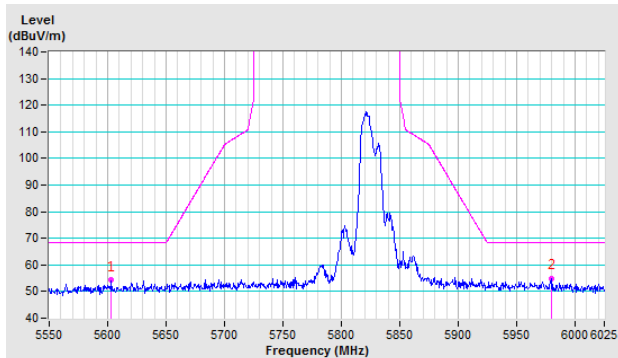


Vertical

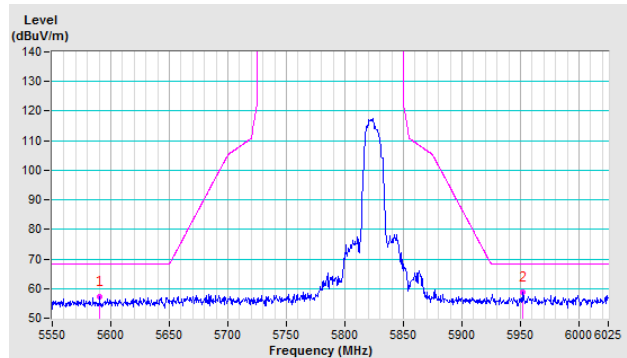


802.11ac (VHT40)

CH 151 5755 MHz

Horizontal

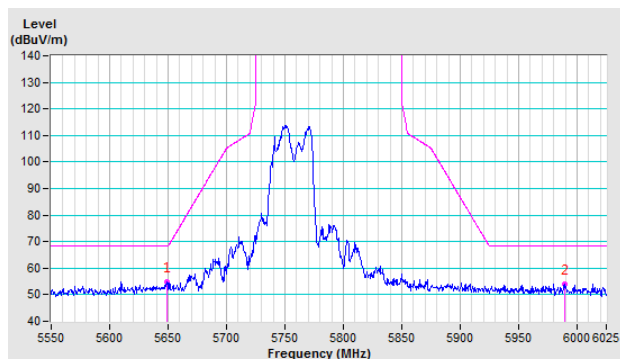


Vertical

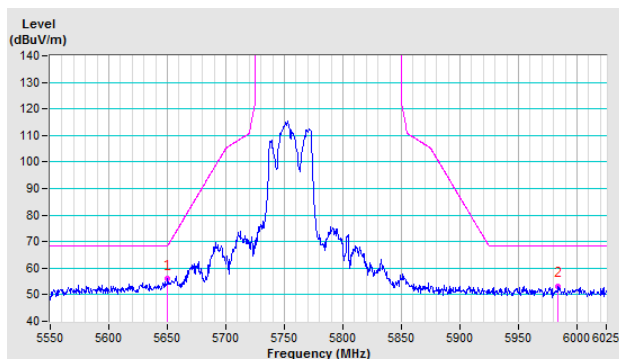


CH 159 5795 MHz

Horizontal

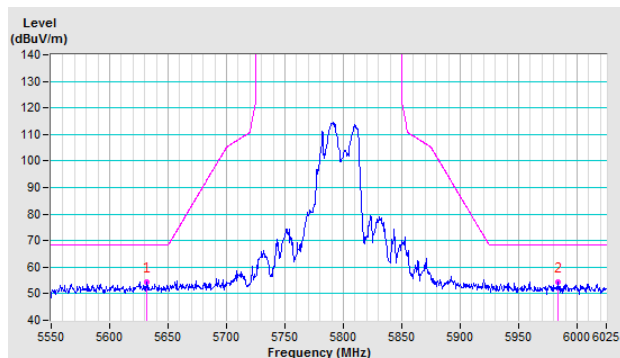


Vertical

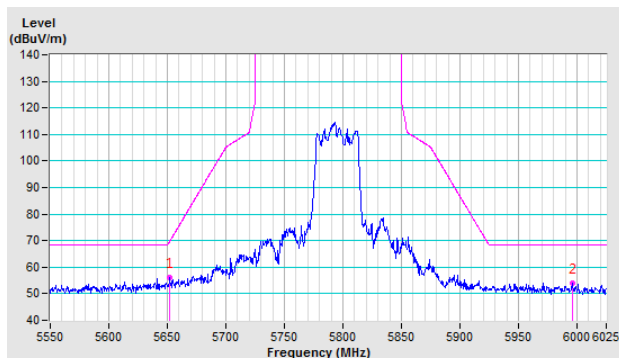


802.11ac (VHT80)

CH 155 5775 MHz

Horizontal

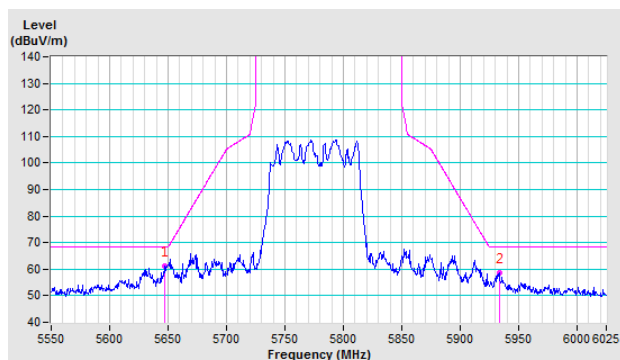

Vertical

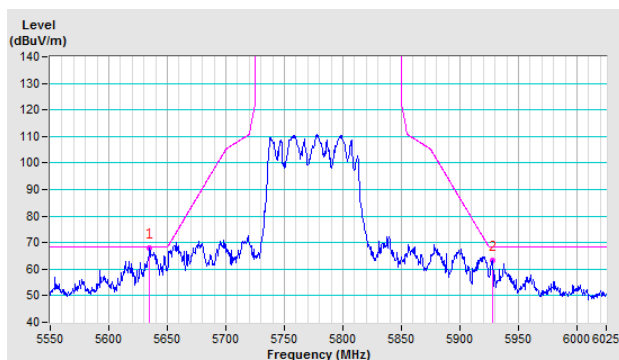

Appendix – Information on the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.

--- END ---