Antenna test report


1. Specifications

EUT Name	CBU Antenna				
Wireless type	BLE				
Antenna Type	PCB antenna				
Dimensions	Appendix A				

2. Technical Information

Frequency Range	2402MHz~2480MHz				
Test Frequency	2400, 2410·····2500MHz				

3. Appendix A Antenna Dimension

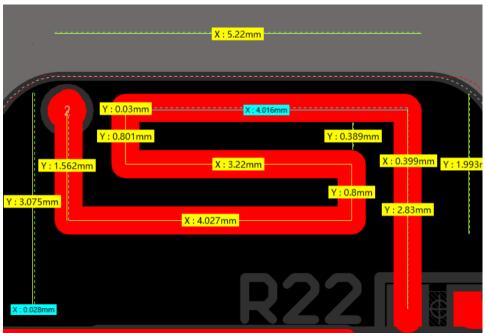

4. Appendix C Gain and Efficiency

	Passive Test For BT2.4											
Freq	Effi	Effi	Gain	Gain	UHIS	DHIS	Max	Min	irectivit	Beamwidth	AttH	AttV
(MHz)	(%)	(dB)	(dBi)	(dBd)	(%)	(%)	(dB)	(dB)	(dBi)	(3dB)	(dB)	(dB)
2400	14. 59	-8. 36	-5. 4	-7. 55	0	0	-5. 4	-15.03	8. 36	0	46.98	46.74
2410	14. 93	-8. 26	-5. 29	-7.44	0	0	-5. 29	-15.74	8. 26	0	47.02	46.81
2420	15. 43	-8. 12	-4.89	-7.04	0	0	-4.89	-16	8. 12	0	47.61	47.33
2430	16.83	-7.74	-4. 49	-6.64	0	0	-4. 49	-16.08	7.74	0	47.09	46.89
2440	21.14	-6. 75	-3.6	-5. 75	0	0	-3.6	-15.35	6. 75	0	47.31	47.09
2450	22	-6. 57	-3.43	-5. 58	0	0	-3. 43	-15. 13	6. 57	45	47.33	47.06
2460	23	-6.38	-3.14	-5. 29	0	0	-3.14	-14.84	6.38	45	47.74	47. 47
2470	24. 35	-6. 13	-2.9	-5.05	0	0	-2.9	-14.85	6. 13	0	47.62	47. 29
2480	26.83	-5. 71	-2.31	-4. 46	0	0	-2.31	-15	5. 71	0	47. 53	47. 33
2490	35. 81	-4. 46	-0.85	-3	0	0	-0.85	-14.08	4. 46	0	47.51	47. 26
2500	34. 38	-4. 64	-0. 91	-3.06	0	0	-0. 91	-13.93	4.64	0	47. 26	47.03