

FCC Test Report

Report No.: RF200312E01

FCC ID: SWX-AF60LR

Test Model: AF60-LR

Received Date: Mar. 12, 2020

Test Date: Apr. 06 to May 12, 2020

Issued Date: May 08, 2020

Applicant: Ubiquiti Inc.

Address: 685 Third Avenue, New York, New York 10017 USA

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch
Hsin Chu Laboratory

Lab Address: E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300,
Taiwan

Test Location: E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300,
Taiwan

**FCC Registration /
Designation Number:** 723255 / TW2022



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification. The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies.

Table of Contents

Release Control Record	4
1 Certificate of Conformity.....	5
2 Summary of Test Results	6
2.1 Measurement Uncertainty	6
2.2 Modification Record	6
3 General Information.....	7
3.1 General Description of EUT	7
3.2 Description of Test Modes	8
3.2.1 Test Mode Applicability and Tested Channel Detail	9
3.3 Description of Support Units	11
3.3.1 Configuration of System under Test	12
3.4 General Description of Applied Standards	14
4 Test Types and Results	15
4.1 Radiated Emission Measurement	15
4.1.1 Limits of Radiated Emission Measurement	15
4.1.2 Test Instruments	16
4.1.3 Test Procedures.....	20
4.1.4 Deviation from Test Standard	21
4.1.5 Test Setup.....	22
4.1.6 EUT Operating Conditions.....	23
4.1.7 Test Results	24
4.2 Conducted Emission Measurement	60
4.2.1 Limits of Conducted Emission Measurement	60
4.2.2 Test Instruments	60
4.2.3 Test Procedures.....	61
4.2.4 Deviation from Test Standard	61
4.2.5 Test Setup.....	61
4.2.6 EUT Operating Conditions.....	61
4.2.7 Test Results	62
4.3 6dB Bandwidth Measurement	68
4.3.1 Limits of 6dB Bandwidth Measurement	68
4.3.2 Test Setup.....	68
4.3.3 Test Instruments	68
4.3.4 Test Procedure	68
4.3.5 Deviation from Test Standard	68
4.3.6 EUT Operating Conditions.....	68
4.3.7 Test Result.....	69
4.4 Output Power Measurement	71
4.4.1 Limits of Output Power Measurement	71
4.4.2 Test Setup.....	72
4.4.3 Test Instruments	72
4.4.4 Test Procedures.....	73
4.4.5 Deviation from Test Standard	73
4.4.6 EUT Operating Conditions.....	73
4.4.7 Test Results	74
4.5 Frequency Stability Measurement.....	76
4.5.1 Limits of Conducted Out of Band Emission Measurement.....	76
4.5.2 Test Setup.....	76
4.5.3 Test Instruments	77
4.5.4 Test Procedure	77
4.5.5 Deviation from Test Standard	77
4.5.6 EUT Operating Condition	77
4.5.7 Test Results	78

5	Pictures of Test Arrangements.....	79
	Appendix – Information of the Testing Laboratories	80

Release Control Record

Issue No.	Description	Date Issued
RF200312E01	Original release.	May 08, 2020

1 Certificate of Conformity

Product: airFiber 60 LR

Brand: UBIQUITI

Test Model: AF60-LR

Sample Status: ENGINEERING SAMPLE

Applicant: Ubiquiti Inc.

Test Date: Apr. 06 to May 12, 2020

Standards: 47 CFR FCC Part 15, Subpart C (Section 15.255)
ANSI C63.10: 2013

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

Prepared by : Joyce Kuo , **Date:** May 08, 2020
Joyce Kuo / Specialist

Approved by : Clark Lin , **Date:** May 08, 2020
Clark Lin / Technical Manager

2 Summary of Test Results

47 CFR FCC Part 15, Subpart C (Section 15.255)			
FCC Clause	Test Item	Result	Remarks
15.207	AC Power Conducted Emission	Pass	Meet the requirement of limit. Minimum passing margin is -3.90 dB at 0.52109 MHz.
15.255(e)	6dB Bandwidth	-	Reference only.
15.255 (c) & (e)	Output Power	Pass	Meet the requirement of limit.
15.255(d)	Spurious Emissions	Pass	Meet the requirement of limit. Minimum passing margin is -3.2 dB at 36.81 MHz.
15.255(f)	Frequency Stability	Pass	Meet the requirement of limit.

Note:

Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) ($\pm$)
Conducted Emissions at mains ports	150kHz ~ 30MHz	1.9 dB
Radiated Emissions up to 1 GHz	9kHz ~ 30MHz	3.1 dB
	30MHz ~ 1GHz	5.1 dB
Radiated Emissions above 1 GHz	1GHz ~ 18GHz	5.0 dB
	18GHz ~ 40GHz	5.3 dB
	40GHz ~ 200GHz	5.4 dB

2.2 Modification Record

There were no modifications required for compliance.

3 General Information

3.1 General Description of EUT

Product	airFiber 60 LR
Brand	UBIQUITI
Test Model	AF60-LR
Status of EUT	ENGINEERING SAMPLE
Power Supply Method	48Vdc from PoE adapter
Modulation Type	$\pi/2$ -BPSK, $\pi/2$ -QPSK, $\pi/2$ -16QAM
Modulation Technology	OFDM
Transfer Rate	4620Mb/s
Operating Frequency	57 ~ 71 GHz
Output Power (EIRP)	64.80 GHz: 58.12 dBm 66.96 GHz: 58.69 dBm 69.12 GHz: 58.90 dBm
Antenna Type	Refer to Note
Antenna Connector	Refer to Note
Accessory Device	Adapter x1
Data Cable Supplied	NA

Note:

1. The antennas provided to the EUT, please refer to the following table:

With dish Antenna Gain (dBi)	Frequency Range (GHz)	Connector Type
38	57 ~ 71	none

2. The EUT must be supplied with a power adapter as following table:

Brand	Model No.	Spec.
Ubiquiti Networks. Inc.	GP-H480-065G	AC Input: 100-240Vac, 0.75A, 50/60Hz DC Output: 48V, 0.65A DC Output Cable: Unshielded, 0.6m

3. The above EUT information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.

3.2 Description of Test Modes

5 channels are provided for EUT and support Bandwidth 2160MHz and 1080MHz.

Channel's Number	4	4.5	5	5.5	6
Frequency (MHz)	64800	65880	66960	68040	69120

3.2.1 Test Mode Applicability and Tested Channel Detail

EUT CONFIGURE MODE	APPLICABLE TO						DESCRIPTION
	PLC	BW	OP	FS	RE < 1G	RE ≥ 1G	
-	√	√	√	√	√	√	-

Where **PLC**: Power Line Conducted Emission **BW**: 6dB Bandwidth
OP: Output Power **FS**: Frequency Stability
RE < 1G: Radiated Emission below 1GHz **RE ≥ 1G**: Radiated Emission above 1GHz

Power Line Conducted Emission Test:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
4 to 6	4, 5, 6	OFDM	$\pi/2$ -BPSK	385

6dB Bandwidth Test:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
4 to 6	4, 5, 6	OFDM	$\pi/2$ -BPSK	385

Output Power Measurement:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
4 to 6	4, 5, 6	OFDM	$\pi/2$ -BPSK	385

Frequency Stability Test:

- ☒ Following channel(s) was (were) selected for the final test as listed below.

AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY
4 to 6	6	CW

Radiated Emission Test (Below 1GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
4 to 6	4, 5, 6	OFDM	$\pi/2$ -BPSK	385

Radiated Emission Test (Above 1GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
4 to 6	4, 5, 6	OFDM	$\pi/2$ -BPSK	385

Test Condition:

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	INPUT POWER (system)	TESTED BY
PLC	25deg. C, 62%RH	120Vac, 60Hz	Sampson Chen
BW	25deg. C, 60%RH	120Vac, 60Hz	Weiwei Liao
OP	25deg. C, 60%RH	120Vac, 60Hz	Weiwei Liao
FS	25deg. C, 60%RH	120Vac, 60Hz	Weiwei Liao
RE<1G	25deg. C, 62%RH	120Vac, 60Hz	Sampson Chen
RE≥1G	25deg. C, 62%RH	120Vac, 60Hz	Sampson Chen

3.3 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A.	Laptop	DELL	E5430	HYV4VY1	FCC DoC	Provided by Lab


Note:

1. All power cords of the above support units are non-shielded (1.8m).


ID	Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1.	RJ-45 Cable	1	3	No	0	Provided by Lab
2.	RJ-45 Cable	1	10	No	0	Provided by Lab
3.	AC Cable	1	0.6	No	0	Supplied by client

3.3.1 Configuration of System under Test

For Power Line Conducted Emission Test:

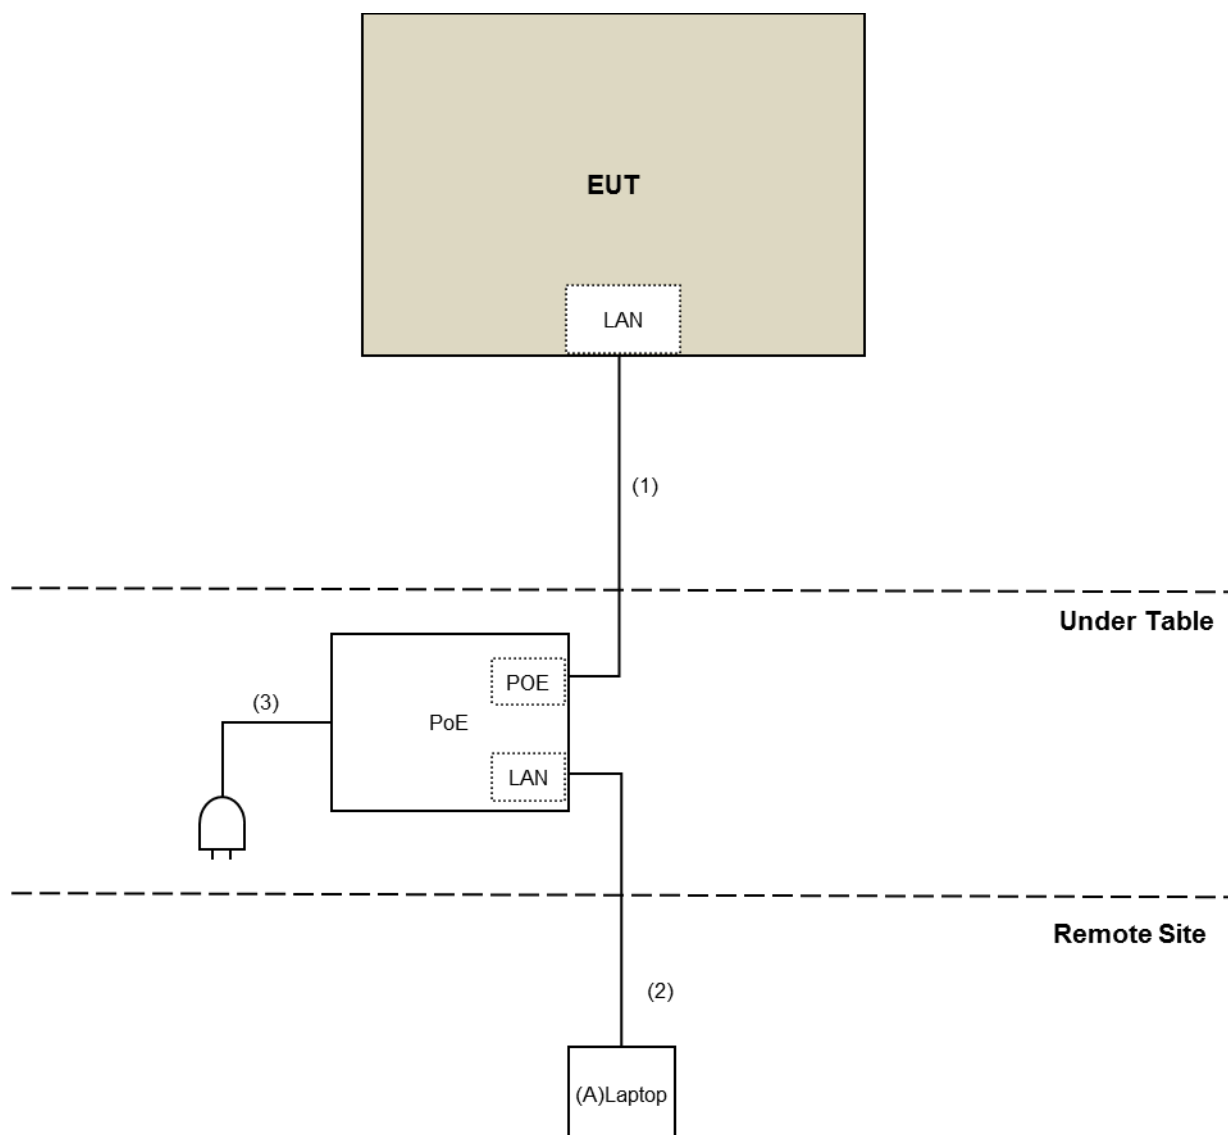

For Radiated Emission Test

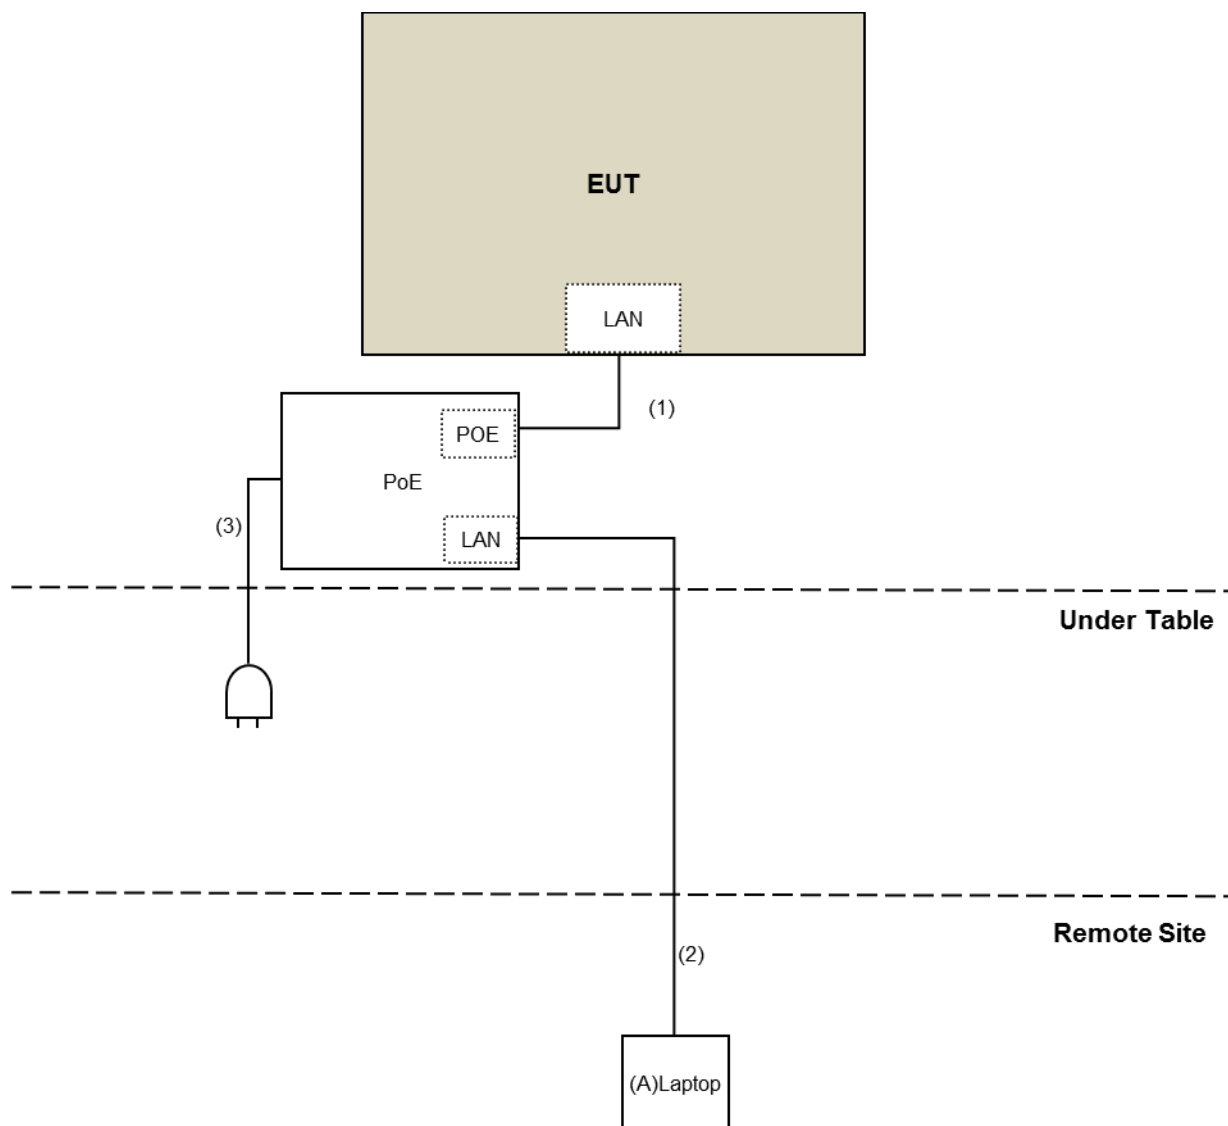

3.4 General Description of Applied Standards

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C (15.255)

ANSI C63.10-2013

All test items have been performed and recorded as per the above standards.

4 Test Types and Results

4.1 Radiated Emission Measurement

4.1.1 Limits of Radiated Emission Measurement

Spurious Emission	
Frequency Range	Limitation
Radiated emissions below 40GHz	Part 15.209
Between 40GHz and 200GHz	90pW/cm ² (at 3 meter)
Note: The levels of the spurious emissions shall not exceed the level of the fundamental emission	

Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

Frequencies (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Note:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.
4. Section 15.205 restricted bands of operation shall compliance with the limits in Section 15.209.

4.1.2 Test Instruments
For Below 40GHz:

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver ESR7 R&S	ESR7	102026	Apr. 24, 2019	Apr. 23, 2020
Spectrum Analyzer Keysight	N9030B	MY57141948	May 25, 2019	May 24, 2020
Pre-Amplifier EMCI	EMC001340	980142	May 30, 2019	May 29, 2020
Loop Antenna Electro-Metrics	EM-6879	264	Feb. 18, 2020	Feb. 17, 2021
RF Cable	NA	LOOPCAB-001	Jan. 08, 2020	Jan. 07, 2021
RF Cable	NA	LOOPCAB-002	Jan. 08, 2020	Jan. 07, 2021
Pre-Amplifier EMCI	EMC330N	980538	Apr. 30, 2019	Apr. 29, 2020
Trilog Broadband Antenna SCHWARZBECK	VULB9168	9168-0842	Nov. 08, 2019	Nov. 07, 2020
RF Cable	8D	966-5-1	May 03, 2019	May 02, 2020
RF Cable	8D	966-5-2	May 03, 2019	May 02, 2020
RF Cable	8D	966-5-3	May 03, 2019	May 02, 2020
Fixed attenuator Mini-Circuits	UNAT-5+	PAD-ATT5-02	Jan. 14, 2020	Jan. 13, 2021
Horn_Antenna SCHWARZBECK	BBHA 9120D	9120D-1819	Nov. 24, 2019	Nov. 23, 2020
Pre-Amplifier EMCI	EMC12630SE	980509	May 03, 2019	May 02, 2020
RF Cable EMCI	EMC104-SM-SM-1500	180503	May 03, 2019	May 02, 2020
RF Cable EMCI	EMC104-SM-SM-2000	180501	May 03, 2019	May 02, 2020
RF Cable EMCI	EMC104-SM-SM-6000	180506	May 03, 2019	May 02, 2020
Pre-Amplifier EMCI	EMC184045SE	980387	Jan. 15, 2020	Jan. 14, 2021
Horn_Antenna SCHWARZBECK	BBHA 9170	BBHA9170519	Nov. 24, 2019	Nov. 23, 2020
RF Cable	EMC102-KM-KM-1200	160924	Jan. 15, 2020	Jan. 14, 2021
RF Cable	EMC-KM-KM-4000	200214	Mar. 11, 2020	Mar. 10, 2021
Software	ADT_Radiated_V8.7.08	NA	NA	NA
Boresight Antenna Tower & Turn Table Max-Full	MF-7802BS	MF780208530	NA	NA

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in 966 Chamber No. 5.
3. Loop antenna was used for all emissions below 30 MHz.
4. Tested Date: Apr. 06 to 21, 2020

For Above 40GHz:

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Spectrum Analyzer Keysight	N9030A	MY55330160	Feb. 07, 2020	Feb. 06, 2021
*Horn Antenna (33~55GHz) OML	M22RH	110215-1	Oct. 17, 2019	Oct. 16, 2020
*Horn Antenna (50~75GHz) OML	M15HWD	110215-1	Oct. 17, 2019	Oct. 16, 2020
*Horn Antenna (75~110GHz) OML	M10RH	110215-1	Oct. 17, 2019	Oct. 16, 2020
*Horn Antenna(110~170GHz) OML	M06HWD	110215-1	Oct. 17, 2019	Oct. 16, 2020
*Horn Antenna (140~220GHz) OML	M05RH	110215-1	Oct. 17, 2019	Oct. 16, 2020
OXE89 Horn Antenna (33~55GHz) QuinStar	QWH-UCRR00	924200002	CoC	CoC
Conical Horn Antenna (50~75GHz) Keysight	WR15CH-Conical	WR15CH_001	CoC	CoC
Conical Horn Antenna (75~110GHz) Keysight	WR10CH-Conical	WR10CH_001	CoC	CoC
Conical Horn Antenna (110~170GHz) Keysight	WR6.5CH-Conical	WR6.5CH_001	CoC	CoC
Conical Horn Antenna (140~220GHz) Keysight	WR5.1CH-Conical	WR5.1CH_001	CoC	CoC
N9029AV15-DC9 - 50-75 GHz VDI Standard Downconverter with 9VDC supply Keysight	SA Extension WR15	SAX 381	CoC	CoC
N9029AV10-DC9 - 75-110 GHz VDI Standard Downconverter with 9VDC supply Keysight	SA Extension WR10	SAX 378	CoC	CoC
N9029AV06-DC9 - 110-170 GHz VDI Standard Downconverter with 9VDC supply Keysight	SA Extension WR6.5	SAX 377	CoC	CoC
N9029AV05-DC9 - 140-220 GHz VDI Standard Downconverter with 9VDC supply Keysight	SA Extension WR5.1	SAX 375	CoC	CoC
N9029AV03-DC9 - 220-330 GHz VDI Standard Downconverter with 9VDC supply Keysight	SA Extension	SAX 376	CoC	CoC
*Millimeter-Wave Signal Generator Frequency Extension Module (50~75 GHz) Keysight	E8257DV15	SGX 050	CoC	CoC

*Millimeter-Wave Signal Generator Frequency Extension Module (75~110 GHz) Keysight	E8257DV10	SGX 069	CoC	CoC
*Millimeter-Wave Signal Generator Frequency Extension Module (110~170 GHz) Keysight	E8257DV06-DC9	SGX 223	CoC	CoC
PSG analog signal generator Keysight	E8257D	MY53401987	June 21, 2019	June 20, 2020
Boresight Antenna Tower & Turn Table Max-Full	MF-7802BS	MF780208530	NA	NA

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. *The calibration interval of the above test instruments is 36 months and the calibrations are traceable to NML/ROC and NIST/USA.
3. Certificate of Conformance (CoC) which is issued by manufacturer states that the product meets the specification.
- 4 The test was performed in 966 Chamber No. 5
- 5 Tested Date: Apr. 16, 2020

For Below 1GHz:

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver ESR7 R&S	ESR7	102026	Apr. 22, 2020	Apr. 21, 2021
Spectrum Analyzer Keysight	N9030B	MY57141948	May 25, 2019	May 24, 2020
Pre-Amplifier EMCI	EMC001340	980142	May 30, 2019	May 29, 2020
Loop Antenna Electro-Metrics	EM-6879	264	Feb. 18, 2020	Feb. 17, 2021
RF Cable	NA	LOOPCAB-001	Jan. 08, 2020	Jan. 07, 2021
RF Cable	NA	LOOPCAB-002	Jan. 08, 2020	Jan. 07, 2021
Pre-Amplifier EMCI	EMC330N	980538	Apr. 28, 2020	Apr. 27, 2021
Trilog Broadband Antenna SCHWARZBECK	VULB9168	9168-0842	Nov. 08, 2019	Nov. 07, 2020
RF Cable	8D	966-5-1	Apr. 29, 2020	Apr. 28, 2021
RF Cable	8D	966-5-2	Apr. 29, 2020	Apr. 28, 2021
RF Cable	8D	966-5-3	Apr. 29, 2020	Apr. 28, 2021
Fixed attenuator Mini-Circuits	UNAT-5+	PAD-ATT5-02	Jan. 14, 2020	Jan. 13, 2021
Software	ADT_Radiated_V8.7.08	NA	NA	NA
Boresight Antenna Tower & Turn Table Max-Full	MF-7802BS	MF780208530	NA	NA

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in 966 Chamber No. 5.
3. Loop antenna was used for all emissions below 30 MHz.
4. Tested Date: May 04, 2020

4.1.3 Test Procedures

For Radiated emission below 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Parallel, perpendicular, and ground-parallel orientations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

Note:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9kHz at frequency below 30MHz.

For Radiated emission 30MHz to 40GHz

- a. The EUT was placed on the top of a rotating table 0.8 meters (for 30MHz ~ 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters (30MHz-18GHz) / 1 meters (18GHz-40GHz) away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detects function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Note:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) and Average detection (AV) at frequency above 1GHz.
3. All modes of operation were investigated and the worst-case emissions are reported.

For Radiated emission above 40GHz


- a. Connect the test antenna covering the appropriate frequency range to a spectrum analyzer via an external mixer to the spectrum analyzer.
- b. Set spectrum analyzer RBW = 1 MHz, VBW = 3 MHz, average detector.
- c. Calculate the distance to the far field boundary and determine the maximum measurement distance.
- d. Perform an exploratory search for emissions and determine the approximate direction at which each observed emission emanates from the EUT.
- e. Exploratory measurements be made at a closer distance than the validated maximum measurement distance.
- f. Perform a final measurement; begin with the test antenna at the approximate position where the maximum level occurred during the exploratory scan.
- g. Slowly scan the test antenna around this position, slowly vary the test antenna polarization by rotating through at least 0° to 180°, and slowly vary the orientation of the test antenna to find the final position, polarization, and orientation at which the maximum level of the emission is observed.
- h. Record the measured reading with the test antenna fixed at this maximized position, polarization, and orientation. Record the measurement distance.
- i. Calculate the maximum field strength of the emission at the measurement distance and the adjusted/corrected power at the output of the test antenna.
- j. Calculate the EIRP from the measured field strength and then convert to the linear.
- k. Calculate the power density at the distance specified by the limit from the field strength at the distance specified by the limit.
- l. Repeat the preceding sequence for every emission observed in the frequency band under investigation.

4.1.4 Deviation from Test Standard


No deviation.

4.1.5 Test Setup


For Radiated emission below 30MHz

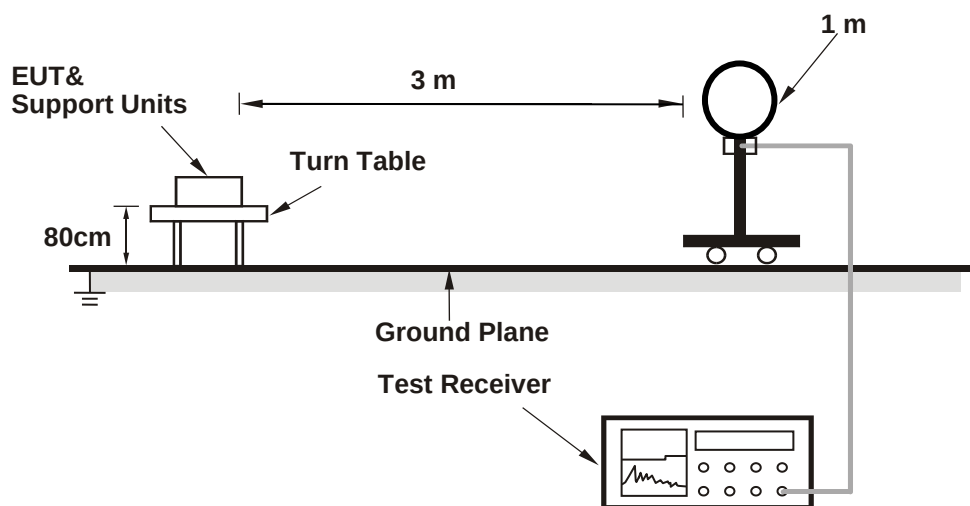


For Radiated emission 30MHz to 1GHz

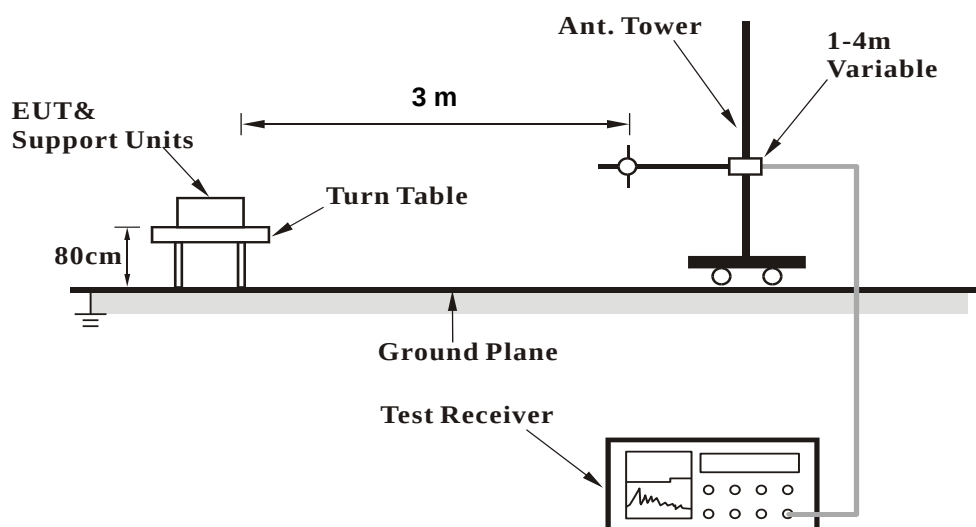

For Radiated emission 1GHz to 40GHz

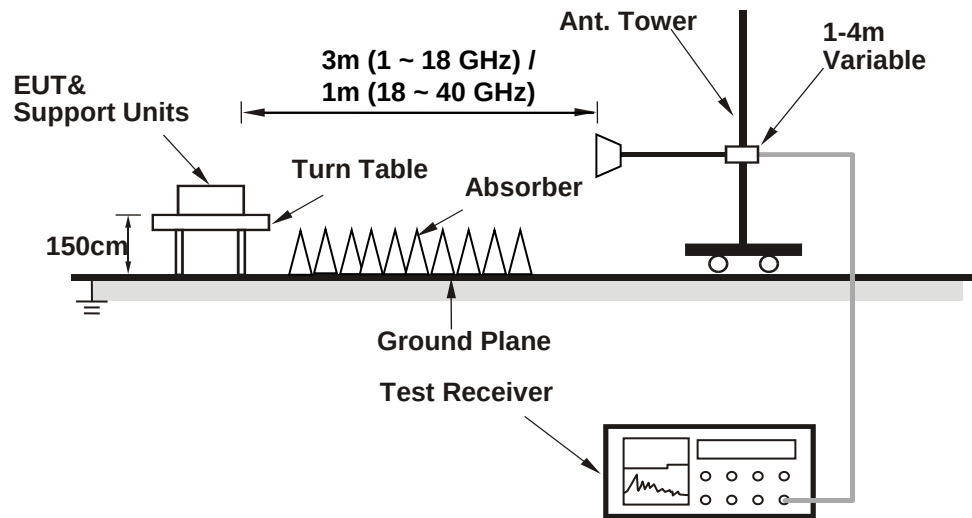

For Radiated emission above 40 GHz

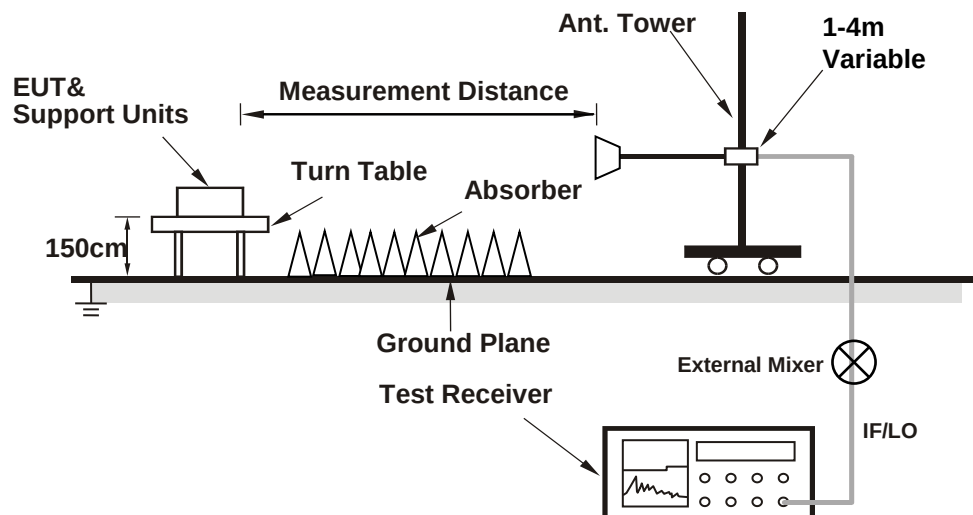

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.6 EUT Operating Conditions

- Connected the EUT with the Laptop which is placed on remote site.
- Set the EUT under transmission condition continuously at specific channel frequency.

4.1.7 Test Results

Above 1GHz Data:

For 1~18 GHz


Bandwidth 2160MHz

CHANNEL	TX Channel 4	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 18GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#1753.10	54.9 PK	74.0	-19.1	3.54 H	41	60.8	-5.9
2	#1753.10	43.3 AV	54.0	-10.7	3.54 H	41	49.2	-5.9
3	4035.35	46.9 PK	74.0	-27.1	2.10 H	344	47.5	-0.6
4	4035.35	35.6 AV	54.0	-18.4	2.10 H	344	36.2	-0.6
5	9494.05	49.2 PK	74.0	-24.8	1.35 H	332	39.0	10.2
6	9494.05	37.1 AV	54.0	-16.9	1.35 H	332	26.9	10.2

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

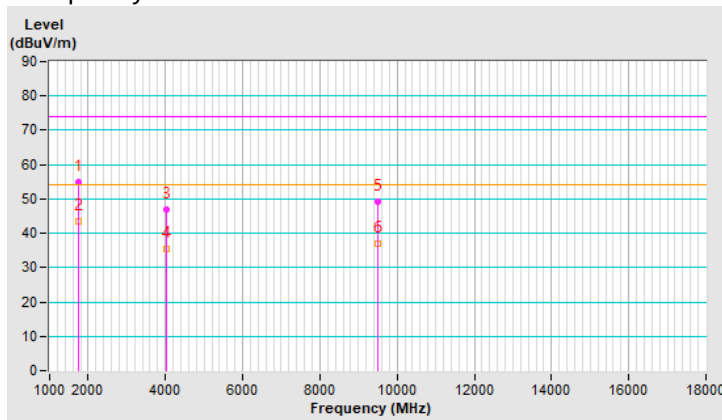


CHANNEL	TX Channel 4	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 18GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	4037.05	44.8 PK	74.0	-29.2	3.25 V	10	45.4	-0.6
2	4037.05	33.6 AV	54.0	-20.4	3.25 V	10	34.2	-0.6
3	#7997.20	47.7 PK	74.0	-26.3	1.25 V	38	39.6	8.1
4	#7997.20	34.8 AV	54.0	-19.2	1.25 V	38	26.7	8.1
5	11729.55	51.9 PK	74.0	-22.1	3.84 V	360	38.6	13.3
6	11729.55	36.8 AV	54.0	-17.2	3.84 V	360	23.5	13.3

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

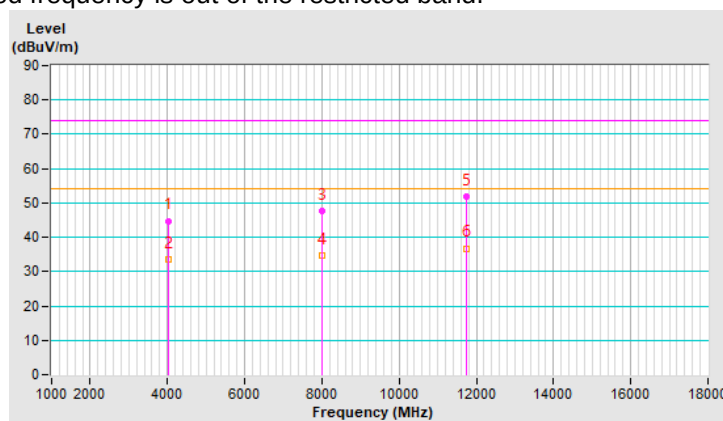


Bandwidth 1080MHz

CHANNEL	TX Channel 4	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 18GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#1792.25	55.3 PK	74.0	-18.7	3.52 H	72	61.0	-5.7
2	#1792.25	43.2 AV	54.0	-10.8	3.52 H	72	48.9	-5.7
3	4132.25	45.9 PK	74.0	-28.1	2.58 H	333	46.3	-0.4
4	4132.25	35.1 AV	54.0	-18.9	2.58 H	333	35.5	-0.4
5	9384.15	47.5 PK	74.0	-26.5	1.61 H	351	37.4	10.1
6	9384.15	36.9 AV	54.0	-17.1	1.61 H	351	26.8	10.1

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

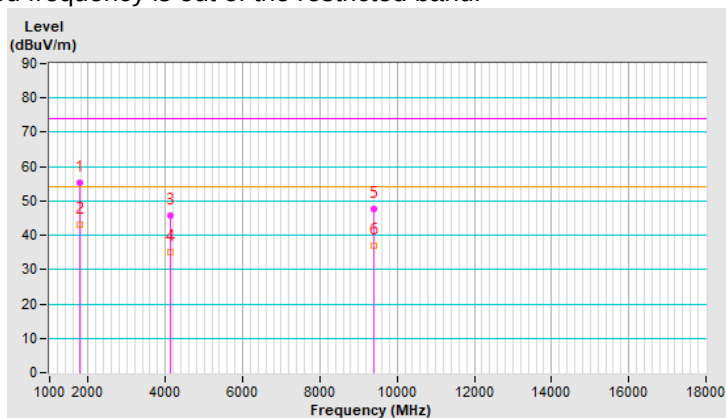


CHANNEL	TX Channel 4	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 18GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	4037.15	44.9 PK	74.0	-29.1	3.26 V	12	45.5	-0.6
2	4037.15	33.6 AV	54.0	-20.4	3.26 V	12	34.2	-0.6
3	#7997.25	47.8 PK	74.0	-26.2	1.24 V	36	39.7	8.1
4	#7997.25	34.8 AV	54.0	-19.2	1.24 V	36	26.7	8.1
5	11729.58	51.8 PK	74.0	-22.2	3.85 V	352	38.5	13.3
6	11729.58	36.8 AV	54.0	-17.2	3.85 V	352	23.5	13.3

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

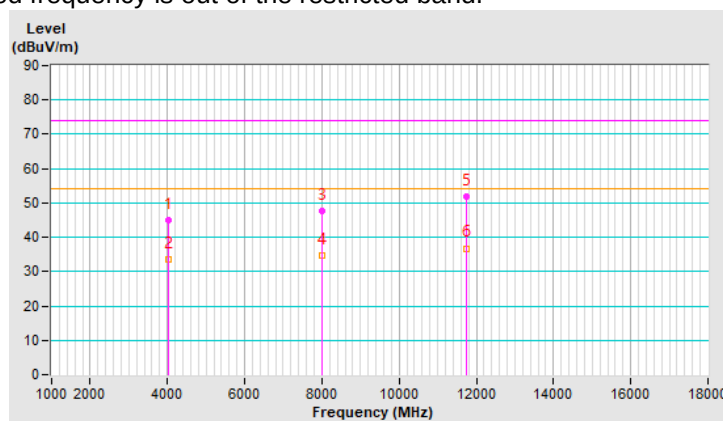


Bandwidth 2160MHz

CHANNEL	TX Channel 5	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 18GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#1743.00	54.9 PK	74.0	-19.1	3.58 H	50	60.8	-5.9
2	#1743.00	43.1 AV	54.0	-10.9	3.58 H	50	49.0	-5.9
3	4024.00	46.9 PK	74.0	-27.1	2.30 H	310	47.5	-0.6
4	4024.00	35.3 AV	54.0	-18.7	2.30 H	310	35.9	-0.6
5	9485.00	48.3 PK	74.0	-25.7	1.48 H	360	38.1	10.2
6	9485.00	36.8 AV	54.0	-17.2	1.48 H	360	26.6	10.2

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

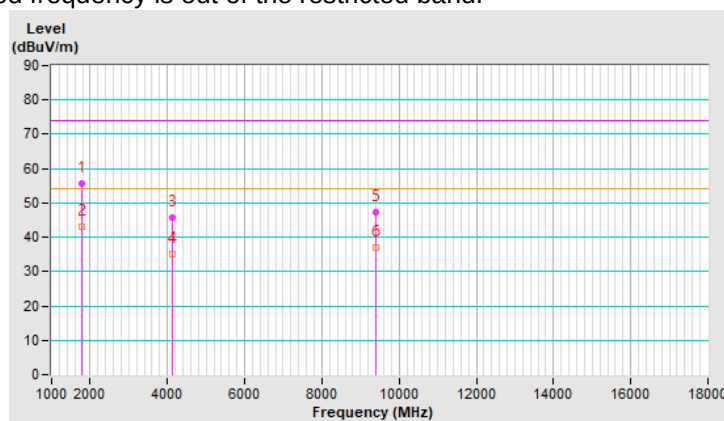


CHANNEL	TX Channel 5	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 18GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	4050.05	43.6 PK	74.0	-30.4	3.10 V	58	44.2	-0.6
2	4050.05	33.6 AV	54.0	-20.4	3.10 V	58	34.2	-0.6
3	#7856.00	46.1 PK	74.0	-27.9	1.59 V	45	38.6	7.5
4	#7856.00	34.8 AV	54.0	-19.2	1.59 V	45	27.3	7.5
5	11832.00	52.3 PK	74.0	-21.7	3.74 V	358	39.1	13.2
6	11832.00	36.8 AV	54.0	-17.2	3.74 V	358	23.6	13.2

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

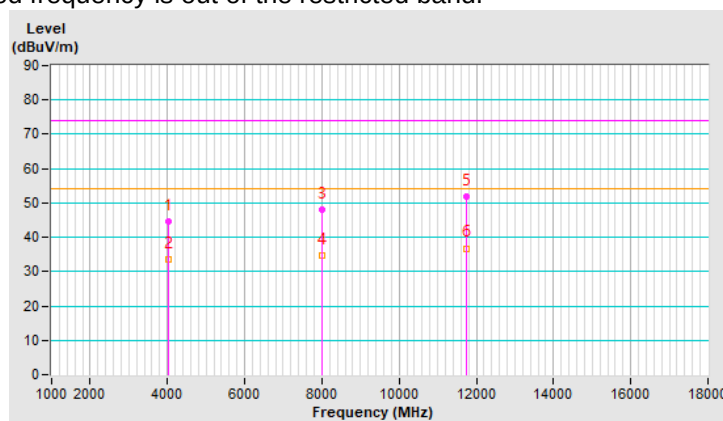


Bandwidth 1080MHz

CHANNEL	TX Channel 5	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 18GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#1792.28	55.5 PK	74.0	-18.5	3.51 H	67	61.2	-5.7
2	#1792.28	43.2 AV	54.0	-10.8	3.51 H	67	48.9	-5.7
3	4132.28	45.7 PK	74.0	-28.3	2.61 H	334	46.1	-0.4
4	4132.28	35.1 AV	54.0	-18.9	2.61 H	334	35.5	-0.4
5	9384.35	47.3 PK	74.0	-26.7	1.62 H	344	37.2	10.1
6	9384.35	36.9 AV	54.0	-17.1	1.62 H	344	26.8	10.1

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

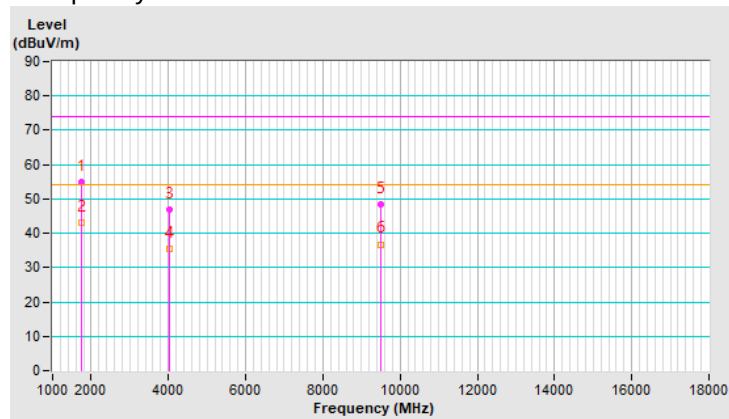


CHANNEL	TX Channel 5	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 18GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	4037.05	44.5 PK	74.0	-29.5	3.27 V	14	45.1	-0.6
2	4037.05	33.6 AV	54.0	-20.4	3.27 V	14	34.2	-0.6
3	#7997.22	47.9 PK	74.0	-26.1	1.21 V	38	39.8	8.1
4	#7997.22	34.8 AV	54.0	-19.2	1.21 V	38	26.7	8.1
5	11729.63	51.7 PK	74.0	-22.3	3.86 V	355	38.4	13.3
6	11729.63	36.8 AV	54.0	-17.2	3.86 V	355	23.5	13.3

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

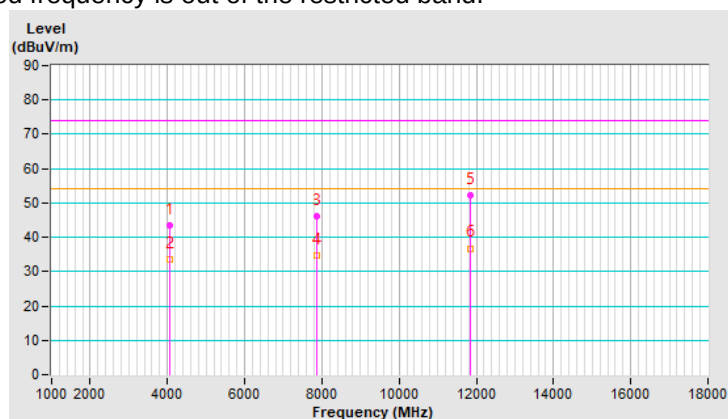


Bandwidth 2160MHz

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 18GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#1793.00	55.2 PK	74.0	-18.8	3.48 H	68	60.9	-5.7
2	#1793.00	43.1 AV	54.0	-10.9	3.48 H	68	48.8	-5.7
3	4132.00	45.8 PK	74.0	-28.2	2.54 H	330	46.2	-0.4
4	4132.00	35.3 AV	54.0	-18.7	2.54 H	330	35.7	-0.4
5	9384.00	47.6 PK	74.0	-26.4	1.59 H	354	37.5	10.1
6	9384.00	36.8 AV	54.0	-17.2	1.59 H	354	26.7	10.1

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

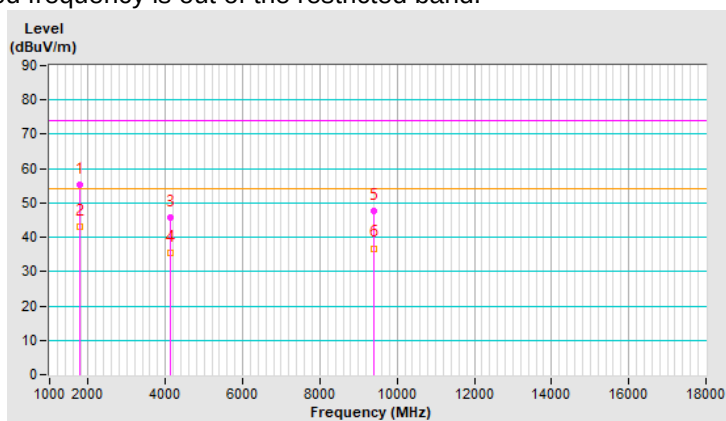


CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 18GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	4080.05	44.1 PK	74.0	-29.9	3.30 V	69	44.6	-0.5
2	4080.05	33.6 AV	54.0	-20.4	3.30 V	69	34.1	-0.5
3	#7810.00	45.9 PK	74.0	-28.1	1.77 V	81	38.6	7.3
4	#7810.00	34.8 AV	54.0	-19.2	1.77 V	81	27.5	7.3
5	11768.00	52.8 PK	74.0	-21.2	3.61 V	315	39.6	13.2
6	11768.00	36.8 AV	54.0	-17.2	3.61 V	315	23.6	13.2

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

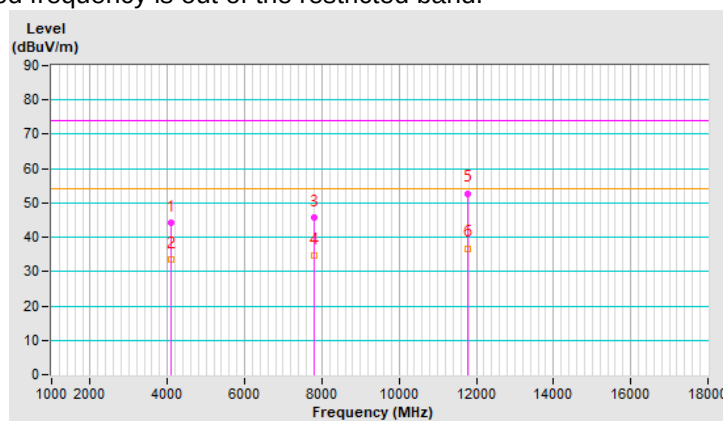


Bandwidth 1080MHz

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 18GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#1792.32	55.8 PK	74.0	-18.2	3.48 H	66	61.5	-5.7
2	#1792.32	43.2 AV	54.0	-10.8	3.48 H	66	48.9	-5.7
3	4132.32	45.4 PK	74.0	-28.6	2.57 H	339	45.8	-0.4
4	4132.32	35.1 AV	54.0	-18.9	2.57 H	339	35.5	-0.4
5	9384.42	47.1 PK	74.0	-26.9	1.68 H	349	37.0	10.1
6	9384.42	36.9 AV	54.0	-17.1	1.68 H	349	26.8	10.1

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

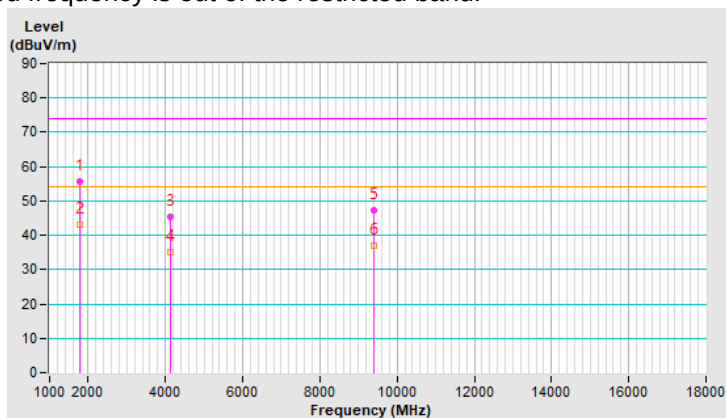


CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 18GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	4037.23	44.3 PK	74.0	-29.7	3.29 V	16	44.9	-0.6
2	4037.23	33.6 AV	54.0	-20.4	3.29 V	16	34.2	-0.6
3	#7997.18	48.1 PK	74.0	-25.9	1.19 V	34	40.0	8.1
4	#7997.18	34.8 AV	54.0	-19.2	1.19 V	34	26.7	8.1
5	11729.72	51.9 PK	74.0	-22.1	3.88 V	345	38.6	13.3
6	11729.72	36.8 AV	54.0	-17.2	3.88 V	345	23.5	13.3

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

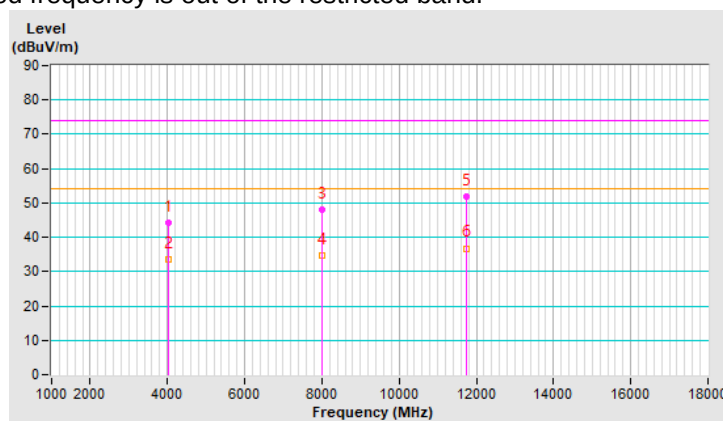


For 18~40 GHz
Bandwidth 2160MHz

CHANNEL	TX Channel 4	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	18GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#25293.86	41.8 PK	74.0	-32.2	2.12 H	130	53.0	-11.2
2	#25293.86	30.9 AV	54.0	-23.1	2.12 H	130	42.1	-11.2
3	#29927.98	44.9 PK	74.0	-29.1	1.68 H	235	55.6	-10.7
4	#29927.98	32.8 AV	54.0	-21.2	1.68 H	235	43.5	-10.7
5	#33121.30	53.1 PK	74.0	-20.9	1.56 H	332	64.4	-11.3
6	#33121.30	40.3 AV	54.0	-13.7	1.56 H	332	51.6	-11.3

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

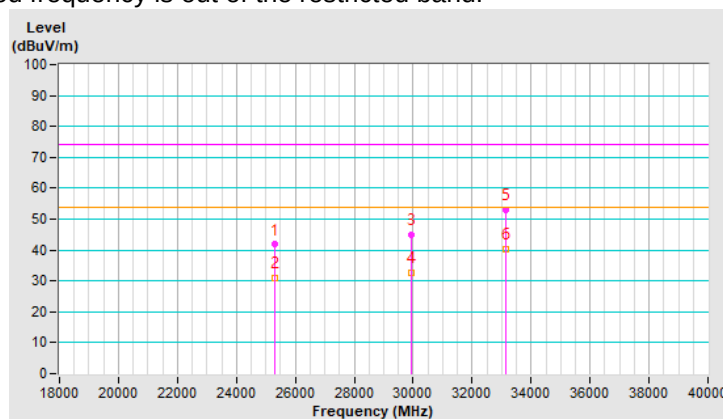


CHANNEL	TX Channel 4	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	18GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	22294.84	40.9 PK	74.0	-33.1	2.09 V	156	54.3	-13.4
2	22294.84	32.3 AV	54.0	-21.7	2.09 V	156	45.7	-13.4
3	#27928.92	42.8 PK	74.0	-31.2	1.65 V	190	53.6	-10.8
4	#27928.92	35.2 AV	54.0	-18.8	1.65 V	190	46.0	-10.8
5	#34119.81	50.9 PK	74.0	-23.1	1.48 V	322	61.7	-10.8
6	#34119.81	40.8 AV	54.0	-13.2	1.48 V	322	51.6	-10.8

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

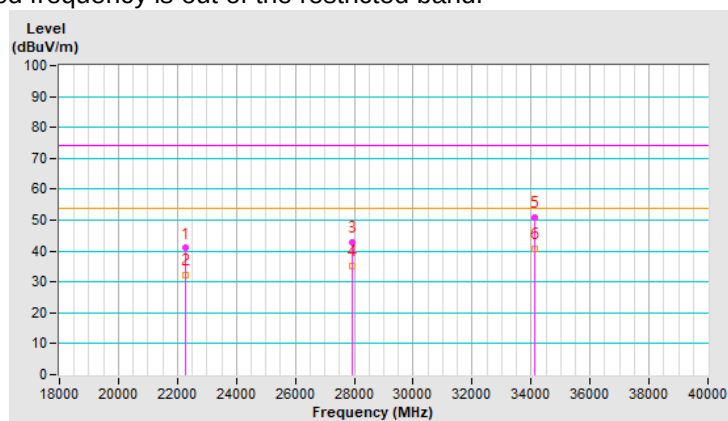


Bandwidth 1080MHz

CHANNEL	TX Channel 4	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	18GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#25293.82	41.9 PK	74.0	-32.1	2.14 H	128	53.1	-11.2
2	#25293.82	30.9 AV	54.0	-23.1	2.14 H	128	42.1	-11.2
3	#29928.12	44.7 PK	74.0	-29.3	1.71 H	233	55.4	-10.7
4	#29928.12	32.8 AV	54.0	-21.2	1.71 H	233	43.5	-10.7
5	#33121.40	53.2 PK	74.0	-20.8	1.58 H	334	64.5	-11.3
6	#33121.40	40.3 AV	54.0	-13.7	1.58 H	334	51.6	-11.3

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

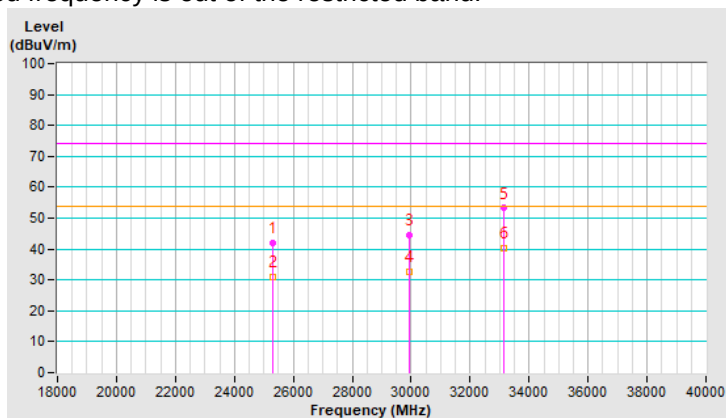


CHANNEL	TX Channel 4	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	18GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	22294.90	41.0 PK	74.0	-33.0	2.10 V	154	54.4	-13.4
2	22294.90	32.3 AV	54.0	-21.7	2.10 V	154	45.7	-13.4
3	#27929.00	42.9 PK	74.0	-31.1	1.67 V	194	53.7	-10.8
4	#27929.00	35.2 AV	54.0	-18.8	1.67 V	194	46.0	-10.8
5	#34119.96	51.2 PK	74.0	-22.8	1.51 V	324	62.0	-10.8
6	#34119.96	40.8 AV	54.0	-13.2	1.51 V	324	51.6	-10.8

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

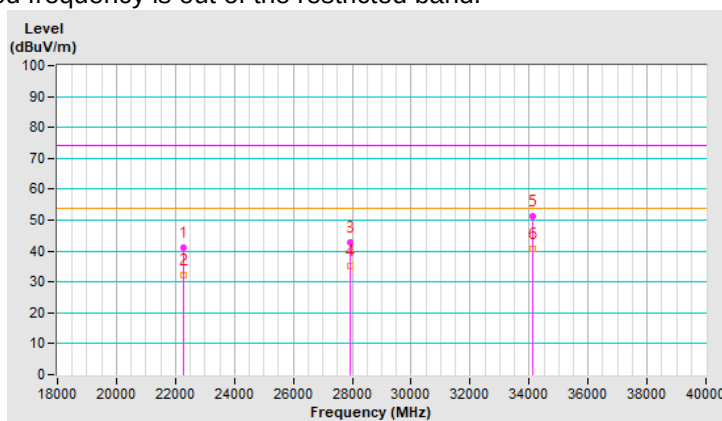


Bandwidth 2160MHz

CHANNEL	TX Channel 5	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	18GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#25295.21	42.3 PK	74.0	-31.7	2.05 H	143	53.5	-11.2
2	#25295.21	31.3 AV	54.0	-22.7	2.05 H	143	42.5	-11.2
3	#29929.23	45.8 PK	74.0	-28.2	1.57 H	243	56.5	-10.7
4	#29929.23	34.1 AV	54.0	-19.9	1.57 H	243	44.8	-10.7
5	#33121.50	52.8 PK	74.0	-21.2	1.61 H	352	64.1	-11.3
6	#33121.50	39.4 AV	54.0	-14.6	1.61 H	352	50.7	-11.3

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

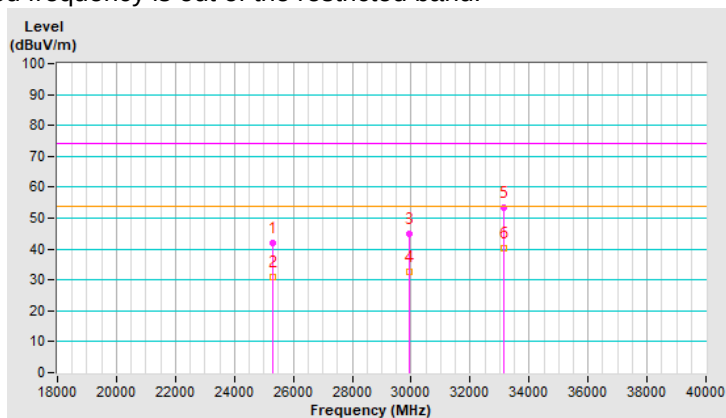


CHANNEL	TX Channel 5	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	18GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	22295.52	42.3 PK	74.0	-31.7	2.23 V	136	55.7	-13.4
2	22295.52	33.4 AV	54.0	-20.6	2.23 V	136	46.8	-13.4
3	#27928.42	43.9 PK	74.0	-30.1	1.77 V	199	54.7	-10.8
4	#27928.42	36.1 AV	54.0	-17.9	1.77 V	199	46.9	-10.8
5	#34121.62	49.9 PK	74.0	-24.1	1.58 V	302	60.7	-10.8
6	#34121.62	39.6 AV	54.0	-14.4	1.58 V	302	50.4	-10.8

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

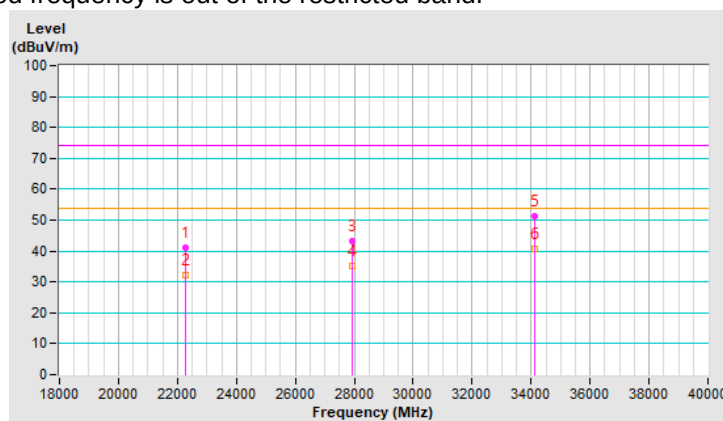


Bandwidth 1080MHz

CHANNEL	TX Channel 5	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	18GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#25293.87	41.9 PK	74.0	-32.1	2.16 H	130	53.1	-11.2
2	#25293.87	30.9 AV	54.0	-23.1	2.16 H	130	42.1	-11.2
3	#29928.18	44.8 PK	74.0	-29.2	1.73 H	228	55.5	-10.7
4	#29928.18	32.8 AV	54.0	-21.2	1.73 H	228	43.5	-10.7
5	#33121.55	53.3 PK	74.0	-20.7	1.61 H	336	64.6	-11.3
6	#33121.55	40.3 AV	54.0	-13.7	1.61 H	336	51.6	-11.3

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

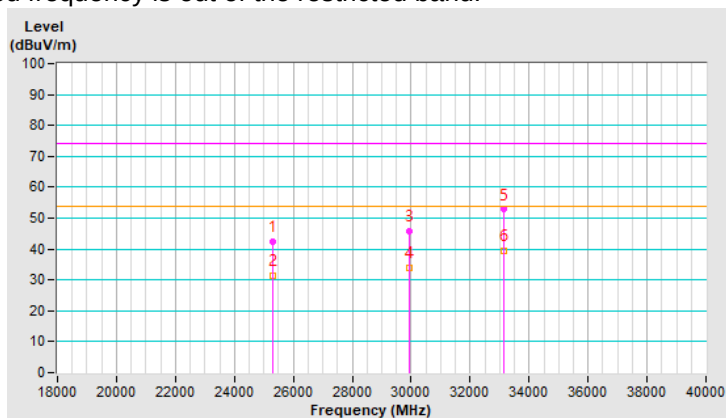


CHANNEL	TX Channel 5	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	18GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	22294.97	41.2 PK	74.0	-32.8	2.13 V	157	54.6	-13.4
2	22294.97	32.3 AV	54.0	-21.7	2.13 V	157	45.7	-13.4
3	#27929.10	43.1 PK	74.0	-30.9	1.69 V	197	53.9	-10.8
4	#27929.10	35.2 AV	54.0	-18.8	1.69 V	197	46.0	-10.8
5	#34120.20	51.4 PK	74.0	-22.6	1.53 V	328	62.2	-10.8
6	#34120.20	40.8 AV	54.0	-13.2	1.53 V	328	51.6	-10.8

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

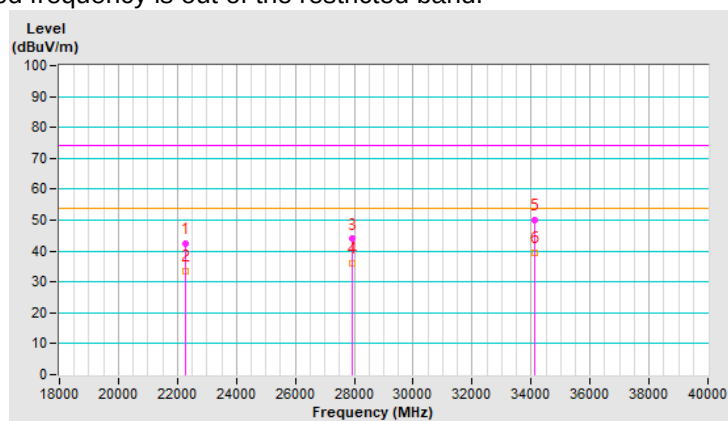


Bandwidth 2160MHz

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	18GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#25294.12	41.7 PK	74.0	-32.3	2.19 H	111	52.9	-11.2
2	#25294.12	30.9 AV	54.0	-23.1	2.19 H	111	42.1	-11.2
3	#29927.84	44.9 PK	74.0	-29.1	1.83 H	263	55.6	-10.7
4	#29927.84	33.9 AV	54.0	-20.1	1.83 H	263	44.6	-10.7
5	#33119.30	51.8 PK	74.0	-22.2	1.40 H	322	63.1	-11.3
6	#33119.30	38.6 AV	54.0	-15.4	1.40 H	322	49.9	-11.3

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

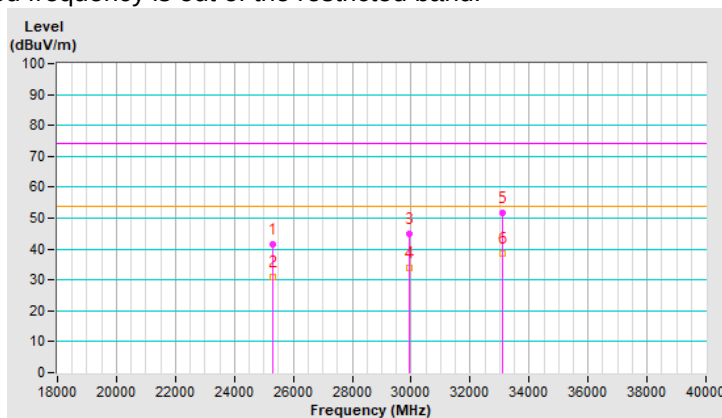


CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	18GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	22294.80	42.6 PK	74.0	-31.4	1.95 V	126	56.0	-13.4
2	22294.80	34.1 AV	54.0	-19.9	1.95 V	126	47.5	-13.4
3	#27930.00	44.3 PK	74.0	-29.7	1.48 V	197	55.1	-10.8
4	#27930.00	36.8 AV	54.0	-17.2	1.48 V	197	47.6	-10.8
5	#34121.62	50.8 PK	74.0	-23.2	1.58 V	333	61.6	-10.8
6	#34121.62	40.8 AV	54.0	-13.2	1.58 V	333	51.6	-10.8

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

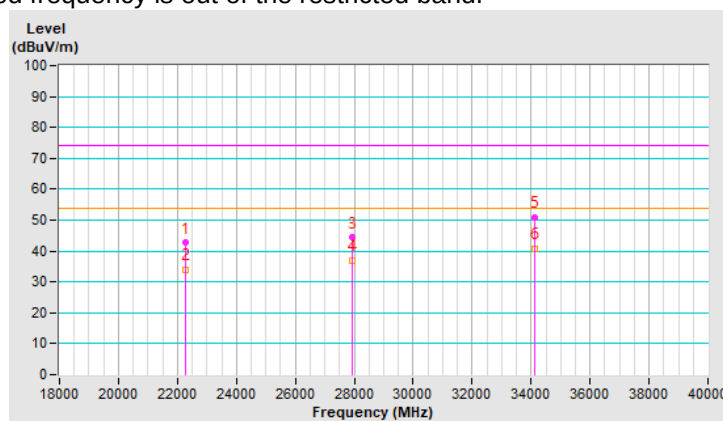


Bandwidth 1080MHz

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	18GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#25293.92	42.1 PK	74.0	-31.9	2.18 H	127	53.3	-11.2
2	#25293.92	30.9 AV	54.0	-23.1	2.18 H	127	42.1	-11.2
3	#29928.30	44.9 PK	74.0	-29.1	1.71 H	224	55.6	-10.7
4	#29928.30	32.8 AV	54.0	-21.2	1.71 H	224	43.5	-10.7
5	#33121.64	53.1 PK	74.0	-20.9	1.64 H	341	64.4	-11.3
6	#33121.64	40.3 AV	54.0	-13.7	1.64 H	341	51.6	-11.3

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

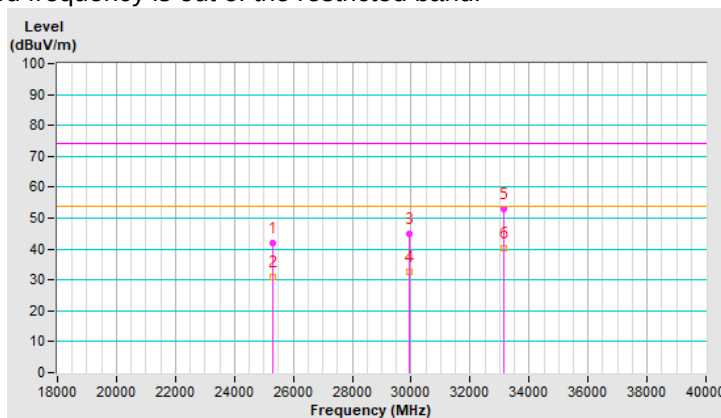


CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	18GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	22295.03	41.4 PK	74.0	-32.6	2.15 V	159	54.8	-13.4
2	22295.03	32.3 AV	54.0	-21.7	2.15 V	159	45.7	-13.4
3	#27929.22	43.3 PK	74.0	-30.7	1.64 V	199	54.1	-10.8
4	#27929.22	35.2 AV	54.0	-18.8	1.64 V	199	46.0	-10.8
5	#34120.36	51.6 PK	74.0	-22.4	1.55 V	330	62.4	-10.8
6	#34120.36	40.8 AV	54.0	-13.2	1.55 V	330	51.6	-10.8

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

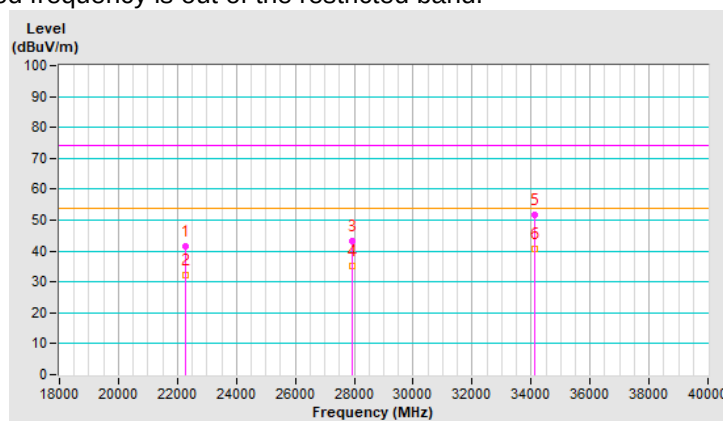

For above 40 GHz
For Bandwidth 2160MHz

CHANNEL	TX Channel 4	DETECTOR FUNCTION	Average (AV)
FREQUENCY RANGE	40GHz ~ 200GHz		

ANTENNA POLARITY: HORIZONTAL						
NO.	Frequency (GHz)	EIRP Level (dBm)	Reading Value (dBm)	Receiver Antenna Gain (dBi)	Power Density (pW/cm ²)	Power Density Limit (pW/cm ²)
1	49.620	-41.383	-65.383	24.00	0.064	90
2	50.840	-47.794	-91.060	23.30	0.015	90
3	69.810	-22.490	-68.510	23.30	4.984	90
4	103.130	-42.001	-91.410	23.30	0.056	90
5	149.830	-37.696	-90.350	23.30	0.150	90
6	169.990	-36.270	-90.020	23.30	0.209	90
ANTENNA POLARITY: VERTICAL						
NO.	Frequency (GHz)	EIRP Level (dBm)	Reading Value (dBm)	Receiver Antenna Gain (dBi)	Power Density (pW/cm ²)	Power Density Limit (pW/cm ²)
1	49.800	-40.356	-64.356	24.000	0.081	90
2	51.250	-47.065	-90.401	23.300	0.017	90
3	69.885	-21.642	-67.671	23.300	6.058	90
4	103.560	-41.209	-90.655	23.300	0.067	90
5	150.020	-37.181	-89.846	23.300	0.169	90
6	170.305	-35.812	-89.578	23.300	0.232	90

Note:

1. The measured power level is converted to EIRP using the equation:

$$\text{EIRP} = \text{Raw Value} - \text{Receiver Antenna Gain} + 20 \cdot \log(4 \cdot 3.1416 \cdot D / \lambda)$$

where:

D is the measurement distance

λ is the wavelength

*Measurements made at 1 meter distance.

2. The far-field boundary is given in ANSI 63.10 as:

$$R \text{ far field} = (2 \cdot L^2) / \lambda$$

L is the Largest Antenna Dimension of measurement antenna, including the reflector

λ is the wavelength

Frequency (GHz)	L (m)	Lambda (m)	R (Far Field) (m)
64.8	0.01	0.00463	0.043

For Bandwidth 1080MHz

CHANNEL	TX Channel 4	DETECTOR FUNCTION	Average (AV)
FREQUENCY RANGE	40GHz ~ 200GHz		

ANTENNA POLARITY: HORIZONTAL						
NO.	Frequency (GHz)	EIRP Level (dBm)	Reading Value (dBm)	Receiver Antenna Gain (dBi)	Power Density (pW/cm ²)	Power Density Limit (pW/cm ²)
1	49.620	-41.500	-65.500	24.00	0.063	90
2	50.840	-47.924	-91.190	23.30	0.014	90
3	69.810	-22.690	-68.710	23.30	4.759	90
4	103.130	-42.321	-91.730	23.30	0.052	90
5	149.830	-38.196	-90.850	23.30	0.134	90
6	169.990	-36.320	-90.070	23.30	0.206	90
ANTENNA POLARITY: VERTICAL						
NO.	Frequency (GHz)	EIRP Level (dBm)	Reading Value (dBm)	Receiver Antenna Gain (dBi)	Power Density (pW/cm ²)	Power Density Limit (pW/cm ²)
1	49.800	-40.36	-64.360	24.000	0.081	90
2	51.250	-47.144	-90.480	23.300	0.017	90
3	69.885	-21.961	-67.990	23.300	5.629	90
4	103.560	-41.254	-90.700	23.300	0.066	90
5	150.020	-37.515	-90.180	23.300	0.157	90
6	170.305	-36.194	-89.960	23.300	0.212	90

Note:

1. The measured power level is converted to EIRP using the equation:

$$EIRP = \text{Raw Value} - \text{Receiver Antenna Gain} + 20 \cdot \log(4 \cdot 3.1416 \cdot D / \lambda)$$

where:

D is the measurement distance

λ is the wavelength

*Measurements made at 1 meter distance.

2. The far-field boundary is given in ANSI 63.10 as:

$$R \text{ far field} = (2 \cdot L^2) / \lambda$$

L is the Largest Antenna Dimension of measurement antenna, including the reflector

λ is the wavelength

Frequency (GHz)	L (m)	Lambda (m)	R (Far Field) (m)
64.8	0.01	0.00463	0.043

For Bandwidth 2160MHz

CHANNEL	TX Channel 5	DETECTOR FUNCTION	Average (AV)
FREQUENCY RANGE	40GHz ~ 200GHz		

ANTENNA POLARITY: HORIZONTAL						
NO.	Frequency (GHz)	EIRP Level (dBm)	Reading Value (dBm)	Receiver Antenna Gain (dBi)	Power Density (pW/cm ²)	Power Density Limit (pW/cm ²)
1	49.620	-41.440	-65.440	24.00	0.063	90
2	50.840	-47.994	-91.260	23.30	0.014	90
3	69.810	-22.720	-68.740	23.30	4.727	90
4	103.130	-42.011	-91.420	23.30	0.056	90
5	149.830	-37.896	-90.550	23.30	0.144	90
6	169.990	-36.600	-90.350	23.30	0.193	90
ANTENNA POLARITY: VERTICAL						
NO.	Frequency (GHz)	EIRP Level (dBm)	Reading Value (dBm)	Receiver Antenna Gain (dBi)	Power Density (pW/cm ²)	Power Density Limit (pW/cm ²)
1	49.800	-40.85	-64.770	24.000	0.074	90
2	51.250	-47.614	-90.870	23.300	0.016	90
3	69.885	-22.311	-67.870	23.300	5.787	90
4	103.560	-41.504	-91.090	23.300	0.061	90
5	150.020	-37.605	-90.010	23.300	0.163	90
6	170.305	-36.584	-90.030	23.300	0.209	90

Note:

1. The measured power level is converted to EIRP using the equation:

$$\text{EIRP} = \text{Raw Value} - \text{Receiver Antenna Gain} + 20 \cdot \log(4 \cdot 3.1416 \cdot D / \lambda)$$

where:

D is the measurement distance

λ is the wavelength

*Measurements made at 1 meter distance.

2. The far-field boundary is given in ANSI 63.10 as:

$$R \text{ far field} = (2 \cdot L^2) / \lambda$$

L is the Largest Antenna Dimension of measurement antenna, including the reflector

λ is the wavelength

Frequency (GHz)	L (m)	Lambda (m)	R (Far Field) (m)
66.96	0.01	0.00448	0.045

For Bandwidth 1080MHz

CHANNEL	TX Channel 5	DETECTOR FUNCTION	Average (AV)
FREQUENCY RANGE	40GHz ~ 200GHz		

ANTENNA POLARITY: HORIZONTAL						
NO.	Frequency (GHz)	EIRP Level (dBm)	Reading Value (dBm)	Receiver Antenna Gain (dBi)	Power Density (pW/cm ²)	Power Density Limit (pW/cm ²)
1	49.620	-41.263	-65.263	24.00	0.066	90
2	50.840	-48.424	-91.690	23.30	0.013	90
3	69.810	-22.840	-68.860	23.30	4.598	90
4	103.130	-42.451	-91.860	23.30	0.050	90
5	149.830	-38.446	-91.100	23.30	0.126	90
6	169.990	-36.420	-90.170	23.30	0.202	90
ANTENNA POLARITY: VERTICAL						
NO.	Frequency (GHz)	EIRP Level (dBm)	Reading Value (dBm)	Receiver Antenna Gain (dBi)	Power Density (pW/cm ²)	Power Density Limit (pW/cm ²)
1	49.800	-40.85	-64.850	24.000	0.073	90
2	51.250	-47.614	-90.950	23.300	0.015	90
3	69.885	-22.311	-68.340	23.300	5.194	90
4	103.560	-41.504	-90.950	23.300	0.063	90
5	150.020	-37.605	-90.270	23.300	0.153	90
6	170.305	-36.584	-90.350	23.300	0.194	90

Note:

1. The measured power level is converted to EIRP using the equation:

$$\text{EIRP} = \text{Raw Value} - \text{Receiver Antenna Gain} + 20 \cdot \log(4 \cdot 3.1416 \cdot D / \lambda)$$

where:

D is the measurement distance

λ is the wavelength

*Measurements made at 1 meter distance.

2. The far-field boundary is given in ANSI 63.10 as:

$$R \text{ far field} = (2 \cdot L^2) / \lambda$$

L is the Largest Antenna Dimension of measurement antenna, including the reflector

λ is the wavelength

Frequency (GHz)	L (m)	Lambda (m)	R (Far Field) (m)
66.96	0.01	0.00448	0.045

For Bandwidth 2160MHz

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Average (AV)
FREQUENCY RANGE	40GHz ~ 200GHz		

ANTENNA POLARITY: HORIZONTAL						
NO.	Frequency (GHz)	EIRP Level (dBm)	Reading Value (dBm)	Receiver Antenna Gain (dBi)	Power Density (pW/cm ²)	Power Density Limit (pW/cm ²)
1	49.620	-41.720	-65.720	24.00	0.060	90
2	50.840	-48.044	-91.310	23.30	0.014	90
3	69.810	-22.950	-68.970	23.30	4.483	90
4	103.130	-42.291	-91.700	23.30	0.052	90
5	149.830	-37.726	-90.380	23.30	0.149	90
6	169.990	-36.690	-90.440	23.30	0.189	90
ANTENNA POLARITY: VERTICAL						
NO.	Frequency (GHz)	EIRP Level (dBm)	Reading Value (dBm)	Receiver Antenna Gain (dBi)	Power Density (pW/cm ²)	Power Density Limit (pW/cm ²)
1	49.800	-40.85	-64.850	24.000	0.073	90
2	51.250	-47.234	-90.570	23.300	0.017	90
3	69.885	-21.791	-67.820	23.300	5.854	90
4	103.560	-41.324	-90.770	23.300	0.065	90
5	150.020	-37.585	-90.250	23.300	0.154	90
6	170.305	-36.224	-89.990	23.300	0.211	90

Note:

1. The measured power level is converted to EIRP using the equation:

$$\text{EIRP} = \text{Raw Value} - \text{Receiver Antenna Gain} + 20 \cdot \log(4 \cdot 3.1416 \cdot D / \lambda)$$

where:

D is the measurement distance

λ is the wavelength

*Measurements made at 1 meter distance.

2. The far-field boundary is given in ANSI 63.10 as:

$$R \text{ far field} = (2 \cdot L^2) / \lambda$$

L is the Largest Antenna Dimension of measurement antenna, including the reflector

λ is the wavelength

Frequency (GHz)	L (m)	Lambda (m)	R (Far Field) (m)
69.12	0.01	0.00434	0.046

For Bandwidth 1080MHz

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Average (AV)
FREQUENCY RANGE	40GHz ~ 200GHz		

ANTENNA POLARITY: HORIZONTAL						
NO.	Frequency (GHz)	EIRP Level (dBm)	Reading Value (dBm)	Receiver Antenna Gain (dBi)	Power Density (pW/cm ²)	Power Density Limit (pW/cm ²)
1	49.620	-41.610	-65.610	24.00	0.061	90
2	50.840	-48.724	-91.990	23.30	0.012	90
3	69.810	-22.930	-68.950	23.30	4.504	90
4	103.130	-42.661	-92.070	23.30	0.048	90
5	149.830	-38.536	-91.190	23.30	0.124	90
6	169.990	-36.770	-90.520	23.30	0.186	90
ANTENNA POLARITY: VERTICAL						
NO.	Frequency (GHz)	EIRP Level (dBm)	Reading Value (dBm)	Receiver Antenna Gain (dBi)	Power Density (pW/cm ²)	Power Density Limit (pW/cm ²)
1	49.800	-41.22	-65.220	24.000	0.067	90
2	51.250	-47.814	-91.150	23.300	0.015	90
3	69.885	-22.571	-68.600	23.300	4.892	90
4	103.560	-41.824	-91.270	23.300	0.058	90
5	150.020	-37.835	-90.500	23.300	0.146	90
6	170.305	-36.884	-90.650	23.300	0.181	90

Note:

1. The measured power level is converted to EIRP using the equation:

$$\text{EIRP} = \text{Raw Value} - \text{Receiver Antenna Gain} + 20 \cdot \log(4 \cdot 3.1416 \cdot D / \lambda)$$

where:

D is the measurement distance

λ is the wavelength

*Measurements made at 1 meter distance.

2. The far-field boundary is given in ANSI 63.10 as:

$$R \text{ far field} = (2 \cdot L^2) / \lambda$$

L is the Largest Antenna Dimension of measurement antenna, including the reflector

λ is the wavelength

Frequency (GHz)	L (m)	Lambda (m)	R (Far Field) (m)
69.12	0.01	0.00434	0.046


Below 1GHz Data:
Bandwidth 1080MHz

CHANNEL	TX Channel 4	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	9kHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	38.44	29.3 QP	40.0	-10.7	1.22 H	356	42.6	-13.3
2	110.70	30.1 QP	43.5	-13.4	2.11 H	5	45.9	-15.8
3	162.05	37.4 QP	43.5	-6.1	2.14 H	96	50.1	-12.7
4	208.96	31.1 QP	43.5	-12.4	1.48 H	93	47.2	-16.1
5	224.94	32.2 QP	46.0	-13.8	1.12 H	88	47.9	-15.7
6	282.98	25.6 QP	46.0	-20.4	1.03 H	233	38.2	-12.6

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

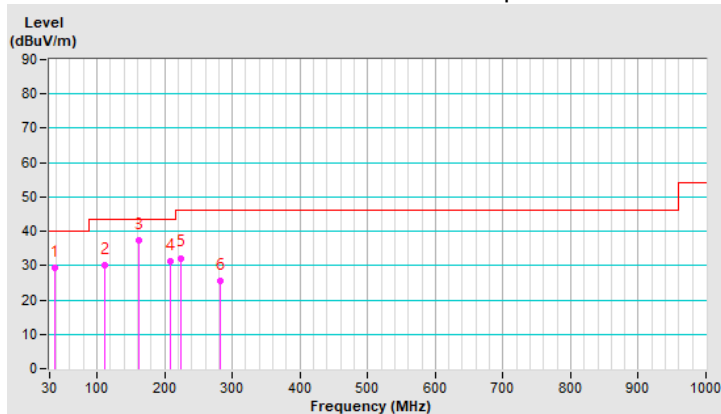


CHANNEL	TX Channel 4	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	9kHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	36.81	36.8 QP	40.0	-3.2	1.01 V	354	50.3	-13.5
2	57.50	32.4 QP	40.0	-7.6	1.13 V	126	45.6	-13.2
3	85.43	35.6 QP	40.0	-4.4	2.06 V	11	53.9	-18.3
4	151.88	36.3 QP	43.5	-7.2	1.16 V	288	49.0	-12.7
5	205.65	31.5 QP	43.5	-12.0	1.08 V	88	47.6	-16.1
6	333.72	24.1 QP	46.0	-21.9	1.91 V	231	35.2	-11.1

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

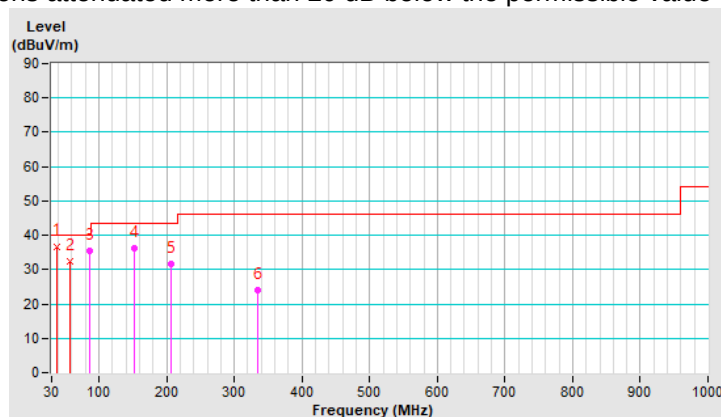


Bandwidth 1080MHz

CHANNEL	TX Channel 5	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	9kHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	38.10	29.9 QP	40.0	-10.1	1.28 H	351	43.1	-13.2
2	110.73	30.2 QP	43.5	-13.3	2.12 H	10	46.0	-15.8
3	162.08	37.3 QP	43.5	-6.2	2.15 H	95	50.0	-12.7
4	208.90	31.1 QP	43.5	-12.4	1.47 H	105	47.2	-16.1
5	224.98	32.2 QP	46.0	-13.8	1.14 H	90	47.9	-15.7
6	282.98	25.7 QP	46.0	-20.3	1.06 H	234	38.3	-12.6

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

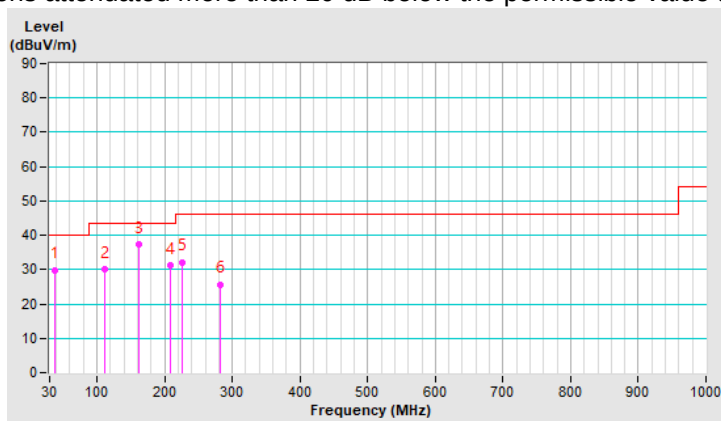


CHANNEL	TX Channel 5	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	9kHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	36.89	36.7 QP	40.0	-3.3	1.05 V	354	50.2	-13.5
2	57.58	32.5 QP	40.0	-7.5	4.00 V	129	45.7	-13.2
3	85.43	35.4 QP	40.0	-4.6	1.99 V	13	53.7	-18.3
4	151.79	36.4 QP	43.5	-7.1	1.19 V	292	49.1	-12.7
5	205.63	31.8 QP	43.5	-11.7	1.04 V	86	47.9	-16.1
6	332.98	24.6 QP	46.0	-21.4	1.91 V	223	35.7	-11.1

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

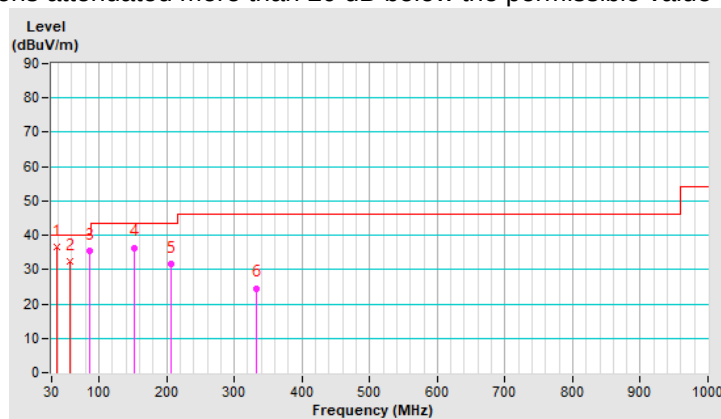


Bandwidth 1080MHz

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	9kHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	38.49	29.7 QP	40.0	-10.3	1.20 H	349	43.0	-13.3
2	110.82	30.4 QP	43.5	-13.1	2.08 H	11	46.2	-15.8
3	161.80	37.0 QP	43.5	-6.5	2.22 H	104	49.8	-12.8
4	209.10	31.2 QP	43.5	-12.3	1.51 H	110	47.3	-16.1
5	224.95	32.4 QP	46.0	-13.6	1.09 H	91	48.1	-15.7
6	282.97	25.7 QP	46.0	-20.3	1.09 H	228	38.3	-12.6

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

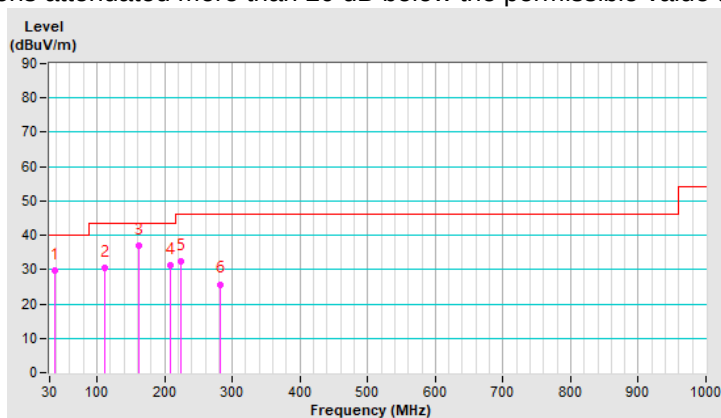


CHANNEL	TX Channel 6	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	9kHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	35.98	36.7 QP	40.0	-3.3	1.03 V	341	50.5	-13.8
2	57.61	32.8 QP	40.0	-7.2	1.08 V	122	46.0	-13.2
3	85.63	35.7 QP	40.0	-4.3	2.05 V	21	54.1	-18.4
4	151.84	36.1 QP	43.5	-7.4	1.21 V	299	48.8	-12.7
5	205.72	31.3 QP	43.5	-12.2	1.09 V	99	47.4	-16.1
6	333.73	24.4 QP	46.0	-21.6	1.79 V	218	35.5	-11.1

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

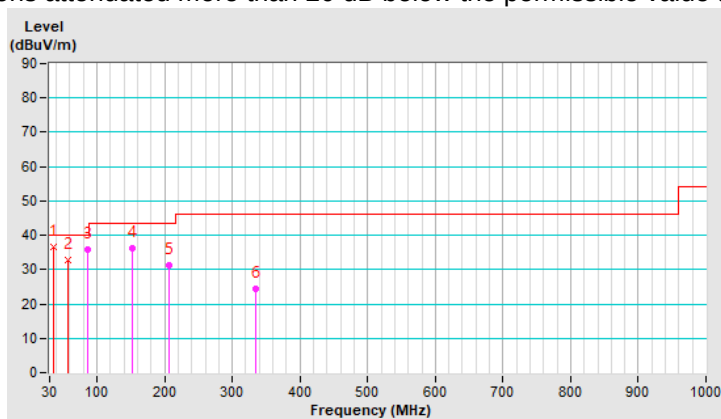

4.2 Conducted Emission Measurement

4.2.1 Limits of Conducted Emission Measurement

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

Note: 1. The lower limit shall apply at the transition frequencies.

2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

4.2.2 Test Instruments

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver R&S	ESCS 30	847124/029	Oct. 23, 2019	Oct. 22, 2020
Line-Impedance Stabilization Network (for EUT) R&S	ESH3-Z5	848773/004	Oct. 23, 2019	Oct. 22, 2020
Line-Impedance Stabilization Network (for Peripheral) R&S	ESH3-Z5	835239/001	Mar. 19, 2020	Mar. 18, 2021
50 ohms Terminator	50	3	Oct. 23, 2019	Oct. 22, 2020
RF Cable	5D-FB	COCCAB-001	Sep. 27, 2019	Sep. 26, 2020
Fixed attenuator EMCI	STI02-2200-10	005	Aug. 30, 2019	Aug. 29, 2020
Software BVADT	BVADT_Cond_ V7.3.7.4	NA	NA	NA

Note:

1. The calibration interval of the above test instruments are 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in Conduction 1.
- 3 Tested Date: Apr. 29, 2020

4.2.3 Test Procedures


- The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

Note: The resolution bandwidth and video bandwidth of test receiver is 9kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15MHz-30MHz.

4.2.4 Deviation from Test Standard

No deviation.

4.2.5 Test Setup

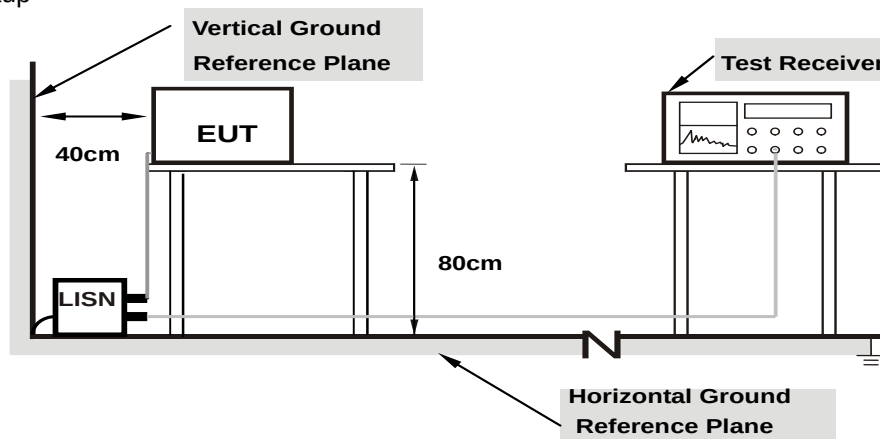

Note: 1.Support units were connected to second LISN.

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.2.6 EUT Operating Conditions

Same as 4.1.6.


4.2.7 Test Results

Channel	TX Channel 4		
Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)

Phase Of Power : Line (L)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBUV)		Emission Level (dBUV)		Limit (dBUV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15000	9.97	40.97	25.49	50.94	35.46	66.00	56.00	-15.06	-20.54
2	0.17344	9.97	36.37	21.86	46.34	31.83	64.79	54.79	-18.45	-22.96
3	0.52109	9.99	38.56	31.71	48.55	41.70	56.00	46.00	-7.45	-4.30
4	10.87891	10.53	26.40	18.51	36.93	29.04	60.00	50.00	-23.07	-20.96
5	11.96484	10.59	28.43	21.86	39.02	32.45	60.00	50.00	-20.98	-17.55
6	28.52734	11.28	27.31	21.73	38.59	33.01	60.00	50.00	-21.41	-16.99

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

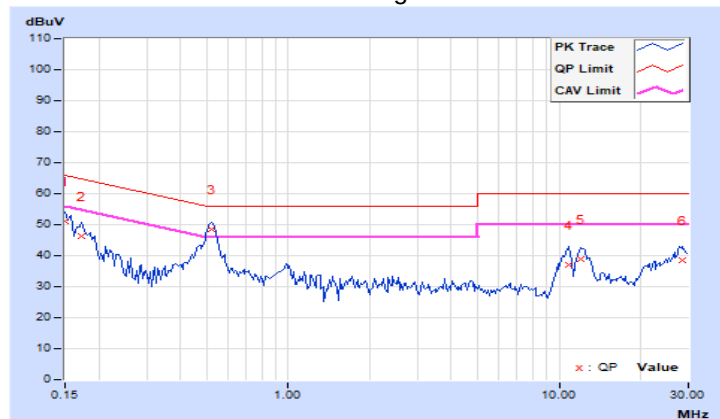


Channel	TX Channel 4		
Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)

Phase Of Power : Neutral (N)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15000	9.97	41.11	25.23	51.08	35.20	66.00	56.00	-14.92	-20.80
2	0.16172	9.97	38.43	22.38	48.40	32.35	65.38	55.38	-16.98	-23.03
3	0.52109	9.99	38.97	32.11	48.96	42.10	56.00	46.00	-7.04	-3.90
4	10.48438	10.41	27.73	21.47	38.14	31.88	60.00	50.00	-21.86	-18.12
5	12.49219	10.49	29.39	23.41	39.88	33.90	60.00	50.00	-20.12	-16.10
6	28.83203	10.94	27.49	21.85	38.43	32.79	60.00	50.00	-21.57	-17.21

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

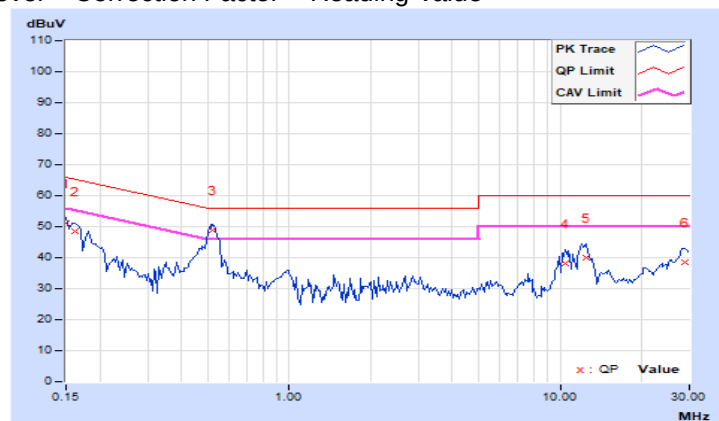


Channel	TX Channel 5		
Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)

Phase Of Power : Line (L)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBUV)		Emission Level (dBUV)		Limit (dBUV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15000	9.97	41.22	26.05	51.19	36.02	66.00	56.00	-14.81	-19.98
2	0.16562	9.97	37.67	21.68	47.64	31.65	65.18	55.18	-17.54	-23.53
3	0.52891	9.99	38.81	31.62	48.80	41.61	56.00	46.00	-7.20	-4.39
4	10.54297	10.51	26.79	20.03	37.30	30.54	60.00	50.00	-22.70	-19.46
5	12.29688	10.61	28.67	22.41	39.28	33.02	60.00	50.00	-20.72	-16.98
6	28.84375	11.29	27.17	21.61	38.46	32.90	60.00	50.00	-21.54	-17.10

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

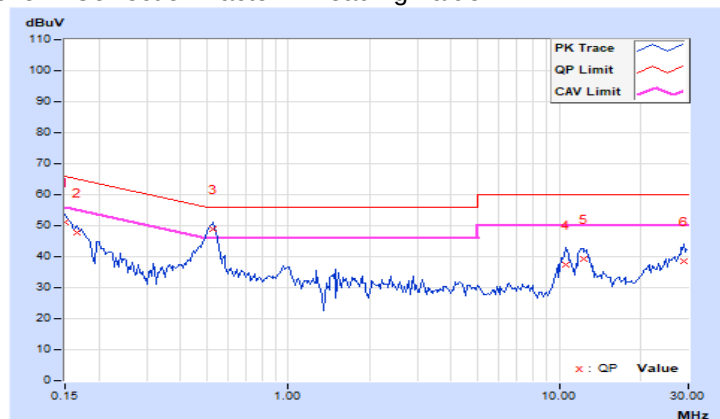


Channel	TX Channel 5		
Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)

Phase Of Power : Neutral (N)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15000	9.97	41.18	25.91	51.15	35.88	66.00	56.00	-14.85	-20.12
2	0.17344	9.97	36.12	21.21	46.09	31.18	64.79	54.79	-18.70	-23.61
3	0.52891	9.99	39.01	31.50	49.00	41.49	56.00	46.00	-7.00	-4.51
4	10.97266	10.43	26.58	18.17	37.01	28.60	60.00	50.00	-22.99	-21.40
5	11.94141	10.47	29.68	22.96	40.15	33.43	60.00	50.00	-19.85	-16.57
6	27.86719	10.93	27.03	21.33	37.96	32.26	60.00	50.00	-22.04	-17.74

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

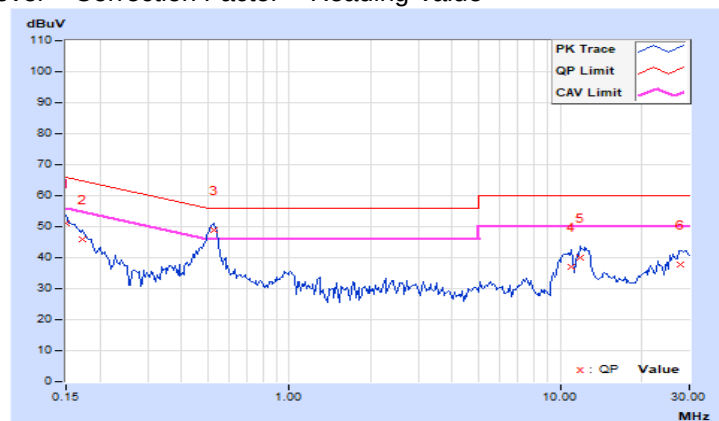


Channel	TX Channel 6		
Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)

Phase Of Power : Line (L)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15000	9.97	41.16	26.77	51.13	36.74	66.00	56.00	-14.87	-19.26
2	0.16953	9.97	37.22	21.68	47.19	31.65	64.98	54.98	-17.79	-23.33
3	0.52500	9.99	38.85	31.66	48.84	41.65	56.00	46.00	-7.16	-4.35
4	10.56250	10.51	26.54	20.03	37.05	30.54	60.00	50.00	-22.95	-19.46
5	12.43750	10.62	28.40	22.26	39.02	32.88	60.00	50.00	-20.98	-17.12
6	28.81641	11.29	27.33	21.67	38.62	32.96	60.00	50.00	-21.38	-17.04

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

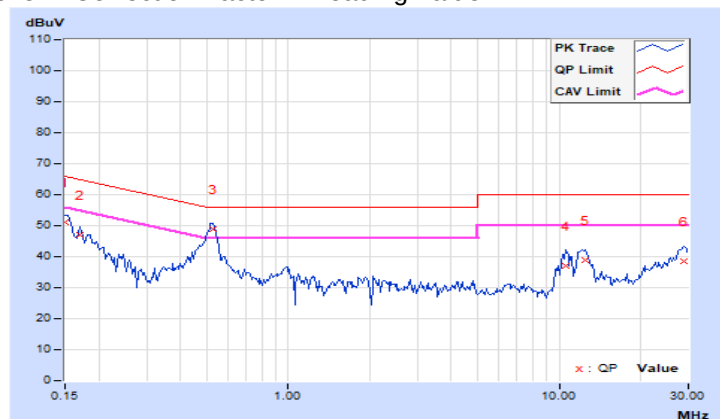


Channel	TX Channel 6		
Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)

Phase Of Power : Neutral (N)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15000	9.97	41.03	25.63	51.00	35.60	66.00	56.00	-15.00	-20.40
2	0.16953	9.97	36.92	21.00	46.89	30.97	64.98	54.98	-18.09	-24.01
3	0.53281	9.99	38.59	31.16	48.58	41.15	56.00	46.00	-7.42	-4.85
4	10.68359	10.42	27.78	21.04	38.20	31.46	60.00	50.00	-21.80	-18.54
5	12.41797	10.49	29.72	23.63	40.21	34.12	60.00	50.00	-19.79	-15.88
6	29.34375	10.95	27.52	21.82	38.47	32.77	60.00	50.00	-21.53	-17.23

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

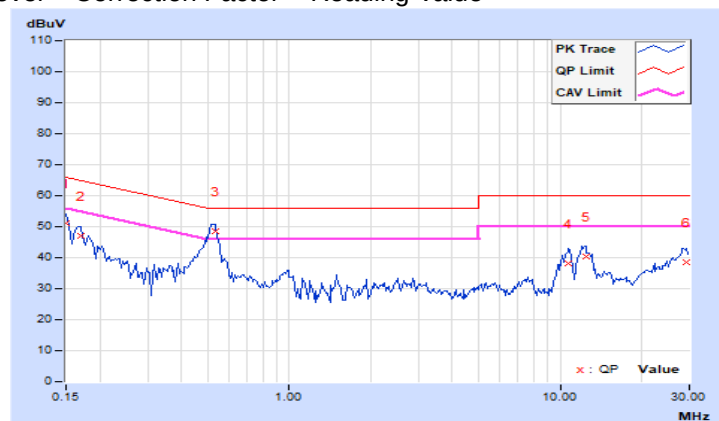


4.3 6dB Bandwidth Measurement

4.3.1 Limits of 6dB Bandwidth Measurement

None: For reporting purposes only.

4.3.2 Test Setup

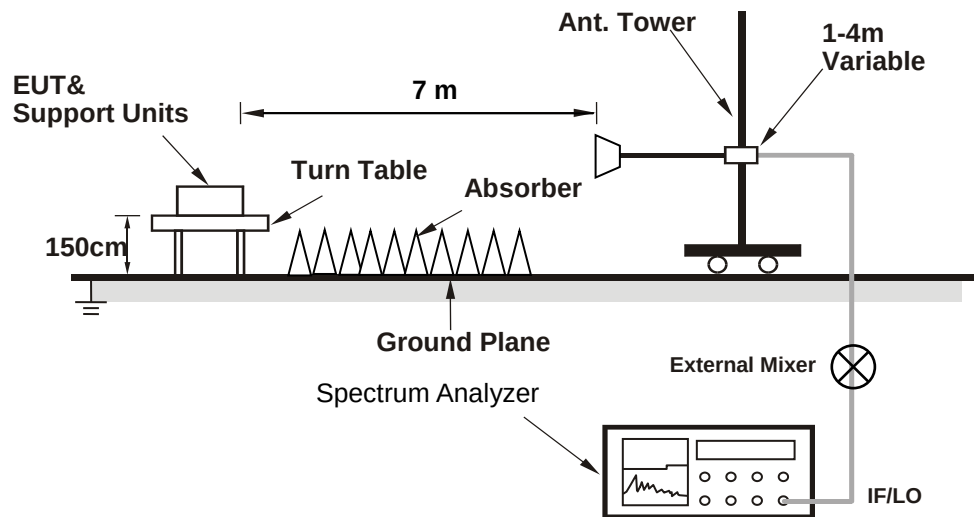

4.3.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.3.4 Test Procedure

The spectrum analyzer and external mixer are set up to measure the radiated output of the transmitter.

4.3.5 Deviation from Test Standard

No deviation.

4.3.6 EUT Operating Conditions


The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.3.7 Test Result

Bandwidth 2160MHz

Channel	Frequency (MHz)	6dB Bandwidth (MHz)
4	64800	1613
5	66960	1523
6	69120	1456

Spectrum Plot of Worst Value

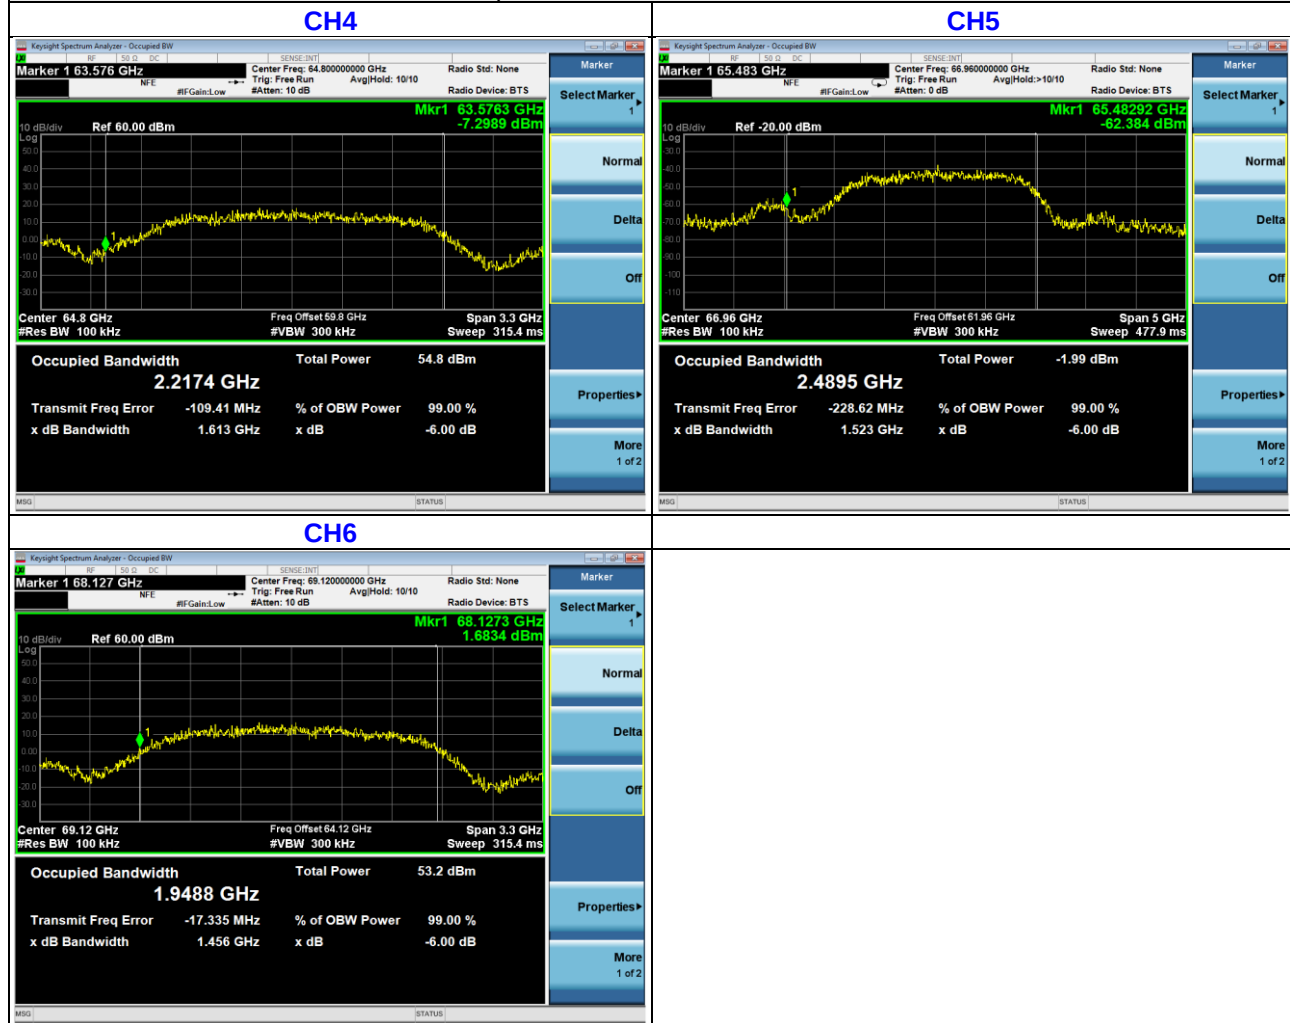


Bandwidth 1080MHz

Channel	Frequency (MHz)	6dB Bandwidth (MHz)
4	64800	742.2
5	66960	698.3
6	69120	729.4

Spectrum Plot of Worst Value


CH4

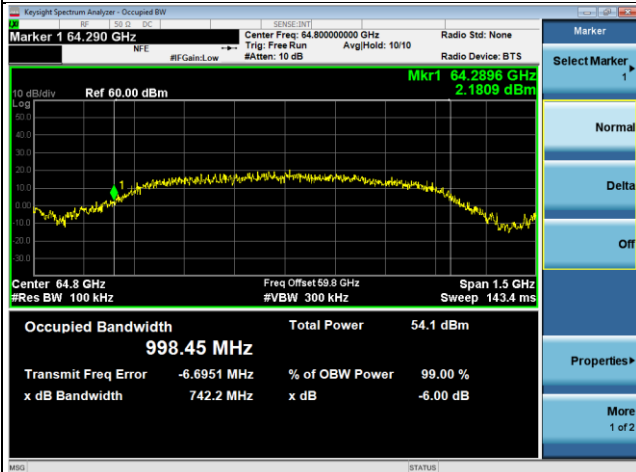

CH5



CH6

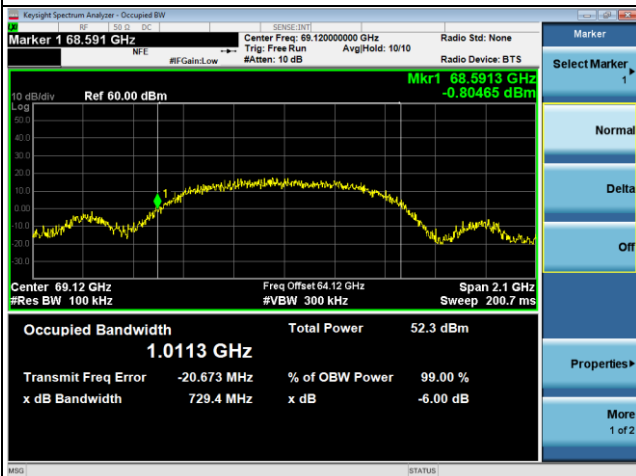

4.4 Output Power Measurement

4.4.1 Limits of Output Power Measurement

15.255 (c) & (e)

Output Power (EIRP)				
Applicable	Type		Peak Power	Average Power
	Within the 57-71 GHz band (Other than fixed field disturbance sensors and short-range devices)	Other than fixed point to point transmitters located outdoors	43dBm	40dBm
V		Fixed point-to-point transmitters located outdoors	85dBm (*Note 1)	82dBm (*Note 2)
	Fixed field disturbance sensors (61-61.5GHz)	Occupy 500 MHz or less of bandwidth	43dBm (*Note 3)	40dBm (*Note 3)
	Fixed field disturbance sensors	Other than occupy 500 MHz or less of bandwidth and that are contained wholly within the frequency band 61.0-61.5 GHz	10dBm	-
	short-range devices for interactive motion sensing	-		

Note:


1. The average power of any emission shall not exceed 82 dBm, and shall be reduced by 2 dB for every dB that the antenna gain is less than 51 dBi.
2. The peak power of any emission shall not exceed 85 dBm, and shall be reduced by 2 dB for every dB that the antenna gain is less than 51 dBi.
3. In addition, the average power of any emission outside of the 61.0-61.5 GHz band, measured during the transmit interval, but still within the 57-71 GHz band, shall not exceed 10 dBm, and the peak power of any emission shall not exceed 13 dBm.

Peak Output Power (Conducted Power)			
Applicable	Type	6dB Bandwidth	Maximum Conducted Power
	Fixed field disturbance sensors (Exclude 61-61.5GHz)	-	$\leq 0.1\text{mW}$
V	Other	Other	500mW
		Less than 100MHz	500mW x (B/100)

Note:

1. B is 6dB Bandwidth (measured with a 100kHz resolution bandwidth)
2. Peak transmitter output power shall be measured with an RF detector that has a detection bandwidth that encompasses the 57-71 GHz band and the has a video bandwidth of at least 10 MHz, or using an equivalent measurement method.
3. For purposes of demonstrating compliance with this paragraph (e), corrections to the transmitter output power may be made due to the antenna and circuit loss.

4.4.2 Test Setup

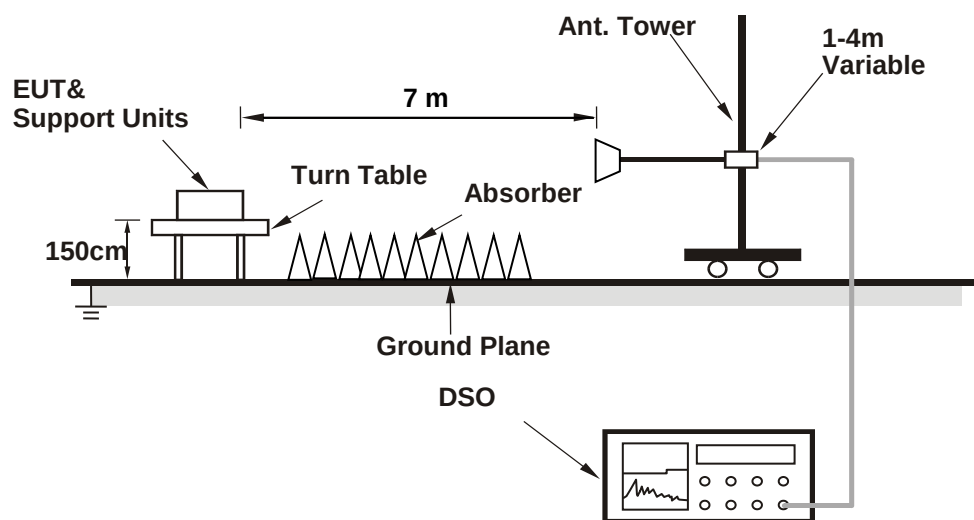

4.4.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.4.4 Test Procedures

- Place the EUT in a continuous transmission mode.
- For radiated emission measurements, attach a test receive antenna for the fundamental frequency band to the RF input of an RF detector or a downconverter with an RF detector at the output.
- Connect the video output of the detector to the 50 ohm input of the DSO.
- Place the test receive antenna in the main beam of the EUT at a distance which will provide a signal within the operating range of the RF detector.
- Set the sampling rate of the DSO to the required value. Adjust the memory depth, the triggering and the sweep speed to obtain a display which is representative of the signal considering the type of modulation.
- For radiated emission measurements, calculate the distance to the far field boundary of the fundamental emission using following equation

$$d_{farfield} = \frac{2D^2}{\lambda}$$

where:

D = largest dimension of the transmit antenna

λ = wavelength

Frequency (GHz)	L (m)	Lambda (m)	R (Far Field) (m)
64.8	0.01	0.00463	0.043
66.96	0.01	0.00448	0.045
69.12	0.01	0.00434	0.046

Note: Follow ANSI C63.10, when far-field measurements are not practical, and the test laboratory intends to use a distance attenuation factor other than 20 dB/decade of distance.

*Measurements made at 7 meter distance.

- Perform radiated emission measurements to keep maximize the received signal from the EUT in the far field.
- Record the average and peak from the DSO and the measurement distance.
- Disconnect the EUT from the RF input port of the instrumentation system.
- Connect a mm-wave source to the RF input port of the instrumentation system via a waveguide variable attenuator. The mm-wave source is unmodulated.
- Using substitution measurement.
- Measure and note the power.
- For conducted power measurements, calculate the conducted power using following equation

$$P_{cond} = EIRP - G_{dBi}$$

4.4.5 Deviation from Test Standard

No deviation.

4.4.6 EUT Operating Conditions

Same as Item 4.3.6.

4.4.7 Test Results

Bandwidth 2160MHz

For Peak Power

Channel	Frequency (GHz)	Transmitt Antenna	S.G Output Value (dBm)	EIRP (dBm)	EIRP Limit (dBm)	Pass /Fail
4	64.80	24	34.12	58.12	59	Pass
5	66.96	24	31.88	55.89	59	Pass
6	69.12	24	34.90	58.90	59	Pass

Channel	Frequency (GHz)	EIRP (dBm)	Max. Array Gain (dBi)	Conducted Output Power (dBm)	Conducted Output Power (mW)	Conducted Output Power limit (mW)	Pass /Fail
4	64.80	58.12	38.00	20.12	102.8	500	Pass
5	66.96	55.89	38.00	17.89	61.5	500	Pass
6	69.12	58.90	38.00	20.9	123.0	500	Pass

Note:

The EIRP was evaluated on vertical and horizontal polarization, the worst case is Vertical polarization.

For Average Power

Channel	Frequency (GHz)	Transmitt Antenna	S.G Output Value (dBm)	EIRP (dBm)	EIRP Limit (dBm)	Pass /Fail
4	64.80	24.00	23.36	47.36	56	Pass
5	66.96	24.00	23.39	47.39	56	Pass
6	69.12	24.00	24.12	48.12	56	Pass

Note:

The EIRP was evaluated on vertical and horizontal polarization, the worst case is Vertical polarization.

Bandwidth 1080MHz

For Peak Power

Channel	Frequency (GHz)	Transmitt Antenna	S.G Output Value (dBm)	EIRP (dBm)	EIRP Limit (dBm)	Pass /Fail
4	64.80	24	34.10	58.10	59	Pass
5	66.96	24	34.69	58.69	59	Pass
6	69.12	24	34.78	58.78	59	Pass

Channel	Frequency (GHz)	EIRP (dBm)	Max. Array Gain (dBi)	Conducted Output Power (dBm)	Conducted Output Power (mW)	Conducted Output Power limit (mW)	Pass /Fail
4	64.80	58.10	38.00	20.1	102.3	500	Pass
5	66.96	58.69	38.00	20.69	117.2	500	Pass
6	69.12	58.78	38.00	20.78	119.7	500	Pass

Note:

The EIRP was evaluated on vertical and horizontal polarization, the worst case is Vertical polarization.

For Average Power

Channel	Frequency (GHz)	Transmitt Antenna	S.G Output Value (dBm)	EIRP (dBm)	EIRP Limit (dBm)	Pass /Fail
4	64.80	24.00	26.88	50.88	56	Pass
5	66.96	24.00	27.12	51.12	56	Pass
6	69.12	24.00	27.25	51.25	56	Pass

Note:


The EIRP was evaluated on vertical and horizontal polarization, the worst case is Vertical polarization.

4.5 Frequency Stability Measurement

4.5.1 Limits of Conducted Out of Band Emission Measurement

15.255(f) Fundamental emissions must be contained within the frequency bands specified in this section during all conditions of operation. Equipment is presumed to operate over the temperature range -20 to +50 degrees Celsius with an input voltage variation of 85% to 115% of rated input voltage, unless justification is presented to demonstrate otherwise.

4.5.2 Test Setup

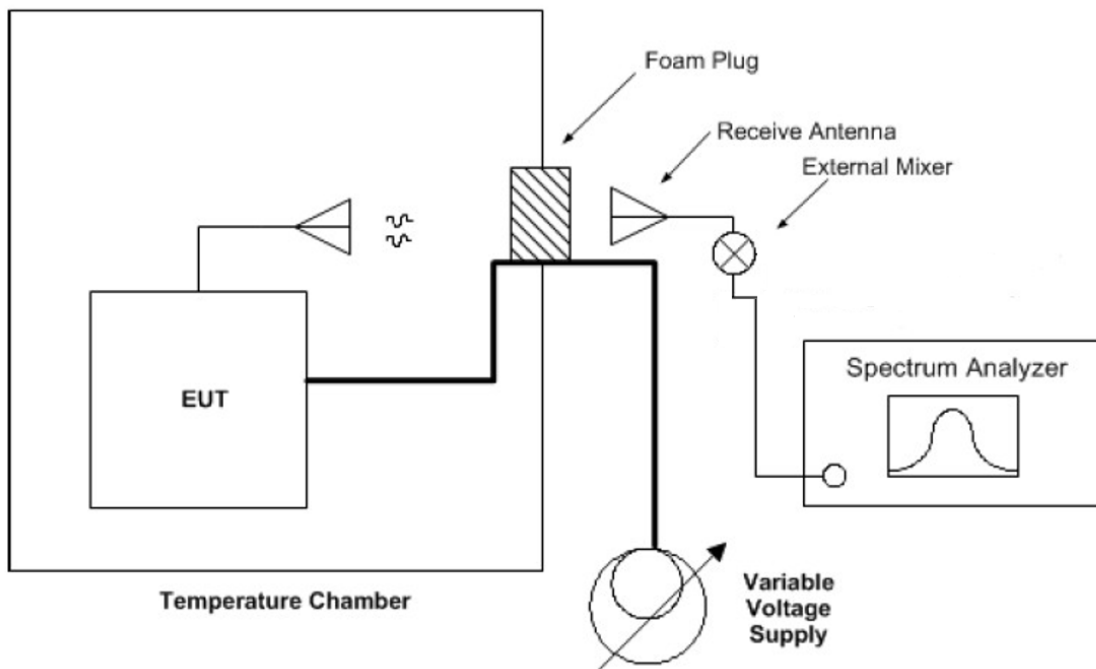

4.5.3 Test Instruments

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
N9029AV15-DC9 - 50-75 GHz VDI Standard Downconverter with 9VDC supply Keysight	SA Extension WR15	SAX 381	CoC	CoC
*Horn Antenna (50~75GHz) OML	M15HWD	110215-1	Oct. 17, 2019	Oct. 16, 2020
Spectrum Analyzer Keysight	N9030A	MY54490679	July 17, 2019	July 16, 2020
DC Power Supply Topward	6603D	795558	NA	NA
Temperature & Humidity Chamber Giant Force	GTH-150-40-SP-AR	MAA0812-008	Jan. 16, 2020	Jan. 15, 2021
True RMS Clamp Meter FLUKE	325	31130711WS	May 21, 2019	May 20, 2020

NOTE:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. *The calibration interval of the above test instruments is 36 months and the calibrations are traceable to NML/ROC and NIST/USA.
3. Certificate of Conformance (CoC) which is issued by manufacturer states that the product meets the specification.
4. The test was performed in Oven room 2.
5. Tested Date: May 12, 2020

4.5.4 Test Procedure

- a. Arrange EUT and test equipment as above setup configuration.
- b. With the EUT at ambient temperature and voltage source set to the EUT nominal operating voltage (100%), record the spectrum mask of the EUT emission on the spectrum analyzer.
- c. Vary EUT power supply between 85% and 115% of nominal, and record the frequency excursion of the EUT emission mask.
- d. Set the power supply to 100% nominal setting, and raise EUT operating temperature to 50 °C. Record the frequency excursion of the EUT emission mask.
- e. Repeat step d) at each 10 °C increment down to -20 °C

4.5.5 Deviation from Test Standard

No deviation.

4.5.6 EUT Operating Condition

Set the EUT transmit at modulation mode to test frequency stability.

4.5.7 Test Results

Frequency Stability Versus Temp.													
Operating Frequency: 69120 MHz													
TEMP. (°C)	Power Supply (Vdc)	0 minutes			2 minutes			5 minutes			10 minutes		
		FL(MHz)	FH(MHz)	PASS/ FAIL	FL(MHz)	FH(MHz)	PASS/ FAIL	FL(MHz)	FH(MHz)	PASS/ FAIL	FL(MHz)	FH(MHz)	PASS/ FAIL
50	12	68087.17	70075.12	PASS	68087.17	70075.12	PASS	68087.15	70075.12	PASS	68087.16	70075.13	PASS
40	12	68087.24	70074.78	PASS	68087.27	70074.80	PASS	68087.30	70074.81	PASS	68087.24	70074.78	PASS
30	12	68087.18	70074.63	PASS	68087.17	70074.68	PASS	68087.15	70074.64	PASS	68087.13	70074.64	PASS
20	12	68087.30	70074.95	PASS	68087.36	70074.93	PASS	68087.35	70074.90	PASS	68087.33	70074.95	PASS
10	12	68087.19	70074.93	PASS	68087.15	70074.92	PASS	68087.19	70074.89	PASS	68087.18	70074.88	PASS
0	12	68087.15	70075.32	PASS	68087.10	70075.35	PASS	68087.08	70075.36	PASS	68087.09	70075.35	PASS
-10	12	68087.07	70075.26	PASS	68087.08	70075.30	PASS	68087.07	70075.26	PASS	68087.09	70075.28	PASS
-20	12	68087.07	70074.94	PASS	68087.08	70075.00	PASS	68087.08	70074.96	PASS	68087.07	70075.00	PASS

Frequency Stability Versus Voltage													
Operating Frequency: 69120 MHz													
TEMP. (°C)	Power Supply (Vdc)	0 minutes			2 minutes			5 minutes			10 minutes		
		FL(MHz)	FH(MHz)	PASS/ FAIL	FL(MHz)	FH(MHz)	PASS/ FAIL	FL(MHz)	FH(MHz)	PASS/ FAIL	FL(MHz)	FH(MHz)	PASS/ FAIL
20	13.8	68087.31	70074.94	PASS	68087.37	70074.92	PASS	68087.34	70074.90	PASS	68087.32	70074.96	PASS
	12	68087.30	70074.95	PASS	68087.36	70074.93	PASS	68087.35	70074.90	PASS	68087.33	70074.95	PASS
	10.2	68087.31	70074.94	PASS	68087.35	70074.94	PASS	68087.34	70074.92	PASS	68087.32	70074.96	PASS

5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

Appendix – Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.

--- END ---