


产品技术规格书 Product technical specification


产品信息 product information:			
产品 product:	镀银铜多股线 Silver-plated copper stranded wire		
日期 date:	Oct2021	版本 version:	I
产品描述 Product description:	<p>1、镀银铜多股线是由多股独立绝缘的微细漆包线绞合而成，每股微细漆包线线芯为镀银纯铜线芯。Silver-plated copper multi-strand wire is formed by twisting a plurality of independently insulated micro-enameled wires, and each micro-enameled wire core is silver-plated pure copper wire core.</p> <p>2、镀银纯铜线芯有利于低频，高频信号传输，广泛应用于助听器耳背机，耳内机以及耳机内部组装。Silver pure copper wire core is beneficial to low-frequency and high-frequency signal transmission, and is widely used in hearing aid behind-the-ear machine, in-ear machine and earphone internal assembly</p>		

技术规格 echnical specification:	
线芯 core:	镀银铜 silver-plated copper
绝缘层 insulating barrier:	尼龙聚氨脂，2级 Nylon polyurethane, grade 2
单股直径 Single strand diameter:	0.05mm
股数 number of strands:	7股 7 shares
颜色可选 Color optional:	红/黄/绿 Red/yellow/green
电阻 electric resistance:	$<1.5\Omega/\text{m}$ at 20°C
击穿电压 breakdown voltage	$>550\text{V}$
浸锡锡 Tin dipping:	SAC305, 含银量3%, 无铅 Silver content 3%, lead-free.


应用 application:	
使用事项 Use matters:	<p>1、不要挤压及过多弯折导线 don't squeeze and bend the wire too much.</p> <p>2、建议使用无铅305焊锡进行焊接 It is recommended to use lead-free 305 solder for welding.</p> <p>3、储存在凉爽干燥的环境中 Store in a cool and dry environment.</p>
符合 accord with:	ROHS, REACH

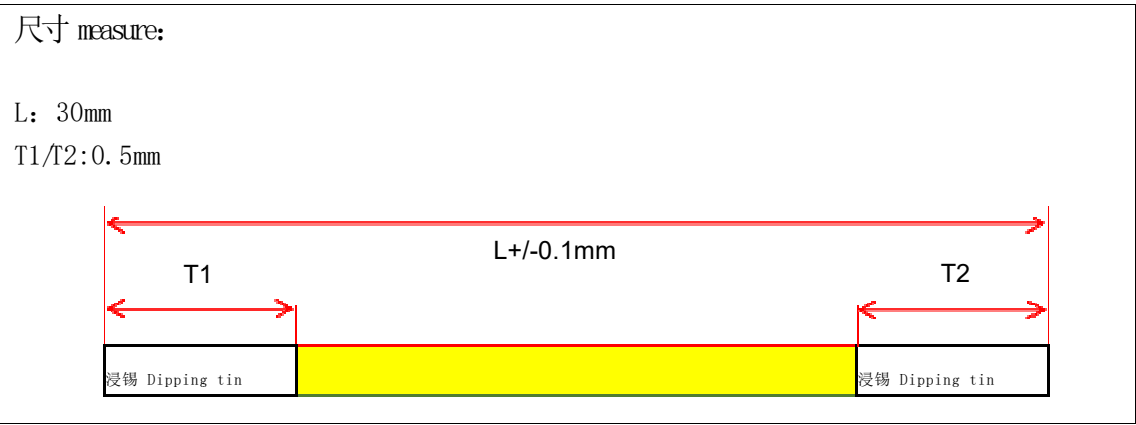


Frequency Range	2400-2480MHz
Antenna Gain	-0.5dBi
Manufacturer	Hangzhou AcoSound Technology Co.,Ltd. Room 401,No.2 Building,No.1390 Cangxing Street,Yuhang, Hangzhou,Zhejiang,China

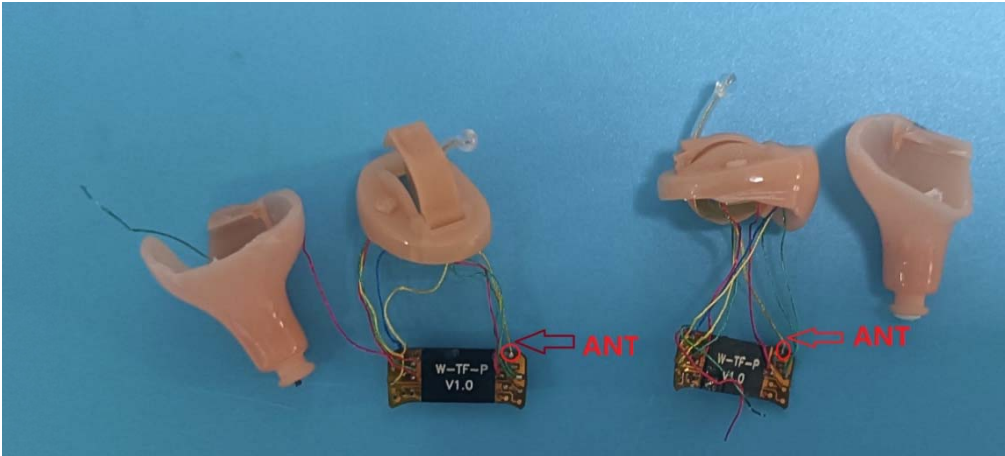

2400MHz

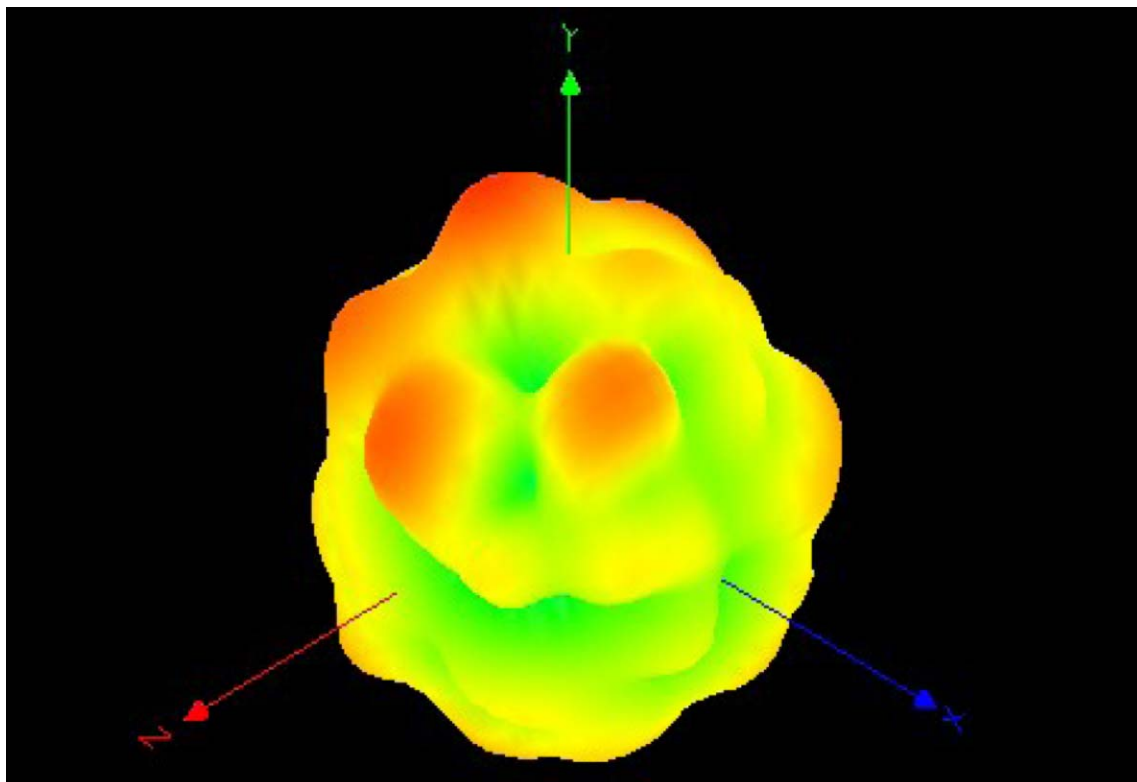

2440MHz

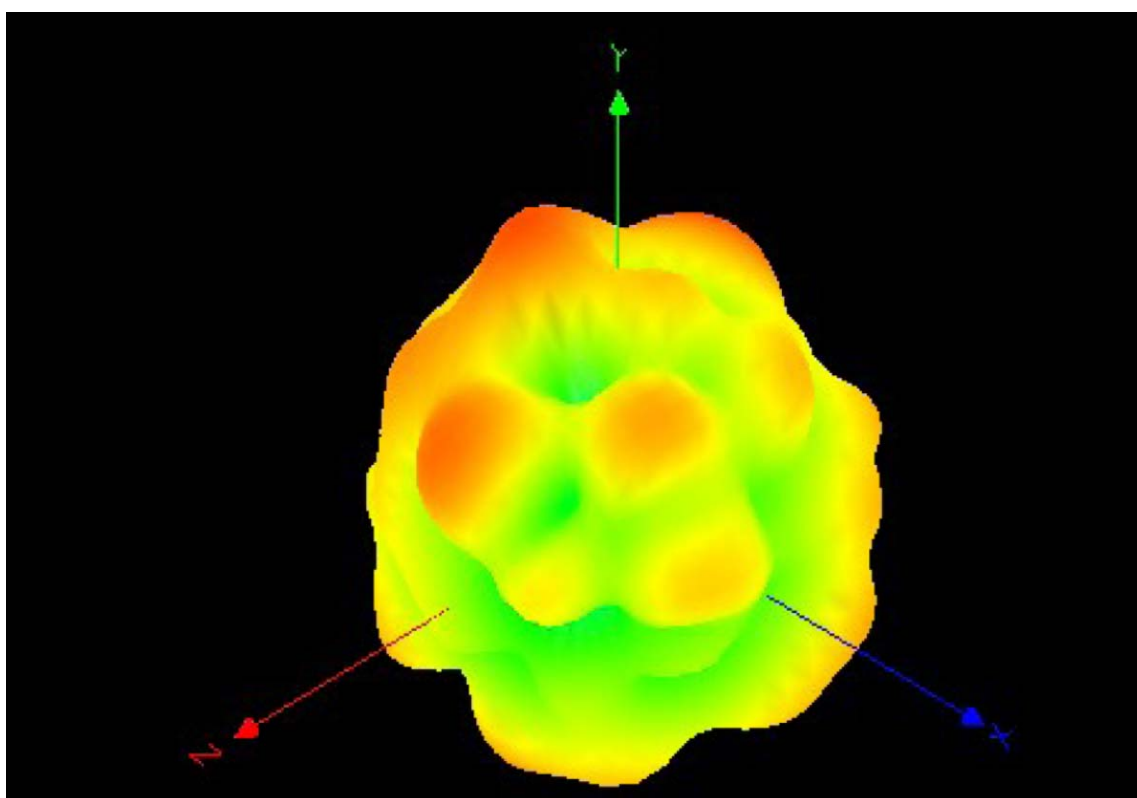

2480MHz

