

FCC PART 15C TEST REPORT FOR CERTIFICATION
On Behalf of

KYE Systems Corp

Bluetooth Speaker

Model Number: SP-920BT

FCC ID: FSUGG000W

Prepared for : KYE Systems Corp
No. 492, Chongxin Rd., Sanchong Dist., New Taipei City 24160,
Taiwan (R.O.C.)

Prepared By : EST Technology Co., Ltd.
Santun(guantai Road), Houjie Town, DongGuan City,
GuangDong, China.


Tel: 86-769-83081888-808

Report Number: ESTE-R1510007
Date of Test : September 28,2015~ October 11, 2015
Date of Report : October 12, 2015

TABLE OF CONTENTS

Description	Page
TEST REPORT VERIFICATION.....	3
1. GENERAL INFORMATION	4
1.1. Description of Device (EUT)	4
2. SUMMARY OF TEST	5
2.1. Summary of test result.....	5
2.2. Test Facilities	6
2.3. Assistant equipment used for test	7
2.4. Block Diagram	7
2.5. Test mode	8
2.6. Channel List for Bluetooth.....	8
2.7. Test Equipment.....	9
3. RADIATED EMISSIONS.....	10
3.1. Limit	10
3.2. Block Diagram of Test setup.....	11
3.3. Test Procedure	11
3.4. Test Result.....	12
3.5. Test Data	13
4. BAND EDGE COMPLIANCE	49
4.1. Limit	49
4.2. Block Diagram of Test setup.....	49
4.3. Test Procedure	49
4.4. Test Result.....	49
4.5. Test Data	50
5. POWER LINE CONDUCTED EMISSIONS	66
5.1. Limit	66
5.2. Test Procedure.....	66
6. TEST SETUP PHOTO.....	71
7. PHOTOS OF EUT	73

Test Report Verification

Applicant:	KYE Systems Corp		
Address:	No. 492, Chongxin Rd., Sanchong Dist., New Taipei City 24160, Taiwan (R.O.C.)		
Manufacturer Address:	Cirque Audio Technology Co., Ltd No2, Road Beiyiheng, Huangjiabao Industrial Park, Shipai Town, Dongguan City, Guangdong Province, China		
E.U.T:	Bluetooth Speaker		
Model Number:	SP-920BT		
Power Supply:	DC 3.7V From Internal Battery DC 5V From USB for Charging		
Test Voltage:	DC 3.7V		
Trade Name:	Genius	Serial No.:	-----
Date of Receipt:	September 28, 2015	Date of Test:	September 28~ October 11, 2015
Test Specification:	FCC Rules and Regulations Part 15 Subpart C:2014 ANSI C63.10:2013		
Test Result:	The device described above is tested by EST Technology Co., Ltd.. The measurement results were contained in this test report and EST Technology Co., Ltd. was assumed full responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT to be technically compliance with the FCC Rules and Regulations Part 15 Subpart C requirements. This report applies to above tested sample only and shall not be reproduced in part without written approval of EST Technology Co., Ltd. Date: October 12, 2015		
Prepared by:	Tested by:	Approved by:	
 _____ Ada / Assistant	 _____ Tony.Tang/ Engineer	 _____ IcemanHu / Manager	
Other Aspects:	None.		
Abbreviations: OK/P=passed fail/F=failed n.a/N=not applicable E.U.T=equipment under tested			
<i>This test report is based on a single evaluation of one sample of above mentioned products ,It is not permitted to be duplicated in extracts without written approval of EST Technology Co., Ltd.</i>			

1. GENERAL INFORMATION

1.1. Description of Device (EUT)

Product Name	:	Bluetooth Speaker	
Model Number	:	SP-920BT	
FCC ID	:	FSUGG000W	
Operation frequency	:	2402MHz~2480MHz	
Number of channel	:	79	40
Antenna	:	Internal antenna, 0 dBi gain	
Modulation	:	FHSS (GFSK, $\pi/4$ -DQPSK, 8-DPSK)	BLE (GFSK)
	:		
Sample Type	:	Prototype production	

2. SUMMARY OF TEST

2.1. Summary of test result

Description of Test Item	Standard	Results
Maximum Peak Output Power	FCC Part 15: 15.247(b)(1) DA 00-705	N/A
20dB Bandwidth	FCC Part 15: 15.215 DA 00-705	N/A
Carrier Frequency Separation	FCC Part 15: 15.247(a)(1) DA 00-705	N/A
Number Of Hopping Channel	FCC Part 15: 15.247(a)(1)(iii) DA 00-705	N/A
Dwell Time	FCC Part 15: 15.247(a)(1)(iii) DA 00-705	N/A
Radiated Emission	FCC Part 15: 15.209 FCC Part 15: 15.247(d) ANSI C63.10:2013 DA 00-705	PASS
Band Edge Compliance	FCC Part 15: 15.247(d) DA 00-705	PASS
Power Line Conducted Emissions	FCC Part 15: 15.207 ANSI C63.10:201 DA 00-705	PASS
Antenna requirement	FCC Part 15: 15.203	N/A
Note: Because the transmitter module it self has not changed. So relevant test needn't re-tested, Test data refer to test report "ESTE-R1508001".		

2.2. Test Facilities

EMC Lab	:	Certificated by CNAL, CHINA Registration No.: L5288 Date of registration: Nov 23, 2014 Certificated by FCC, USA Registration No.: 989591 Date of registration: November 20, 2013 Certificated by Industry Canada Registration No.: 9405A-1 Date of registration: January 03, 2013 Certificated by VCCI, Japan Registration No.: R-3663 & C-4103 Date of registration: July 25, 2011 Certificated by TUV Rheinland, Germany Registration No.: UA 50195514 0001 Date of registration: January 07, 2011 Certificated by TUV/PS, Shenzhen Registration No.: SCN1017 Date of registration: January 27, 2011 Certificated by Intertek ETL SEMKO Registration No.: 2011-RTL-L1-18 Date of registration: April 28, 2011 Certificated by Siemic, Inc. Registration No.: SLCN021 Date of registration: November 8, 2011 Certificated by Nemko, Hong Kong Registration No.: 175193 Date of registration: May 4, 2011
Name of Firm	:	EST Technology Co., Ltd.
Site Location	:	San Tun Management Zone, Houjie Town, Dongguan, Guangdong, China

2.3. Assistant equipment used for test

2.3.1. PC

Manufacturer	:	DELL
M/N	:	Laititude E6420
Adapter	:	M/N: DA90PM111
		Input: AC 100-240V~50/60Hz 1.5A
		Output: DC 19.5V/4.62A

2.4. Block Diagram

For radiated emissions test: EUT was placed on a turn table, which is 0.1 meter high above ground. EUT was be set into BT test mode by software before test.

EUT

(EUT: Bluetooth Speaker)

2.5. Test mode

The test software was used to control EUT work in Continuous TX mode, and select test channel, wireless mode

Mode	Channel	Frequency
GFSK	Low	2402MHz
	Middle	2441MHz
	High	2480MHz
8-DPSK	Low	2402MHz
	Middle	2441MHz
	High	2480MHz

2.6. Channel List for Bluetooth

Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
1	2402	2	2403	3	2404	4	2405
5	2406	6	2407	7	2408	8	2409
9	2410	10	2411	11	2412	12	2413
13	2414	14	2415	15	2416	16	2417
17	2418	18	2419	19	2420	20	2421
21	2422	22	2423	23	2424	24	2425
25	2426	26	2427	27	2428	28	2429
29	2430	30	2431	31	2432	32	2433
33	2434	34	2435	35	2436	36	2437
37	2438	38	2439	39	2440	40	2441
41	2442	42	2443	43	2444	44	2445
45	2446	46	2447	47	2448	48	2449
49	2450	50	2451	51	2452	52	2453
53	2454	54	2455	55	2456	56	2457
57	2458	58	2459	59	2460	60	2461
61	2462	62	2463	63	2464	64	2465
65	2466	66	2467	67	2468	68	2469
69	2470	70	2471	71	2472	72	2473
73	2474	74	2475	75	2476	76	2477
77	2478	78	2479	79	2480	-	-

2.7. Test Equipment

2.7.1. For conducted emission test

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
EMI Test Receiver	Rohde & Schwarz	ESHS30	832354	June,28,15	1 Year
Artificial Mains Networ	Rohde & Schwarz	ENV216	101260	June,28,15	1 Year
Pulse Limiter	Rohde & Schwarz	ESSP-920BT-Z2	101100	June,28,15	1 Year

2.7.2. For radiated emission test(30-1000MHz)

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
EMI Test Receiver	Rohde & Schwarz	ESVS10	100004	June,28,15	1 Year
Spectrum Analyzer	Agilent	E4411B	MY50140697	June,28,15	1 Year
Bilog Antenna	Teseq	CBL 6111D	27090	June,28,15	1 Year
Signal Amplifier	Agilent	310N	187037	June,28,15	1 Year

2.7.3. For radiated emission test(above 1GHz)

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
Horn Antenna	SCHWARZB ECK	BBHA 9120 D	BBHA9120D1002	June,28,15	1 Year
Signal Amplifier	SCHWARZB ECK	BBV9718	9718-212	June,28,15	1 Year
Spectrum Analyzer	Agilent	E4408B	MY44211139	June,28,15	1 Year
RF Cable	Hubersuhner	RG 214/U	513423	June,28,15	1 Year

3. RADIATED EMISSIONS

3.1. Limit

All the emissions appearing within 15.205 restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions shall be at least 20dB below the fundamental emissions, or comply with 15.209 limits.


15.205 Restricted frequency band

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)


15.209 Limit

FREQUENCY MHz	DISTANCE Meters	FIELD STRENGTHS LIMIT	
		μV/m	dB(μV)/m
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0
Above 1000	3	74.0 dB(μV)/m (Peak) 54.0 dB(μV)/m (Average)	

3.2. Block Diagram of Test setup

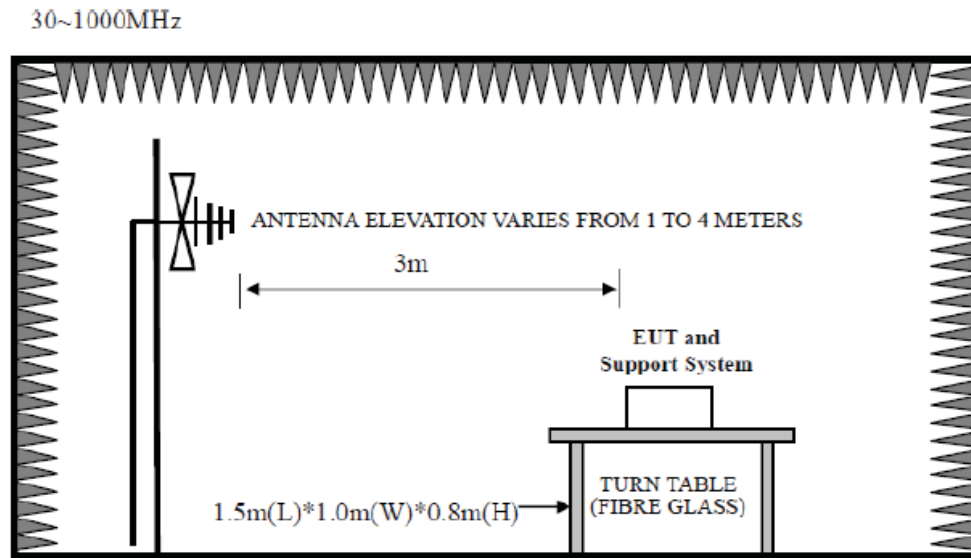

Above 1GHz

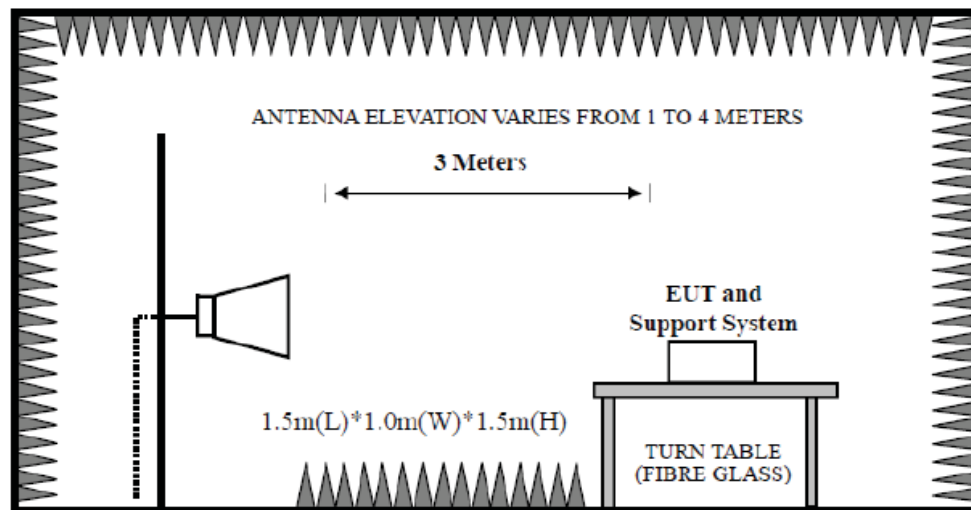

3.3. Test Procedure

EUT was placed on a turn table, which is 10 cm high above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. Power on the EUT and let it working in test mode, then test it. EUT is set 3 meters away from the receiving antenna, which is mounted on a antenna tower. The antenna can be moved up and down between 1 meter and 4 meters to find out the maximum emission level. Both horizontal and vertical polarization of the antenna are set on test.

The bandwidth of the EMI test receiver (R&S ESVS10) is set at 120kHz for frequency range from 30MHz to 1000 MHz.

The bandwidth of the Spectrum's VBW is set at 1MHz and RBW is set at 1MHz for peak emissions measurement above 1GHz and 1MHz RBW, 10Hz VBW for average emissions measure above 1GHz

PEAK detector, 1MHz/1MHz for PAEK measurement,

PEAK detector, 1MHz/10Hz for Average measurement

The frequency range from 30MHz to 10th harmonic (25GHz) are checked.

3.4. Test Result


30MHz—25GHz Radiated emissison Test result
EUT: Bluetooth Speaker
M/N: SP-920BT
Power: DC 3.7V
Test date: 2015-10-08~2015-10-10 Test site: 3m Chamber Tested by: Tony Tang
Test mode: Tx Mode
Pass

Note: 1、 For emissions above 1GHz, if peak level comply with average limit, then the average level is deemed to comply with average limit.

- 2、 The frequency 2402MHz 、 2441MHz and 2480MHz is fundamental frequency which no limit, the limit on plots is automatically generated by the software, it's not fundamental limit, we can't remove it.


3.5. Test Data

30 MHz – 1000 MHz

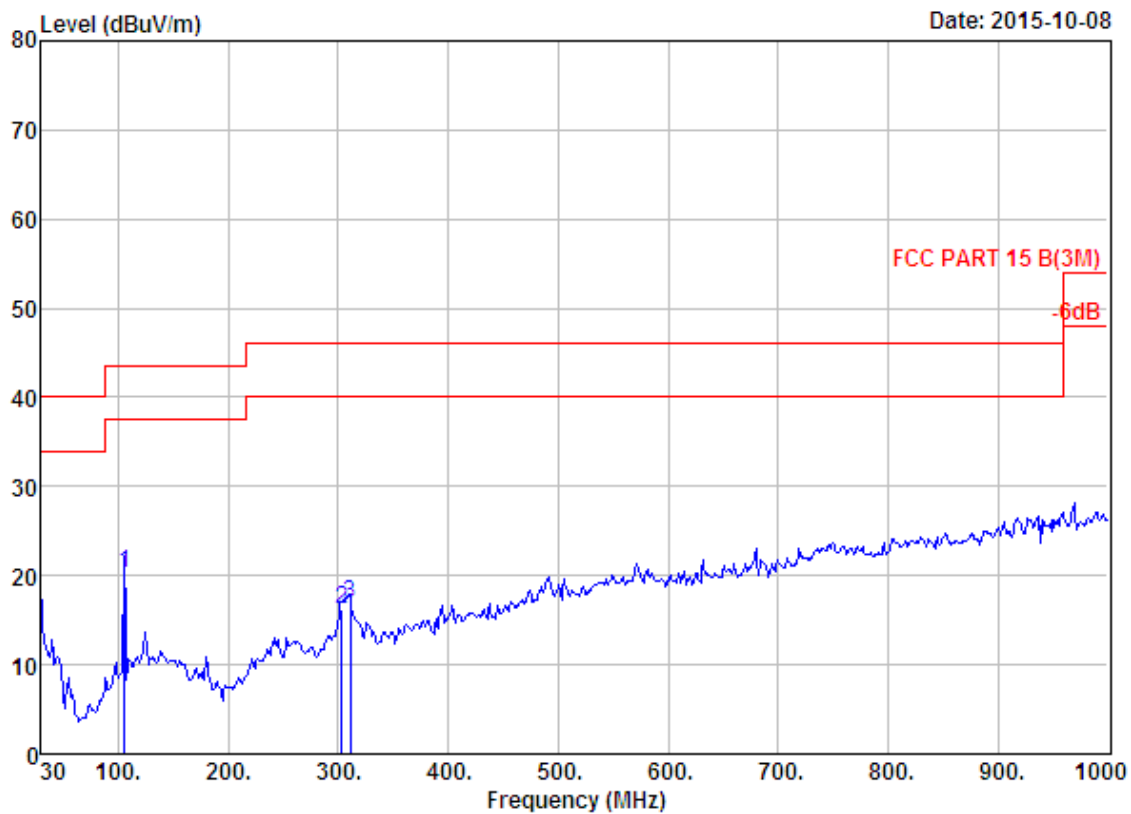


Site no.	: 966 1# chamber	Data no.	: 227
Dis. / Ant.	: 3m 27137	Ant. pol.	: VERTICAL
Limit	: FCC PART 15 B(3M)		
Env. / Ins.	: Temp:23.6';Humi:56%;Press:101.52kPa		
Engineer	: Tony		
EUT	: Bluetooth Speaker		
Power	: DC 3.7V		
M/N	: SP-920BT		
Test Mode	: GFSK TX 2402MHz		

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	105.66	10.05	1.41	8.72	20.18	43.50	23.32	QP
2	303.54	13.08	2.43	0.66	16.17	46.00	29.83	QP
3	311.30	13.24	2.33	1.35	16.92	46.00	29.08	QP

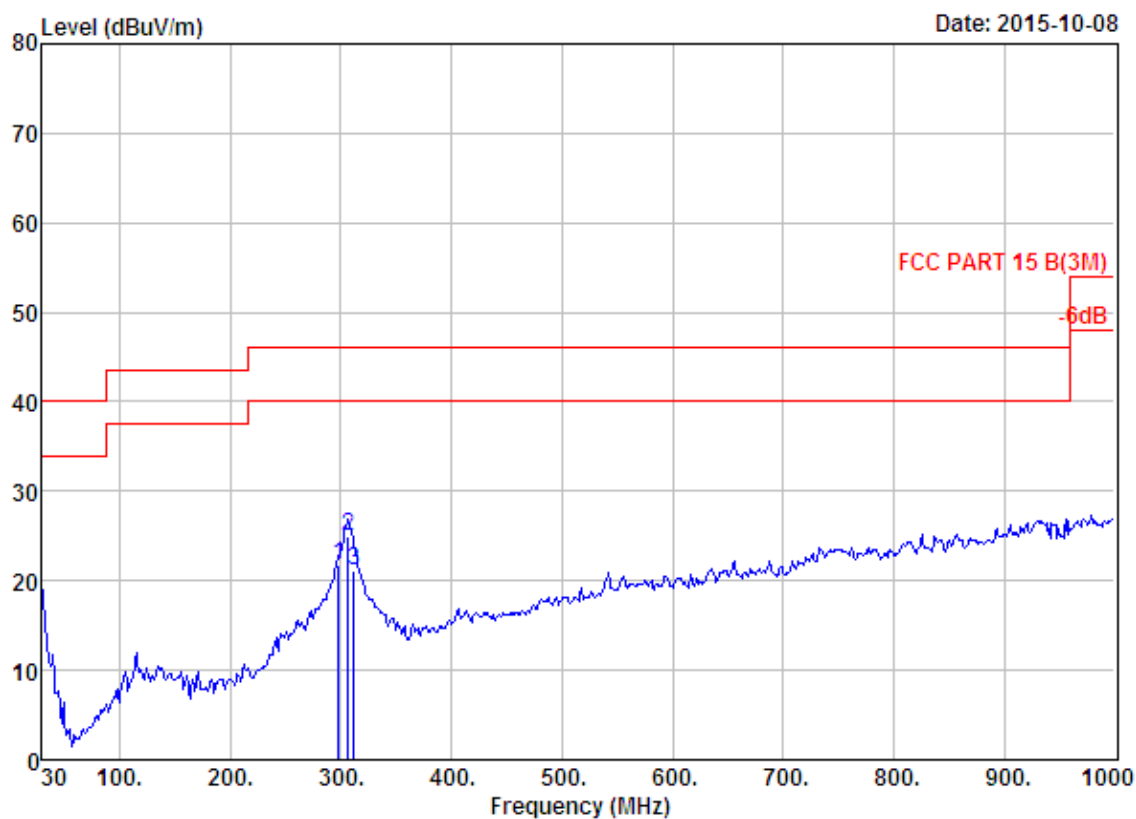

Site no. : 966 1# chamber Data no. : 228
 Dis. / Ant. : 3m 27137 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15 B(3M)
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Bluetooth Speaker
 Power : DC 3.7V
 M/N : SP-920BT
 Test Mode : GFSK TX 2402MHz


	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	297.72	12.99	2.36	6.48	21.83	46.00	24.17	QP
2	306.45	13.13	2.35	9.45	24.93	46.00	21.07	QP
3	312.27	13.27	2.39	5.52	21.18	46.00	24.82	QP

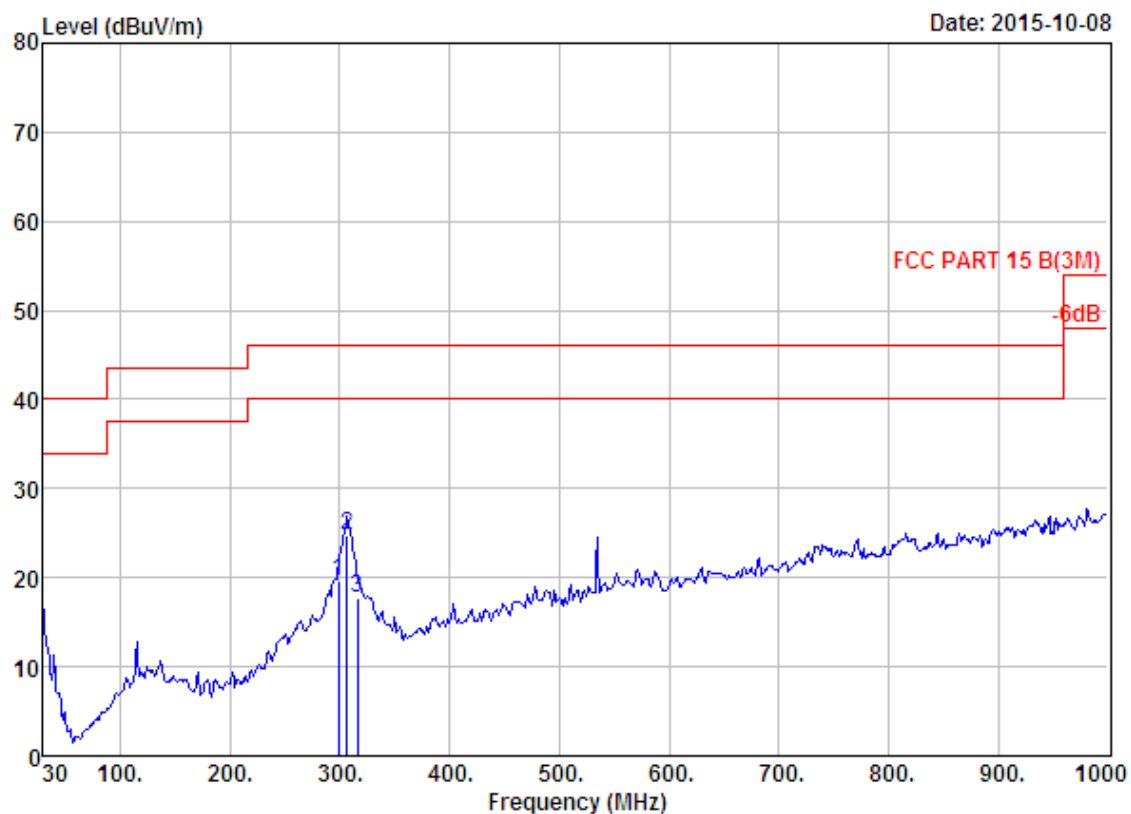

Site no. : 966 1# chamber
 Dis. / Ant. : 3m 27137
 Limit : FCC PART 15 B(3M)
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Bluetooth Speaker
 Power : DC 3.7V
 M/N : SP-920BT
 Test Mode : GFSK TX 2441MHz


Data no. : 229
Ant. pol. : HORIZONTAL

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	298.69	13.00	2.40	4.27	19.67	46.00	26.33	QP
2	306.45	13.13	2.35	9.29	24.77	46.00	21.23	QP
3	316.15	13.42	2.41	1.89	17.72	46.00	28.28	QP

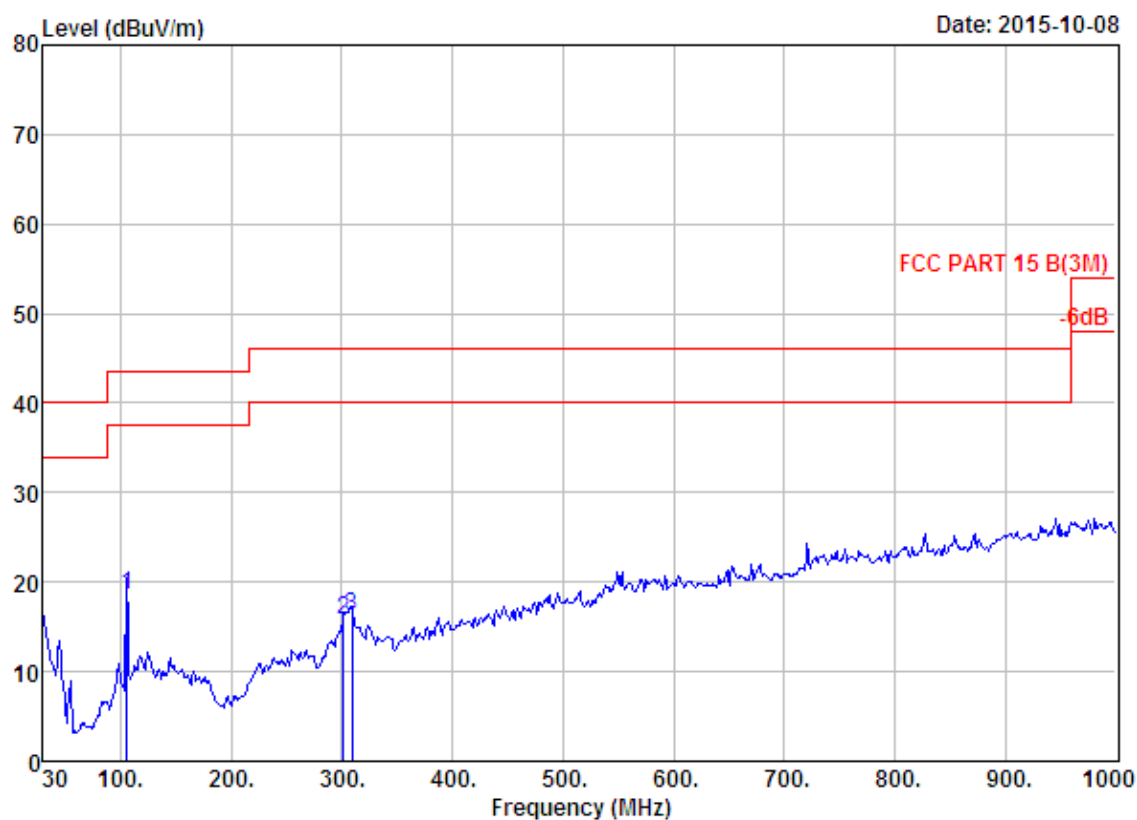


Site no. : 966 1# chamber Data no. : 230
 Dis. / Ant. : 3m 27137 Ant. pol. : VERTICAL
 Limit : FCC PART 15 B(3M)
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Bluetooth Speaker
 Power : DC 3.7V
 M/N : SP-920BT
 Test Mode : GFSK TX 2441MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	105.66	10.05	1.41	7.07	18.53	43.50	24.97	QP
2	301.60	13.04	2.39	0.30	15.73	46.00	30.27	QP
3	309.36	13.18	2.36	0.75	16.29	46.00	29.71	QP

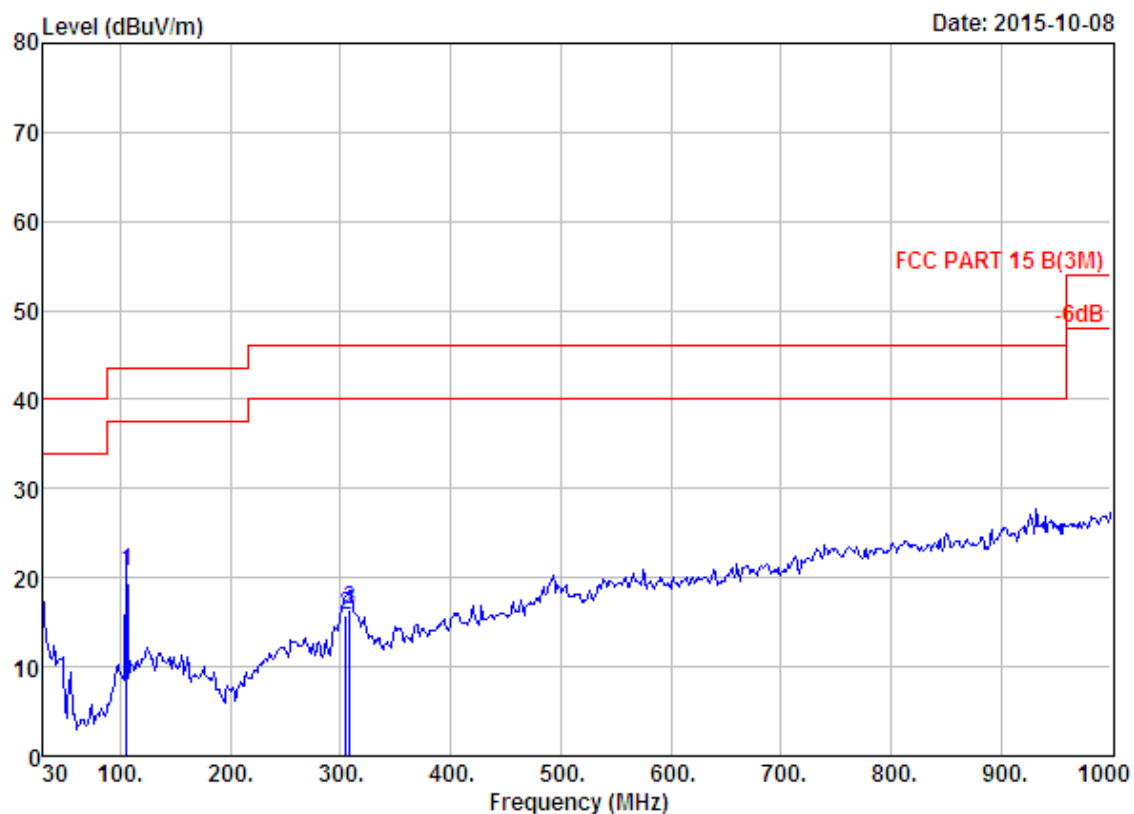


Site no. : 966 1# chamber Data no. : 231
 Dis. / Ant. : 3m 27137 Ant. pol. : VERTICAL
 Limit : FCC PART 15 B(3M)
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Bluetooth Speaker
 Power : DC 3.7V
 M/N : SP-920BT
 Test Mode : GFSK TX 2480MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	105.66	10.05	1.41	9.32	20.78	43.50	22.72	QP
2	304.51	13.10	2.37	0.37	15.84	46.00	30.16	QP
3	308.39	13.17	2.44	0.86	16.47	46.00	29.53	QP

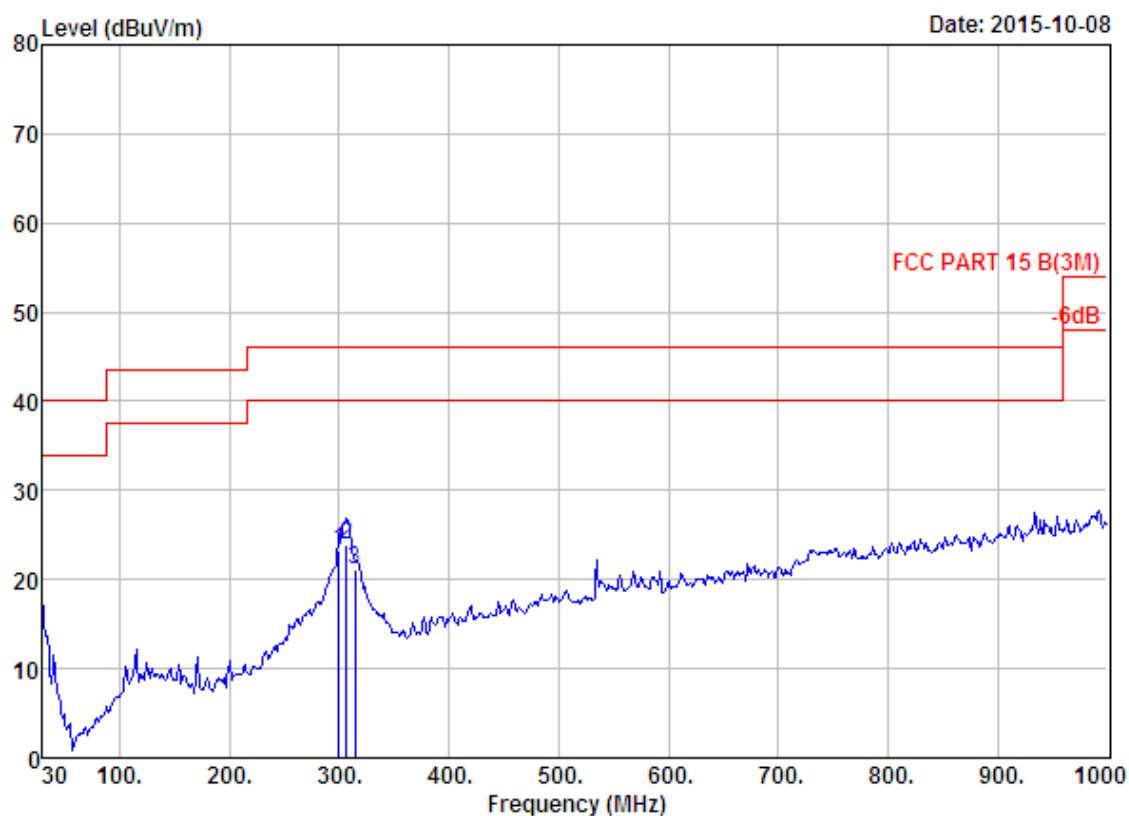

Site no. : 966 1# chamber Data no. : 232
 Dis. / Ant. : 3m 27137 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15 B(3M)
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Bluetooth Speaker
 Power : DC 3.7V
 M/N : SP-920BT
 Test Mode : GFSK TX 2480MHz


	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	299.66	13.01	2.38	7.82	23.21	46.00	22.79	QP
2	306.45	13.13	2.35	8.44	23.92	46.00	22.08	QP
3	314.21	13.35	2.43	5.43	21.21	46.00	24.79	QP

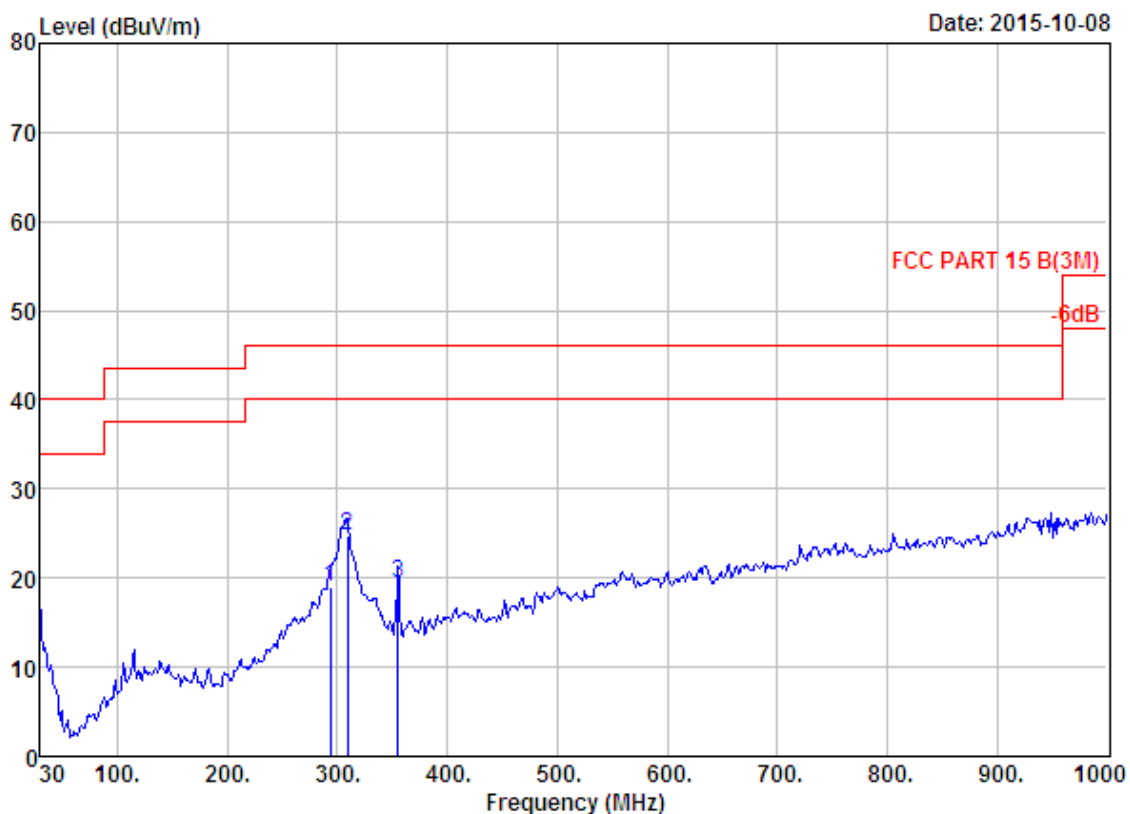

Site no. : 966 1# chamber
 Dis. / Ant. : 3m 27137
 Limit : FCC PART 15 B(3M)
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Bluetooth Speaker
 Power : DC 3.7V
 M/N : SP-920BT
 Test Mode : 8-DPSK TX 2402MHz


Data no. : 233
Ant. pol. : HORIZONTAL

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	293.84	12.92	2.33	3.82	19.07	46.00	26.93	QP
2	309.36	13.18	2.36	9.19	24.73	46.00	21.27	QP
3	354.95	14.46	2.57	2.37	19.40	46.00	26.60	QP

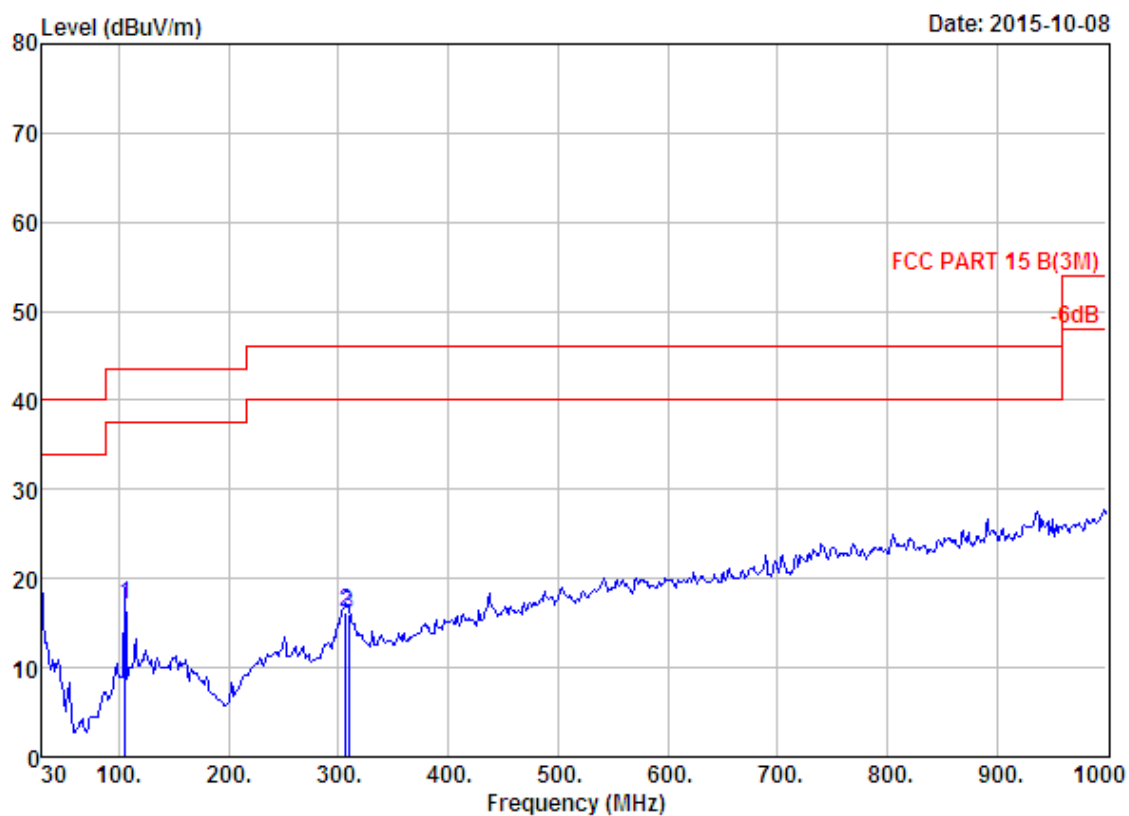

Site no.	: 966 1# chamber	Data no.	: 234
Dis. / Ant.	: 3m 27137	Ant. pol.	: VERTICAL
Limit	: FCC PART 15 B(3M)		
Env. / Ins.	: Temp:23.6';Humi:56%;Press:101.52kPa		
Engineer	: Tony		
EUT	: Bluetooth Speaker		
Power	: DC 3.7V		
M/N	: SP-920BT		
Test Mode	: 8-DPSK TX 2402MHz		


	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	105.66	10.05	1.41	5.52	16.98	43.50	26.52	QP
2	306.45	13.13	2.35	0.72	16.20	46.00	29.80	QP
3	309.36	13.18	2.36	0.45	15.99	46.00	30.01	QP

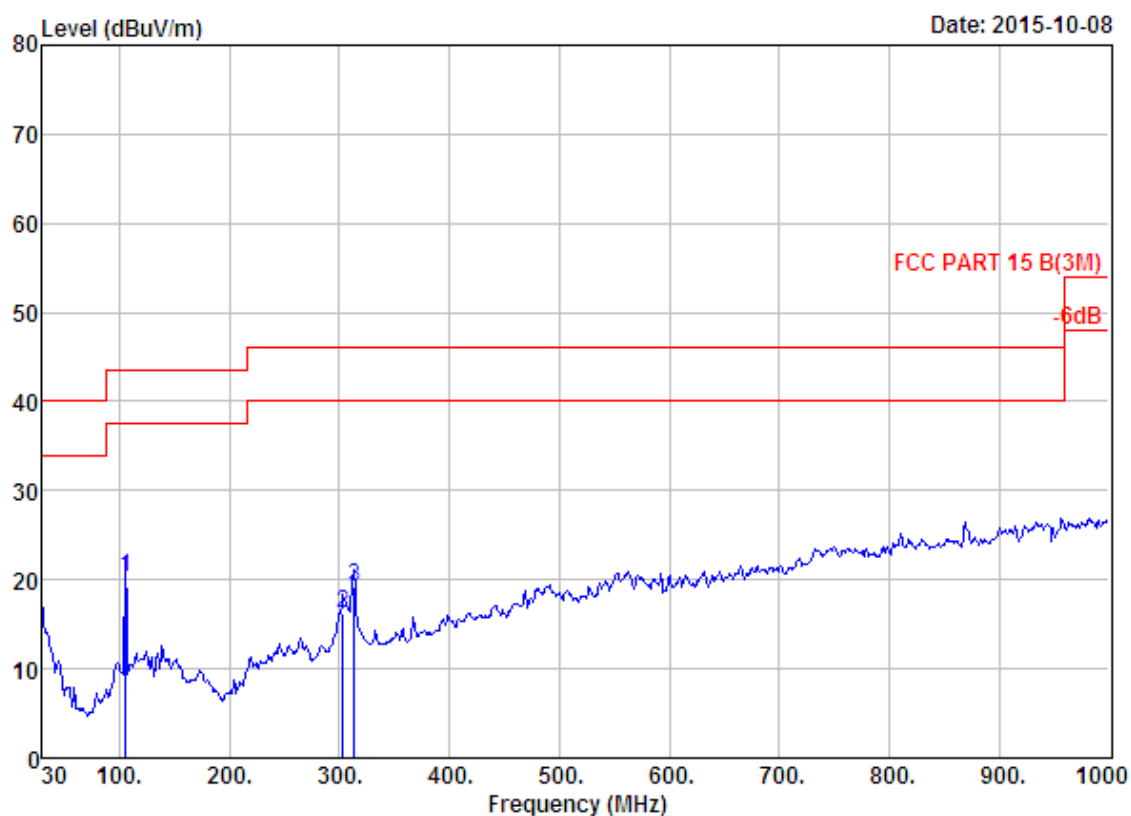

Site no. : 966 1# chamber
 Dis. / Ant. : 3m 27137
 Limit : FCC PART 15 B(3M)
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Bluetooth Speaker
 Power : DC 3.7V
 M/N : SP-920BT
 Test Mode : 8-DPSK TX 2441MHz


Data no. : 235
Ant. pol. : VERTICAL

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	105.66	10.05	1.41	8.86	20.32	43.50	23.18	QP
2	303.54	13.08	2.43	0.74	16.25	46.00	29.75	QP
3	313.24	13.31	2.44	3.46	19.21	46.00	26.79	QP

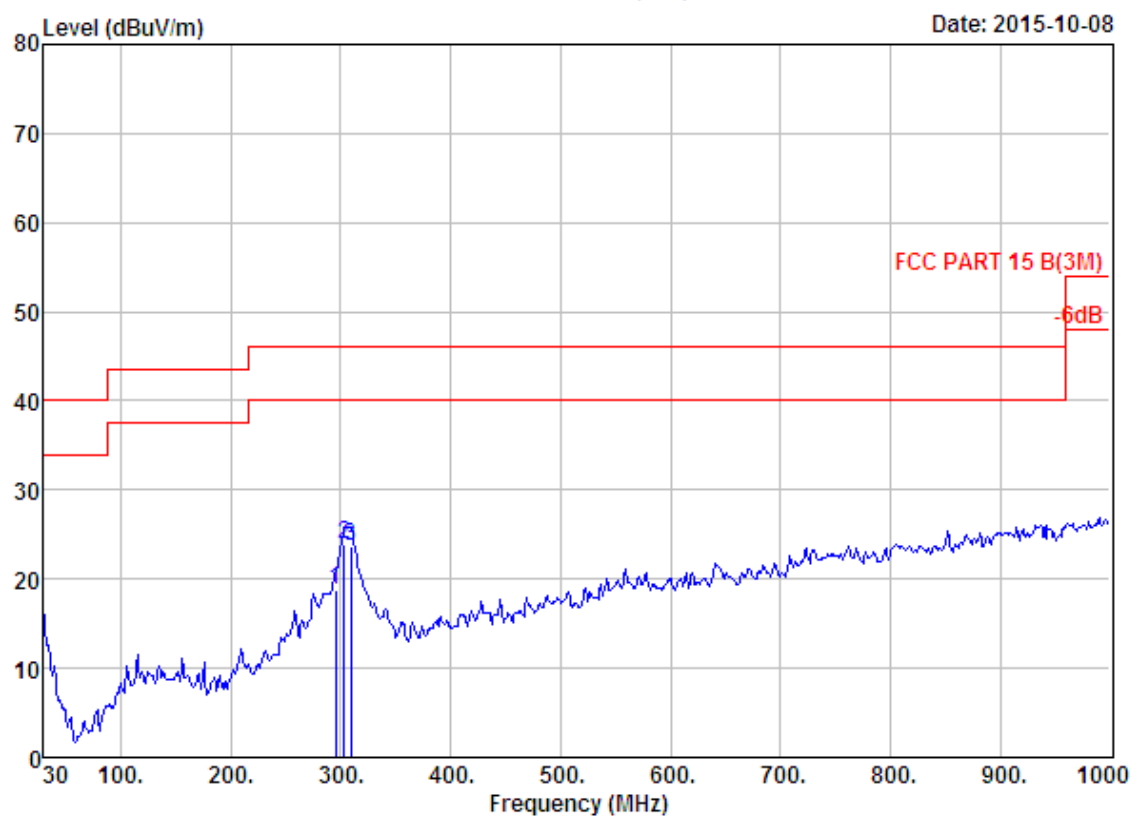


Site no. : 966 1# chamber Data no. : 236
 Dis. / Ant. : 3m 27137 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15 B(3M)
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Bluetooth Speaker
 Power : DC 3.7V
 M/N : SP-920BT
 Test Mode : 8-DPSK TX 2441MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	295.78	12.98	2.28	3.61	18.87	46.00	27.13	QP
2	303.54	13.08	2.43	8.40	23.91	46.00	22.09	QP
3	309.36	13.18	2.36	8.18	23.72	46.00	22.28	QP

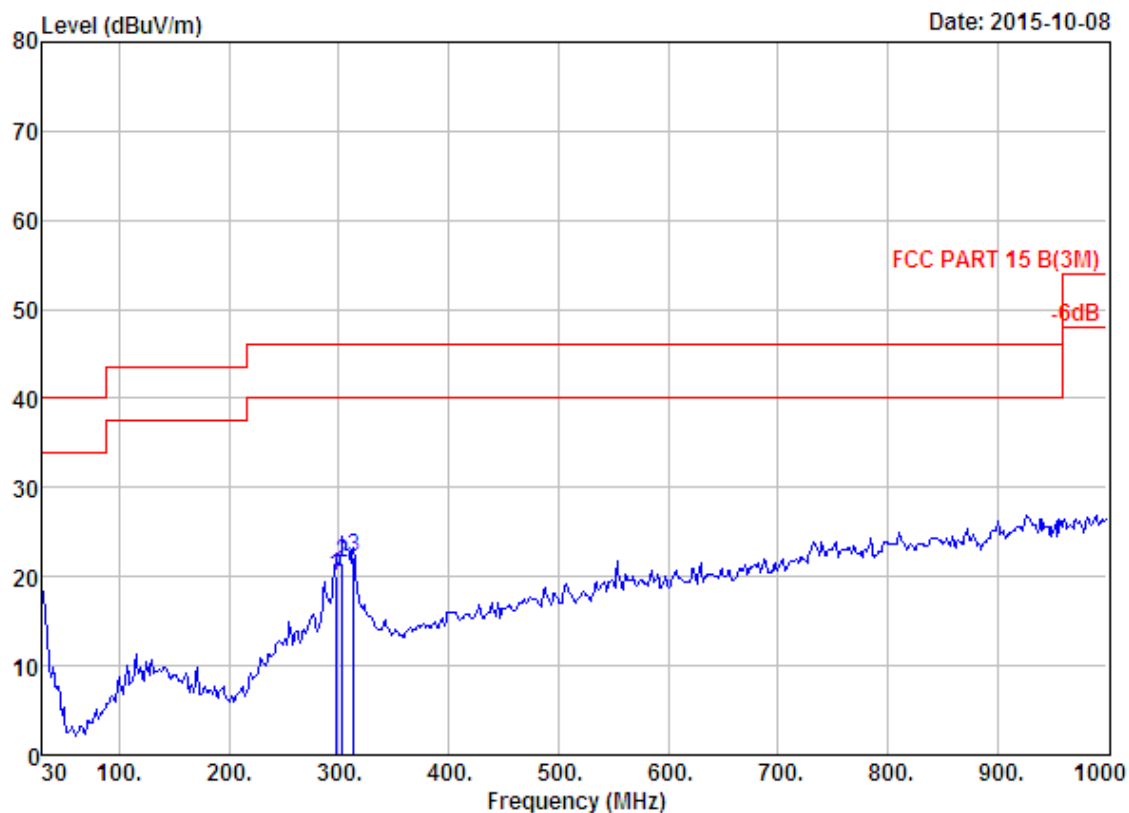

Site no. : 966 1# chamber Data no. : 237
 Dis. / Ant. : 3m 27137 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15 B(3M)
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Bluetooth Speaker
 Power : DC 3.7V
 M/N : SP-920BT
 Test Mode : 8-DPSK TX 2480MHz


	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	296.75	12.99	2.32	4.67	19.98	46.00	26.02	QP
2	303.54	13.08	2.43	6.11	21.62	46.00	24.38	QP
3	313.24	13.31	2.44	6.40	22.15	46.00	23.85	QP

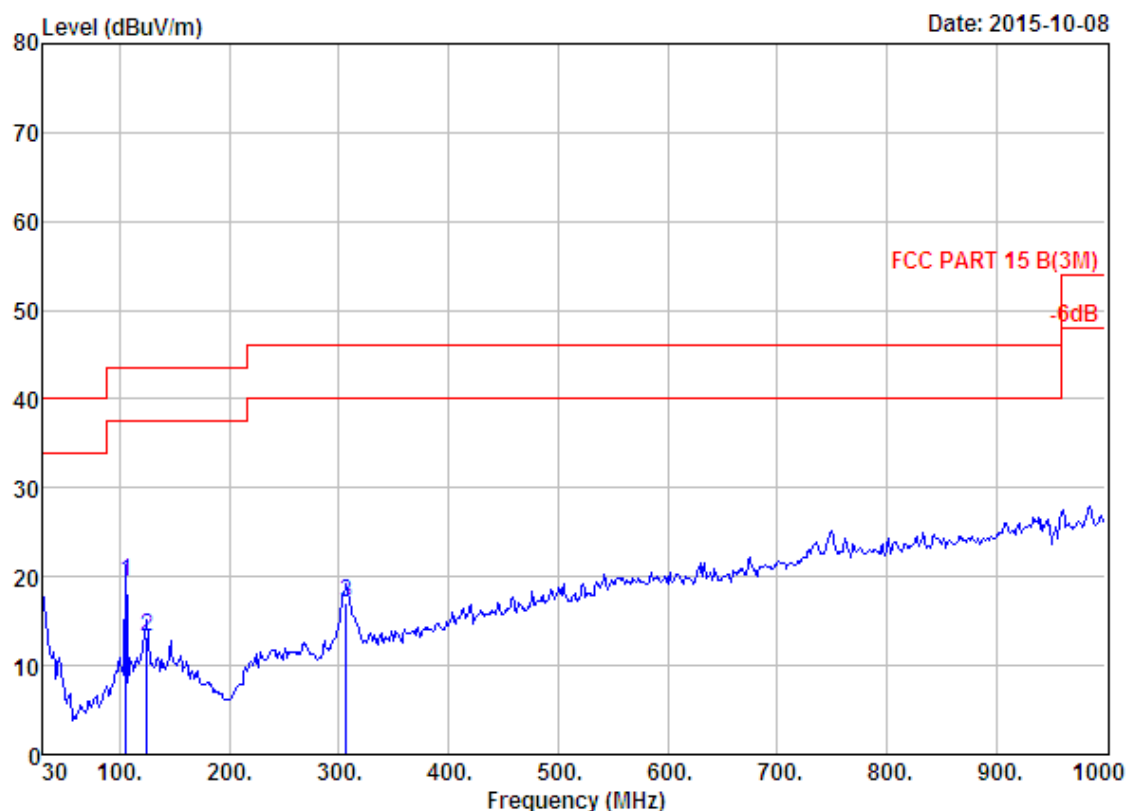

Site no.	: 966 1# chamber	Data no.	: 238
Dis. / Ant.	: 3m 27137	Ant. pol.	: VERTICAL
Limit	: FCC PART 15 B(3M)		
Env. / Ins.	: Temp:23.6';Humi:56%;Press:101.52kPa		
Engineer	: Tony		
EUT	: Bluetooth Speaker		
Power	: DC 3.7V		
M/N	: SP-920BT		
Test Mode	: 8-DPSK TX 2480MHz		

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	105.66	10.05	1.41	7.90	19.36	43.50	24.14	QP
2	125.06	11.35	1.52	0.33	13.20	43.50	30.30	QP
3	306.45	13.13	2.35	1.68	17.16	46.00	28.84	QP


1000 MHz – 18000MHz

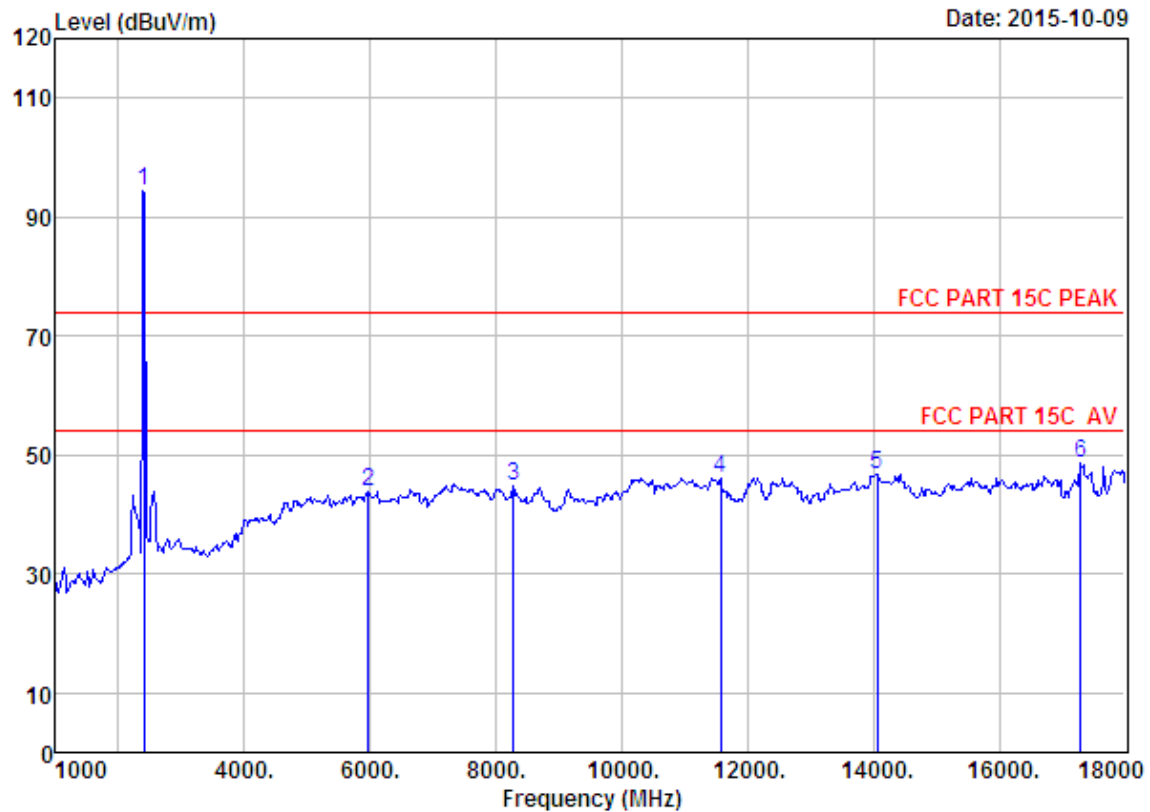

Site no. : 1# 966 chamber Data no. : 259
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Bluetooth Speaker
 Power : DC 3.7V
 M/N : SP-920BT
 Test Mode : GFSK TX 2402MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2402.00	27.61	6.62	34.64	94.95	94.54	74.00	-20.54	Peak
2	5964.00	32.70	12.11	35.59	34.71	43.93	74.00	30.07	Peak
3	8276.00	36.67	11.43	34.81	31.36	44.65	74.00	29.35	Peak
4	11574.00	39.12	10.99	33.27	29.37	46.21	74.00	27.79	Peak
5	14056.00	41.51	10.90	33.06	27.41	46.76	74.00	27.24	Peak
6	17303.00	40.84	10.88	31.31	28.15	48.56	74.00	25.44	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

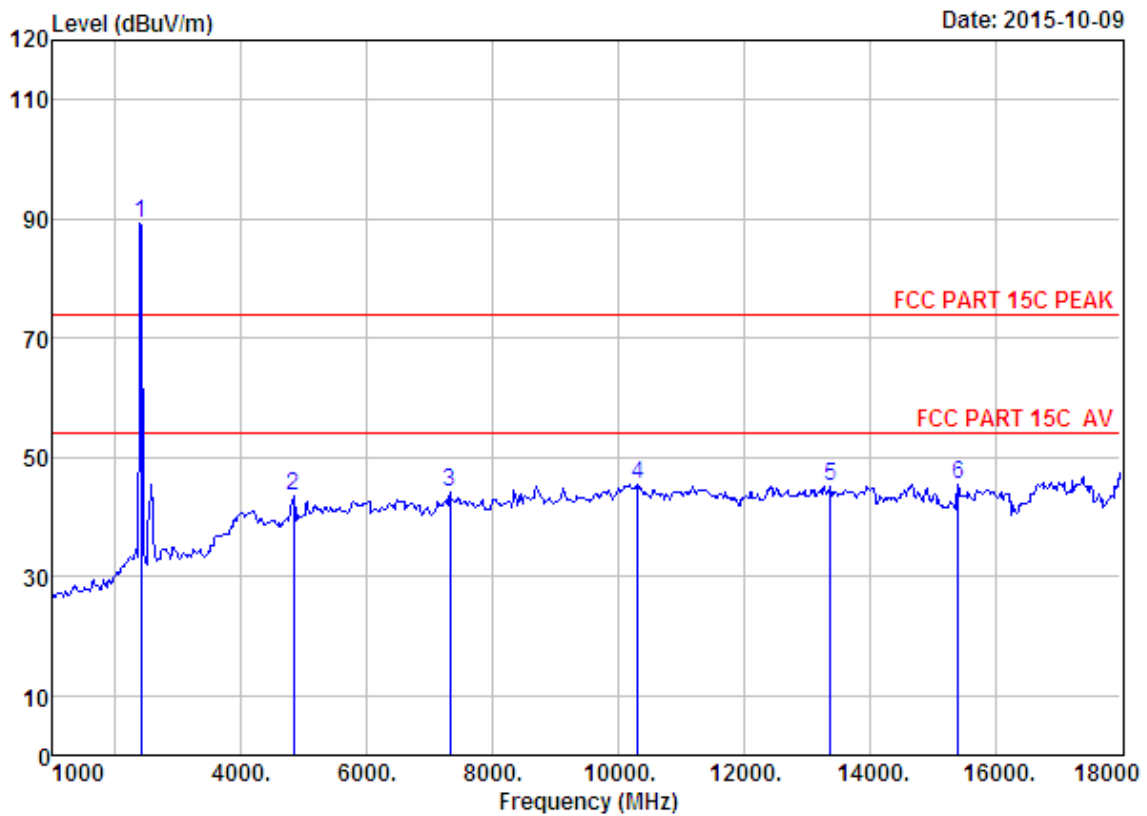


Site no. : 1# 966 chamber
 Dis. / Ant. : 3m ANT 1-18G
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Bluetooth Speaker
 Power : DC 3.7V
 M/N : SP-920BT
 Test Mode : GFSK TX 2402MHz

Data no. : 260
Ant. pol. : HORIZONTAL

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2402.00	27.61	6.62	34.64	89.80	89.39	74.00	-15.39	Peak
2	4825.00	31.28	11.84	35.66	35.98	43.44	74.00	30.56	Peak
3	7324.00	36.55	11.57	34.14	30.11	44.09	74.00	29.91	Peak
4	10316.00	38.65	11.41	34.51	30.01	45.56	74.00	28.44	Peak
5	13376.00	39.78	11.48	32.91	26.73	45.08	74.00	28.92	Peak
6	15416.00	38.26	11.06	32.95	29.05	45.42	74.00	28.58	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

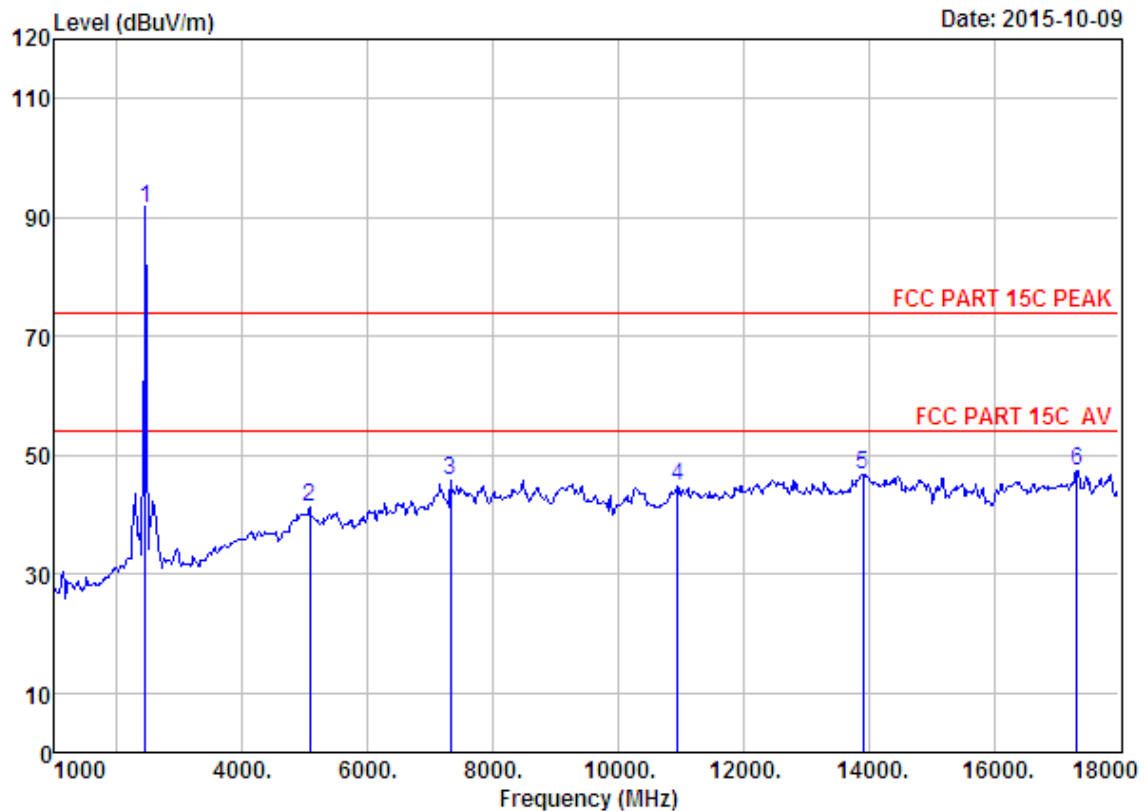

Site no. : 1# 966 chamber Data no. : 263
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Bluetooth Speaker
 Power : DC 3.7V
 M/N : SP-920BT
 Test Mode : GFSK TX 2441MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2441.00	27.60	6.67	34.85	92.20	91.62	74.00	-17.62	Peak
2	5080.00	31.59	12.49	36.13	33.38	41.33	74.00	32.67	Peak
3	7324.00	36.55	11.57	34.14	31.62	45.60	74.00	28.40	Peak
4	10945.00	39.46	11.29	34.13	28.33	44.95	74.00	29.05	Peak
5	13903.00	41.21	11.02	33.02	27.51	46.72	74.00	27.28	Peak
6	17320.00	40.91	10.87	31.31	27.00	47.47	74.00	26.53	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

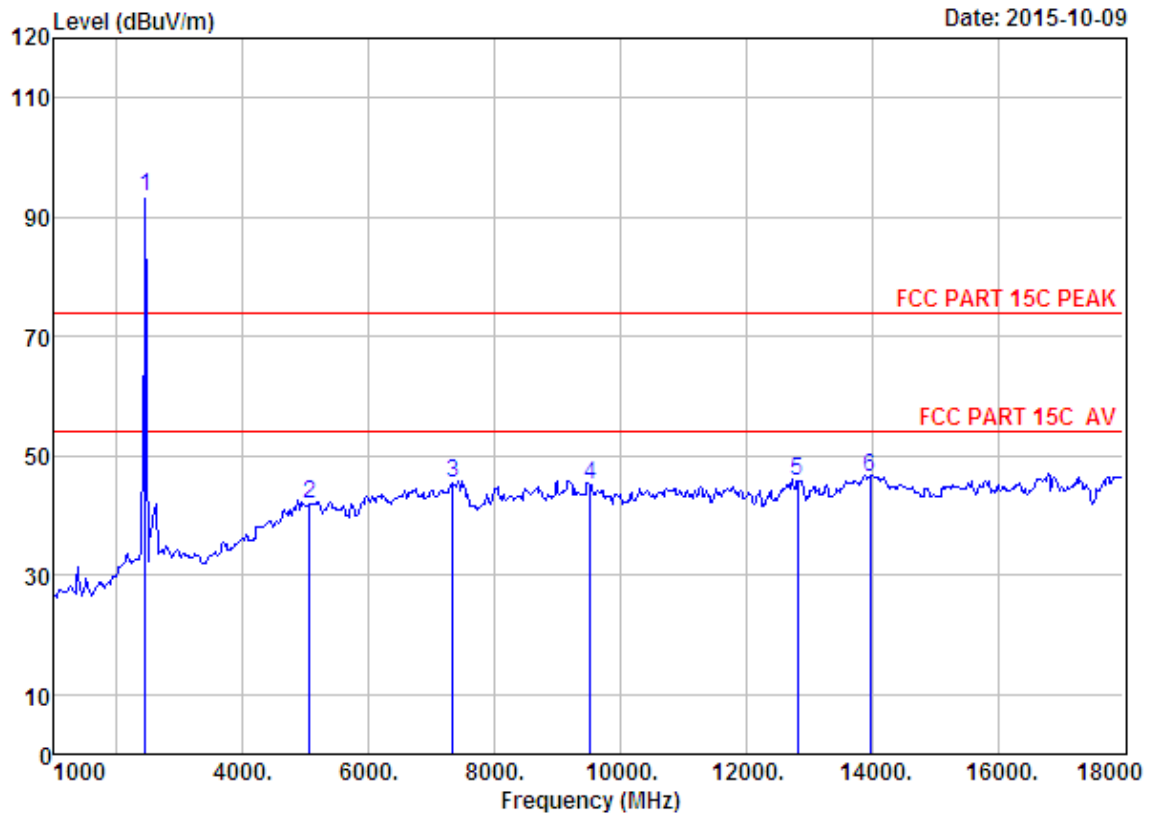

Site no. : 1# 966 chamber Data no. : 264
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Bluetooth Speaker
 Power : DC 3.7V
 M/N : SP-920BT
 Test Mode : GFSK TX 2441MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2441.00	27.60	6.67	34.85	93.87	93.29	74.00	-19.29	Peak
2	5063.00	31.58	12.51	36.13	33.99	41.95	74.00	32.05	Peak
3	7341.00	36.56	11.58	34.17	31.38	45.35	74.00	28.65	Peak
4	9517.00	37.98	11.71	34.91	30.30	45.08	74.00	28.92	Peak
5	12815.00	38.84	11.24	33.34	29.10	45.84	74.00	28.16	Peak
6	13971.00	41.40	10.94	33.00	27.19	46.53	74.00	27.47	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

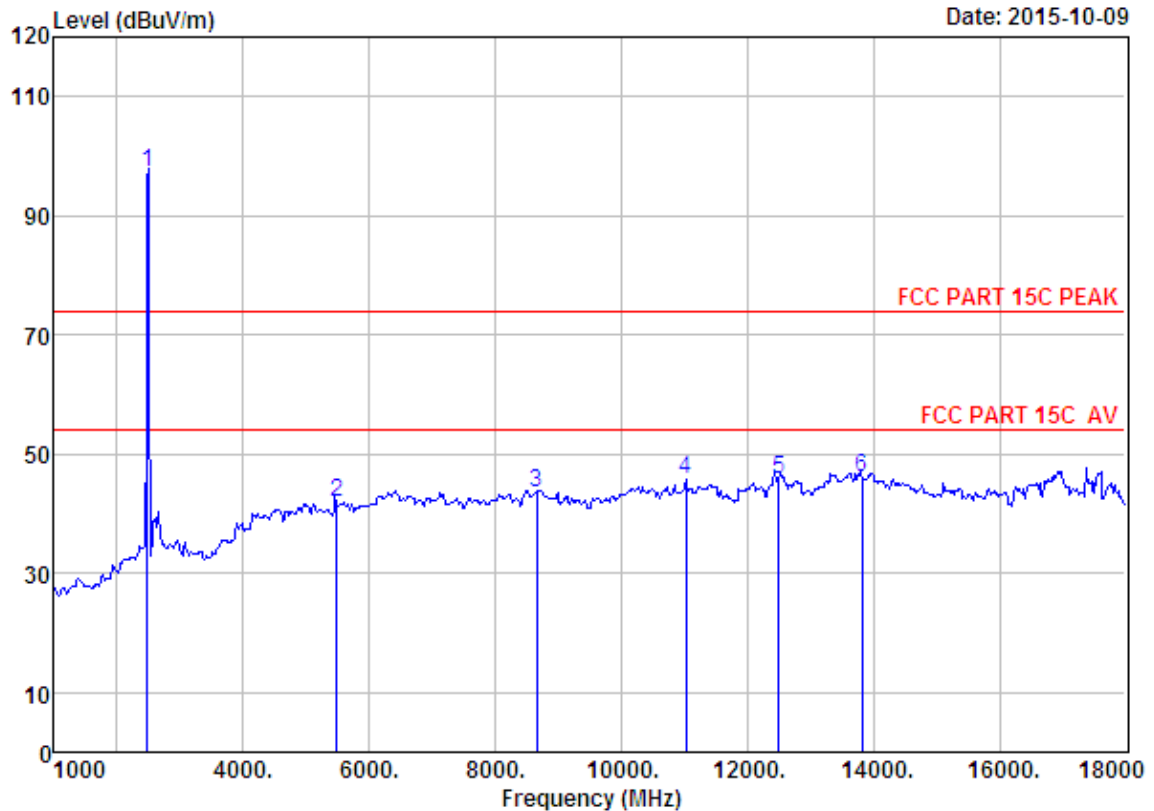

Site no. : 1# 966 chamber Data no. : 265
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Bluetooth Speaker
 Power : DC 3.7V
 M/N : SP-920BT
 Test Mode : GFSK TX 2480MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2480.00	27.58	6.71	35.11	97.99	97.17	74.00	-23.17	Peak
2	5488.00	31.87	12.01	36.00	33.90	41.78	74.00	32.22	Peak
3	8650.00	37.27	11.45	33.68	28.63	43.67	74.00	30.33	Peak
4	11030.00	39.50	11.27	33.98	28.85	45.64	74.00	28.36	Peak
5	12492.00	38.75	10.90	33.38	29.63	45.90	74.00	28.10	Peak
6	13818.00	40.97	11.12	33.07	27.13	46.15	74.00	27.85	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

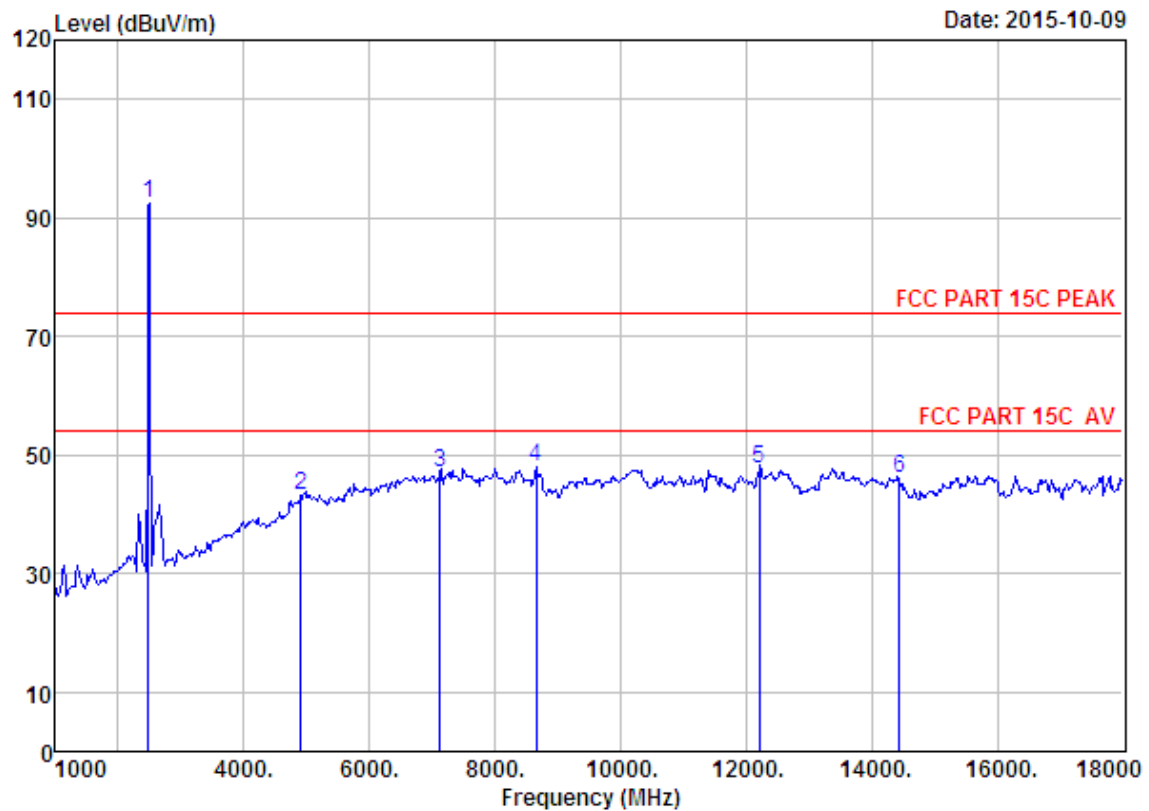

Site no. : 1# 966 chamber Data no. : 266
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Bluetooth Speaker
 Power : DC 3.7V
 M/N : SP-920BT
 Test Mode : GFSK TX 2480MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2480.00	27.58	6.71	35.11	93.21	92.39	74.00	-18.39	Peak
2	4910.00	31.42	12.22	35.87	35.41	43.18	74.00	30.82	Peak
3	7120.00	36.08	11.51	33.86	33.18	46.91	74.00	27.09	Peak
4	8650.00	37.27	11.45	33.68	33.02	48.06	74.00	25.94	Peak
5	12203.00	38.68	11.20	33.58	31.24	47.54	74.00	26.46	Peak
6	14447.00	41.83	10.93	33.42	26.71	46.05	74.00	27.95	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

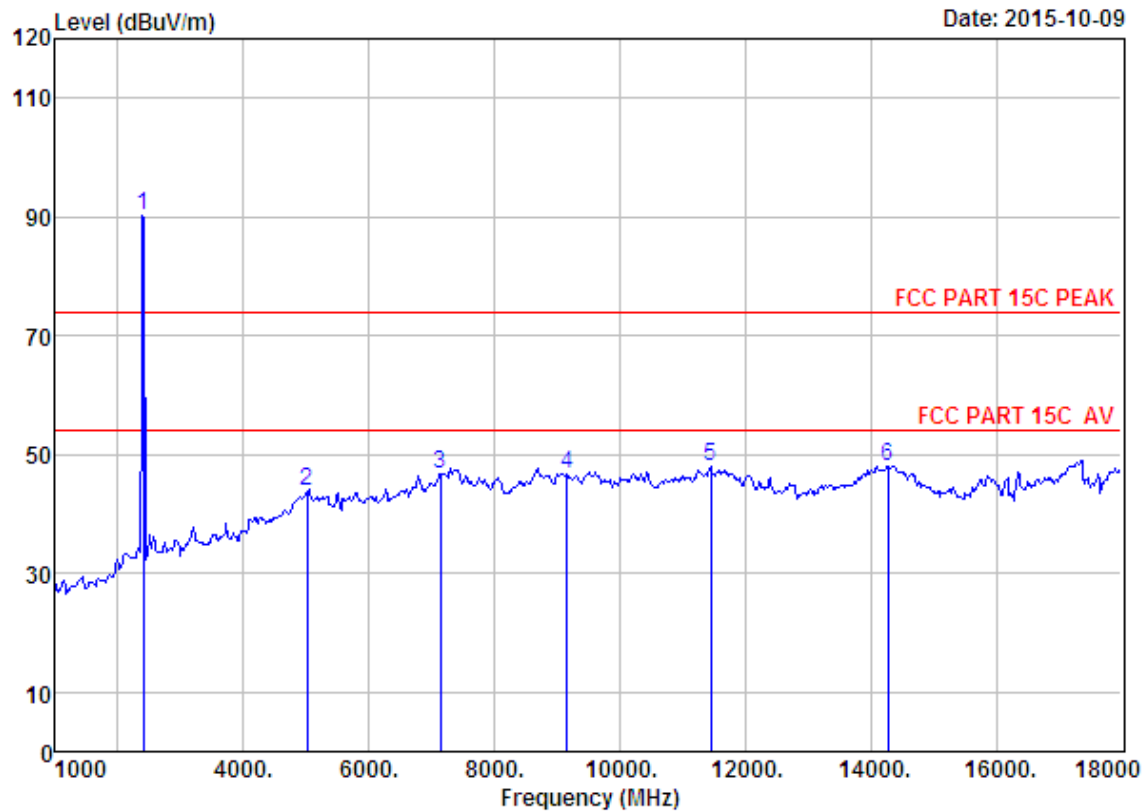

Site no. : 1# 966 chamber Data no. : 269
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Bluetooth Speaker
 Power : DC 3.7V
 M/N : SP-920BT
 Test Mode : 8-DPSK TX 2402MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2402.00	27.61	6.62	34.64	90.81	90.40	74.00	-16.40	Peak
2	5012.00	31.55	12.57	36.12	35.81	43.81	74.00	30.19	Peak
3	7137.00	36.17	11.52	33.86	32.79	46.62	74.00	27.38	Peak
4	9160.00	37.69	11.54	34.07	31.57	46.73	74.00	27.27	Peak
5	11455.00	39.23	10.96	33.53	31.20	47.86	74.00	26.14	Peak
6	14277.00	41.70	10.92	33.42	28.69	47.89	74.00	26.11	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

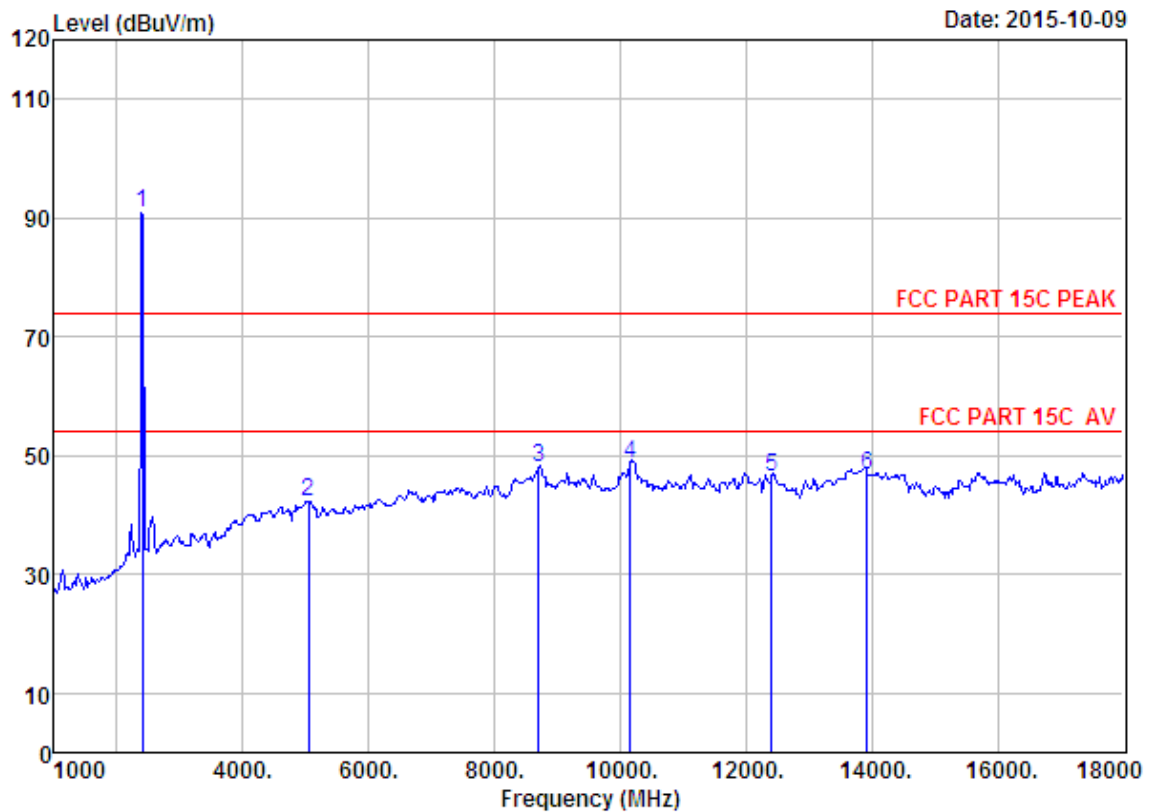

Site no. : 1# 966 chamber Data no. : 270
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Bluetooth Speaker
 Power : DC 3.7V
 M/N : SP-920BT
 Test Mode : 8-DPSK TX 2402MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2402.00	27.61	6.62	34.64	91.43	91.02	74.00	-17.02	Peak
2	5046.00	31.57	12.53	36.15	34.28	42.23	74.00	31.77	Peak
3	8701.00	37.35	11.45	33.65	32.84	47.99	74.00	26.01	Peak
4	10163.00	38.39	11.50	34.56	33.44	48.77	74.00	25.23	Peak
5	12407.00	38.73	10.99	33.42	29.96	46.26	74.00	27.74	Peak
6	13920.00	41.26	11.00	33.00	27.47	46.73	74.00	27.27	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

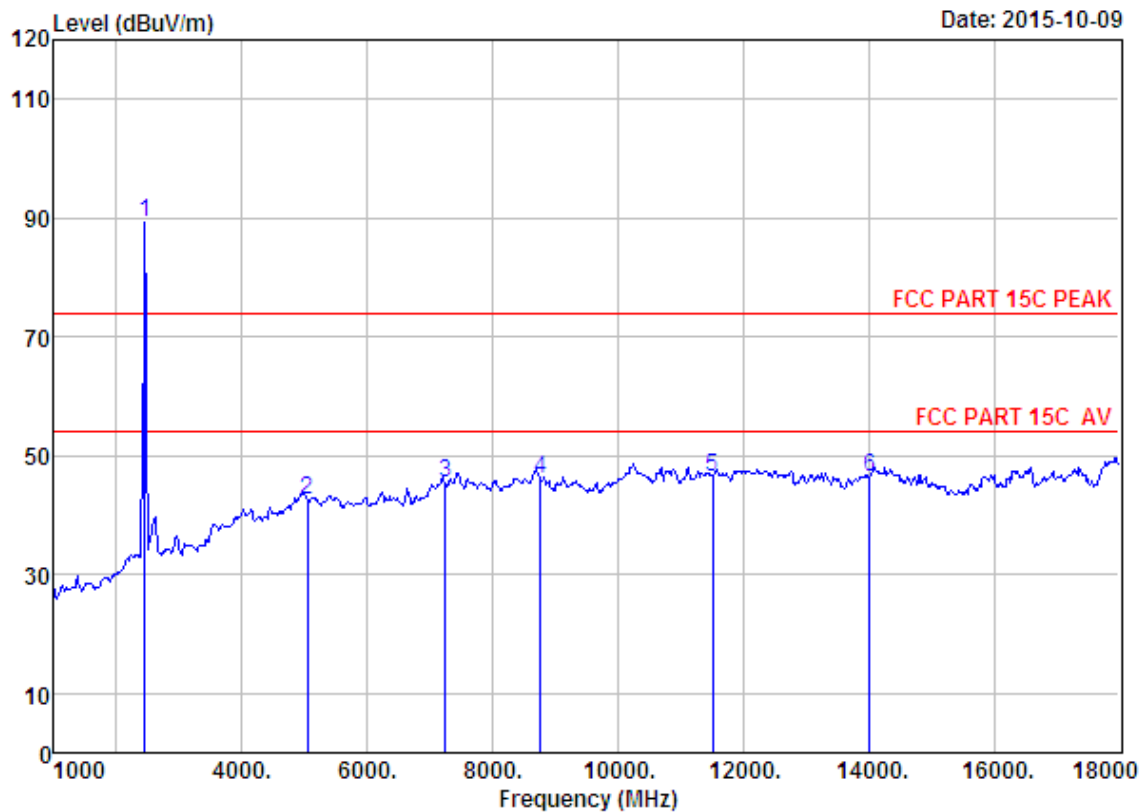

Site no. : 1# 966 chamber Data no. : 273
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Bluetooth Speaker
 Power : DC 3.7V
 M/N : SP-920BT
 Test Mode : 8-DPSK TX 2441MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2441.00	27.60	6.67	34.85	89.90	89.32	74.00	-15.32	Peak
2	5046.00	31.57	12.53	36.15	34.71	42.66	74.00	31.34	Peak
3	7239.00	36.53	11.55	33.99	31.23	45.32	74.00	28.68	Peak
4	8769.00	37.46	11.46	33.83	30.95	46.04	74.00	27.96	Peak
5	11506.00	39.20	10.92	33.46	29.83	46.49	74.00	27.51	Peak
6	14022.00	41.48	10.90	33.03	27.12	46.47	74.00	27.53	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

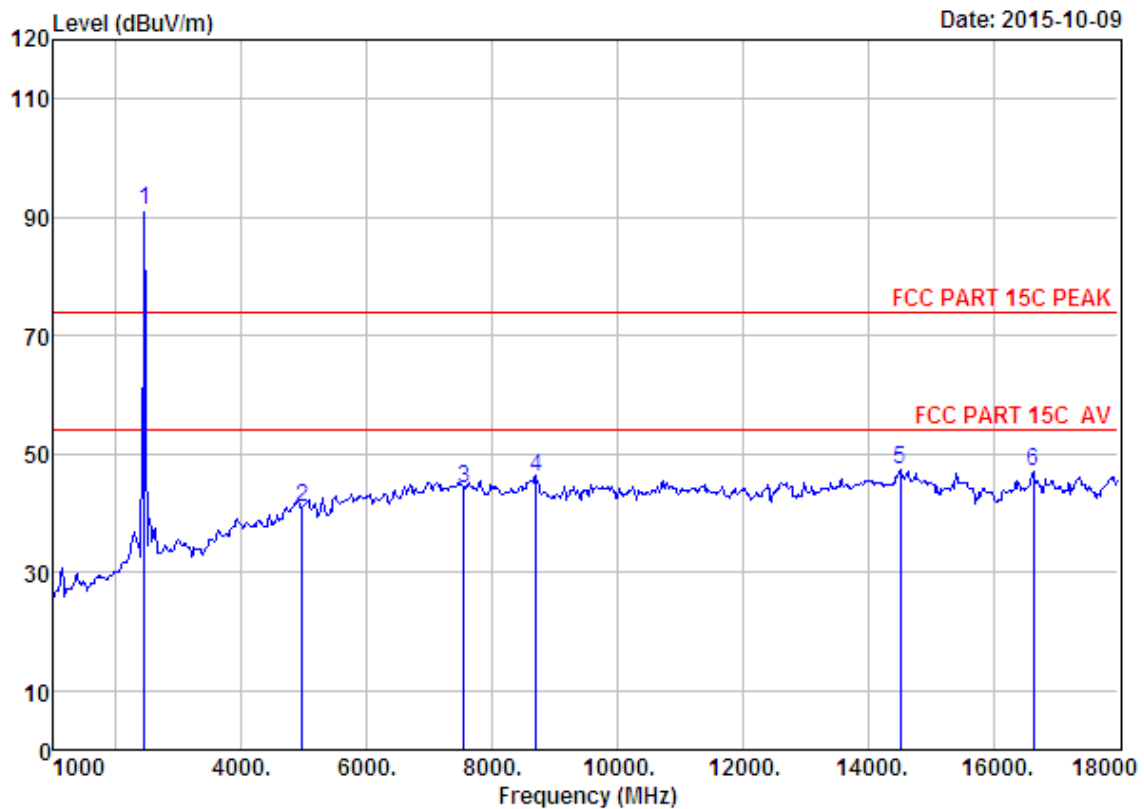

Site no. : 1# 966 chamber Data no. : 274
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Bluetooth Speaker
 Power : DC 3.7V
 M/N : SP-920BT
 Test Mode : 8-DPSK TX 2441MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2441.00	27.60	6.67	34.85	91.63	91.05	74.00	-17.05	Peak
2	4961.00	31.49	12.44	36.01	33.20	41.12	74.00	32.88	Peak
3	7545.00	36.43	11.60	34.15	30.37	44.25	74.00	29.75	Peak
4	8701.00	37.35	11.45	33.65	30.79	45.94	74.00	28.06	Peak
5	14515.00	41.89	10.93	33.57	27.98	47.23	74.00	26.77	Peak
6	16640.00	38.68	10.65	32.95	30.51	46.89	74.00	27.11	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

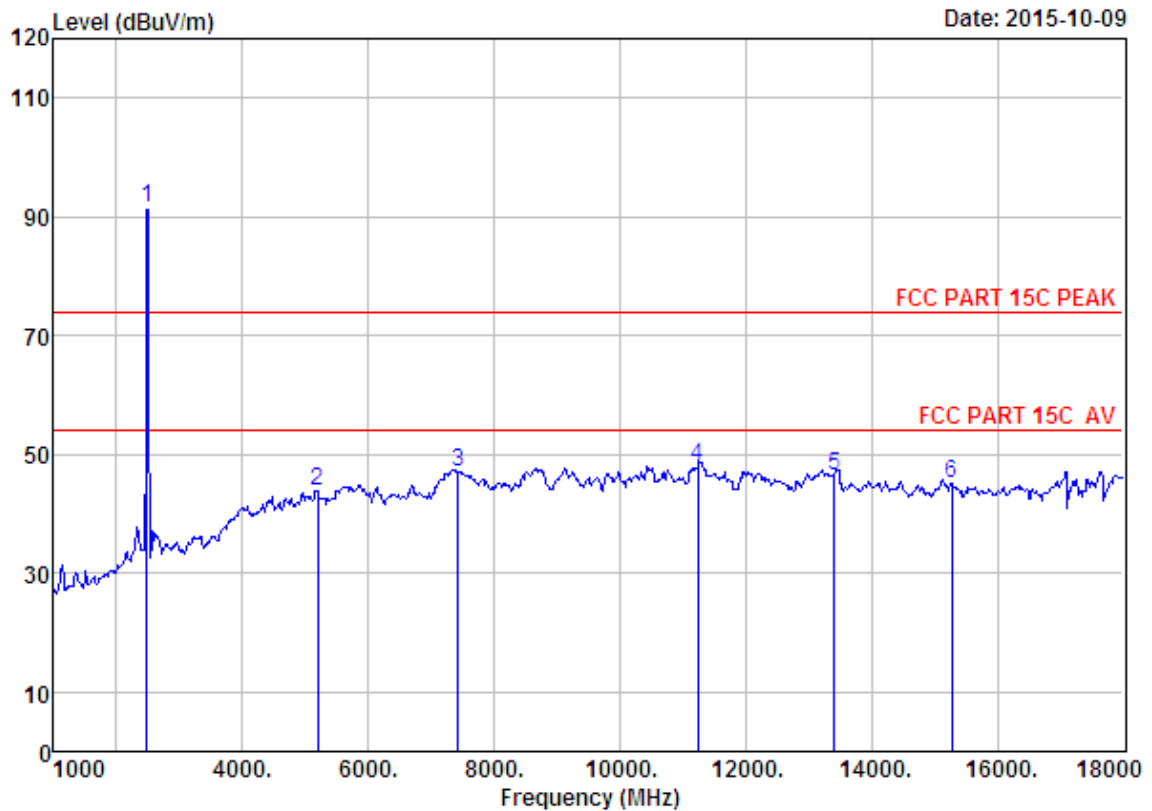

Site no. : 1# 966 chamber Data no. : 275
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Bluetooth Speaker
 Power : DC 3.7V
 M/N : SP-920BT
 Test Mode : 8-DPSK TX 2480MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2480.00	27.58	6.71	35.11	92.23	91.41	74.00	-17.41	Peak
2	5199.00	31.67	12.35	35.97	35.66	43.71	74.00	30.29	Peak
3	7426.00	36.56	11.60	34.22	33.17	47.11	74.00	26.89	Peak
4	11234.00	39.37	11.12	33.25	30.65	47.89	74.00	26.11	Peak
5	13410.00	39.87	11.49	32.86	27.99	46.49	74.00	27.51	Peak
6	15280.00	38.90	10.99	33.54	28.61	44.96	74.00	29.04	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

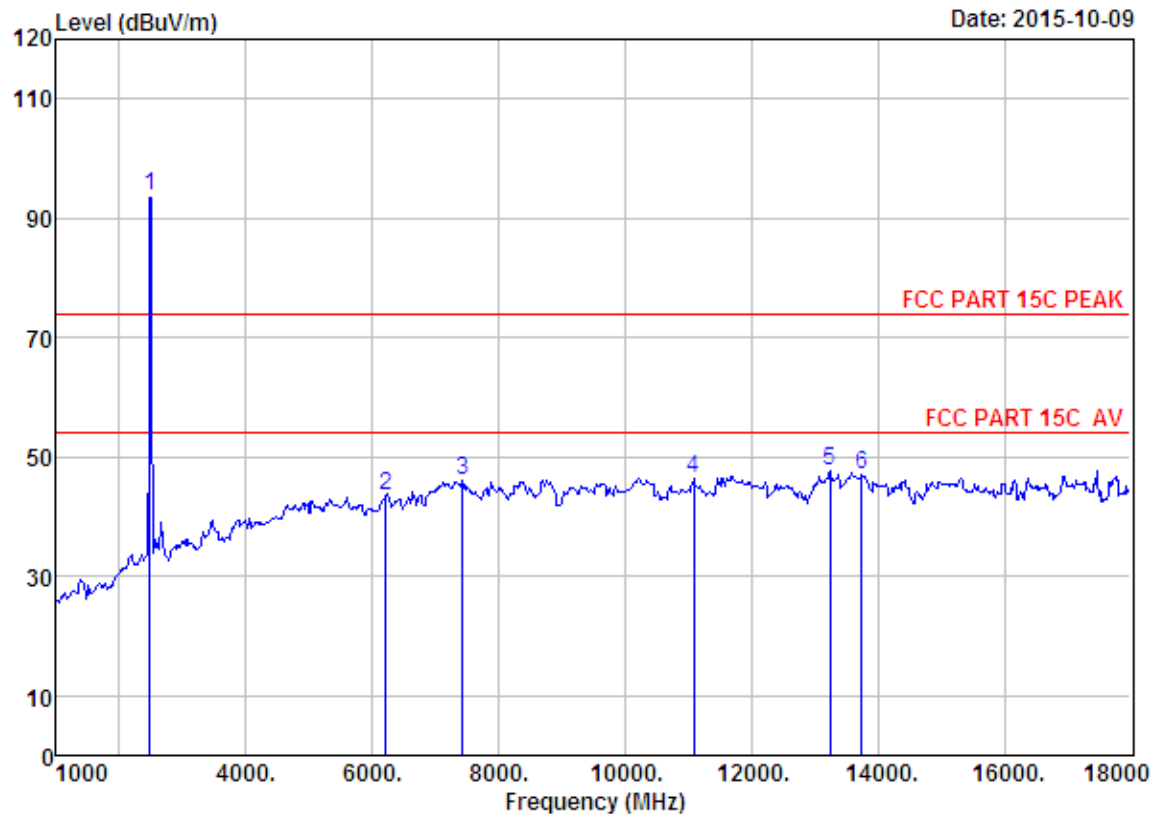


Site no. : 1# 966 chamber Data no. : 276
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Bluetooth Speaker
 Power : DC 3.7V
 M/N : SP-920BT
 Test Mode : 8-DPSK TX 2480MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2480.00	27.58	6.71	35.11	94.45	93.63	74.00	-19.63	Peak
2	6219.00	33.29	12.17	35.15	33.20	43.51	74.00	30.49	Peak
3	7426.00	36.56	11.60	34.22	32.06	46.00	74.00	28.00	Peak
4	11081.00	39.46	11.23	33.73	29.42	46.38	74.00	27.62	Peak
5	13240.00	39.46	11.46	32.88	29.71	47.75	74.00	26.25	Peak
6	13750.00	40.78	11.20	33.02	27.98	46.94	74.00	27.06	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.


18000MHz – 25000MHz

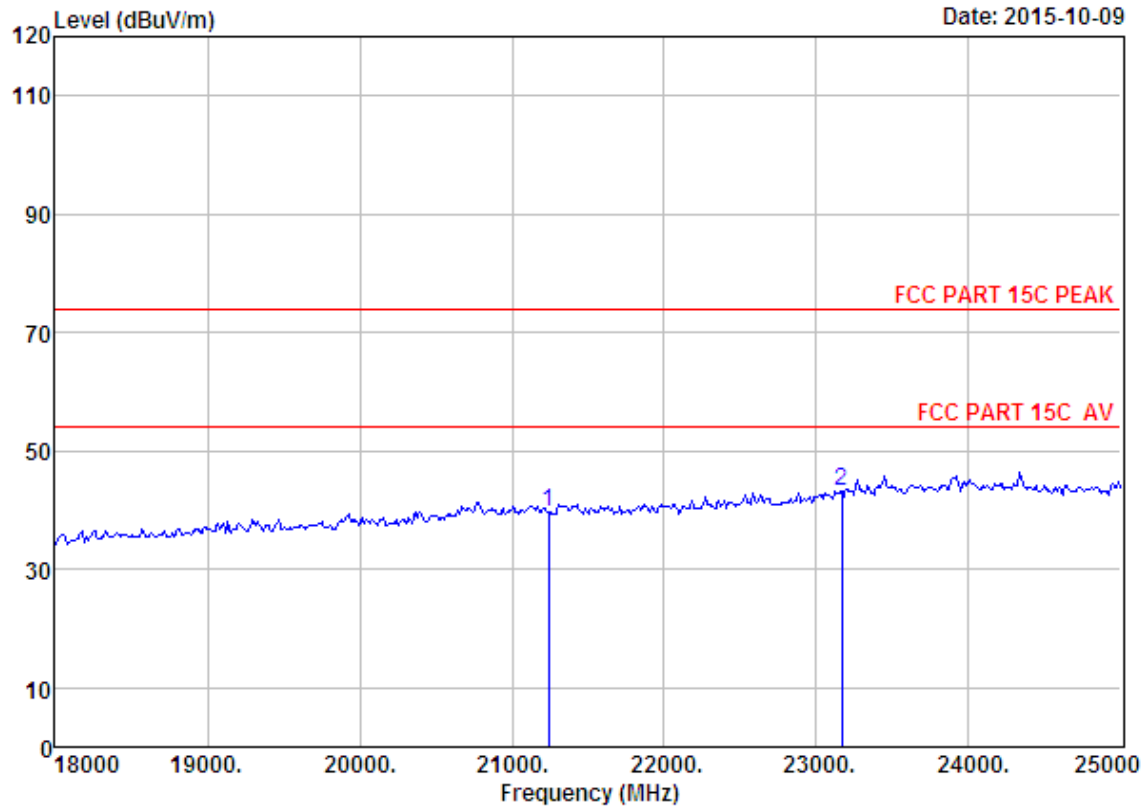

Site no. : 1# 966 chamber Data no. : 279
 Dis. / Ant. : 3m ANT ABOVE 18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Bluetooth Speaker
 Power : DC 3.7V
 M/N : SP-920BT
 Test Mode : GFSK TX 2402MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	21241.00	46.16	20.23	35.58	8.77	39.58	74.00	34.42	Peak
2	23166.00	45.63	21.30	33.67	10.04	43.30	74.00	30.70	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

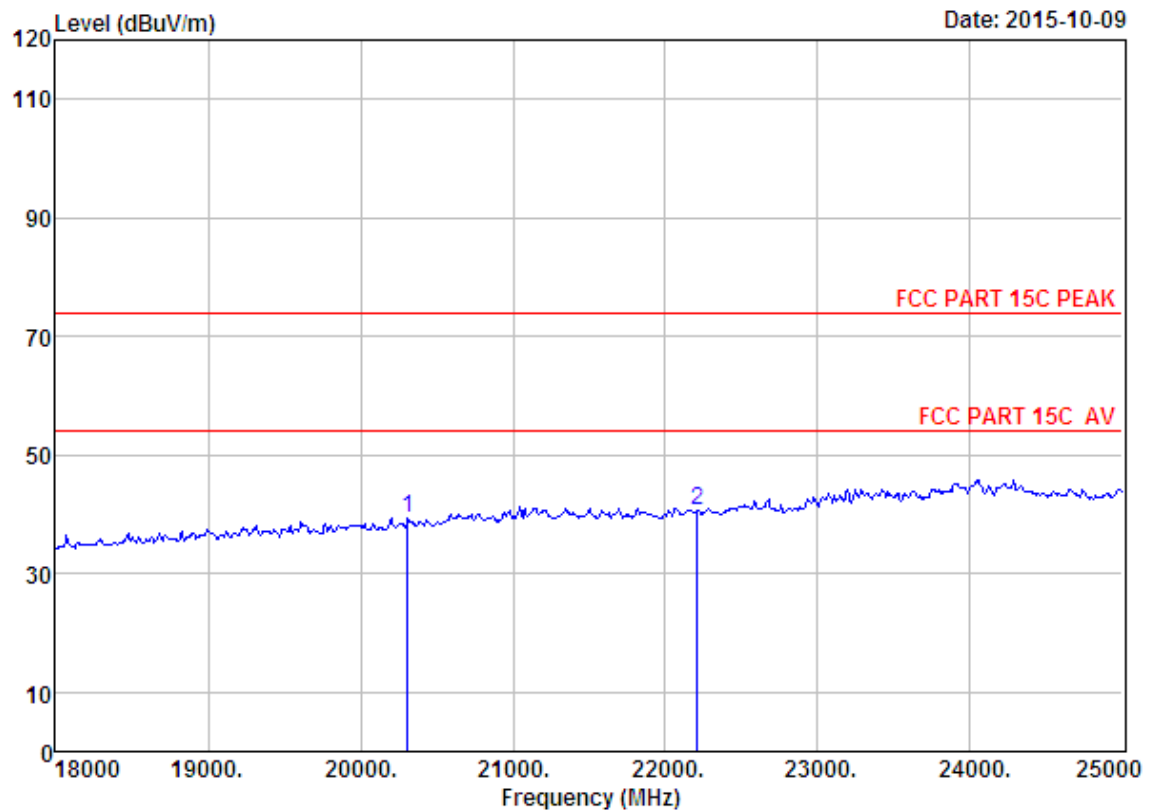

Site no. : 1# 966 chamber Data no. : 280
 Dis. / Ant. : 3m ANT ABVOE 18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Bluetooth Speaker
 Power : DC 3.7V
 M/N : SP-920BT
 Test Mode : GFSK TX 2402MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	20310.00	46.04	19.82	36.43	9.91	39.34	74.00	34.66	Peak
2	22207.00	45.74	20.68	34.69	8.76	40.49	74.00	33.51	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

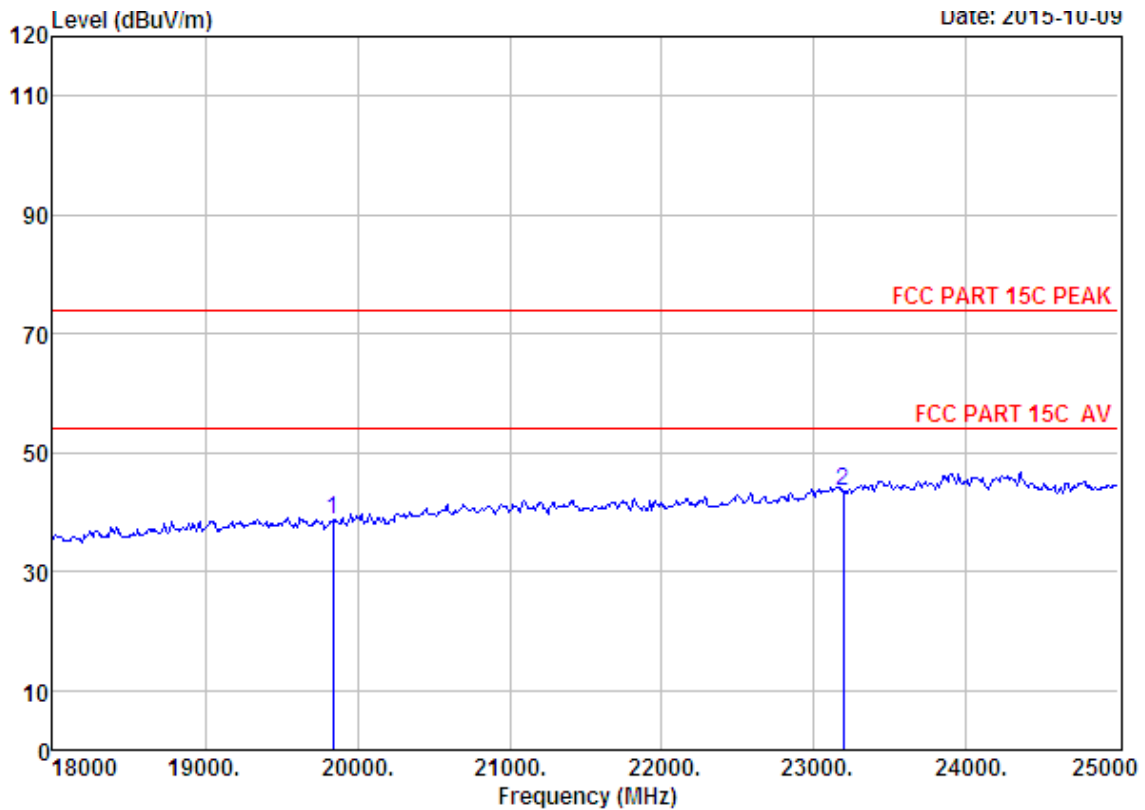

Site no. : 1# 966 chamber Data no. : 281
 Dis. / Ant. : 3m ANT ABOVE 18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Bluetooth Speaker
 Power : DC 3.7V
 M/N : SP-920BT
 Test Mode : GFSK TX 2441MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	19841.00	46.04	19.51	36.57	9.62	38.60	74.00	35.40	Peak
2	23194.00	45.64	21.32	33.64	10.12	43.44	74.00	30.56	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

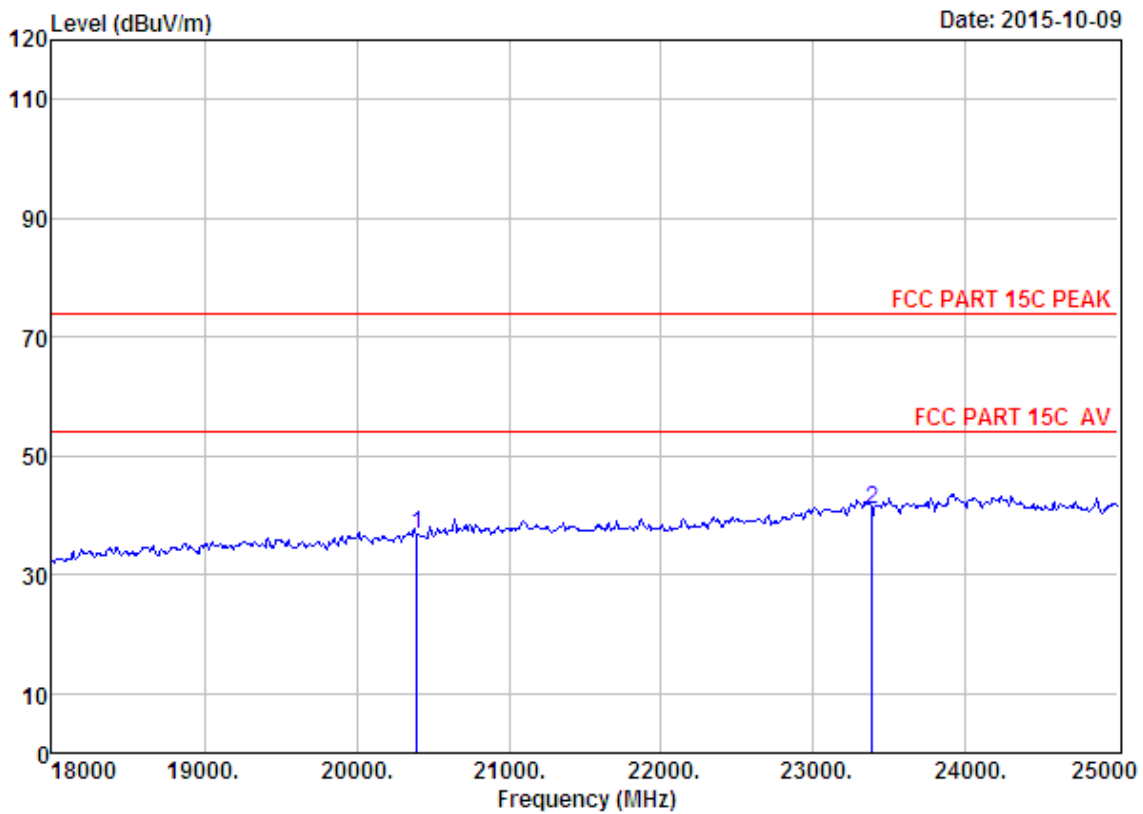

Site no. : 1# 966 chamber Data no. : 282
 Dis. / Ant. : 3m ANT ABOVE 18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Bluetooth Speaker
 Power : DC 3.7V
 M/N : SP-920BT
 Test Mode : GFSK TX 2441MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	20394.00	46.02	19.86	36.34	7.39	36.93	74.00	37.07	Peak
2	23383.00	45.68	21.49	33.46	7.19	40.90	74.00	33.10	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

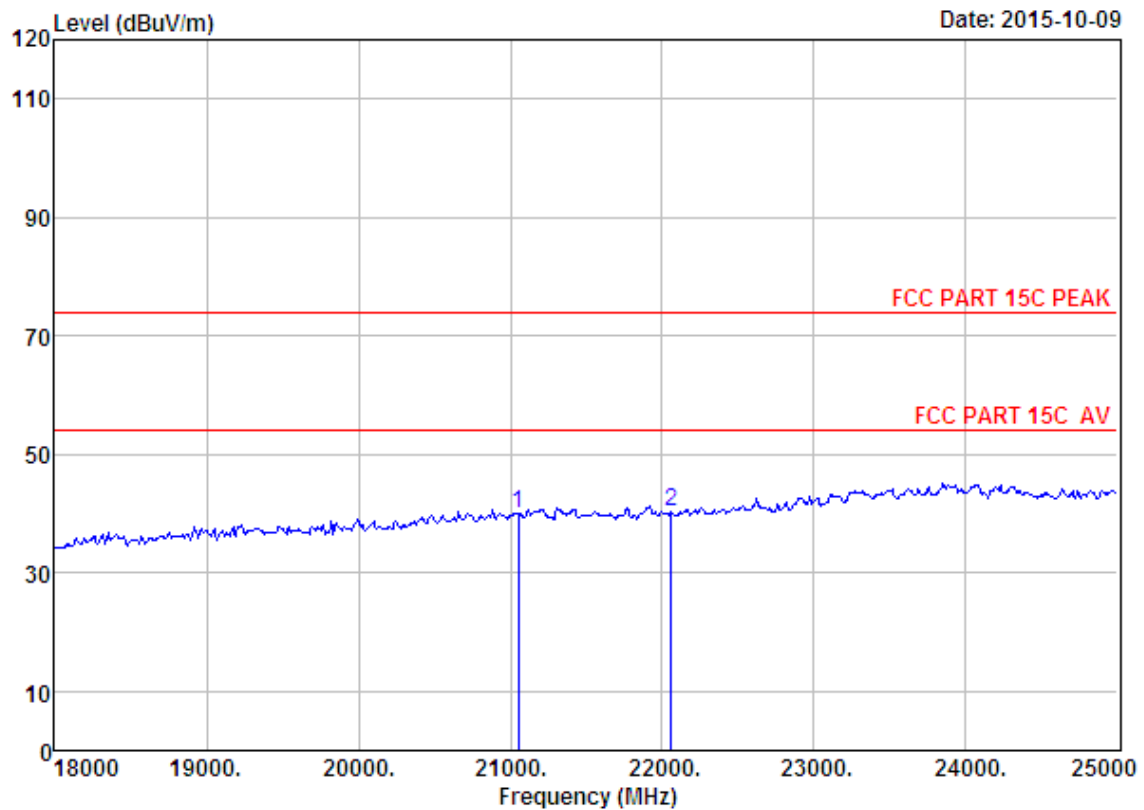

Site no. : 1# 966 chamber Data no. : 283
 Dis. / Ant. : 3m ANT ABOVE 18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Bluetooth Speaker
 Power : DC 3.7V
 M/N : SP-920BT
 Test Mode : GFSK TX 2480MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	21052.00	46.26	20.15	35.76	9.39	40.04	74.00	33.96	Peak
2	22060.00	45.71	20.60	34.85	9.00	40.46	74.00	33.54	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

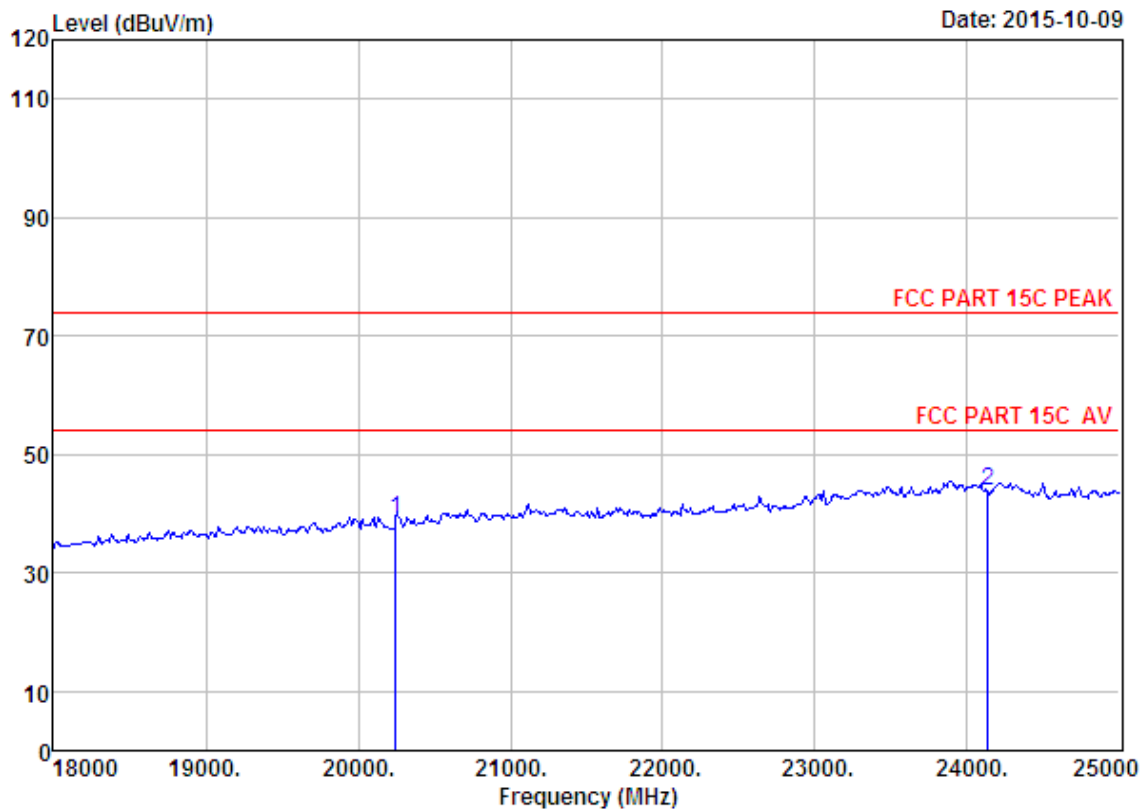

Site no. : 1# 966 chamber Data no. : 284
 Dis. / Ant. : 3m ANT ABVOE 18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Bluetooth Speaker
 Power : DC 3.7V
 M/N : SP-920BT
 Test Mode : GFSK TX 2480MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	20247.00	46.05	19.79	36.48	9.71	39.07	74.00	34.93	Peak
2	24132.00	45.63	22.12	32.99	9.03	43.79	74.00	30.21	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

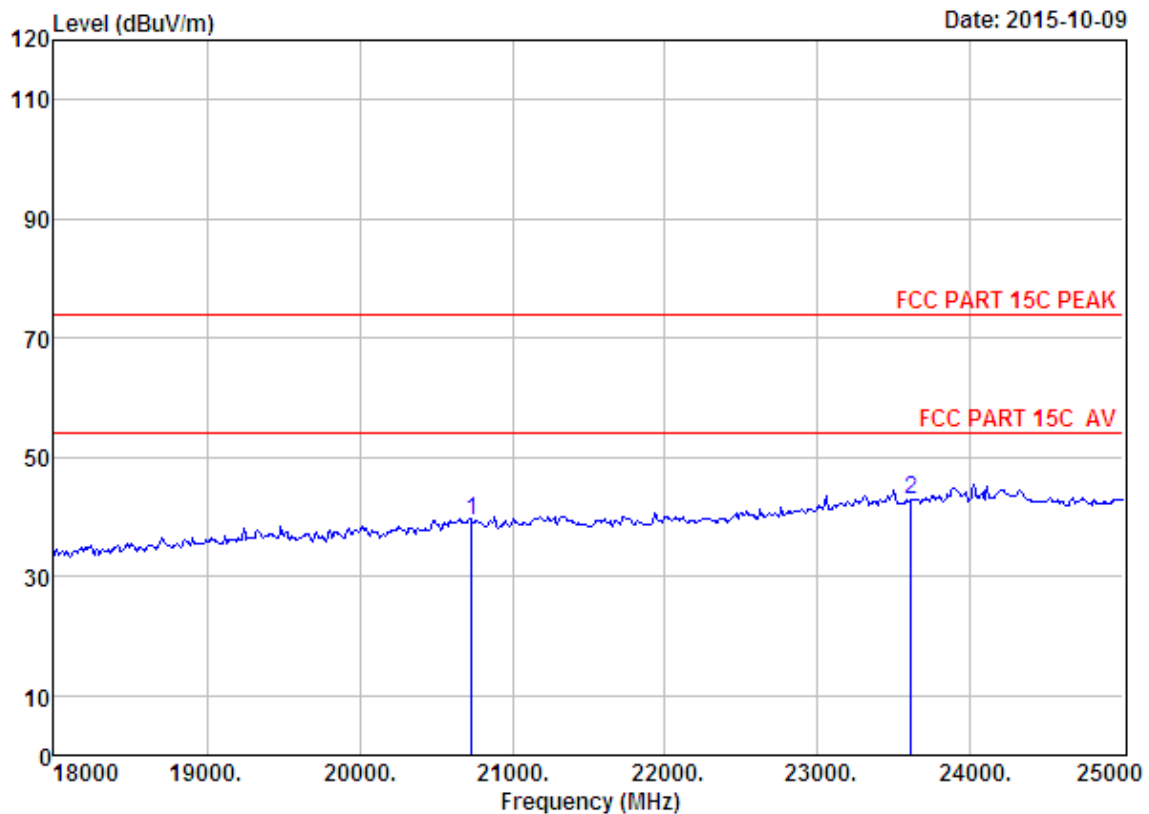

Site no. : 1# 966 chamber Data no. : 285
 Dis. / Ant. : 3m ANT ABOVE 18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Bluetooth Speaker
 Power : DC 3.7V
 M/N : SP-920BT
 Test Mode : 8-DPSK TX 2402MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	20737.00	46.14	20.01	36.05	9.22	39.32	74.00	34.68	Peak
2	23607.00	45.68	21.69	33.22	8.59	42.74	74.00	31.26	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

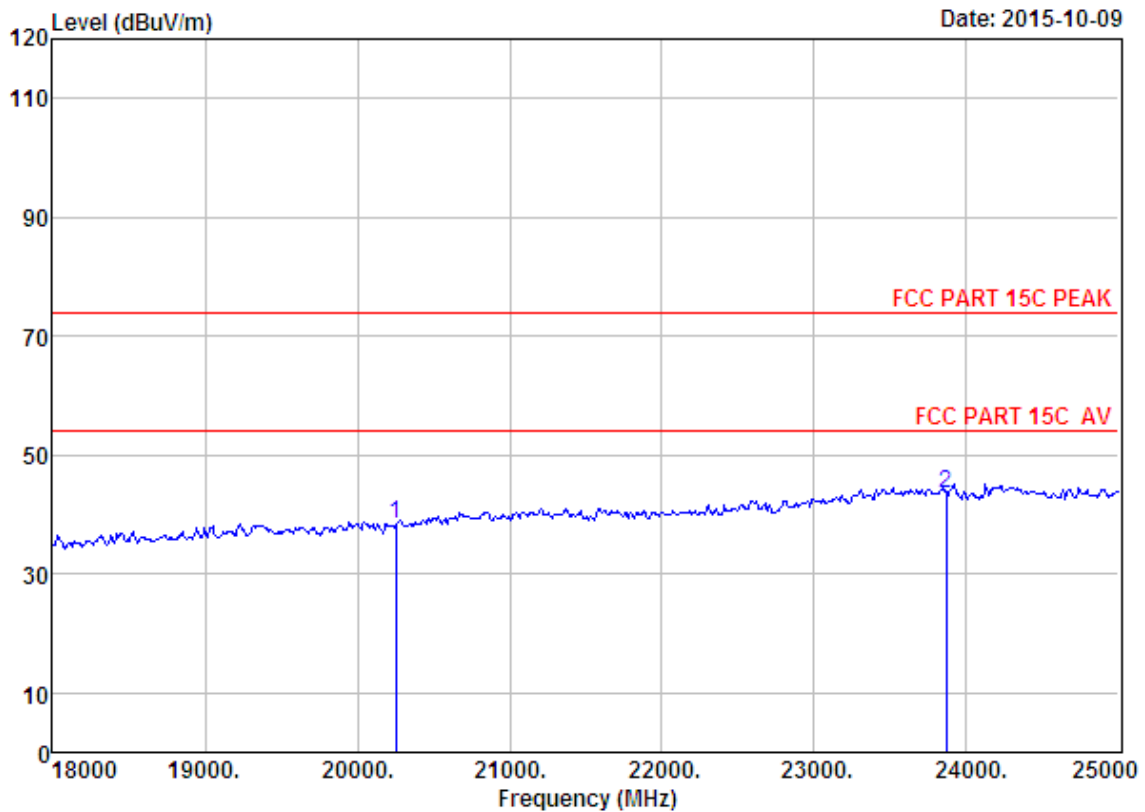

Site no. : 1# 966 chamber Data no. : 286
 Dis. / Ant. : 3m ANT ABOVE 18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Bluetooth Speaker
 Power : DC 3.7V
 M/N : SP-920BT
 Test Mode : 8-DPSK TX 2402MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	20254.00	46.05	19.79	36.48	8.90	38.26	74.00	35.74	Peak
2	23866.00	45.63	21.93	32.93	9.00	43.63	74.00	30.37	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

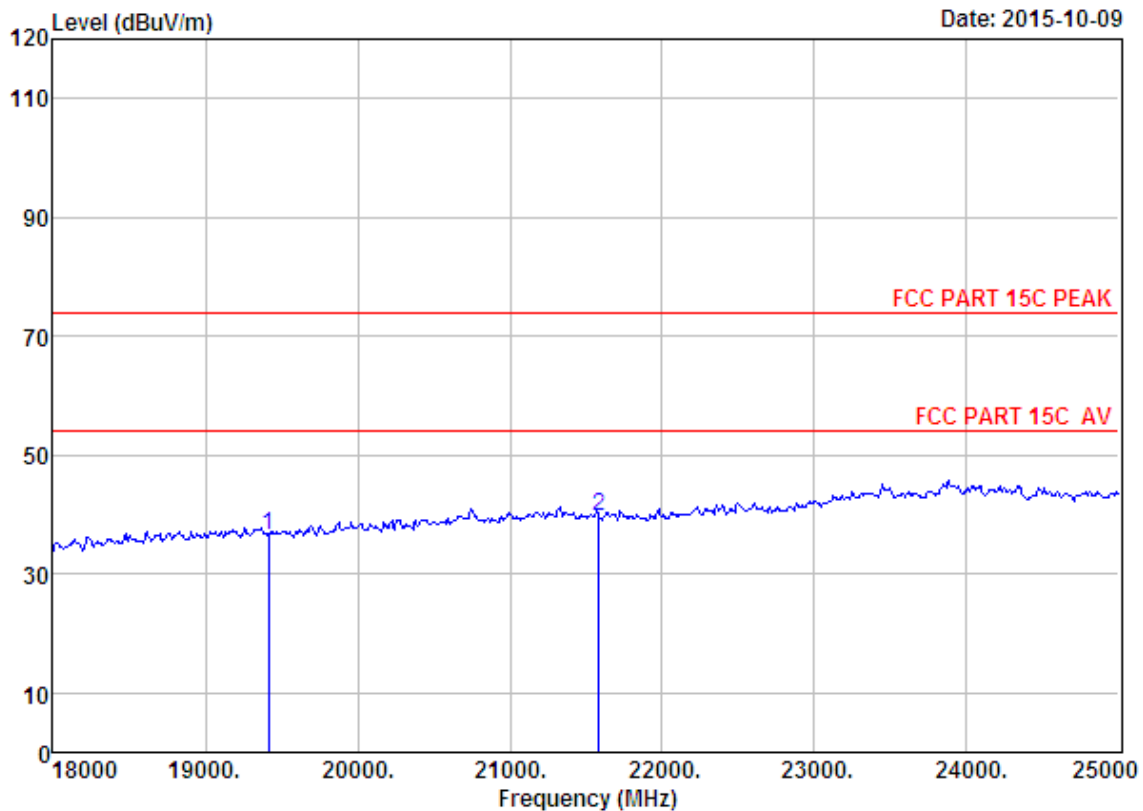

Site no. : 1# 966 chamber Data no. : 287
 Dis. / Ant. : 3m ANT ABOVE 18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Bluetooth Speaker
 Power : DC 3.7V
 M/N : SP-920BT
 Test Mode : 8-DPSK TX 2441MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	19414.00	45.81	19.01	36.21	7.76	36.37	74.00	37.63	Peak
2	21584.00	45.95	20.38	35.28	8.74	39.79	74.00	34.21	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

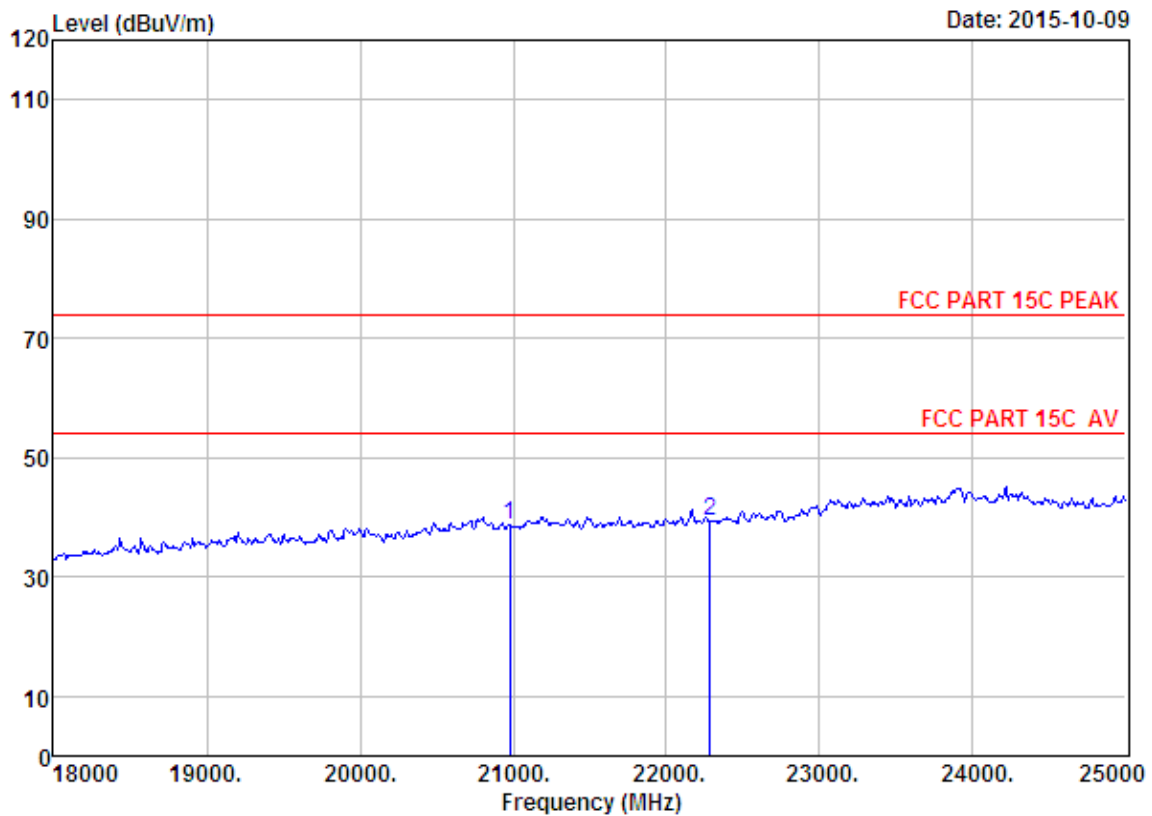

Site no. : 1# 966 chamber Data no. : 288
 Dis. / Ant. : 3m ANT ABOVE 18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Bluetooth Speaker
 Power : DC 3.7V
 M/N : SP-920BT
 Test Mode : 8-DPSK TX 2441MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	20975.00	46.29	20.12	35.82	8.27	38.86	74.00	35.14	Peak
2	22284.00	45.76	20.73	34.61	7.57	39.45	74.00	34.55	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

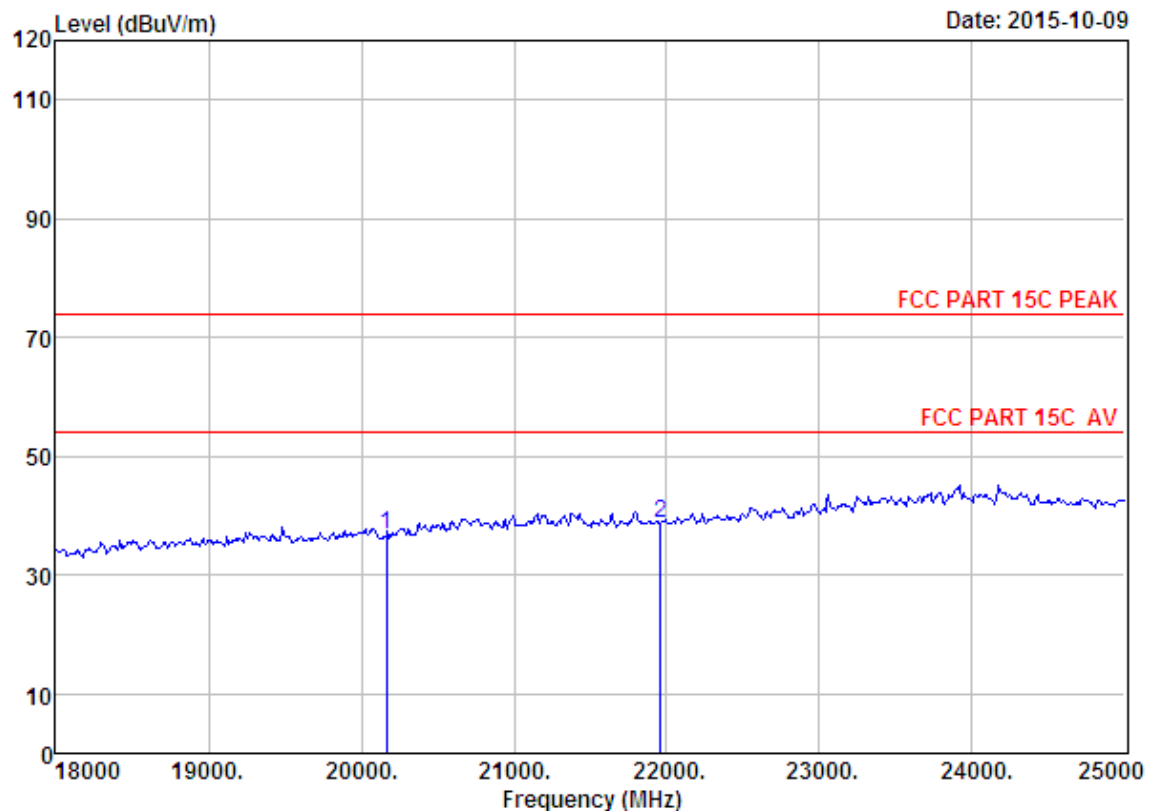

Site no. : 1# 966 chamber Data no. : 289
 Dis. / Ant. : 3m ANT ABOVE 18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Bluetooth Speaker
 Power : DC 3.7V
 M/N : SP-920BT
 Test Mode : 8-DPSK TX 2480MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	20163.00	46.07	19.75	36.54	7.67	36.95	74.00	37.05	Peak
2	21962.00	45.73	20.54	34.94	7.48	38.81	74.00	35.19	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

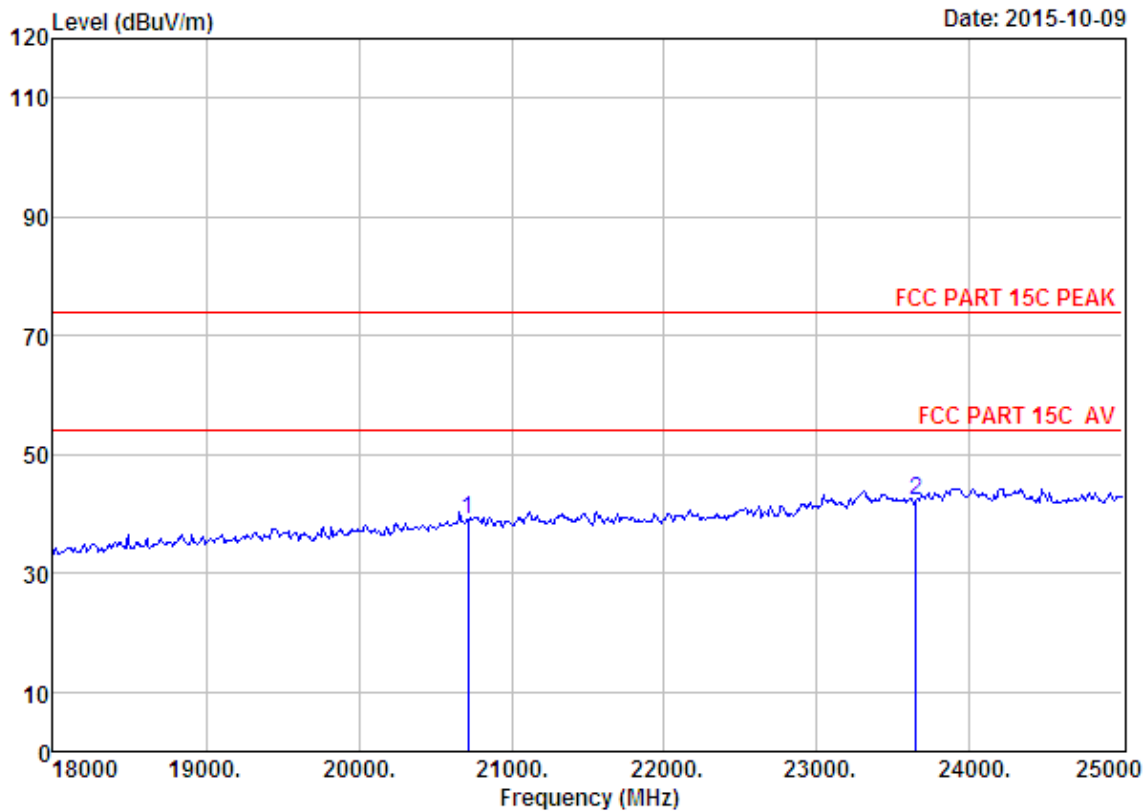

Site no. : 1# 966 chamber Data no. : 290
 Dis. / Ant. : 3m ANT ABOVE 18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Bluetooth Speaker
 Power : DC 3.7V
 M/N : SP-920BT
 Test Mode : 8-DPSK TX 2480MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	20716.00	46.12	20.00	36.05	9.05	39.12	74.00	34.88	Peak
2	23649.00	45.67	21.73	33.17	8.12	42.35	74.00	31.65	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

4. BAND EDGE COMPLIANCE

4.1. Limit

All the lower and upper band-edges emissions appearing within 2310MHz to 2390MHz and 2483.5MHz to 2500MHz restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions outside operation frequency band 2400MHz to 2483.5MHz shall be at least 20dB below the fundamental emissions, or comply with 15.209 limits.

4.2. Block Diagram of Test setup

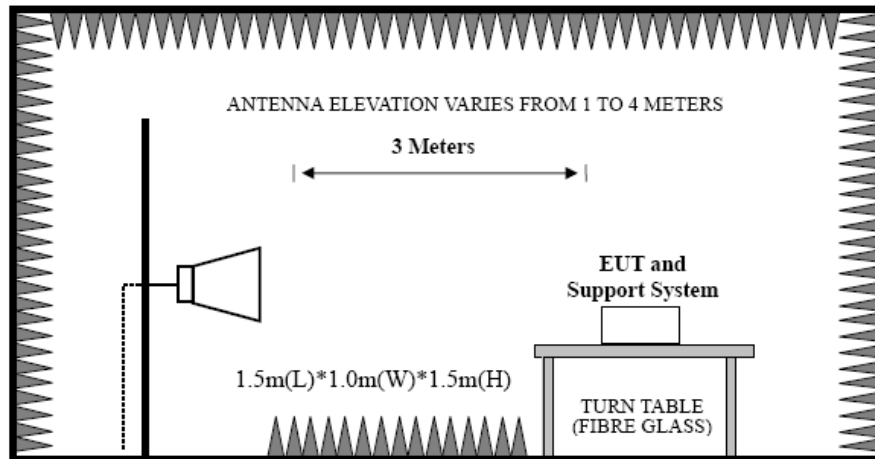

4.3. Test Procedure

EUT was placed on a turn table, which is 1.5 m high above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. Power on the EUT and let it working in test mode, then test it. EUT is set 3 meters away from the receiving antenna, which is mounted on a antenna tower. The antenna can be moved up and down between 1 meter and 4 meters to find out the maximum emission level. Both horizontal and vertical polarization of the antenna are set on test.

Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of emissions

Peak : RBW = 1MHz, VBW = 1MHz, Detector=PEAK detector, Sweep time = auto.

AV : RBW = 1MHz, VBW = 10Hz, Detector=PEAK detector, Sweep time = auto.


4.4. Test Result

EUT: Bluetooth Speaker
M/N: SP-920BT
Power: DC 3.7V
Test date: 2015-10-09~2015-10-10 Test site: 3m Chamber Tested by: Tony Tang
Test mode: Tx Mode (Hopping On & No Hopping)
Pass

Note: 1、 For emissions above 1GHz, if peak level comply with average limit, then the average level is deemed to comply with average limit.

2、 The frequency 2402MHz 、2441MHz and 2480MHz is fundamental frequency which no limit, the limit on plots is automatically generated by the software, it's not fundamental limit, we can't remove it.


4.5. Test Data

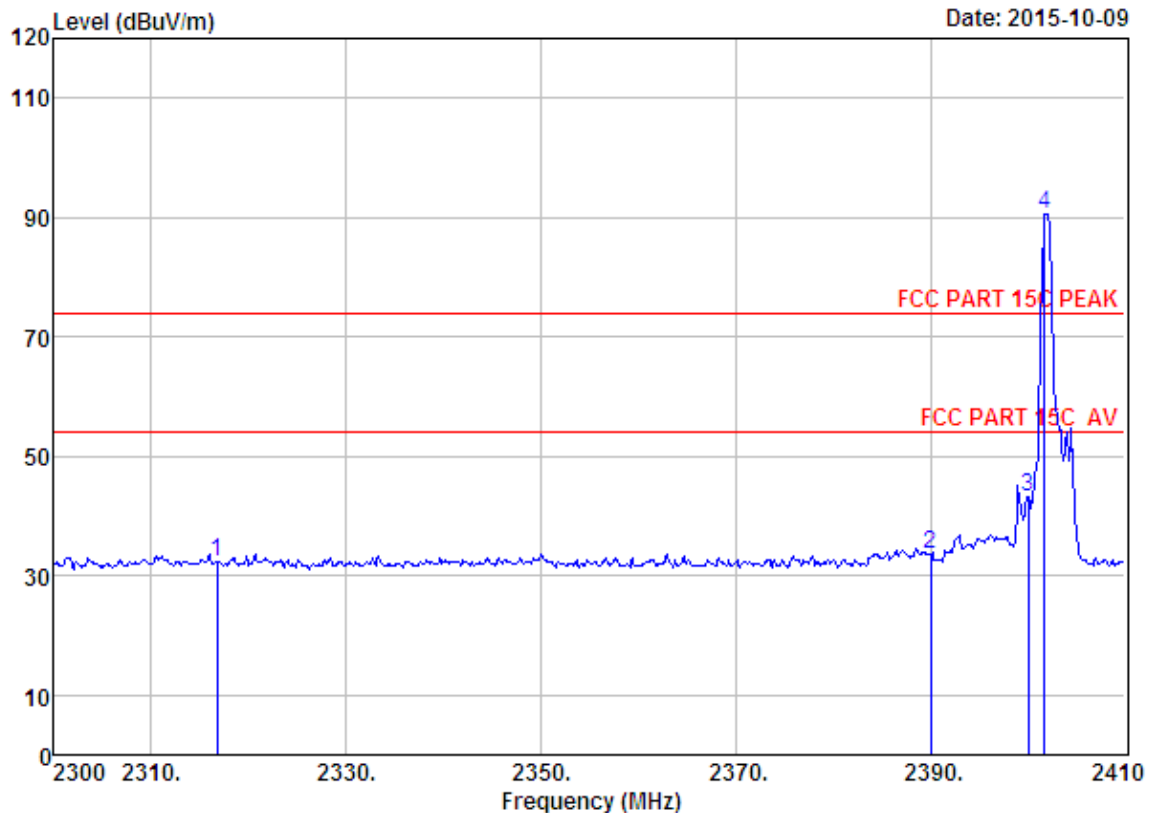

Site no. : 1# 966 chamber Data no. : 261
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Bluetooth Speaker
 Power : DC 3.7V
 M/N : SP-920BT
 Test Mode : GFSK TX 2402MHz(No Hopping)

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2316.72	27.76	6.53	34.60	32.53	32.22	74.00	41.78	Peak
2	2390.00	27.64	6.62	34.62	33.96	33.60	74.00	40.40	Peak
3	2400.00	27.61	6.62	34.64	43.51	43.10	74.00	30.90	Peak
4	2401.75	27.61	6.62	34.64	91.06	90.65	74.00	-16.65	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

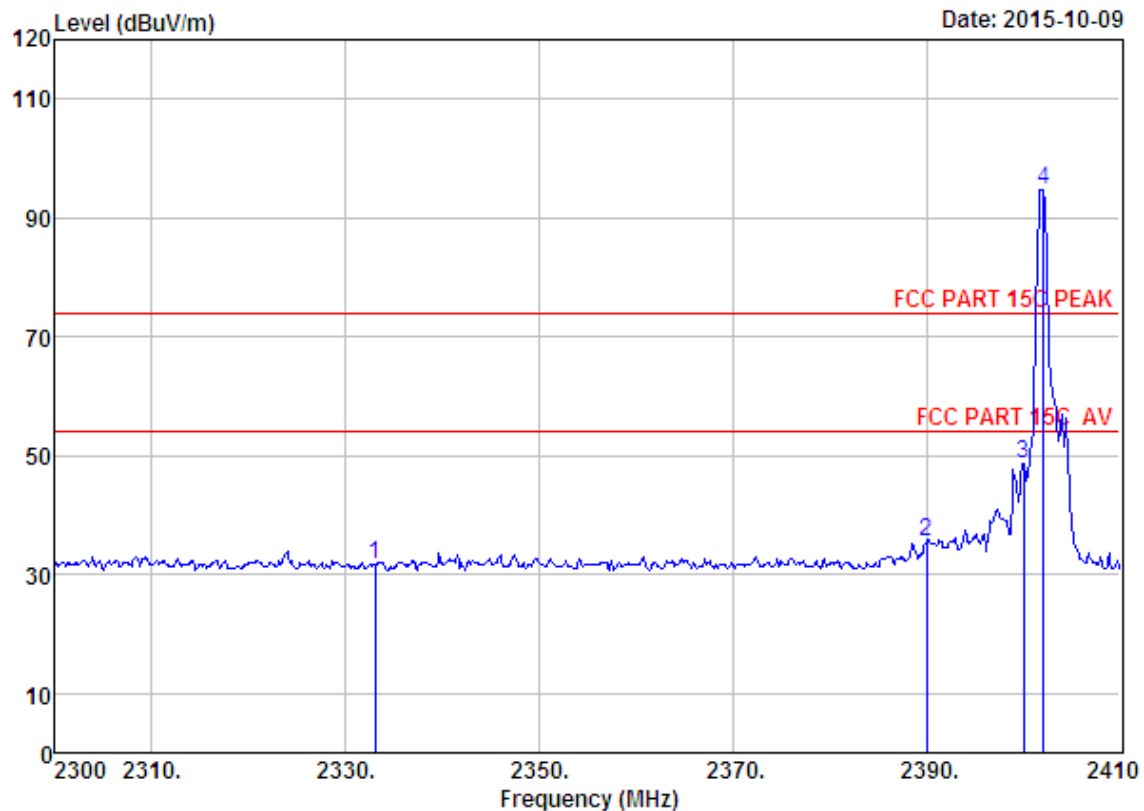

Site no. : 1# 966 chamber Data no. : 262
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Bluetooth Speaker
 Power : DC 3.7V
 M/N : SP-920BT
 Test Mode : GFSK TX 2402MHz(No Hopping)

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Remark
1	2333.00	27.73	6.54	34.59	32.14	31.82	74.00	42.18	Peak
2	2390.00	27.64	6.62	34.62	36.01	35.65	74.00	38.35	Peak
3	2400.00	27.61	6.62	34.64	49.09	48.68	74.00	25.32	Peak
4	2402.08	27.61	6.62	34.64	95.08	94.67	74.00	-20.67	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

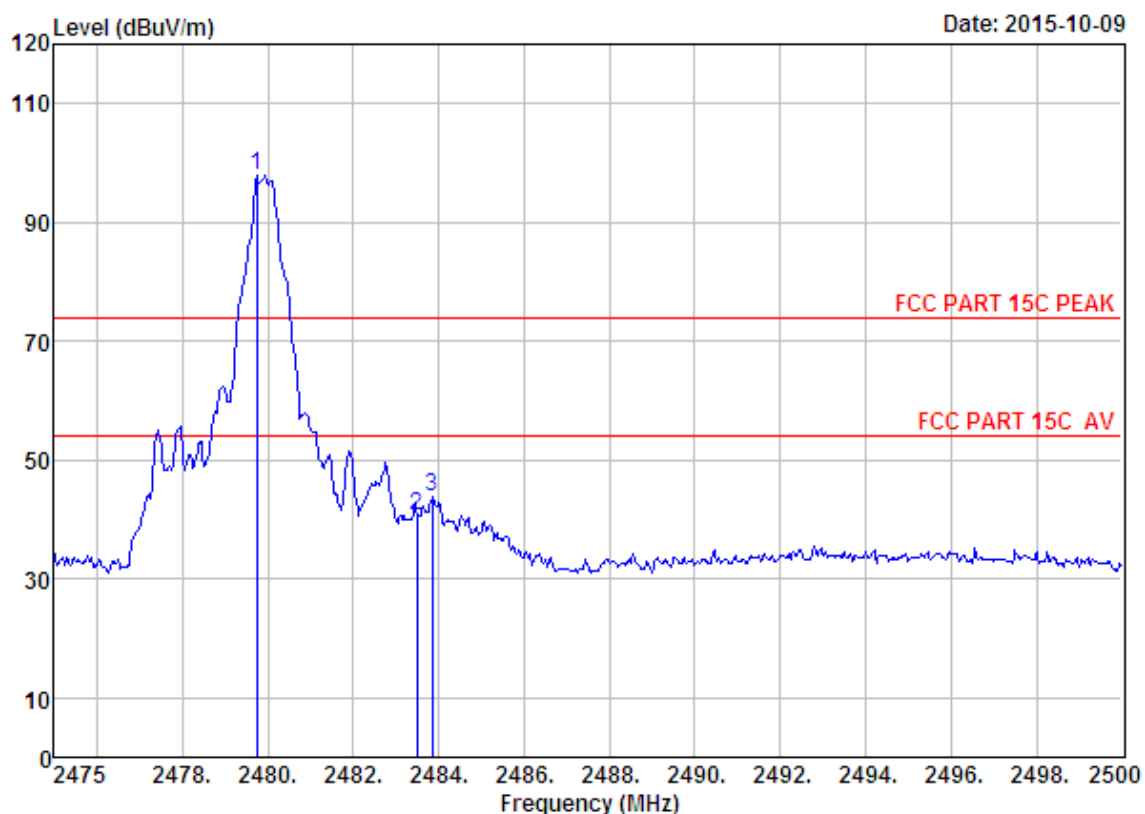

Site no. : 1# 966 chamber Data no. : 267
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Bluetooth Speaker
 Power : DC 3.7V
 M/N : SP-920BT
 Test Mode : GFSK TX 2480MHz(No Hopping)

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2479.75	27.58	6.71	35.11	98.90	98.08	74.00	-24.08	Peak
2	2483.50	27.58	6.71	35.11	41.60	40.78	74.00	33.22	Peak
3	2483.85	27.58	6.71	35.11	44.69	43.87	74.00	30.13	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

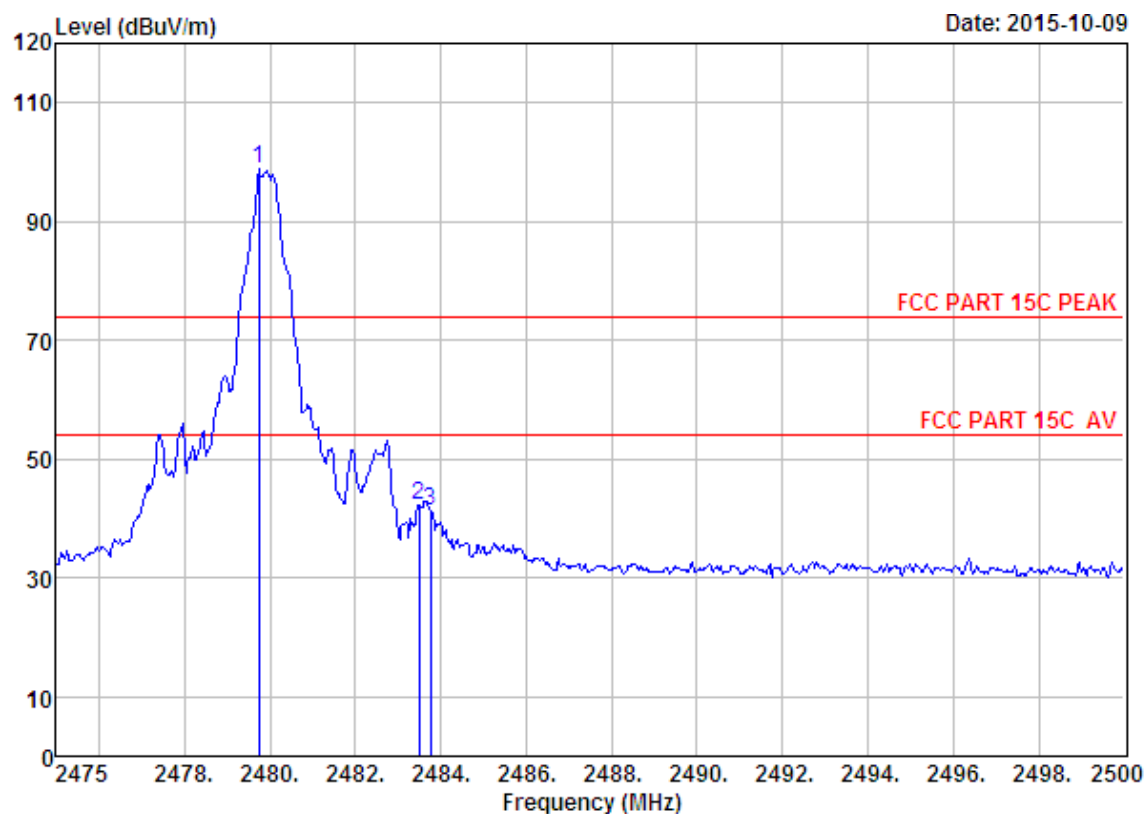

Site no. : 1# 966 chamber Data no. : 268
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Bluetooth Speaker
 Power : DC 3.7V
 I/N : SP-920BT
 Test Mode : GFSK TX 2480MHz (No Hopping)

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2479.75	27.58	6.71	35.11	99.64	98.82	74.00	-24.82	Peak
2	2483.50	27.58	6.71	35.11	43.11	42.29	74.00	31.71	Peak
3	2483.75	27.58	6.71	35.11	42.18	41.36	74.00	32.64	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

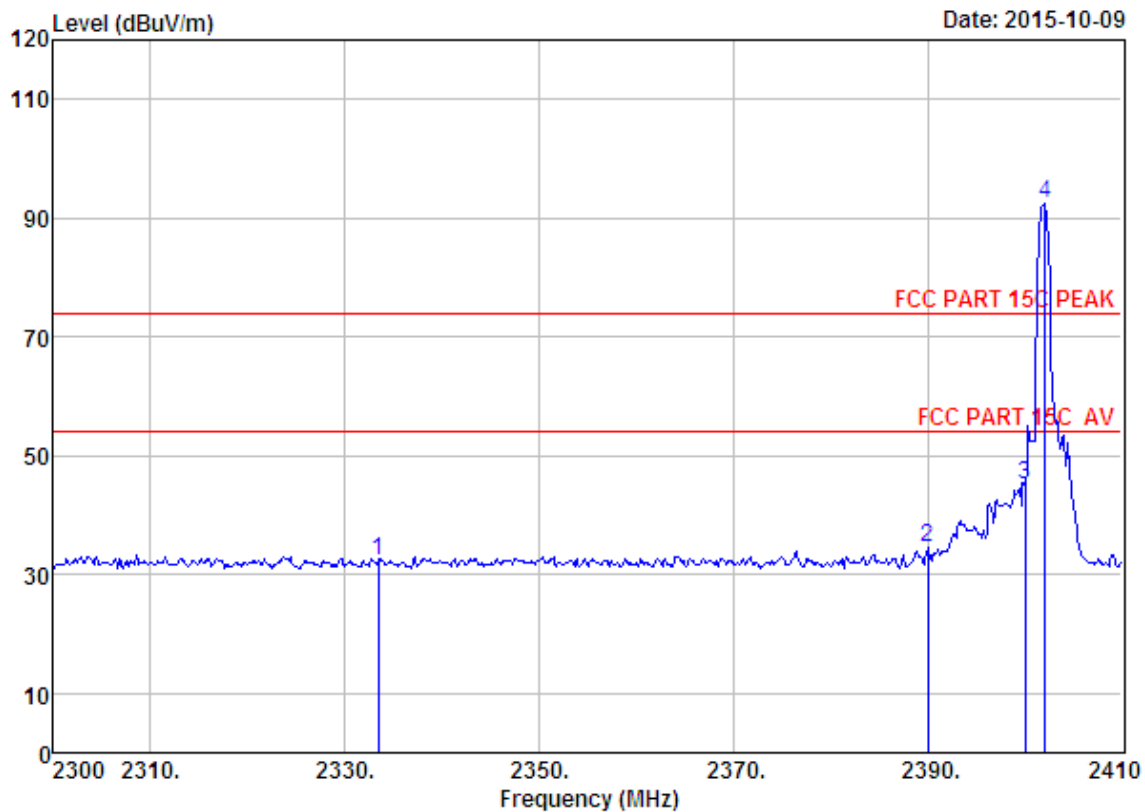

Site no. : 1# 966 chamber Data no. : 271
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Bluetooth Speaker
 Power : DC 3.7V
 M/N : SP-920BT
 Test Mode : 8-DPSK TX 2402MHz (No Hopping)

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2333.44	27.73	6.54	34.59	32.70	32.38	74.00	41.62	Peak
2	2390.00	27.64	6.62	34.62	34.97	34.61	74.00	39.39	Peak
3	2400.00	27.61	6.62	34.64	45.61	45.20	74.00	28.80	Peak
4	2402.08	27.61	6.62	34.64	93.00	92.59	74.00	-18.59	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

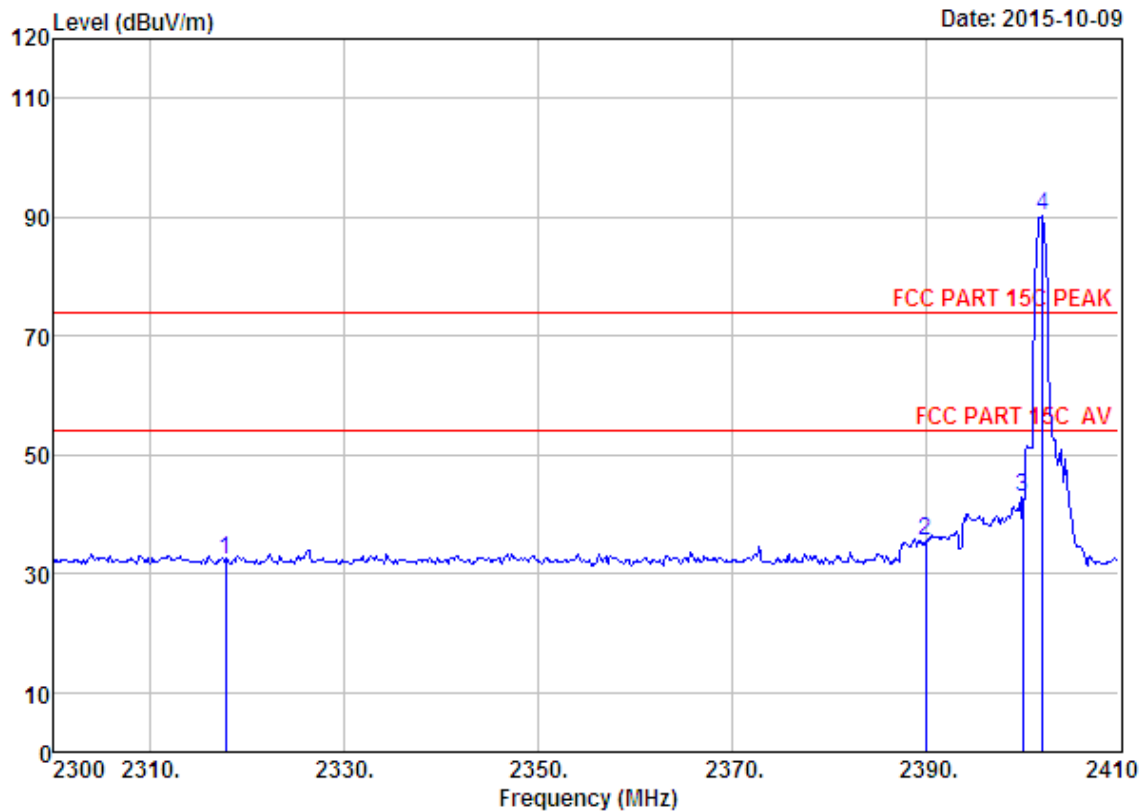

Site no. : 1# 966 chamber Data no. : 272
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Bluetooth Speaker
 Power : DC 3.7V
 M/N : SP-920BT
 Test Mode : 8-DPSK TX 2402MHz (No Hopping)

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2317.71	27.76	6.54	34.60	32.51	32.21	74.00	41.79	Peak
2	2390.00	27.64	6.62	34.62	35.95	35.59	74.00	38.41	Peak
3	2400.00	27.61	6.62	34.64	43.25	42.84	74.00	31.16	Peak
4	2402.08	27.61	6.62	34.64	90.66	90.25	74.00	-16.25	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

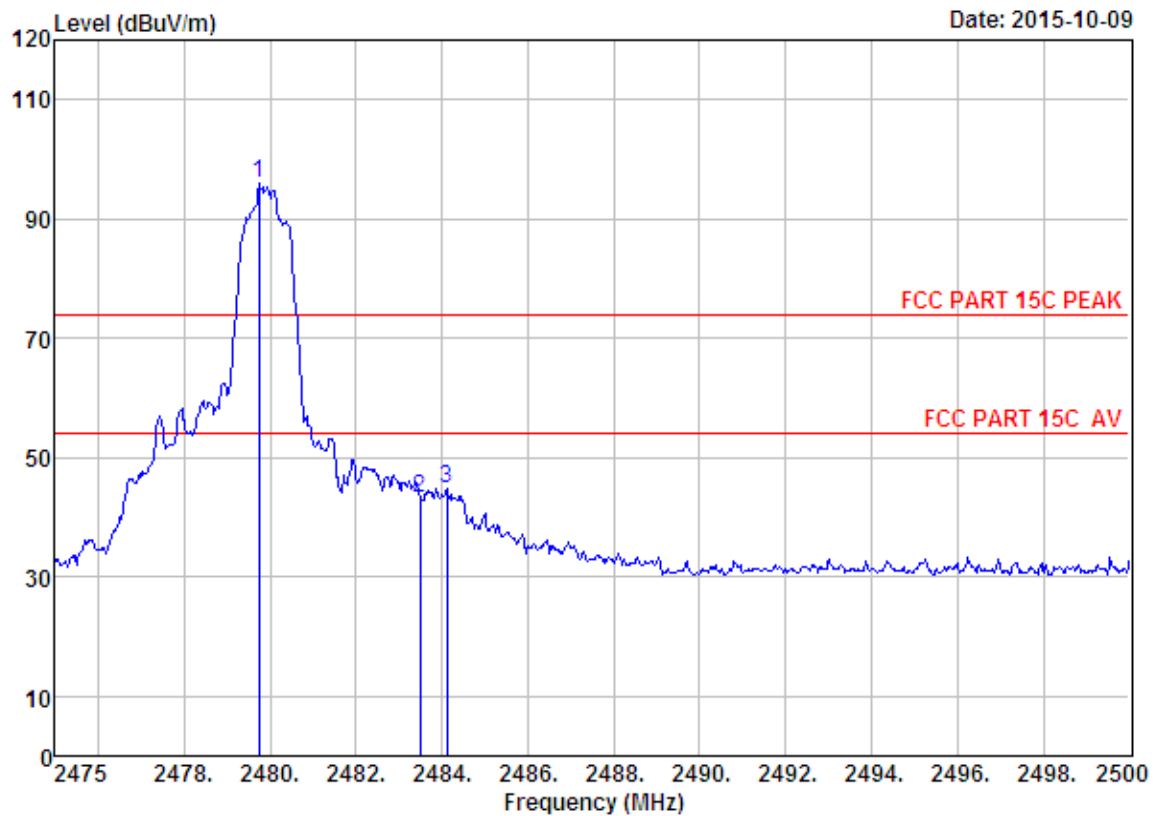

Site no. : 1# 966 chamber Data no. : 277
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Bluetooth Speaker
 Power : DC 3.7V
 M/N : SP-920BT
 Test Mode : 8-DPSK TX 2480MHz (No Hopping)

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2479.75	27.58	6.71	35.11	96.96	96.14	74.00	-22.14	Peak
2	2483.50	27.58	6.71	35.11	44.16	43.34	74.00	30.66	Peak
3	2484.13	27.58	6.71	35.11	45.52	44.70	74.00	29.30	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

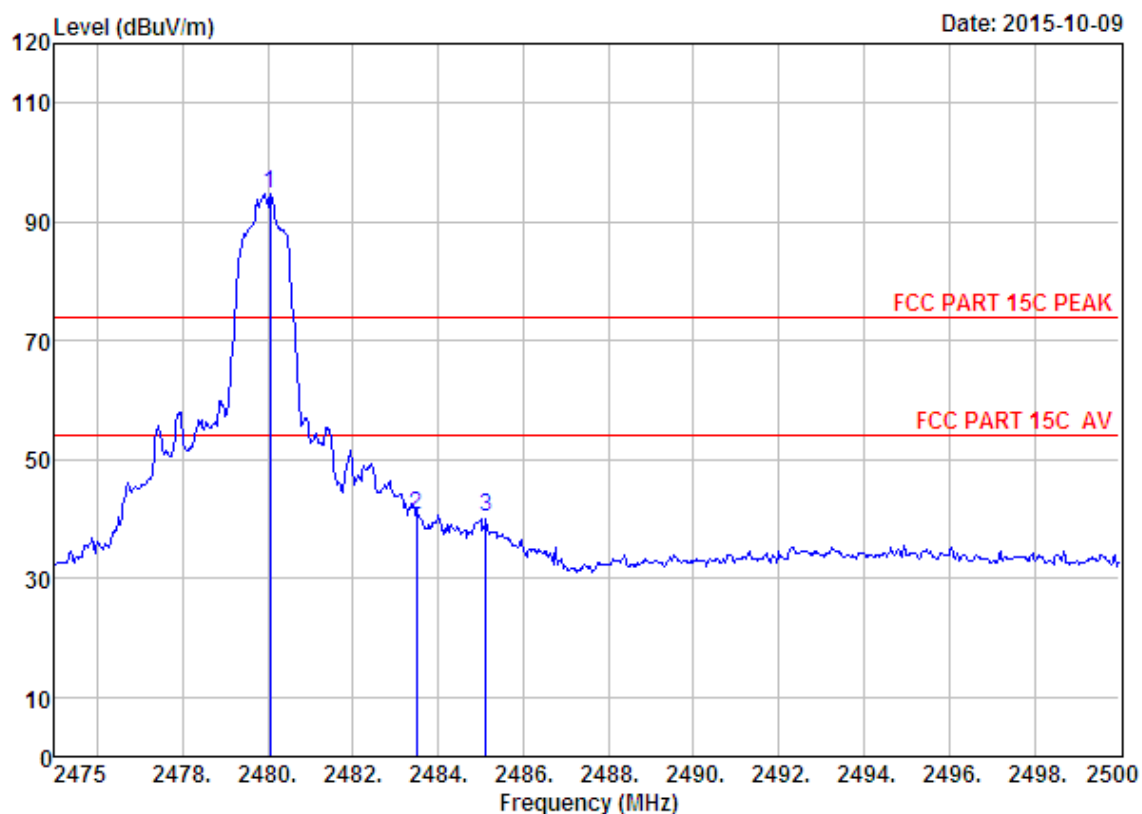

Site no. : 1# 966 chamber Data no. : 278
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Bluetooth Speaker
 Power : DC 3.7V
 M/N : SP-920BT
 Test Mode : 8-DPSK TX 2480MHz(No Hopping)

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2480.05	27.58	6.71	35.11	95.50	94.68	74.00	-20.68	Peak
2	2483.50	27.58	6.71	35.11	41.58	40.76	74.00	33.24	Peak
3	2485.13	27.58	6.71	35.11	41.19	40.37	74.00	33.63	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

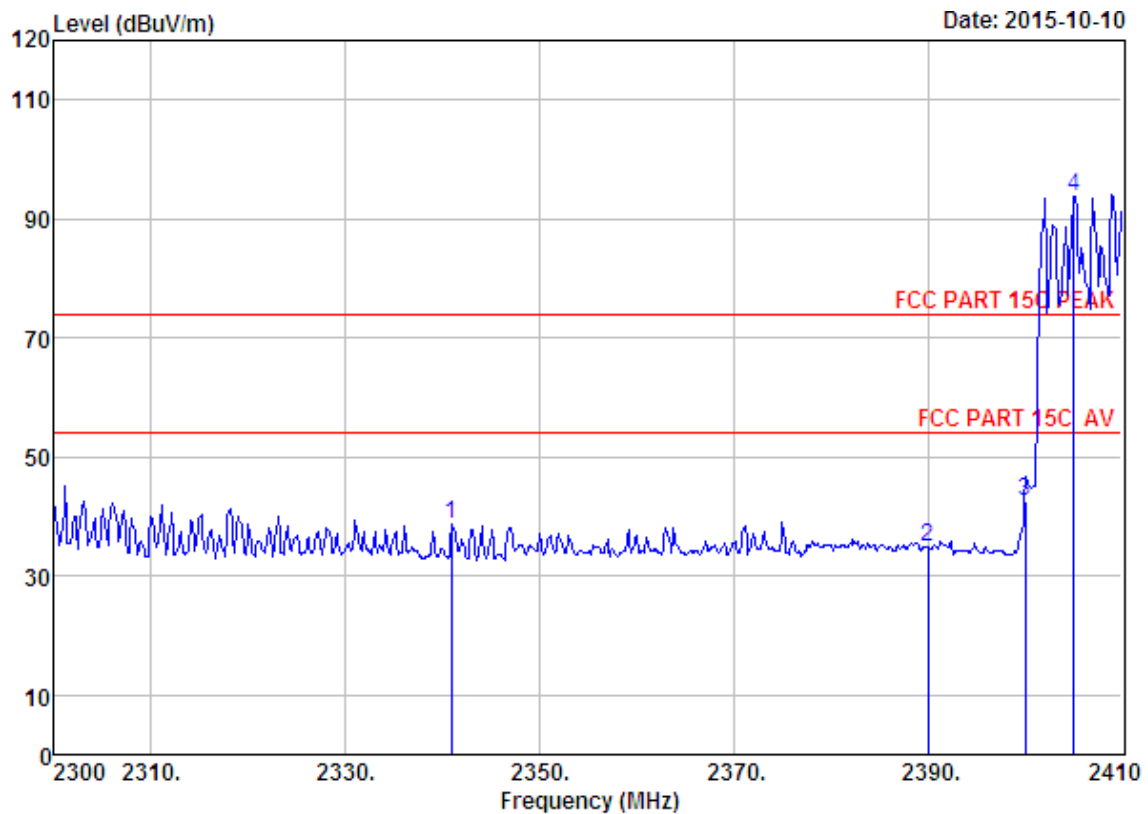

Site no. : 1# 966 chamber Data no. : 291
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Bluetooth Speaker
 Power : DC 3.7V
 M/N : SP-920BT
 Test Mode : GFSK TX 2402MHz(Hopping On)

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2340.92	27.70	6.56	34.22	38.58	38.62	74.00	35.38	Peak
2	2390.00	27.64	6.62	34.19	34.79	34.86	74.00	39.14	Peak
3	2400.00	27.61	6.62	34.18	42.60	42.65	74.00	31.35	Peak
4	2405.05	27.61	6.64	34.18	93.75	93.82	74.00	-19.82	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

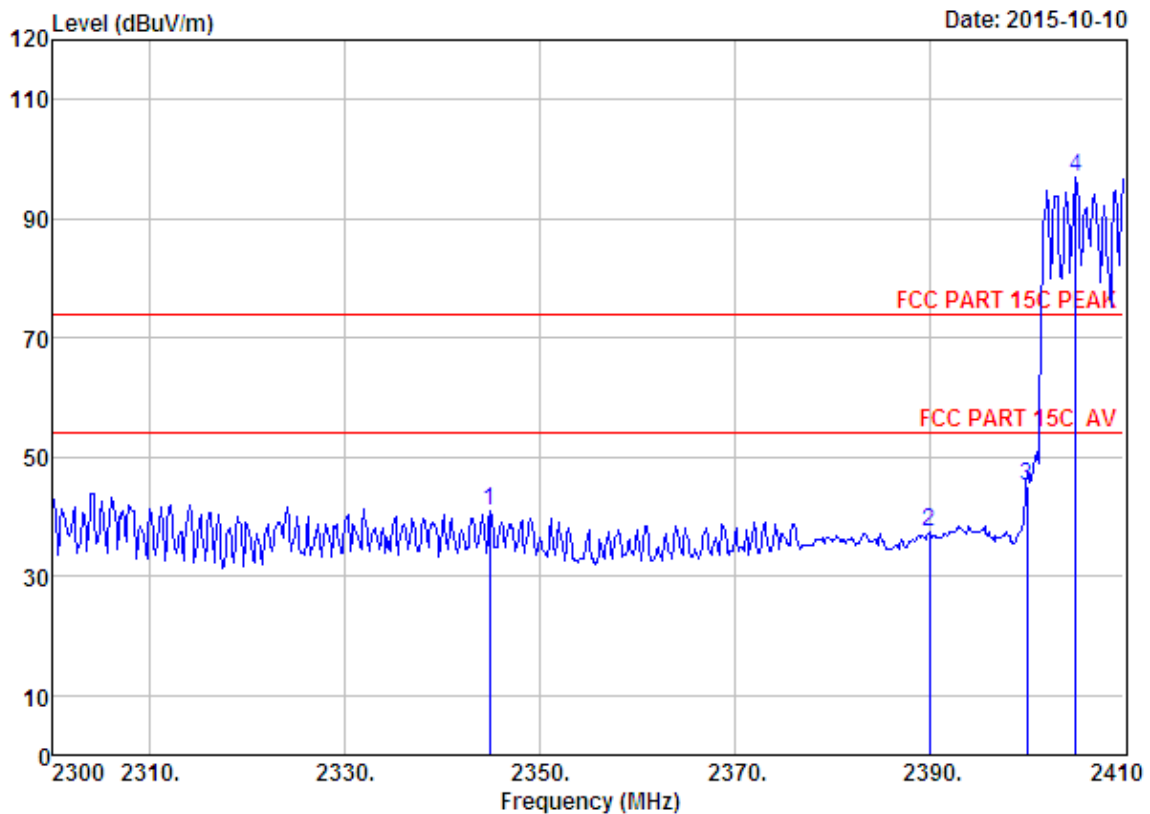

Site no. : 1# 966 chamber Data no. : 292
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Bluetooth Speaker
 Power : DC 3.7V
 M/N : SP-920BT
 Test Mode : GFSK TX 2402MHz(Hopping On)

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2344.88	27.70	6.56	34.22	40.81	40.85	74.00	33.15	Peak
2	2390.00	27.64	6.62	34.19	37.49	37.56	74.00	36.44	Peak
3	2400.00	27.61	6.62	34.18	45.09	45.14	74.00	28.86	Peak
4	2405.05	27.61	6.64	34.18	96.82	96.89	74.00	-22.89	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

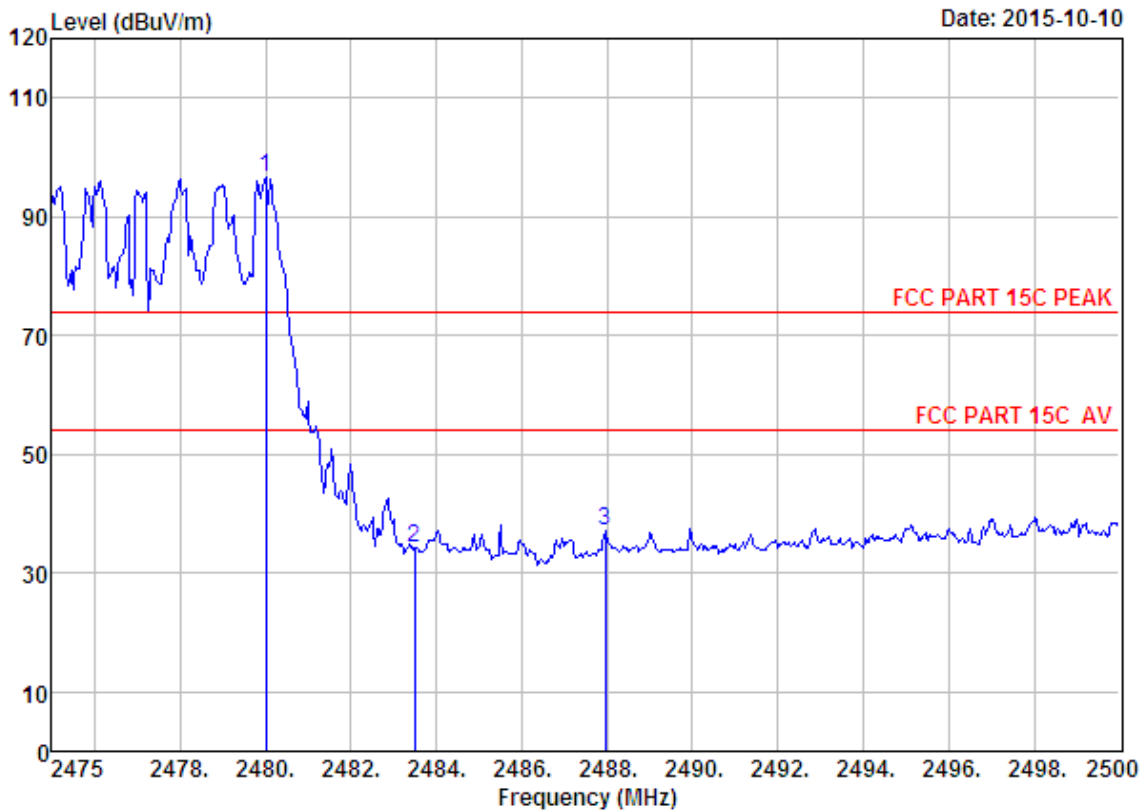

Site no. : 1# 966 chamber Data no. : 293
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Bluetooth Speaker
 Power : DC 3.7V
 M/N : SP-920BT
 Test Mode : GFSK TX 2480MHz(Hopping On)

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2480.00	27.58	6.71	34.03	96.46	96.72	74.00	-22.72	Peak
2	2483.50	27.58	6.71	34.03	34.01	34.27	74.00	39.73	Peak
3	2487.95	27.58	6.73	34.03	36.80	37.08	74.00	36.92	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

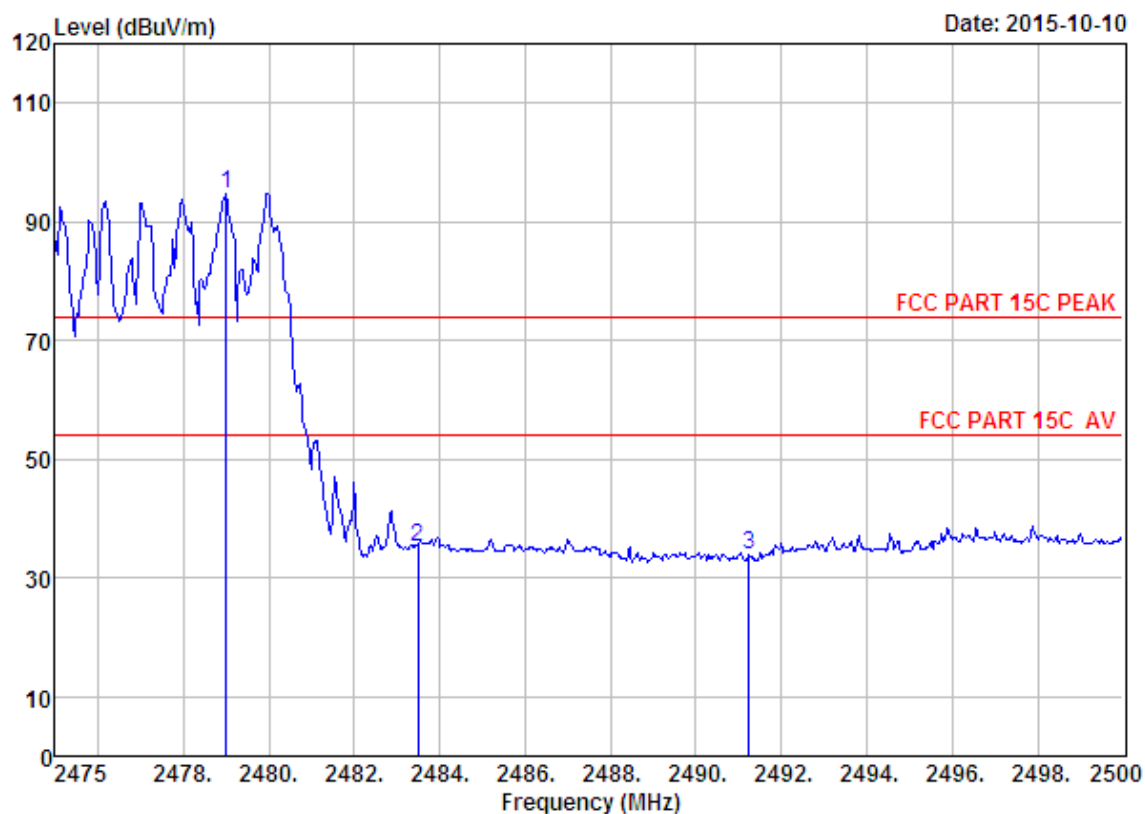

Site no. : 1# 966 chamber Data no. : 294
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Bluetooth Speaker
 Power : DC 3.7V
 M/N : SP-920BT
 Test Mode : GFSK TX 2480MHz (Hopping On)

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2479.00	27.58	6.71	34.03	94.56	94.82	74.00	-20.82	Peak
2	2483.50	27.58	6.71	34.03	35.06	35.32	74.00	38.68	Peak
3	2491.25	27.58	6.73	34.03	33.53	33.81	74.00	40.19	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

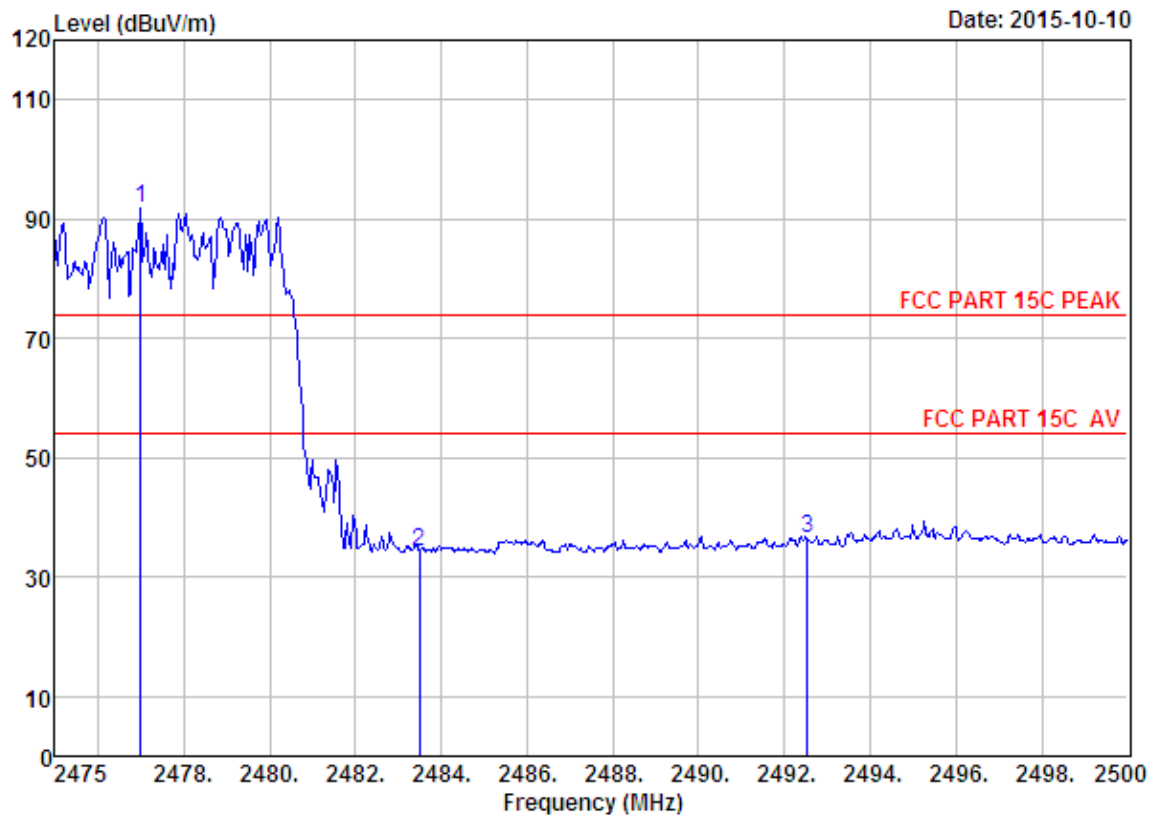

Site no. : 1# 966 chamber Data no. : 295
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Bluetooth Speaker
 Power : DC 3.7V
 M/N : SP-920BT
 Test Mode : 8-DPSK TX 2480MHz(Hopping On)

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2477.00	27.58	6.71	34.03	91.48	91.74	74.00	-17.74	Peak
2	2483.50	27.58	6.71	34.03	33.96	34.22	74.00	39.78	Peak
3	2492.53	27.58	6.73	34.03	36.33	36.61	74.00	37.39	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

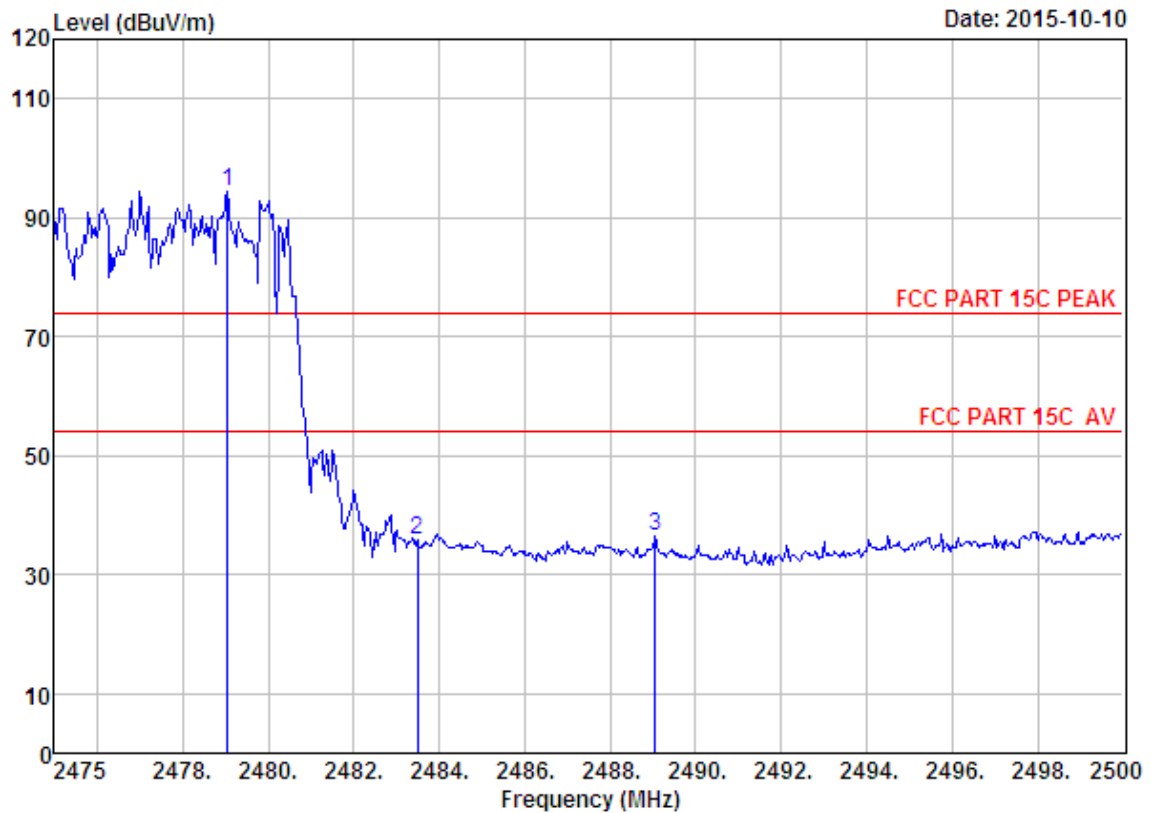

Site no. : 1# 966 chamber Data no. : 296
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Bluetooth Speaker
 Power : DC 3.7V
 M/N : SP-920BT
 Test Mode : 8-DPSK TX 2480MHz(Hopping On)

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2479.05	27.58	6.71	34.03	94.29	94.55	74.00	-20.55	Peak
2	2483.50	27.58	6.71	34.03	35.65	35.91	74.00	38.09	Peak
3	2489.05	27.58	6.73	34.03	36.08	36.36	74.00	37.64	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

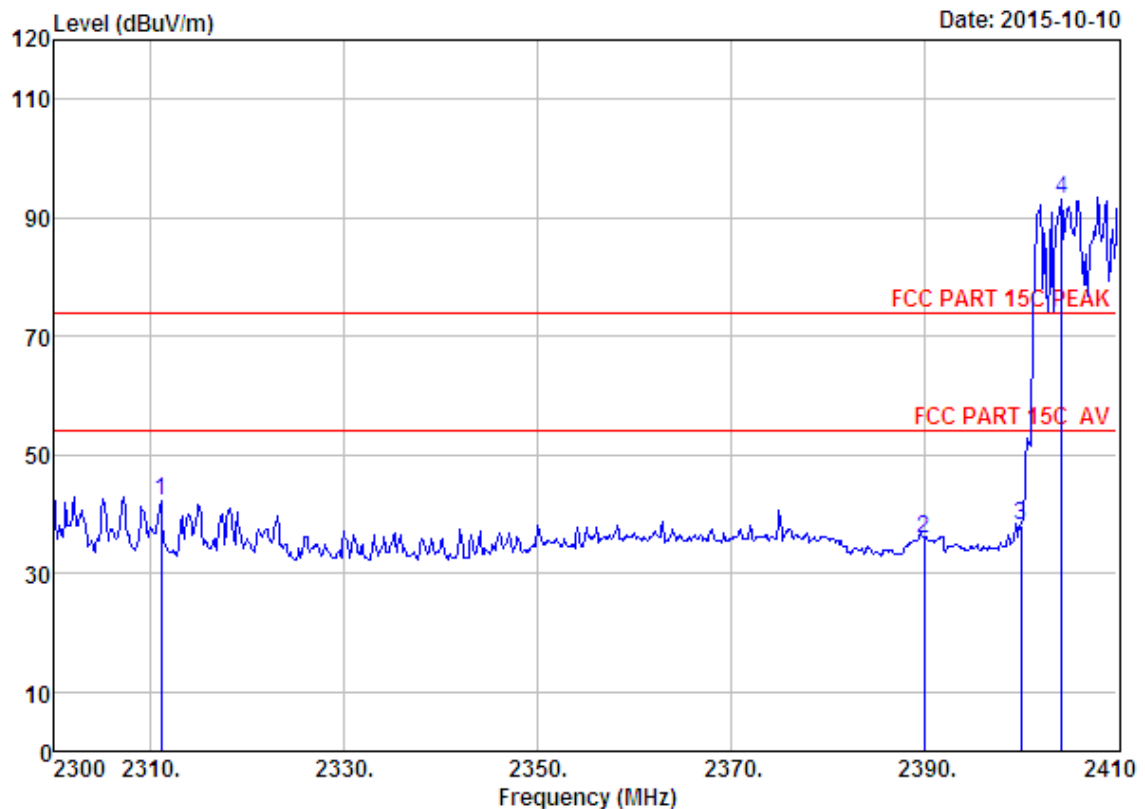

Site no. : 1# 966 chamber Data no. : 297
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.6°;Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Bluetooth Speaker
 Power : DC 3.7V
 M/N : SP-920BT
 Test Mode : 8-DPSK TX 2402MHz(Hopping On)

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2311.00	27.76	6.53	34.24	42.34	42.39	74.00	31.61	Peak
2	2390.00	27.64	6.62	34.19	35.87	35.94	74.00	38.06	Peak
3	2400.00	27.61	6.62	34.18	38.05	38.10	74.00	35.90	Peak
4	2404.28	27.61	6.64	34.18	93.10	93.17	74.00	-19.17	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

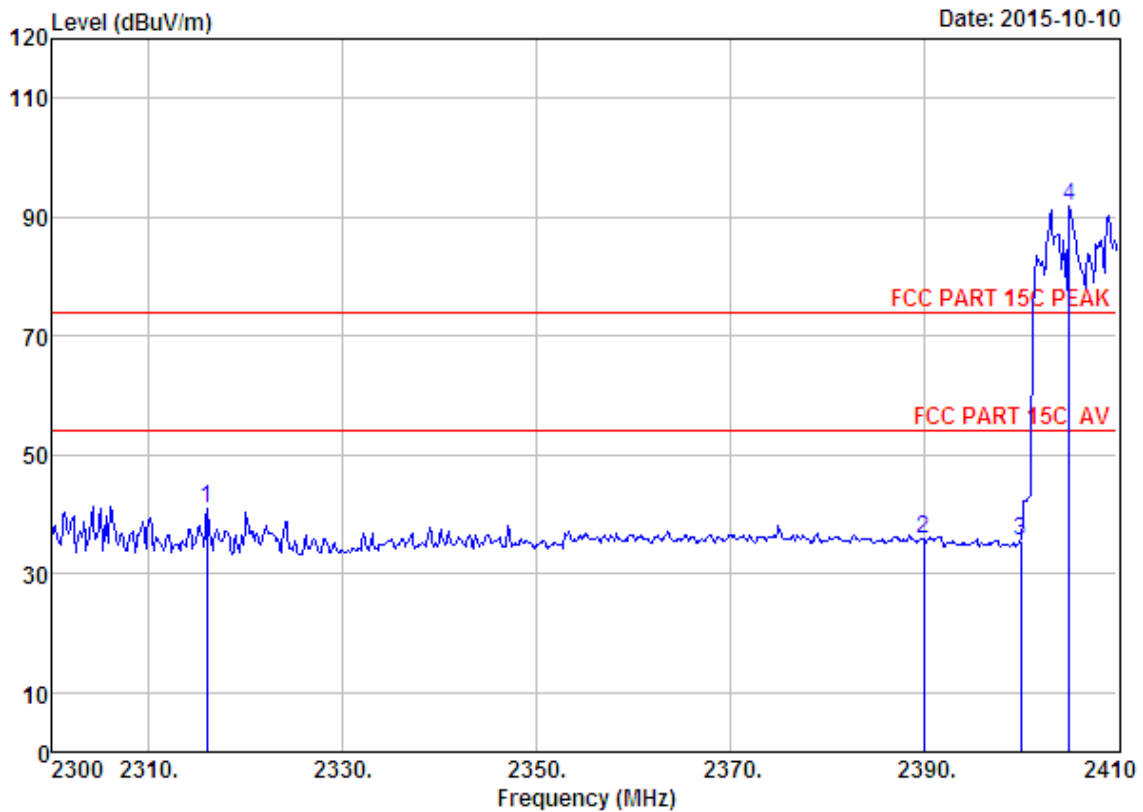

Site no. : 1# 966 chamber Data no. : 298
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Bluetooth Speaker
 Power : DC 3.7V
 M/N : SP-920BT
 Test Mode : 8-DPSK TX 2402MHz(Hopping On)

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2315.95	27.76	6.53	34.24	41.04	41.09	74.00	32.91	Peak
2	2390.00	27.64	6.62	34.19	35.73	35.80	74.00	38.20	Peak
3	2400.00	27.61	6.62	34.18	35.56	35.61	74.00	38.39	Peak
4	2405.05	27.61	6.64	34.18	91.64	91.71	74.00	-17.71	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

5. POWER LINE CONDUCTED EMISSIONS

5.1. Limit

Frequency	Maximum RF Line Voltage	
	Quasi-Peak Level dB(μ V)	Average Level dB(μ V)
150kHz ~ 500kHz	66 ~ 56*	56 ~ 46*
500kHz ~ 5MHz	56	46
5MHz ~ 30MHz	60	50

Notes: 1. * Decreasing linearly with logarithm of frequency.

2. The lower limit shall apply at the transition frequencies.

5.2. Test Procedure

The EUT was placed on a non-metallic table, 10cm above the ground plane. The EUT was charged from PC's USB port which connected to the power mains through a line impedance stabilization network (L.I.S.N. 1#).. Both sides of AC line are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to ANSI C63.4: 2009 on Conducted Emission Test.


The bandwidth of test receiver (R & S ESHS30) is set at 10kHz.

The frequency range from 150kHz to 30MHz is checked.

5.3. Test Result


0.15MHz—30MHz Conducted emissison Test result		
EUT: Bluetooth Speaker	M/N:SP-920BT	
Power: DC 5V From PC Input AC 120V/60Hz DC 5V From PC Input AC 240V/60Hz		
Test date: 2015-10-08	Test site: 3m Chamber	Tested by: Tony.Tang
Test mode: Tx Mode		
Pass		

5.4. Test data

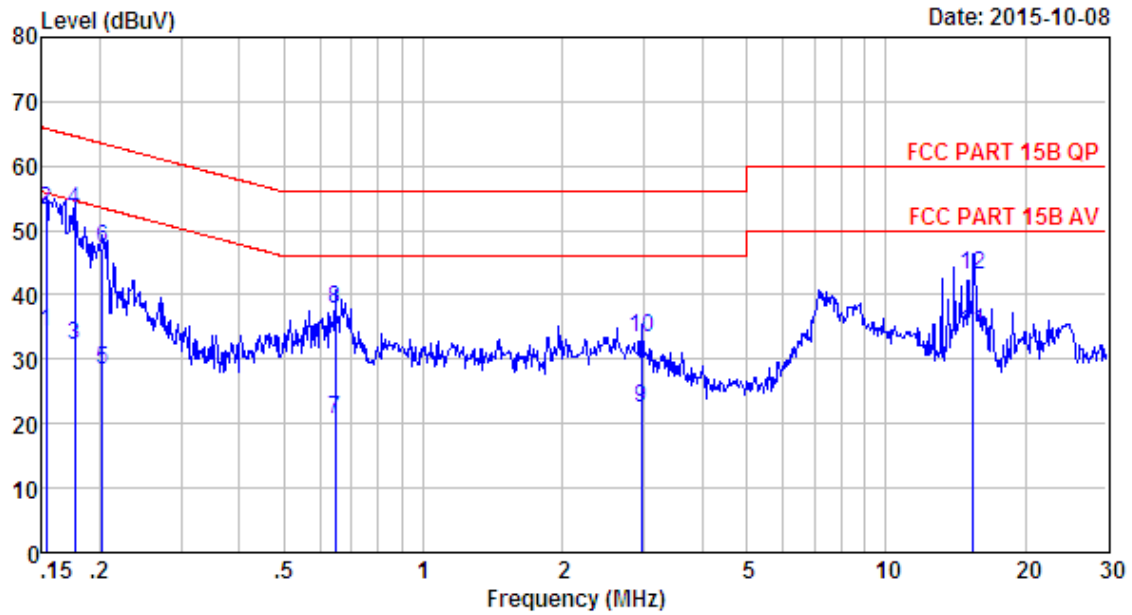


Site no : 844 Shield Room
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa LINE
 Limit : FCC PART 15B QP
 Engineer : Tong
 EUT : Bluetooth Speaker
 Power : DC 5V From PC Input AC 240V/60Hz
 M/N : SP-920BT
 Test Mode : TX Mode

	Freq. (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.15	9.61	9.81	14.72	34.14	55.82	21.68	Average
2	0.15	9.61	9.81	33.72	53.14	65.82	12.68	QP
3	0.18	9.61	9.80	12.85	32.26	54.64	22.38	Average
4	0.18	9.61	9.80	33.85	53.26	64.64	11.38	QP
5	0.20	9.61	9.80	8.89	28.30	53.49	25.19	Average
6	0.20	9.61	9.80	27.89	47.30	63.49	16.19	QP
7	0.64	9.60	9.81	1.25	20.66	46.00	25.34	Average
8	0.64	9.60	9.81	18.25	37.66	56.00	18.34	QP
9	2.96	9.63	9.85	2.93	22.41	46.00	23.59	Average
10	2.96	9.63	9.85	13.93	33.41	56.00	22.59	QP
11	15.47	9.68	9.94	14.62	34.24	50.00	15.76	Average
12	15.47	9.68	9.94	23.62	43.24	60.00	16.76	QP

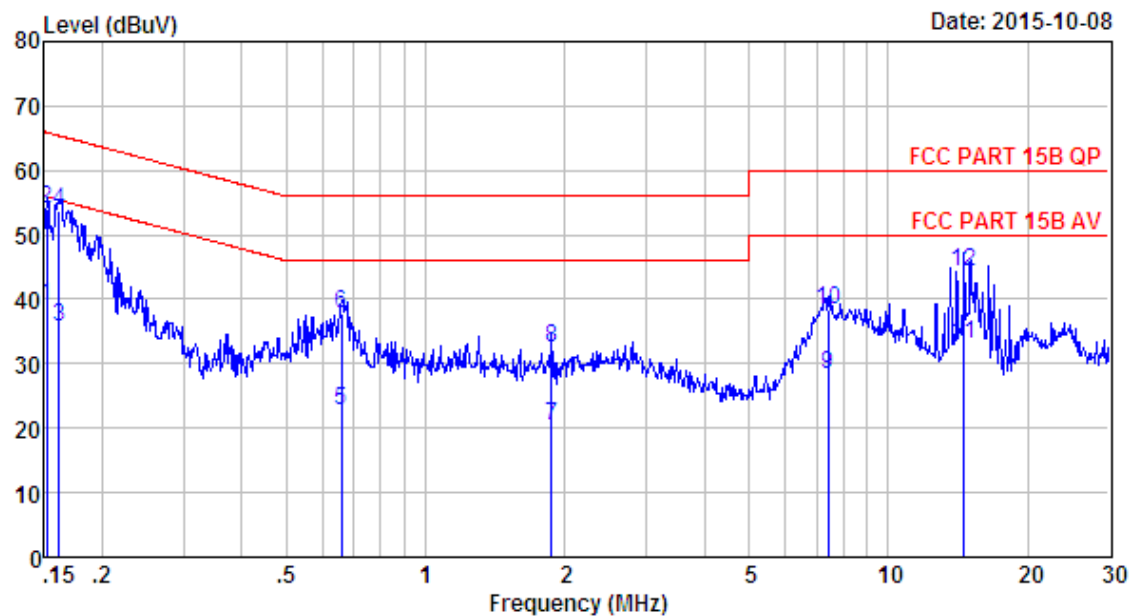


Site no : 844 Shield Room
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa NEUTRAL
 Limit : FCC PART 15B QP
 Engineer : Tong
 EUT : Bluetooth Speaker
 Power : DC 5V From PC Input AC 240V/60Hz
 M/N : SP-920BT
 Test Mode : TX Mode

	Freq. (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.15	9.46	9.81	19.62	38.89	55.91	17.02	Average
2	0.15	9.46	9.81	34.62	53.89	65.91	12.02	QP
3	0.16	9.50	9.81	16.32	35.63	55.38	19.75	Average
4	0.16	9.50	9.81	34.32	53.63	65.38	11.75	QP
5	0.66	9.62	9.81	3.41	22.84	46.00	23.16	Average
6	0.66	9.62	9.81	18.41	37.84	56.00	18.16	QP
7	1.87	9.62	9.85	1.00	20.47	46.00	25.53	Average
8	1.87	9.62	9.85	13.00	32.47	56.00	23.53	QP
9	7.41	9.67	9.87	8.81	28.35	50.00	21.65	Average
10	7.41	9.67	9.87	18.81	38.35	60.00	21.65	QP
11	14.59	9.74	9.93	13.52	33.19	50.00	16.81	Average
12	14.59	9.74	9.93	24.52	44.19	60.00	15.81	QP

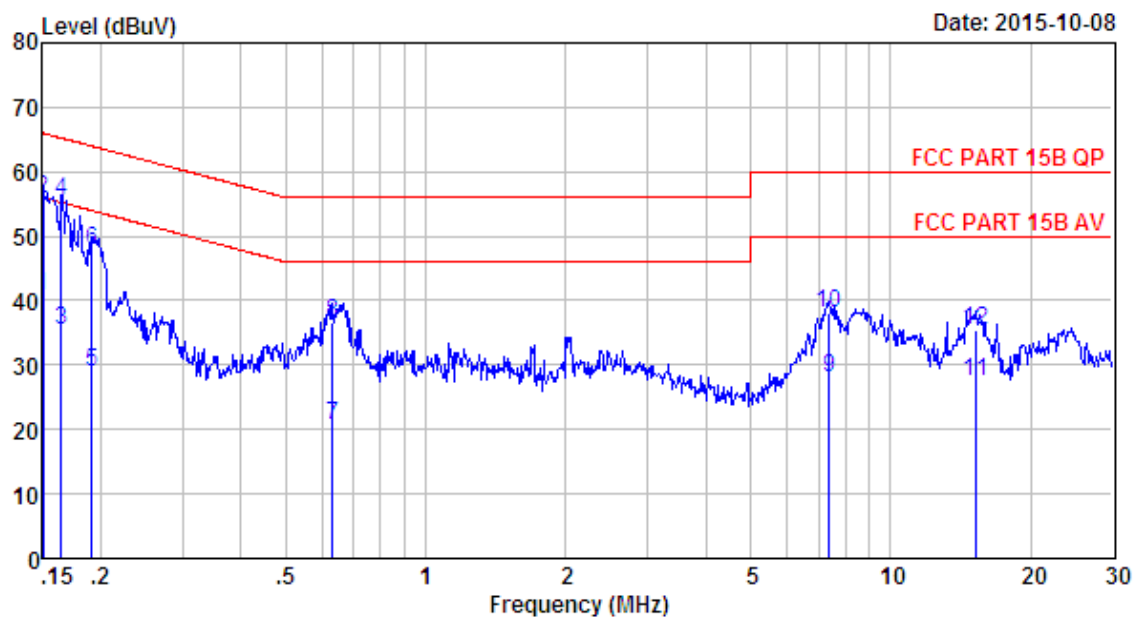

Site no : 844 Shield Room
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa NEUTRAL
 Limit : FCC PART 15B QP
 Engineer : Tong
 EUT : Bluetooth Speaker
 Power : DC 5V From PC Input AC 120V/60Hz
 M/N : SP-920BT
 Test Mode : TX Mode

	Freq. (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.15	9.46	9.81	21.46	40.73	56.00	15.27	Average
2	0.15	9.46	9.81	36.46	55.73	66.00	10.27	QP
3	0.16	9.50	9.81	16.12	35.43	55.25	19.82	Average
4	0.16	9.50	9.81	36.12	55.43	65.25	9.82	QP
5	0.19	9.58	9.80	9.41	28.79	53.98	25.19	Average
6	0.19	9.58	9.80	28.41	47.79	63.98	16.19	QP
7	0.63	9.62	9.81	1.23	20.66	46.00	25.34	Average
8	0.63	9.62	9.81	17.23	36.66	56.00	19.34	QP
9	7.37	9.67	9.87	8.43	27.97	50.00	22.03	Average
10	7.37	9.67	9.87	18.43	37.97	60.00	22.03	QP
11	15.23	9.74	9.93	7.79	27.46	50.00	22.54	Average
12	15.23	9.74	9.93	15.79	35.46	60.00	24.54	QP

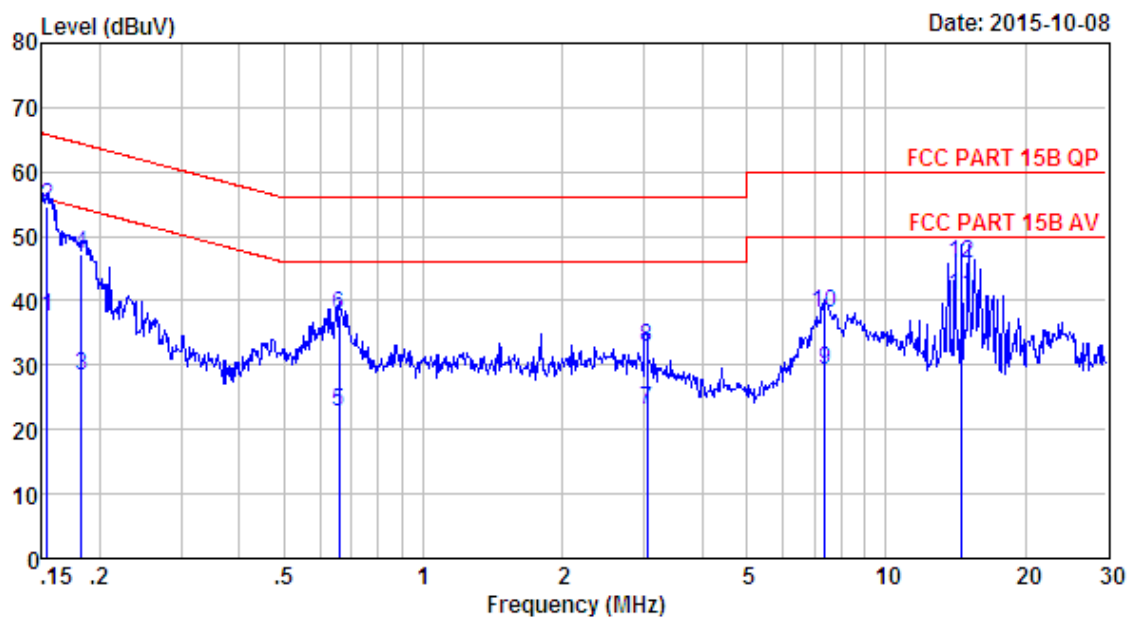


Site no : 844 Shield Room
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa LINE
 Limit : FCC PART 15B QP
 Engineer : Tong
 EUT : Bluetooth Speaker
 Power : DC 5V From PC Input AC 120V/60Hz
 M/N : SP-920BT
 Test Mode : TX Mode

	Freq. (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.15	9.61	9.81	18.15	37.57	55.78	18.21	Average
2	0.15	9.61	9.81	35.15	54.57	65.78	11.21	QP
3	0.18	9.61	9.80	8.94	28.35	54.37	26.02	Average
4	0.18	9.61	9.80	27.94	47.35	64.37	17.02	QP
5	0.66	9.59	9.81	3.34	22.74	46.00	23.26	Average
6	0.66	9.59	9.81	18.34	37.74	56.00	18.26	QP
7	3.04	9.63	9.85	3.43	22.91	46.00	23.09	Average
8	3.04	9.63	9.85	13.43	32.91	56.00	23.09	QP
9	7.37	9.66	9.87	9.68	29.21	50.00	20.79	Average
10	7.37	9.66	9.87	18.68	38.21	60.00	21.79	QP
11	14.59	9.67	9.93	21.11	40.71	50.00	9.29	Average
12	14.59	9.67	9.93	26.11	45.71	60.00	14.29	QP

6. TEST SETUP PHOTO


Conducted Test

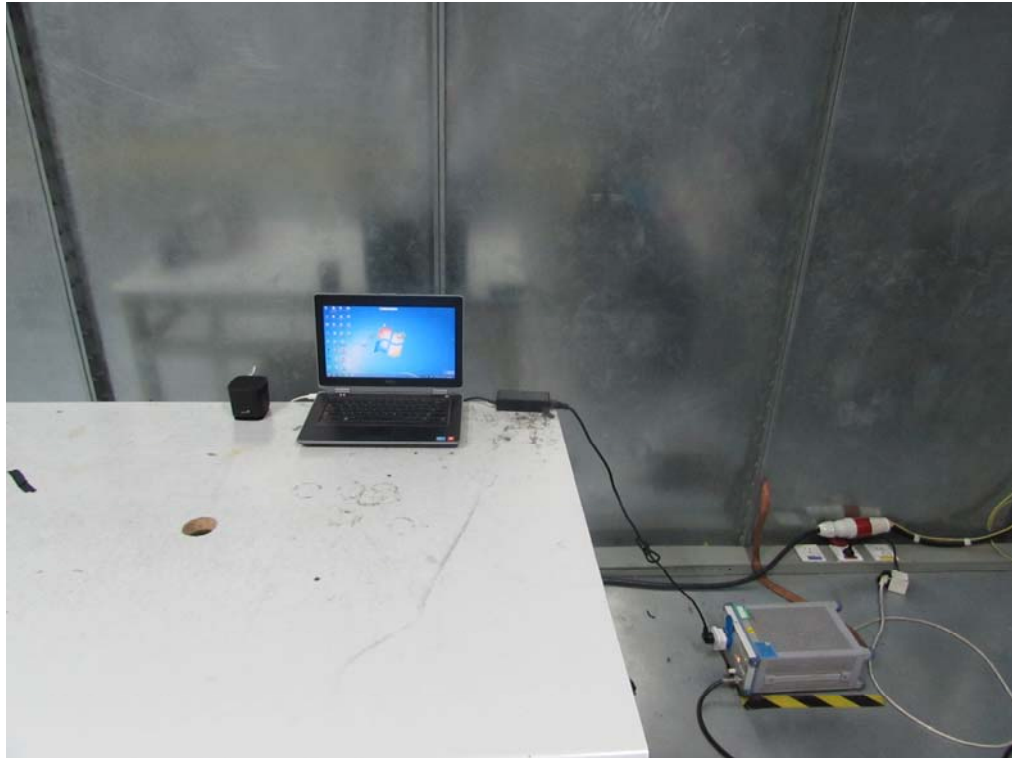

Radiated Test (30-1000 MHz)



Radiated Test (1000-25000 MHz)

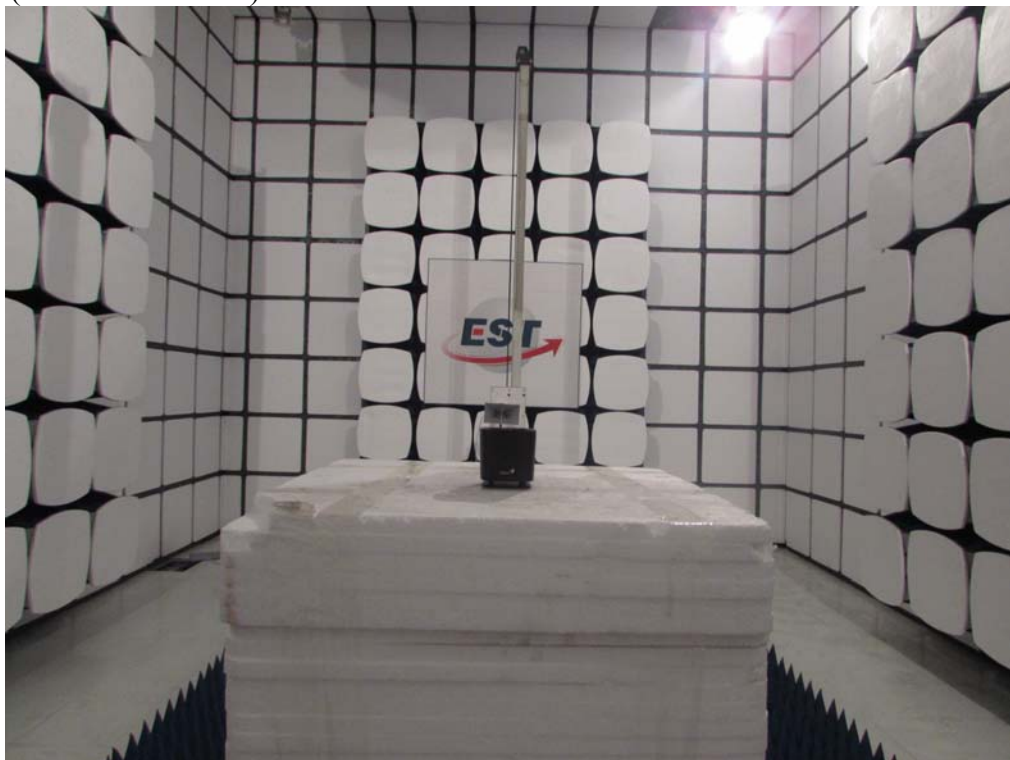

7. PHOTOS OF EUT


External Photos
M/N: SP-920BT





External Photos
M/N: SP-920BT




External Photos
M/N: SP-920BT

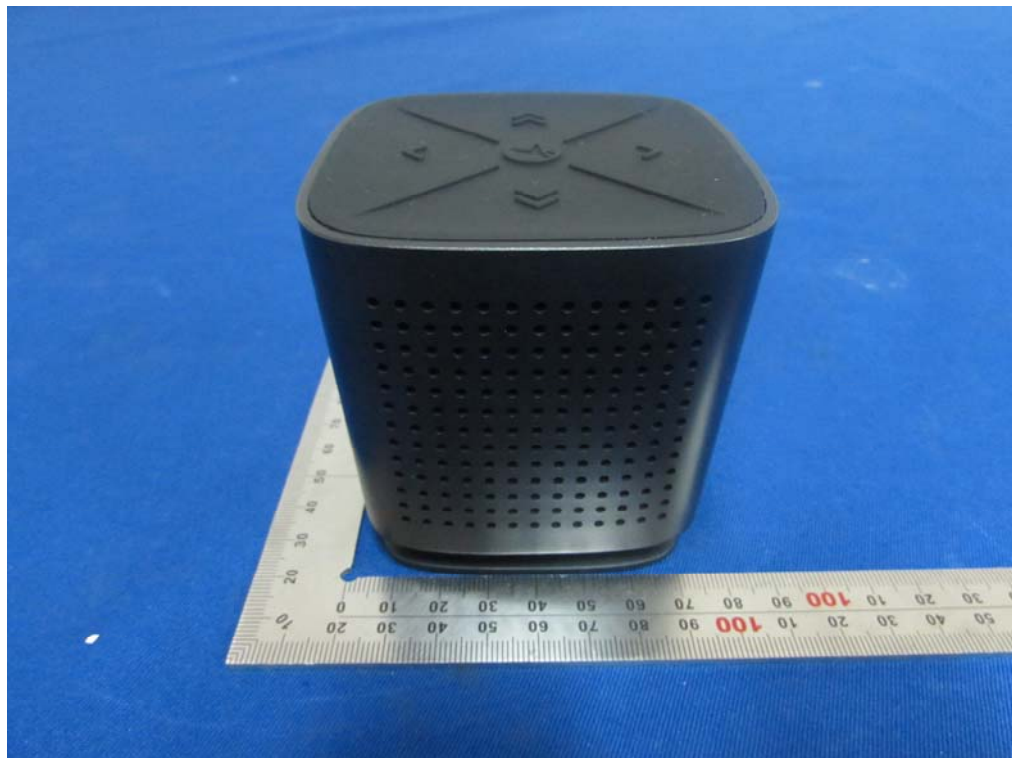


Internal Photos
M/N: SP-920BT

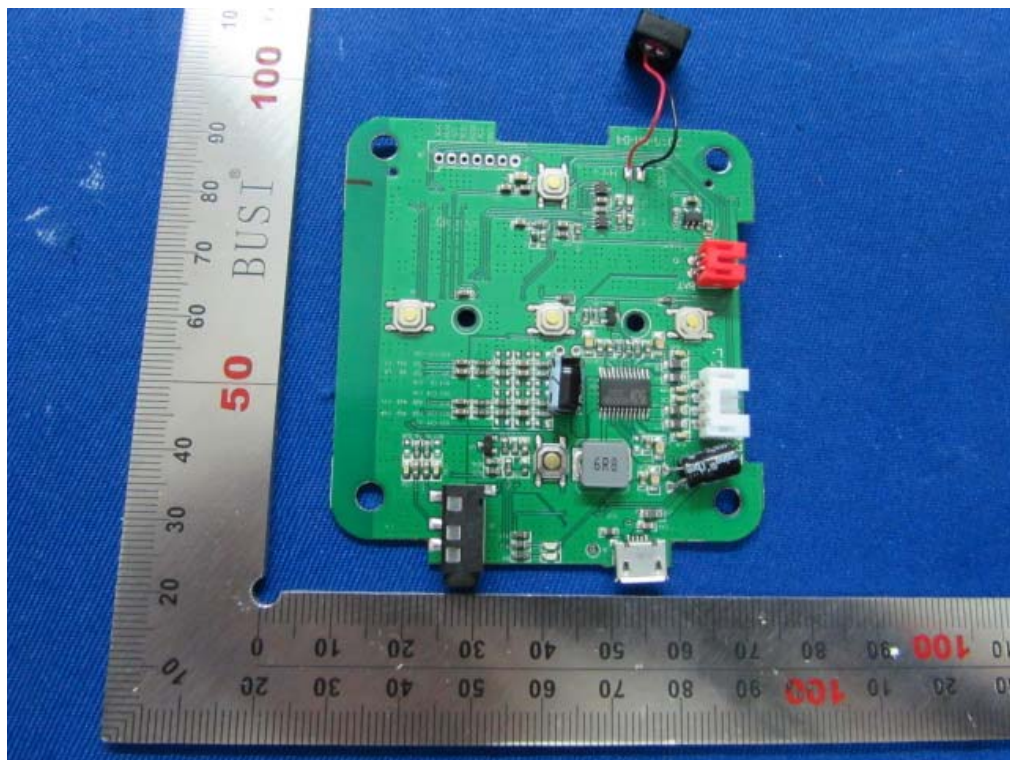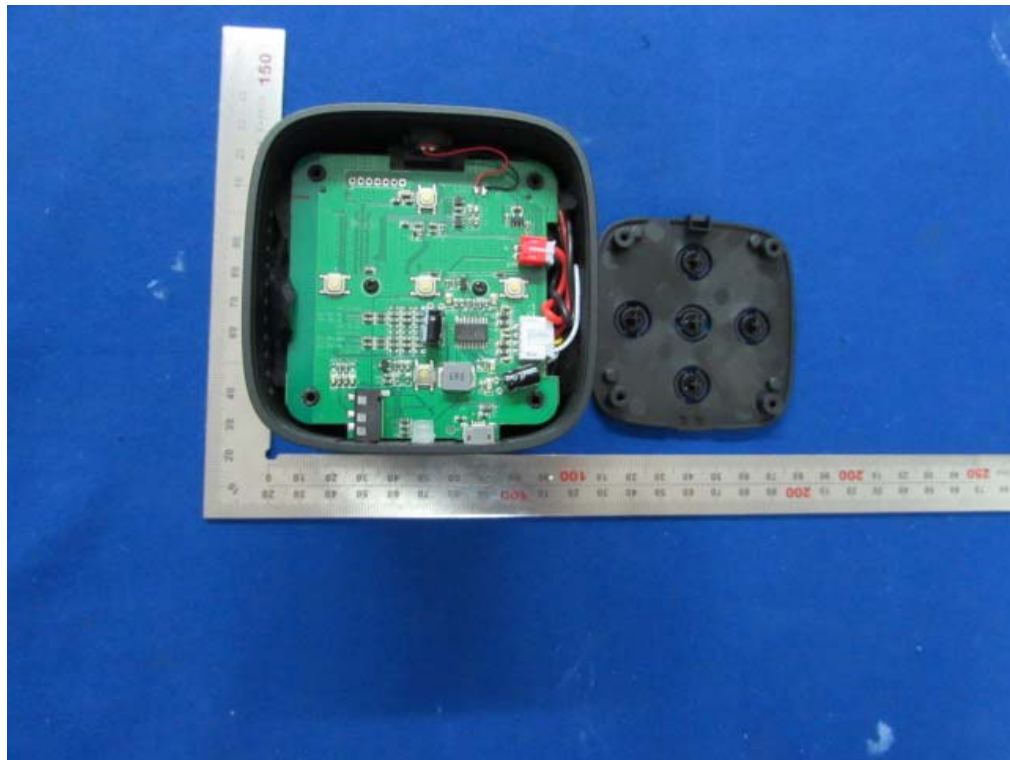

Internal Photos
M/N: SP-920BT

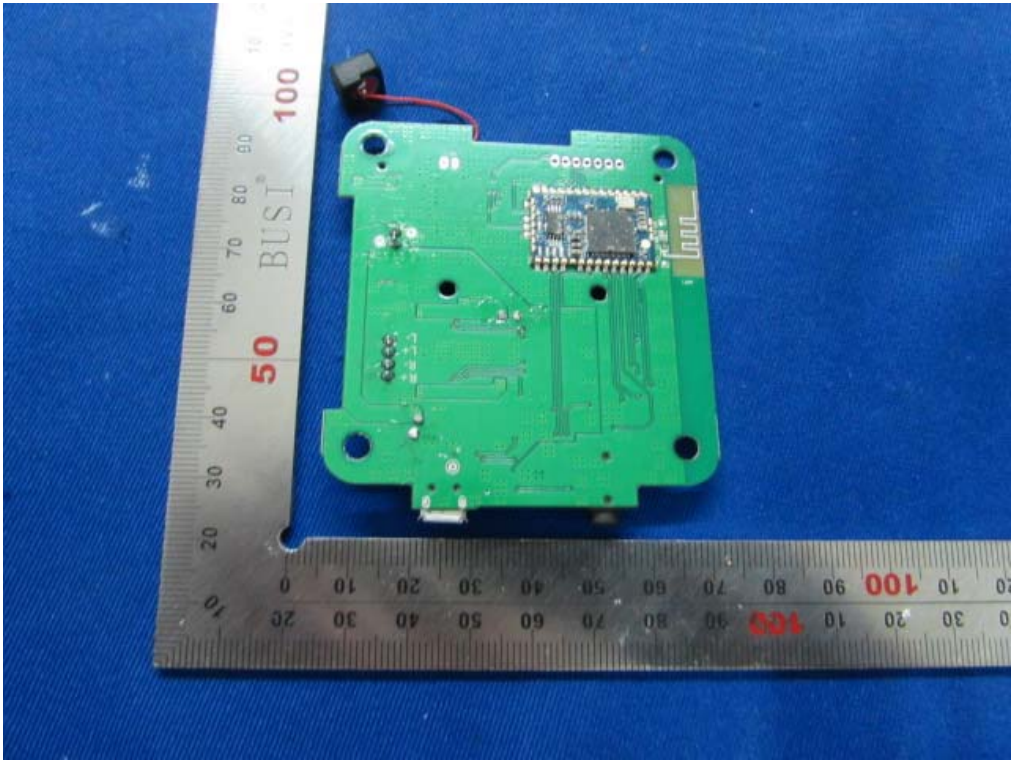

Bluetooth
Antenna

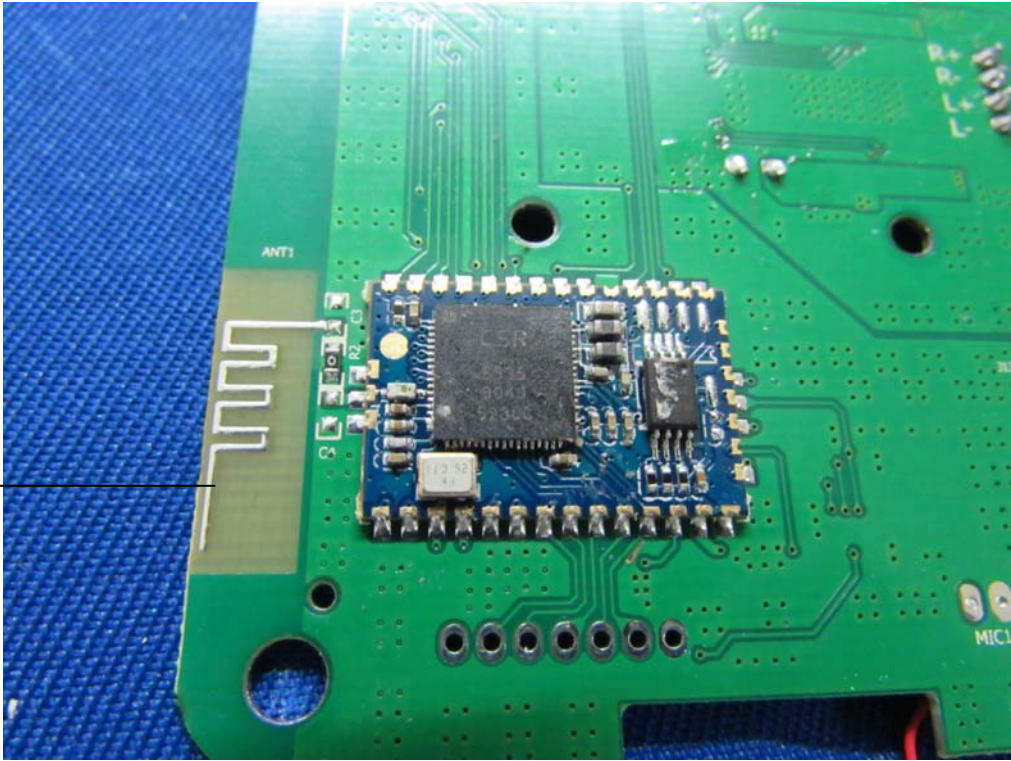

Internal Photos
M/N: SP-920BT

