



# FCC Test Report

**Test report  
On Behalf of  
Aviron Interactive.**

**For  
Aviron 21.5 inch Touch Screen  
Model No.: ATS4**

**FCC ID: 2ASJ3-ATS4**

**Prepared For :** Aviron Interactive.

**780 Birchmount Rd. Unit 16, Toronto, Ontario, M1K 5H4 Canada**

**Prepared By :** Shenzhen HUAKE Testing Technology Co., Ltd.

**1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping,  
Fuhai Street, Bao'an District, Shenzhen, Guangdong, China**

**Date of Test:** Jan. 18, 2024 ~ Feb. 01, 2024

**Date of Report:** Feb. 01, 2024

**Report Number:** HK2401180403-4E



## Test Result Certification

**Applicant's name** .....: Aviron Interactive.

**Address** .....: 780 Birchmount Rd. Unit 16, Toronto, Ontario, M1K 5H4 Canada

**Manufacturer's Name** .....: Aviron Interactive.

**Address** .....: 780 Birchmount Rd. Unit 16, Toronto, Ontario, M1K 5H4 Canada

### Product description

**Trade Mark:** N/A

**Product name**.....: Aviron 21.5 inch Touch Screen

**Model and/or type reference** : ATS4

**Standards**.....: FCC Rules and Regulations Part 15 Subpart E Section 15.407

ANSI C63.10: 2013

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen HUAKE Testing Technology Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen HUAKE Testing Technology Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

**Date of Test**.....:

**Date (s) of performance of tests** .....: Jan. 18, 2024 ~ Feb. 01, 2024

**Date of Issue**.....: Feb. 01, 2024

**Test Result**.....: **Pass**

**Testing Engineer** :

(Len Liao)

**Technical Manager** :

(Sliver Wan)

**Authorized Signatory** :

(Jason Zhou)



## Table of Contents

|                                                     |            |
|-----------------------------------------------------|------------|
| <b>1. Test Result Summary .....</b>                 | <b>5</b>   |
| 1.1. Test Procedures and Results.....               | 5          |
| 1.2. Information of the Test Laboratory .....       | 5          |
| 1.3. Measurement Uncertainty .....                  | 6          |
| <b>2. EUT Description .....</b>                     | <b>7</b>   |
| 2.1. General Description of EUT .....               | 7          |
| 2.2. Operation Frequency Each of Channel.....       | 8          |
| 2.3. Operation of EUT During Testing .....          | 8          |
| 2.4. Description of Test Setup.....                 | 9          |
| 2.5. Description of Support Units .....             | 10         |
| <b>3. General Information .....</b>                 | <b>11</b>  |
| 3.1. Test Environment and Mode .....                | 11         |
| <b>4. Test Results and Measurement Data .....</b>   | <b>16</b>  |
| 4.1. Conducted Emission.....                        | 16         |
| 4.2. Output Power.....                              | 20         |
| 4.3. 6db Emission Bandwidth .....                   | 23         |
| 4.4. 26db Bandwidth and 99% Occupied Bandwidth..... | 24         |
| 4.5. Power Spectral Density .....                   | 37         |
| 4.6. Band Edge.....                                 | 51         |
| 4.7. Spurious Emission.....                         | 88         |
| 4.8. Frequency Stability Measurement.....           | 107        |
| 4.9. Antenna Requirement.....                       | 109        |
| <b>5. Photographs of Test Setup .....</b>           | <b>110</b> |
| <b>6. Photos of the EUT .....</b>                   | <b>112</b> |



**\*\* Modified History \*\***

| Revision     | Description                 | Issued Data   | Remark     |
|--------------|-----------------------------|---------------|------------|
| Revision 1.0 | Initial Test Report Release | Feb. 01, 2024 | Jason Zhou |
|              |                             |               |            |
|              |                             |               |            |





## 1. Test Result Summary

### 1.1. Test Procedures and Results

| Requirement                                      | CFR 47 Section           | Result |
|--------------------------------------------------|--------------------------|--------|
| Antenna requirement                              | §15.203                  | PASS   |
| AC Power Line Conducted Emission                 | §15.207                  | PASS   |
| Maximum Conducted Output Power                   | §15.407(a)               | PASS   |
| 6dB Emission Bandwidth                           | §15.407(e)               | N/A    |
| 26dB Emission Bandwidth & 99% Occupied Bandwidth | §15.407(a)               | PASS   |
| Power Spectral Density                           | §15.407(a)               | PASS   |
| Band edge                                        | §15.407(b)/15.209/15.205 | PASS   |
| Radiated Emission                                | §15.407(b)/15.209/15.205 | PASS   |
| Frequency Stability                              | §15.407(g)               | PASS   |

**Note:**

1. PASS: Test item meets the requirement.
2. Fail: Test item does not meet the requirement.
3. N/A: Test case does not apply to the test object.
4. The test result judgment is decided by the limit of test standard.

### 1.2. Information of the Test Laboratory

Shenzhen HUAKE Testing Technology Co., Ltd.

Add.: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

**Testing Laboratory Authorization:**

A2LA Accreditation Code is 4781.01.

FCC Designation Number is CN1229.

Canada IC CAB identifier is CN0045.

CNAS Registration Number is L9589.



### 1.3. Measurement Uncertainty

The reported uncertainty of measurement  $y \pm U$ , where expanded uncertainty  $U$  is based on a standard uncertainty multiplied by a coverage factor of  $k=2$ , providing a level of confidence of approximately 95 %.

| No. | Item                          | MU                        |
|-----|-------------------------------|---------------------------|
| 1   | Conducted Emission            | $\pm 0.37\text{dB}$       |
| 2   | RF power, conducted           | $\pm 3.35\text{dB}$       |
| 3   | Spurious emissions, conducted | $\pm 2.20\text{dB}$       |
| 4   | All emissions, radiated(<1G)  | $\pm 3.90\text{dB}$       |
| 5   | All emissions, radiated(>1G)  | $\pm 4.28\text{dB}$       |
| 6   | Temperature                   | $\pm 0.1^{\circ}\text{C}$ |
| 7   | Humidity                      | $\pm 1.0\%$               |



## 2. EUT Description

### 2.1. General Description of EUT

|                                                                                                                                                                                                                                                                                                     |                                                                                                                         |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------|
| Equipment:                                                                                                                                                                                                                                                                                          | Aviron 21.5 inch Touch Screen                                                                                           |
| Model Name:                                                                                                                                                                                                                                                                                         | ATS4                                                                                                                    |
| Serial Model:                                                                                                                                                                                                                                                                                       | N/A                                                                                                                     |
| Model Difference:                                                                                                                                                                                                                                                                                   | N/A                                                                                                                     |
| Trade Mark:                                                                                                                                                                                                                                                                                         | N/A                                                                                                                     |
| FCC ID:                                                                                                                                                                                                                                                                                             | 2ASJ3-ATS4                                                                                                              |
| Operation Frequency:                                                                                                                                                                                                                                                                                | IEEE 802.11a/n/ac (HT20) 5.180GHz-5.240GHz<br>IEEE 802.11n/ac (HT40) 5.190GHz-5.230GHz<br>IEEE 802.11ac (HT80) 5.210GHz |
| Modulation Technology:                                                                                                                                                                                                                                                                              | IEEE 802.11a/n/ac                                                                                                       |
| Modulation Type:                                                                                                                                                                                                                                                                                    | OFDM, OFDMA                                                                                                             |
| Antenna Type:                                                                                                                                                                                                                                                                                       | Internal Antenna                                                                                                        |
| Antenna Gain:                                                                                                                                                                                                                                                                                       | Antenna 1:3dBi<br>Antenna 2:3dBi<br>MIMO: 6.01dBi                                                                       |
| Power Source:                                                                                                                                                                                                                                                                                       | DC 12V Form Adapter                                                                                                     |
| Power Supply:                                                                                                                                                                                                                                                                                       | DC 12V Form Adapter                                                                                                     |
| Hardware Version                                                                                                                                                                                                                                                                                    | V1.6                                                                                                                    |
| Software Version:                                                                                                                                                                                                                                                                                   | V1.6                                                                                                                    |
| Note: The EUT incorporates a MIMO function. Physically, it provides two completed transmitters and receivers(2T2R), two transmit signals are completely correlated, then, Direction gain= GANT + Array Gain(Array Gain=10 log(2) dB for power spectral density; Array Gain=0 for power measurement) |                                                                                                                         |



## 2.2. Operation Frequency Each of Channel

| 802.11a/802.11n(HT20)<br>802.11ac(HT20) |           | 802.11n(HT40)/<br>802.11ac(HT40) |           | 802.11ac(HT80) |           |
|-----------------------------------------|-----------|----------------------------------|-----------|----------------|-----------|
| Channel                                 | Frequency | Channel                          | Frequency | Channel        | Frequency |
| 36                                      | 5180      | 38                               | 5190      | 42             | 5210      |
| 40                                      | 5200      | 46                               | 5230      |                |           |
| 44                                      | 5220      |                                  |           |                |           |
| 48                                      | 5240      |                                  |           |                |           |

**Note:**

*In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:*

## 2.3. Operation of EUT During Testing

For 802.11a/n (HT20)/ac(HT20)

| Band I (5150 - 5250 MHz) |         |                 |
|--------------------------|---------|-----------------|
| Channel Number           | Channel | Frequency (MHz) |
| 36                       | Low     | 5180            |
| 40                       | Mid     | 5200            |
| 48                       | High    | 5240            |

For 802.11n (HT40)/ ac(HT40)

| Band I (5150 - 5250 MHz) |         |                 |
|--------------------------|---------|-----------------|
| Channel Number           | Channel | Frequency (MHz) |
| 38                       | Low     | 5190            |
| 46                       | High    | 5230            |

For 802.11ac(HT80)


| Band I (5150 - 5250 MHz) |                 |
|--------------------------|-----------------|
| Channel Number           | Frequency (MHz) |
| 42                       | 5210            |






## 2.4. Description of Test Setup

Operation of EUT during conducted testing and below 1GHz radiation testing:



Operation of EUT during above 1GHz radiation testing:



The sample was placed (0.8m below 1GHz, 1.5m above 1GHz) above the ground plane of 3m chamber. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating the turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages. The worst case is X position.



## 2.5. Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

| Item | Equipment                     | Trade Mark | Model/Type No.  | Specification                                        | Remark     |
|------|-------------------------------|------------|-----------------|------------------------------------------------------|------------|
| 1    | Aviron 21.5 inch Touch Screen | N/A        | ATS4            | N/A                                                  | EUT        |
| 2    | Power Line                    | N/A        | N/A             | Length:1.85m                                         | Accessory  |
| 3    | Adapter                       | N/A        | SYS1546-3612-T3 | Input: 100-240V, 50/60Hz,<br>1.5A<br>Output: 12V, 3A | Accessory  |
| 4    | Data Cable                    | N/A        | N/A             | Length:1.0m                                          | Peripheral |
| 5    | Laptop                        | Lenovo     | TP00096A        | Input: DC 20V,<br>2.25A/3.25A                        | Peripheral |
|      |                               |            |                 |                                                      |            |
|      |                               |            |                 |                                                      |            |

**Note:**

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.
3. For conducted measurements (Output Power, 26db Bandwidth and 99% Occupied Bandwidth, Power Spectral Density, Spurious Emissions), the antenna of EUT is connected to the test equipment via temporary antenna connector, the antenna connector is soldered on the antenna port of EUT, and the temporary antenna connector is listed in the Test Instruments.



### 3. General Information

#### 3.1. Test Environment and Mode

| Operating Environment:                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |                                                                           |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------|
| Temperature:                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | 25.0 °C                                                                   |
| Humidity:                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | 56 % RH                                                                   |
| Atmospheric Pressure:                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | 1010 mbar                                                                 |
| Test Mode:                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |                                                                           |
| Engineering mode:                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | Keep the EUT in continuous transmitting by select channel and modulations |
| <p>The sample was placed 0.8m/1.5m for blow/above 1GHz above the ground plane of 3m chamber. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y &amp; Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating the turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages.</p> |                                                                           |



We have verified the construction and function in typical operation. All the test modes were carried out with the EUT in transmitting operation, which was shown in this test report and defined as follows:

**Per-scan all kind of data rate in lowest channel, and found the follow list which it was worst case.**

| Mode                             | Data rate |
|----------------------------------|-----------|
| 802.11a                          | 6 Mbps    |
| 802.11n(HT20)                    | MCS0      |
| 802.11n(HT40)                    | MCS0      |
| 802.11ac(HT20)/ac(HT40)/ac(HT80) | MCS0      |

### Final Test Mode:

Operation mode:


Keep the EUT in continuous transmitting with modulation

Mode Test Duty Cycle: ANT.1


| Mode           | Duty Cycle | Duty Cycle Factor (dB) |
|----------------|------------|------------------------|
| 802.11a        | 0.93       | -0.32                  |
| 802.11n(HT20)  | 0.93       | -0.32                  |
| 802.11n(HT40)  | 0.87       | -0.60                  |
| 802.11ac(HT20) | 0.93       | -0.32                  |
| 802.11ac(HT40) | 0.87       | -0.60                  |
| 802.11ac(HT80) | 0.76       | -1.19                  |

Test plots as follows:

### 802.11a

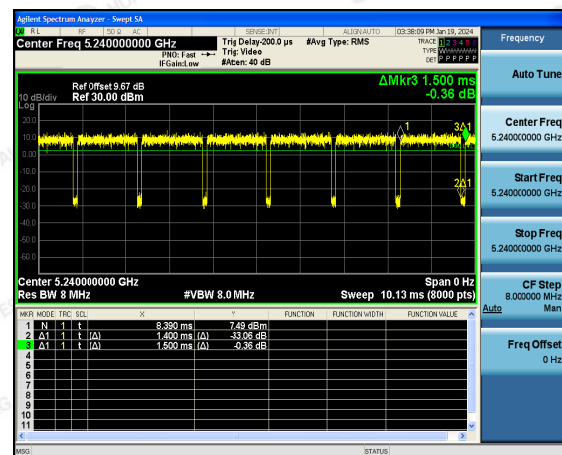


### 802.11n(HT20)

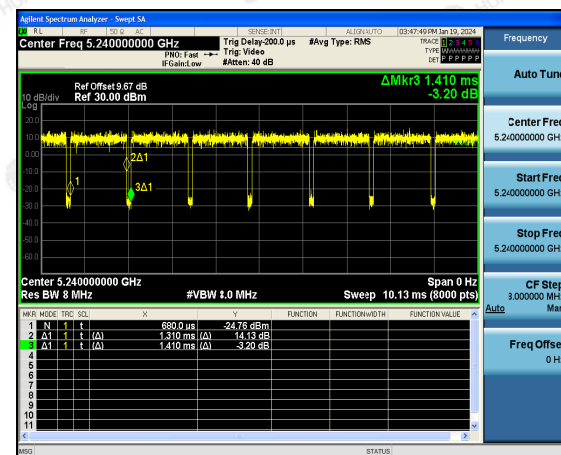







## 802.11n(HT40)

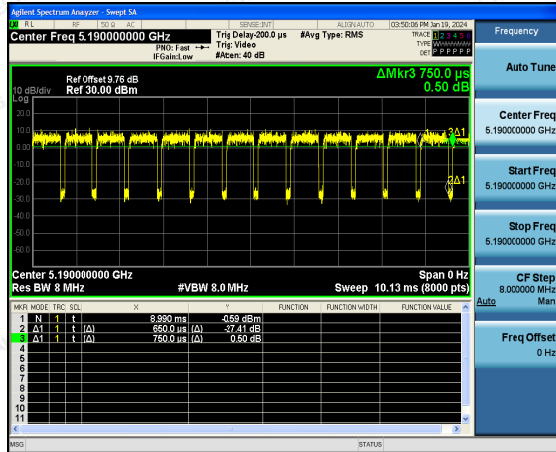


## 802.11ac(HT20)

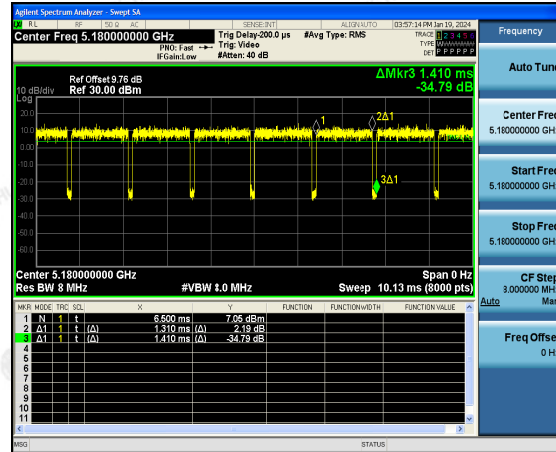

## 802.11ac(HT40)

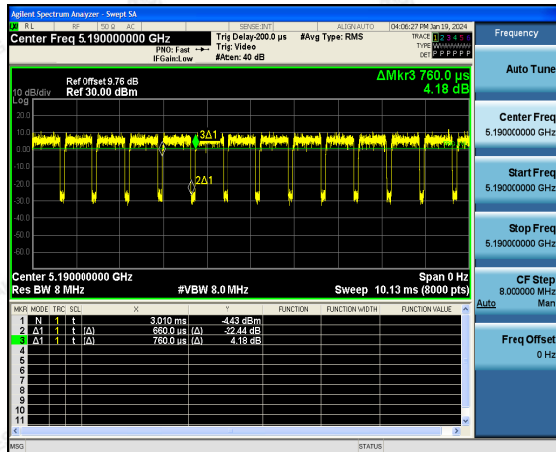

## 802.11ac(HT80)

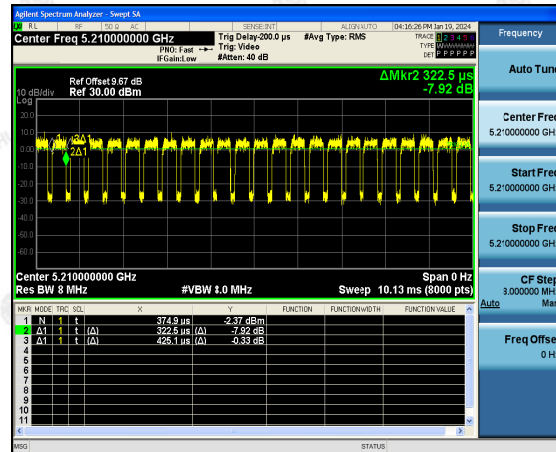




## Mode Test Duty Cycle: ANT.2


| Mode           | Duty Cycle | Duty Cycle Factor (dB) |
|----------------|------------|------------------------|
| 802.11a        | 0.93       | -0.32                  |
| 802.11n(HT20)  | 0.93       | -0.32                  |
| 802.11n(HT40)  | 0.86       | -0.66                  |
| 802.11ac(HT20) | 0.93       | -0.32                  |
| 802.11ac(HT40) | 0.87       | -0.60                  |
| 802.11ac(HT80) | 0.75       | -1.25                  |

Test plots as follows:


## 802.11a

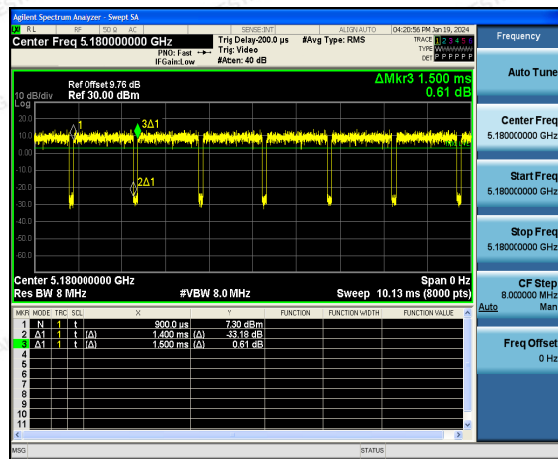


## 802.11n(HT20)

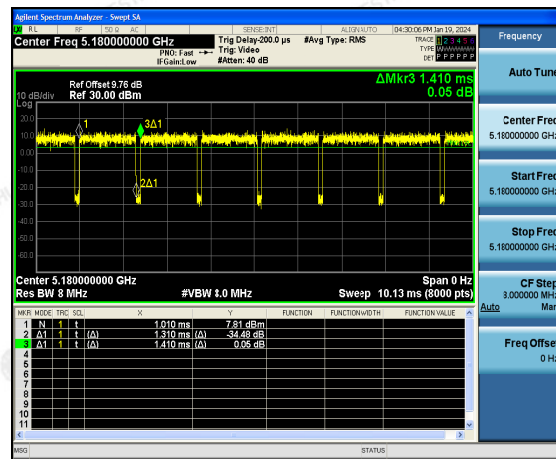


## 802.11n(HT40)

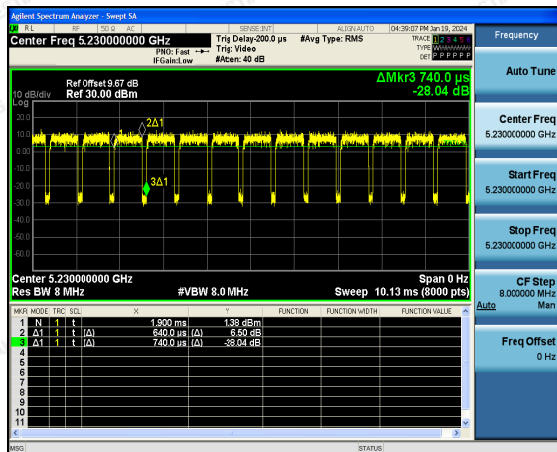


## 802.11ac(HT20)

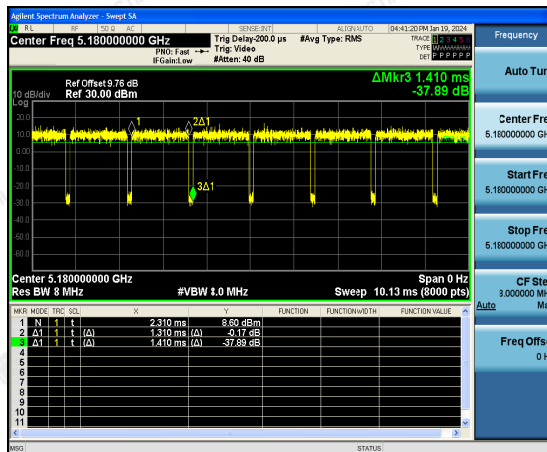

## 802.11ac(HT40)

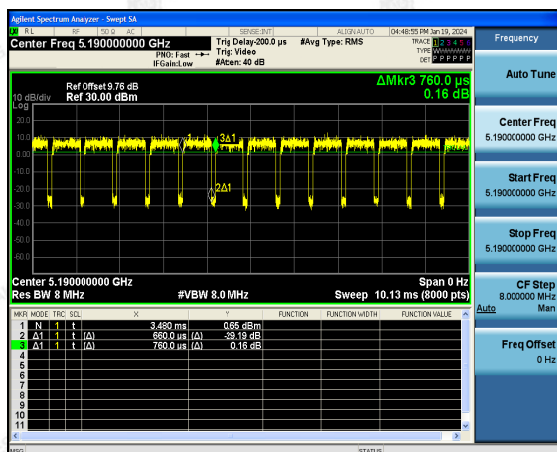

## 802.11ac(HT80)

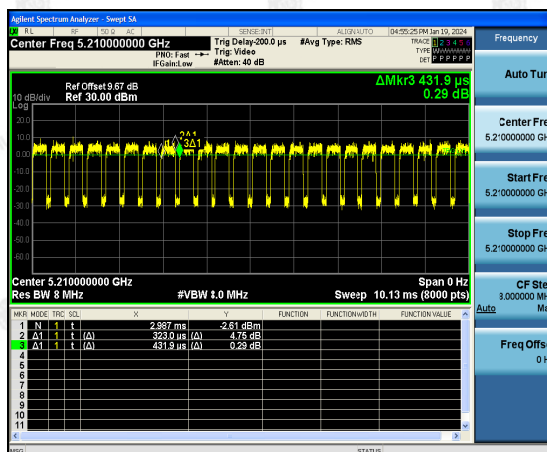

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAQ, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

TEL : +86-755 2302 9901    FAX : +86-755 2302 9901    E-mail : [service@cer-mark.com](mailto:service@cer-mark.com)

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China



## 4. Test Results and Measurement Data

### 4.1. Conducted Emission

#### 4.1.1. Test Specification

| Test Requirement:        | FCC Part15 C Section 15.207                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                          |              |  |            |         |          |           |           |       |    |    |      |    |    |
|--------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------|--------------|--|------------|---------|----------|-----------|-----------|-------|----|----|------|----|----|
| Test Method:             | ANSI C63.10:2013                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                          |              |  |            |         |          |           |           |       |    |    |      |    |    |
| Frequency Range:         | 150 kHz to 30 MHz                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |                          |              |  |            |         |          |           |           |       |    |    |      |    |    |
| Receiver setup:          | RBW=9 kHz, VBW=30 kHz, Sweep time=auto                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |                          |              |  |            |         |          |           |           |       |    |    |      |    |    |
| Limits:                  | <table><tr><th rowspan="2">Frequency range<br/>(MHz)</th><th colspan="2">Limit (dBuV)</th></tr><tr><th>Quasi-peak</th><th>Average</th></tr><tr><td>0.15-0.5</td><td>66 to 56*</td><td>56 to 46*</td></tr><tr><td>0.5-5</td><td>56</td><td>46</td></tr><tr><td>5-30</td><td>60</td><td>50</td></tr></table>                                                                                                                                                                                                                                                                                                                                                                                                                            | Frequency range<br>(MHz) | Limit (dBuV) |  | Quasi-peak | Average | 0.15-0.5 | 66 to 56* | 56 to 46* | 0.5-5 | 56 | 46 | 5-30 | 60 | 50 |
| Frequency range<br>(MHz) | Limit (dBuV)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |                          |              |  |            |         |          |           |           |       |    |    |      |    |    |
|                          | Quasi-peak                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | Average                  |              |  |            |         |          |           |           |       |    |    |      |    |    |
| 0.15-0.5                 | 66 to 56*                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | 56 to 46*                |              |  |            |         |          |           |           |       |    |    |      |    |    |
| 0.5-5                    | 56                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | 46                       |              |  |            |         |          |           |           |       |    |    |      |    |    |
| 5-30                     | 60                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | 50                       |              |  |            |         |          |           |           |       |    |    |      |    |    |
| Test Setup:              | <div><p>Reference Plane</p><p>40cm</p><p>E.U.T AC power 80cm LISN Filter AC power</p><p>Test table/Insulation plane</p><p>EMI Receiver</p><p>Remark<br/>E.U.T: Equipment Under Test<br/>LISN: Line Impedance Stabilization Network<br/>Test table height=0.8m</p></div>                                                                                                                                                                                                                                                                                                                                                                                                                                                               |                          |              |  |            |         |          |           |           |       |    |    |      |    |    |
| Test Mode:               | Tx Mode                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |                          |              |  |            |         |          |           |           |       |    |    |      |    |    |
| Test Procedure:          | <div><div>1. The E.U.T and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment.</div><div>2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs).</div><div>3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10: 2013 on conducted measurement.</div></div> |                          |              |  |            |         |          |           |           |       |    |    |      |    |    |
| Test Result:             | PASS                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                          |              |  |            |         |          |           |           |       |    |    |      |    |    |





#### 4.1.2. Test Instruments


| Conducted Emission Shielding Room Test Site (843) |              |                    |               |                  |                 |
|---------------------------------------------------|--------------|--------------------|---------------|------------------|-----------------|
| Equipment                                         | Manufacturer | Model              | Serial Number | Calibration Date | Calibration Due |
| Receiver                                          | R&S          | ESR-7              | HKE-005       | Feb. 17, 2023    | Feb. 16, 2024   |
| LISN                                              | R&S          | ENV216             | HKE-002       | Feb. 17, 2023    | Feb. 16, 2024   |
| Coax cable<br>(9KHz-30MHz)                        | Times        | 381806-00<br>2     | N/A           | Feb. 17, 2023    | Feb. 16, 2024   |
| 10dB Attenuator                                   | Schwarzbeck  | VTSD9561<br>F      | HKE-153       | Feb. 17, 2023    | Feb. 16, 2024   |
| Conducted test<br>software                        | Tonscend     | TS+ Rev<br>2.5.0.0 | HKE-081       | N/A              | N/A             |

**Note:** The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).



### 4.1.3. Test data

Test Specification: Line

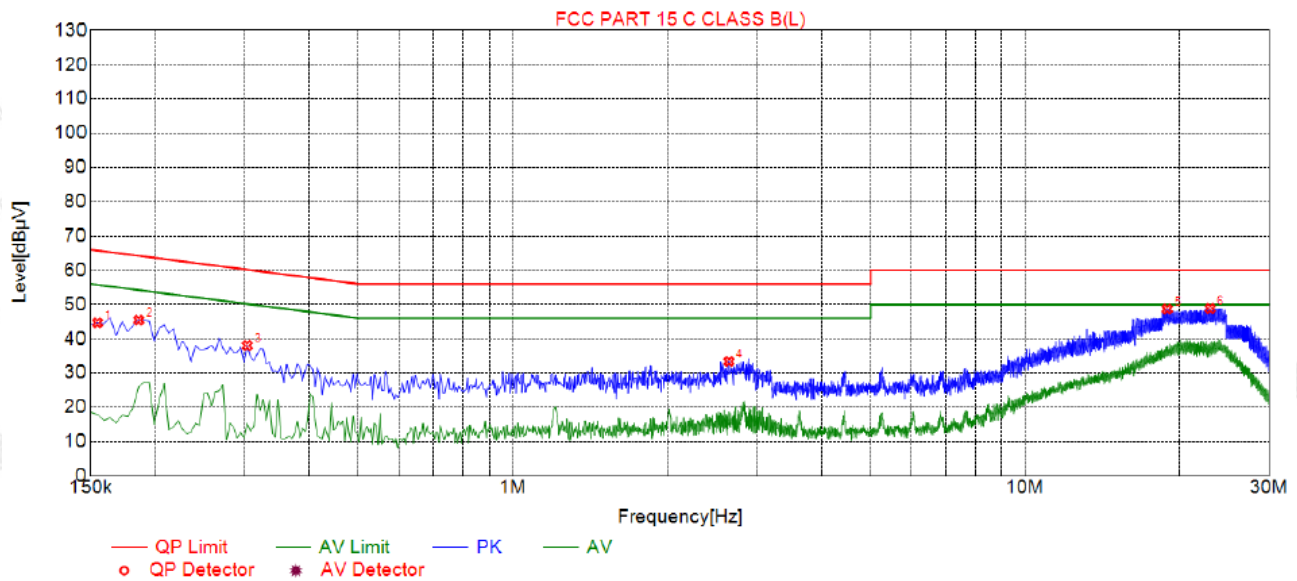

### Suspected List

| NO. | Freq.<br>[MHz] | Level<br>[dBμV] | Factor<br>[dB] | Limit<br>[dBμV] | Margin<br>[dB] | Reading<br>[dBμV] | Detector | Type |
|-----|----------------|-----------------|----------------|-----------------|----------------|-------------------|----------|------|
| 1   | 0.1545         | 44.67           | 20.03          | 65.75           | 21.08          | 24.64             | PK       | L    |
| 2   | 0.1860         | 45.44           | 20.05          | 64.21           | 18.77          | 25.39             | PK       | L    |
| 3   | 0.3030         | 38.00           | 20.04          | 60.16           | 22.16          | 17.96             | PK       | L    |
| 4   | 2.6430         | 33.39           | 20.21          | 56.00           | 22.61          | 13.18             | PK       | L    |
| 5   | 18.9555        | 48.66           | 20.06          | 60.00           | 11.34          | 28.60             | PK       | L    |
| 6   | 23.0010        | 48.82           | 20.19          | 60.00           | 11.18          | 28.63             | PK       | L    |


Remark: Margin = Limit – Level

Correction factor = Cable lose + LISN insertion loss

Level=Test receiver reading + correction factor



Test Specification: Neutral

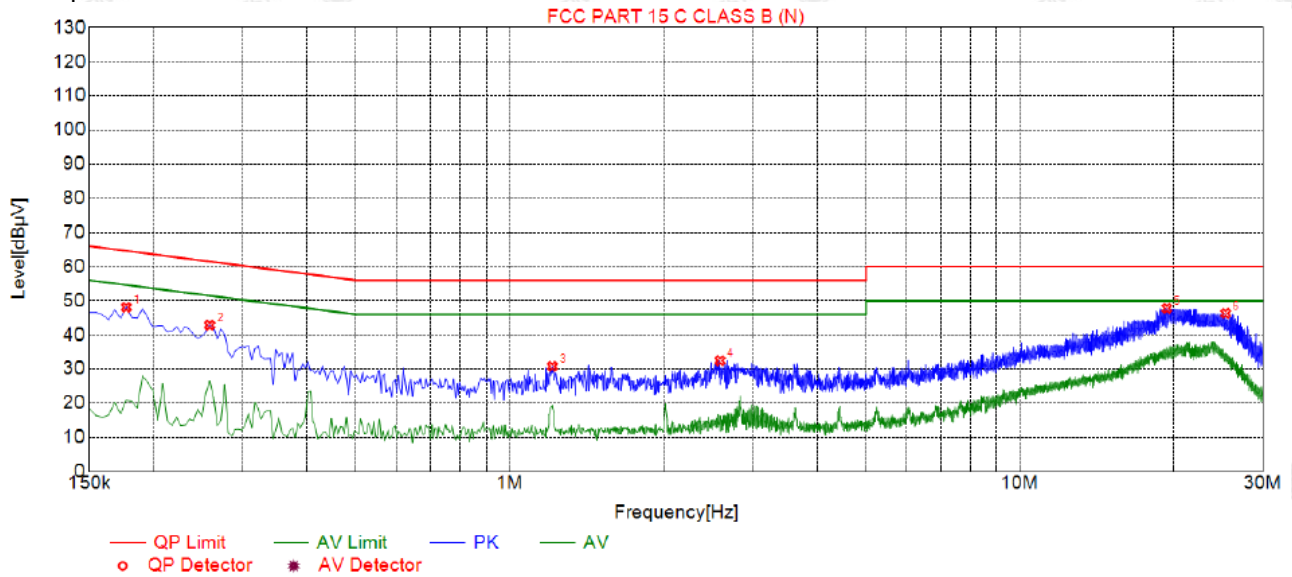

## Suspected List

| NO. | Freq. [MHz] | Level [dBμV] | Factor [dB] | Limit [dBμV] | Margin [dB] | Reading [dBμV] | Detector | Type |
|-----|-------------|--------------|-------------|--------------|-------------|----------------|----------|------|
| 1   | 0.1770      | 48.10        | 20.05       | 64.63        | 16.53       | 28.05          | PK       | N    |
| 2   | 0.2580      | 42.87        | 20.04       | 61.50        | 18.63       | 22.83          | PK       | N    |
| 3   | 1.2120      | 30.77        | 20.09       | 56.00        | 25.23       | 10.68          | PK       | N    |
| 4   | 2.5845      | 32.47        | 20.20       | 56.00        | 23.53       | 12.27          | PK       | N    |
| 5   | 19.4325     | 47.79        | 20.08       | 60.00        | 12.21       | 27.71          | PK       | N    |
| 6   | 25.3455     | 46.32        | 20.25       | 60.00        | 13.68       | 26.07          | PK       | N    |

Remark: Margin = Limit – Level


Correction factor = Cable lose + LISN insertion loss

Level=Test receiver reading + correction factor



## 4.2. Output Power

### 4.2.1. Test Specification
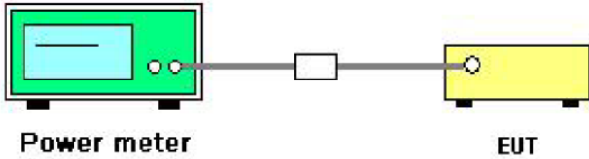
|                          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |      |                          |
|--------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------|--------------------------|
| <b>Test Requirement:</b> | FCC Part15 E Section 15.407(a)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |      |                          |
| <b>Test Method:</b>      | KDB789033 D02 General UNII Test Procedures New Rules v02.r01 Section E                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |      |                          |
| <b>Limit:</b>            | Frequency (MHz)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | Band | Limit                    |
|                          | 5150-5250                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |      | 250mW for client devices |
| <b>Test Setup:</b>       |  <p>Power meter</p> <p>EUT</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                    |      |                          |
| <b>Test Mode:</b>        | Transmitting mode with modulation                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |      |                          |
| <b>Test Procedure:</b>   | <b>Conducted Power Measurement:</b> <ol style="list-style-type: none"><li>1. The testing follows the Measurement Procedure of KDB789033 D02 General UNII Test Procedures New Rules v02r01 Section E, 3, a.</li><li>2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.</li><li>3. Set to the maximum power setting and enable the EUT transmit continuously.</li><li>4. Measure the conducted output power and record the results in the test report.</li></ol> |      |                          |
| <b>Test Result:</b>      | PASS                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |      |                          |
| <b>Remark:</b>           | Conducted output power= measurement power +10log(1/x) X is duty cycle=1, so 10log(1/1)=0<br>Conducted output power= measurement power                                                                                                                                                                                                                                                                                                                                                                                                                               |      |                          |





#### 4.2.2. Test Instruments

| RF Test Room              |              |          |               |                  |                 |
|---------------------------|--------------|----------|---------------|------------------|-----------------|
| Equipment                 | Manufacturer | Model    | Serial Number | Calibration Date | Calibration Due |
| Spectrum analyzer         | Agilent      | N9020A   | HKE-048       | Feb. 17, 2023    | Feb. 16, 2024   |
| Power meter               | Agilent      | E4419B   | HKE-085       | Feb. 17, 2023    | Feb. 16, 2024   |
| Power Sensor              | Agilent      | E9300A   | HKE-086       | Feb. 17, 2023    | Feb. 16, 2024   |
| RF cable                  | Times        | 1-40G    | HKE-034       | Feb. 17, 2023    | Feb. 16, 2024   |
| RF automatic control unit | Tonscend     | JS0806-2 | HKE-060       | Feb. 17, 2023    | Feb. 16, 2024   |

**Note:** The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).


**4.2.3. Test Data**

| <b>Configuration Band I (5150 - 5250 MHz )</b> |              |                                      |                |      |                 |        |
|------------------------------------------------|--------------|--------------------------------------|----------------|------|-----------------|--------|
| Mode                                           | Test channel | Maximum Conducted Output Power (dBm) |                |      | FCC Limit (dBm) | Result |
|                                                |              | Antenna port 1                       | Antenna port 2 | MIMO |                 |        |
| 11a                                            | CH36         | 6.13                                 | 8.32           |      | 24              | PASS   |
| 11a                                            | CH40         | 6.49                                 | 6.34           |      | 24              | PASS   |
| 11a                                            | CH48         | 7.20                                 | 6.09           |      | 24              | PASS   |
| 11n(HT20)                                      | CH36         | 7.13                                 | 5.89           | 9.56 | 24              | PASS   |
| 11n(HT20)                                      | CH40         | 5.96                                 | 5.92           | 8.95 | 24              | PASS   |
| 11n(HT20)                                      | CH48         | 6.97                                 | 5.77           | 9.42 | 24              | PASS   |
| 11n(HT40)                                      | CH38         | 5.77                                 | 6.32           | 9.06 | 24              | PASS   |
| 11n(HT40)                                      | CH46         | 5.82                                 | 7.57           | 9.79 | 24              | PASS   |
| 11ac(HT20)                                     | CH36         | 5.93                                 | 7.04           | 9.53 | 24              | PASS   |
| 11ac(HT20)                                     | CH40         | 5.87                                 | 5.88           | 8.89 | 24              | PASS   |
| 11ac(HT20)                                     | CH48         | 5.89                                 | 5.79           | 8.85 | 24              | PASS   |
| 11ac(HT40)                                     | CH38         | 5.81                                 | 6.90           | 9.40 | 24              | PASS   |
| 11ac(HT40)                                     | CH46         | 6.38                                 | 6.57           | 9.49 | 24              | PASS   |
| 11ac(HT80)                                     | CH42         | 4.98                                 | 6.02           | 8.54 | 24              | PASS   |



### 4.3. 6db Emission Bandwidth

#### 4.3.1. Test Specification
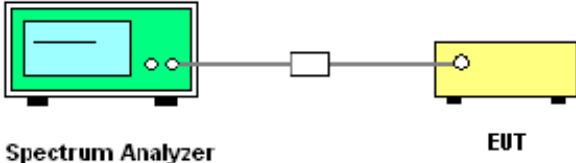
|                   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
|-------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Test Requirement: | FCC CFR47 Part 15 Section 15.407(e)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| Test Method:      | KDB789033 D02 General UNII Test Procedures New Rules v02r01 Section C                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| Limit:            | >500kHz                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| Test Setup:       |  <p>Spectrum Analyzer                      EUT</p>                                                                                                                                                                                                                                                                                                                                                                                |
| Test Mode:        | Transmitting mode with modulation                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| Test Procedure:   | <ol style="list-style-type: none"><li>1. KDB789033 D02 General UNII Test Procedures New Rules v02r01 Section C.</li><li>2. Set to the maximum power setting and enable the EUT transmit continuously.</li><li>3. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6dB bandwidth must be greater than 500 kHz.</li><li>4. Measure and record the results in the test report.</li></ol> |
| Test Result:      | PASS                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |

#### 4.3.2. Test Instruments

| RF Test Room              |              |          |               |                  |                 |
|---------------------------|--------------|----------|---------------|------------------|-----------------|
| Equipment                 | Manufacturer | Model    | Serial Number | Calibration Date | Calibration Due |
| Spectrum analyzer         | Agilent      | N9020A   | HKE-048       | Feb. 17, 2023    | Feb. 16, 2024   |
| RF cable                  | Times        | 1-40G    | HKE-034       | Feb. 17, 2023    | Feb. 16, 2024   |
| RF automatic control unit | Tonscend     | JS0806-2 | HKE-060       | Feb. 17, 2023    | Feb. 16, 2024   |

**Note:** The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).


#### 4.3.3. Test data

N/A



#### 4.4. 26db Bandwidth and 99% Occupied Bandwidth

##### 4.4.1. Test Specification
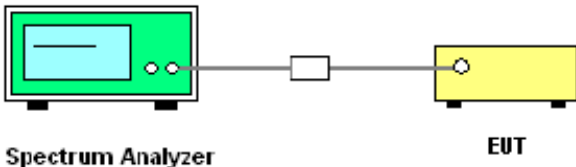
|                   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|-------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Test Requirement: | 47 CFR Part 15C Section 15.407                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| Test Method:      | KDB789033 D02 General UNII Test Procedures New Rules v02r01 Section C                                                                                                                                                                                                                                                                                                                                                                                                     |
| Limit:            | No restriction limits                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Test Setup:       |  <p>Spectrum Analyzer                      EUT</p>                                                                                                                                                                                                                                                                                                                                      |
| Test Mode:        | Transmitting mode with modulation                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| Test Procedure:   | <ol style="list-style-type: none"><li>1. KDB789033 D02 General UNII Test Procedures New Rules v02r01 Section C.</li><li>2. Set to the maximum power setting and enable the EUT transmit continuously.</li><li>3. Make the measurement with the spectrum analyzer's resolution bandwidth <math>RBW = 1\% \text{ EBW}</math>, <math>VBW \geq 3RBW</math>, In order to make an accurate measurement.</li><li>4. Measure and record the results in the test report.</li></ol> |
| Test Result:      | PASS                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |

##### 4.4.2. Test Instruments

| RF Test Room              |              |          |               |                  |                 |
|---------------------------|--------------|----------|---------------|------------------|-----------------|
| Equipment                 | Manufacturer | Model    | Serial Number | Calibration Date | Calibration Due |
| Spectrum analyzer         | Agilent      | N9020A   | HKE-048       | Feb. 17, 2023    | Feb. 16, 2024   |
| RF cable                  | Times        | 1-40G    | HKE-034       | Feb. 17, 2023    | Feb. 16, 2024   |
| RF automatic control unit | Tonscend     | JS0806-2 | HKE-060       | Feb. 17, 2023    | Feb. 16, 2024   |

**Note:** The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).




**4.4.3. Test data****ANT 1**

| Mode       | Test channel | Frequency (MHz) | 26 dB Bandwidth (MHz) | Verdict |
|------------|--------------|-----------------|-----------------------|---------|
| 11a        | CH36         | 5180            | 20.86                 | PASS    |
| 11a        | CH40         | 5200            | 20.79                 | PASS    |
| 11a        | CH48         | 5240            | 20.86                 | PASS    |
| 11n(HT20)  | CH36         | 5180            | 21.00                 | PASS    |
| 11n(HT20)  | CH40         | 5200            | 21.10                 | PASS    |
| 11n(HT20)  | CH48         | 5240            | 21.10                 | PASS    |
| 11n(HT40)  | CH38         | 5190            | 39.48                 | PASS    |
| 11n(HT40)  | CH46         | 5230            | 39.22                 | PASS    |
| 11ac(HT20) | CH36         | 5180            | 21.15                 | PASS    |
| 11ac(HT20) | CH40         | 5200            | 21.38                 | PASS    |
| 11ac(HT20) | CH48         | 5240            | 21.47                 | PASS    |
| 11ac(HT40) | CH38         | 5190            | 39.34                 | PASS    |
| 11ac(HT40) | CH46         | 5230            | 39.33                 | PASS    |
| 11ac(HT80) | CH42         | 5210            | 81.13                 | PASS    |

**Test plots as follows:**



## Band I (5150 – 5250 MHz)

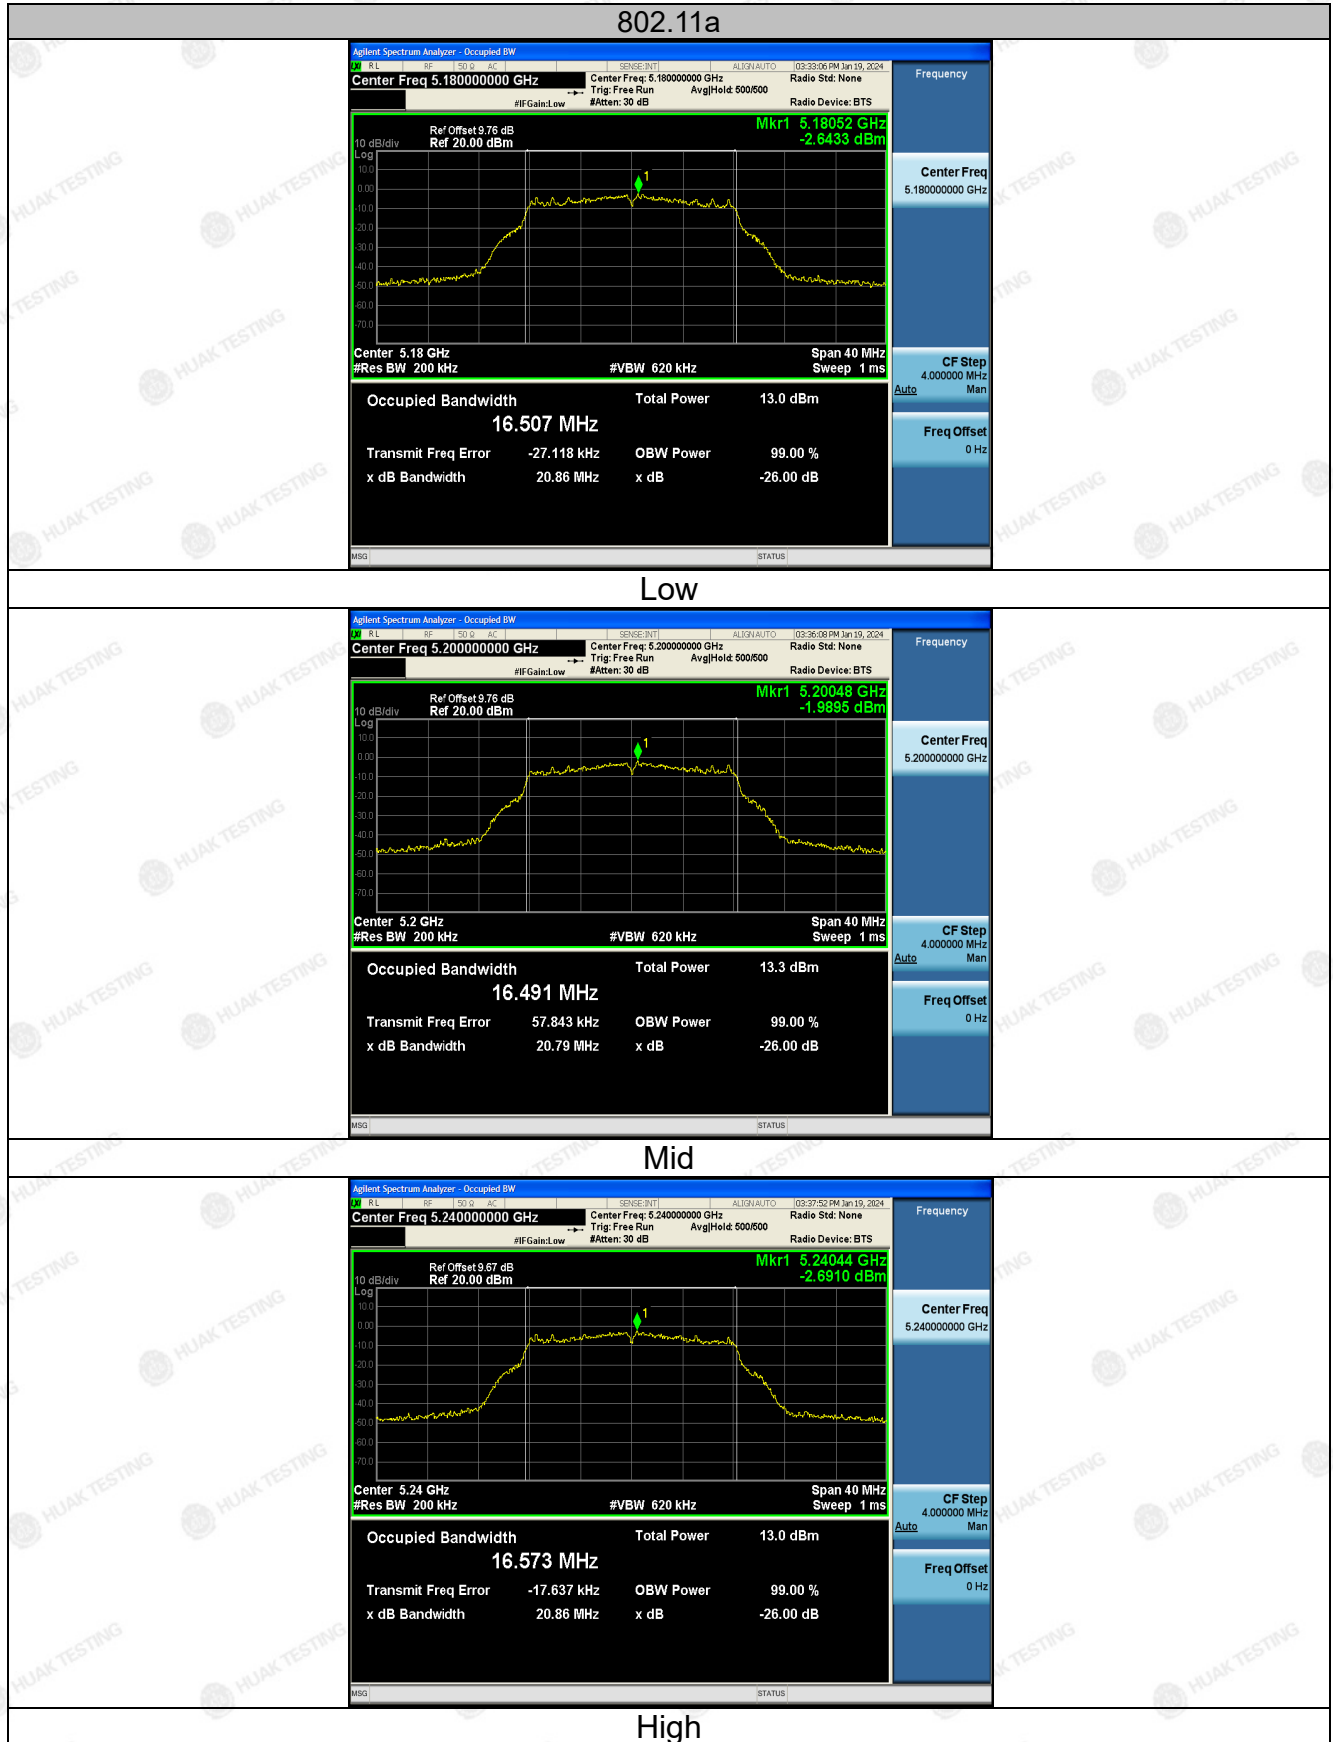


The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAKE, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : service@cer-mark.com

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China




## 802.11n(HT20)

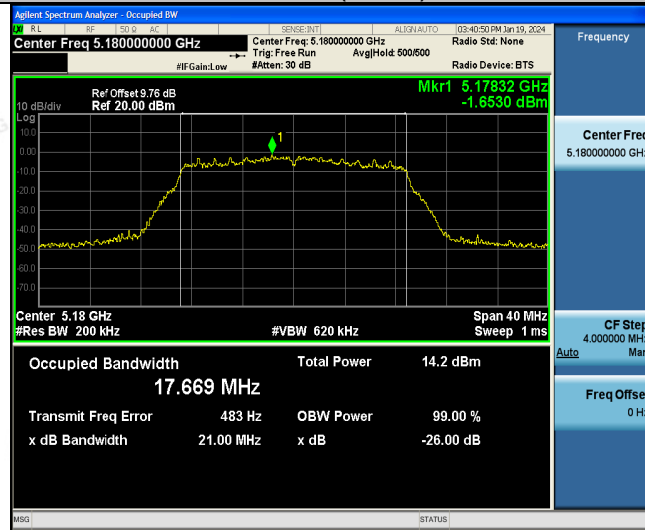


## Low



## Mid

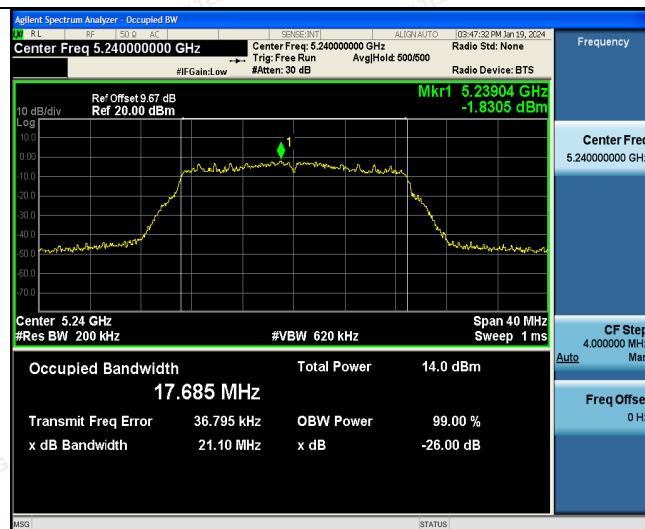


## High

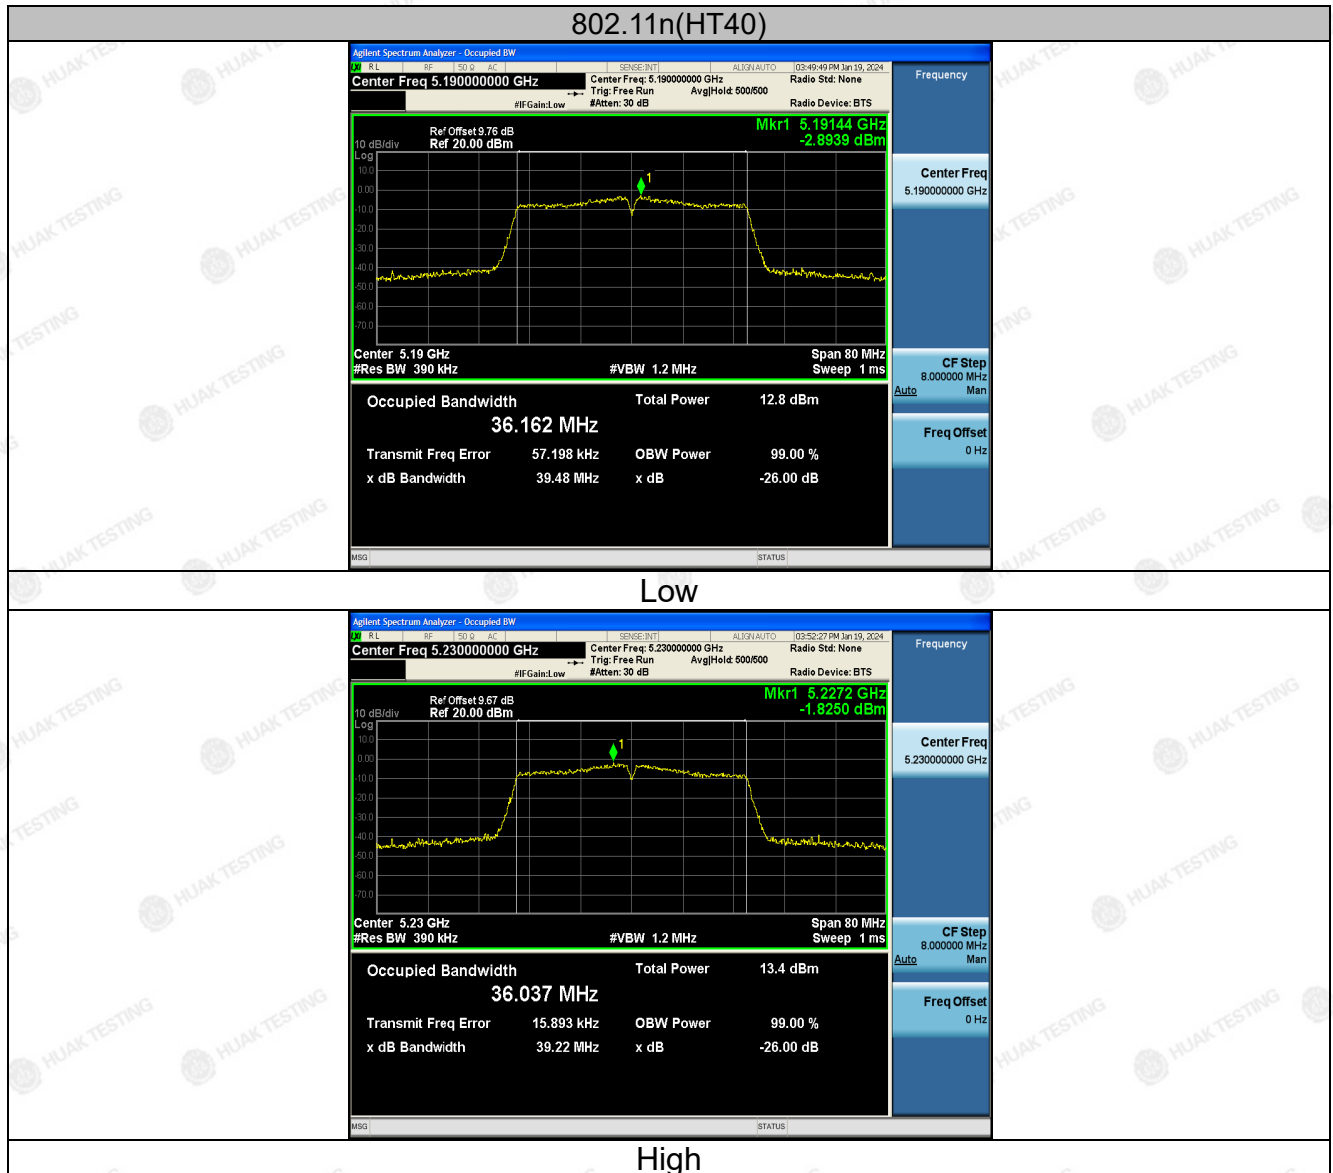







## 802.11ac(HT20)

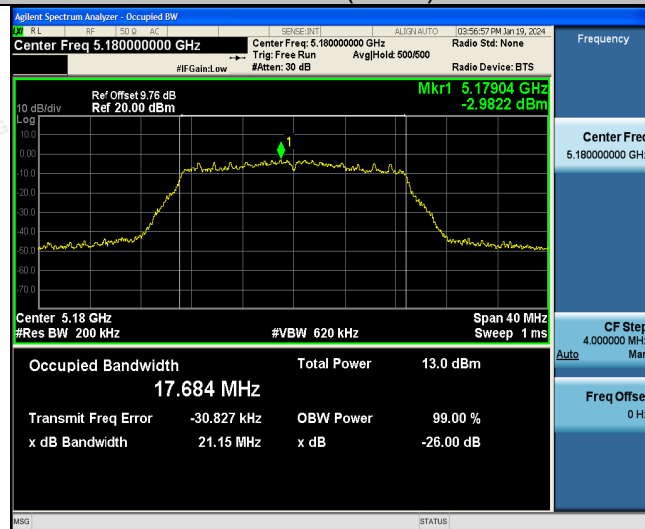


## Low

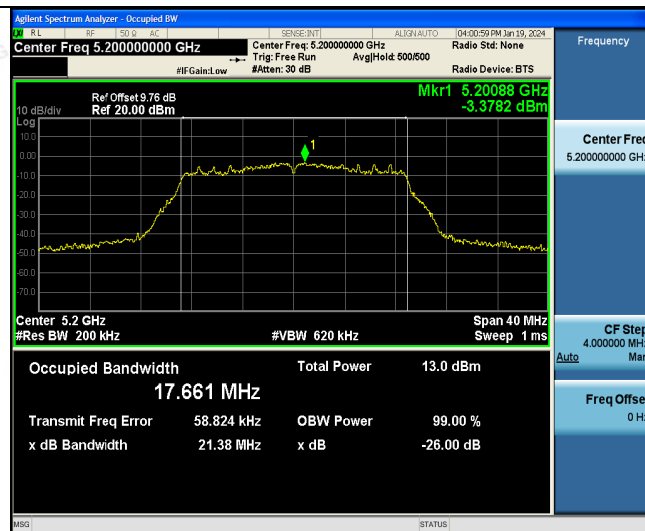

## Mid

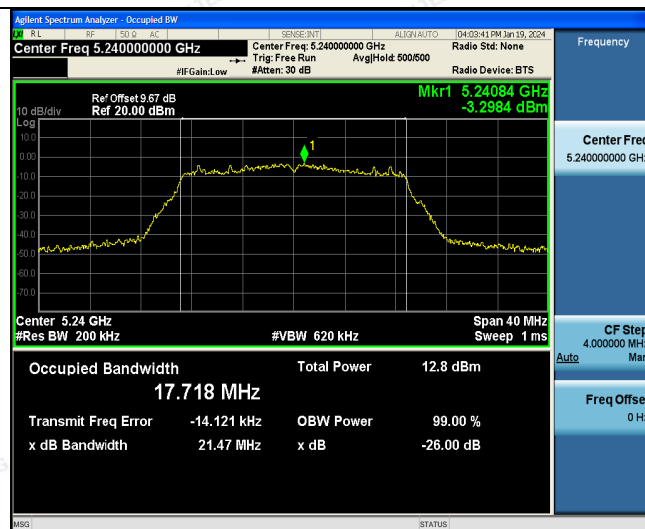


## High

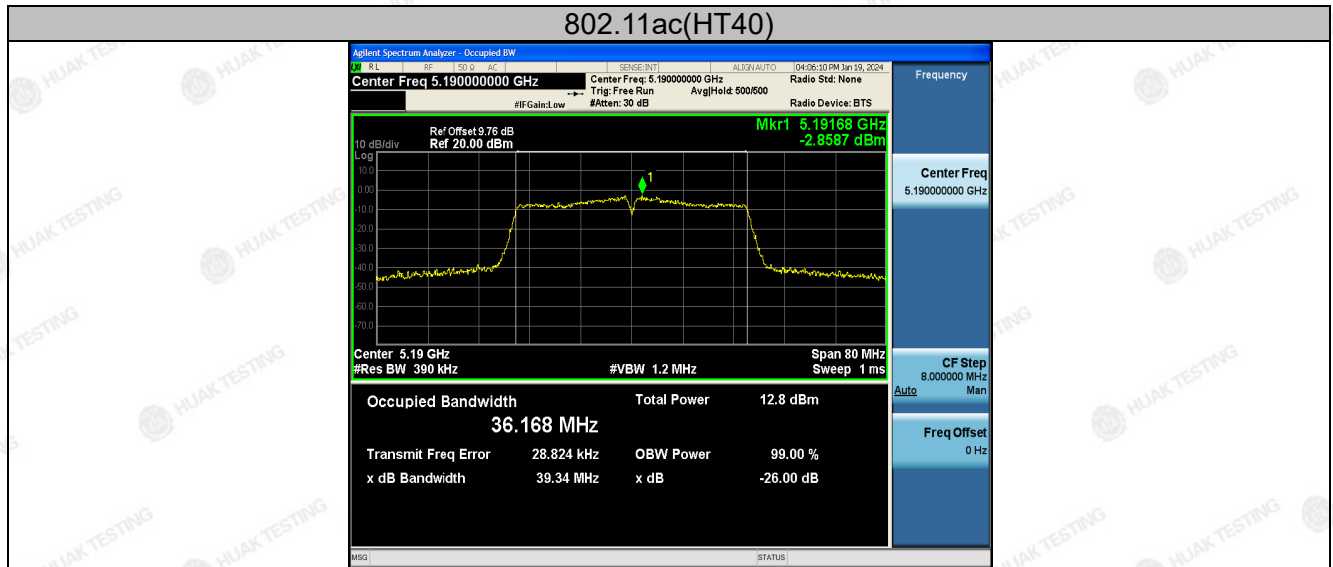

Low



High

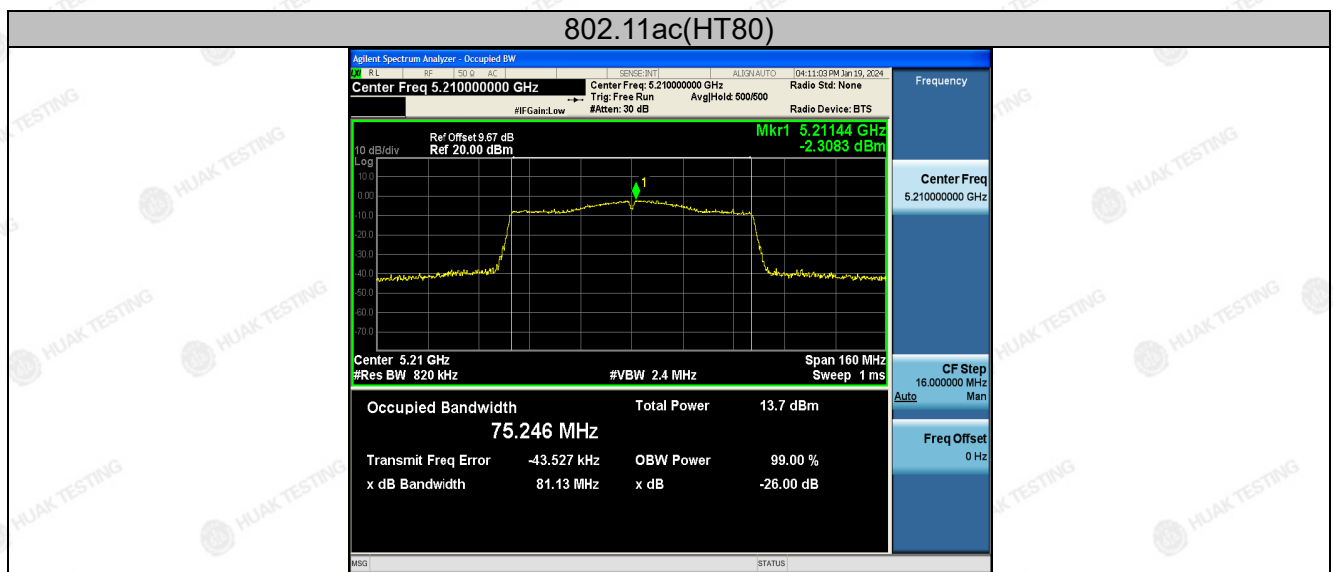


**ANT 2**

| Mode       | Test channel | Frequency (MHz) | 26 dB Bandwidth (MHz) | Verdict |
|------------|--------------|-----------------|-----------------------|---------|
| 11a        | CH36         | 5180            | 21.08                 | PASS    |
| 11a        | CH40         | 5200            | 20.89                 | PASS    |
| 11a        | CH48         | 5240            | 21.07                 | PASS    |
| 11n(HT20)  | CH36         | 5180            | 21.23                 | PASS    |
| 11n(HT20)  | CH40         | 5200            | 21.46                 | PASS    |
| 11n(HT20)  | CH48         | 5240            | 21.29                 | PASS    |
| 11n(HT40)  | CH38         | 5190            | 39.41                 | PASS    |
| 11n(HT40)  | CH46         | 5230            | 39.39                 | PASS    |
| 11ac(HT20) | CH36         | 5180            | 21.17                 | PASS    |
| 11ac(HT20) | CH40         | 5200            | 21.22                 | PASS    |
| 11ac(HT20) | CH48         | 5240            | 21.11                 | PASS    |
| 11ac(HT40) | CH38         | 5190            | 39.38                 | PASS    |
| 11ac(HT40) | CH46         | 5230            | 39.46                 | PASS    |
| 11ac(HT80) | CH42         | 5210            | 80.69                 | PASS    |

Test plots as follows:



Band I (5150 – 5250 MHz)

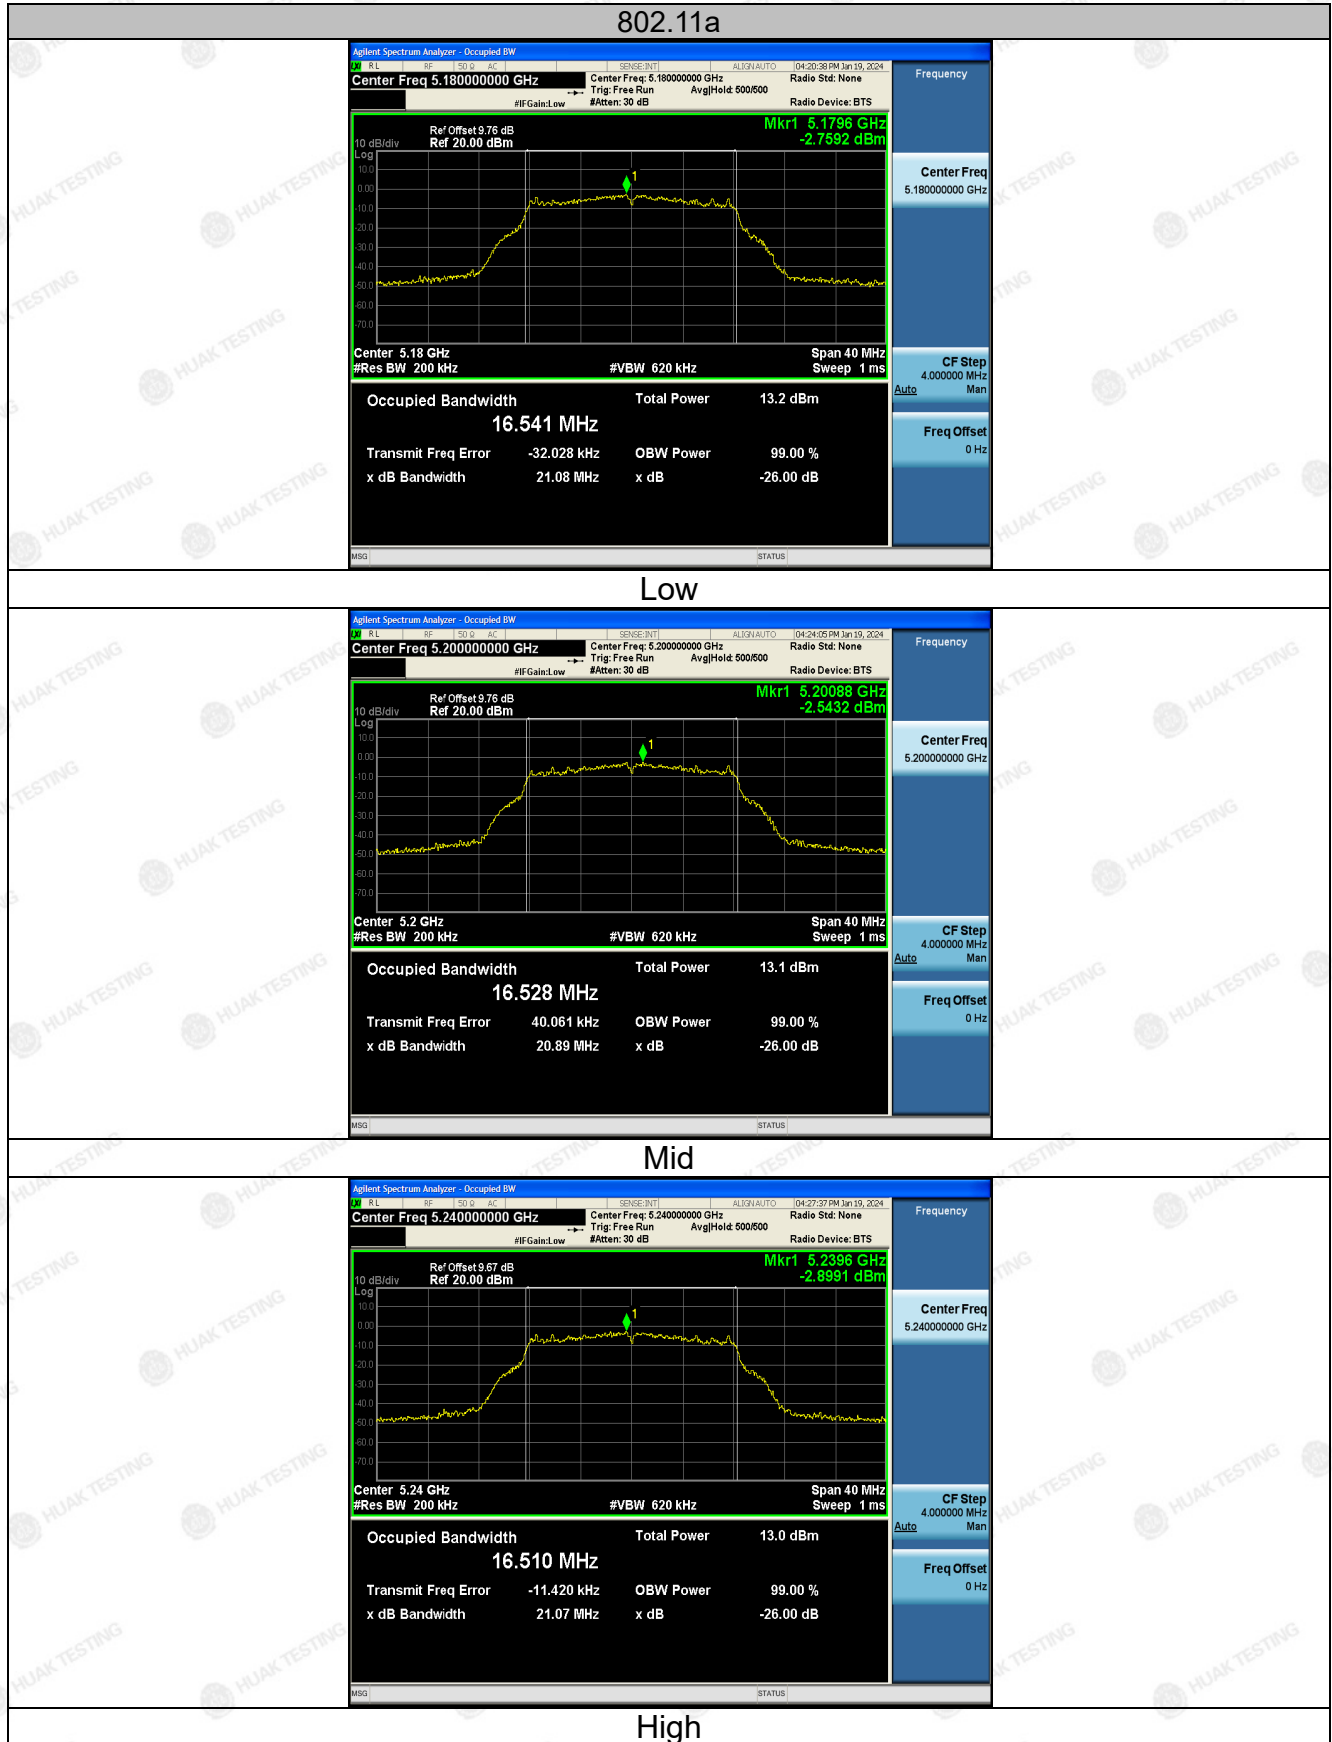

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAKE, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.


TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : service@cer-mark.com

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China






## 802.11n(HT20)

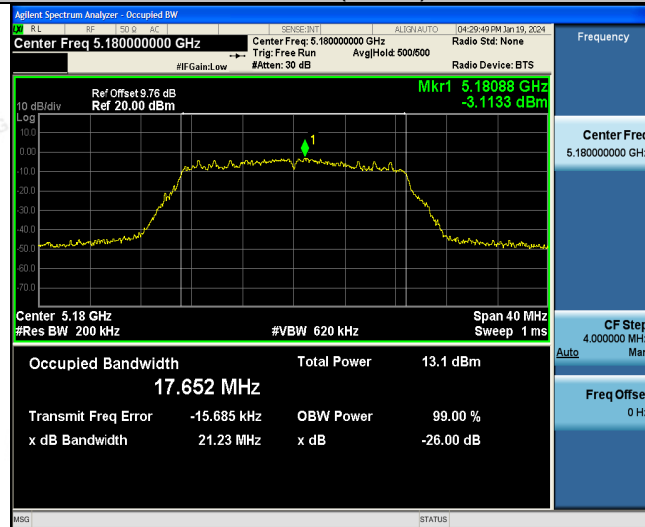


## Low



## Mid

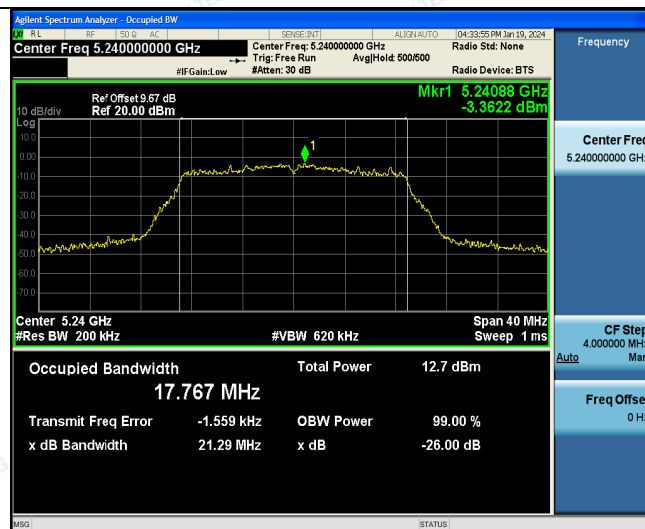


## High

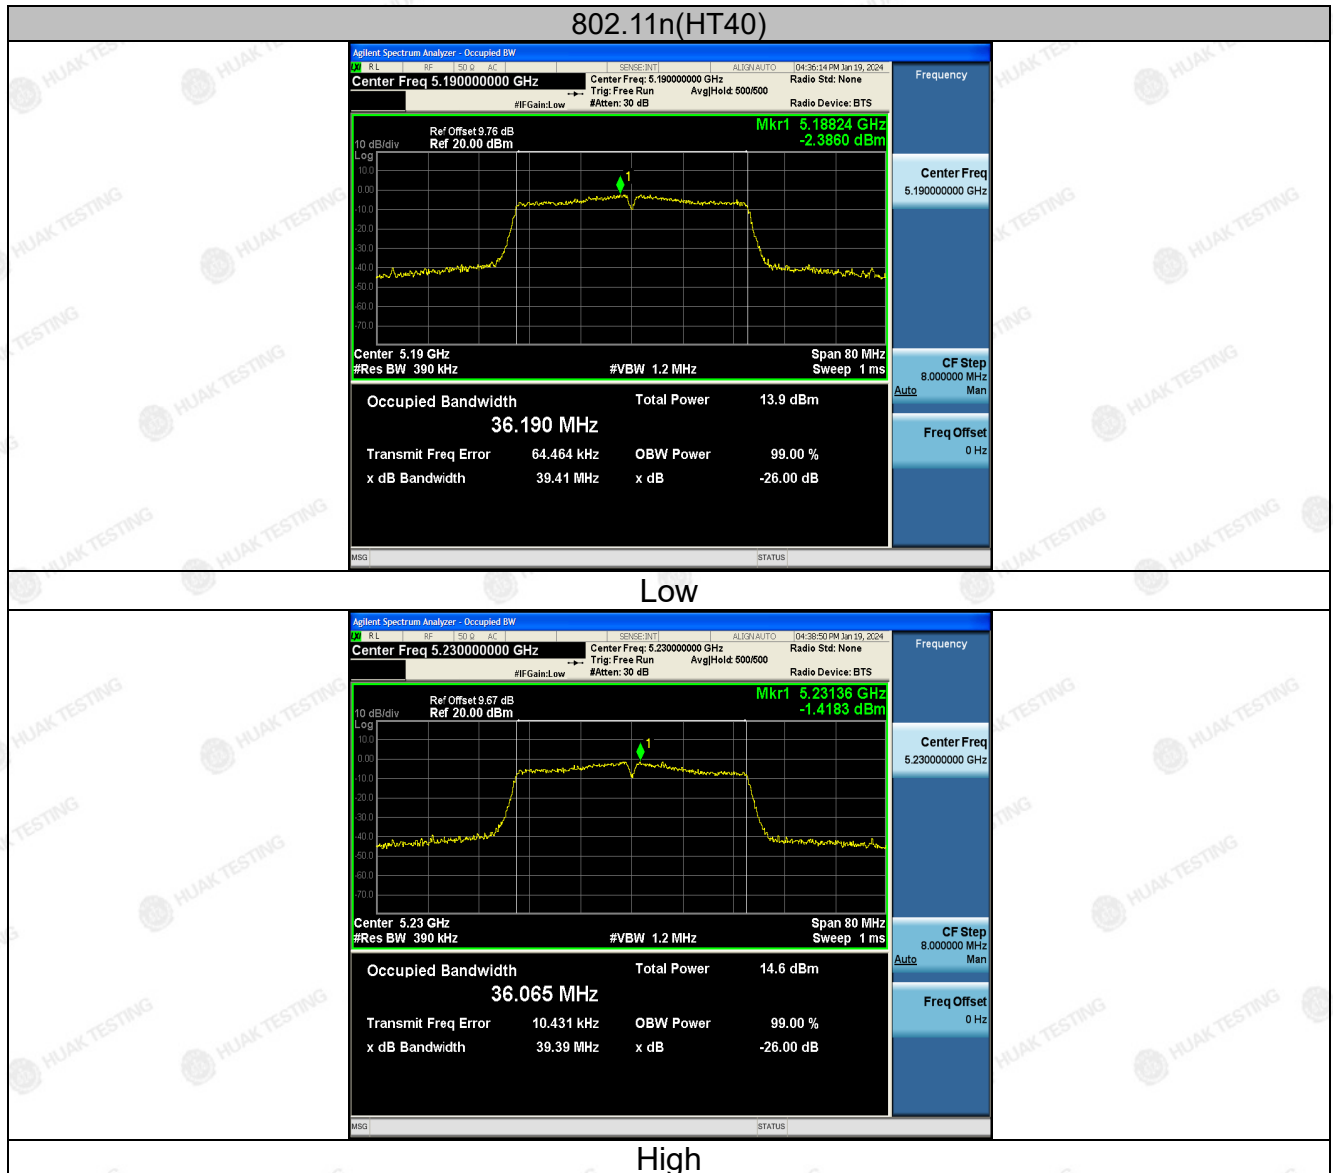





## 802.11ac(HT20)

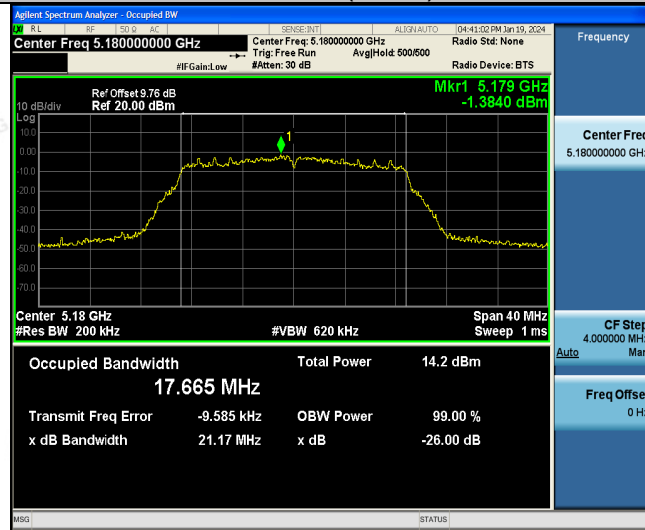


## Low

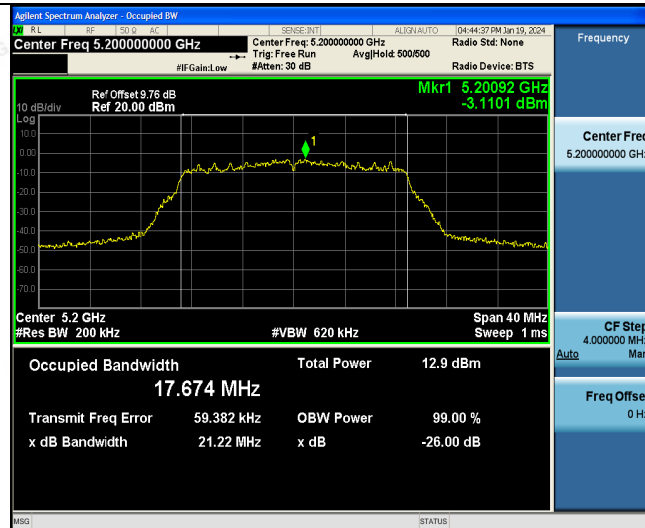

## Mid

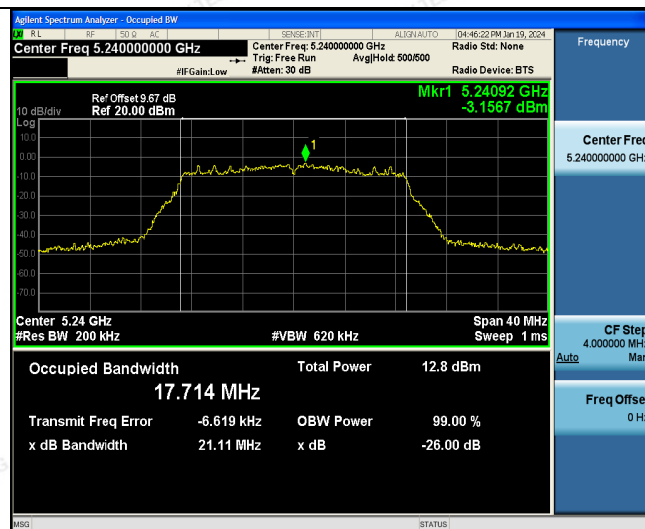


## High

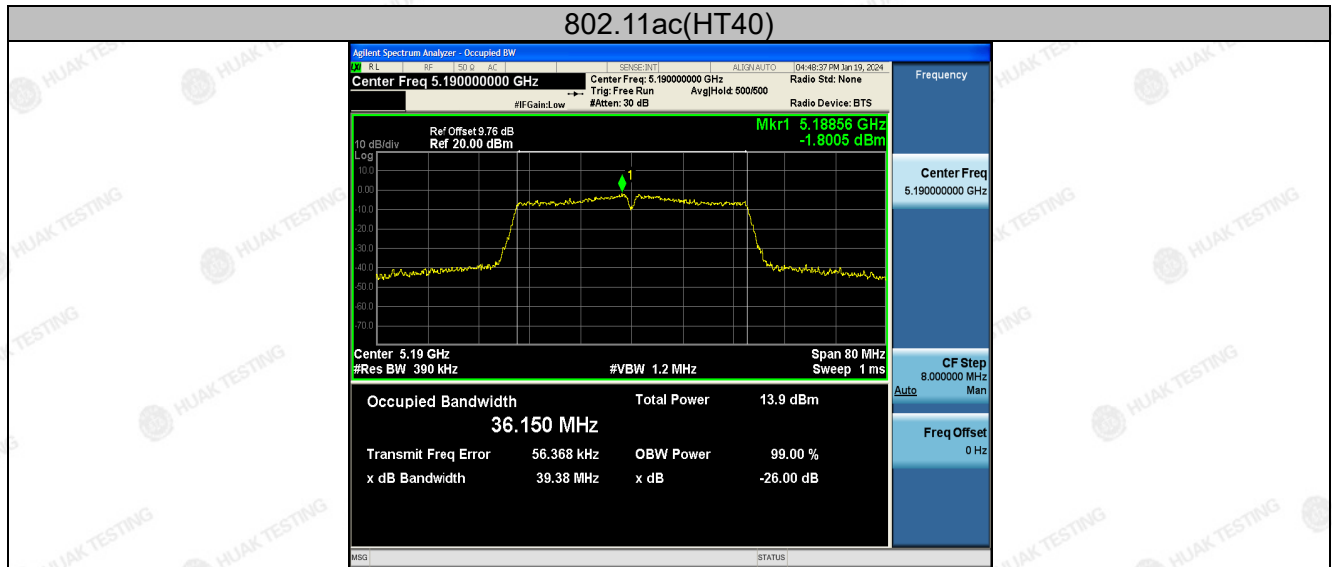

Low



High

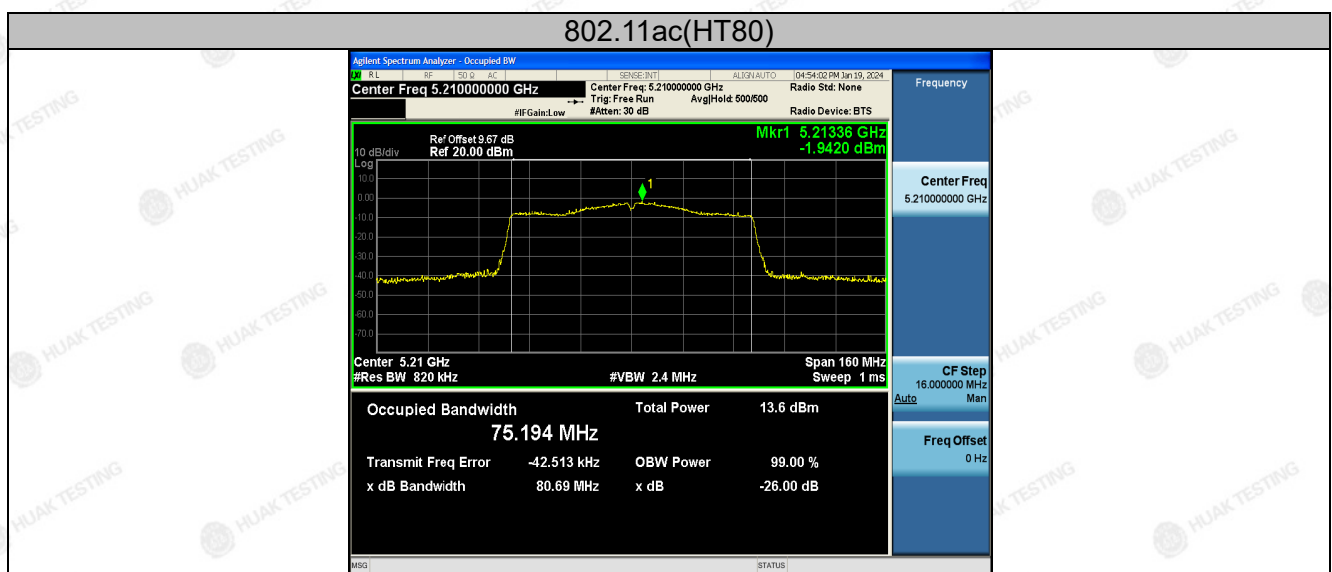





## 4.5. Power Spectral Density

### 4.5.1. Test Specification

|                   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
|-------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Test Requirement: | FCC Part15 E Section 15.407 (a)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| Test Method:      | KDB789033 D02 General UNII Test Procedures New Rules v02r01 Section F                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| Limit:            | $\leq 11.00\text{dBm/MHz}$ for Band I 5150MHz-5250MHz                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| Test Setup:       | <br>Spectrum Analyzer                      EMI                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| Test Mode:        | Transmitting mode with modulation                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Test Procedure:   | <ol style="list-style-type: none"><li>1. Set the spectrum analyzer or EMI receiver span to view the entire emission bandwidth.</li><li>2. Set RBW = 1 MHz, VBW <math>\geq 3 \times</math> RBW, Sweep time = Auto, Detector = RMS.</li><li>3. Allow the sweeps to continue until the trace stabilizes.</li><li>4. Use the peak marker function to determine the maximum amplitude level.</li><li>5. The E.I.R.P spectral density used radiated test method. At a test site that has been validated using the procedures of ANSI C63.4 or the latest CISPR 16-1-4 for measurements above 1 GHz, so as to simulate a near free-space environment.</li></ol> |
| Test Result:      | PASS                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |

### 4.5.2. Test Instruments

| RF Test Room              |              |          |               |                  |                 |
|---------------------------|--------------|----------|---------------|------------------|-----------------|
| Equipment                 | Manufacturer | Model    | Serial Number | Calibration Date | Calibration Due |
| Spectrum analyzer         | Agilent      | N9020A   | HKE-048       | Feb. 17, 2023    | Feb. 16, 2024   |
| RF cable                  | Times        | 1-40G    | HKE-034       | Feb. 17, 2023    | Feb. 16, 2024   |
| RF automatic control unit | Tonscend     | JS0806-2 | HKE-060       | Feb. 17, 2023    | Feb. 16, 2024   |

**Note:** The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).



## 4.5.3. Test data


ANT 1

| Configuration Band I (5150 - 5250 MHz ) |              |                 |                 |        |
|-----------------------------------------|--------------|-----------------|-----------------|--------|
| Mode                                    | Test channel | Level [dBm/MHz] | Limit (dBm/MHz) | Result |
| 11a                                     | CH36         | 4.90            | 11              | PASS   |
| 11a                                     | CH40         | 4.57            | 11              | PASS   |
| 11a                                     | CH48         | 4.20            | 11              | PASS   |
| 11n(HT20)                               | CH36         | 2.79            | 11              | PASS   |
| 11n(HT20)                               | CH40         | 2.41            | 11              | PASS   |
| 11n(HT20)                               | CH48         | 2.27            | 11              | PASS   |
| 11n(HT40)                               | CH38         | 0.57            | 11              | PASS   |
| 11n(HT40)                               | CH46         | 2.14            | 11              | PASS   |
| 11ac(HT20)                              | CH36         | 2.57            | 11              | PASS   |
| 11ac(HT20)                              | CH40         | 2.64            | 11              | PASS   |
| 11ac(HT20)                              | CH48         | 1.99            | 11              | PASS   |
| 11ac(HT40)                              | CH38         | 0.69            | 11              | PASS   |
| 11ac(HT40)                              | CH46         | 1.46            | 11              | PASS   |
| 11ac(HT80)                              | CH42         | -0.28           | 11              | PASS   |



Test plots as follows:

Band I (5150 – 5250 MHz)

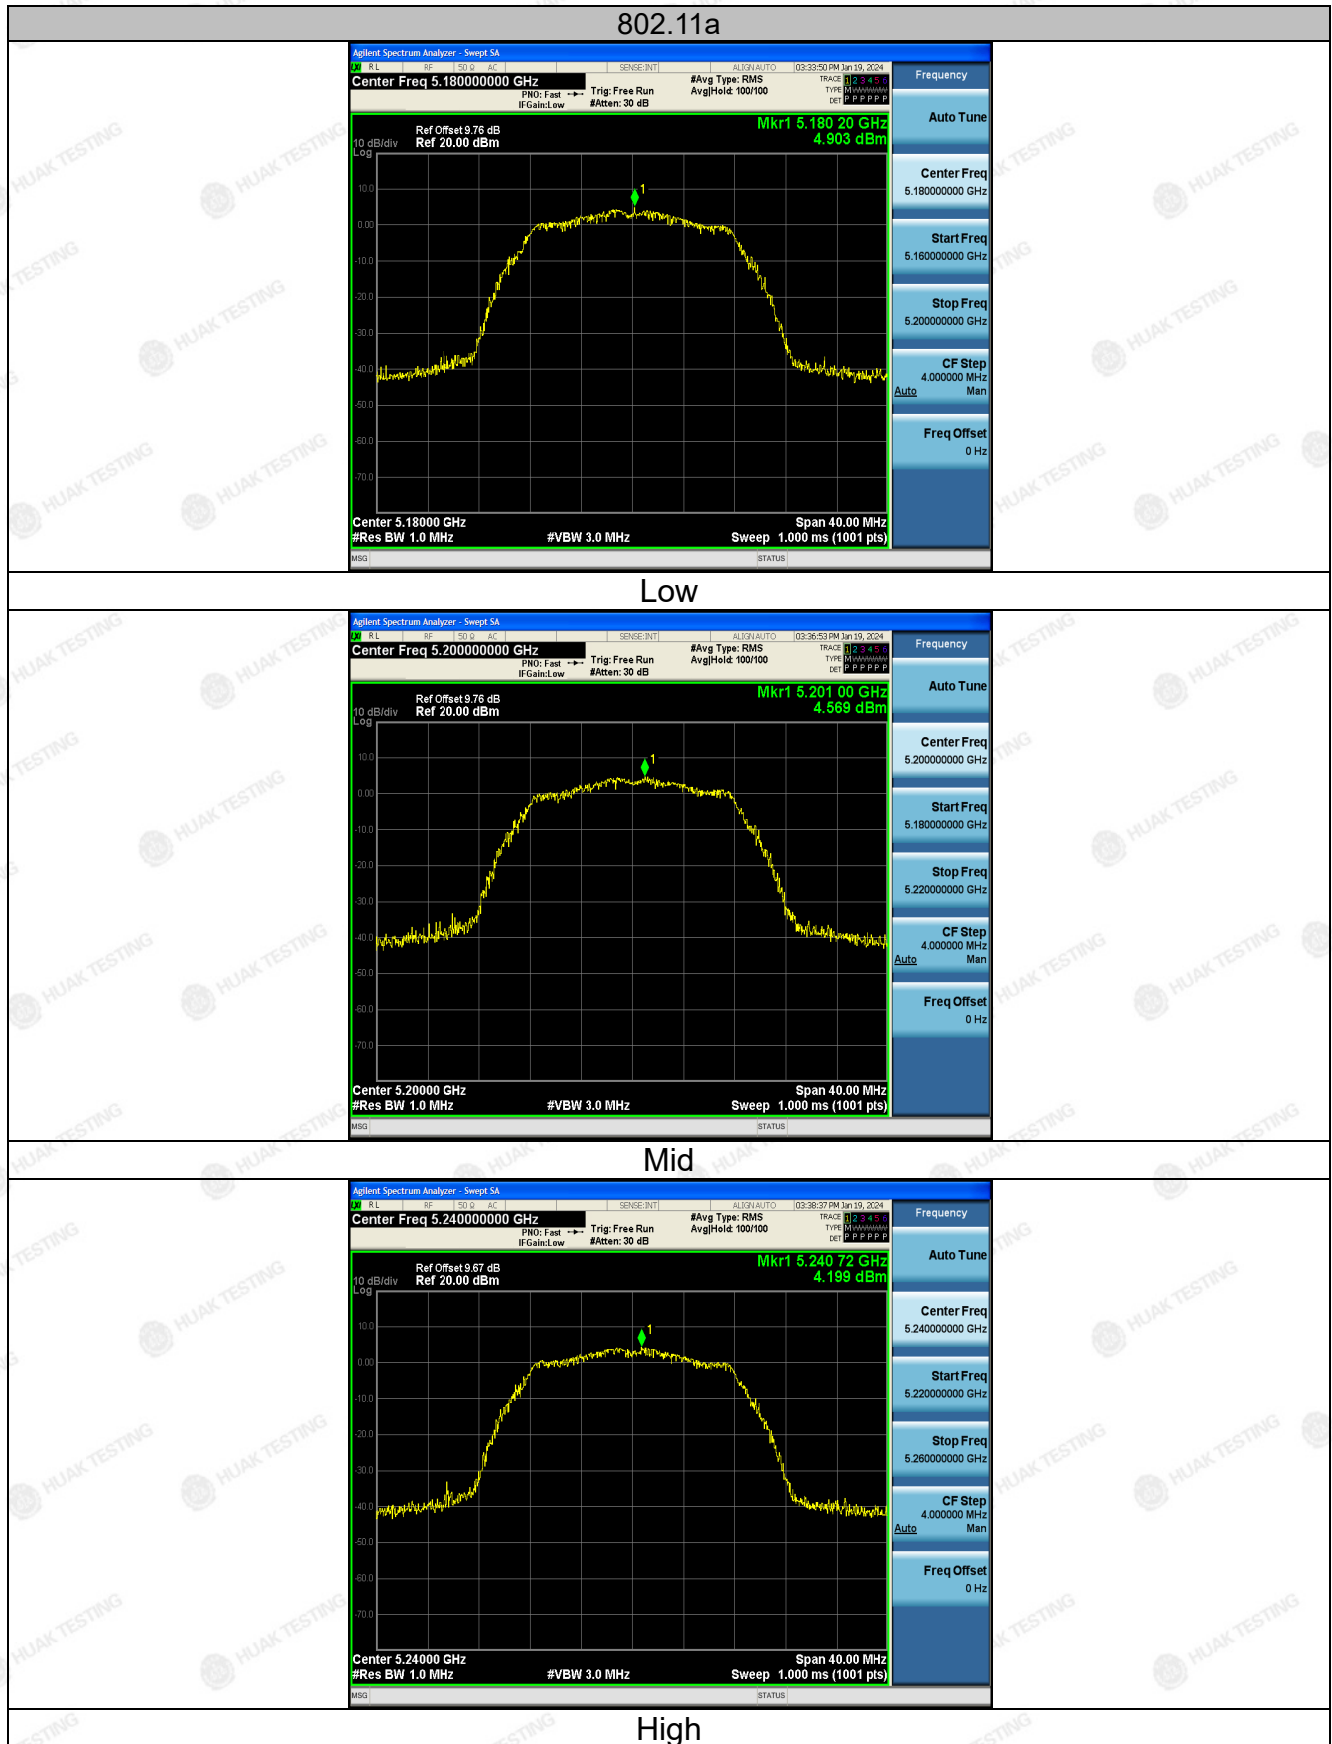

The results shown in this test report refer only to the sample(s) tested otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAKE, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : service@cer-mark.com

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China




The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAKE, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : service@cer-mark.com

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China



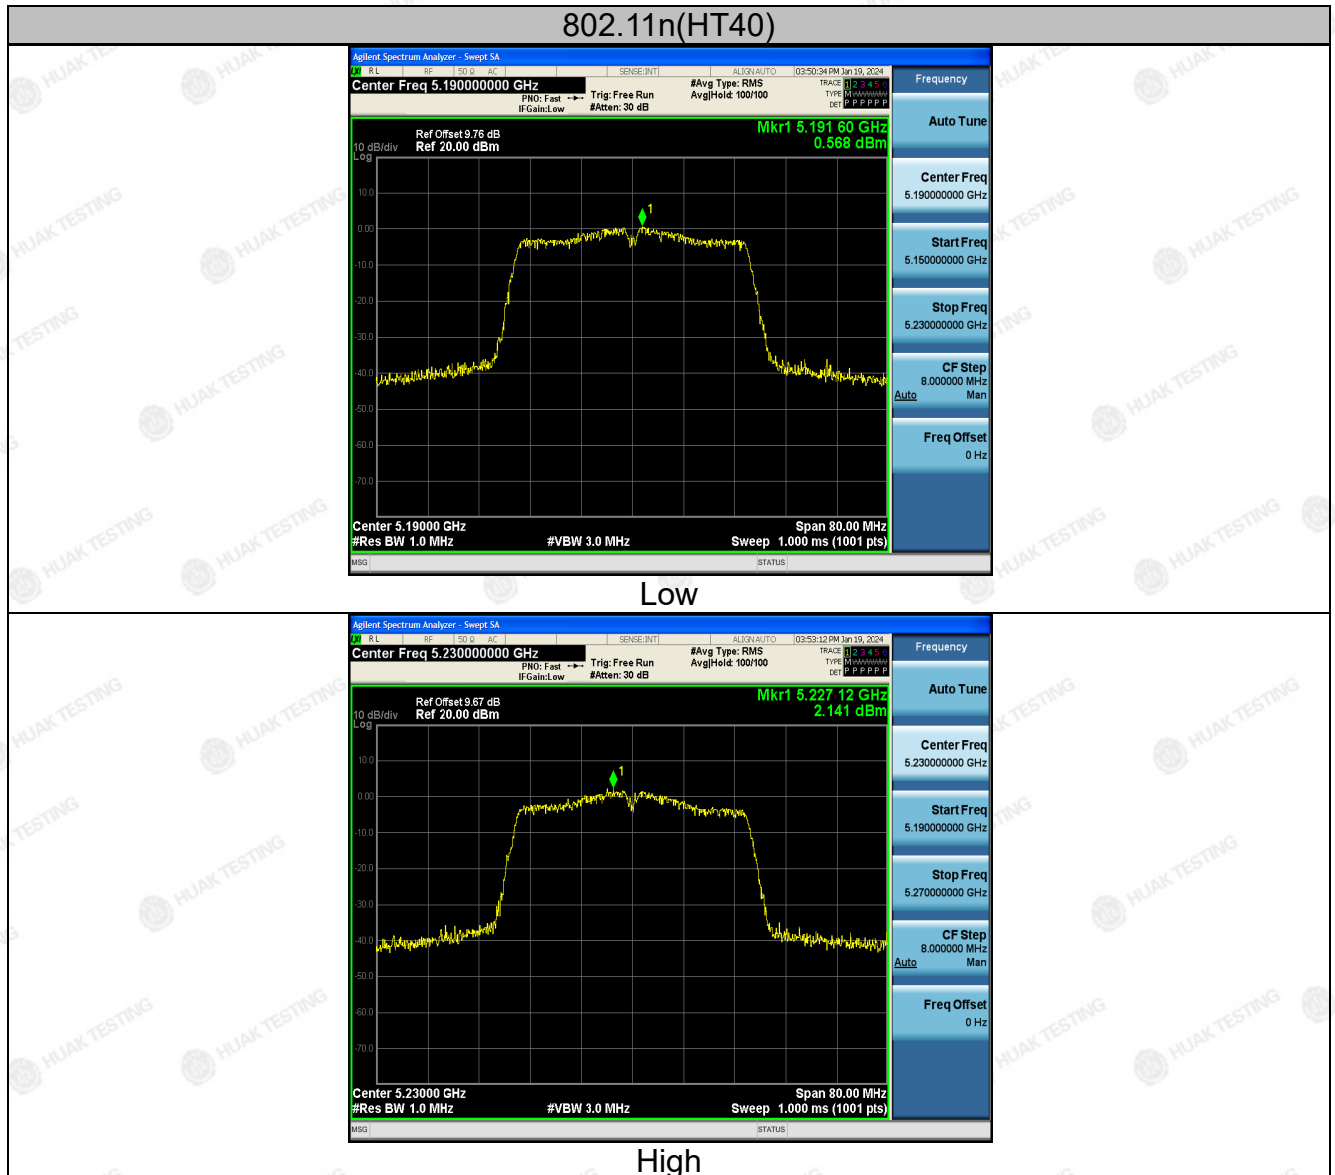

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAKE, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : [service@cer-mark.com](mailto:service@cer-mark.com)

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China



The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAKE, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : [service@cer-mark.com](mailto:service@cer-mark.com)

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China



## 802.11ac(HT40)



Low



High

## 802.11ac(HT80)



Low

**ANT 2**

| <b>Configuration Band I (5150 - 5250 MHz )</b> |                     |                            |                            |               |
|------------------------------------------------|---------------------|----------------------------|----------------------------|---------------|
| <b>Mode</b>                                    | <b>Test channel</b> | <b>Level<br/>[dBm/MHz]</b> | <b>Limit<br/>(dBm/MHz)</b> | <b>Result</b> |
| 11a                                            | CH36                | 4.41                       | 11                         | PASS          |
| 11a                                            | CH40                | 4.46                       | 11                         | PASS          |
| 11a                                            | CH48                | 4.18                       | 11                         | PASS          |
| 11n(HT20)                                      | CH36                | 2.42                       | 11                         | PASS          |
| 11n(HT20)                                      | CH40                | 2.43                       | 11                         | PASS          |
| 11n(HT20)                                      | CH48                | 2.32                       | 11                         | PASS          |
| 11n(HT40)                                      | CH38                | 1.86                       | 11                         | PASS          |
| 11n(HT40)                                      | CH46                | 2.85                       | 11                         | PASS          |
| 11ac(HT20)                                     | CH36                | 2.66                       | 11                         | PASS          |
| 11ac(HT20)                                     | CH40                | 1.89                       | 11                         | PASS          |
| 11ac(HT20)                                     | CH48                | 2.13                       | 11                         | PASS          |
| 11ac(HT40)                                     | CH38                | 1.91                       | 11                         | PASS          |
| 11ac(HT40)                                     | CH46                | 3.08                       | 11                         | PASS          |
| 11ac(HT80)                                     | CH42                | -0.16                      | 11                         | PASS          |





Test plots as follows:

Band I (5150 – 5250 MHz)



The results shown in this test report refer only to the sample(s) tested otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAKE, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : service@cer-mark.com


Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China



The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAKE, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : [service@cer-mark.com](mailto:service@cer-mark.com)

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

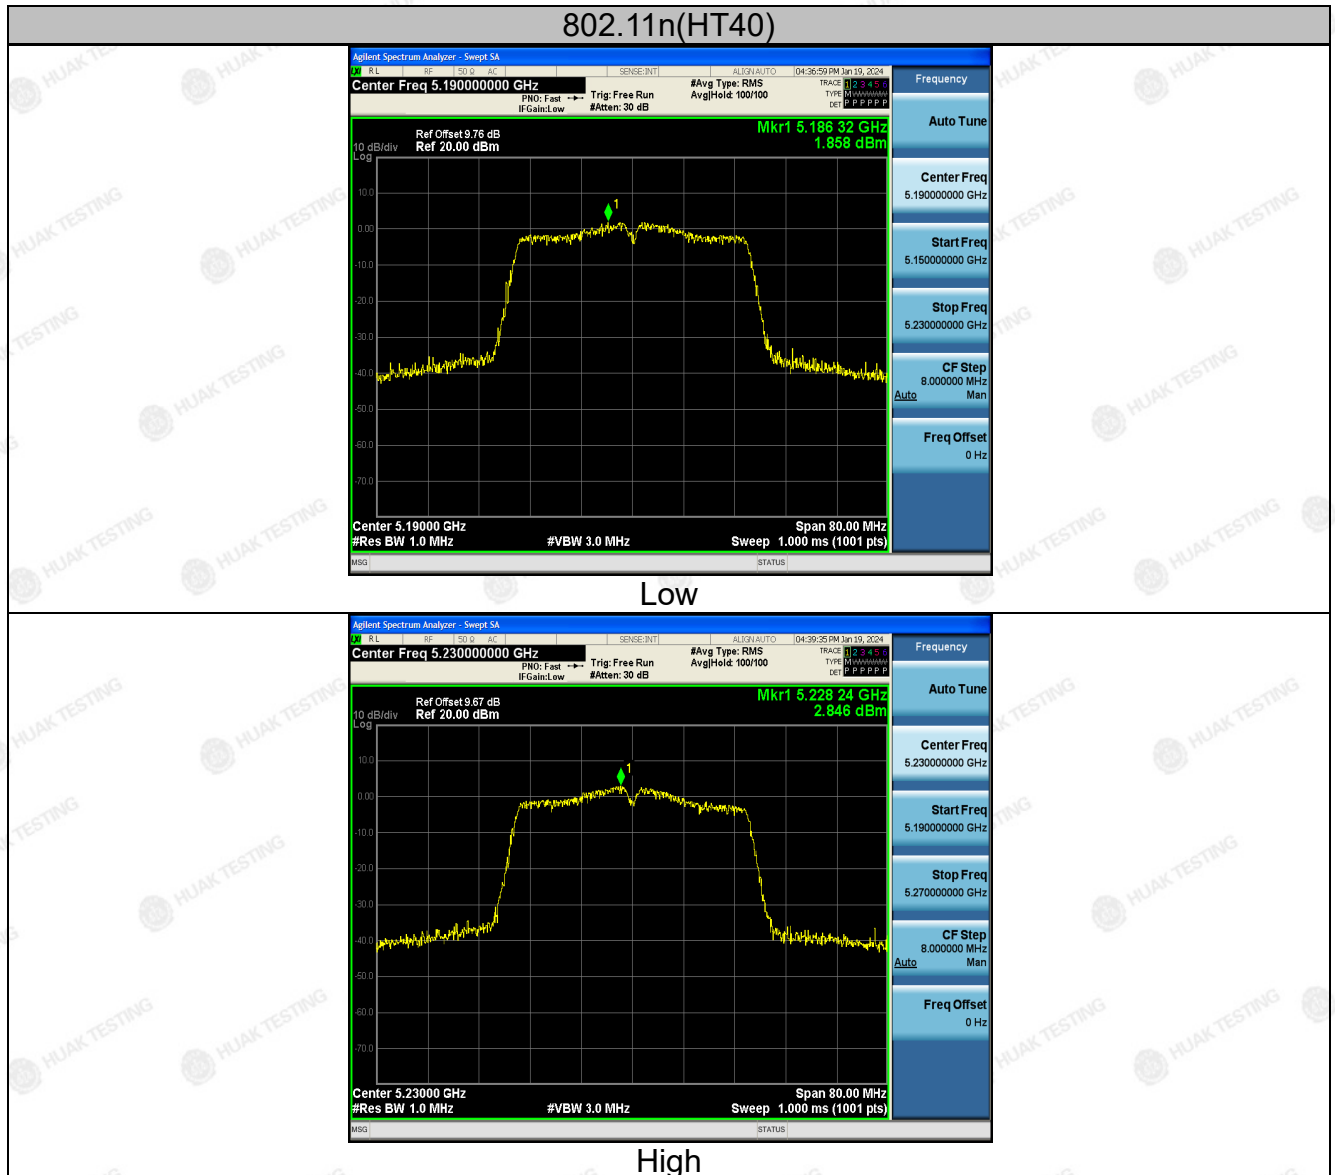

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAKE, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : [service@cer-mark.com](mailto:service@cer-mark.com)

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China



The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAKE, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : service@cer-mark.com

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China





## 802.11ac(HT40)



Low



High

## 802.11ac(HT80)



Low



## For MIMO antenna port 1+antenna port 2

## Configuration Band IV (5150 - 5250MHz )

| Mode                                                                                                                                                                                                                        | Test channel | Power Density (dBm) | Limit (dBm/MHz) | Result |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------|---------------------|-----------------|--------|
| 11n(HT20)                                                                                                                                                                                                                   | CH36         | 5.62                | 10.99           | PASS   |
| 11n(HT20)                                                                                                                                                                                                                   | CH40         | 5.43                | 10.99           | PASS   |
| 11n(HT20)                                                                                                                                                                                                                   | CH48         | 5.31                | 10.99           | PASS   |
| 11n(HT40)                                                                                                                                                                                                                   | CH38         | 4.27                | 10.99           | PASS   |
| 11n(HT40)                                                                                                                                                                                                                   | CH46         | 5.52                | 10.99           | PASS   |
| 11ac(HT20)                                                                                                                                                                                                                  | CH36         | 5.63                | 10.99           | PASS   |
| 11ac(HT20)                                                                                                                                                                                                                  | CH40         | 5.29                | 10.99           | PASS   |
| 11ac(HT20)                                                                                                                                                                                                                  | CH48         | 5.07                | 10.99           | PASS   |
| 11ac(HT40)                                                                                                                                                                                                                  | CH38         | 4.35                | 10.99           | PASS   |
| 11ac(HT40)                                                                                                                                                                                                                  | CH46         | 5.36                | 10.99           | PASS   |
| 11ac(HT80)                                                                                                                                                                                                                  | CH42         | 2.79                | 10.99           | PASS   |
| Note: 1 According to KDB 662911, Result power = $10\log(10^{(ant1/10)} + 10^{(ant2/10)})$ .<br>2 Result unit: W, The end result is converted to units of dBm.<br>limit=11dBm-(direction gain-6dBi)=11-(3+10log2-6)=10.99dBm |              |                     |                 |        |

Note: This product supports antenna 1 and antenna 2 launch, but only support 802.11 n/ac for MIMO mode, not support 802.11 a for MIMO mode.



## 4.6. Band Edge

### 4.6.1. Test Specification

|                          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
|--------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Test Requirement:</b> | FCC CFR47 Part 15E Section 15.407                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>Test Method:</b>      | ANSI C63.10 2013                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <b>Limit:</b>            | <p>(1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.</p> <p>(2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.</p> <p>(3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.</p> <p>(4) For transmitters operating in the 5.725-5.85 GHz band:</p> <p>(i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.</p> <p>The limit of frequency below 1GHz and which fall in restricted bands should complies 15.209.</p> |
| <b>Test Setup:</b>       |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Test Mode:</b>        | Transmitting mode with modulation                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |



|                        |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Test Procedure:</b> | <ol style="list-style-type: none"><li>1. The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.</li><li>2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.</li><li>3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.</li><li>4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.</li><li>5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</li><li>6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi peak or average method as specified and then reported in a data sheet.</li></ol> |
| <b>Test Result:</b>    | PASS                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |





## 4.6.2. Test Instruments

| Radiated Emission Test Site (966) |              |                 |               |                  |                 |
|-----------------------------------|--------------|-----------------|---------------|------------------|-----------------|
| Name of Equipment                 | Manufacturer | Model           | Serial Number | Calibration Date | Calibration Due |
| Receiver                          | R&S          | ESRP3           | HKE-005       | Feb. 17, 2023    | Feb. 16, 2024   |
| Spectrum analyzer                 | Agilent      | N9020A          | HKE-048       | Feb. 17, 2023    | Feb. 16, 2024   |
| Preamplifier                      | EMCI         | EMC051845 SE    | HKE-015       | Feb. 17, 2023    | Feb. 16, 2024   |
| Preamplifier                      | Agilent      | 83051A          | HKE-016       | Feb. 17, 2023    | Feb. 16, 2024   |
| Loop antenna                      | Schwarzbeck  | FMZB 1519 B     | HKE-014       | Feb. 17, 2023    | Feb. 16, 2024   |
| Broadband antenna                 | Schwarzbeck  | VULB 9163       | HKE-012       | Feb. 17, 2023    | Feb. 16, 2024   |
| Horn antenna                      | Schwarzbeck  | 9120D           | HKE-013       | Feb. 17, 2023    | Feb. 16, 2024   |
| Antenna Mast                      | Keleto       | CC-A-4M         | N/A           | N/A              | N/A             |
| Position controller               | Taiwan MF    | MF7802          | HKE-011       | Feb. 17, 2023    | Feb. 16, 2024   |
| Radiated test software            | Tonscend     | TS+ Rev 2.5.0.0 | HKE-082       | N/A              | N/A             |
| RF cable (9KHz-1GHz)              | Times        | 381806-001      | N/A           | N/A              | N/A             |
| Hf antenna                        | Schwarzbeck  | LB-180400-K F   | HKE-031       | Feb. 17, 2023    | Feb. 16, 2024   |
| RF cable                          | Tonscend     | 1-18G           | HKE-099       | Feb. 17, 2023    | Feb. 16, 2024   |
| RF cable                          | Times        | 1-40G           | HKE-034       | Feb. 17, 2023    | Feb. 16, 2024   |
| Horn Antenna                      | Schwarzbeck  | BBHA 9170       | HKE-017       | Feb. 17, 2023    | Feb. 16, 2024   |
| Spectrum analyzer                 | R&S          | FSP40           | HKE-025       | Feb. 17, 2023    | Feb. 16, 2024   |

**Note:** The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).