

承 認 書

SPECIFICATION FOR APPROVAL

客 戶: CUSTOMER:	红裕信
客 戶 料 號: CUST P/N:	
音 澤 料 號: FINE P/N:	G43.5*0.8-20.5-0.15*24-10TS-6.5UH-L25MM+BJ
產 品 型 號: DESC:	Φ 43.5MMX0.8MM
日 期: DATE:	2024/11/26
版 本: Version:	A.0

擬 制 PREPARED BY	審 核 CHECKED BY	批 准 APPROVED BY	客 戶 承 認 CUSTOMER APPROVE
何立成	马莉	但可清	

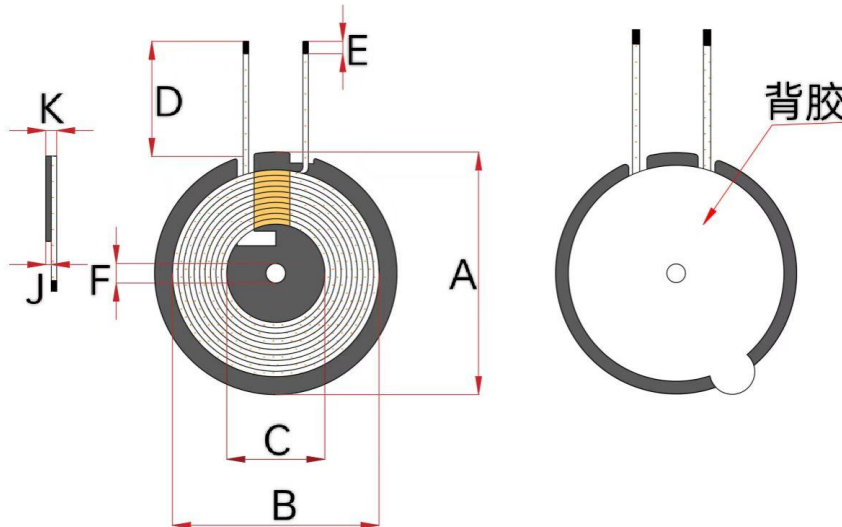
Manufacturer: Dongguan Yinze Electronic Technology Co., LTD  
Address: No. 901, Building 2, Xinghan Road, Chashan Town, Dongguan City  
但可清 TEL: 18617251159

We statement that All measurements were performed radiated and therefore additional antenna gain documentation is not required.

## Version Change History

[illegible]

# SPECIFICATION

产 品 型 号: DESC		G43.5*0.8-20.5-0.15*24-10TS- 6.5UH-L25MM+BJ		版本 Rev: A.0	客 户 CUST:  客户料号 CUST P/N:	
<div>一、尺寸 DIMENSION:(mm)</div> <div></div>					A	43.5±0.5
					B	40.5±0.5
					C	20.5±0.5
					D	25±2
					E	3±2
					F	5.3±0.2
					J	0.8±0.05
					K	≤2.3
					I	
					K	
二、原理图 SCHEMATIC DIAGRAM:		<div>注:</div> <div>1. Cross out wire;</div> <div>2. The coil is attached to the double-slot magnetic disc, the magnetic disc size is 43.5±0.5mm, and the thickness is 0.8±0.05mm.</div> <div>3. Glue the back of the magnetic disc</div>				
三、绕线参数 Winding Specification:						
序号 NO.	端子 TERMINAL	线径 WIRE	圈数 Turns			
1	S	F	Silk-covered wire 0.15*24			
四、电气特性 ELECTRICAL CHARACTERISTICS:						
温度 TEMPERATURE:25±10°C, 湿度 RELATIVE HUMIDITY:65±20%						
序号 NO.	项目 ITEM	端子 TERMINAL	标准 SPECIFICATION	测试条件 TEST FREQUENCY	测试仪器 TEST EQUIPMENTS	
1	IND.	S-F	3.7uH ±10%Individual coil	100KHz/1.0V	LCZ METER 1062B	
2	IND.	S-F	6.5uH ±10%Magnetized sheet	100KHz/1.0V	LCZ METER 1062B	
3	DCR	S-R	≤55mΩ		LCZ METER 502B	
	DCR					
拟制/日期 PREPARED BY/DATE			审核/日期 CHECKED BY/DATE			

何立成 2024.11.26	
----------------	--

## Eut Photo

