



APPENDIX B: PRODUCT DESCRIPTION

Technical data

UTS700X (main unit)

Dimensions approx. (W)44 × (L)105 × (H)
26.3 mm (excl.Antenna)

Weight approx. 95g

Power supply DC3.6V 350mAh

Continuous stand by time approx. 500 hours


Continuous talk time approx. 5 hours

AC adapter

Input AC110V 60Hz

Output DC 9V 100mA

Phone display

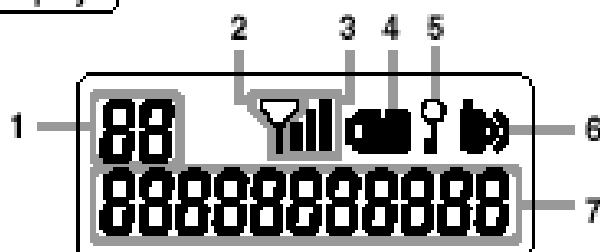

1. Information display area

This area includes indicators for missed calls, redial numbers, received call numbers, phonebook numbers etc.

2. Indicates when you are in a service area.

3. Indicates the strength of signal reception.

4. Battery mark

Indicates the battery level.



Enough to use ← Requires charging

5. Indicates when the phone is locked.

6. Indicates the ringer volume.

7. Phone display area

Displays phone numbers and other information.