

Project No: TM-2309000207P
Report No.: TMWK2309003308KR

FCC ID: KA2MS30A1

Page: 1 / 372
Rev.: 00

RADIO TEST REPORT

FCC 47 CFR PART 15 SUBPART C


Test Standard	FCC Part 15.247
Product name	AX3000 Wi-Fi 6 Smart Home Gateway Wi-Fi 6 AX3000 IoT Gateway
Brand Name	D-Link
Model No.	MS30
Test Result	Pass
Statements of Conformity	Determination of compliance is based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

The test Result was tested by Compliance Certification Services Inc. The test data, data evaluation, test procedures, and equipment configurations shown in this report were given in ANSI C63.10: 2013 and compliance standards.

The test results of this report relate only to the tested sample (EUT) identified in this report.

The test Report of full or partial shall not copy. Without written approval of Compliance Certification Services Inc. (Wugu Laboratory).

Approved by:



Sehni Hu
Supervisor

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instruction, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced, except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Revision History

Rev.	Issue Date	Revisions	Effect Page	Revised By
00	July 30, 2024	Initial Issue	ALL	Peggy Tsai

Table of contents

1.	GENERAL INFORMATION.....	4
1.1	EUT INFORMATION.....	4
1.2	EUT CHANNEL INFORMATION.....	5
1.3	ANTENNA INFORMATION.....	6
1.4	MEASUREMENT UNCERTAINTY	7
1.5	FACILITIES AND TEST LOCATION.....	7
1.6	INSTRUMENT CALIBRATION	8
1.7	SUPPORT AND EUT ACCESSORIES EQUIPMENT	10
1.8	TEST SETUP DIAGRAM	11
1.9	TEST PROGRAM	11
1.10	TEST METHODOLOGY AND APPLIED STANDARDS.....	11
2.	TEST SUMMARY.....	12
3.	DESCRIPTION OF TEST MODES.....	13
3.1	THE WORST MODE OF OPERATING CONDITION	13
3.2	THE WORST MODE OF MEASUREMENT.....	14
3.3	EUT DUTY CYCLE	15
4.	TEST RESULT.....	19
4.1	AC POWER LINE CONDUCTED EMISSION.....	19
4.2	6DB BANDWIDTH AND OCCUPIED BANDWIDTH(99%).....	24
4.3	OUTPUT POWER MEASUREMENT	53
4.4	POWER SPECTRAL DENSITY	66
4.5	CONDUCTED BANDEDGE AND SPURIOUS EMISSION.....	80
4.6	RADIATION BANDEDGE AND SPURIOUS EMISSION.....	111
APPENDIX A - PHOTOGRAPHS OF EUT		

1. GENERAL INFORMATION

1.1 EUT INFORMATION

Applicant	D-Link Corporation 14420 Myford Road Suite 100 Irvine California United States 92606
Manufacturer	D-Link Corporation 14420 Myford Road Suite 100 Irvine California United States 92606
Equipment	AX3000 Wi-Fi 6 Smart Home Gateway Wi-Fi 6 AX3000 IoT Gateway
Model No.	MS30
Model Discrepancy	N/A
Brand Name	D-Link
Received Date	January 31, 2024
Date of Test	April 16 ~ June 27, 2024
EUT Power Rating	EUT Power from Adapter. (1) AMIGO / AMS200-1201500FU I/P: 100-240Vac, 50/60Hz, 0.8A Max/50VA O/P: 12.0Vdc, 1.5A (2) AMIGO / AMS200-1201500F I/P: 100-240Vac, 50/60Hz, 0.8A Max/50VA O/P: 12.0Vdc, 1.5A, 18.0W
S.W Version	1.00
H.W: Version	A1

Remark:

- For more details, please refer to the User's manual of the EUT.
- Disclaimer: Antenna information is provided by the applicant, test results of this report are applicable to the sample EUT received.

1.2 EUT CHANNEL INFORMATION

Frequency Range	802.11b/g/n HT 20/ax HE20: 2412MHz ~ 2462MHz 802.11n HT 40/ax HE40: 2422MHz ~ 2452MHz
Modulation Type	1. IEEE 802.11b mode: CCK 2. IEEE 802.11g mode: OFDM 3. IEEE 802.11n HT 20 MHz mode : OFDM 4. IEEE 802.11n HT 40 MHz mode : OFDM 5. IEEE 802.11ax HE 20 MHz mode : OFDMA 6. IEEE 802.11ax HE 40 MHz mode : OFDMA
Number of channel	1. IEEE 802.11b mode: 11 Channels 2. IEEE 802.11g mode: 11 Channels 3. IEEE 802.11n HT 20 MHz mode : 11 Channels 4. IEEE 802.11n HT 40 MHz mode : 7 Channels 5. IEEE 802.11ax HE 20 MHz mode : 11 Channels 6. IEEE 802.11ax HE 40 MHz mode : 7 Channels

Remark:

Refer as ANSI C63.10: 2013 clause 5.6.1 Table 4 for test channels

Number of frequencies to be tested		
Frequency range in which device operates	Number of frequencies	Location in frequency range of operation
☐ 1 MHz or less	1	Middle
☐ 1 MHz to 10 MHz	2	1 near top and 1 near bottom
☒ More than 10 MHz	3	1 near top, 1 near middle, and 1 near bottom

1.3 ANTENNA INFORMATION

Antenna Type	☐ PIFA ☐ PCB ☒ Dipole ☐ Coils														
Antenna Gain	<table><thead><tr><th>Frequency</th><th>2G-1 (Chain 0) Gain (dBi)</th><th>2G-2 (Chain 1) Gain (dBi)</th><th>MIMO Gain (dBi)</th><th>Total Gain (dBi)</th></tr></thead><tbody><tr><td>2412-2472MHz</td><td>1.27</td><td>1.79</td><td>1.54</td><td>4.54</td></tr></tbody></table> Note: Total Gain=antenna gain + beamforming gain					Frequency	2G-1 (Chain 0) Gain (dBi)	2G-2 (Chain 1) Gain (dBi)	MIMO Gain (dBi)	Total Gain (dBi)	2412-2472MHz	1.27	1.79	1.54	4.54
Frequency	2G-1 (Chain 0) Gain (dBi)	2G-2 (Chain 1) Gain (dBi)	MIMO Gain (dBi)	Total Gain (dBi)											
2412-2472MHz	1.27	1.79	1.54	4.54											
Antenna Trade / Model	Chain 0: JAE / AP02DL2527487C0 Chain 1: JAE / AP02DL2527488C0														
Antenna Connector	MHF compatible														

Notes:

- 1.The antenna(s) of the EUT are permanently attached and there are no provisions for connection to an external antenna. So the EUT complies with the requirements of §15.203.
2. Power Directional Gain = $10 \log[(10G1/20 + 10G2/20 + \dots + 10GN/20)^2/NANT]$ dBi for BF Mode.
Power Directional gain = $10 \log[(10G1/10 + 10G2/10 + \dots + 10GN/10)/NANT]$ dBi for MIMO(CDD) mode.

1.4 MEASUREMENT UNCERTAINTY

PARAMETER	UNCERTAINTY
AC Powerline Conducted Emission	± 2.213 dB
Channel Bandwidth	± 2.7 %
RF output power (Power Meter + Power sensor)	± 0.243 dB
Power Spectral density	± 2.739 dB
Conducted Bandedge	± 2.739 dB
Conducted Spurious Emission	± 2.742 dB
Radiated Emission_9kHz-30MHz	± 3.761 dB
Radiated Emission_30MHz-200MHz	± 3.473 dB
Radiated Emission_200MHz-1GHz	± 3.946 dB
Radiated Emission_1GHz-6GHz	± 4.797 dB
Radiated Emission_6GHz-18GHz	± 4.803 dB
Radiated Emission_18GHz-26GHz	± 3.459 dB
Radiated Emission_26GHz-40GHz	± 3.297 dB

Remark:

- 1.This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2
2. ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report.

1.5 FACILITIES AND TEST LOCATION

All measurement facilities used to collect the measurement data are located at

☒ No.11, Wugong 6th Rd., Wugu Dist., New Taipei City, Taiwan.

CAB identifier: TW1309

Test site	Test Engineer	Remark
AC Conduction Room	Ben Yang	-
Radiation	Tony Chao 、 Ray Li	-
RF Conducted	Marco Chan	-

Remark: The lab has been recognized as the FCC accredited lab. under the KDB 974614 D01 and is listed in the FCC pubic Access Link (PAL) database, FCC Registration No. :444940, the FCC Designation No.:TW1309

1.6 INSTRUMENT CALIBRATION

Conducted_FCC/IC/NCC (All)					
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Date	Calibration Due
Power Sensor	Anritsu	MA2411B	1911387	2023-07-25	2024-07-24
Power Meter	Anritsu	ML2496A	2136002	2023-11-16	2024-11-15
Signal Analyzer	KEYSIGHT	N9030B	MY62291089	2023-10-13	2024-10-12
Attenuator	Marvelous Microwave Inc	MVE2213-10	08	2023-11-07	2024-11-06
Software	Radio Test Software Ver. 21				

966A_Radiated Wi-Fi 2.4GHz					
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Date	Calibration Due
Signal Analyzer	KEYSIGHT	N9010A	MY52220817	2024-03-15	2025-03-14
Thermo-Hygro Meter	WISEWIND	1206	D07	2023-12-08	2024-12-07
Active Loop Antenna	SCHWARZBECK	FMZB 1513-60	1513-60-028	2023-12-13	2024-12-12
Bi-Log Antenna	Sunol Sciences	JB3	A030105	2023-08-08	2024-08-07
Preamplifier	EMEC	EM330	060609	2024-02-21	2025-02-20
Cable	Huber+Suhner	104PEA	20995+21000+182330	2024-02-21	2025-02-20
Horn Antenna	ETC	MCTD 1209	DRH13M02003	2023-12-28	2024-12-27
Preamplifier	HP	8449B	3008A00965	2023-12-22	2024-12-21
Cable	EMCI	EMC101G	221213+221011+221012	2023-10-17	2024-10-16
Attenuator	Mini-Circuits	BW-S9W5	BWS9W5-09-966A-01	2024-02-07	2025-02-06
High Pass Filters	Titan Microwave	T04H30001800070S01	22011402-4	2023-06-17	2024-06-16
				2024-06-12	2025-06-13
Horn Antenna	SCHWARZBECK	BBHA9170	1047	2023-12-13	2024-12-12
Pre-Amplifier	EMCI	EMC184045SE	980860	2023-12-12	2024-12-11
Turn Table	CCS	CC-T-1F	N/A	N.C.R	N.C.R
Controller	CCS	CC-C-1F	N/A	N.C.R	N.C.R
Antenna Tower	CCS	CC-A-1F	N/A	N.C.R	N.C.R
Site Validation	CCS	966A	N/A	2023-07-10	2024-07-09
Software	e3 V9-210616c				

Remark:

- Each piece of equipment is scheduled for calibration once a year.
- N.C.R. = No Calibration Required.

AC Mains Conduction					
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Date	Calibration Due
EMI Test Receiver	R&S	ESCI	100064	2024-06-14	2025-06-13
LISN	TESEQ	LN2-16N	22012	2024-02-29	2025-02-27
Cable	EMCI	CFD300-NL	CERF	2023-06-27	2024-06-26
				2024-06-26	2025-06-25
Software	e3 V6-110812				

Remark:

- Each piece of equipment is scheduled for calibration once a year.
- N.C.R. = No Calibration Required.

1.7 SUPPORT AND EUT ACCESSORIES EQUIPMENT


EUT Accessories Equipment						
No.	Equipment	Brand	Model	Series No.	FCC ID	IC
	N/A					

Support Equipment (Conducted)					
No.	Equipment	Brand	Model	Series No.	FCC ID
1	NB(L)	Lenovo	X260	N/A	N/A
A	Adapter	AMIGO	AMS200-1201500FU	N/A	N/A
B	RJ45	Nienyi Group	NYS4710	N/A	N/A

Support Equipment (RSE)					
No.	Equipment	Brand	Model	Series No.	FCC ID
1	NB(D)	Lenovo	ThinkPad X260	N/A	N/A
2	Adapter	Lenovo	ADLX45DLC3A	N/A	N/A
A	Adapter	AMIGO	AMS200-1201500FU	N/A	N/A
B	RJ45	Nienyi Group	NYS4710	N/A	N/A

Support Equipment (Conduction)					
No.	Equipment	Brand	Model	Series No.	FCC ID
1	NB(D)	Lenovo	ThinkPad X260	N/A	N/A
A	Adapter	AMIGO	AMS200-1201500FU	N/A	N/A
B	RJ45	Nienyi Group	NYS4710	N/A	N/A

1.8 TEST SETUP DIAGRAM

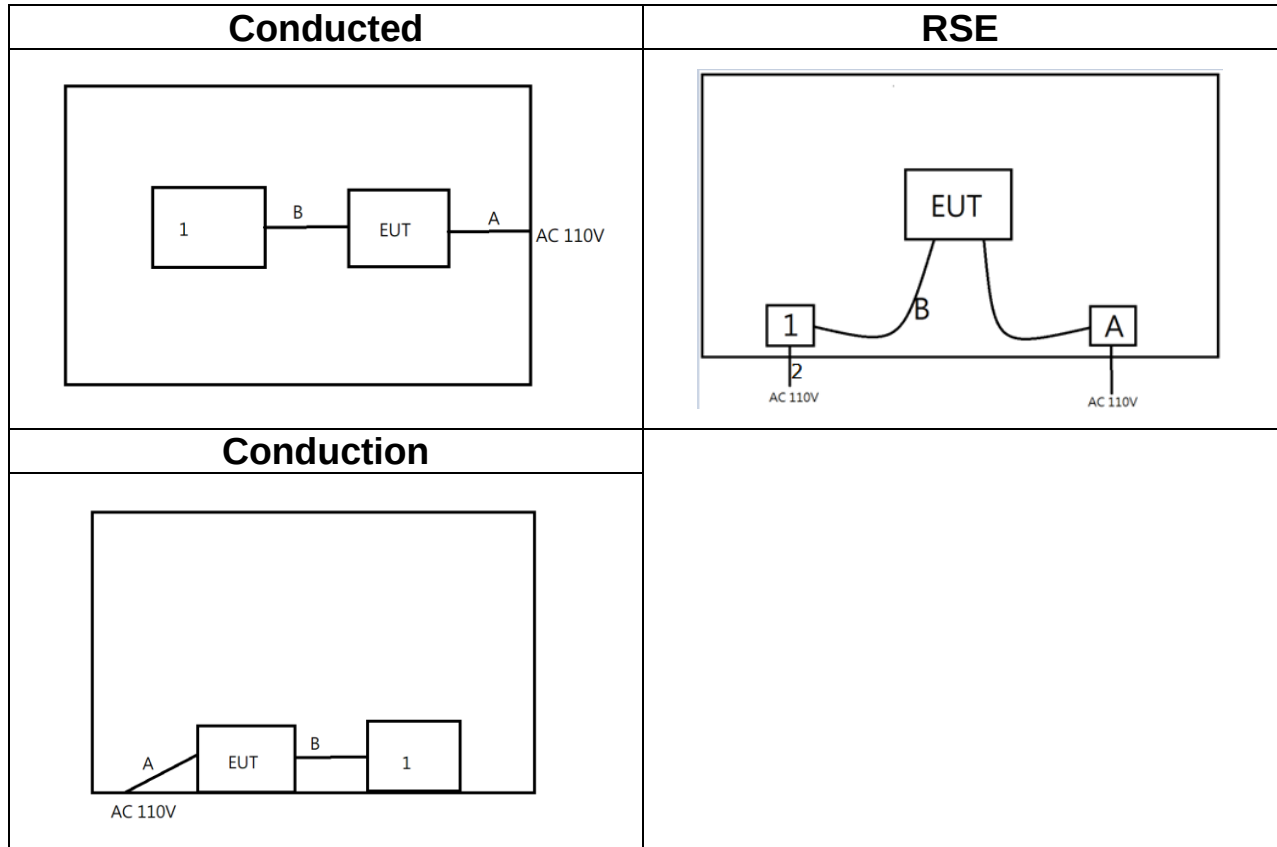

1.9 TEST PROGRAM

The EUT connection corresponds to the surrounding fixture control board.

This EUT uses " Tera Term v4.73 " and " QA Tool v0.0.2.17 " software to set the frequency, modulation, and power to allow the sample to continuously transmit (including frequency hopping mode and Co-Location).

1.10 TEST METHODOLOGY AND APPLIED STANDARDS

The test methodology, setups and results comply with all requirements in accordance with ANSI C63.10:2013, FCC Part 2, FCC Part 15.247, KDB 662911 D01, KDB 558074 D01.

2. TEST SUMMARY

FCC Standard Section	Report Section	Test Item	Result
15.203	1.3	Antenna Requirement	Pass
15.207(a)	4.1	AC Conducted Emission	Pass
15.247(a)(2)	4.2	6 dB Bandwidth	Pass
-	4.2	Occupied Bandwidth (99%)	Pass
15.247(b)(3)	4.3	Output Power Measurement	Pass
15.247(e)	4.4	Power Spectral Density	Pass
15.247(d)	4.5	Conducted Band Edge	Pass
15.247(d)	4.5	Conducted Emission	Pass
15.247(d) 15.205, 15.209	4.6	Radiation Band Edge	Pass
15.247(d) 15.205, 15.209	4.6	Radiation Spurious Emission	Pass

3. DESCRIPTION OF TEST MODES

3.1 THE WORST MODE OF OPERATING CONDITION

Operation mode	IEEE 802.11b mode :1Mbps IEEE 802.11g mode :6Mbps IEEE 802.11n HT20 mode :MCS0 IEEE 802.11n HT40 mode :MCS0 IEEE 802.11ax HE20 mode :MCS0 IEEE 802.11ax HE40 mode :MCS0
Test Channel Frequencies	IEEE 802.11b mode : 1. Lowest Channel : 2412MHz 2. Middle Channel : 2437MHz 3. Highest Channel : 2462MHz IEEE 802.11g mode : 1. Lowest Channel : 2412MHz 2. Middle Channel : 2437MHz 3. Highest Channel : 2462MHz IEEE 802.11n HT20 mode : 1. Lowest Channel : 2412MHz 2. Middle Channel : 2437MHz 3. Highest Channel : 2462MHz IEEE 802.11n HT40 mode : 1. Lowest Channel : 2422MHz 2. Middle Channel : 2437MHz 3. Highest Channel : 2452MHz IEEE 802.11ax HE20 mode : 1. Lowest Channel : 2412MHz 2. Middle Channel : 2437MHz 3. Highest Channel : 2462MHz IEEE 802.11ax HE40 mode : 1. Lowest Channel : 2422MHz 2. Middle Channel : 2437MHz 3. Highest Channel : 2452MHz
Operation Transmitter	IEEE 802.11b mode : 2T2R (SISO) IEEE 802.11g mode : 2T2R (SISO) IEEE 802.11n HT20 mode : 2T2R (MIMO) IEEE 802.11n HT40 mode : 2T2R (MIMO) IEEE 802.11ax HE20 mode : 2T2R (MIMO) IEEE 802.11ax HE40 mode : 2T2R (MIMO)

Remark:

1. EUT pre-scanned data rate of output power for each mode, the worst data rate were recorded in this report.
2. Based on FCC Part 15.31(m), the laboratory conducts a comprehensive evaluation of ch low, ch middle, and ch high. Other additional channels only evaluate the radiated restricted bands of operation and powers.

3.2 THE WORST MODE OF MEASUREMENT

AC Power Line Conducted Emission	
Test Condition	AC Power line conducted emission for line and neutral
Power supply Mode	Mode 1: EUT Power by Adapter(AMS200-1201500FU) Mode 2: EUT Power by Adapter(AMS200-1201500F)
Worst Mode	☒ Mode 1 ☐ Mode 2 ☐ Mode 3 ☐ Mode 4

Radiated Emission Measurement Above 1G	
Test Condition	Radiated Emission Above 1G
Power supply Mode	Mode 1: EUT Power by Adapter(AMS200-1201500FU) Mode 2: EUT Power by Adapter(AMS200-1201500F)
Worst Mode	☒ Mode 1 ☐ Mode 2 ☐ Mode 3 ☐ Mode 4
Worst Position	☐ Placed in fixed position. ☒ Placed in fixed position at X-Plane (E2-Plane) ☐ Placed in fixed position at Y-Plane (E1-Plane) ☐ Placed in fixed position at Z-Plane (H-Plane)

Radiated Emission Measurement Below 1G	
Test Condition	Radiated Emission Below 1G
Power supply Mode	Mode 1: EUT Power by Adapter(AMS200-1201500FU) Mode 2: EUT Power by Adapter(AMS200-1201500F)
Worst Mode	☒ Mode 1 ☐ Mode 2 ☐ Mode 3 ☐ Mode 4

Radiated Emission Measurement [Co-Location]	
Test Condition	Radiated Emission [Co-Location]
Power supply Mode	Mode 1: EUT Power by Wi-Fi 2.4G+Wi-Fi 5G+Zigbee Mode 2: EUT Power by Wi-Fi 2.4G+Wi-Fi 5G+BLE_2M
Worst Mode	☐ Mode 1 ☒ Mode 2 ☐ Mode 3 ☐ Mode 4

Remark:

1. The worst mode was record in this test report.
2. AC power line conducted emission and were performed the EUT transmit at the highest output power channel as worse case.
3. EUT pre-scanned in three axis ,X,Y, Z and two polarity, for radiated measurement. The worst case(X-Plane) were recorded in this report
4. The device supports SISO and MIMO at 802.11n20/n40/ax20/ax40 mode, per pre-test, MIMO 2TX mode was the worst and reported.
5. The device supports non_BF and BF modes. Since the non _BF mode similar to BF radio frequency characteristics, some test items of BF mode will be exempted.


3.3 EUT DUTY CYCLE

Non-Beamforming


Temperature: 20.3 ~ 24.5°C **Test date:** May 21 ~ June 27, 2024
Humidity: 53 ~ 64% RH **Tested by:** Marco Chan

Mode		Duty Cycle (%) = Ton / (Ton+Toff)	Duty Factor (dB) =10*log (1/Duty Cycle)	1/T (kHz)	VBW setting (kHz)
802.11b		99.34	0.03	0.12	0.01
802.11g		96.01	0.18	0.72	1.00
802.11n_20		95.74	0.19	0.77	1.00
802.11n_40		91.91	0.37	1.54	2.00
Mode	RU Config	Duty Cycle (%) = Ton / (Ton+Toff)	Duty Factor (dB) =10*log (1/Duty Cycle)	1/T (kHz)	VBW setting (kHz)
802.11ax_20	Full	94.74	0.23	0.97	1.00
802.11ax_40	Full	90.56	0.43	1.83	2.00


802.11b 20MHz Chain0 2412MHz

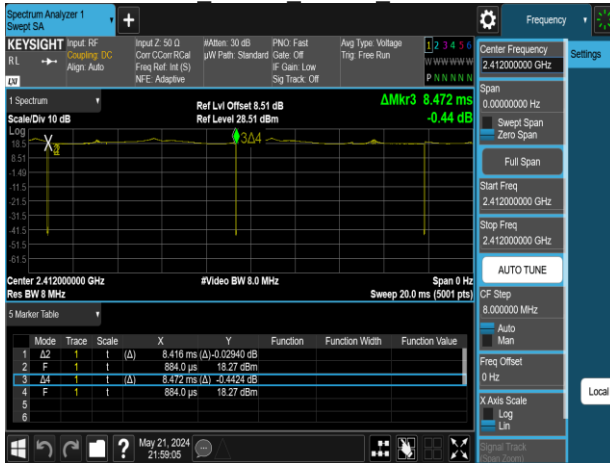


802.11n 40MHz Chain0 2422MHz

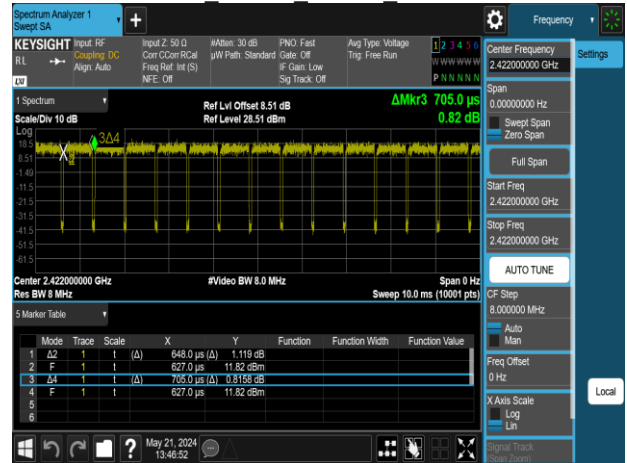


802.11g 20MHz Chain0 2412MHz

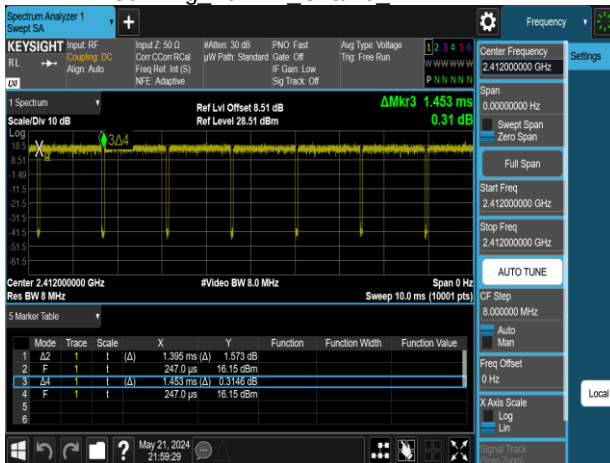


802.11ax 20MHz Chain0 2412MHz

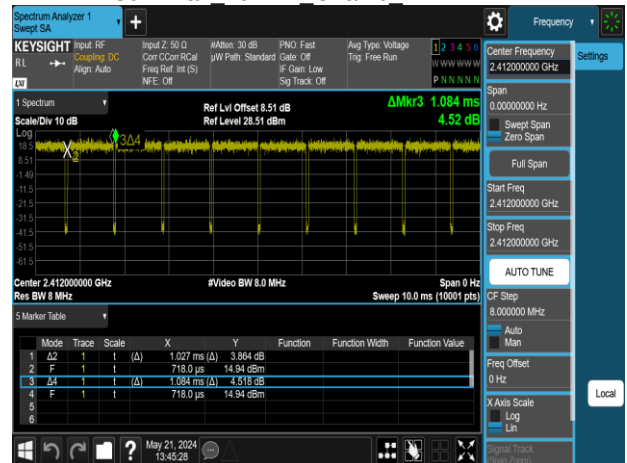

802.11n 20MHz Chain0 2412MHz

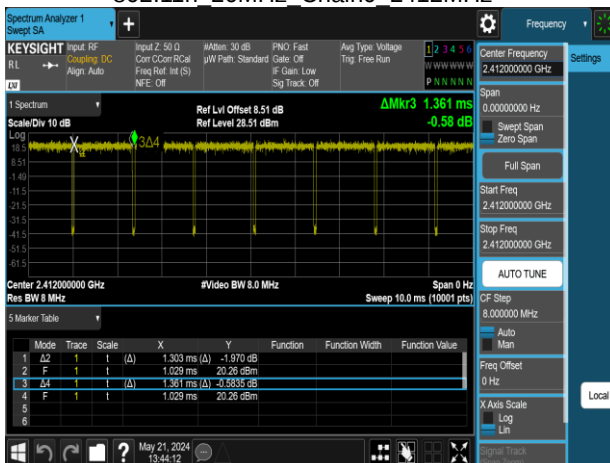

802.11ax 40MHz Chain0 2422MHz

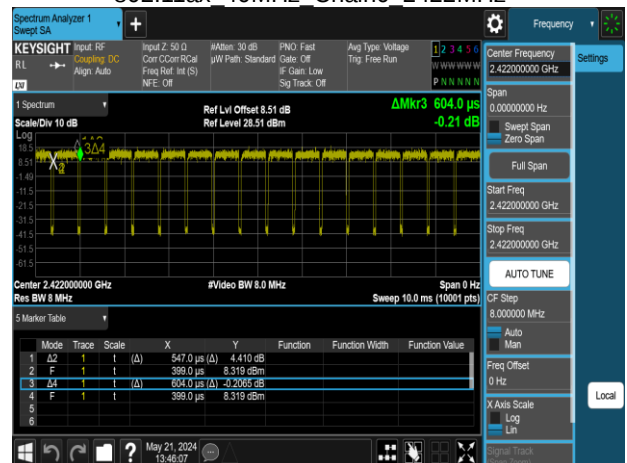

Beamformig

Temperature: 23.7 ~ 23.8°C


Test date: June 13 ~ 14, 2024

Humidity: 55 ~ 58% RH


Tested by: Marco Chan

Mode		Duty Cycle (%) = Ton / (Ton+Toff)	Duty Factor (dB) =10*log (1/Duty Cycle)	1/T (kHz)	VBW setting (kHz)
802.11n_20		88.89	0.51	0.40	1.00
802.11n_40		88.71	0.52	0.41	1.00
Mode	RU Config	Duty Cycle (%) = Ton / (Ton+Toff)	Duty Factor (dB) =10*log (1/Duty Cycle)	1/T (kHz)	VBW setting (kHz)
802.11ax_20	Full	92.29	0.35	0.26	1.00
802.11ax_40	Full	85.87	0.66	0.52	1.00


802.11n 20MHz Chain0 2412MHz

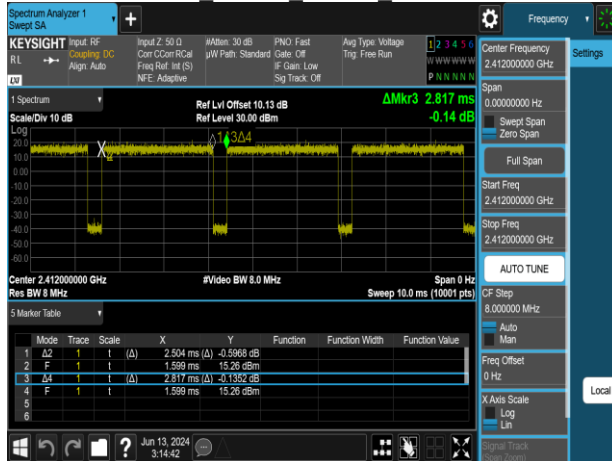


802.11ax 20MHz Chain0 2412MHz

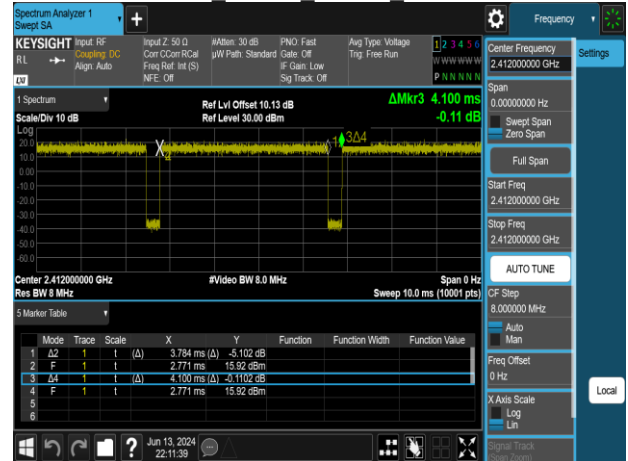

802.11n 40MHz Chain0 2422MHz

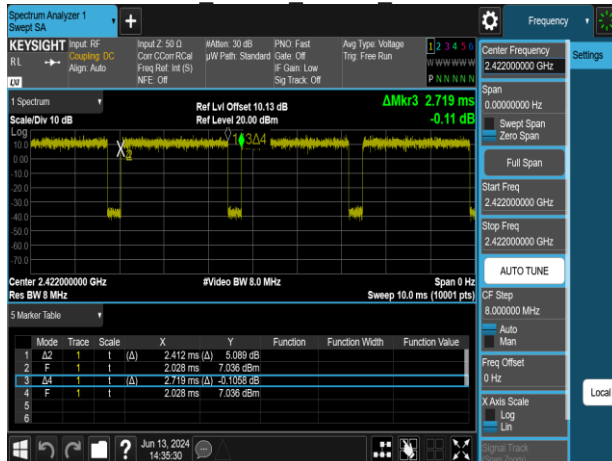

802.11ax 40MHz Chain0 2422MHz

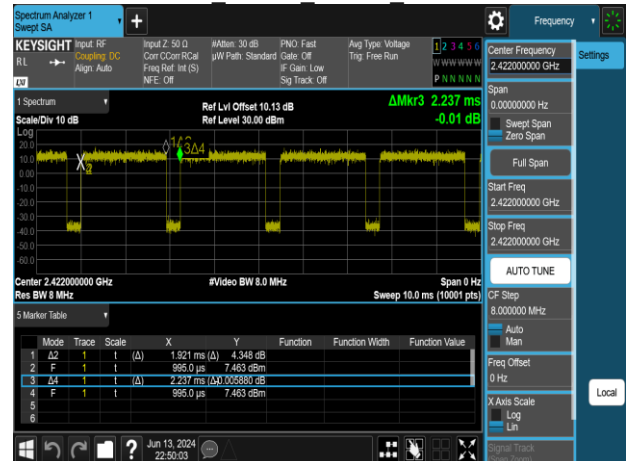

4. TEST RESULT

4.1 AC POWER LINE CONDUCTED EMISSION

4.1.1 Test Limit

According to §15.207(a),

Frequency Range (MHz)	Limits(dBμV)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56*	56 to 46*
0.50 to 5	56	46
5 to 30	60	50


* Decreases with the logarithm of the frequency.

4.1.2 Test Procedure

Test method Refer as ANSI C63.10: 2013 clause 6.2,

1. The EUT was placed on a non-conducted table, which is 0.8m above horizontal ground plane and 0.4m above vertical ground plane.
2. EUT connected to the line impedance stabilization network (LISN)
3. Receiver set RBW of 9kHz and Detector Peak, and note as quasi-peak and average.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. Recorded Line for Neutral and Line.


4.1.3 Test Setup

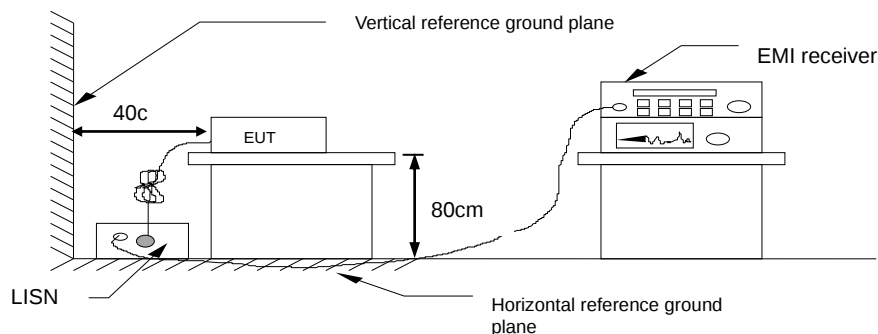

4.1.4 Test Result

Project No : TM-2309000207P
Operation Mode : 2.4G
Test Chamber : Conduction
Probe : LINE
Note :

Test Date : 2024-06-24
Temp./Humi. : 23.4°C / 54%
Engineer : Ben Yang
Test Voltage : AC 120V/60Hz

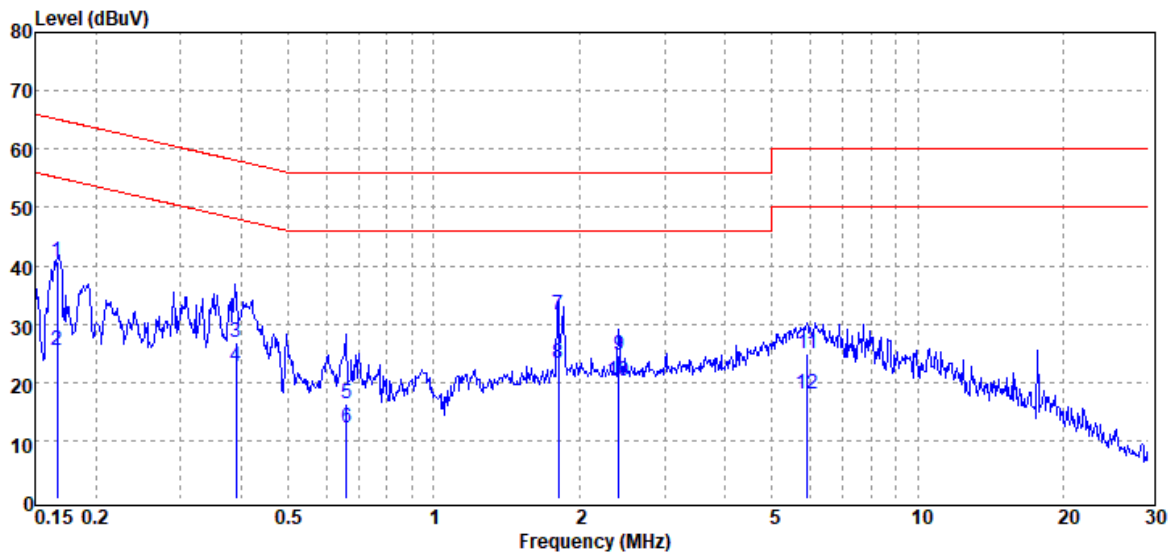

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV	Limit dBμV	Margin dB
0.167	QP	40.57	0.14	40.71	65.12	-24.41
0.167	Average	25.39	0.14	25.53	55.12	-29.59
0.390	QP	26.72	0.14	26.86	58.06	-31.20
0.390	Average	22.50	0.14	22.64	48.06	-25.42
0.661	QP	16.18	0.16	16.34	56.00	-39.66
0.661	Average	11.92	0.16	12.08	46.00	-33.92
1.809	QP	31.39	0.20	31.59	56.00	-24.41
1.809	Average	23.17	0.20	23.37	46.00	-22.63
2.414	QP	24.51	0.23	24.74	56.00	-31.26
2.414	Average	19.98	0.23	20.21	46.00	-25.79
5.922	QP	24.70	0.29	24.99	60.00	-35.01
5.922	Average	17.79	0.29	18.08	50.00	-31.92


Note: 1. Actual FS= Spectrum Read Level + Factor

Note: 2. Margin= Actual FS - Limit

Report No.: TMWK2309003308KR

Project No : TM-2309000207P
Operation Mode : 2.4G
Test Chamber : Conduction
Probe : NEUTRAL
Note :

Test Date : 2024-06-24
Temp./Humi. : 23.4°C / 54%
Engineer : Ben Yang
Test Voltage : AC 120V/60Hz

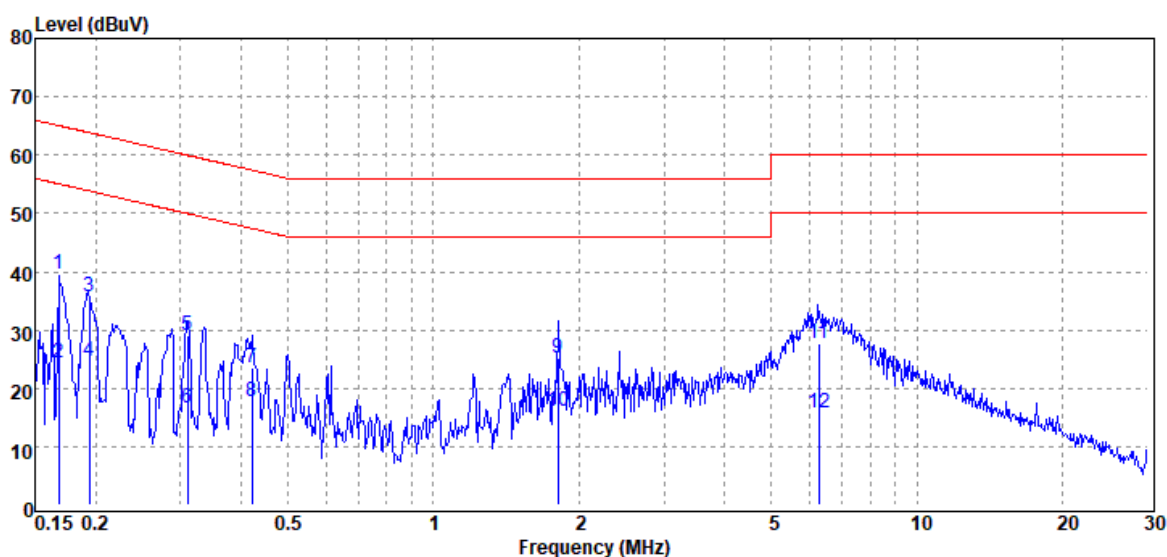

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV	Limit dBμV	Margin dB
0.168	QP	39.36	0.11	39.47	65.06	-25.59
0.168	Average	24.11	0.11	24.22	55.06	-30.84
0.194	QP	35.61	0.11	35.72	63.86	-28.14
0.194	Average	24.48	0.11	24.59	53.86	-29.27
0.310	QP	28.87	0.11	28.98	59.97	-30.99
0.310	Average	16.46	0.11	16.57	49.97	-33.40
0.422	QP	23.37	0.11	23.48	57.41	-33.93
0.422	Average	17.60	0.11	17.71	47.41	-29.70
1.812	QP	25.10	0.18	25.28	56.00	-30.72
1.812	Average	15.78	0.18	15.96	46.00	-30.04
6.277	QP	27.46	0.27	27.73	60.00	-32.27
6.277	Average	15.52	0.27	15.79	50.00	-34.21

Note: 1. Actual FS= Spectrum Read Level + Factor


Note: 2. Margin= Actual FS - Limit

Report No.: TMWK2309003308KR

Page: 22 / 372
Rev.: 00

Project No : TM-2309000207P
Operation Mode : 2.4G
Test Chamber : Conduction
Probe : LINE
Note :

Test Date : 2024-06-24
Temp./Humi. : 23.4°C / 54%
Engineer : Ben Yang
Test Voltage : AC 230V/50Hz

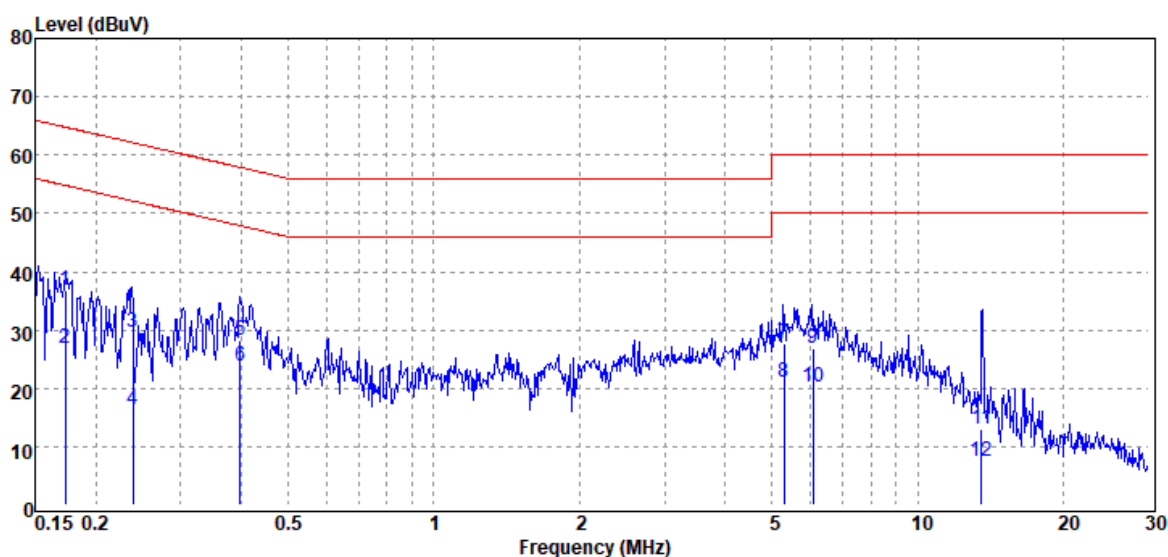

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV	Limit dBμV	Margin dB
0.173	QP	36.80	0.14	36.94	64.80	-27.86
0.173	Average	26.83	0.14	26.97	54.80	-27.83
0.239	QP	29.60	0.14	29.74	62.14	-32.40
0.239	Average	16.21	0.14	16.35	52.14	-35.79
0.398	QP	27.98	0.14	28.12	57.90	-29.78
0.398	Average	23.72	0.14	23.86	47.90	-24.04
5.290	QP	27.29	0.29	27.58	60.00	-32.42
5.290	Average	20.81	0.29	21.10	50.00	-28.90
6.077	QP	26.67	0.29	26.96	60.00	-33.04
6.077	Average	20.02	0.29	20.31	50.00	-29.69
13.560	QP	12.61	0.40	13.01	60.00	-46.99
13.560	Average	7.15	0.40	7.55	50.00	-42.45


Note: 1. Actual FS= Spectrum Read Level + Factor

Note: 2. Margin= Actual FS - Limit

Report No.: TMWK2309003308KR

Project No : TM-2309000207P
Operation Mode : 2.4G
Test Chamber : Conduction
Probe : NEUTRAL
Note :

Test Date : 2024-06-24
Temp./Humi. : 23.4°C / 54%
Engineer : Ben Yang
Test Voltage : AC 230V/50Hz

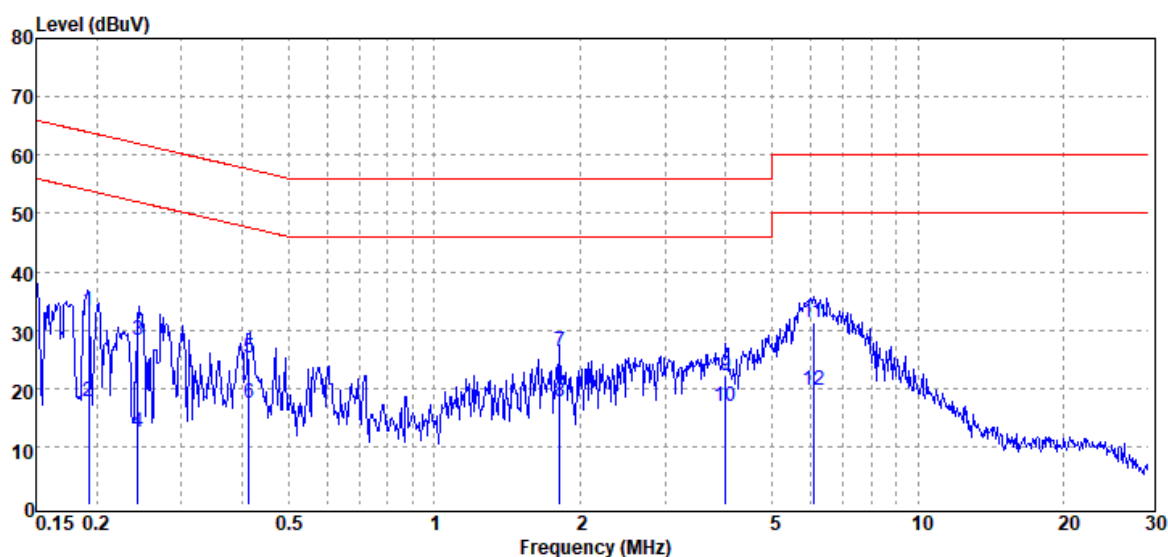

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV	Limit dBμV	Margin dB
0.193	QP	33.16	0.11	33.27	63.91	-30.64
0.193	Average	17.49	0.11	17.60	53.91	-36.31
0.244	QP	28.19	0.11	28.30	61.97	-33.67
0.244	Average	12.34	0.11	12.45	51.97	-39.52
0.414	QP	24.95	0.11	25.06	57.57	-32.51
0.414	Average	17.24	0.11	17.35	47.57	-30.22
1.814	QP	26.13	0.18	26.31	56.00	-29.69
1.814	Average	17.49	0.18	17.67	46.00	-28.33
3.998	QP	21.95	0.23	22.18	56.00	-33.82
3.998	Average	16.53	0.23	16.76	46.00	-29.24
6.073	QP	31.07	0.27	31.34	60.00	-28.66
6.073	Average	19.33	0.27	19.60	50.00	-30.40

Note: 1. Actual FS= Spectrum Read Level + Factor

Note: 2. Margin= Actual FS - Limit

4.2 6DB BANDWIDTH AND OCCUPIED BANDWIDTH(99%)

4.2.1 Test Limit

According to §15.247(a)(2),

6 dB Bandwidth :

Limit	Shall be at least 500kHz
-------	--------------------------

Occupied Bandwidth(99%) : For reporting purposes only.

4.2.2 Test Procedure

Test method Refer as KDB 558074 D01 and ANSI C63.10: 2013 clause 6.9.2,

1. The EUT RF output connected to the spectrum analyzer by RF cable.
2. Setting maximum power transmit of EUT
3. SA set RBW = 100kHz, VBW = 300kHz and Detector = Peak, to measurement 6 dB Bandwidth.
4. SA set RBW = 1% ~ 5% OBW, VBW = three times the RBW and Detector = Peak, to measurement 99% Bandwidth
5. Measure and record the result of 6 dB Bandwidth and 99% Bandwidth. in the test report.

4.2.3 Test Setup

Refer to section 1.8.

4.2.4 Test Result

Non-Beamforming

Temperature: 20.3 ~ 24.5°C

Test date: May 21 ~ June 27, 2024

Humidity: 53 ~ 64% RH

Tested by: Marco Chan

6dB BANDWIDTH

1. Chain 0

802.11b Ch0

Freq. (MHz)	6dB BW (kHz)	Limit (kHz)	Result
2412	8062.00	≥ 500	PASS
2437	8071.00	≥ 500	PASS
2462	8069.00	≥ 500	PASS

802.11g Ch0

Freq. (MHz)	6dB BW (kHz)	Limit (kHz)	Result
2412	15770.00	≥ 500	PASS
2437	16070.00	≥ 500	PASS
2462	16050.00	≥ 500	PASS

2. Chain 1

802.11b Ch1

Freq. (MHz)	6dB BW (kHz)	Limit (kHz)	Result
2412	8085.00	≥ 500	PASS
2437	8081.00	≥ 500	PASS
2462	8076.00	≥ 500	PASS

802.11g Ch1

Freq. (MHz)	6dB BW (kHz)	Limit (kHz)	Result
2412	16310.00	≥ 500	PASS
2437	16320.00	≥ 500	PASS
2462	16330.00	≥ 500	PASS

3. MIMO

802.11n_HT_20M Ch0

Freq. (MHz)	6dB BW (kHz)	Limit (kHz)	Result
2412	16950.00	≥ 500	PASS
2437	16310.00	≥ 500	PASS
2462	16380.00	≥ 500	PASS

802.11n_HT_20M Ch1

Freq. (MHz)	6dB BW (kHz)	Limit (kHz)	Result
2412	17560.00	≥ 500	PASS
2437	17580.00	≥ 500	PASS
2462	17590.00	≥ 500	PASS

802.11n_HT_40M Ch0

Freq. (MHz)	6dB BW (kHz)	Limit (kHz)	Result
2422	35180.00	≥ 500	PASS
2437	35160.00	≥ 500	PASS
2452	35170.00	≥ 500	PASS

802.11n_HT_40M Ch1

Freq. (MHz)	6dB BW (kHz)	Limit (kHz)	Result
2422	35150.00	≥ 500	PASS
2437	35190.00	≥ 500	PASS
2452	35180.00	≥ 500	PASS

802.11ax_HE_20M Ch0

Freq. (MHz)	RU Config	6dB BW (kHz)	Limit (kHz)	Result
2412	full	18700.00	≥ 500	PASS
2437	full	18660.00	≥ 500	PASS
2462	full	18460.00	≥ 500	PASS

802.11ax_HE_20M Ch1

Freq. (MHz)	RU Config	6dB BW (kHz)	Limit (kHz)	Result
2412	full	18780.00	≥ 500	PASS
2437	full	18370.00	≥ 500	PASS
2462	full	18560.00	≥ 500	PASS

802.11ax_HE_40M Ch0

Freq. (MHz)	RU Config	6dB BW (kHz)	Limit (kHz)	Result
2422	full	35510.00	≥ 500	PASS
2437	full	35180.00	≥ 500	PASS
2452	full	36440.00	≥ 500	PASS

802.11ax_HE_40M Ch1

Freq. (MHz)	RU Config	6dB BW (kHz)	Limit (kHz)	Result
2422	full	35200.00	≥ 500	PASS
2437	full	35920.00	≥ 500	PASS
2452	full	35400.00	≥ 500	PASS

BANDWIDTH 99%

1. Chain 0

802.11b Ch0

Freq. (MHz)	99% BW (MHz)
2412	12.542
2437	12.595
2462	12.774

802.11g Ch0

Freq. (MHz)	99% BW (MHz)
2412	17.010
2437	17.341
2462	17.059

2. Chain 1

802.11b Ch1

Freq. (MHz)	99% BW (MHz)
2412	12.662
2437	12.674
2462	12.811

802.11g Ch0

Freq. (MHz)	99% BW (MHz)
2412	16.808
2437	18.123
2462	16.945

3. MIMO

802.11n_HT20M Ch0

Freq. (MHz)	99% BW (MHz)
2412	18.014
2437	19.168
2462	18.095

802.11n_HT20M Ch1

Freq. (MHz)	99% BW (MHz)
2412	18.019
2437	18.133
2462	17.992

802.11n_HT40M Ch0

Freq. (MHz)	99% BW (MHz)
2422	36.408
2437	36.589
2452	36.516

802.11n_HT40M Ch1

Freq. (MHz)	99% BW (MHz)
2422	36.208
2437	36.329
2452	36.277

802.11ax_HE20M Ch0

Freq. (MHz)	RU Config	99% BW (MHz)
2412	full	18.910
2437	full	19.367
2462	full	19.130

802.11ax_HE20M Ch1

Freq. (MHz)	RU Config	99% BW (MHz)
2412	full	18.902
2437	full	19.214
2462	full	19.104

802.11ax_HE40M Ch0

Freq. (MHz)	RU Config	99% BW (MHz)
2422	full	37.599
2437	full	37.667
2452	full	37.708

802.11ax_HE40M Ch1


Freq. (MHz)	RU Config	99% BW (MHz)
2422	full	37.599
2437	full	37.667
2452	full	37.708

Test Data


6dB BANDWIDTH

1. Chain 0


802.11b 20MHz Chain0 2412MHz

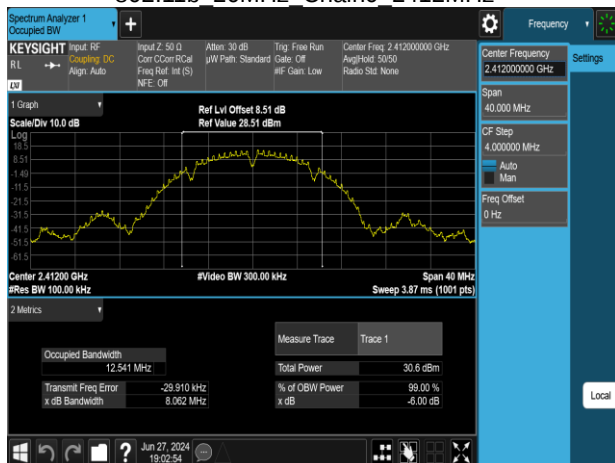


802.11g 20MHz Chain0 2412MHz

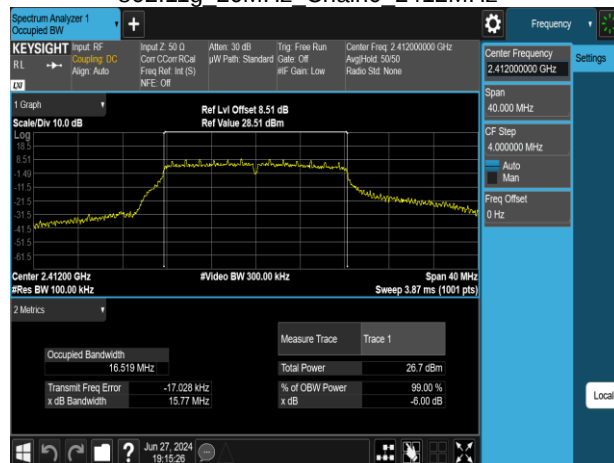

802.11b 20MHz Chain0 2437MHz

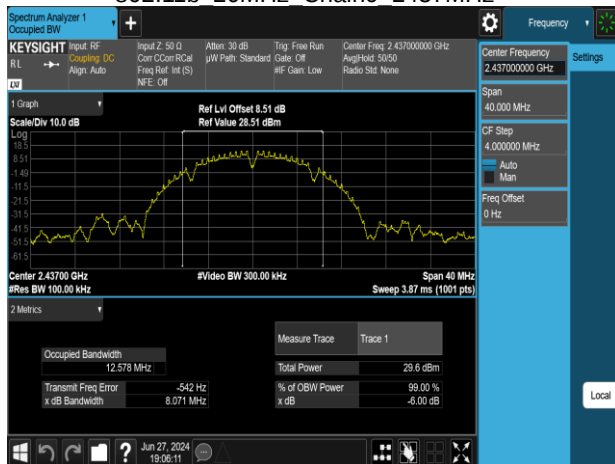


802.11g 20MHz Chain0 2437MHz

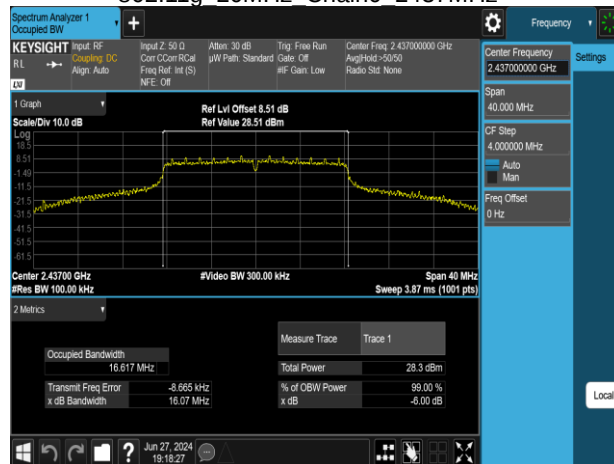

802.11b 20MHz Chain0 2462MHz




802.11g 20MHz Chain0 2462MHz

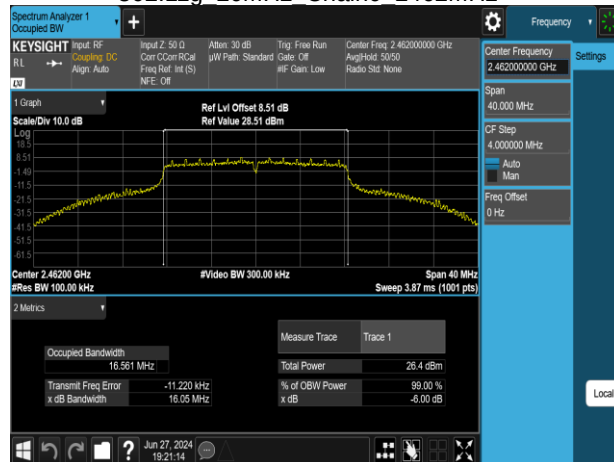


2. Chain 1


802.11b 20MHz Chain1 2412MHz

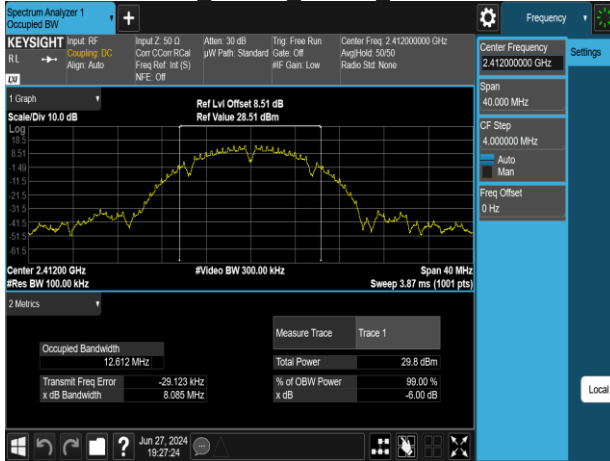


802.11g 20MHz Chain1 2412MHz

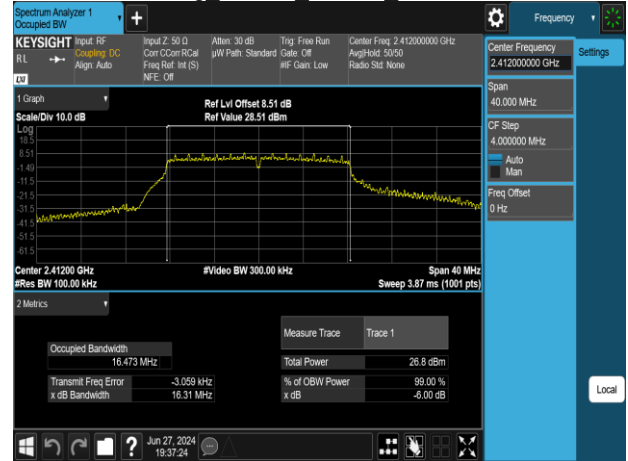

802.11b 20MHz Chain1 2437MHz

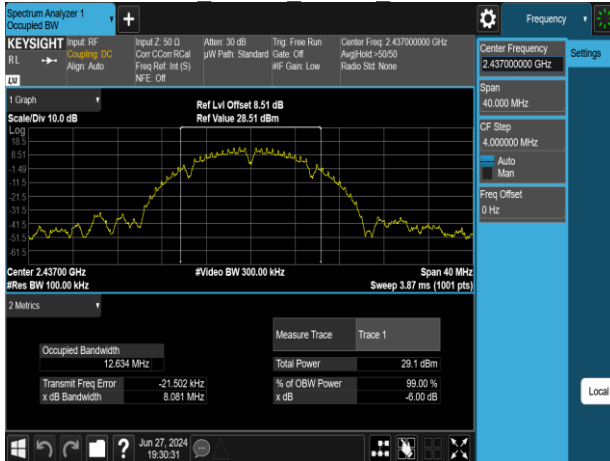


802.11g 20MHz Chain1 2437MHz

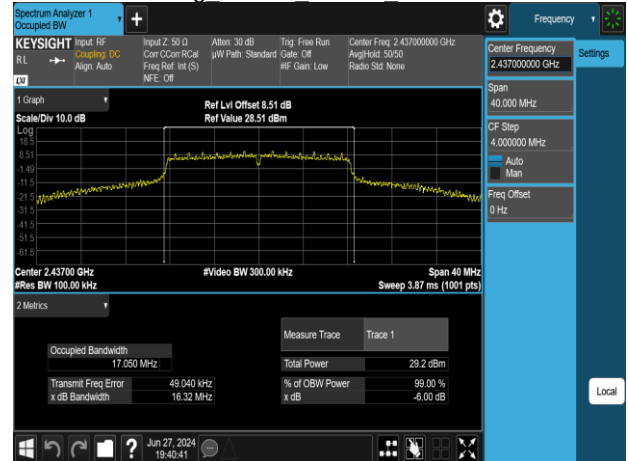

802.11b 20MHz Chain1 2462MHz




802.11g 20MHz Chain1 2462MHz

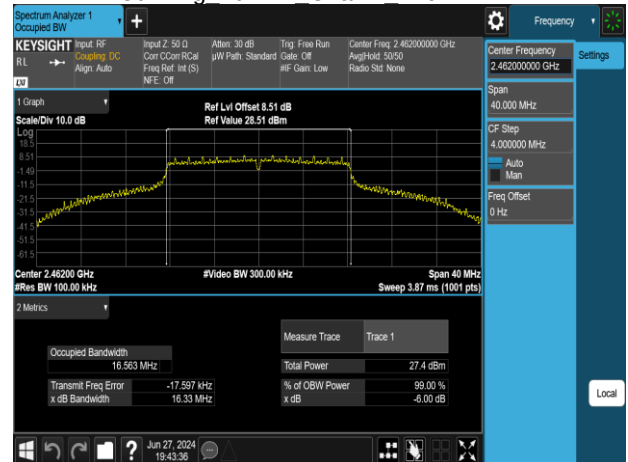


3. MIMO


802.11n 20MHz Chain0 2412MHz

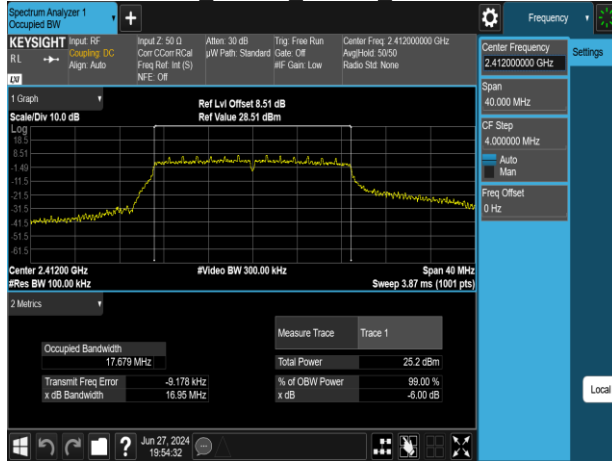


802.11n 20MHz Chain1 2412MHz

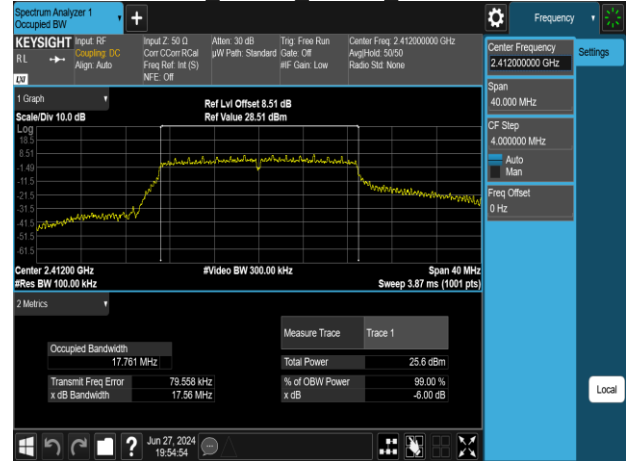


802.11n 20MHz Chain0 2437MHz

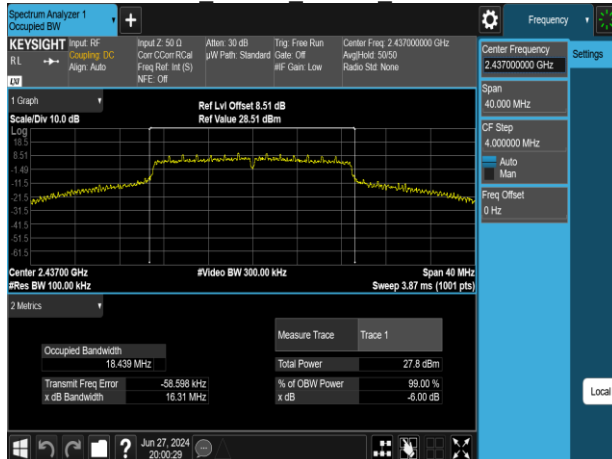


802.11n 20MHz Chain1 2437MHz

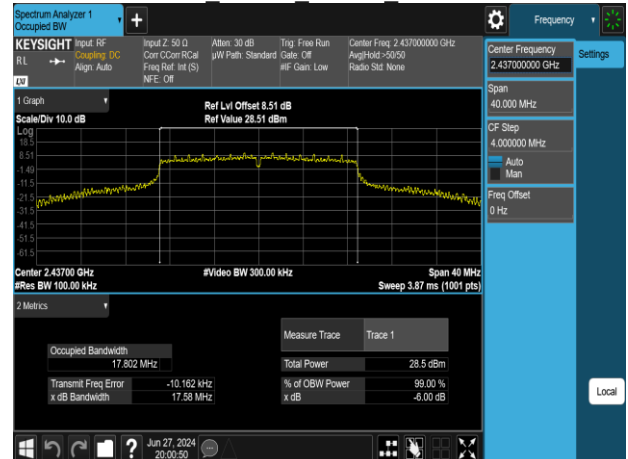


802.11n 20MHz Chain0 2462MHz

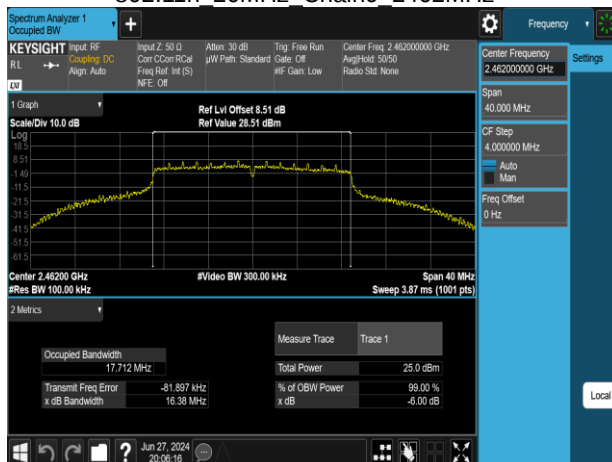


802.11n 20MHz Chain1 2462MHz

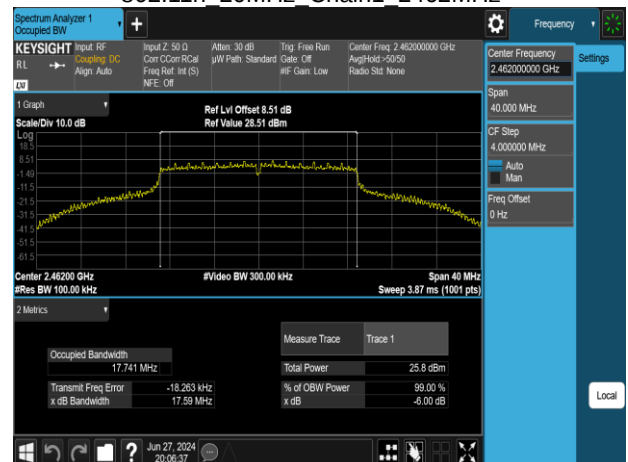


802.11n 40MHz Chain0 2422MHz

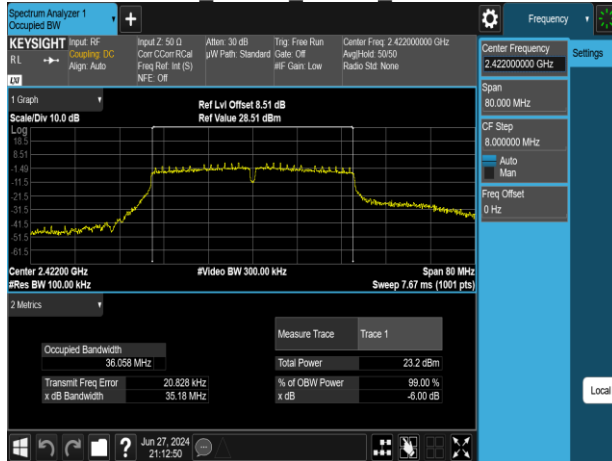


802.11n 40MHz Chain1 2422MHz

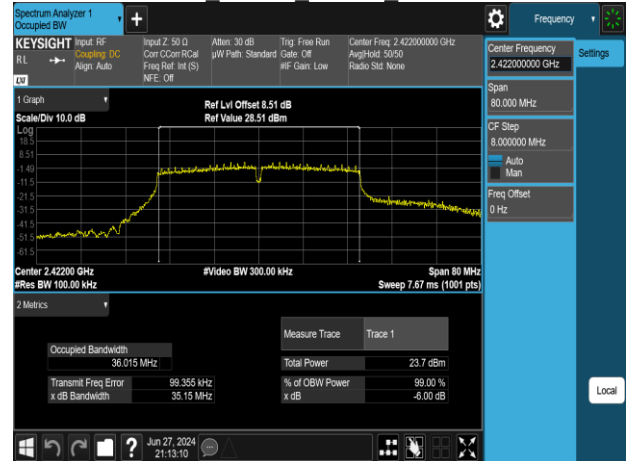


802.11n 40MHz Chain0 2437MHz

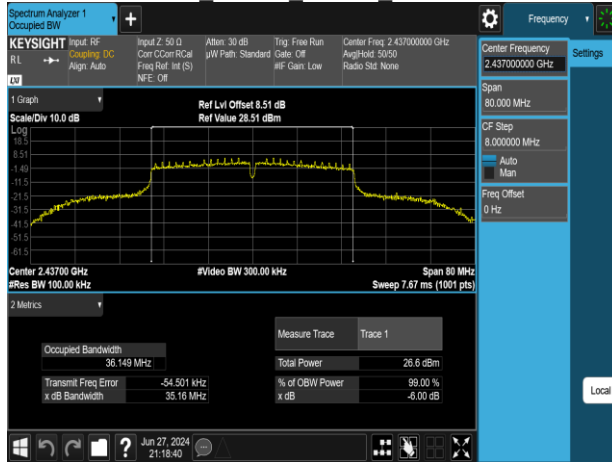

802.11n 40MHz Chain1 2437MHz

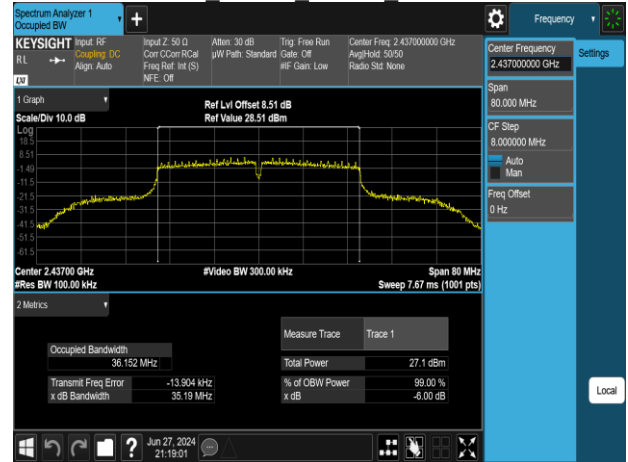


802.11n 40MHz Chain0 2452MHz

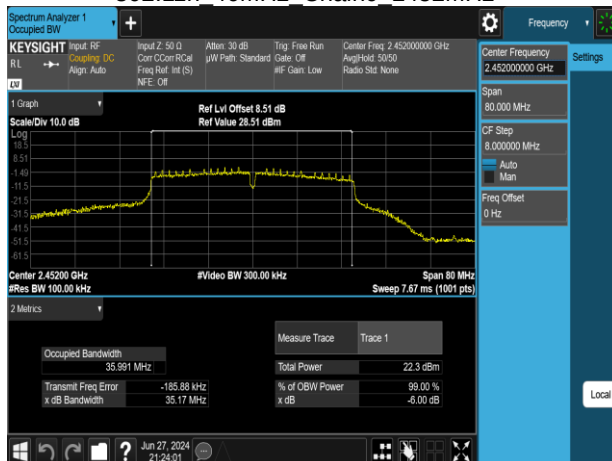


802.11n 40MHz Chain1 2452MHz




802.11ax 20MHz Chain0 2412MHz

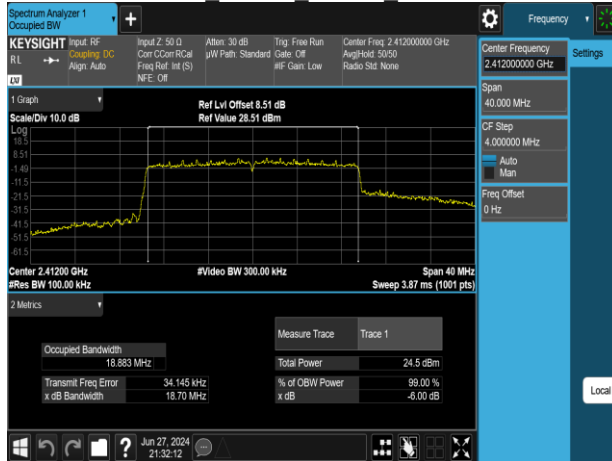

802.11ax 20MHz Chain1 2412MHz

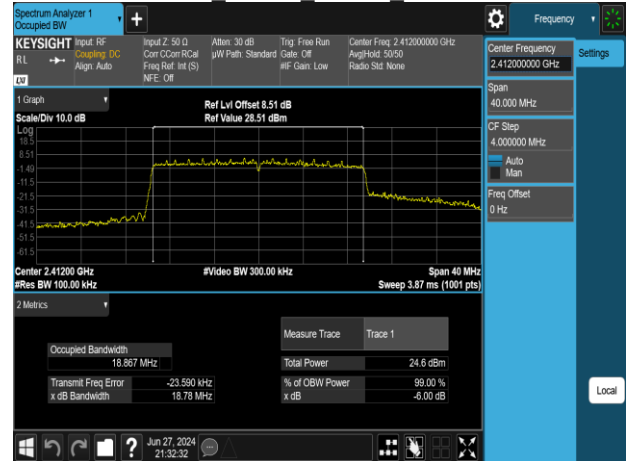


802.11ax 20MHz Chain0 2437MHz

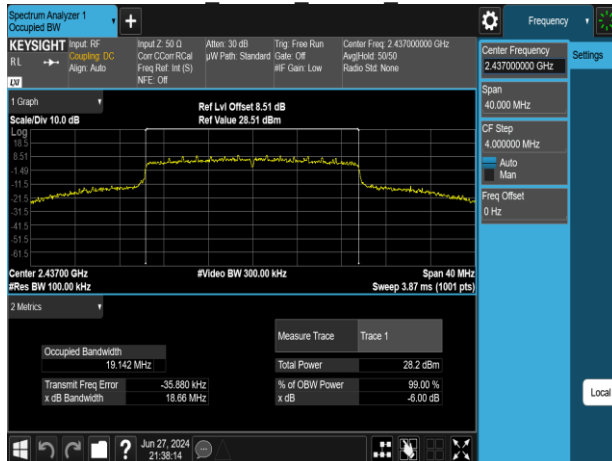


802.11ax 20MHz Chain1 2437MHz




802.11ax 20MHz Chain0 2462MHz

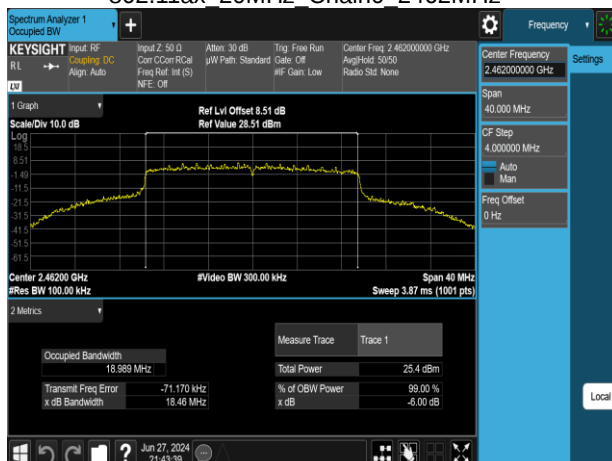

802.11ax 20MHz Chain1 2462MHz

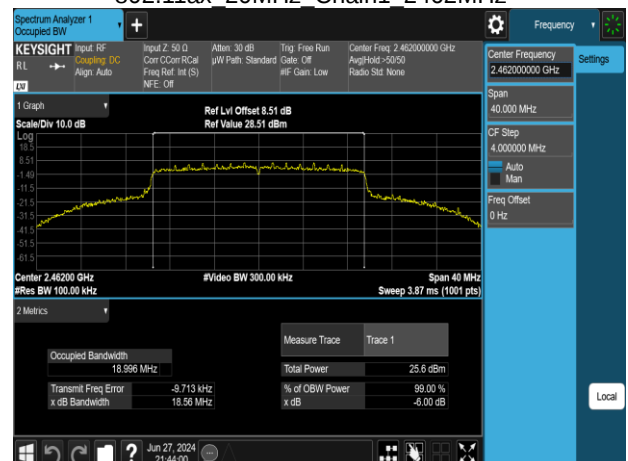


802.11ax 40MHz Chain0 2422MHz

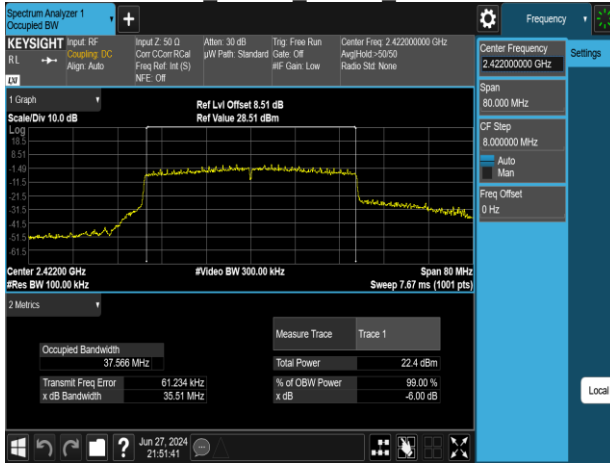


802.11ax 40MHz Chain1 2422MHz




802.11ax 40MHz Chain0 2437MHz

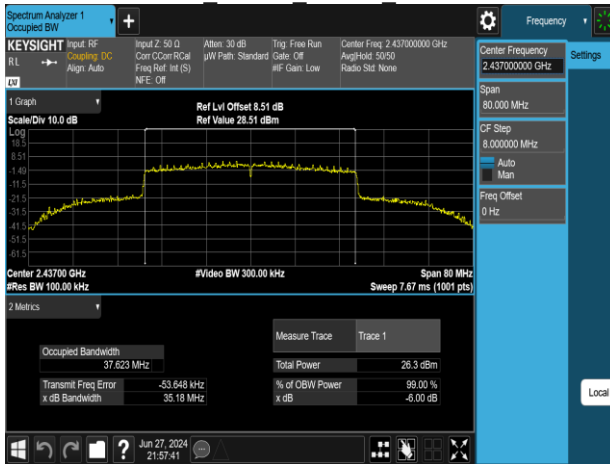


802.11ax 40MHz Chain1 2437MHz

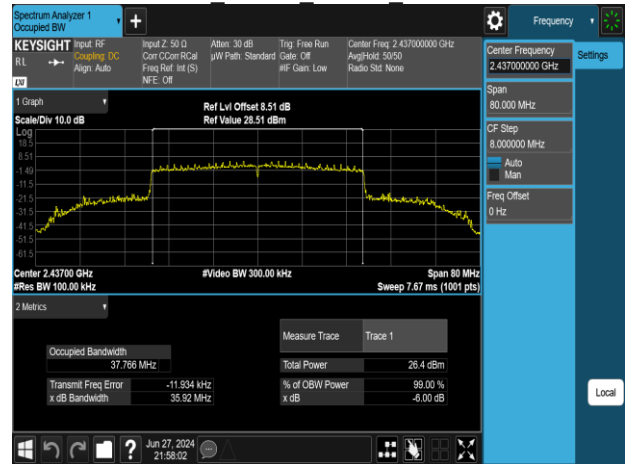

802.11ax 40MHz Chain0 2452MHz

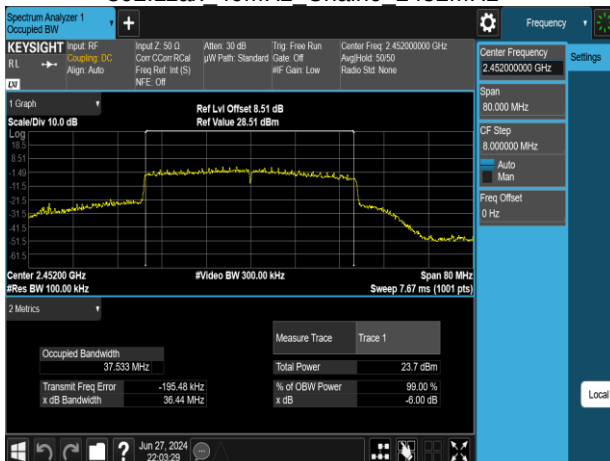


802.11ax 40MHz Chain1 2452MHz

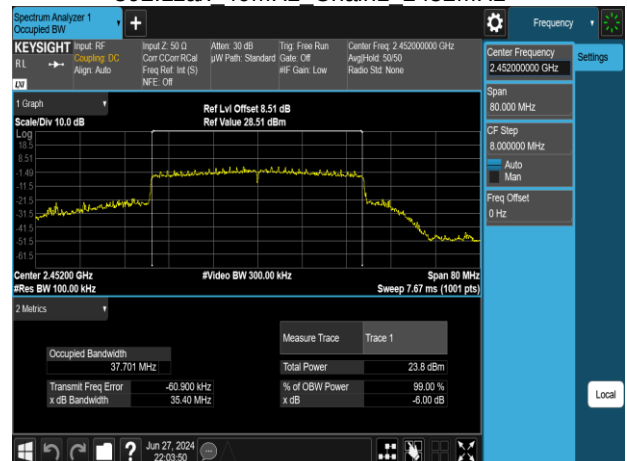

BANDWIDTH 99%

1. Chain 0


802.11b 20MHz Chain0 2412MHz

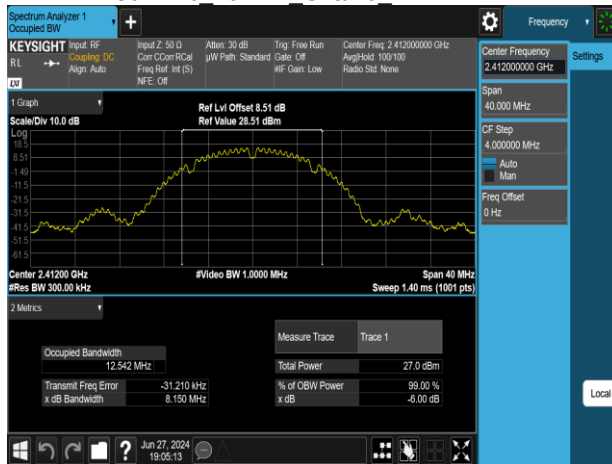

802.11g 20MHz Chain0 2412MHz




802.11b 20MHz Chain0 2437MHz

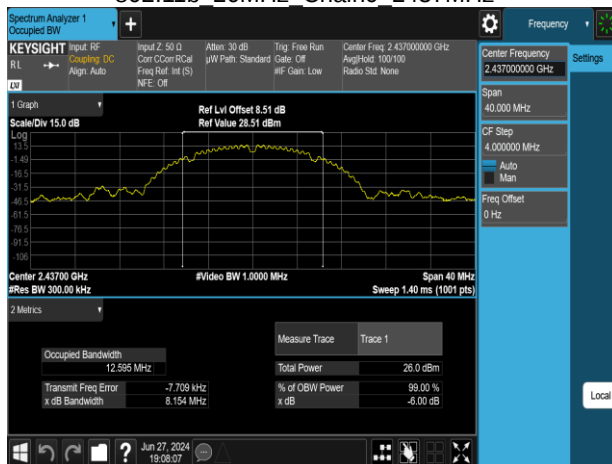

802.11g 20MHz Chain0 2437MHz



802.11b 20MHz Chain0 2462MHz

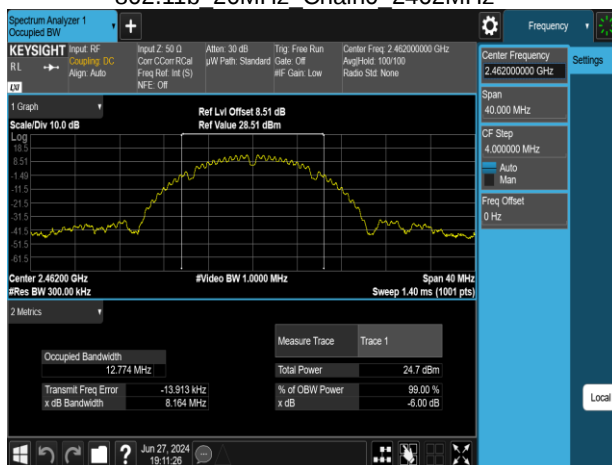

802.11g 20MHz Chain0 2462MHz



2. Chain 1

802.11b 20MHz Chain1 2412MHz




802.11g 20MHz Chain1 2412MHz



802.11b 20MHz Chain1 2437MHz



802.11g 20MHz Chain1 2437MHz

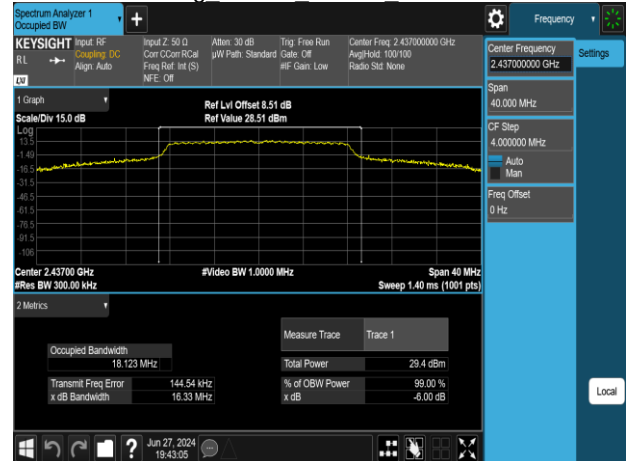

802.11b 20MHz Chain1 2462MHz



802.11g 20MHz Chain1 2462MHz

