

MEASUREMENT REPORT
of
802.11g 54Mbps Wireless LAN
Compact Flash Adapter

Applicant : CAMEO COMMUNICATIONS, INC.
EUT : 802.11g 54Mbps Wireless LAN Compact Flash Adapter
FCC ID : NHPWLG1600

Tested by :

Training Research Co., Ltd.

TEL : 886-2-26935155 FAX : 886-2-26934440
No. 255, Nanyang Street, Shijr, Taipei Hsien 221, Taiwan, R.O.C.

CERTIFICATION


We here by verify that:

The test data, data evaluation, test procedures and equipment configurations shown in this report were made mainly in accordance with the procedures given in ANSI C63.4 (2003) as a reference. All test were conducted by **Training Research Co., Ltd.**, 255 Nanyang Street, Shijr, Taipei Hsien 221, Taiwan, R.O.C. Also, we attest to the accuracy of each.

We further submit that the energy emitted by the sample EUT tested as described in the report is **in compliance with** the technical requirements set forth in the FCC Rules Part 15 Subpart C Section 15.247.

Applicant : CAMEO COMMUNICATIONS, INC.
Applicant Address : No. 42, Sec 6, Mincyuan E. Rd., Neihu District, Taipei City 114, Taiwan
Model : WLG-1600
Report No. : C5115050674
Test Date : September 26, 2005

Prepared by:


Jack Tsai

Approved by:


Frank Tsai**Conditions of issue :**

- (1) **This test report shall not be reproduced except in full, without written approval of TRC. And the test result contained within this report only relate to the sample submitted for testing.**
- (2) **This report must not be used by the client to claim product endorsement by NVLAP or any agency of U.S. Government.**
- (3) **This test report, measurements made by TRC are traceable to the NIST only Conducted and Radiated Method.**



Tables of Contents

I.	GENERAL	5
1.1	Introduction	5
1.2	Description of EUT	5
1.3	Test method	5
1.4	Description of Support Equipment	6
1.5	Configuration of System Under Test	7
1.6	Verify the Frequency and Channel	8
1.7	Test Procedure	9
1.8	Location of the Test Site	9
1.9	General Test Condition	9
II.	Section 15.203 : Antenna Requirement	10
III.	Section 15.207 : Power Line Conducted Emissions for AC Powered Units	11
3.1	Test Condition & Setup	11
3.2	List of Test Instruments	12
3.3	Test Result of Conducted Emissions	13
	Standby mode	13
	IEEE 802.11b	14
	IEEE 802.11g	15
IV.	Section 15.247(a) : Technical Description of the EUT.....	17
V.	Section 15.247(a)(2) : Bandwidth for Direct Sequence System	18
5.1	Test Condition & Setup	18
5.2	Test Instruments Configuration	18
5.3	List of Test Instruments	18
5.4	Test Result of Bandwidth	18
	Channel 01	19
	Channel 06	20
	Channel 11	21

VI. Section 15.247(b) : Power Output	22
6.1 Test Condition & Setup	22
6.2 List of Test Instruments	22
6.3 Test Result	22
VII. Section 15.247(c) : Spurious Emissions (Radiated)	23
7.1 Test Condition & Setup	23
7.2 List of Test Instruments	25
7.3 Test Result of Spurious Radiated Emissions	26
Standby mode	26
IEEE 802.11b CH01	28
IEEE 802.11b CH06	30
IEEE 802.11b CH11	32
IEEE 802.11g CH01	34
IEEE 802.11g CH06	36
IEEE 802.11g CH11	38
7.4 Test Result of Bandedge	40
IEEE 802.11b CH01	41
IEEE 802.11b CH11	42
IEEE 802.11g CH01	43
IEEE 802.11g CH11	44
VIII. Section 15.247(d) : Power Spectral Density	45
8.1 Test Condition & Setup	45
8.2 Test Instruments Configuration	45
8.3 List of Test Instruments	45
8.4 Test Result of Power Spectral Density	45
Channel 01	46
Channel 06	47
Channel 11	48

I . GENERAL

1.1 Introduction

The following measurement report is submitted on behalf of applicant in support that the certification in accordance with Part 2 Subpart J and Part 15 Subpart A, B and C of the Commission's Rules and Regulations.

1.2 Description of EUT

Product Name	:	802.11g 54Mbps Wireless LAN Compact Flash Adapter
Model Name	:	WLG-1600
Frequency Range	:	2.412 GHz ~ 2.462GHz
Channel Spacing	:	5MHz
Support Channel	:	11 Channels
Modulation Skill	:	DBPSK, DQPSK, CCK, OFDM
Power Type	:	Powered by CF slot of client's device

1.3 Test method

1. Insert the EUT into the CF slot of the test fixture. (which is transferred from PCMCIA to CF interface)
2. Using the notebook computer and software provided by the manufacturer to control EUT. The software is operated under the Windows to control the EUT in the mode of continuous transmission; the test is performed under the specific conditions.
3. Set different channel and data rate being tested and repeat the procedures above.
 - (a) Conduction test:
making EUT to the standby and mode of continuous transmission
 - (b) Radiated for Intentional test:
making EUT to the standby and mode of continuous transmission

1.4 Description of Support Equipment

In order to construct the minimum testing, following equipment were used as the support units.

Notebook : **IBM Think Pad X20**

Model No. : 2662-11T

Serial No. : FX-1192200/09

FCC ID : N/A, DoC (Declaration of Confirmation) Approved

BSMI : 3892B565

Adaptor : **IBM**

Model No. : PA2450U

Serial No. : 02K6654


FCC ID : N/A, DoC Approved

Power type : I/P: 100 ~ 240vac, 50 ~ 60 Hz, 0.5A ~ 1.2A; O/P: 16Vdc, 4.5A

Power cord : Non-shielded, 1.80m length, Plastic, with ferrite core

1.5 Configuration of System Under Test

Conduction and Radiated of Intentional Test

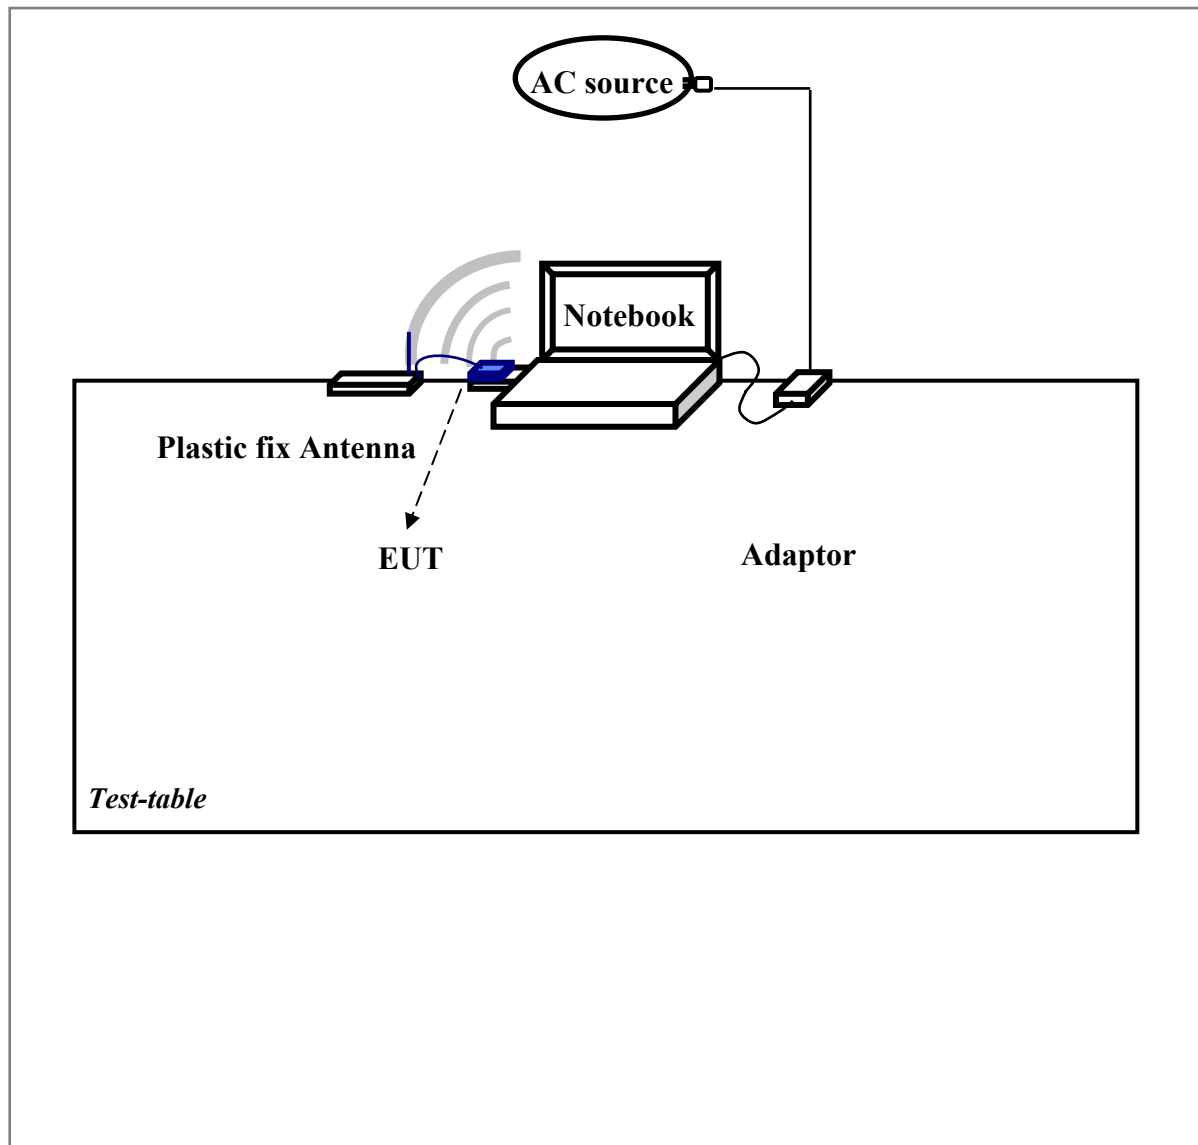

The tests below are carried with the EUT transmitter set at high power in TDD mode. The EUT is forced to select of output power level and channel number by notebook computer.

The setting up procedure was recorded in 1.3 test method.

1.6 Verify the Frequency and Channel

Channel	Frequency (GHz)
1	2.412
2	2.417
3	2.422
4	2.427
5	2.432
6	2.437
7	2.442
8	2.447
9	2.452
10	2.457
11	2.462

Note:

1. This is for confirming that all frequencies are in 2.412GHz to 2.462GHz.
2. Section 15.31(m): Measurements on intentional radiators or receivers shall be performed at three frequencies for operating frequency range over 10 MHz.
(The locations of these frequencies one near the top, one near the middle and one near the bottom.)
3. After test, the EUT operating frequencies are in 2.412GHz to 2.462GHz. So all the items as followed in testing report are need to test these three frequencies:
Top: Channel – 1; Middle: Channel – 6; Bottom: Channel – 11.

1.7 Test Procedure

All measurements contained in this report were performed mainly according to the techniques described in ANSI C63.4 (2003) and the pre-setup was written on 1.3 test method, the detail setup was written on each test item.

1.8 Location of the Test Site

The radiated emissions measurements required by the rules were performed on the **three-meter, Anechoic Chamber (FCC Registration Number: 93906)** maintained by *Training Research Co., Ltd.* 1F, No. 255 Nanyang Street, Shijr, Taipei Hsien 221, Taiwan, R.O.C. Complete description and measurement data have been placed on file with the commission. The conducted power line emissions tests and other test items were performed in a anechoic chamber also located at Training Research Co., Ltd.

No. 255 Nanyang Street, Shijr, Taipei Hsien 221, Taiwan, R.O.C. *Training Research Co., Ltd.* is listed by the FCC as a facility available to do measurement work for others on a contract basis.

1.9 General Test Condition

The conditions under which the EUT operates were varied to determine their effect on the equipment's emission characteristics. The final configuration of the test system and the mode of operation used during these tests were chosen as that which produced the highest emission levels. However, only those conditions, which the EUT was considered likely to encounter in normal use were investigated.

In test, they were set in high power and continuously transmitting mode that controlled by computer. The ch01, ch06 and ch11 of EUT were all tested. The setting up procedure is recorded on 1.3 test method.

II. Section 15.203: Antenna requirement

The EUT can be equipped with detachable antenna. The external antenna is affixed to the EUT using a unique connector, which allows for replacement of a broken antenna, but does not use a standard antenna jack or electrical connector. The antenna requirement stated in Section 15.203 is inapplicable to this EUT.

The antenna specification of list as follows,

Detachable antenna

Manufacturer	:	HOW TSEN INTL. ELECTRONICS METAL CO., LTD.
Type	:	S-099
Connector	:	SMA (Male)
Antenna Type	:	Dipole
Antenna Gain	:	1.8dBi (Max.)

III. Section 15.207: Power Line Conducted Emissions for AC Powered Units

3.1 Test Condition & Setup

The power line conducted emission measurements were performed in an anechoic chamber. The EUT was assembled on a wooden table, which is 80 centimeters high, was placed 40 centimeters from the backwall and at least 1 meter from the sidewall.

Power was fed to the EUT from the public utility power grid through a line filter and Line Impedance Stabilization Networks (LISNs). The LISN housing, measuring instrumentation case, ground plane, etc., were electrically bonded together at the same RF potential. The Spectrum analyzer (or EMI receiver) was connected to the AC line through an isolation transformer. The 50-ohm output of the LISN was connected to the spectrum analyzer directly. Conducted emission levels were in the CISPR quasi-peak and average detection mode. The analyzer's 6 dB bandwidth was set to 9KHz. No post-detector video filter was used.

The spectrum was scanned from 150KHz to 30MHz. The physical arrangement of the test system and associated cabling was varied (within the scope of arrangements likely to be encountered in actual use) to determine the effect on the unit's emanations in amplitude and frequency. All spurious emission frequencies were observed. The highest emission amplitudes relative to the appropriate limit were measured and have been recorded in paragraph 4.3.

There is a test condition apply in this test item, the test procedure description as <1.3>. Three channels were tested, one in the top (CH01), one in the middle (CH06) and the other in bottom (CH11).

3.2 List of Test Instruments

Instrument Name	Model	Brand	Serial No.	Calibration Date
				Next time
EMI Receiver	8546A	HP	3520A00242	06/01/06
RF Filter Section	85460A	HP	3448A00217	06/01/06
LISN (EUT)	LISN-01	TRC	99-05	11/04/05
LISN (Support E.)	LISN-01	TRC	9912-03, 04	10/07/05
Pre-amplifier	15542 ZFL-500	Mini – Circuits	0 0117	05/20/06
6dB Attenuator	MCL BW-S6W2	Mini – Circuits	9915 – Conducted	05/20/06
10dB Attenuator	A5542 VAT010	Mini – Circuits	0215 – Conducted	05/20/06
Coaxial Cable (2 meter)	A30A30-0058-50FS-2M	Jyebao	SMA-08	05/20/06
Coaxial Cable (1.1 meter)	A30A30-0058-50FS-1M	Jyebao	SMA-09	05/20/06
Coaxial Cable (20 meter)	RG-214/U	Jyebao	NP-01	05/20/06
Coaxial Cable (20 meter)	RG-214/U	Jyebao	NP-02	05/20/06
Auto Switch Box (< 30MHz)	ASB-01	TRC	9904-01	05/20/06

3.3 Test Result of Power Line Conducted Emissions

The following table shows a summary of the highest emissions of power line conducted emissions on the LIVE and NETURAL conductors of the EUT power cord. Show as follows.

Test Conditions: Temperature : 23 °C Humidity : 70 % RH

Test mode: Standby mode

<i>Power Connected Emissions</i>					<i>Class B</i>		
<i>Conductor</i>	<i>Frequency (KHz)</i>	<i>Peak (dBμV)</i>	<i>QP (dBμV)</i>	<i>Average (dBμV)</i>	<i>QP-limit (dBμV)</i>	<i>AVG-limit (dBμV)</i>	<i>Margin (dB)</i>
Line 1	203.000	47.73	---	---	64.49	54.49	-6.76
	300.000	44.73	---	---	61.71	51.71	-6.98
	494.000	38.93	---	---	56.17	46.17	-7.24
	893.000	38.95	---	---	56.00	46.00	-7.05
	1230.000	40.05	---	---	56.00	46.00	-5.95
	1713.000	38.62	---	---	56.00	46.00	-7.38
Line 2	208.000	46.67	---	---	64.34	54.34	-7.67
	308.000	44.39	---	---	61.49	51.49	-7.10
	504.000	39.06	---	---	56.00	46.00	-6.94
	919.000	38.32	---	---	56.00	46.00	-7.68
	1219.000	38.76	---	---	56.00	46.00	-7.24
	1783.000	38.67	---	---	56.00	46.00	-7.33

NOTE:

- (1) Margin = Peak Amplitude – Limit, The reading amplitudes are all under limit.
- (2) A "+" sign in the margin column means the emission is OVER the Class B Limit, and
"-" sign of means UNDER the Class B limit

Test mode: IEEE 802.11b, Channel 1

Power Connected Emissions					Class B		
Conductor	Frequency (KHz)	Peak (dBμV)	QP (dBμV)	Average (dBμV)	QP-limit (dBμV)	AVG-limit (dBμV)	Margin (dB)
Line 1	317.000	44.37	---	---	61.23	51.23	-6.86
	513.000	39.48	---	---	56.00	46.00	-6.52
	1038.000	39.51	---	---	56.00	46.00	-6.49
	1256.000	40.46	---	---	56.00	46.00	-5.54
	1534.000	39.64	---	---	56.00	46.00	-6.36
	1748.000	39.82	---	---	56.00	46.00	-6.18
Line 2	308.000	44.26	---	---	61.49	51.49	-7.23
	533.000	38.83	---	---	56.00	46.00	-7.17
	1059.000	39.04	---	---	56.00	46.00	-6.96
	1582.000	38.97	---	---	56.00	46.00	-7.03
	1766.000	38.99	---	---	56.00	46.00	-7.01
	2072.000	38.46	---	---	56.00	46.00	-7.54

Test mode: IEEE 802.11b, Channel 6

Power Connected Emissions					Class B		
Conductor	Frequency (KHz)	Peak (dBμV)	QP (dBμV)	Average (dBμV)	QP-limit (dBμV)	AVG-limit (dBμV)	Margin (dB)
Line 1	302.000	44.59	---	---	61.66	51.66	-7.07
	513.000	39.25	---	---	56.00	46.00	-6.75
	1070.000	40.60	---	---	56.00	46.00	-5.40
	1243.000	40.12	---	---	56.00	46.00	-5.88
	1598.000	39.25	---	---	56.00	46.00	-6.75
	1924.000	39.57	---	---	56.00	46.00	-6.43
Line 2	314.000	44.16	---	---	61.31	51.31	-7.15
	533.000	39.06	---	---	56.00	46.00	-6.94
	745.000	38.20	---	---	56.00	46.00	-7.80
	928.000	38.22	---	---	56.00	46.00	-7.78
	1230.000	39.41	---	---	56.00	46.00	-6.59
	1598.000	38.97	---	---	56.00	46.00	-7.03

Test mode: IEEE 802.11b, Channel 11

Power Connected Emissions					Class B		
Conductor	Frequency (KHz)	Peak (dBμV)	QP (dBμV)	Average (dBμV)	QP-limit (dBμV)	AVG-limit (dBμV)	Margin (dB)
Line 1	320.000	44.30	---	---	61.14	51.14	-6.84
	533.000	39.11	---	---	56.00	46.00	-6.89
	731.000	39.48	---	---	56.00	46.00	-6.52
	989.000	39.85	---	---	56.00	46.00	-6.15
	1295.000	39.94	---	---	56.00	46.00	-6.06
	1629.000	40.23	---	---	56.00	46.00	-5.77
Line 2	533.000	38.62	---	---	56.00	46.00	-7.38
	802.000	39.23	---	---	56.00	46.00	-6.77
	1070.000	39.23	---	---	56.00	46.00	-6.77
	1282.000	38.97	---	---	56.00	46.00	-7.03
	1566.000	38.95	---	---	56.00	46.00	-7.05
	1748.000	39.06	---	---	56.00	46.00	-6.94

Test mode: IEEE 802.11g, Channel 1

Power Connected Emissions					Class B		
Conductor	Frequency (KHz)	Peak (dBμV)	QP (dBμV)	Average (dBμV)	QP-limit (dBμV)	AVG-limit (dBμV)	Margin (dB)
Line 1	334.000	43.55	---	---	60.74	50.74	-7.19
	533.000	39.34	---	---	56.00	46.00	-6.66
	781.000	39.51	---	---	56.00	46.00	-6.49
	1155.000	39.34	---	---	56.00	46.00	-6.66
	1477.000	39.99	---	---	56.00	46.00	-6.01
	1836.000	39.57	---	---	56.00	46.00	-6.43
Line 2	334.000	43.45	---	---	60.74	50.74	-7.29
	552.000	38.90	---	---	56.00	46.00	-7.10
	774.000	39.06	---	---	56.00	46.00	-6.94
	1102.000	38.93	---	---	56.00	46.00	-7.07
	1320.000	39.51	---	---	56.00	46.00	-6.49
	1661.000	40.05	---	---	56.00	46.00	-5.95

Test mode: IEEE 802.11g, Channel 6

Power Connected Emissions					Class B		
Conductor	Frequency (KHz)	Peak (dBμV)	QP (dBμV)	Average (dBμV)	QP-limit (dBμV)	AVG-limit (dBμV)	Margin (dB)
Line 1	326.000	43.93	---	---	60.97	50.97	-7.04
	537.000	39.32	---	---	56.00	46.00	-6.68
	752.000	39.34	---	---	56.00	46.00	-6.66
	1091.000	40.01	---	---	56.00	46.00	-5.99
	1282.000	40.46	---	---	56.00	46.00	-5.54
	1801.000	39.78	---	---	56.00	46.00	-6.22
Line 2	528.000	38.93	---	---	56.00	46.00	-7.07
	767.000	38.85	---	---	56.00	46.00	-7.15
	980.000	38.78	---	---	56.00	46.00	-7.22
	1308.000	39.25	---	---	56.00	46.00	-6.75
	1613.000	39.37	---	---	56.00	46.00	-6.63
	2243.000	37.73	---	---	56.00	46.00	-8.27

Test mode: IEEE 802.11g, Channel 11

Power Connected Emissions					FCC Class B		
Conductor	Frequency (KHz)	Peak (dBμV)	QP (dBμV)	Average (dBμV)	QP-limit (dBμV)	AVG-limit (dBμV)	Margin (dB)
Line 1	208.000	46.49	---	---	64.34	54.34	-7.85
	329.000	43.83	---	---	60.89	50.89	-7.06
	537.000	39.48	---	---	56.00	46.00	-6.52
	738.000	39.20	---	---	56.00	46.00	-6.80
	1070.000	40.01	---	---	56.00	46.00	-5.99
	1613.000	40.01	---	---	56.00	46.00	-5.99
Line 2	323.000	43.85	---	---	61.06	51.06	-7.21
	547.000	38.97	---	---	56.00	46.00	-7.03
	781.000	38.55	---	---	56.00	46.00	-7.45
	1070.000	38.88	---	---	56.00	46.00	-7.12
	1295.000	39.34	---	---	56.00	46.00	-6.66
	1598.000	39.41	---	---	56.00	46.00	-6.59

VI. Section 15.247 (a): Technical description of the EUT


Direct Sequence System is a spread spectrum system in which the carrier has been modulated by a high speed spreading code and an information data stream. The high speed code sequence dominates the “modulating function” and is the direct cause of the wide spreading of the transmitted signal. In the operational description demonstrates the operation principles of the Baseband processor employed by the EUT, shows that which is a complete DSSS baseband processor and meets the definition of the direct sequence spread spectrum system.

V. Section 15.247(a)(2): Bandwidth for Direct Sequence System.

5.1 Test Condition & Setup

The transmitter bandwidth measurements were performed by the contact manner. The EUT was set to transmit continuously, also various channels were investigated to find the maximum occupied bandwidth. The output of the EUT was connected to the spectrum analyzer. The bandwidth of the fundamental frequency is observed by the spectrum analyzer with 100kHz RBW and 100kHz VBW.

6.2 Test Instruments Configuration

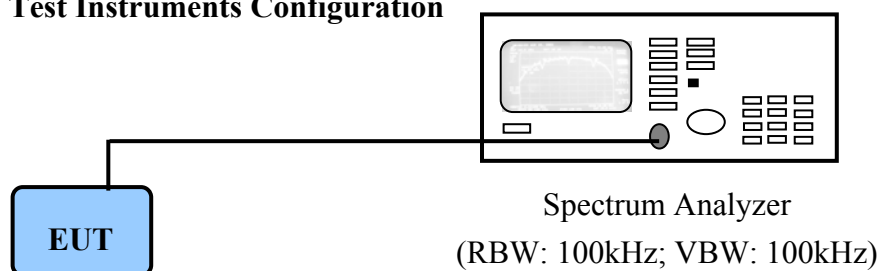

PC to control the EUT at maximal power output and channel number and set antenna kit

6.3 List of Test Instruments

Instrument Name	Model No.	Brand	Serial No.	Next time
Spectrum Analyzer	MS2665C	ANRITSU	6200175476	11/02/05


6.4 Test Result of Bandwidth

Channel	802.11b	802.11g
01	11.24 MHz	16.80 MHz
06	11.20 MHz	16.80 MHz
11	11.20 MHz	16.80 MHz


- Note:
1. The data in the above table are summarizing the following attachment spectrum analyzer hard copy. According to the guidance, we'd made the measurement with the spectrum analyzer's resolution bandwidth (RBW)=100kHz and set the $span \gg RBW$. The results show the measured 6dB bandwidth comply with the minimum 500kHz requirement.
 2. The attachments show these on the following pages.


6dB Bandwidth of Channel 1 (The minimum 6dB BW at least 500kHz)

IEEE 802.11b

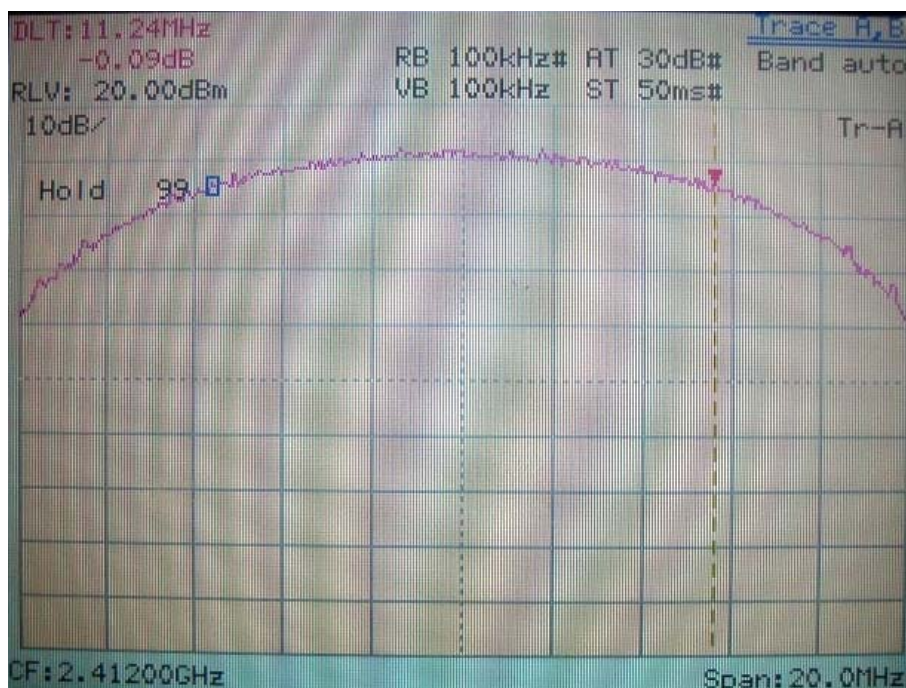


IEEE 802.11g

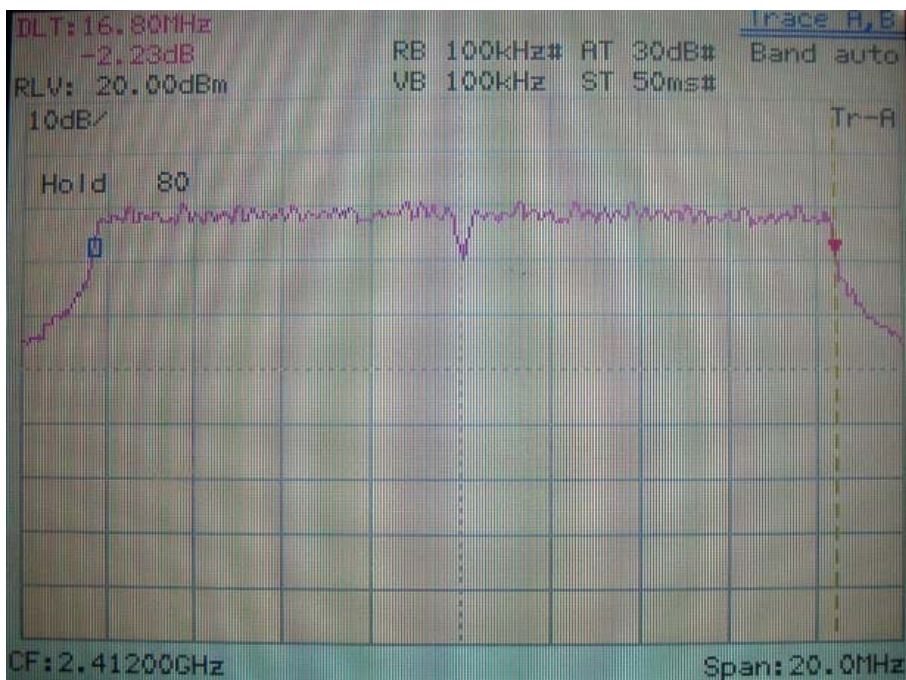

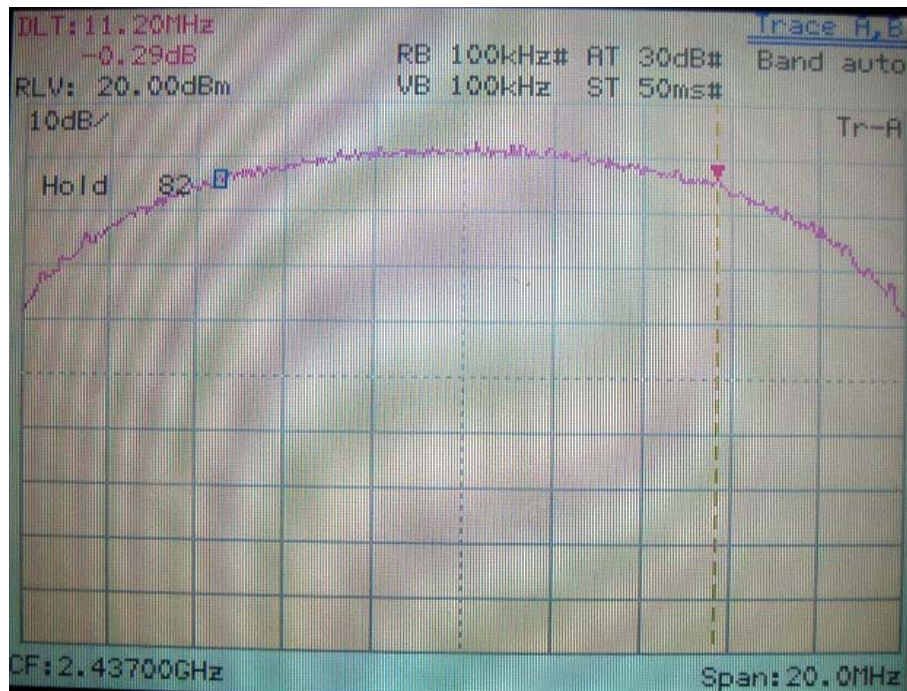
6dB Bandwidth of Channel 6 (The minimum 6dB BW at least 500kHz)

IEEE 802.11b

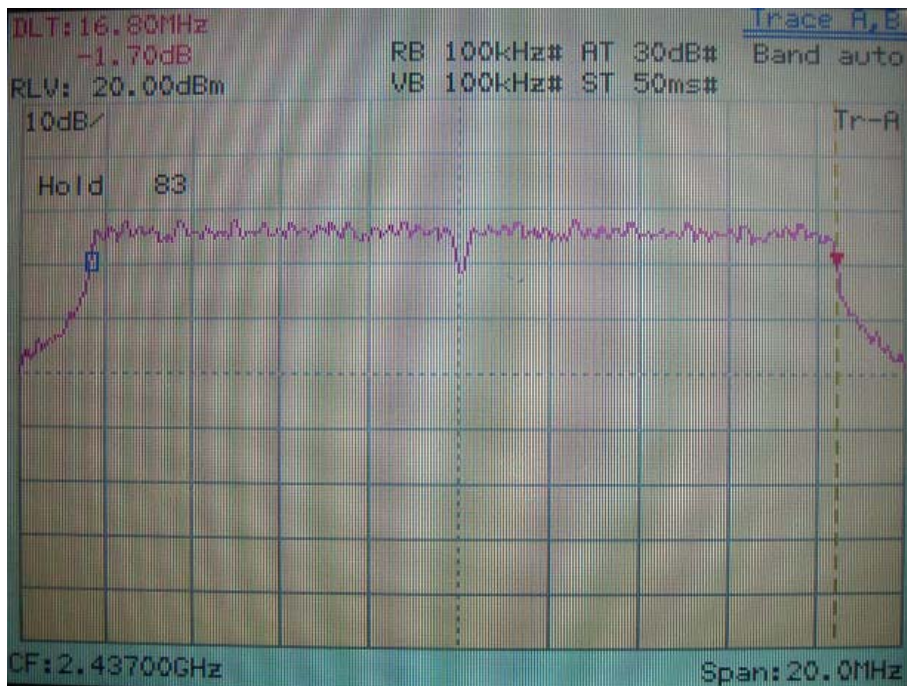


IEEE 802.11g

6dB Bandwidth of Channel 11 (The minimum 6dB BW at least 500kHz)

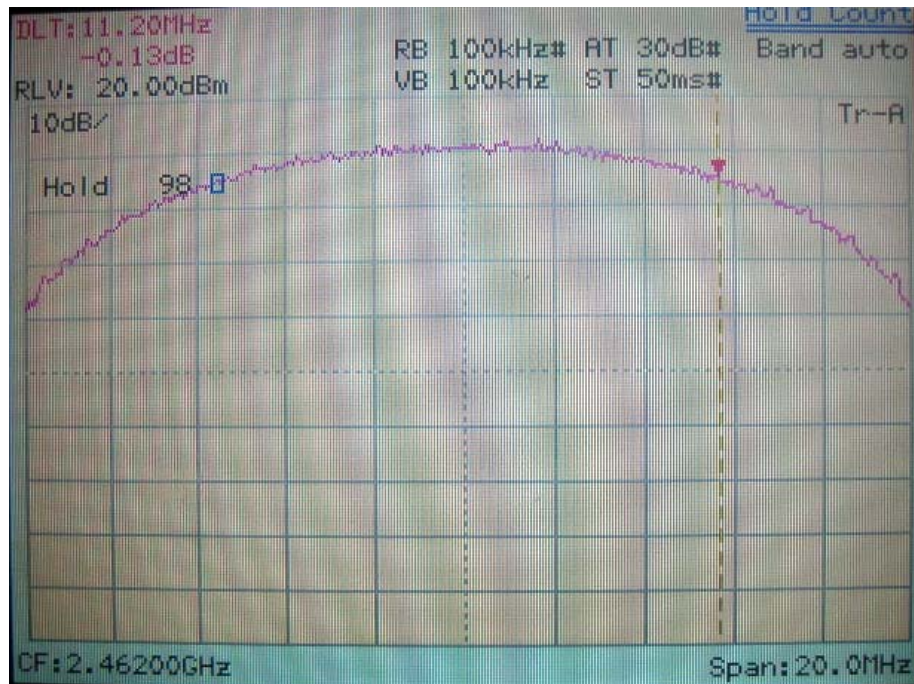


IEEE 802.11b

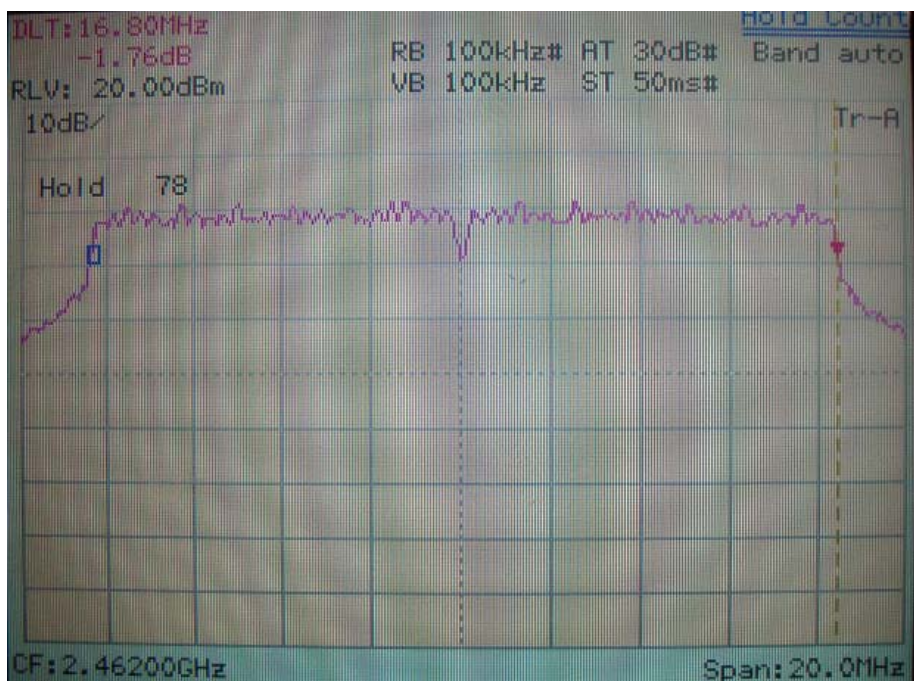

IEEE 802.11g

VI. Section 15.247(b): Power Output

6.1 Test Condition & Setup



1. The output of the transmitter is connected to the BOONTON RF Power Meter.
2. The calibration is performed before every test. The values of the output power of the EUT will shown in the dBm directly are the transmitter output peak power. Recording as follows.

6.2 List of Test Instruments

Instrument Name	Model	Brand	Serial No.	Next time
RF Power Meter	4532	BOONTON	117501	04/21/06
Peak Power Sensor	57340	BOONTON	2696	04/26/06

6.3 Test Result

Formula:

RF Output of EUT + |Cable Loss| = Output Peak Power

Channel	RF Output	Cable Loss	Output Peak Power	
			dBm	mW
802.11b CH01	20.72	1.00	21.72	148.59
802.11b CH06	20.75	1.00	21.75	149.62
802.11b CH11	20.79	1.00	21.79	151.01
802.11g CH01	19.43	1.00	20.43	110.41
802.11g CH06	21.79	1.00	22.79	190.11
802.11g CH11	19.37	1.00	20.37	108.89

VII. Section 15.247 (C): Spurious Emissions (Radiated)

7.1 Test Condition & Setup

We'd performed the test by the *radiated emission* skill: The EUT was placed in an anechoic chamber, and set the EUT transmitting continuously and scanned at 3-meter distance to determine its emission characteristics. The physical arrangement of the EUT was varied (within the scope of arrangements likely to be encountered in actual use) to determine the effect on the unit's emanations in amplitude, directivity, and frequency. The exact system configuration, which produced the highest emissions was noted so it could be reproduced later during the final tests. For the measurement above 1GHz, according to the guidance we'd set the spectrum analyzer's 6dB bandwidth RBW to 1MHz.

This was done to ensure that the final measurements would demonstrate the worst-case interference potential of the EUT.

Final radiation measurements were made on a three-meter, anechoic chamber. The EUT system was placed on a nonconductive turntable, which is 0.8 meters height, top surface 1.0 x 1.5 meter.

The spectrum was examined from 30 MHz to 1000 MHz using an Hewlett Packard 85460A EMI Receiver, SCHWARZECK whole range Small Biconical Antenna (Model No.: UBAA9114 & BBVU9135) is used to measure frequency from 30 MHz to 1GHz. The final test is used the HP 85460A spectrum and 8564E spectrum was examined from 1GHz to 25GHz using an Hewlett Packard Spectrum Analyzer, EMCO/HP Horn Antenna (Model 3115 / 84125-80008) for 1G - 25GHz.

At each frequency, the EUT was rotated 360 degrees, and the antenna was raised and lowered from one to four meters to find the maximum emission levels. Measurements were taken using both horizontal and vertical antenna polarization.

Appropriate preamplifiers were used for improving sensitivity and precautions were taken to avoid overloading or desensitizing the spectrum analyzer. There are two spectrum analyzers use on this testing, HP 85460A for frequency 30MHz to 1000MHz, and 8564E for frequency 1GHz to 25GHz. No post-detector video filters were used in the test. The spectrum analyzer's 6dB bandwidth was set to 120KHz (spectrum was examined from 30 MHz to 1000 MHz), the spectrum analyzer's 6 dB bandwidth was set to 1 MHz (spectrum was examined from 1GHz to 25GHz) and the analyzer was operated in the maximum hold mode. There is a test condition applies in this test item, the test procedure description as the following:

Three channels were tested, one in the top (CH01), one in the middle (CH06) and the other in bottom (CH11). The setting up procedure is recorded on <1.3>

With the transmitter operating from a AC source and using the internal of EUT, radiates spurious emissions falling within the restricted bands of 15.209 were measured at operating frequencies corresponding to upper, middle and bottom channels in the 2400 ~ 2483.5 MHz band.

The actual field intensity in decibels referenced to 1 microvolt per meter (dBμV/m) is determined by algebraically adding the measured reading in dBμV, the antenna factor (dB), and cable loss (dB) at the appropriate frequency. Since the EUT was set to transmit continuously, no *duty cycle* is present.

For frequency between 30MHz to 1000MHz

$F_{Ia} \text{ (dBuV/m)} = F_{Ir} \text{ (dB}\mu\text{V)} + \text{Correction Factors}$

F_{Ia} : Actual Field Intensity

F_{Ir} : Reading of the Field Intensity

Correction Factors = Antenna Factor + (Cable Loss – Amplitude Gain) + Switching Box Loss

For frequency between 1GHz to 25GHz

$F_{Ia} \text{ (dB}\mu\text{V/m)} = F_{Ir} \text{ (dB}\mu\text{V)} + \text{Correction Factor}$

F_{Ia} : Actual Field Intensity

F_{Ir} : Reading of the Field Intensity

Correction Factors = Antenna Factor + (Cable Loss – Amplitude Gain) + Switching Box Loss

7.2 List of Test Instruments

Instrument Name	Model	Brand	Serial No.	Calibration Date
				Next time
EMI Receiver	8546A	HP	3520A00242	06/01/06
RF Filter Section	85460A	HP	3448A00217	06/01/06
Small Biconical Antenna	UBAA9114 & BBVU9135	SCHWARZECK	127	10/11/05
Pre-amplifier	PA1F	TRC	1FAC	05/20/06
Auto Switch Box (>30MHz)	ASB-01	TRC	9904-01	05/20/06
Coaxial Cable (Double shielded, 15 meter)	A30A30-0058-50FS-15M	JYEBAO	SMA-01	05/20/06
Coaxial Cable (1.1 meter)	A30A30-0058-50FS-1M	JYEBAO	SMA-02	05/20/06
Spectrum Analyzer	8564E	HP	3720A00840	11/13/05
Microwave Preamplifier	84125C	HP	US36433002	08/13/06
Horn Antenna	3115	EMCO	9104-3668	12/27/05
Standard Guide Horn Antenna	84125-80008	HP	18-26.5GHz	10/15/05
Standard Guide Horn Antenna	84125-80001	HP	26.5-40GHz	10/15/05
Horn Antenna	1196E (3115)	HP (EMCO)	9704-5178	01/11/06
Pre-amplifier	PA2F	TRC	2F1GZ	06/20/06
Coaxial Cable (3 miter)	A30A30-0058-50FST118	JYEBAO	MSA-05	06/20/06
Coaxial Cable (1 meter)	A30A30-0058-50FST118	JYEBAO	MSA-04	06/20/06

7.3 Test Result of Spurious Radiated Emissions

The highest peak values of radiated emissions from the EUT at various antenna heights, antenna polarizations, EUT orientation, etc. are recorded on the following.

Test Conditions: Temperature : 25 ° C Humidity : 73 % RH

Test mode: Standby mode for 30MHz to 1GHz [Horizontal]

Radiated Emission				Correction Factors (dB)	Corrected Amplitude (dBμV/m)	Class B (3 m)	
Frequency (MHz)	Amplitude (dBμV)	Ant. H. (m)	Table ()			Limit (dBμV/m)	Margin (dB)
79.71	30.68	1.00	169	0.19	30.87	40.00	-9.13
186.41	39.18	1.00	172	-3.70	35.48	43.50	-8.02
199.35	42.53	1.00	195	-3.80	38.73	43.50	-4.77
233.09	43.33	1.00	165	-4.07	39.26	46.00	-6.74
266.44	42.92	1.00	195	-4.20	38.72	46.00	-7.28
325.24	40.59	1.00	233	-3.22	37.37	46.00	-8.63

Test mode: Standby mode for 30MHz to 1GHz [Vertical]

Radiated Emission				Correction Factors (dB)	Corrected Amplitude (dBμV/m)	Class B (3 m)	
Frequency (MHz)	Amplitude (dBμV)	Ant. H. (m)	Table ()			Limit (dBμV/m)	Margin (dB)
98.51	34.07	1.00	74	-1.10	32.97	43.50	-10.53
119.12	35.42	1.00	289	-2.11	33.31	43.50	-10.19
199.75	39.44	1.00	332	-3.81	35.63	43.50	-7.87
234.31	38.92	1.00	147	-4.06	34.86	46.00	-11.14
666.56	26.19	1.00	124	8.83	35.02	46.00	-10.98
721.12	25.40	1.00	202	9.93	35.33	46.00	-10.67

Note:

1. Margin = Amplitude – limit, if margin is minus means under limit.
2. Corrected Amplitude = Reading Amplitude + Correction Factors
3. Correction factor = Antenna factor + (Cable Loss – Amplitude gain) + Switching Box Loss

Test mode: Standby mode for 1GHz to 25GHz [Horizontal]

Frequency	Ant. H.	Table	Amplitude		Correction Factor	Corrected Amplitude		Limit		Margin
			Peak / Ave.			Peak / Ave.		Peak / Ave.		
MHz	m	degree	dBμV		dB/m	dBμV/m		dBμV/m		dB
3521.67	1.00	202	28.40	---	10.49	38.89	---	73.96	53.96	-15.07
5922.92	1.00	333	24.24	---	17.82	42.06	---	73.96	53.96	-11.90
9932.08	1.00	23	23.24	---	23.01	46.25	---	73.96	53.96	-7.71
21201.67	1.00	270	47.33	---	2.60	49.93	---	73.96	53.96	-4.03
23124.79	1.00	164	46.83	---	3.60	50.43	---	73.96	53.96	-3.53

Test mode: Standby mode for 1GHz to 25GHz [Vertical]

Frequency	Ant. H.	Table	Amplitude		Correction Factor	Corrected Amplitude		Limit		Margin
			Peak / Ave.			Peak / Ave.		Peak / Ave.		
MHz	m	degree	dBμV		dB/m	dBμV/m		dBμV/m		dB
3117.92	1.00	279	32.08	---	9.48	41.56	---	73.96	53.96	-12.40
4761.25	1.00	246	28.41	---	14.45	42.86	---	73.96	53.96	-11.10
7297.08	1.00	273	24.58	---	21.61	46.19	---	73.96	53.96	-7.77
10357.08	1.00	78	24.57	---	22.86	47.43	---	73.96	53.96	-6.53
24573.33	1.00	175	47.50	---	2.61	50.11	---	73.96	53.96	-3.85

Note:

1. Margin = Corrected - Limit.
2. The EUT utilizes a *permanently attached antenna*. In addition the spurious RF radiated emissions levels do comply with the *20dBc limit* both at its bandedges and other spurious emissions.
3. As stated in Section 15.35(b), for any frequencies above 1000MHz, radiated limits shown are based upon the use of measurement instrumentation employing an average detector function. As the results of our test, the peak amplitudes are already below the FCC limit. Thus the average amplitudes of the rest are omitted.

Test mode: IEEE 802.11b CH01 for 30MHz to 1GHz [Horizontal]

Radiated Emission				Correction Factors	Corrected Amplitude	Class B (3 m)	
Frequency (MHz)	Amplitude (dBμV)	Ant. H. (m)	Table ()			Limit (dBμV/m)	Margin (dB)
54.86	28.35	1.00	345	2.94	31.29	40.00	-8.71
187.62	39.67	1.00	186	-3.68	35.99	43.50	-7.51
199.37	42.64	1.00	197	-3.80	38.84	43.50	-4.66
220.97	43.33	1.00	197	-3.98	39.35	46.00	-6.65
234.31	43.35	1.00	180	-4.06	39.29	46.00	-6.71
266.44	42.29	1.00	197	-4.20	38.09	46.00	-7.91

Test mode: IEEE 802.11b CH01 for 30MHz to 1GHz [Vertical]

Radiated Emission				Correction Factors	Corrected Amplitude	Class B (3 m)	
Frequency (MHz)	Amplitude (dBμV)	Ant. H. (m)	Table ()			Limit (dBμV/m)	Margin (dB)
72.44	30.27	1.00	258	1.05	31.32	40.00	-8.68
98.51	34.47	1.00	74	-1.10	33.37	43.50	-10.13
119.12	36.18	1.00	278	-2.11	34.07	43.50	-9.43
199.75	38.96	1.00	85	-3.81	35.15	43.50	-8.35
233.09	39.57	1.00	275	-4.07	35.50	46.00	-10.50
720.52	25.64	1.00	107	9.92	35.56	46.00	-10.44

Test mode: IEEE 802.11b CH01 for 1GHz to 25GHz [Horizontal]

<i>Frequency</i>	<i>Ant. H.</i>	<i>Table</i>	<i>Amplitude</i>		<i>Correction Factor</i>	<i>Corrected Amplitude</i>		<i>Limit</i>		<i>Margin</i>
			<i>Peak / Ave.</i>			<i>Peak / Ave.</i>		<i>Peak / Ave.</i>		
<i>MHz</i>	<i>m</i>	<i>degree</i>	<i>dBμV</i>		<i>dB/m</i>	<i>dBμV/m</i>		<i>dBμV/m</i>		<i>dB</i>
2235.42	1.00	301	35.17	---	8.75	43.92	---	73.96	53.96	-10.04
2560.42	1.00	159	35.17	---	9.60	44.77	---	73.96	53.96	-9.19
7233.75	1.00	288	35.94	---	10.07	46.01	---	73.96	53.96	-7.95
9650.42	1.00	139	35.61	---	11.47	47.08	---	73.96	53.96	-6.88
12061.04	1.00	272	37.44	---	9.81	47.25	---	73.96	53.96	-6.71

Test mode: IEEE 802.11b CH01 for 1GHz to 25GHz [Vertical]

<i>Frequency</i>	<i>Ant. H.</i>	<i>Table</i>	<i>Amplitude</i>		<i>Correction Factor</i>	<i>Corrected Amplitude</i>		<i>Limit</i>		<i>Margin</i>
			<i>Peak / Ave.</i>			<i>Peak / Ave.</i>		<i>Peak / Ave.</i>		
<i>MHz</i>	<i>m</i>	<i>degree</i>	<i>dBμV</i>		<i>dB/m</i>	<i>dBμV/m</i>		<i>dBμV/m</i>		<i>dB</i>
1820.83	1.00	137	35.83	---	10.89	46.72	---	73.96	53.96	-7.24
2333.33	1.00	313	40.84	---	9.02	49.86	---	73.96	53.96	-4.10
2487.50	1.00	313	38.84	---	9.45	48.29	---	73.96	53.96	-5.67
9650.42	1.00	302	35.27	---	11.47	46.74	---	73.96	53.96	-7.22
12061.04	1.00	62	37.60	---	9.81	47.41	---	73.96	53.96	-6.55
19296.25	1.00	266	47.28	---	1.60	48.88	---	73.96	53.96	-5.08

Test mode: IEEE 802.11b CH06 for 30MHz to 1GHz [Horizontal]

Radiated Emission				Correction Factors	Corrected Amplitude	Class B (3 m)	
Frequency (MHz)	Amplitude (dBμV)	Ant. H. (m)	Table ()			Limit (dBμV/m)	Margin (dB)
79.71	30.75	1.00	154	0.19	30.94	40.00	-9.06
187.62	39.07	1.00	180	-3.68	35.39	43.50	-8.11
199.32	42.46	1.00	165	-3.80	38.66	43.50	-4.84
234.31	44.39	1.00	158	-4.06	40.33	46.00	-5.67
267.65	42.43	1.00	202	-4.20	38.23	46.00	-7.77
320.39	39.23	1.00	204	-3.31	35.92	46.00	-10.08

Test mode: IEEE 802.11b CH06 for 30MHz to 1GHz [Vertical]

Radiated Emission				Correction Factors	Corrected Amplitude	Class B (3 m)	
Frequency (MHz)	Amplitude (dBμV)	Ant. H. (m)	Table ()			Limit (dBμV/m)	Margin (dB)
97.90	33.88	1.00	337	-1.05	32.83	43.50	-10.67
117.91	37.50	1.00	281	-2.07	35.43	43.50	-8.07
133.67	36.62	1.00	298	-2.72	33.90	43.50	-9.60
201.57	39.27	1.00	329	-3.82	35.45	43.50	-8.05
233.09	39.71	1.00	272	-4.07	35.64	46.00	-10.36
666.56	27.07	1.00	112	8.83	35.90	46.00	-10.10

Test mode: IEEE 802.11b CH06 for 1GHz to 25GHz [Horizontal]

<i>Frequency</i>	<i>Ant. H.</i>	<i>Table</i>	<i>Amplitude</i>		<i>Correction Factor</i>	<i>Corrected Amplitude</i>		<i>Limit</i>		<i>Margin</i>
			<i>Peak / Ave.</i>			<i>Peak / Ave.</i>		<i>Peak / Ave.</i>		
<i>MHz</i>	<i>m</i>	<i>degree</i>	<i>dBμV</i>		<i>dB/m</i>	<i>dBμV/m</i>		<i>dBμV/m</i>		<i>dB</i>
2216.67	1.00	54	35.50	---	8.70	44.20	---	73.96	53.96	-9.76
2772.92	1.00	97	34.84	---	10.00	44.84	---	73.96	53.96	-9.12
7312.29	1.00	125	35.27	---	10.30	45.57	---	73.96	53.96	-8.39
9747.08	1.00	325	35.27	---	11.89	47.16	---	73.96	53.96	-6.80
12187.92	1.00	187	39.44	---	9.74	49.18	---	73.96	53.96	-4.78

Test mode: IEEE 802.11b CH06 for 1GHz to 25GHz [Vertical]

<i>Frequency</i>	<i>Ant. H.</i>	<i>Table</i>	<i>Amplitude</i>		<i>Correction Factor</i>	<i>Corrected Amplitude</i>		<i>Limit</i>		<i>Margin</i>
			<i>Peak / Ave.</i>			<i>Peak / Ave.</i>		<i>Peak / Ave.</i>		
<i>MHz</i>	<i>m</i>	<i>degree</i>	<i>dBμV</i>		<i>dB/m</i>	<i>dBμV/m</i>		<i>dBμV/m</i>		<i>dB</i>
2358.33	1.00	168	39.00	---	9.09	48.09	---	73.96	53.96	-5.87
2627.08	1.00	68	36.17	---	9.73	45.90	---	73.96	53.96	-8.06
7312.29	1.00	316	35.61	---	10.30	45.91	---	73.96	53.96	-8.05
9747.08	1.00	33	34.77	---	11.89	46.66	---	73.96	53.96	-7.30
12187.92	1.00	360	38.60	---	9.74	48.34	---	73.96	53.96	-5.62
21934.79	1.00	332	45.90	---	3.09	48.99	---	73.96	53.96	-4.97

Test mode: IEEE 802.11b CH11 for 30MHz to 1GHz [Horizontal]

Radiated Emission				Correction Factors	Corrected Amplitude	Class B (3 m)	
Frequency (MHz)	Amplitude (dBμV)	Ant. H. (m)	Table ()			Limit (dBμV/m)	Margin (dB)
79.71	30.59	1.00	176	0.19	30.78	40.00	-9.22
187.62	39.28	1.00	188	-3.68	35.60	43.50	-7.90
199.81	44.00	1.00	195	-3.81	40.19	43.50	-3.31
219.76	42.81	1.00	188	-3.97	38.84	46.00	-7.16
233.09	44.06	1.00	188	-4.07	39.99	46.00	-6.01
267.65	42.36	1.00	195	-4.20	38.16	46.00	-7.84

Test mode: IEEE 802.11b CH11 for 30MHz to 1GHz [Vertical]

Radiated Emission				Correction Factors	Corrected Amplitude	Class B (3 m)	
Frequency (MHz)	Amplitude (dBμV)	Ant. H. (m)	Table ()			Limit (dBμV/m)	Margin (dB)
98.51	33.54	1.00	145	-1.10	32.44	43.50	-11.06
123.36	36.35	1.00	286	-2.31	34.04	43.50	-9.46
133.67	36.48	1.00	275	-2.72	33.76	43.50	-9.74
166.41	35.66	1.00	26	-3.68	31.98	43.50	-11.52
200.96	39.15	1.00	334	-3.82	35.33	43.50	-8.17
233.70	39.13	1.00	167	-4.06	35.07	46.00	-10.93

Test mode: IEEE 802.11b CH11 for 1GHz to 25GHz [Horizontal]

<i>Frequency</i>	<i>Ant. H.</i>	<i>Table</i>	<i>Amplitude</i>		<i>Correction Factor</i>	<i>Corrected Amplitude</i>		<i>Limit</i>		<i>Margin</i>
			<i>Peak / Ave.</i>			<i>Peak / Ave.</i>		<i>Peak / Ave.</i>		
<i>MHz</i>	<i>m</i>	<i>degree</i>	<i>dBμV</i>		<i>dB/m</i>	<i>dBμV/m</i>		<i>dBμV/m</i>		<i>dB</i>
2216.67	1.00	226	34.66	---	8.70	43.36	---	73.96	53.96	-10.60
2816.67	1.00	227	34.66	---	10.09	44.75	---	73.96	53.96	-9.21
4925.83	1.00	173	39.77	---	4.13	43.90	---	73.96	53.96	-10.06
7384.79	1.00	323	41.28	---	10.42	51.70	---	73.96	53.96	-2.26
9849.79	1.00	320	38.28	---	11.93	50.21	---	73.96	53.96	-3.75
12308.75	1.00	221	40.27	---	9.56	49.83	---	73.96	53.96	-4.13

Test mode: IEEE 802.11b CH11 for 1GHz to 25GHz [Vertical]

<i>Frequency</i>	<i>Ant. H.</i>	<i>Table</i>	<i>Amplitude</i>		<i>Correction Factor</i>	<i>Corrected Amplitude</i>		<i>Limit</i>		<i>Margin</i>
			<i>Peak / Ave.</i>			<i>Peak / Ave.</i>		<i>Peak / Ave.</i>		
<i>MHz</i>	<i>m</i>	<i>degree</i>	<i>dBμV</i>		<i>dB/m</i>	<i>dBμV/m</i>		<i>dBμV/m</i>		<i>dB</i>
1860.42	1.00	339	35.00	---	10.27	45.27	---	73.96	53.96	-8.69
2266.67	1.00	279	37.50	---	8.84	46.34	---	73.96	53.96	-7.62
2660.42	1.00	126	35.83	---	9.79	45.62	---	73.96	53.96	-8.34
7384.79	1.00	136	39.44	---	10.42	49.86	---	73.96	53.96	-4.10
9849.79	1.00	302	39.11	---	11.93	51.04	---	73.96	53.96	-2.92
12309.08	1.00	237	46.94	35.94	9.56	56.50	45.50	73.96	53.96	-8.46

Test mode: IEEE 802.11g CH01 for 30MHz to 1GHz [Horizontal]

Radiated Emission				Correction Factors	Corrected Amplitude	Class B (3 m)	
Frequency (MHz)	Amplitude (dBμV)	Ant. H. (m)	Table ()			Limit (dBμV/m)	Margin (dB)
80.32	30.92	1.00	176	0.14	31.06	40.00	-8.94
187.62	39.86	1.00	180	-3.68	36.18	43.50	-7.32
199.37	42.30	1.00	188	-3.80	38.50	43.50	-5.00
234.31	43.69	1.00	330	-4.06	39.63	46.00	-6.37
266.44	42.69	1.00	195	-4.20	38.49	46.00	-7.51
325.24	39.89	1.00	240	-3.22	36.67	46.00	-9.33

Test mode: IEEE 802.11g CH01 for 30MHz to 1GHz [Vertical]

Radiated Emission				Correction Factors	Corrected Amplitude	Class B (3 m)	
Frequency (MHz)	Amplitude (dBμV)	Ant. H. (m)	Table ()			Limit (dBμV/m)	Margin (dB)
98.51	34.07	1.00	14	-1.10	32.97	43.50	-10.53
119.12	35.04	1.00	275	-2.11	32.93	43.50	-10.57
134.27	35.26	1.00	306	-2.73	32.53	43.50	-10.97
199.75	39.05	1.00	91	-3.81	35.24	43.50	-8.26
233.09	38.49	1.00	153	-4.07	34.42	46.00	-11.58
662.92	25.76	1.00	112	8.75	34.51	46.00	-11.49

Test mode: IEEE 802.11g CH01 for 1GHz to 25GHz [Horizontal]

<i>Frequency</i>	<i>Ant. H.</i>	<i>Table</i>	<i>Amplitude</i>		<i>Correction Factor</i>	<i>Corrected Amplitude</i>		<i>Limit</i>		<i>Margin</i>
			<i>Peak / Ave.</i>			<i>Peak / Ave.</i>		<i>Peak / Ave.</i>		
<i>MHz</i>	<i>m</i>	<i>degree</i>	<i>dBμV</i>		<i>dB/m</i>	<i>dBμV/m</i>		<i>dBμV/m</i>		<i>dB</i>
2287.50	1.00	167	34.84	---	8.89	43.73	---	73.96	53.96	-10.23
2633.33	1.00	281	34.50	---	9.74	44.24	---	73.96	53.96	-9.72
7233.75	1.00	51	35.78	---	10.07	45.85	---	73.96	53.96	-8.11
9650.42	1.00	229	35.44	---	11.47	46.91	---	73.96	53.96	-7.05
12061.04	1.00	248	38.27	---	9.81	48.08	---	73.96	53.96	-5.88

Test mode: IEEE 802.11g CH01 for 1GHz to 25GHz [Vertical]

<i>Frequency</i>	<i>Ant. H.</i>	<i>Table</i>	<i>Amplitude</i>		<i>Correction Factor</i>	<i>Corrected Amplitude</i>		<i>Limit</i>		<i>Margin</i>
			<i>Peak / Ave.</i>			<i>Peak / Ave.</i>		<i>Peak / Ave.</i>		
<i>MHz</i>	<i>m</i>	<i>degree</i>	<i>dBμV</i>		<i>dB/m</i>	<i>dBμV/m</i>		<i>dBμV/m</i>		<i>dB</i>
2250.00	1.00	74	35.83	---	8.79	44.62	---	73.96	53.96	-9.34
2560.42	1.00	307	37.50	---	9.60	47.10	---	73.96	53.96	-6.86
7233.75	1.00	200	34.94	---	10.07	45.01	---	73.96	53.96	-8.95
9650.42	1.00	38	34.94	---	11.47	46.41	---	73.96	53.96	-7.55
12061.04	1.00	16	38.60	---	9.81	48.41	---	73.96	53.96	-5.55
19296.25	1.00	282	47.48	---	1.60	49.08	---	73.96	53.96	-4.88

Test mode: IEEE 802.11g CH06 for 30MHz to 1GHz [Horizontal]

Radiated Emission				Correction Factors	Corrected Amplitude	Class B (3 m)	
Frequency (MHz)	Amplitude (dBμV)	Ant. H. (m)	Table ()			Limit (dBμV/m)	Margin (dB)
79.71	30.64	1.00	169	0.19	30.83	40.00	-9.17
167.62	35.94	1.00	172	-3.71	32.23	43.50	-11.27
199.33	42.71	1.00	172	-3.80	38.91	43.50	-4.59
234.31	44.15	1.00	308	-4.06	40.09	46.00	-5.91
266.44	43.37	1.00	188	-4.20	39.17	46.00	-6.83
325.85	39.96	1.00	247	-3.20	36.76	46.00	-9.24

Test mode: IEEE 802.11g CH06 for 30MHz to 1GHz [Vertical]

Radiated Emission				Correction Factors	Corrected Amplitude	Class B (3 m)	
Frequency (MHz)	Amplitude (dBμV)	Ant. H. (m)	Table ()			Limit (dBμV/m)	Margin (dB)
98.51	33.84	1.00	337	-1.10	32.74	43.50	-10.76
123.97	36.02	1.00	292	-2.34	33.68	43.50	-9.82
133.67	35.96	1.00	292	-2.72	33.24	43.50	-10.26
200.96	39.34	1.00	337	-3.82	35.52	43.50	-7.98
234.31	38.76	1.00	164	-4.06	34.70	46.00	-11.30
667.17	26.06	1.00	186	8.84	34.90	46.00	-11.10

Test mode: IEEE 802.11g CH06 for 1GHz to 25GHz [Horizontal]

<i>Frequency</i>	<i>Ant. H.</i>	<i>Table</i>	<i>Amplitude</i>		<i>Correction Factor</i>	<i>Corrected Amplitude</i>		<i>Limit</i>		<i>Margin</i>
			<i>Peak / Ave.</i>			<i>Peak / Ave.</i>		<i>Peak / Ave.</i>		
<i>MHz</i>	<i>m</i>	<i>degree</i>	<i>dBμV</i>		<i>dB/m</i>	<i>dBμV/m</i>		<i>dBμV/m</i>		<i>dB</i>
1606.25	1.00	347	34.84	---	14.23	49.07	---	73.96	53.96	-4.89
2675.00	1.00	0	34.33	---	9.82	44.15	---	73.96	53.96	-9.81
7312.29	1.00	198	35.44	---	10.30	45.74	---	73.96	53.96	-8.22
9747.08	1.00	358	36.10	---	11.89	47.99	---	73.96	53.96	-5.97
12187.92	1.00	32	39.77	---	9.74	49.51	---	73.96	53.96	-4.45

Test mode: IEEE 802.11g CH06 for 1GHz to 25GHz [Vertical]

<i>Frequency</i>	<i>Ant. H.</i>	<i>Table</i>	<i>Amplitude</i>		<i>Correction Factor</i>	<i>Corrected Amplitude</i>		<i>Limit</i>		<i>Margin</i>
			<i>Peak / Ave.</i>			<i>Peak / Ave.</i>		<i>Peak / Ave.</i>		
<i>MHz</i>	<i>m</i>	<i>degree</i>	<i>dBμV</i>		<i>dB/m</i>	<i>dBμV/m</i>		<i>dBμV/m</i>		<i>dB</i>
2197.92	1.00	107	35.50	---	8.64	44.14	---	73.96	53.96	-9.82
2725.00	1.00	134	35.17	---	9.91	45.08	---	73.96	53.96	-8.88
7312.29	1.00	268	35.77	---	10.30	46.07	---	73.96	53.96	-7.89
9747.08	1.00	233	35.10	---	11.89	46.99	---	73.96	53.96	-6.97
12187.92	1.00	154	39.60	---	9.74	49.34	---	73.96	53.96	-4.62

Test mode: IEEE 802.11g CH11 for 30MHz to 1GHz [Horizontal]

Radiated Emission				Correction Factors	Corrected Amplitude	Class B (3 m)	
Frequency (MHz)	Amplitude (dBμV)	Ant. H. (m)	Table ()			Limit (dBμV/m)	Margin (dB)
79.71	30.59	1.00	154	0.19	30.78	40.00	-9.22
186.41	39.15	1.00	188	-3.70	35.45	43.50	-8.05
199.27	42.57	1.00	172	-3.80	38.77	43.50	-4.73
219.76	42.48	1.00	315	-3.97	38.51	46.00	-7.49
233.09	43.92	1.00	180	-4.07	39.85	46.00	-6.15
268.26	42.22	1.00	195	-4.20	38.02	46.00	-7.98

Test mode: IEEE 802.11g CH11 for 30MHz to 1GHz [Vertical]

Radiated Emission				Correction Factors	Corrected Amplitude	Class B (3 m)	
Frequency (MHz)	Amplitude (dBμV)	Ant. H. (m)	Table ()			Limit (dBμV/m)	Margin (dB)
98.51	34.28	1.00	346	-1.10	33.18	43.50	-10.32
133.06	36.48	1.00	266	-2.70	33.78	43.50	-9.72
167.62	36.35	1.00	162	-3.71	32.64	43.50	-10.86
200.96	38.92	1.00	320	-3.82	35.10	43.50	-8.40
666.56	26.76	1.00	172	8.83	35.59	46.00	-10.41
721.12	25.22	1.00	188	9.93	35.15	46.00	-10.85

Test mode: IEEE 802.11g CH11 for 1GHz to 25GHz [Horizontal]

<i>Frequency</i>	<i>Ant. H.</i>	<i>Table</i>	<i>Amplitude</i>		<i>Correction Factor</i>	<i>Corrected Amplitude</i>		<i>Limit</i>		<i>Margin</i>
			<i>Peak / Ave.</i>			<i>Peak / Ave.</i>		<i>Peak / Ave.</i>		
<i>MHz</i>	<i>m</i>	<i>degree</i>	<i>dBμV</i>		<i>dB/m</i>	<i>dBμV/m</i>		<i>dBμV/m</i>		<i>dB</i>
2058.33	1.00	41	35.67	---	8.25	43.92	---	73.96	53.96	-10.04
2562.50	1.00	216	35.50	---	9.61	45.11	---	73.96	53.96	-8.85
7384.79	1.00	226	34.94	---	10.42	45.36	---	73.96	53.96	-8.60
9849.79	1.00	315	36.61	---	11.93	48.54	---	73.96	53.96	-5.42
12308.75	1.00	143	37.77	---	9.56	47.33	---	73.96	53.96	-6.63

Test mode: IEEE 802.11g CH11 for 1GHz to 25GHz [Vertical]

<i>Frequency</i>	<i>Ant. H.</i>	<i>Table</i>	<i>Amplitude</i>		<i>Correction Factor</i>	<i>Corrected Amplitude</i>		<i>Limit</i>		<i>Margin</i>
			<i>Peak / Ave.</i>			<i>Peak / Ave.</i>		<i>Peak / Ave.</i>		
<i>MHz</i>	<i>m</i>	<i>degree</i>	<i>dBμV</i>		<i>dB/m</i>	<i>dBμV/m</i>		<i>dBμV/m</i>		<i>dB</i>
2254.17	1.00	0	36.00	---	8.80	44.80	---	73.96	53.96	-9.16
2629.17	1.00	196	35.84	---	9.73	45.57	---	73.96	53.96	-8.39
4925.83	1.00	147	39.44	---	4.13	43.57	---	73.96	53.96	-10.39
7384.79	1.00	320	35.61	---	10.42	46.03	---	73.96	53.96	-7.93
9849.79	1.00	120	35.94	---	11.93	47.87	---	73.96	53.96	-6.09
12308.75	1.00	244	37.27	---	9.56	46.83	---	73.96	53.96	-7.13

7.4 Test Result of the Bandedge


If any 100 kHz bandwidth outside these frequency bands, the radio frequency power that is produced by the modulation products of the spreading sequence, the information sequence and the carrier frequency shall be either *at least 20 dB below that in any 100 kHz bandwidth within the band that contains the highest level of the desired power or shall not exceed the general levels specified in §15.209(a)*,

We perform this section by the *radiated manner*, the RBW is set to 100kHz and VBW>RBW. We'd made the observation *up to 10th harmonics and the criterion is all the harmonic/spurious emissions must be 20dB below the highest emission level measured*. If the emissions fall in the restricted bands stated in the Part 15.205(a) must also *comply with the radiated emission limits specified in Part 15.209(a)*. (*Peak mode: RBW=VBW=1MHz, Average mode: RBW=1MHz; VBW=10Hz*)

The following pages show our observations referring to the channel 1 and 11 respectively.

Test Condition & Setup: same as < 7.1 >

IEEE 802.11b Ch01

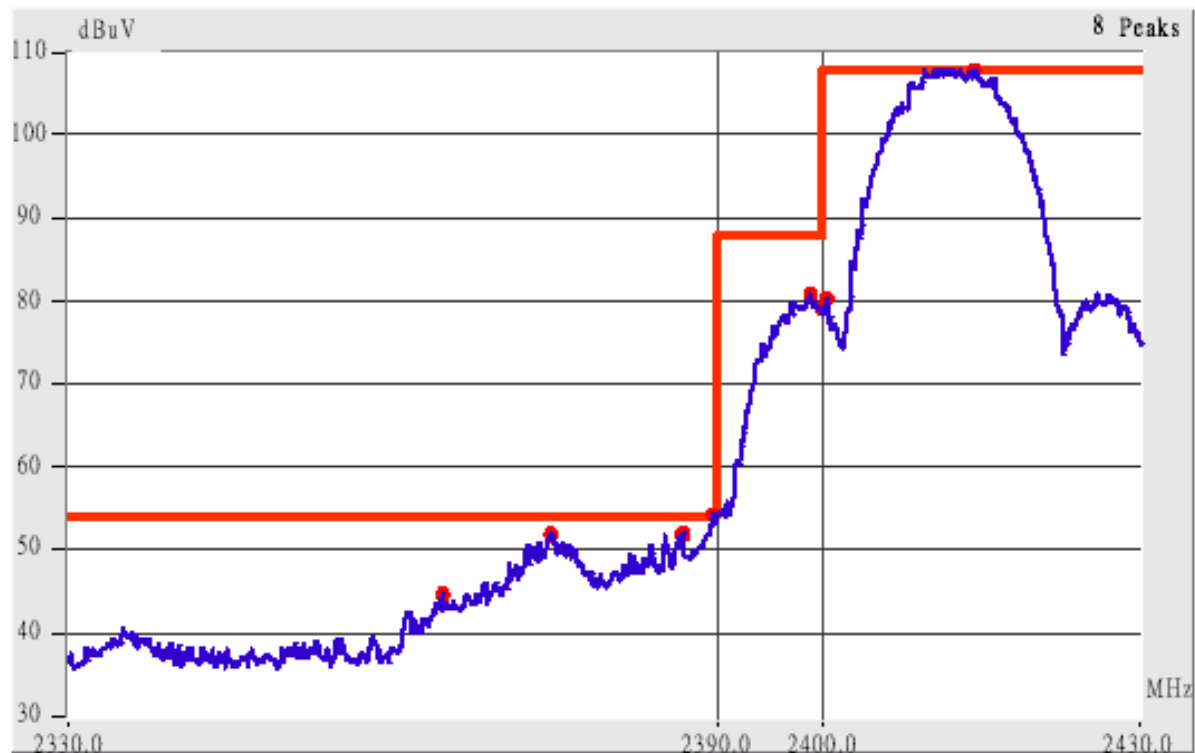

This is the hard copy of our bandedge measurement generated by our bandedge testing program. The plot shown above is the bandedge of channel 1.

1. The lobe left by the fundamental side is already 20dB below the highest emission level.
2. The emissions recorded in the restricted band is do comply with the Part 15.209(a) – as below.

Radiated Emission					Corrected Amplitude		Class B (3m)		
Frequency (MHz)	Ant. P.	Ant. H. (m)	Angle (°)	Factors (dB)	(dBμV/m)		Limit (dBμV/m)		Margin (dB)
					Peak	Average	Peak	Ave.	
2365.75	Hor	1.00	146	9.11	47.45	---	73.96	53.96	-6.51
2375.01	Hor	1.00	149	9.14	51.97	40.31	73.96	53.96	-13.65
2390.40	Hor	1.00	239	9.18	53.18	42.68	73.96	53.96	-11.28
2362.28	Ver	1.00	262	9.10	50.60	---	73.96	53.96	-3.36
2372.86	Ver	1.00	304	9.13	59.80	46.13	73.96	53.96	-7.83
2383.02	Ver	1.00	304	9.16	58.99	47.49	73.96	53.96	-6.47
2390.56	Ver	1.00	307	9.18	60.68	51.68	73.96	53.96	-2.28

IEEE 802.11b Ch11




This is the hard copy of our bandedge measurement generated by our bandedge testing program. The plot shown above is the bandedge of channel 11.

3. The lobe right by the fundamental side is already 20dB below the highest emission level.
4. The emissions recorded in the restricted band is do comply with the Part 15.209(a) – as below

Radiated Emission					Corrected Amplitude		Class B (3m)		
Frequency (MHz)	Ant. P.	Ant. H. (m)	Angle (°)	Factors (dB)	(dBuV/m)		Limit (dBuV/m)		Margin (dB)
					Peak	Average	Peak	Ave.	
2483.25	Hor	1.00	61	9.44	52.78	44.94	73.96	53.96	-9.02
2488.85	Hor	1.00	42	9.46	56.46	44.79	73.96	53.96	-9.17
2499.87	Hor	1.00	43	9.49	54.16	42.82	73.96	53.96	-11.14
2483.18	Ver	1.00	6	9.44	61.78	51.27	73.96	53.96	-2.69
2488.76	Ver	1.00	88	9.46	65.63	53.46	73.96	53.96	-0.50
2499.77	Ver	1.00	70	9.49	60.66	50.82	73.96	53.96	-3.14
2501.91	Ver	1.00	229	9.49	57.49	48.49	73.96	53.96	-5.47

IEEE 802.11g Ch01

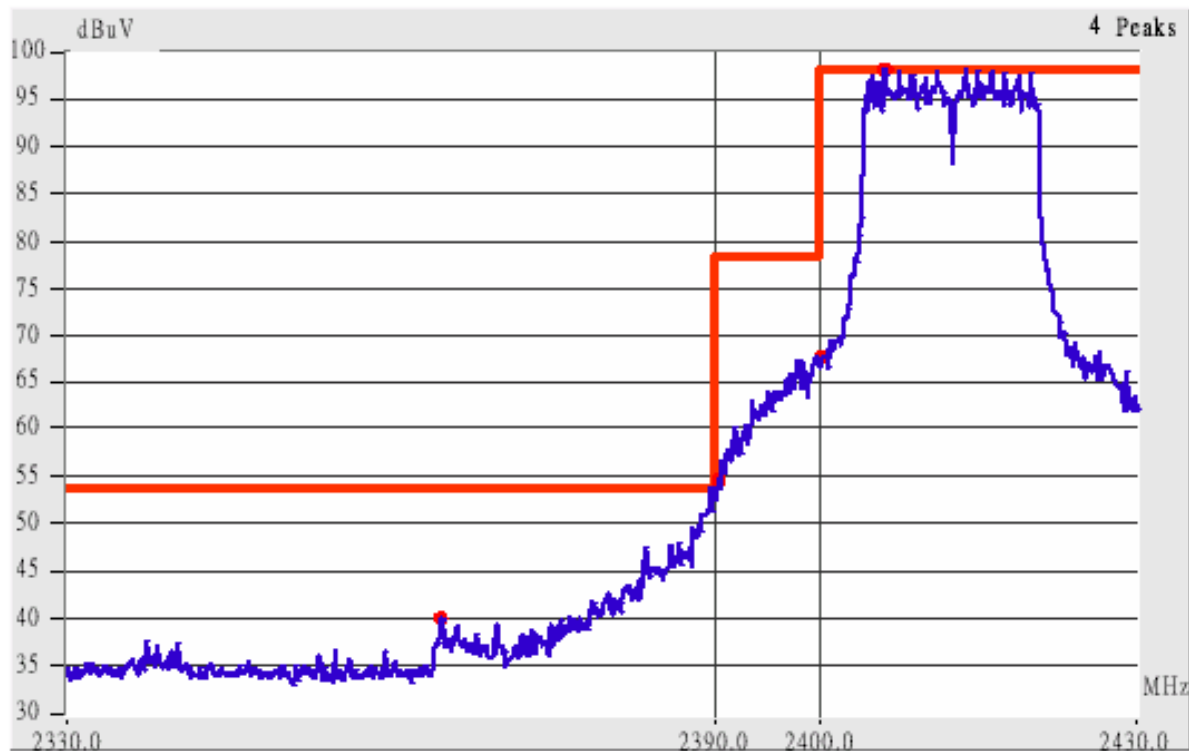


This is the hard copy of our bandedge measurement generated by our bandedge testing program. The plot shown above is the bandedge of channel 1.

5. The lobe left by the fundamental side is already 20dB below the highest emission level.
6. The emissions recorded in the restricted band is do comply with the Part 15.209(a) – as below.

<i>Radiated Emission</i>					<i>Corrected Amplitude</i>		<i>Class B (3m)</i>		
<i>Frequency (MHz)</i>	<i>Ant. P.</i>	<i>Ant. H. (m)</i>	<i>Angle (°)</i>	<i>Factors (dB)</i>	<i>(dBμV/m)</i>		<i>Limit (dBμV/m)</i>		<i>Margin (dB)</i>
					<i>Peak</i>	<i>Average</i>	<i>Peak</i>	<i>Ave.</i>	
2379.02	Hor	1.00	139	9.15	49.98	---	73.96	53.96	-3.98
2389.64	Hor	1.00	110	9.18	54.35	40.68	73.96	53.96	-13.28
2364.07	Ver	1.00	34	9.11	50.94	---	73.96	53.96	-3.02
2377.24	Ver	1.00	206	9.15	56.48	37.82	73.96	53.96	-16.14
2390.45	Ver	1.00	260	9.18	65.68	47.35	73.96	53.96	-6.61

IEEE 802.11g Ch11

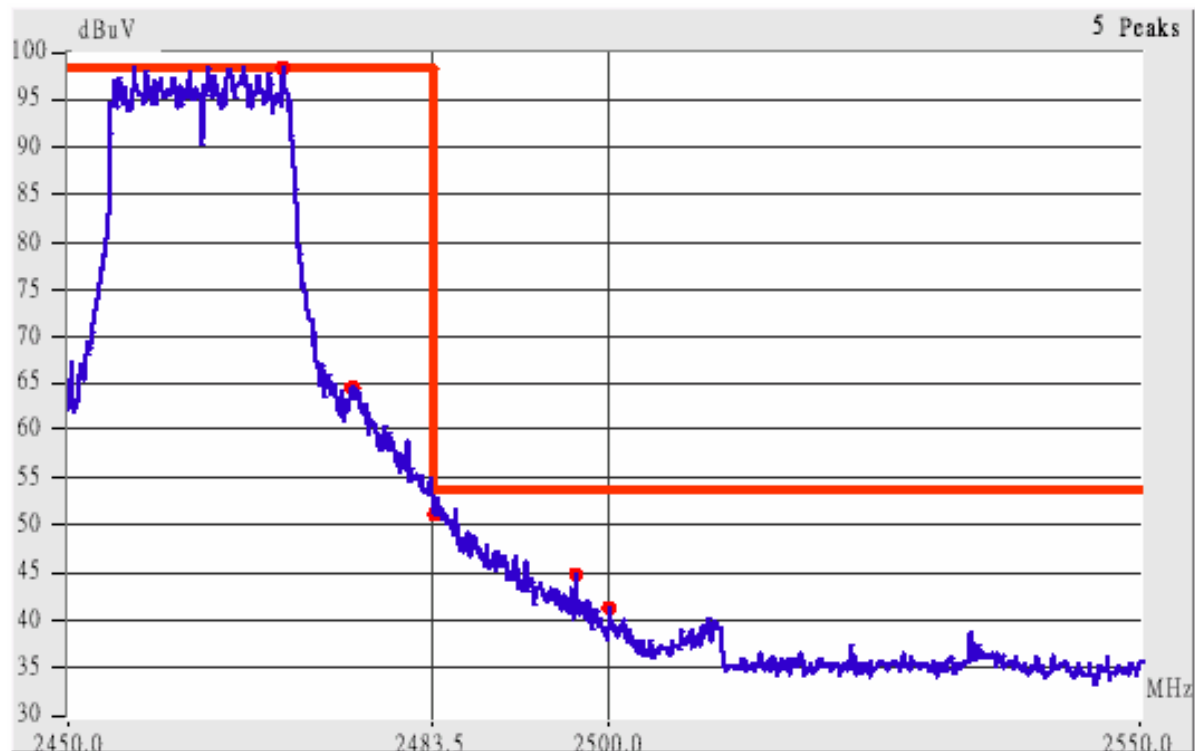

This is the hard copy of our bandedge measurement generated by our bandedge testing program. The plot shown above is the bandedge of channel 11.

7. The lobe right by the fundamental side is already 20dB below the highest emission level.
8. The emissions recorded in the restricted band is do comply with the Part 15.209(a) – as below


Radiated Emission					Corrected Amplitude		Class B (3m)		
Frequency (MHz)	Ant. P.	Ant. H. (m)	Angle (°)	Factors (dB)	(dBμV/m)		Limit (dBμV/m)		Margin (dB)
					Peak	Average	Peak	Ave.	
2483.17	Hor	1.00	70	9.44	59.61	47.11	73.96	53.96	-6.85
2485.74	Hor	1.00	70	9.45	62.45	42.28	73.96	53.96	-11.51
2483.27	Ver	1.00	218	9.44	70.78	52.94	73.96	53.96	-1.02
2489.19	Ver	1.00	127	9.46	64.79	45.29	73.96	53.96	-8.67
2499.50	Ver	1.00	293	9.49	54.82	37.99	73.96	53.96	-15.97
2508.99	Ver	1.00	73	9.51	50.01	---	73.96	53.96	-3.95

VIII. Section 15.247(d): Power Spectral Density

8.1 Test Condition & Setup

The tests below are running with the EUT transmitter set at high power in TDD mode. The EUT is needed to force selection of output power level and channel number. While testing, the EUT was set to transmit continuously and to be tested by the contact manner with the spectrum analyzer.

8.2 Test Instruments Configuration

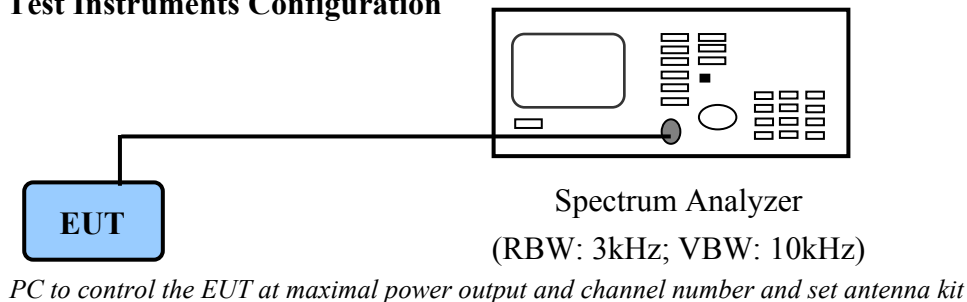

8.3 List of Test Instruments

Instrument Name	Model No.	Brand	Serial No.	Next time
Spectrum Analyzer	MS2665C	ANRITSU	6200175476	11/02/05

8.4 Test Result of Power spectral density

The following table shows a summary of the test results of the Power Spectral Density.


<i>Channel</i>	<i>Ppr (dBm)</i>	<i>Cable Loss (dB)</i>	<i>Ppq (dBm)</i>	<i>Limit (dB)</i>	<i>Margin (dB)</i>
802.11b CH01	-3.33	1.00	-2.33	8.00	-10.33
802.11b CH06	-3.86	1.00	-2.86	8.00	-10.86
802.11b CH11	-4.26	1.00	-3.26	8.00	-11.26
802.11g CH01	-15.70	1.00	-14.70	8.00	-22.70
802.11g CH06	-11.58	1.00	-10.58	8.00	-18.58
802.11g CH11	-16.65	1.00	-15.65	8.00	-23.65

Note:


1. The following pages show the results of spectrum reading.
2. Ppr: spectrum read power density (using peak search mode),
Ppq: actual peak power density in the spread spectrum band.
3. $Ppq = Ppr + |Cable Loss|$

Power Spectral Density of Channel 01

IEEE 802.11b

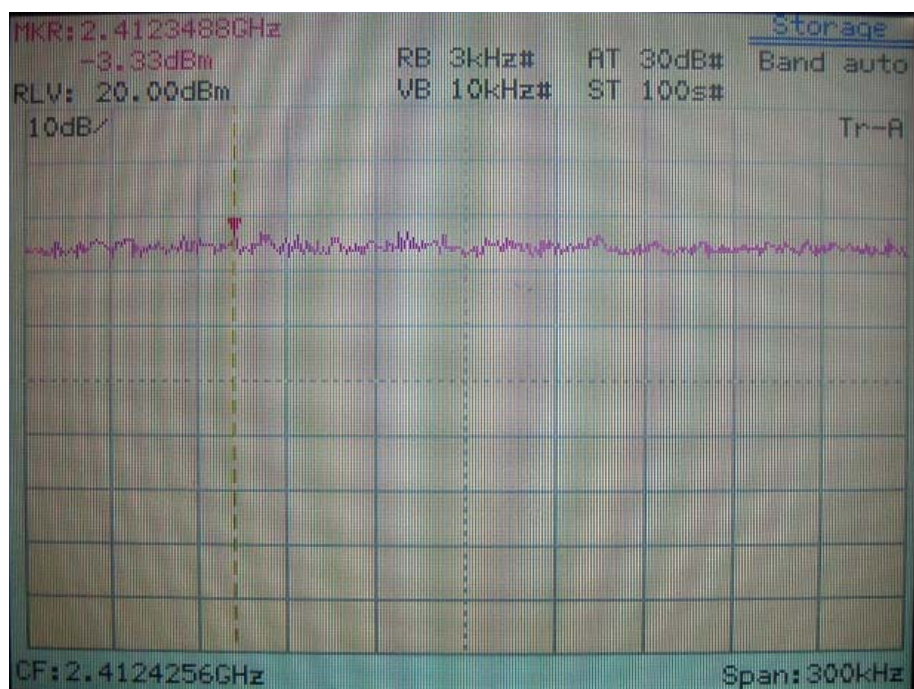


IEEE 802.11g

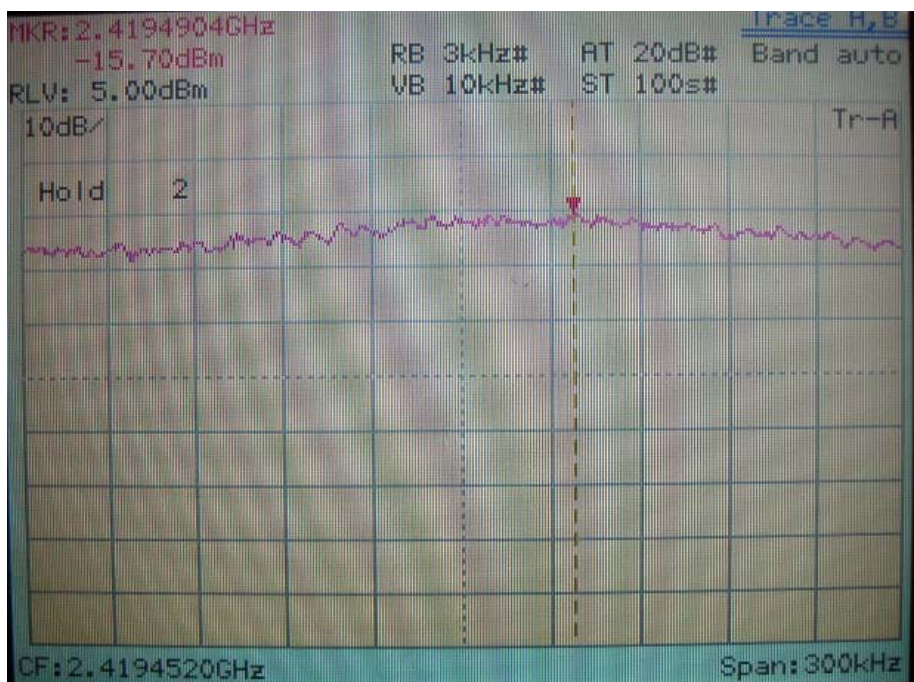


Power Spectral Density of Channel 06

IEEE 802.11b

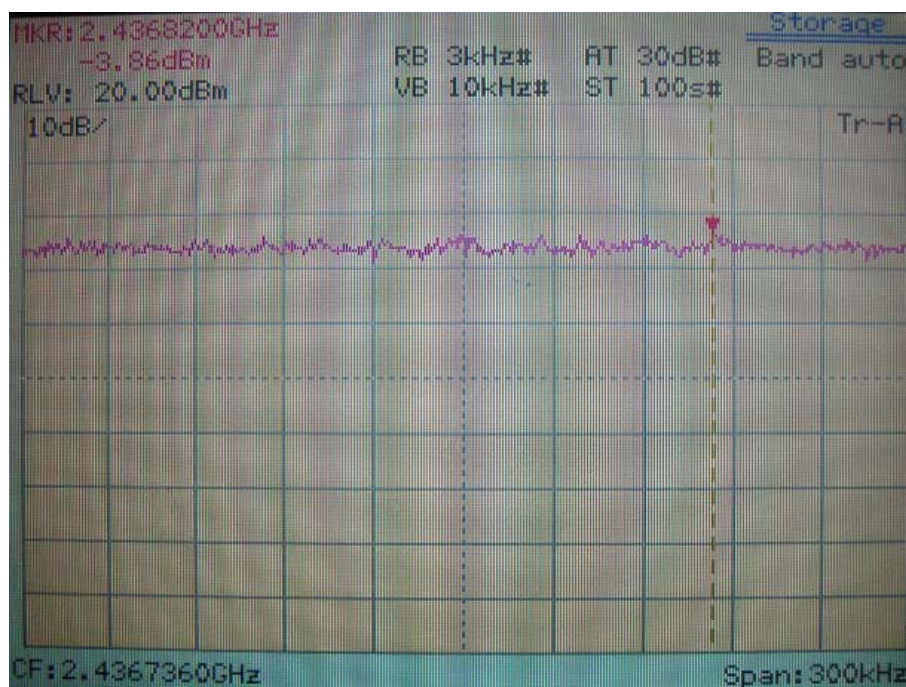


IEEE 802.11g

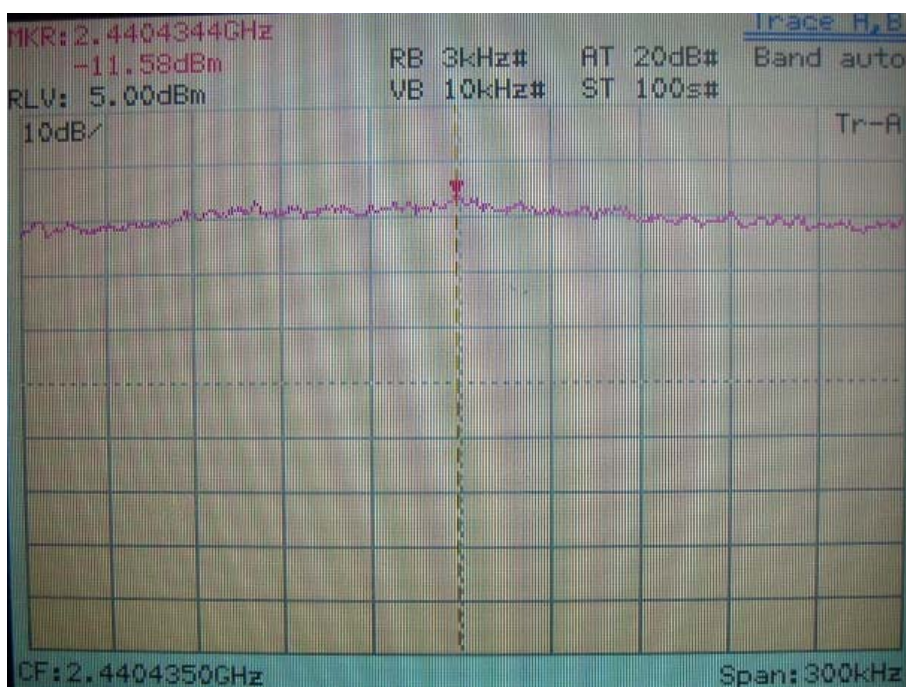

Power Spectral Density of Channel 11

IEEE 802.11b

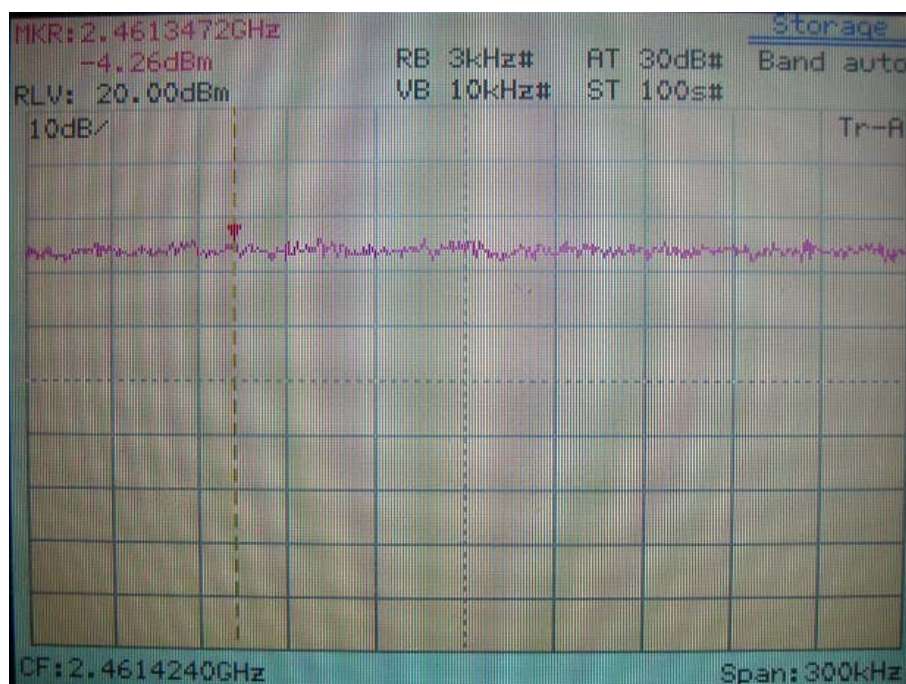

IEEE 802.11g

