



Appendix A

RF Test Data for BLE (Conducted Measurement)

Product Name: Catron AI

Test Model: WIA4BR

Environmental Conditions

Temperature:	23.5° C
Relative Humidity:	52.2%
ATM Pressure:	100.0 kPa
Test Engineer:	Bill Zhu
Supervised by:	Li Huan








A.1 6dB Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	6 dB Bandwidth (MHz)	Limit 6 dB Bandwidth (MHz)	Verdict
NVNT	BLE 1M	2402	Ant1	0.632	0.5	Pass
NVNT	BLE 1M	2440	Ant1	0.663	0.5	Pass
NVNT	BLE 1M	2480	Ant1	0.661	0.5	Pass
NVNT	BLE 2M	2402	Ant1	1.111	0.5	Pass
NVNT	BLE 2M	2440	Ant1	1.124	0.5	Pass
NVNT	BLE 2M	2480	Ant1	1.102	0.5	Pass



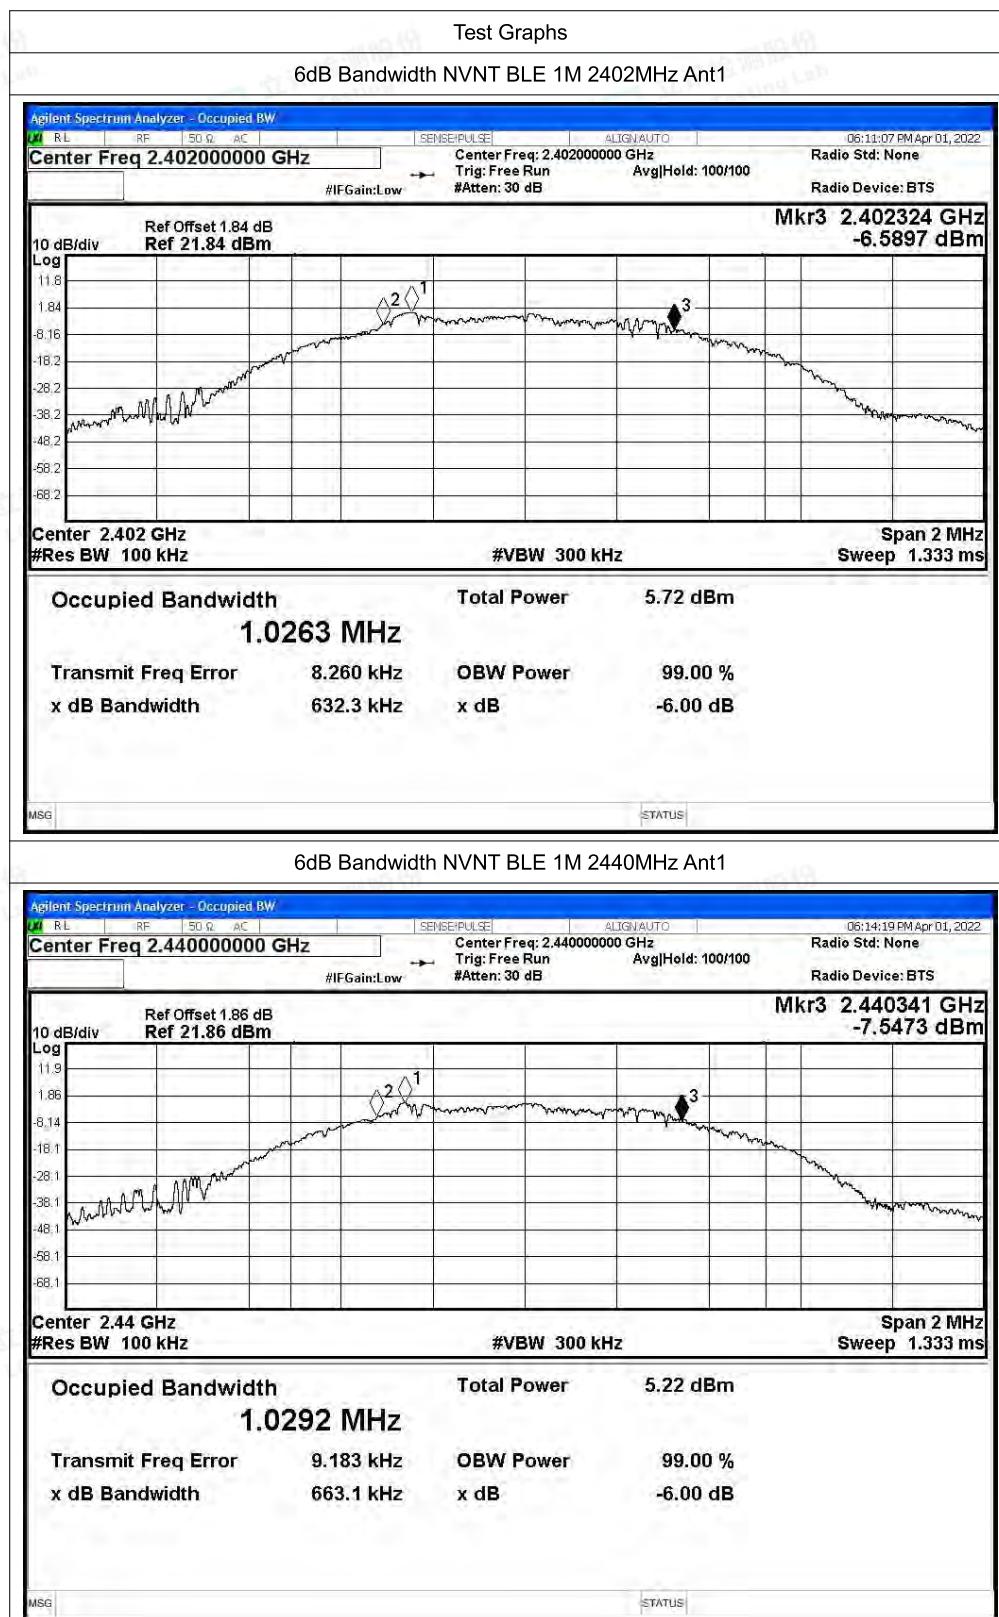

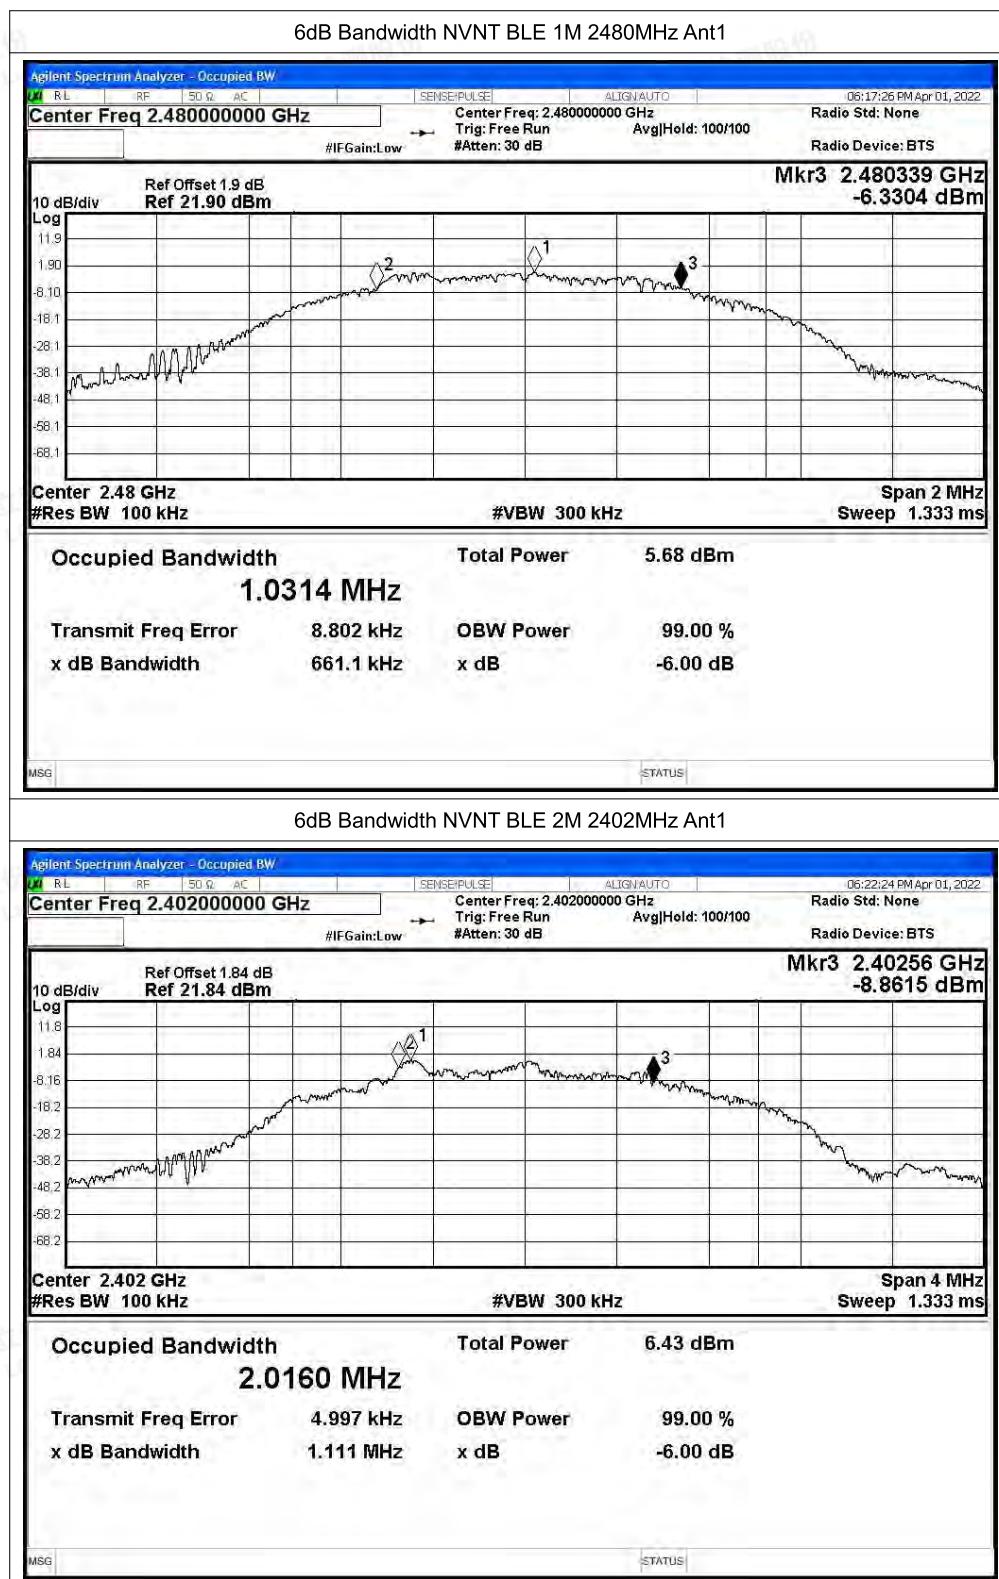

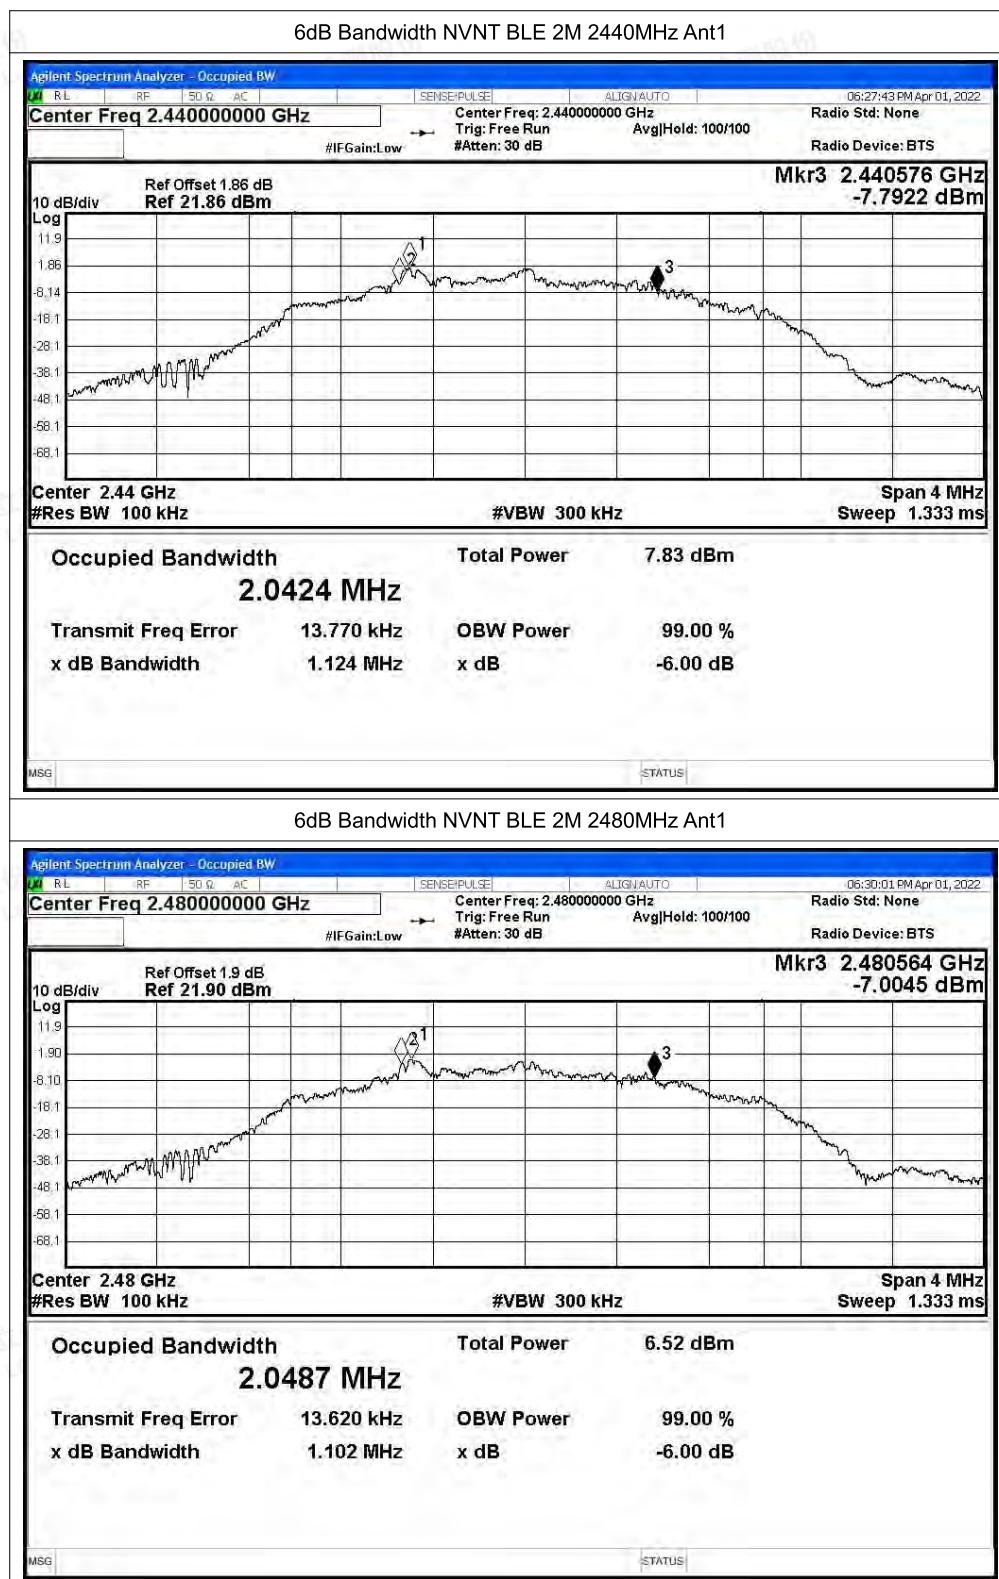






A.2 Maximum Conducted Output Power

Condition	Mode	Frequency (MHz)	Antenna	Total Power (dBm)	Limit (dBm)	Verdict
NVNT	BLE 1M	2402	Ant1	0.49	30	Pass
NVNT	BLE 1M	2440	Ant1	0.02	30	Pass
NVNT	BLE 1M	2480	Ant1	0.63	30	Pass
NVNT	BLE 2M	2402	Ant1	0.45	30	Pass
NVNT	BLE 2M	2440	Ant1	1.84	30	Pass
NVNT	BLE 2M	2480	Ant1	0.59	30	Pass



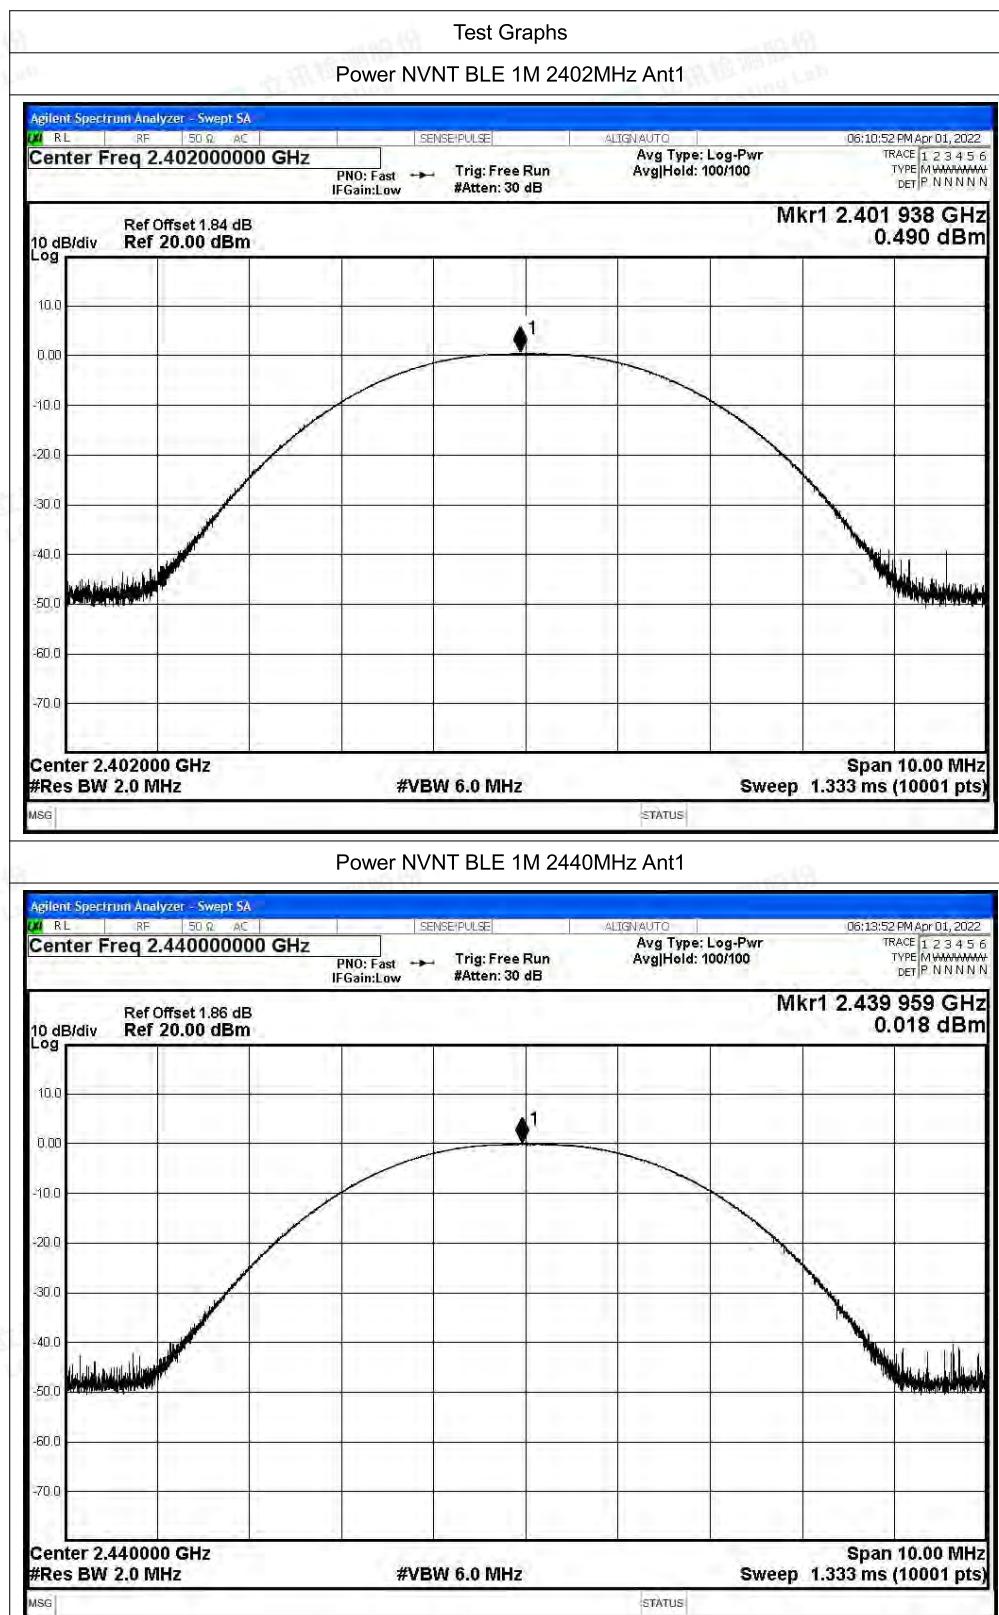

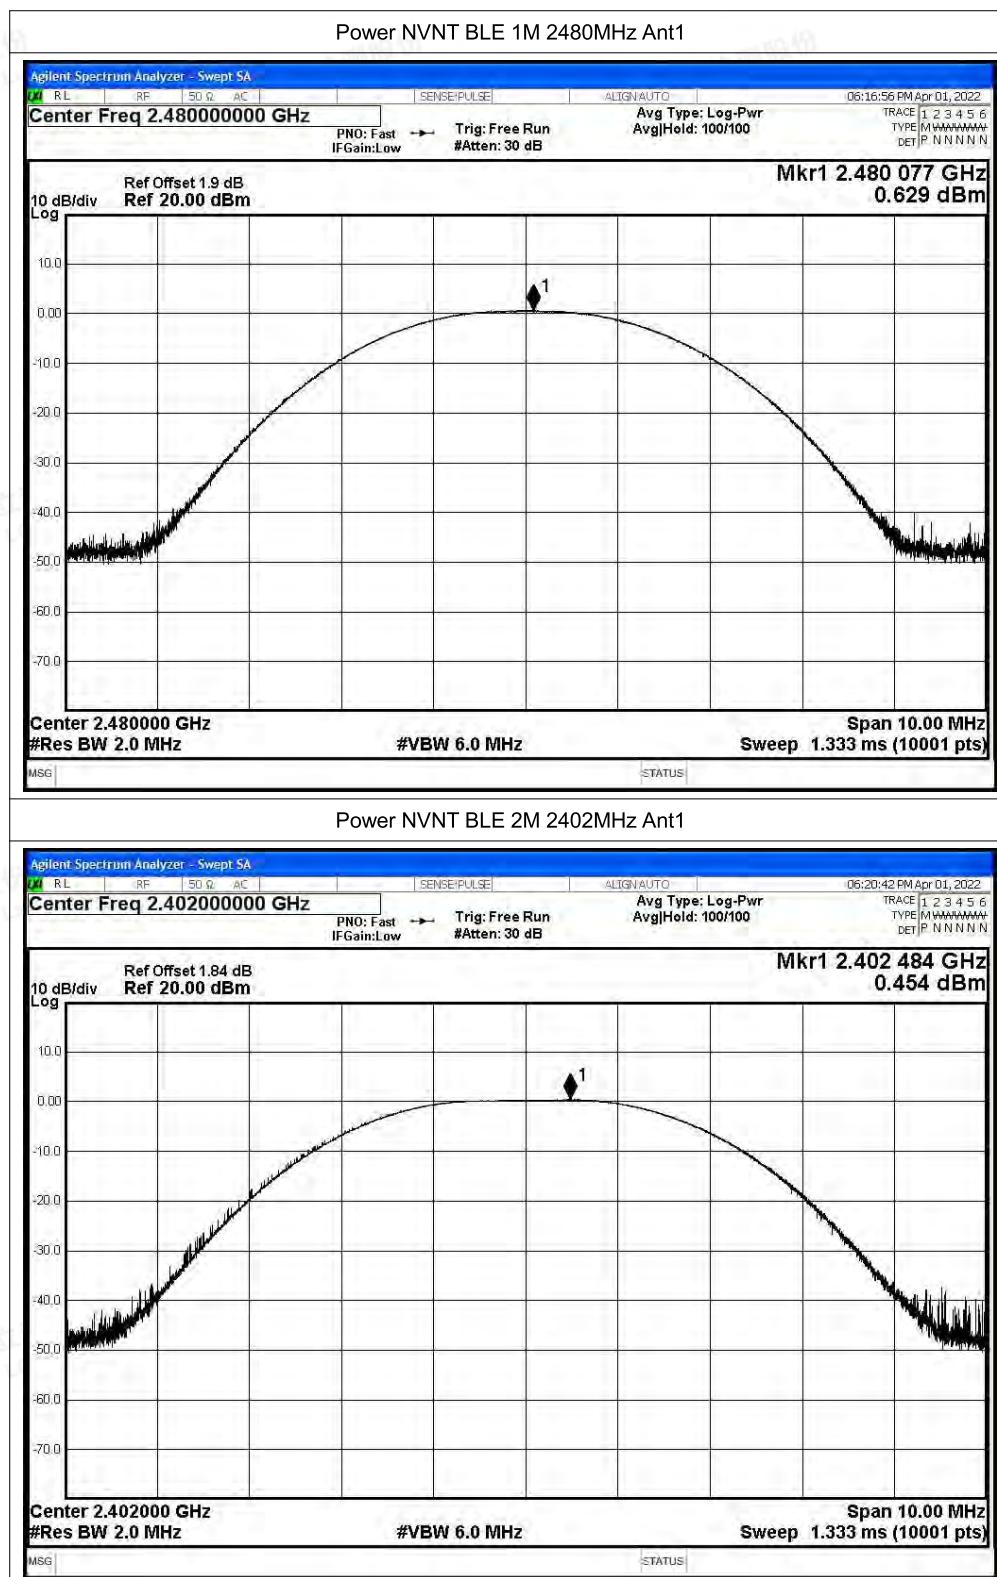

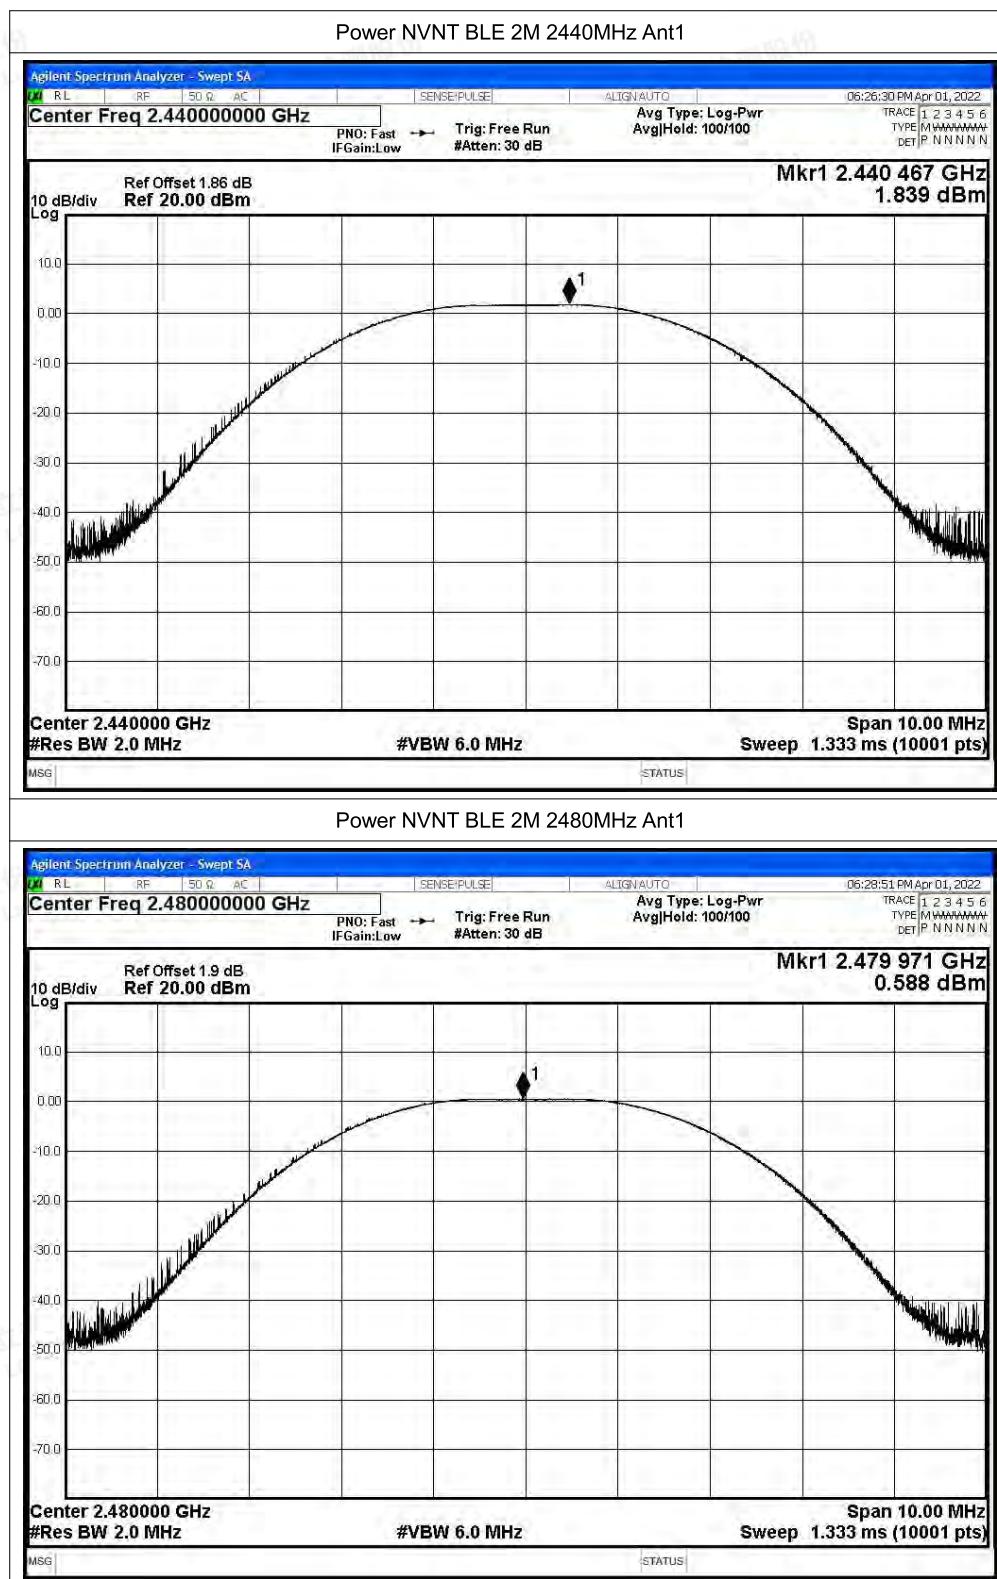



A.3 Maximum Power Spectral Density

Condition	Mode	Frequency (MHz)	Antenna	Conducted PSD (dBm/3kHz)	Duty Factor (dB)	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
NVNT	BLE 1M	2402	Ant1	-15.07	0	-15.07	8	Pass
NVNT	BLE 1M	2440	Ant1	-15.3	0	-15.3	8	Pass
NVNT	BLE 1M	2480	Ant1	-14.65	0	-14.65	8	Pass
NVNT	BLE 2M	2402	Ant1	-17.17	0	-17.17	8	Pass
NVNT	BLE 2M	2440	Ant1	-15.57	0	-15.57	8	Pass
NVNT	BLE 2M	2480	Ant1	-16.79	0	-16.79	8	Pass




Shenzhen LCS Compliance Testing Laboratory Ltd.

Add:101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

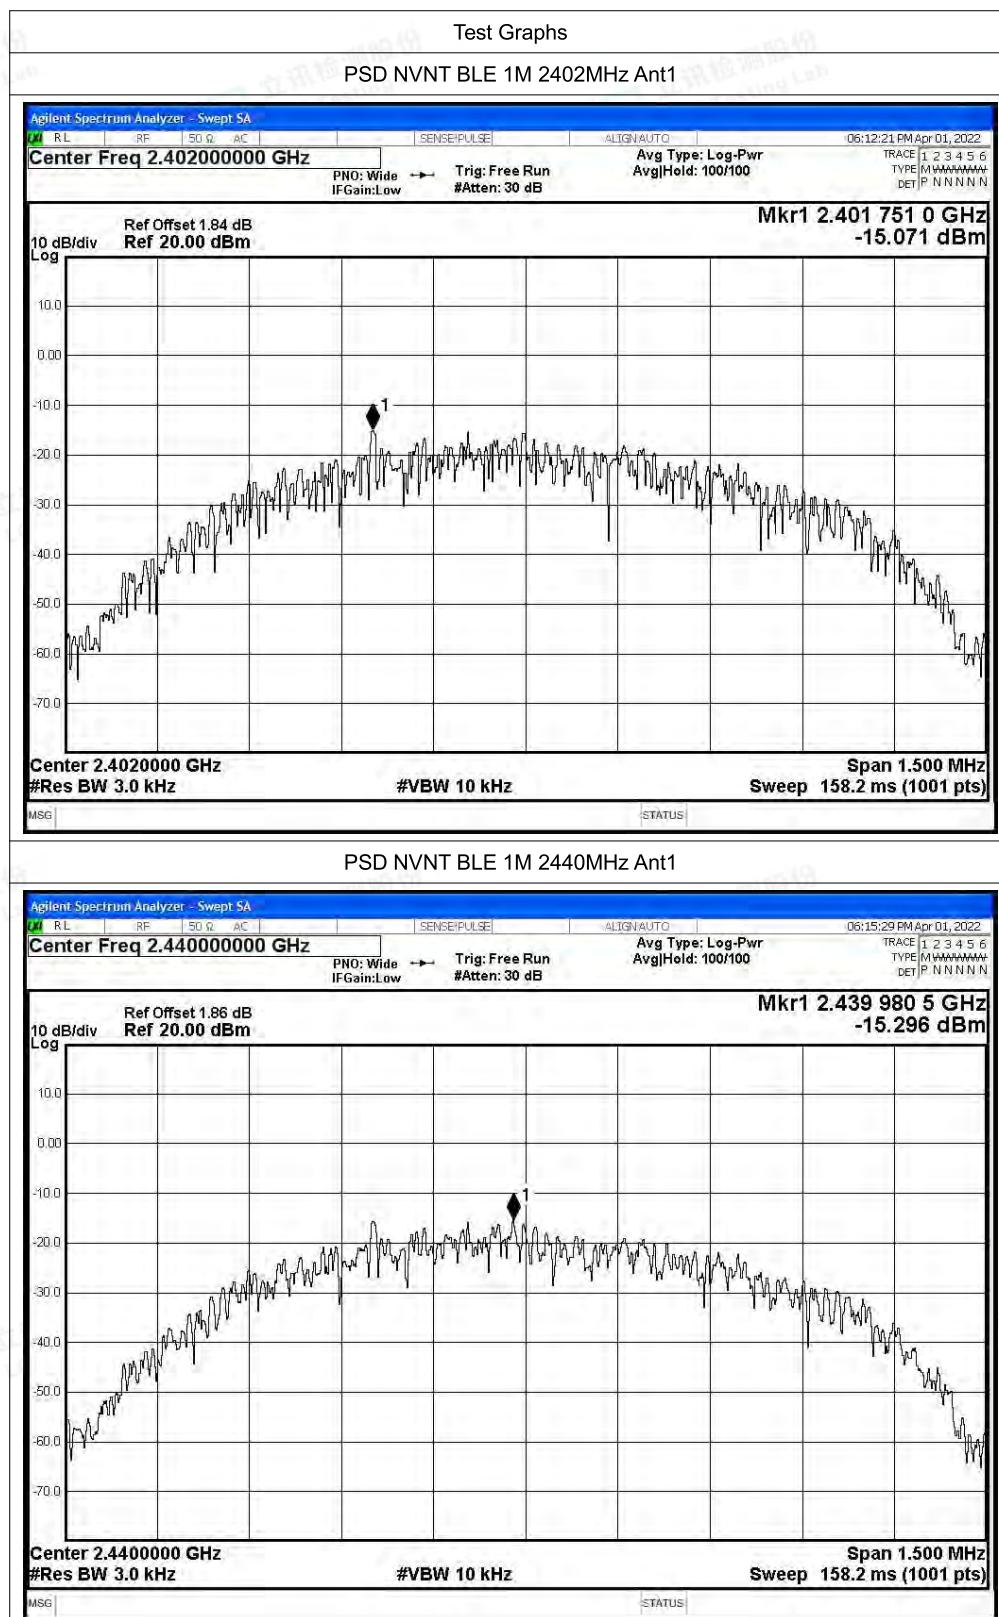



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add:101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

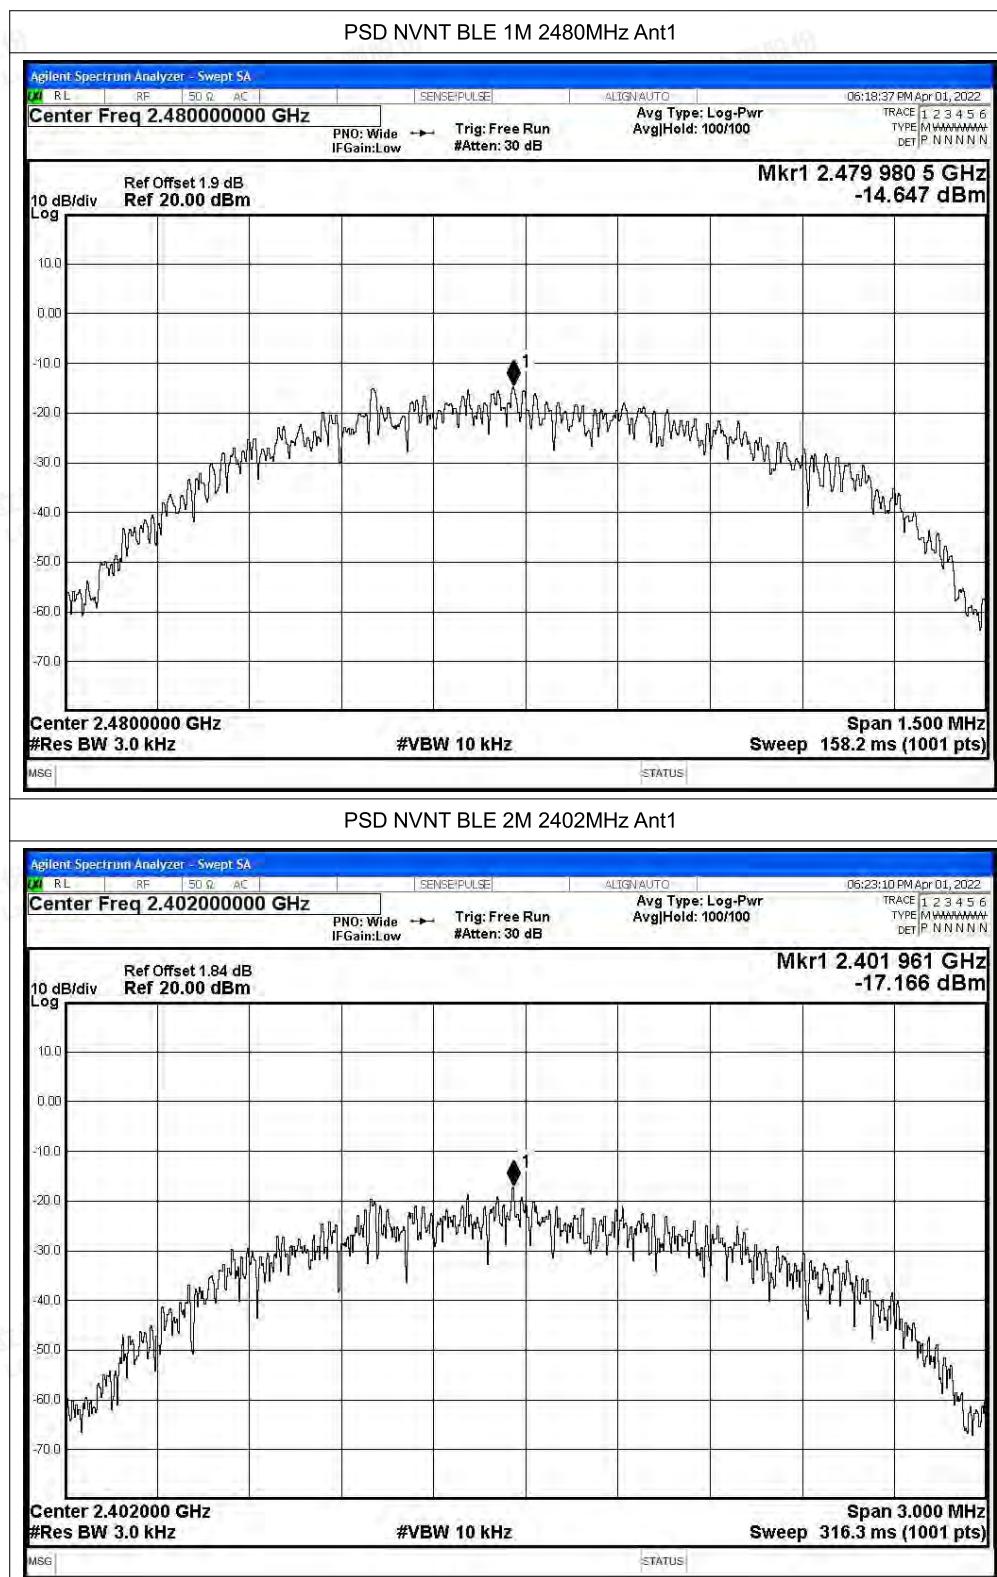

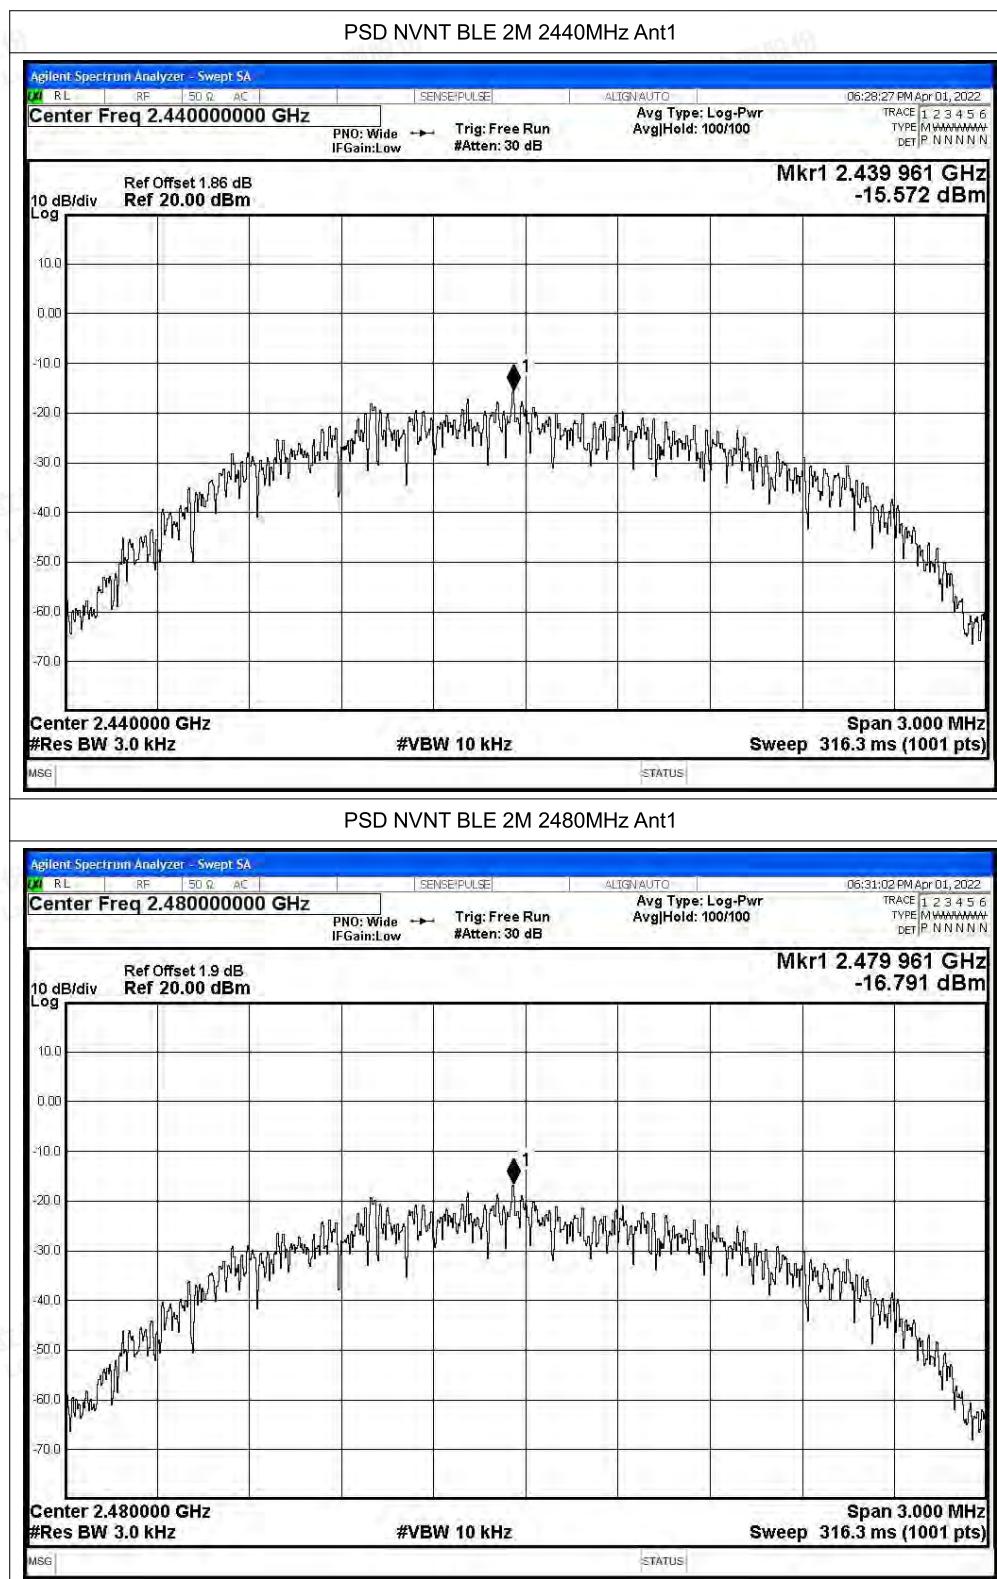






A.4 Band edge measurements


Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE 1M	2402	Ant1	-56.4	-20	Pass
NVNT	BLE 1M	2480	Ant1	-57.09	-20	Pass
NVNT	BLE 2M	2402	Ant1	-46.84	-20	Pass
NVNT	BLE 2M	2480	Ant1	-56.16	-20	Pass



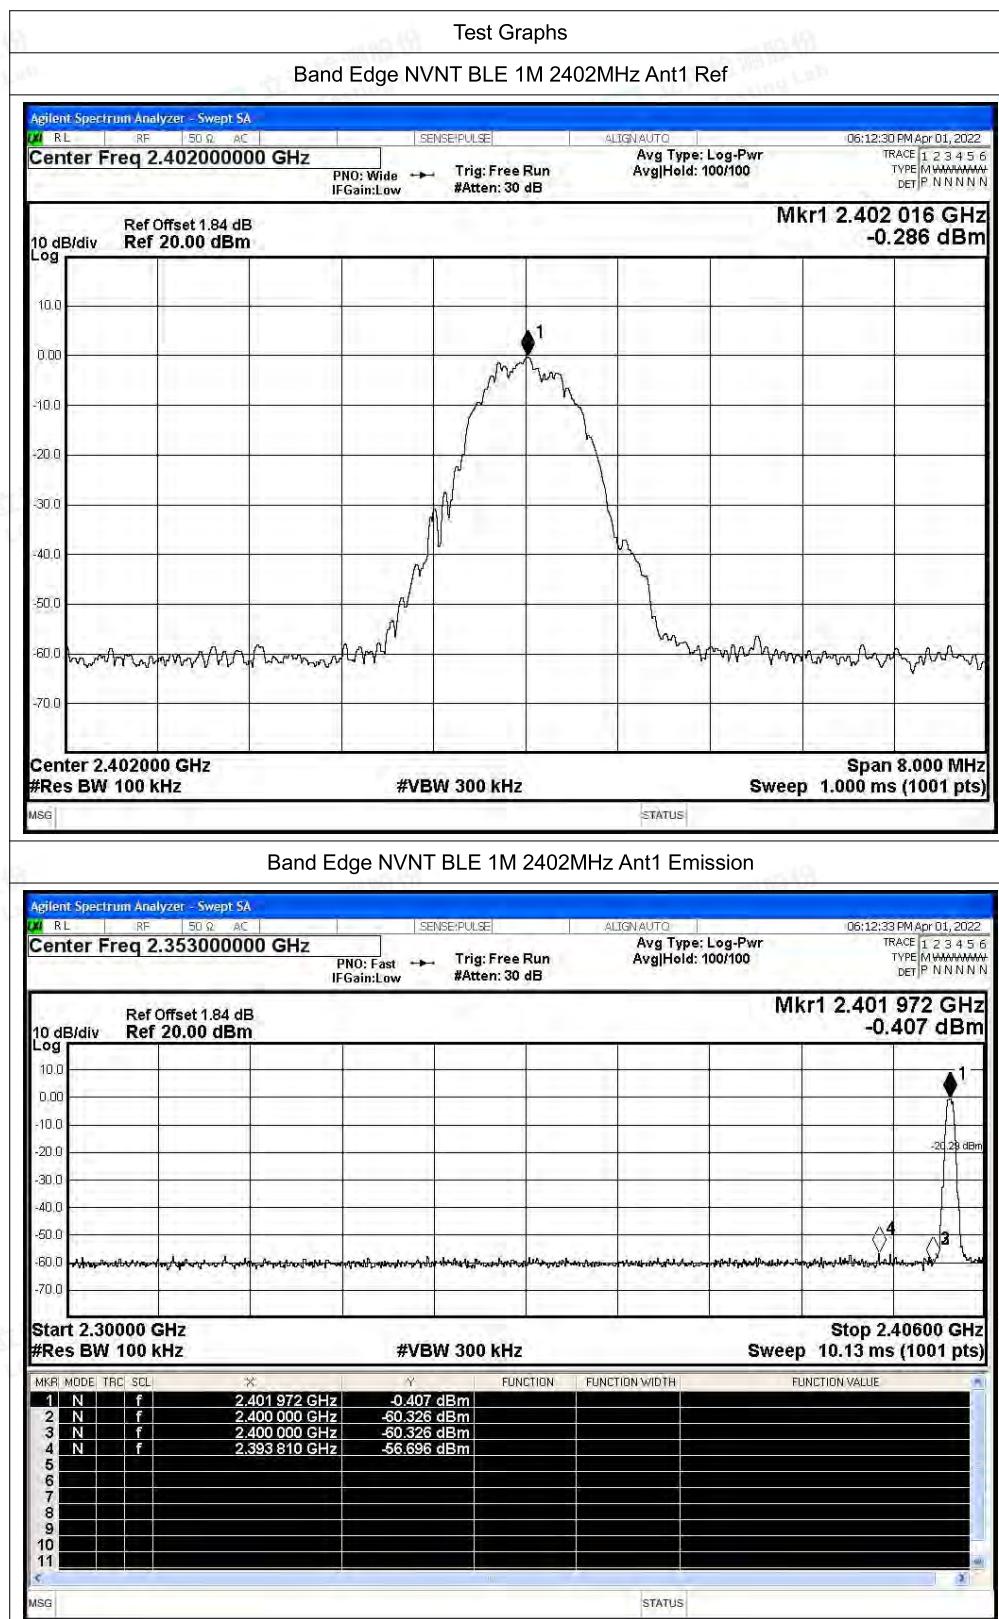

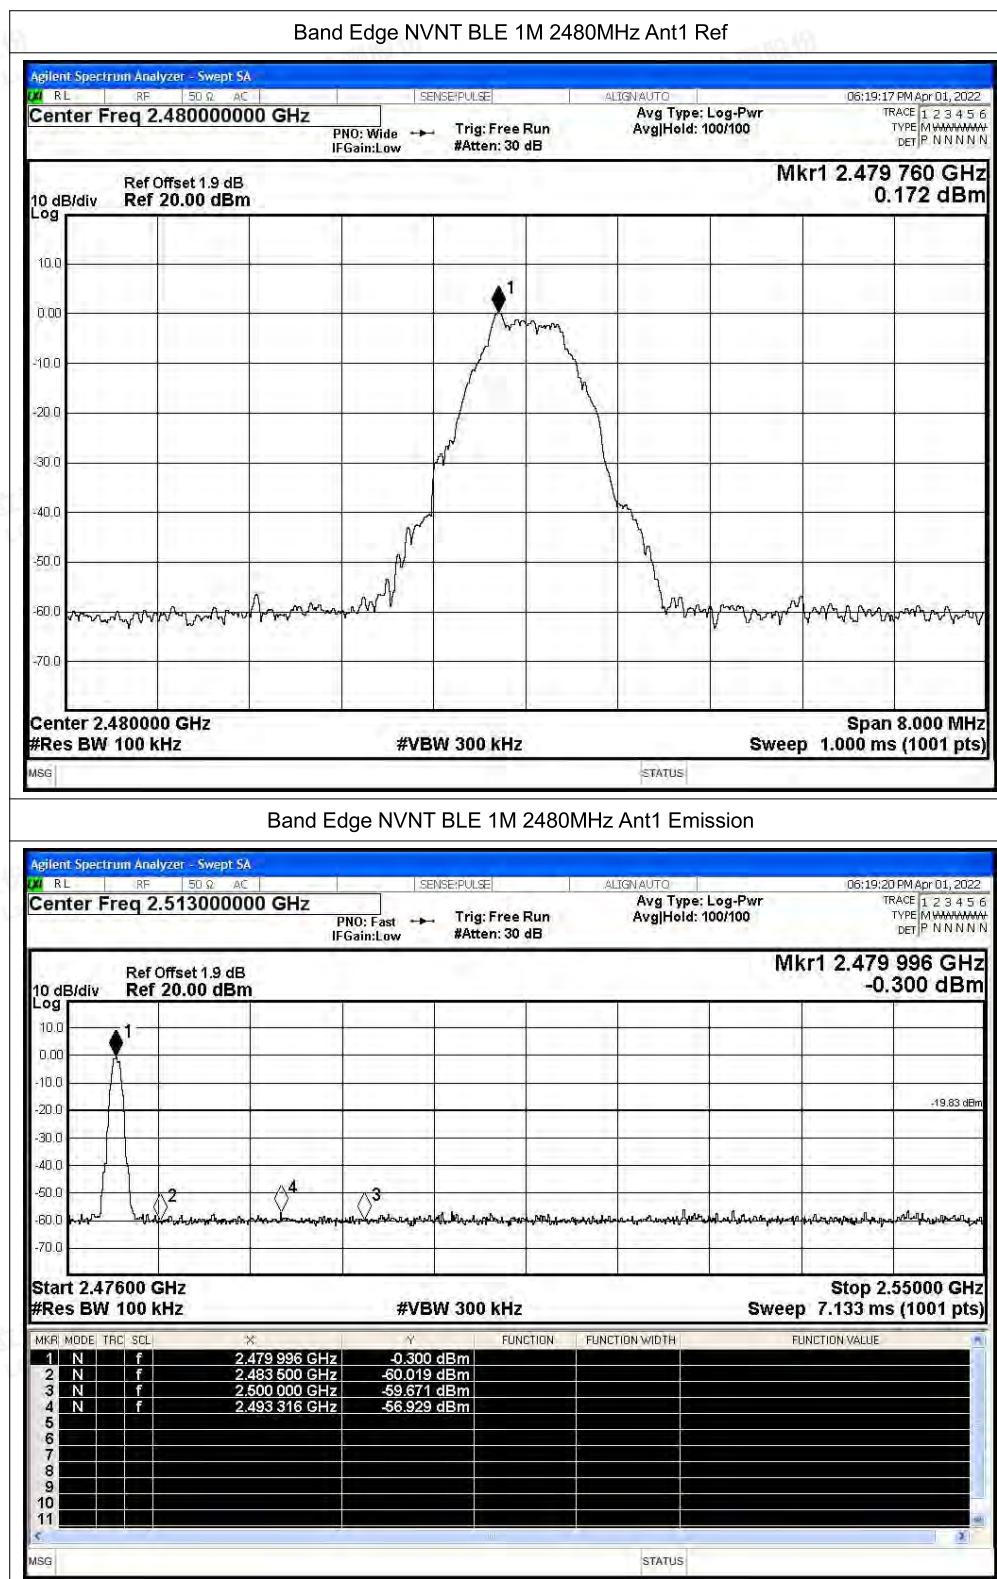

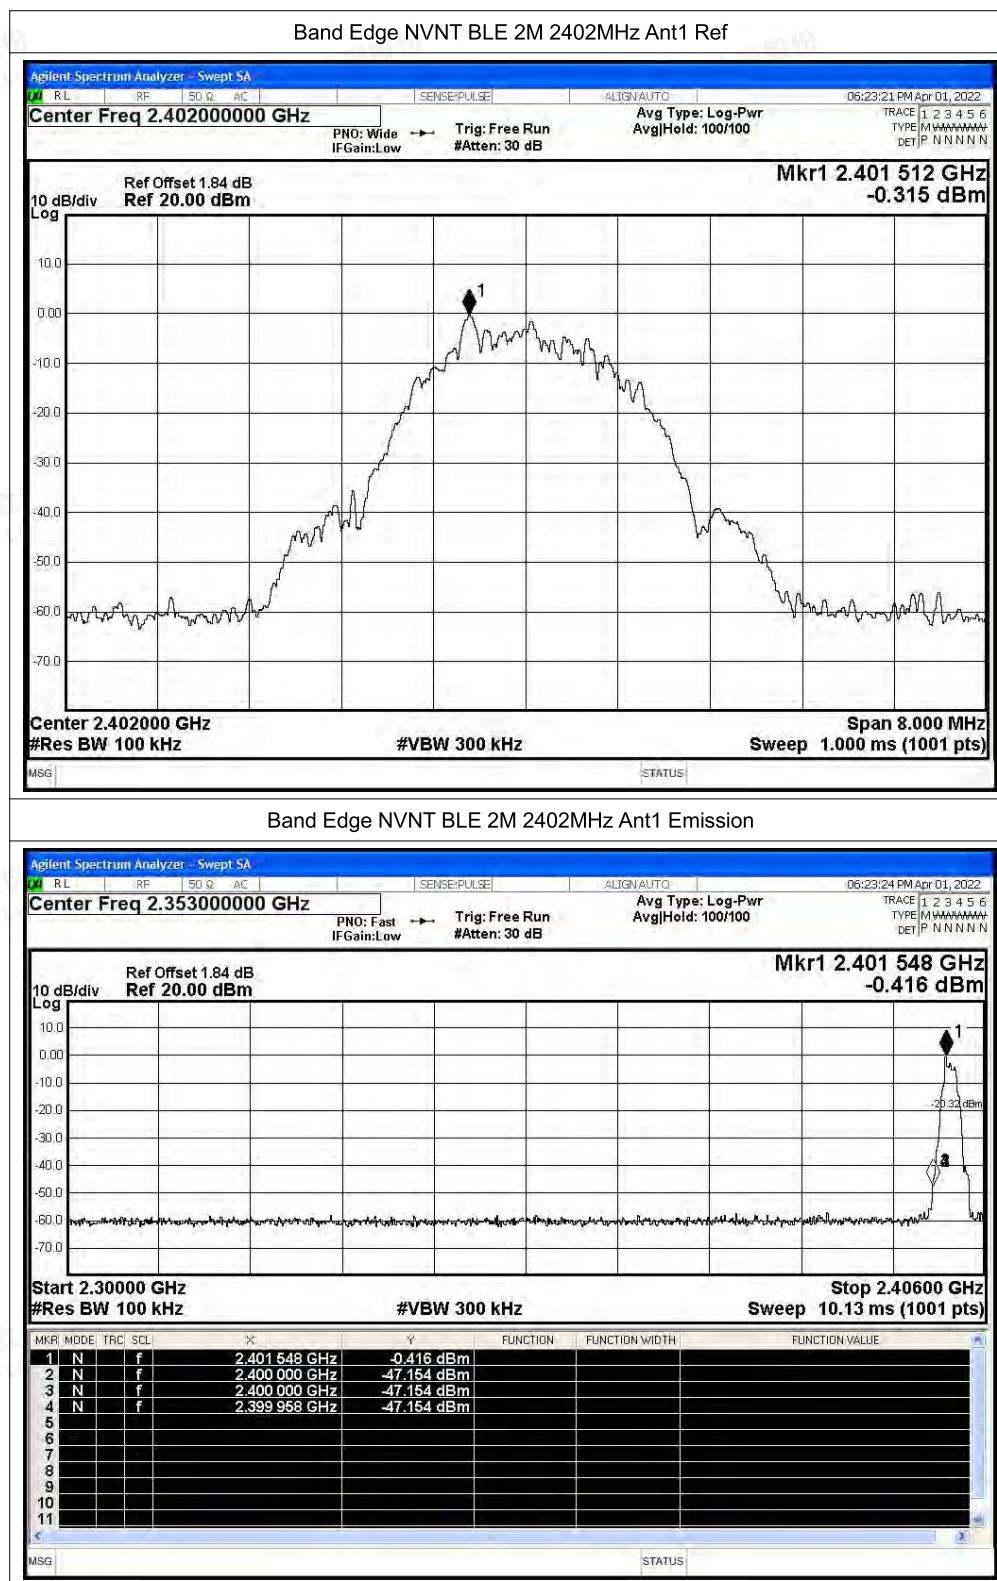

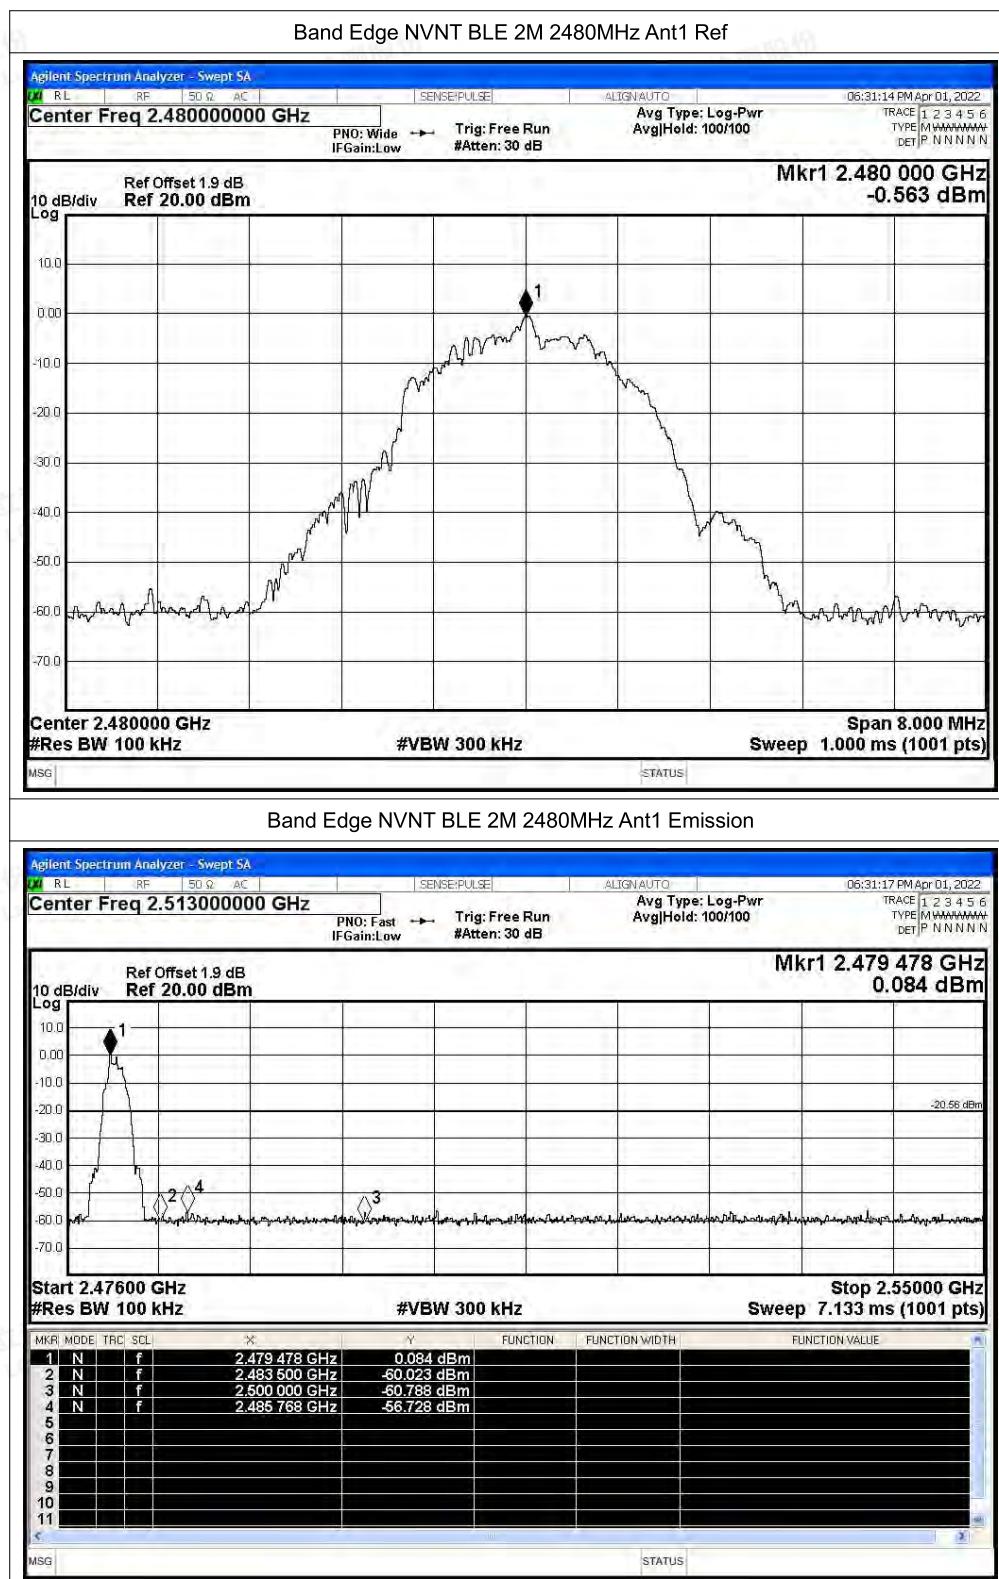






A.5 Conducted Spurious Emission


Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE 1M	2402	Ant1	-56.12	-20	Pass
NVNT	BLE 1M	2440	Ant1	-55.86	-20	Pass
NVNT	BLE 1M	2480	Ant1	-56.3	-20	Pass
NVNT	BLE 2M	2402	Ant1	-55.25	-20	Pass
NVNT	BLE 2M	2440	Ant1	-56.17	-20	Pass
NVNT	BLE 2M	2480	Ant1	-55.49	-20	Pass




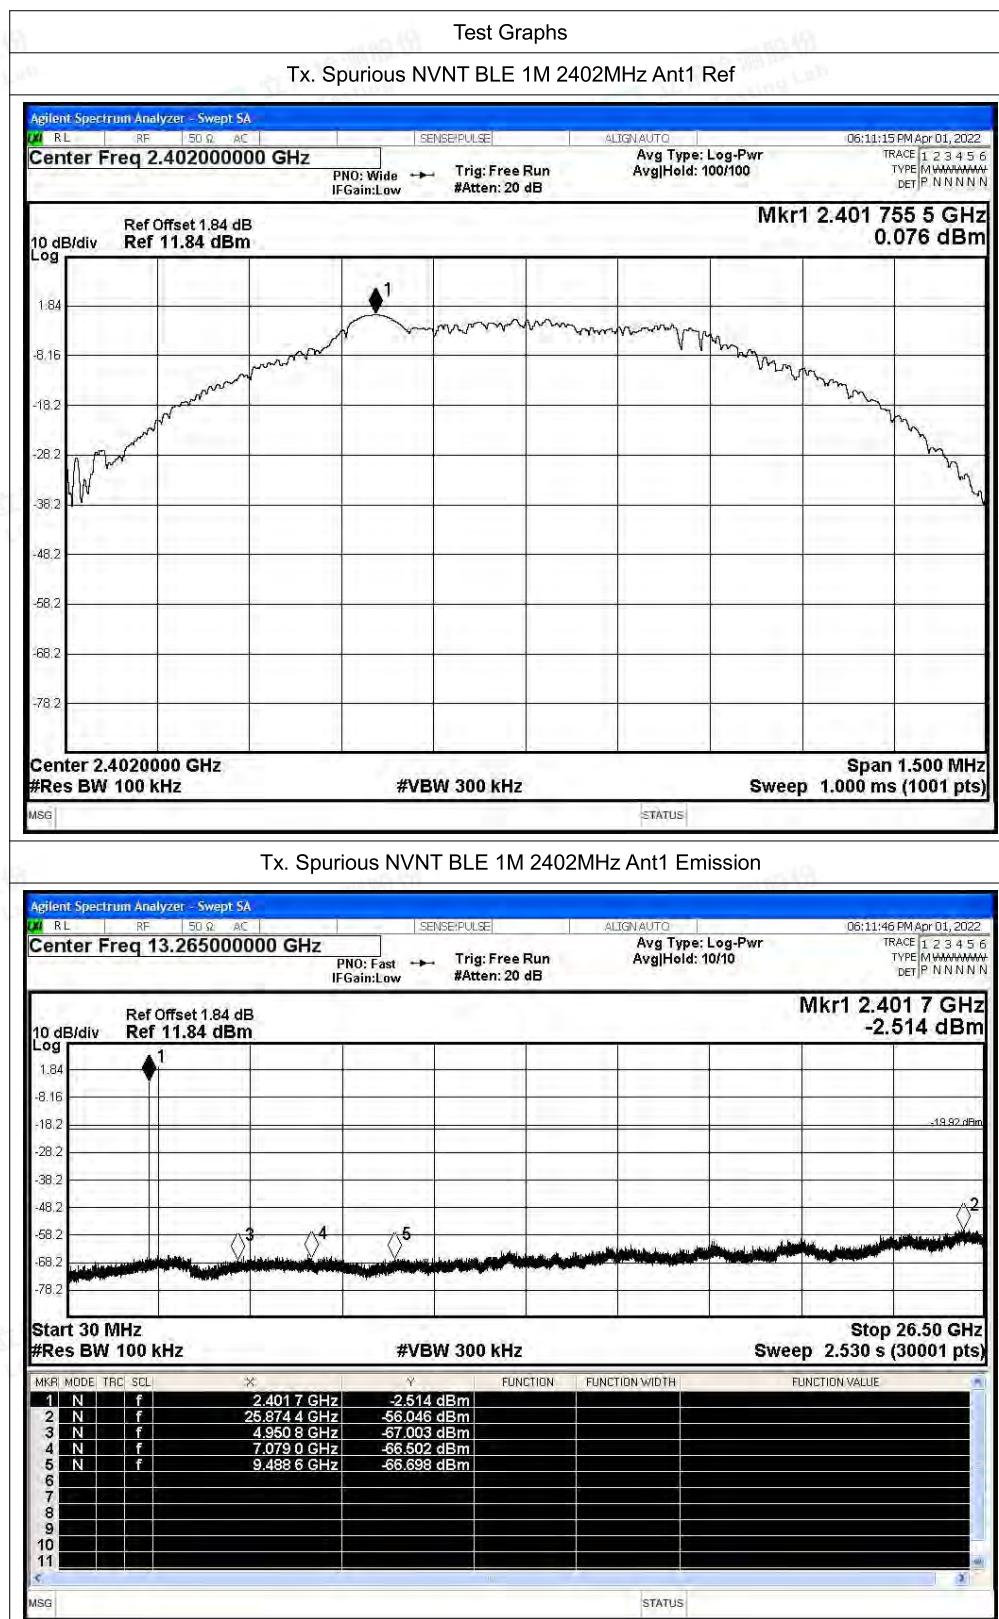


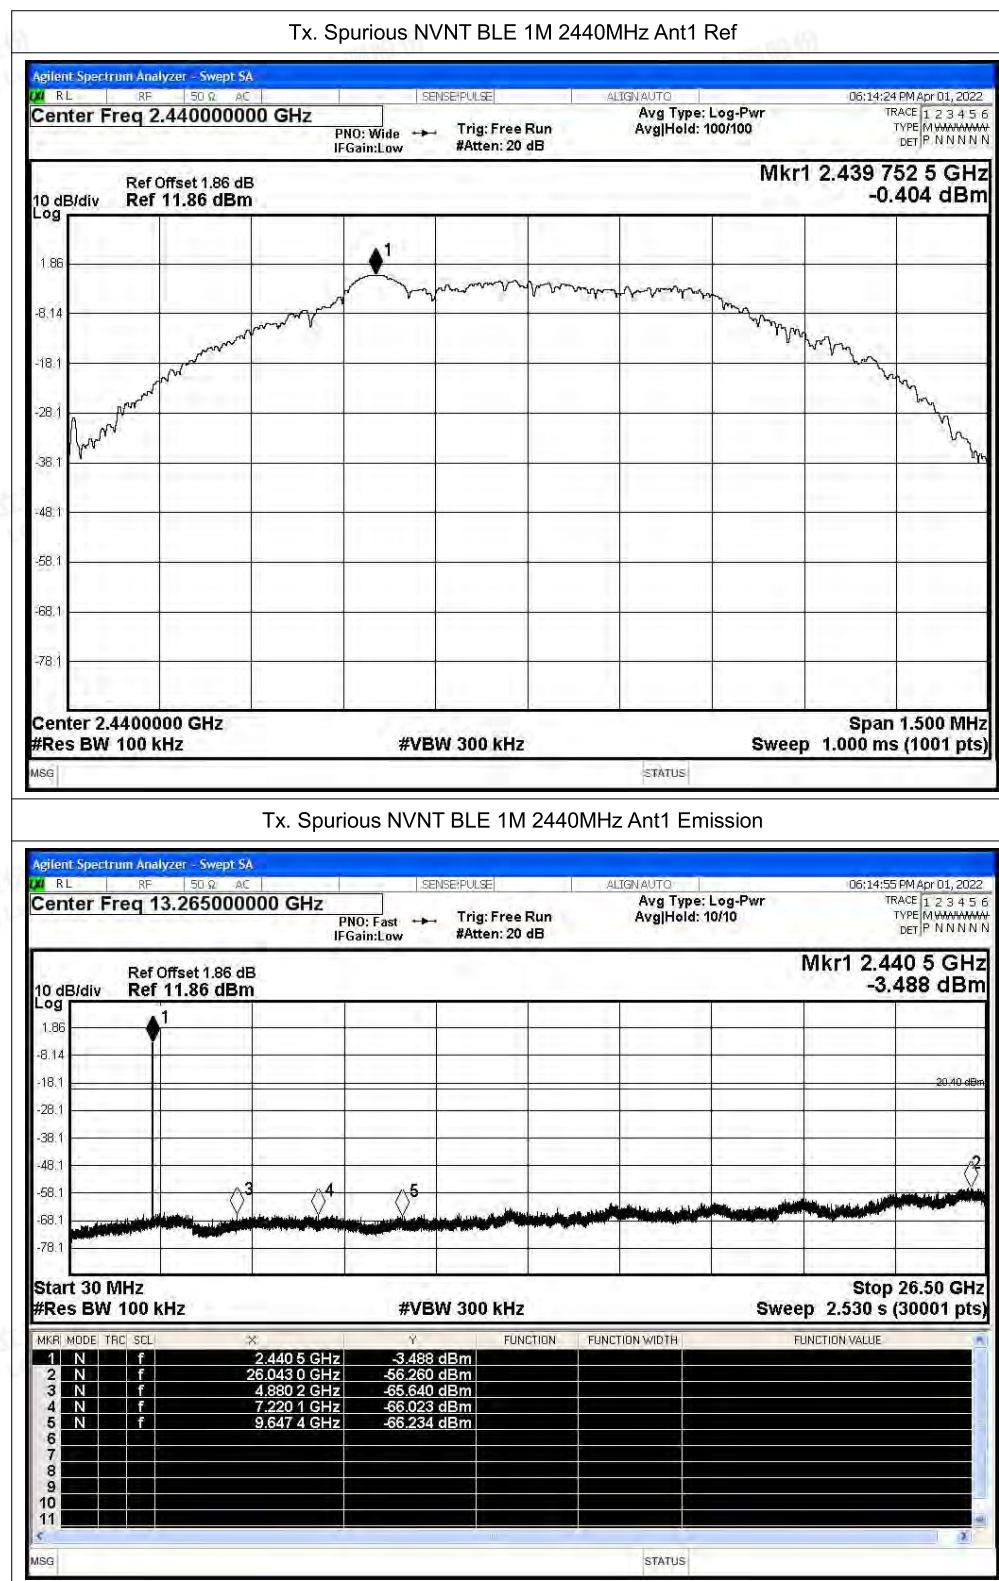

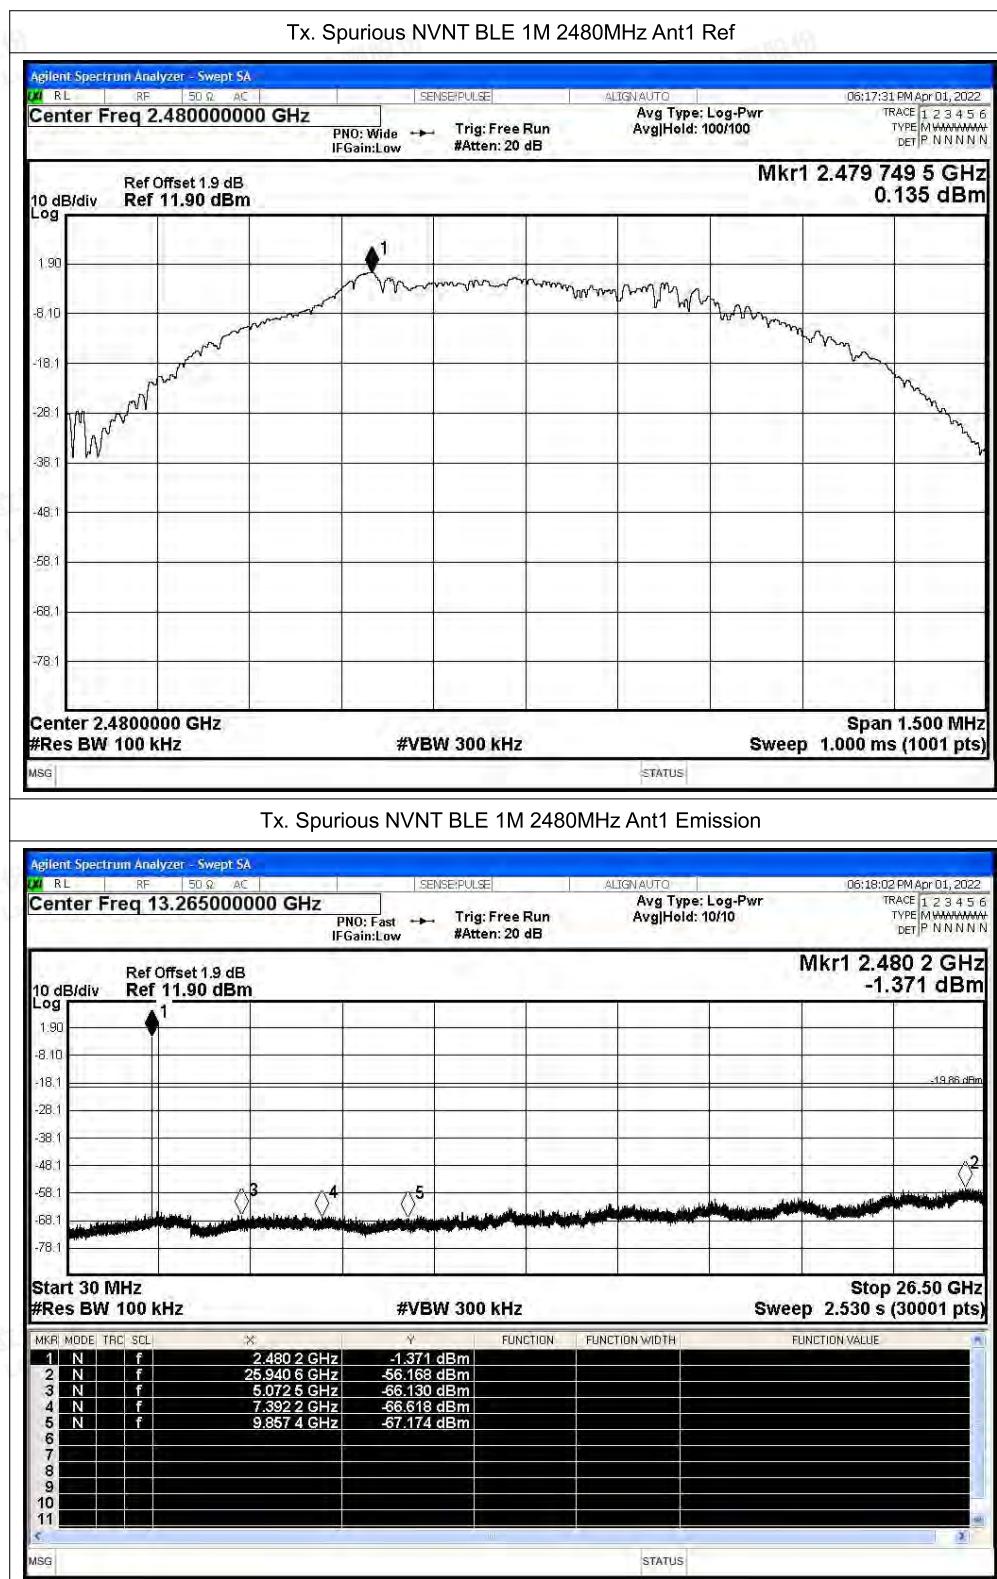

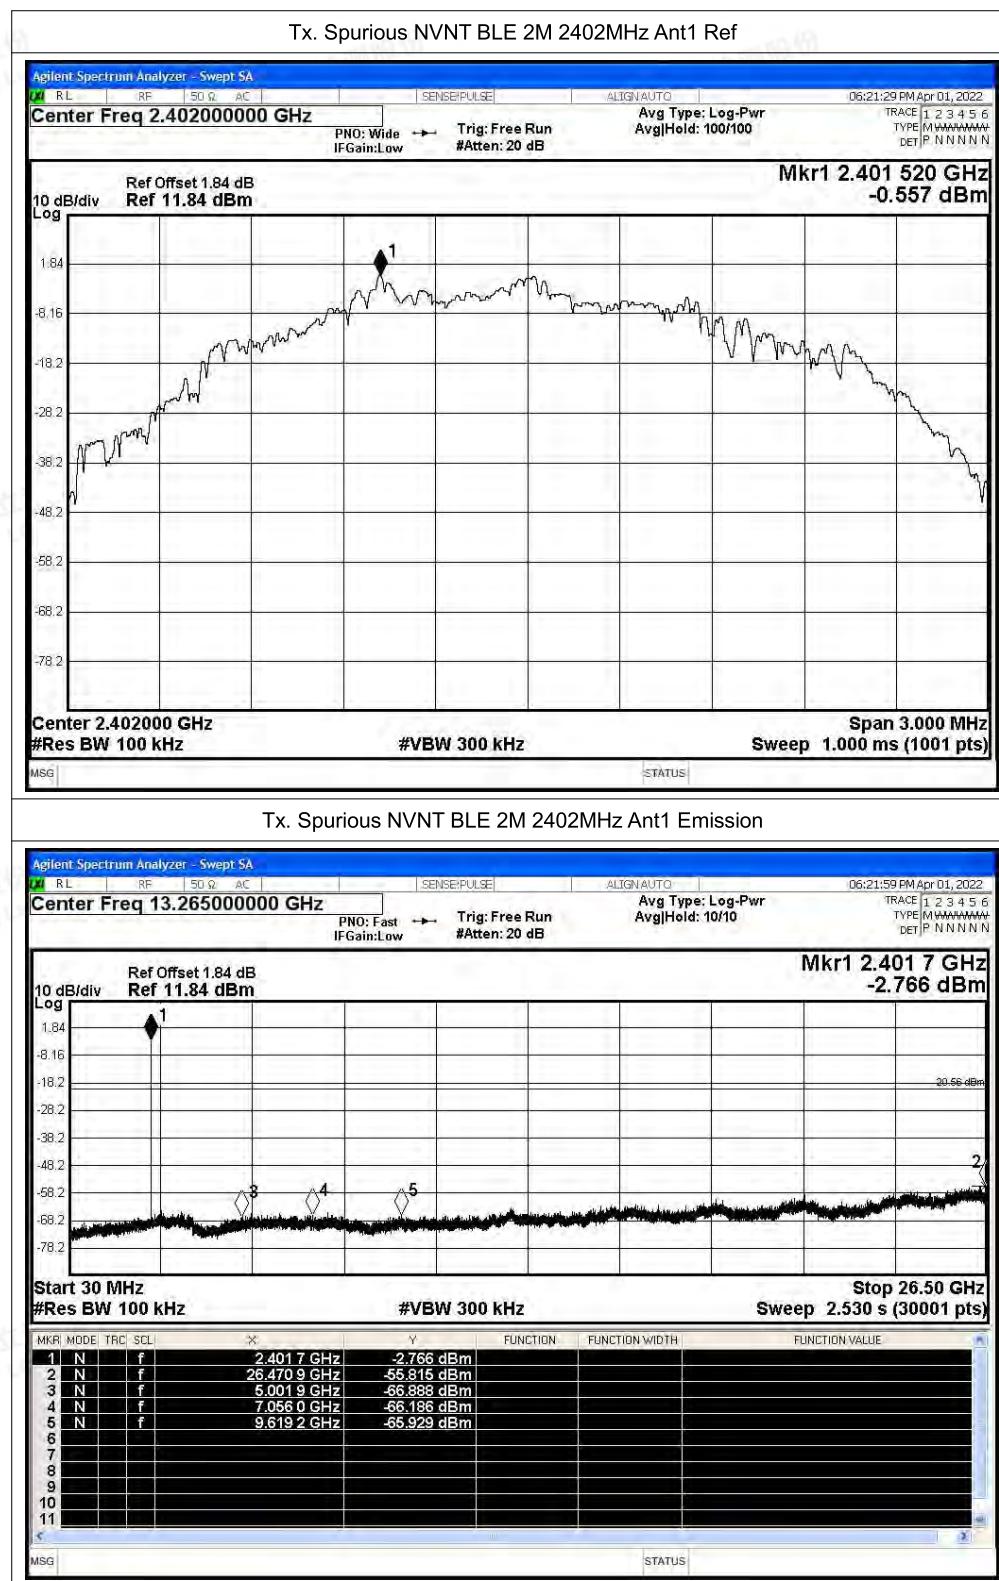

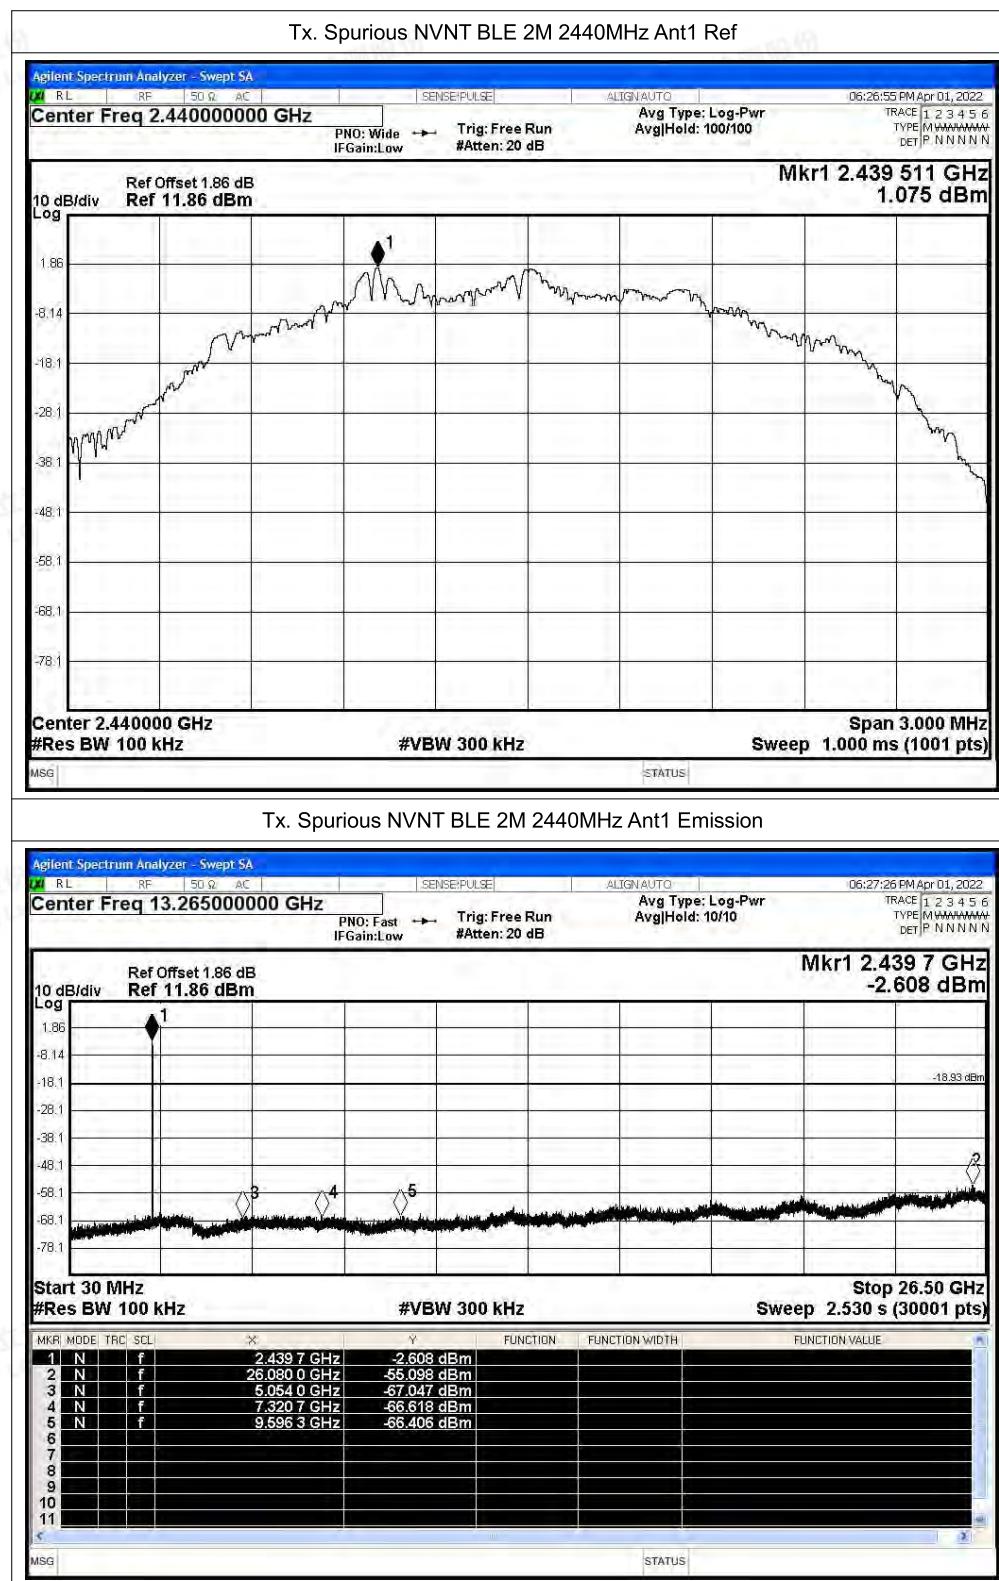

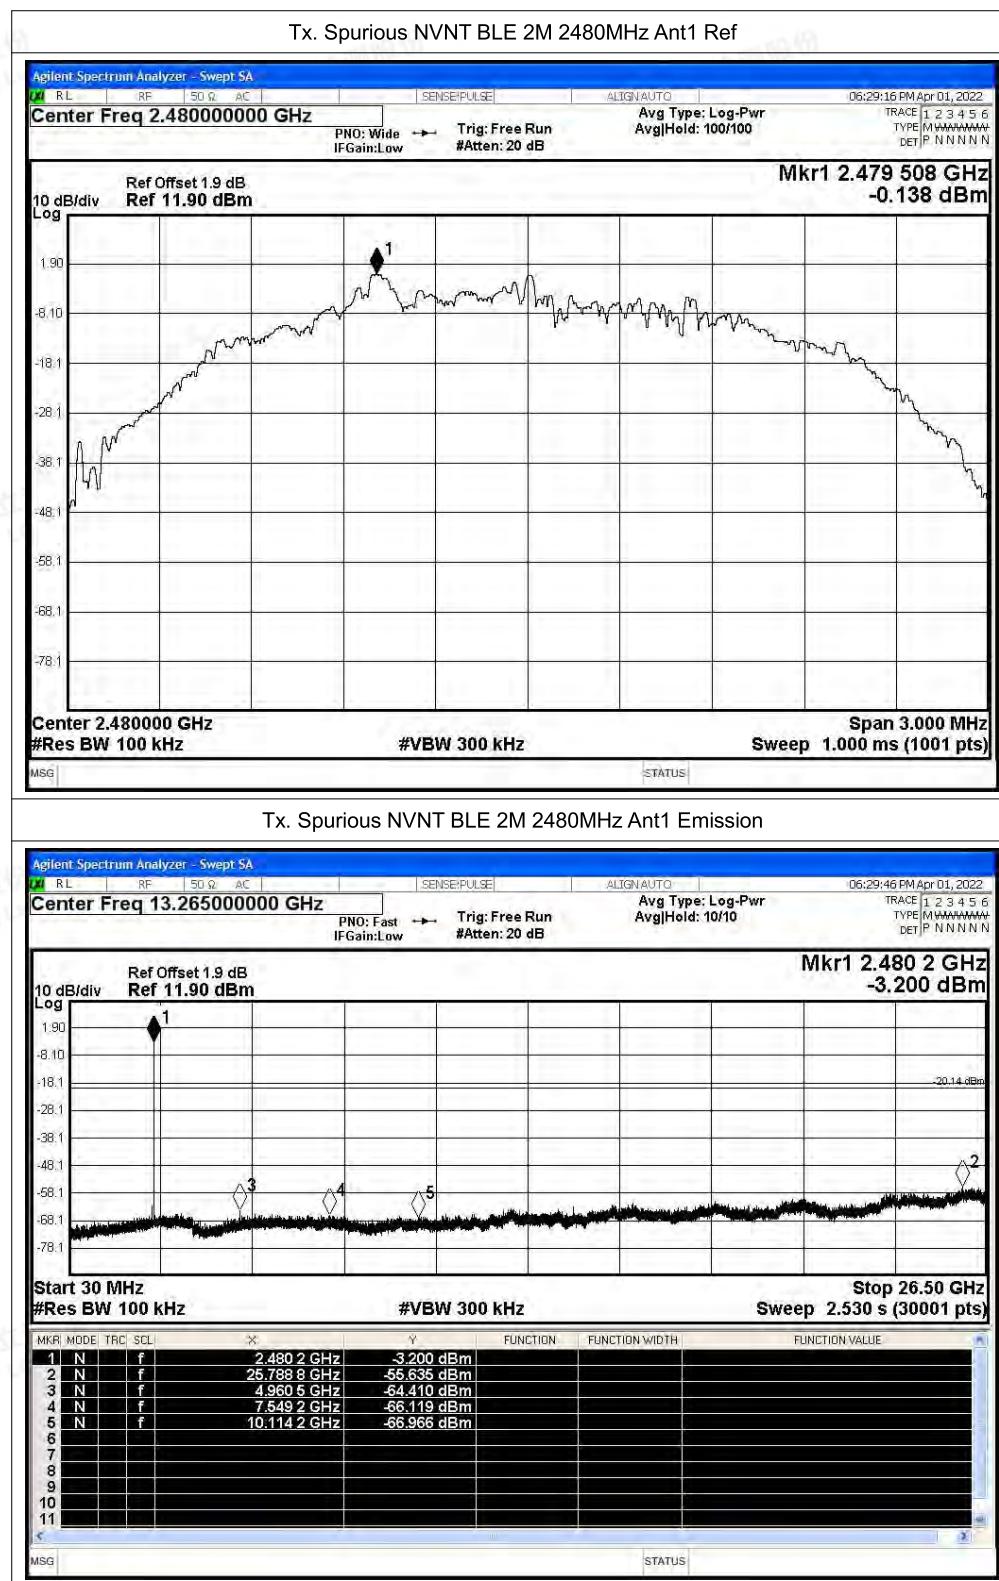






A.6 Duty Cycle

Condition	Mode	Frequency (MHz)	Antenna	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)
NVNT	BLE 1M	2402	Ant1	31.88	4.96	2.51
NVNT	BLE 1M	2440	Ant1	31.88	4.96	2.51
NVNT	BLE 1M	2480	Ant1	31.84	4.97	2.51
NVNT	BLE 2M	2402	Ant1	32.64	4.86	4.9
NVNT	BLE 2M	2440	Ant1	32.64	4.86	4.9
NVNT	BLE 2M	2480	Ant1	32.64	4.86	4.9



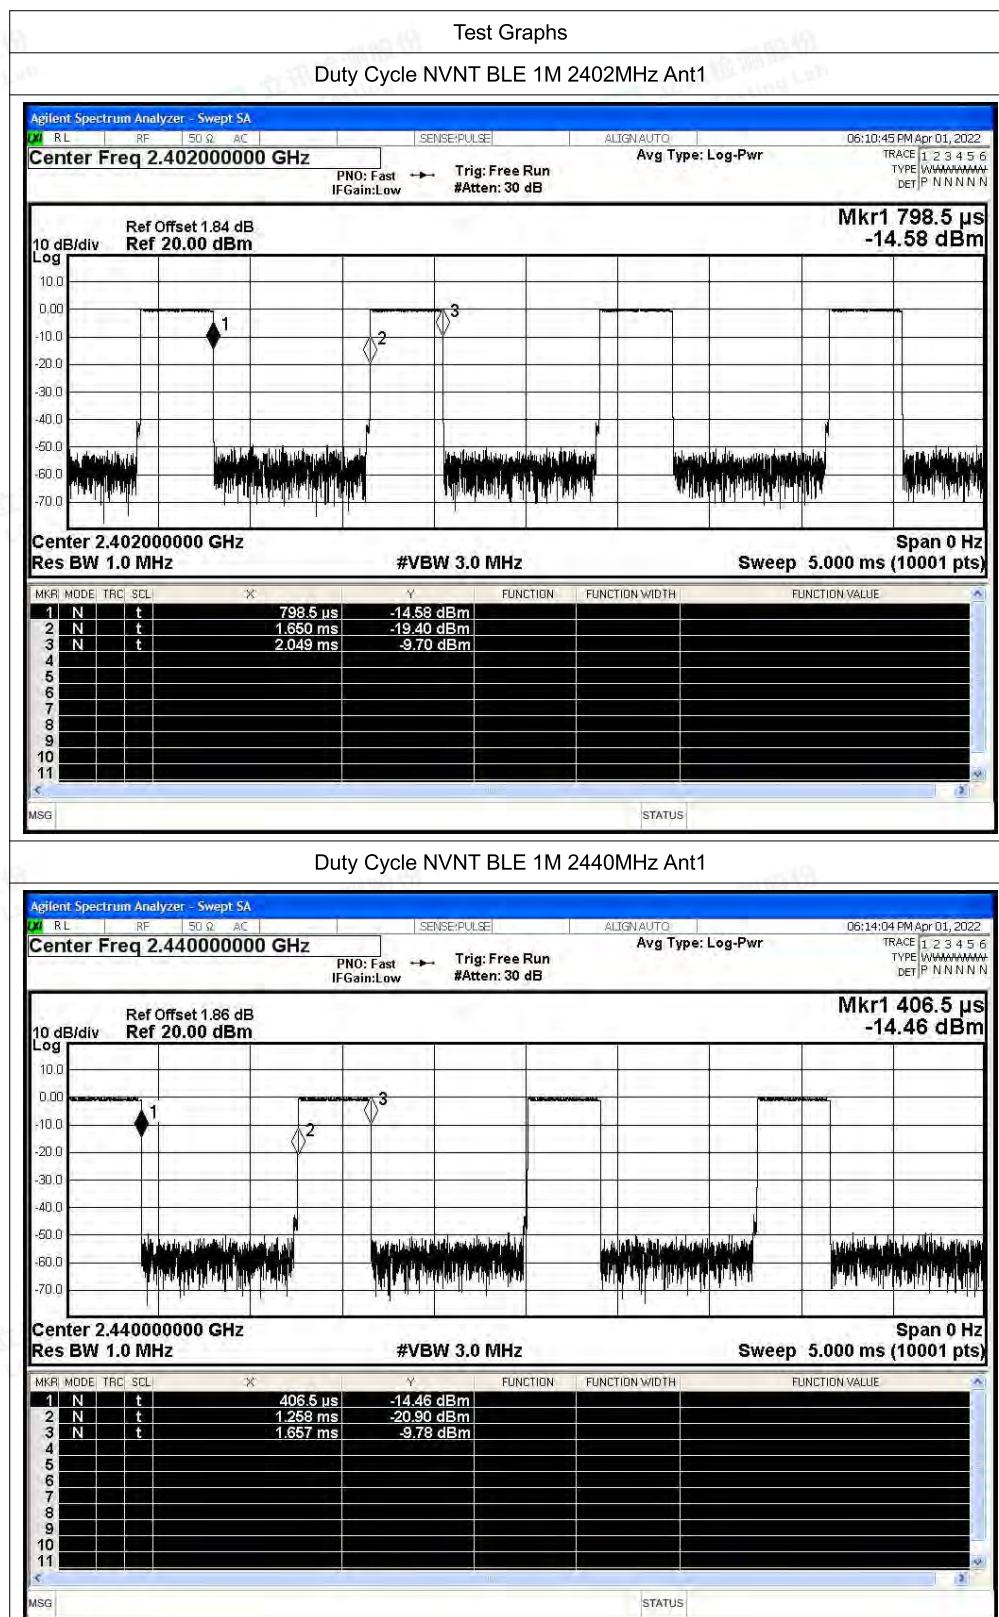

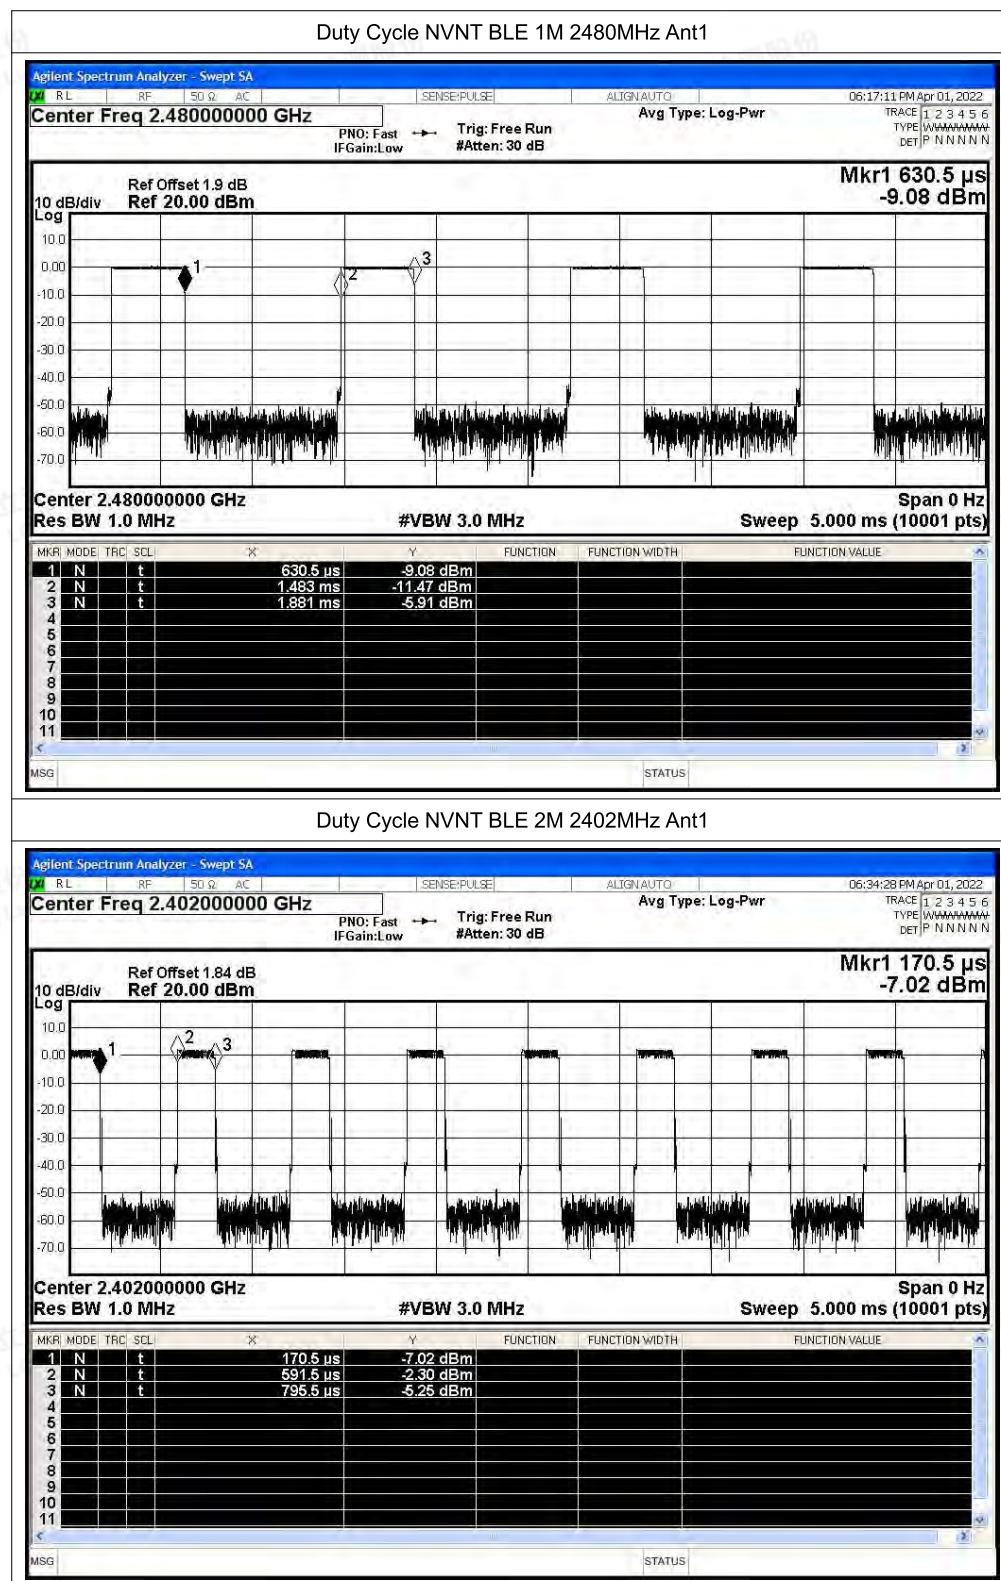

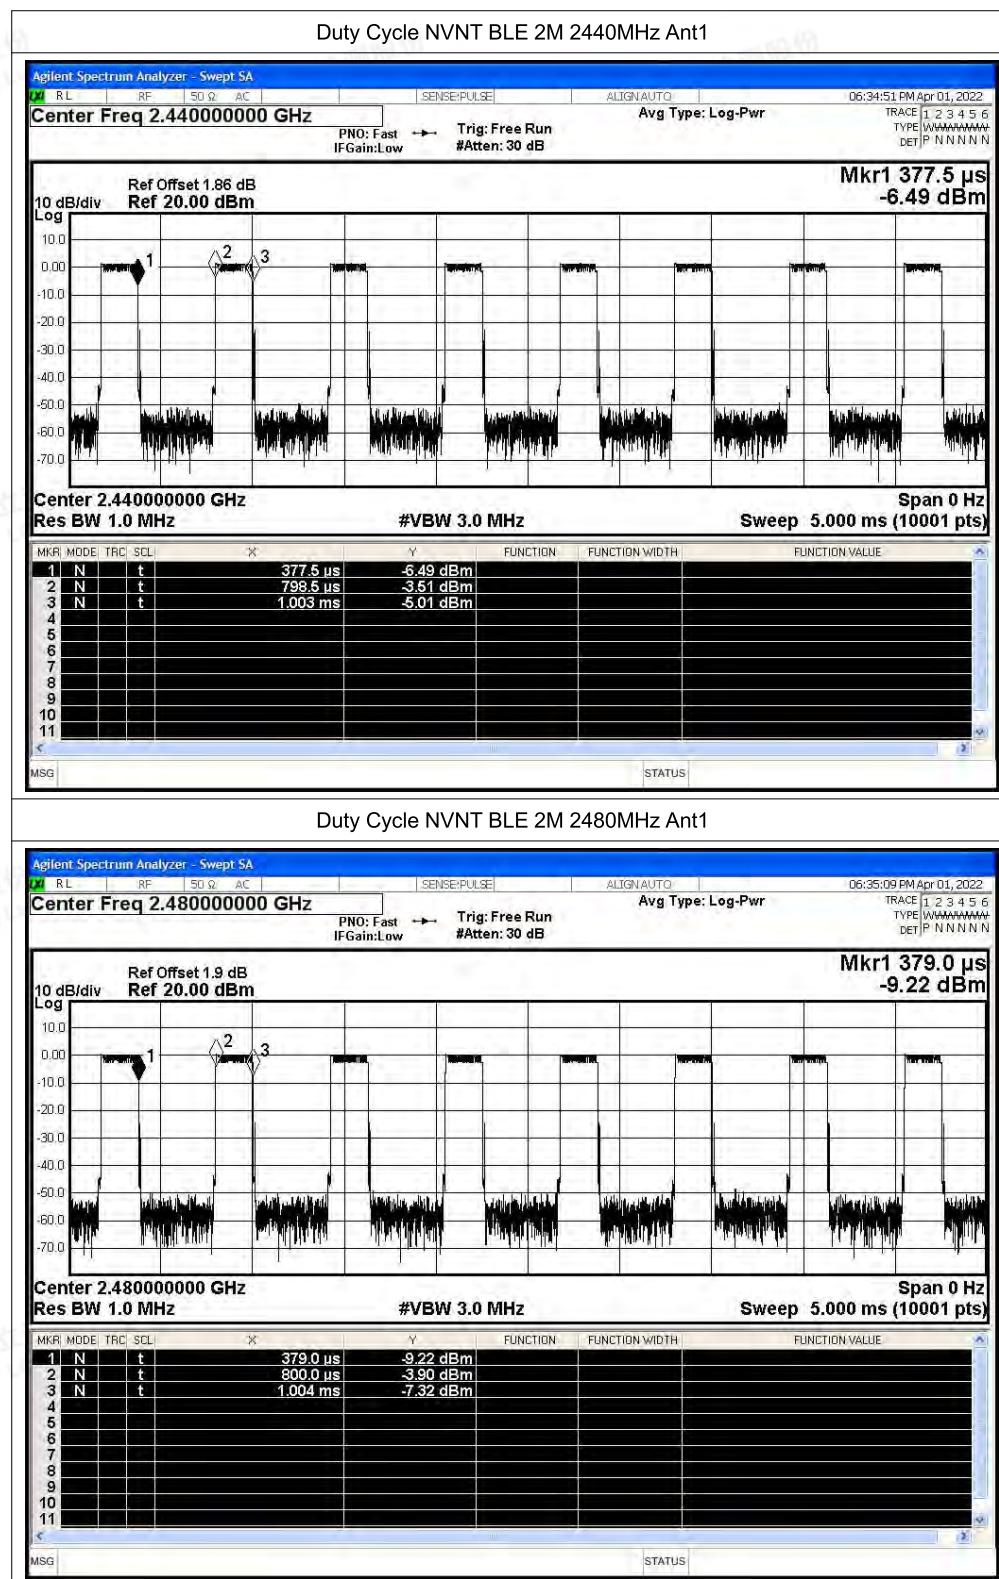



A.7 Emissions in Restricted Bands

Condition	Mode	Frequency (MHz)	Antenna	Spur Freq (MHz)	Power (dBm)	Gain (dBi)	E (dBuV/m)	Detector	Limit (dBuV/m)	Verdict
NVNT	BLE 1M	2402	Ant1	2310	-50.77	2	46.49	Peak	74	Pass
NVNT	BLE 1M	2402	Ant1	2310	-59.91	2	37.35	Average	54	Pass
NVNT	BLE 1M	2402	Ant1	2371.656	-47.53	2	49.73	Peak	74	Pass
NVNT	BLE 1M	2402	Ant1	2384.8	-59.18	2	38.08	Average	54	Pass
NVNT	BLE 1M	2402	Ant1	2390	-49.25	2	48.01	Peak	74	Pass
NVNT	BLE 1M	2402	Ant1	2390	-59.53	2	37.73	Average	54	Pass
NVNT	BLE 1M	2480	Ant1	2483.5	-49.15	2	48.11	Peak	74	Pass
NVNT	BLE 1M	2480	Ant1	2483.5	-59.04	2	38.22	Average	54	Pass
NVNT	BLE 1M	2480	Ant1	2485.398	-46.98	2	50.28	Peak	74	Pass
NVNT	BLE 1M	2480	Ant1	2486.434	-58.77	2	38.49	Average	54	Pass
NVNT	BLE 1M	2480	Ant1	2500	-50.8	2	46.46	Peak	74	Pass
NVNT	BLE 1M	2480	Ant1	2500	-58.95	2	38.31	Average	54	Pass
NVNT	BLE 2M	2402	Ant1	2310	-50.97	2	46.29	Peak	74	Pass
NVNT	BLE 2M	2402	Ant1	2329.362	-48.22	2	49.04	Peak	74	Pass
NVNT	BLE 2M	2402	Ant1	2386.284	-58.32	2	38.94	Average	54	Pass
NVNT	BLE 2M	2402	Ant1	2390	-51.25	2	46.01	Peak	74	Pass
NVNT	BLE 2M	2402	Ant1	2390	-59.09	2	38.17	Average	54	Pass
NVNT	BLE 2M	2480	Ant1	2483.5	-51.82	2	45.44	Peak	74	Pass
NVNT	BLE 2M	2480	Ant1	2483.5	-58.18	2	39.08	Average	54	Pass
NVNT	BLE 2M	2480	Ant1	2485.102	-44.4	2	52.86	Peak	74	Pass
NVNT	BLE 2M	2480	Ant1	2483.77	-57.9	2	39.36	Average	54	Pass
NVNT	BLE 2M	2480	Ant1	2500	-50.18	2	47.08	Peak	74	Pass
NVNT	BLE 2M	2480	Ant1	2500	-59.06	2	38.2	Average	54	Pass



